



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Operator Certification Data Report

05/20/2025

Operator

I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

NAME: MELISSA GUIDRY

Signed on: 03/14/2025

Title: Advisor Regulatory Sr.

Street Address: 5 GREENWAY PLAZA SUITE 110

City: HOUSTON

State: TX

Zip: 77026

Phone: (713)497-2481

Email address: MELISSA_GUIDRY@OXY.COM

Field

Representative Name:

Street Address:

City:

State:

Zip:

Phone:

Email address:



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Application Data

05/20/2025

APD ID: 10400104066**Submission Date:** 03/14/2025

Highlighted data
reflects the most
recent changes
[Show Final Text](#)

Operator Name: OXY USA INCORPORATED**Well Name:** STRESSED DESSERTS 36_1 FEDERAL COM **Well Number:** 4H**Well Type:** OIL WELL**Well Work Type:** Drill

Section 1 - General

APD ID: 10400104066**Tie to previous NOS?** N**Submission Date:** 03/14/2025**BLM Office:** Carlsbad**User:** MELISSA GUIDRY**Title:** Advisor Regulatory Sr.**Federal/Indian APD:** FED**Is the first lease penetrated for production Federal or Indian?** FED**Lease number:** NMNM43556**Lease Acres:****Surface access agreement in place?****Allotted?****Reservation:****Agreement in place?** NO**Federal or Indian agreement:****Agreement number:****Agreement name:****Keep application confidential?** N**Permitting Agent?** NO**APD Operator:** OXY USA INCORPORATED**Operator letter of**

Operator Info

Operator Organization Name: OXY USA INCORPORATED**Operator Address:** P.O. BOX 1002**Zip:** 93276-1002**Operator PO Box:****Operator City:** TUPMAN**State:** CA**Operator Phone:** (661)763-6046**Operator Internet Address:**

Section 2 - Well Information

Well in Master Development Plan? NO**Master Development Plan name:****Well in Master SUPO?** NO**Master SUPO name:****Well in Master Drilling Plan?** NO**Master Drilling Plan name:****Well Name:** STRESSED DESSERTS 36_1 FEDERAL COM**Well Number:** 4H**Well API Number:****Field/Pool or Exploratory?** Field and Pool**Field Name:** BILBREY BASIN**Pool Name:** BONE SPRING

Operator Name: OXY USA INCORPORATED**Well Name:** STRESSED DESSERTS 36_1 FEDERAL COM **Well Number:** 4H**Is the proposed well in an area containing other mineral resources?** USEABLE WATER,NATURAL GAS,OIL,POTASH**Is the proposed well in a Helium production area?** N **Use Existing Well Pad?** N **New surface disturbance?****Type of Well Pad:** MULTIPLE WELL**Multiple Well Pad Name:****Number:** PAD 2

LSTTNK_21S31E_36

Well Class: HORIZONTAL**Number of Legs:** 1**Well Work Type:** Drill**Well Type:** OIL WELL**Describe Well Type:****Well sub-Type:** INFILL**Describe sub-type:****Distance to town:** 23 Miles**Distance to nearest well:** 30 FT**Distance to lease line:** 2528 FT**Reservoir well spacing assigned acres Measurement:** 959.24 Acres**Well plat:** STRESSEDDESSERTS36_1FEDCOM4H_C102_20250314103911.pdf

STRESSEDDESSERTS36_1FEDCOM4H_SitePlan_20250314103921.pdf

Well work start Date: 03/01/2026**Duration:** 45 DAYS**Section 3 - Well Location Table****Survey Type:** RECTANGULAR**Describe Survey Type:****Datum:** NAD83**Vertical Datum:** NAVD88**Survey number:****Reference Datum:** GROUND LEVEL

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce from this
SHL Leg #1	2528	FSL	1674	FEL	21S	31E	36	Aliquot NWSE	32.4347348	-103.7283505	EDD Y	NEW MEXI CO	NEW MEXI CO	S	STATE	3605			N
KOP Leg #1	2592	FSL	380	FEL	21S	31E	36	Aliquot NESE	32.434909	-103.7241553	EDD Y	NEW MEXI CO	NEW MEXI CO	S	STATE	-5772	9523	9377	N

Operator Name: OXY USA INCORPORATED**Well Name:** STRESSED DESSERTS 36_1 FEDERAL COM **Well Number:** 4H

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce from this
PPP Leg #1-1	2542	FSL	380	FEL	21S	31E	36	Aliquot NESE	32.4347715	- 103.7241554	EDD Y	NEW MEXICO	NEW MEXICO	S	STATE	- 6330	10429	9935	Y
PPP Leg #1-2	0	FSL	380	FEL	22S	31E	1	Lot 1	32.4277851	- 103.7241587	EDD Y	NEW MEXICO	NEW MEXICO	F	NMNM 43556	- 6330	12431	9935	Y
PPP Leg #1-3	2640	FNL	379	FEL	22S	31E	1	Aliquot NESE	32.4205299	- 103.7241622	EDD Y	NEW MEXICO	NEW MEXICO	F	NMNM 12845	- 6330	15070	9935	Y
EXIT Leg #1	100	FSL	380	FEL	22S	31E	1	Aliquot SESE	32.4135417	- 103.7241656	EDD Y	NEW MEXICO	NEW MEXICO	F	NMNM 12845	- 6330	17613	9935	Y
BHL Leg #1	20	FSL	380	FEL	22S	31E	1	Aliquot SESE	32.4133218	- 103.7241656	EDD Y	NEW MEXICO	NEW MEXICO	F	NMNM 12845	- 6330	17693	9935	N



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Drilling Plan Data Report

05/20/2025

APD ID: 10400104066

Submission Date: 03/14/2025

Highlighted data
reflects the most
recent changes

Operator Name: OXY USA INCORPORATED

Well Name: STRESSED DESSERTS 36_1 FEDERAL COM Well Number: 4H

Well Type: OIL WELL

Well Work Type: Drill

[Show Final Text](#)

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical	Measured Depth	Lithologies	Mineral Resources	Producing Formatio
15622039	RUSTLER	3605	776	776	ANHYDRITE, DOLOMITE, SHALE	USEABLE WATER	N
15622040	SALADO	2562	1043	1043	ANHYDRITE, DOLOMITE, HALITE, SHALE	OTHER : SALT	N
15622041	CASTILE	1013	2592	2592	ANHYDRITE	OTHER : SALT	N
15622042	DELAWARE	-846	4451	4451	LIMESTONE, SANDSTONE, SILTSTONE	NATURAL GAS, OIL, OTHER : BRINE	Y
15622043	BELL CANYON	-923	4528	4528	SANDSTONE, SILTSTONE	NATURAL GAS, OIL, OTHER : BRINE	Y
15622044	CHERRY CANYON	-1810	5415	5419	SANDSTONE, SILTSTONE	NATURAL GAS, OIL, OTHER : BRINE	Y
15622045	BRUSHY CANYON	-3073	6678	6721	SANDSTONE, SILTSTONE	OTHER : LOSSES	N
15622046	BONE SPRING	-4838	8443	8554	LIMESTONE, SANDSTONE, SILTSTONE	NATURAL GAS, OIL	Y
15622047	BONE SPRING 1ST	-5876	9481	9632	LIMESTONE, SANDSTONE, SILTSTONE	NATURAL GAS, OIL	Y

Section 2 - Blowout Prevention

Pressure Rating (PSI): 5M

Rating Depth: 9935

Equipment: 13-5/8" 5M Annular, 5M Blind Ram, 5M Double Ram

Requesting Variance? YES

Variance request: Request for the use of a flexible choke line from the BOP to Choke Manifold.

Testing Procedure: BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per 43 CFR part 3170 Subpart 3172 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested. Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. OXY requests permission to adjust the BOP break testing requirements as per the agreement reached in the OXY/BLM meeting on September 5, 2019. See the attached BOP Break Testing variance.

Operator Name: OXY USA INCORPORATED**Well Name:** STRESSED DESSERTS 36_1 FEDERAL COM **Well Number:** 4H**Choke Diagram Attachment:**

STRESSEDDESSERTS36_1FEDCOM4H_ChkManifolds_20250314105523.pdf

BOP Diagram Attachment:

STRESSEDDESSERTS36_1FEDCOM4H_BOP_20250314105530.pdf

STRESSEDDESSERTS36_1FEDCOM4H_13inADAPT_4S_10x15_20250314105536.pdf

STRESSEDDESSERTS36_1FEDCOM4H_FlexHoseCert_20250314105606.pdf

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	17.5	13.375	NEW	API	N	0	836	0	836	3605	2769	836	J-55	54.5	BUTT	1	1.1	BUOY	1.4	BUOY	1.4
2	OTHER - SALT	12.25	10.75	NEW	API	N	0	4551	0	4551	3698	-946	4551	HCL -80	45.5	OTHER - BTC-SC	1	1.1	BUOY	1.4	BUOY	1.4
3	INTERMEDIATE	9.875	7.625	NEW	API	N	0	9423	0	9277	3698	-5672	9423	HCL -80	26.4	BUTT	1	1.1	BUOY	1.4	BUOY	1.4
4	PRODUCTION	6.75	5.5	NEW	API	N	0	17693	0	9935	3605	-6330	17693	P-110	20	OTHER - SPRINT-SF	1	1.1	BUOY	1.4	BUOY	1.4

Casing Attachments**Casing ID:** 1 **String** SURFACE**Inspection Document:****Spec Document:****Tapered String Spec:****Casing Design Assumptions and Worksheet(s):**

STRESSEDDESSERTS36_1FEDCOM4H_CsgCriteria_20250314105637.pdf

Operator Name: OXY USA INCORPORATED

Well Name: STRESSED DESSERTS 36_1 FEDERAL COM Well Number: 4H

Casing Attachments

Casing ID: 2 String OTHER - SALT

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):
STRESSEDDESSERTS36_1FEDCOM4H_CsgCriteria_20250314105719.pdf

Casing ID: 3 String INTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):
STRESSEDDESSERTS36_1FEDCOM4H_CsgCriteria_20250314105800.pdf

Casing ID: 4 String PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):
STRESSEDDESSERTS36_1FEDCOM4H_CsgCriteria_20250314105859.pdf
STRESSEDDESSERTS36_1FEDCOM4H_API_BTC_SC_10.750in_45.50ppf_L80IC_20250314105906.pdf
STRESSEDDESSERTS36_1FEDCOM4H_VAM_SPRINT_SF_5.5in_20ppf_P110RY_20250314105912.pdf

Operator Name: OXY USA INCORPORATED**Well Name:** STRESSED DESSERTS 36_1 FEDERAL COM **Well Number:** 4H**Section 4 - Cement**

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	836	873	1.33	14.8	1161	100	Class C	Accelerator

OTHER	Lead	2	0	4051	639	1.73	12.9	1105	50	Class Pozz	Retarder
-------	------	---	---	------	-----	------	------	------	----	------------	----------

OTHER	Lead	1	4051	4551	85	1.33	14.8	113	20	Class C	Accelerator
-------	------	---	------	------	----	------	------	-----	----	---------	-------------

INTERMEDIATE	Lead	2	4051	6971	445	1.71	13.3	761	25	Class C	Accelerator
INTERMEDIATE	Tail		6971	9423	329	1.68	13.2	553	5	Class C	Retarder, Dispersant
PRODUCTION	Lead	1	8923	17693	496	1.84	13.3	913	25	Class C	Retarder

Section 5 - Circulating Medium**Mud System Type:** Closed**Will an air or gas system be Used?** NO**Description of the equipment for the circulating system in accordance with 43 CFR 3172:****Diagram of the equipment for the circulating system in accordance with 43 CFR 3172:**

Describe what will be on location to control well or mitigate other conditions: Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times. The following is a general list of products: Barite, Bentonite, Gypsum, Lime, Soda Ash, Caustic Soda, Nut Plug, Cedar Fiber, Cotton Seed Hulls, Drilling Paper, Salt Water Clay, CACL2. Oxy will use a closed mud system.

Describe the mud monitoring system utilized: PVT/MD Totco/Visual Monitoring**Circulating Medium Table**

Operator Name: OXY USA INCORPORATED**Well Name:** STRESSED DESSERTS 36_1 FEDERAL COM **Well Number:** 4H

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
0	836	WATER-BASED MUD	8.6	8.8							
836	4551	OTHER : SATURATED BRINE-BASED OR OIL-BASED MUD	8	10							
4551	9423	OTHER : WATER-BASED MUD OR OIL-BASED MUD	8	10							
9423	17693	OTHER : WATER-BASED MUD OR OIL-BASED MUD	8	9.6							

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

GR from TD to surface (horizontal well vertical portion of hole)

Mud Log from Bone Spring - TD

CBL (production string) - to be ran by completions.

List of open and cased hole logs run in the well:

GAMMA RAY LOG, CEMENT BOND LOG, DIRECTIONAL SURVEY, MUD LOG/GEOLOGICAL LITHOLOGY LOG,

Coring operation description for the well:

No coring is planned at this time.

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 4960

Anticipated Surface Pressure: 2774

Anticipated Bottom Hole Temperature(F): 160

Anticipated abnormal pressures, temperatures, or potential geologic hazards? NO

Describe:

Contingency Plans geohazards description:

Contingency Plans geohazards

Operator Name: OXY USA INCORPORATED

Well Name: STRESSED DESSERTS 36_1 FEDERAL COM **Well Number:** 4H

Hydrogen Sulfide drilling operations plan required? YES

Hydrogen sulfide drilling operations

STRESSEDDESSERTS36_1FEDCOM4H_H2S1_20250314110616.pdf

STRESSEDDESSERTS36_1FEDCOM4H_H2S2_20250314110622.pdf

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

STRESSEDDESSERTS36_1FEDCOM4H_DirectPlan_20250314110649.pdf

STRESSEDDESSERTS36_1FEDCOM4H_AntiCollison_20250314110705.pdf

Other proposed operations facets description:

Other proposed operations facets attachment:

STRESSEDDESSERTS36_1FEDCOM4H_DrillPlan_20250314110713.pdf

STRESSEDDESSERTS36_1FEDCOM4H_2024_KPLA_Addendum_WellboreSchematics_20250314110728.pdf

STRESSEDDESSERTS36_1FEDCOM4H_SpudRigData_20250314110736.pdf

STRESSEDDESSERTS36_1FEDCOM4H_NGMP___WMP_20250314110751.pdf

Other Variance request(s)?: Y

Other Variance attachment:

STRESSEDDESSERTS36_1FEDCOM4H_BOPBreakTestingVariance_20250314110819.pdf

STRESSEDDESSERTS36_1FEDCOM4H_BradenheadCBLVariance_20250314110825.pdf

STRESSEDDESSERTS36_1FEDCOM4H_OfflineCementVariance_20250314110831.pdf



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

SUPO Data Report

05/20/2025

APD ID: 10400104066

Submission Date: 03/14/2025

Highlighted data
reflects the most
recent changes
[Show Final Text](#)

Operator Name: OXY USA INCORPORATED

Well Name: STRESSED DESSERTS 36_1 FEDERAL COM Well Number: 4H

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - Existing Roads

Will existing roads be used? YES

Existing Road Map:

STRESSEDDESSERTS36_1FEDCOM4H_ExistRoads_20250314110858.pdf

Existing Road Purpose: ACCESS,FLUID TRANSPORT

Row(s) Exist? NO

ROW ID(s)

ID:

Do the existing roads need to be improved? NO

Existing Road Improvement Description:

Existing Road Improvement Attachment:

Section 2 - New or Reconstructed Access Roads

Will new roads be needed? YES

New Road Map:

STRESSEDDESSERTS36_1FEDCOM4H_NewRoads_20250314110928.pdf

New road type: LOCAL

Length: 2071

Feet

Width (ft.): 30

Max slope (%): 0

Max grade (%): 0

Army Corp of Engineers (ACOE) permit required? N

ACOE Permit Number(s):

New road travel width: 20

New road access erosion control: Watershed diversion every 200', if needed.

New road access plan or profile prepared? N

New road access plan

Operator Name: OXY USA INCORPORATED

Well Name: STRESSED DESSERTS 36_1 FEDERAL COM **Well Number:** 4H

Access road engineering design? N

Access road engineering design

Turnout? N

Access surfacing type: OTHER

Access topsoil source: ONSITE

Access surfacing type description: CALICHE

Access onsite topsoil source depth: 0

Offsite topsoil source description:

Onsite topsoil removal process: If available

Access other construction information:

Access miscellaneous information:

Number of access turnouts:

Access turnout map:

Drainage Control

New road drainage crossing: CULVERT

Drainage Control comments: Watershed diversion every 200', if needed.

Road Drainage Control Structures (DCS) description: Watershed diversion every 200', if needed.

Road Drainage Control Structures (DCS) attachment:

Access Additional Attachments

Section 3 - Location of Existing Wells

Existing Wells Map? YES

Existing Well map Attachment:

STRESSEDDESSERTS36_1FEDCOM4H_ExistWells_20250314110946.pdf

Section 4 - Location of Existing and/or Proposed Production Facilities

Submit or defer a Proposed Production Facilities plan? SUBMIT

Production Facilities description:

Production Facilities map:

STRESSEDDESSERTS36_1FEDCOM4H_LeaseFacility_20250314111108.pdf

Operator Name: OXY USA INCORPORATED**Well Name:** STRESSED DESSERTS 36_1 FEDERAL COM **Well Number:** 4H**Section 5 - Location and Types of Water Supply****Water Source Table****Water source type:** GW WELL**Water source use type:** SURFACE CASING

OTHER

Describe use type: DRILLINGINTERMEDIATE/PRODUCTION
CASING**Source latitude:****Source longitude:****Source datum:****City:****Water source permit type:** WATER WELL**Water source transport method:** PIPELINE

TRUCKING

Source land ownership: COMMERCIAL**Source transportation land ownership:** COMMERCIAL**Water source volume (barrels):** 2000**Source volume (acre-feet):** 0.25778619**Source volume (gal):** 84000**Water source and transportation**

STRESSEDDESSERTS36_1FEDCOM4H_Water___Caliche_Source_Map_20250314111127.pdf

STRESSEDDESSERTS36_1FEDCOM4H_WtrSrcGRR_20250314111132.pdf

STRESSEDDESSERTS36_1FEDCOM4H_WtrSrcMesq_20250314111137.pdf

Water source comments: This well will be drilled using a combination of water mud systems. It will be obtained from commercial water stations (Gregory Rockhouse, Mesquite) in the area and will be hauled to location by transport truck using existing and proposed roads.**New water well?** N**New Water Well Info****Well latitude:****Well Longitude:****Well datum:****Well target aquifer:****Est. depth to top of aquifer(ft):****Est thickness of aquifer:****Aquifer comments:****Aquifer documentation:****Well depth (ft):****Well casing type:**

Operator Name: OXY USA INCORPORATED

Well Name: STRESSED DESSERTS 36_1 FEDERAL COM Well Number: 4H

Well casing outside diameter (in.):

Well casing inside diameter (in.):

New water well casing?

Used casing source:

Drilling method:

Drill material:

Grout material:

Grout depth:

Casing length (ft.):

Casing top depth (ft.):

Well Production type:

Completion Method:

Water well additional information:

State appropriation permit:

Additional information attachment:

Section 6 - Construction Materials

Using any construction materials: YES

Construction Materials description: Primary All caliche utilized for the drilling pad and proposed access road will be obtained from an existing BLM/State/Fee approved pit or from prevailing deposits found on the location. Will use BLM recommended extra caliche from other locations close by for roads, if available. Secondary The secondary way of obtaining caliche to build locations and roads will be by turning over the location. This means, caliche will be obtained from the actual well site. A caliche permit will be obtained from BLM prior to pushing up any caliche. 2400 cubic yards is max amount of caliche needed for pad and roads. Amount will vary for each pad. The procedure below has been approved by BLM personnel: a. The top 6 of topsoil is pushed off and stockpiled along the side of the location. b. An approximate 120 X 120 area is used within the proposed well site to remove caliche. c. Subsoil is removed and piled alongside the 120 X 120 within the pad site. d. When caliche is found, material will be stockpiled within the pad site to build the location and road. e. Then subsoil is pushed back in the hole and caliche is spread accordingly across entire location and road. f. Once the well is drilled the stockpiled top soil will be used for interim reclamation and spread along areas where caliche is picked up and the location size is reduced. Neither caliche nor subsoil will be stockpiled outside of the well pad. Topsoil will be stockpiled along the edge of the pad as depicted in the site plan included with this APD.

Construction Materials source location

STRESSEDDESSERTS36_1FEDCOM4H_Water___Caliche_Source_Map_20250314111150.pdf

Section 7 - Methods for Handling

Waste type: DRILLING

Waste content description: Water-Based Cuttings, Water-Based Mud, Oil-Based Cuttings, Oil-Based Mud, Produced Water

Amount of waste: 1618 barrels

Waste disposal frequency : Daily

Safe containment description: Haul-Off Bins

Safe containmant attachment:

Waste disposal type: HAUL TO COMMERCIAL FACILITY Disposal location ownership: COMMERCIAL

Disposal type description:

Disposal location description: An approved facility that can process drill cuttings, drill fluids, flowback water, produced water, contaminated soils, and other non-hazardous wastes. Methods of Handling Waste Material: a. A closed loop system will be utilized consisting of above ground steel tanks and haul-off bins.

Operator Name: OXY USA INCORPORATED**Well Name:** STRESSED DESSERTS 36_1 FEDERAL COM **Well Number:** 4H

Disposal of liquids, drilling fluids and cuttings will be disposed of at an approved facility. Solids-CRI, Liquids-Laguna b. All trash, junk and other waste material will be contained in trash cages or bins to prevent scattering. When the job is completed, all contents will be removed and disposed of in an approved sanitary landfill. c. The supplier, including broken sacks, will pickup slats remaining after completion of well. d. A Porto-john will be provided for the rig crews. This equipment will be properly maintained during the drilling and completion operations and will be removed when all operations are complete. e. Disposal of fluids to be transported will be by the following companies. TFH Ltd, Laguna SWD Facility

Reserve Pit

Reserve Pit being used? NO**Temporary disposal of produced water into reserve pit?** NO**Reserve pit length (ft.)****Reserve pit width (ft.)****Reserve pit depth (ft.)****Reserve pit volume (cu. yd.)****Is at least 50% of the reserve pit in cut?****Reserve pit liner****Reserve pit liner specifications and installation description**

Cuttings Area

Cuttings Area being used? NO**Are you storing cuttings on location?** Y

Description of cuttings location A closed loop system will be utilized consisting of above ground steel tanks and haul-off bins. Disposal of liquids, drilling fluids and cuttings will be disposed of at an approved facility.

Cuttings area length (ft.)**Cuttings area width (ft.)****Cuttings area depth (ft.)****Cuttings area volume (cu. yd.)****Is at least 50% of the cuttings area in cut?****Cuttings area liner****Cuttings area liner specifications and installation description**

Section 8 - Ancillary

Are you requesting any Ancillary Facilities?: N**Ancillary Facilities****Comments:**

Operator Name: OXY USA INCORPORATED

Well Name: STRESSED DESSERTS 36_1 FEDERAL COM **Well Number:** 4H

Section 9 - Well Site

Well Site Layout Diagram:

STRESSEDDESSERTS36_1FEDCOM4H_ClosedLoop_20250314111234.pdf

Comments:

Section 10 - Plans for Surface

Type of disturbance: New Surface Disturbance

Multiple Well Pad Name: LSTTNK_21S31E_36

Multiple Well Pad Number: PAD 2

Recontouring

STRESSEDDESSERTS36_1FEDCOM4H_SitePlan_20250314111315.pdf

STRESSEDDESSERTS36_1FEDCOM4H_Cut_Fill_20250314111327.pdf

Drainage/Erosion control construction: Reclamation to be wind rowed as needed to control erosion.

Drainage/Erosion control reclamation: Reclamation to be wind rowed as needed to control erosion.

Well pad proposed disturbance (acres): 8.63	Well pad interim reclamation (acres): 0	Well pad long term disturbance (acres): 8.63
Road proposed disturbance (acres): 1.43	Road interim reclamation (acres): 0.48	Road long term disturbance (acres): 0.95
Powerline proposed disturbance (acres): 16.63	Powerline interim reclamation (acres): 16.63	Powerline long term disturbance (acres): 0
Pipeline proposed disturbance (acres): 72.8	Pipeline interim reclamation (acres): 48.53	Pipeline long term disturbance (acres): 24.27
Other proposed disturbance (acres): 0.85	Other interim reclamation (acres): 0	Other long term disturbance (acres): 0.85
Total proposed disturbance: 100.33999999999999	Total interim reclamation: 65.64	Total long term disturbance: 34.7

Disturbance Comments:

Reconstruction method: If the well is deemed commercially productive, caliche from the areas of the pad site not required for operations will be reclaimed. The original topsoil will be returned to the area of the drill pad not necessary to operate the well. These unused areas of the drill pad will be contoured, as close as possible, to match the original topography, and the area will be seeded with an approved BLM mixture to re-establish vegetation. After concluding the drilling and/or completion operations, if the well is found non-commercial, the caliche will be removed from the pad and transported to the original caliche pit or used for other drilling locations. The road will be reclaimed as directed by the BLM. the original topsoil will again be returned to the pad and contoured, as close as possible, to the original topography and the area will be seeded with an approved BLM mixture to re-establish vegetation.

Topsoil redistribution: The original topsoil will be returned to the area of the drill pad not necessary to operate the well.

Soil treatment: To be determined by BLM.

Existing Vegetation at the well pad: To be determined by BLM at onsite.

Existing Vegetation at the well pad

Operator Name: OXY USA INCORPORATED**Well Name:** STRESSED DESSERTS 36_1 FEDERAL COM **Well Number:** 4H**Existing Vegetation Community at the road:** To be determined by BLM at onsite.**Existing Vegetation Community at the road****Existing Vegetation Community at the pipeline:** To be determined by BLM at onsite.**Existing Vegetation Community at the pipeline****Existing Vegetation Community at other disturbances:** To be determined by BLM at onsite.**Existing Vegetation Community at other disturbances****Non native seed used?** N**Non native seed description:****Seedling transplant description:****Will seedlings be transplanted for this project?** N**Seedling transplant description attachment:****Will seed be harvested for use in site reclamation?** N**Seed harvest description:****Seed harvest description attachment:****Seed****Seed Table****Seed Summary****Total pounds/Acre:****Seed Type****Pounds/Acre****Seed reclamation****Operator Contact/Responsible Official****First Name:** Mike**Last Name:** Wilson**Phone:****Email:** michael_wilson@oxy.com**Seedbed prep:****Seed BMP:****Seed method:****Existing invasive species?** N

Operator Name: OXY USA INCORPORATED

Well Name: STRESSED DESSERTS 36_1 FEDERAL COM **Well Number:** 4H

Existing invasive species treatment description:

Existing invasive species treatment

Weed treatment plan description: To be determined by BLM.

Weed treatment plan

Monitoring plan description: To be determined by BLM.

Monitoring plan

Success standards: To be determined by BLM.

Pit closure description: NA

Pit closure attachment:

Section 11 - Surface

Disturbance type: WELL PAD

Describe:

Surface Owner: STATE GOVERNMENT

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office: NMSLO

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Operator Name: OXY USA INCORPORATED

Well Name: STRESSED DESSERTS 36_1 FEDERAL COM **Well Number:** 4H

Disturbance type: NEW ACCESS ROAD

Describe:

Surface Owner: STATE GOVERNMENT

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office: NMSLO

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Disturbance type: PIPELINE

Describe:

Surface Owner: STATE GOVERNMENT

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office: NMSLO

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Operator Name: OXY USA INCORPORATED**Well Name:** STRESSED DESSERTS 36_1 FEDERAL COM **Well Number:** 4H**Disturbance type:** OTHER**Describe:** ELECTRIC LINES**Surface Owner:** STATE GOVERNMENT**Other surface owner description:****BIA Local Office:****BOR Local Office:****COE Local Office:****DOD Local Office:****NPS Local Office:****State Local Office:** NMSLO**Military Local Office:****USFWS Local Office:****Other Local Office:****USFS Region:****USFS Forest/Grassland:****USFS Ranger District:**

Section 12 - Other

Right of Way needed? Y**Use APD as ROW?** Y**ROW Type(s):** 281001 ROW - ROADS,285003 ROW – POWER TRANS,288100 ROW – O&G Pipeline,288101 ROW – O&G Facility Sites,289001 ROW- O&G Well Pad**ROW****SUPO Additional Information:** Permian Basin MOA : To be submitted after APD acceptance. GIS shapefiles available for BLM.**Use a previously conducted onsite?** N**Previous Onsite information:****Other SUPO**

STRESSEDDESSERTS36_1FEDCOM4H_StakingSheet_20250314111540.pdf

Operator Name: OXY USA INCORPORATED

Well Name: STRESSED DESSERTS 36_1 FEDERAL COM **Well Number:** 4H

STRESSEDDESSERTS36_1FEDCOM4H_NGMP___WMP_20250314111550.pdf



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

PWD Data Report

05/20/2025

APD ID: 10400104066

Submission Date: 03/14/2025

Operator Name: OXY USA INCORPORATED

Well Name: STRESSED DESSERTS 36_1 FEDERAL COM **Well Number:** 4H

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - General

Would you like to address long-term produced water disposal? NO

Section 2 - Lined

Would you like to utilize Lined Pit PWD options? N

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Other PWD Surface Owner Description:

Lined pit PWD on or off channel:

Lined pit PWD discharge volume (bbl/day):

Lined pit

Pit liner description:

Pit liner manufacturers

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal

Lined pit precipitated solids disposal schedule:

Lined pit precipitated solids disposal schedule

Lined pit reclamation description:

Lined pit reclamation

Leak detection system description:

Leak detection system

Operator Name: OXY USA INCORPORATED

Well Name: STRESSED DESSERTS 36_1 FEDERAL COM **Well Number:** 4H

Lined pit Monitor description:

Lined pit Monitor

Lined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Lined pit bond number:

Lined pit bond amount:

Additional bond information

Section 3 - Unlined

Would you like to utilize Unlined Pit PWD options? N

Produced Water Disposal (PWD) Location:

PWD disturbance (acres):

PWD surface owner:

Other PWD Surface Owner Description:

Unlined pit PWD on or off channel:

Unlined pit PWD discharge volume (bbl/day):

Unlined pit

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal

Unlined pit precipitated solids disposal schedule:

Unlined pit precipitated solids disposal schedule

Unlined pit reclamation description:

Unlined pit reclamation

Unlined pit Monitor description:

Unlined pit Monitor

Do you propose to put the produced water to beneficial use?

Beneficial use user

Estimated depth of the shallowest aquifer (feet):

Precipitated Solids Permit

Does the produced water have an annual average Total Dissolved Solids (TDS) concentration equal to or less than that of the existing water to be protected?

TDS lab results:

Operator Name: OXY USA INCORPORATED

Well Name: STRESSED DESSERTS 36_1 FEDERAL COM **Well Number:** 4H

Geologic and hydrologic

State

Unlined Produced Water Pit Estimated

Unlined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Unlined pit bond number:

Unlined pit bond amount:

Additional bond information

Section 4 -

Would you like to utilize Injection PWD options? N

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Other PWD Surface Owner Description:

Injection PWD discharge volume (bbl/day):

Injection well mineral owner:

Injection well type:

Injection well number:

Injection well name:

Assigned injection well API number?

Injection well API number:

Injection well new surface disturbance (acres):

Minerals protection information:

Mineral protection

Underground Injection Control (UIC) Permit?

UIC Permit

Section 5 - Surface

Would you like to utilize Surface Discharge PWD options? N

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Other PWD Surface Owner Description :

Surface discharge PWD discharge volume (bbl/day):

Surface Discharge NPDES Permit?

Surface Discharge NPDES Permit attachment:

Operator Name: OXY USA INCORPORATED

Well Name: STRESSED DESSERTS 36_1 FEDERAL COM **Well Number:** 4H

Surface Discharge site facilities information:

Surface discharge site facilities map:

Section 6 -

Would you like to utilize Other PWD options? N

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

PWD Surface Owner Description:

Other PWD discharge volume (bbl/day):

Other PWD type description:

Other PWD type

Have other regulatory requirements been met?

Other regulatory requirements



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Bond Info Data

05/20/2025

APD ID: 10400104066

Submission Date: 03/14/2025

Operator Name: OXY USA INCORPORATED

Well Name: STRESSED DESSERTS 36_1 FEDERAL COM **Well Number:** 4H

Well Type: OIL WELL

Well Work Type: Drill

Highlighted data
reflects the most
recent changes
[Show Final Text](#)

Bond

Federal/Indian APD: FED

BLM Bond number: ESB000226

BIA Bond number:

Do you have a reclamation bond? NO

Is the reclamation bond a rider under the BLM bond?

Is the reclamation bond BLM or Forest Service?

BLM reclamation bond number:

Forest Service reclamation bond number:

Forest Service reclamation bond attachment:

Reclamation bond amount:

Reclamation bond rider amount:

Additional reclamation bond information attachment:

Form 3160-3
(June 2015)FORM APPROVED
OMB No. 1004-0137
Expires: January 31, 2018

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: ☒ DRILL ☐ REENTER 1b. Type of Well: ☒ Oil Well ☐ Gas Well ☐ Other 1c. Type of Completion: ☐ Hydraulic Fracturing ☐ Single Zone ☒ Multiple Zone		5. Lease Serial No. NMNM43556 6. If Indian, Allottee or Tribe Name 7. If Unit or CA Agreement, Name and No. 8. Lease Name and Well No. STRESSED DESSERTS 36 1 FEDERAL 4H 9. API Well No. 30-015-56881
2. Name of Operator OXY USA INCORPORATED 3a. Address P.O. BOX 1002, TUPMAN, CA 93276-1002 3b. Phone No. (include area code) (661) 763-6046		10. Field and Pool, or Exploratory BILBREY BASIN/BONE SPRING 11. Sec., T. R. M. or Blk. and Survey or Area SEC 36/T21S/R31E/NMP
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface NWSE / 2528 FSL / 1674 FEL / LAT 32.4347348 / LONG -103.7283505 At proposed prod. zone SESE / 20 FSL / 380 FEL / LAT 32.4133218 / LONG -103.7241656		12. County or Parish EDDY 13. State NM
14. Distance in miles and direction from nearest town or post office* 23 miles		15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 2528 feet 16. No of acres in lease 17. Spacing Unit dedicated to this well 959.24
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 30 feet 19. Proposed Depth 9935 feet / 17693 feet 20. BLM/BIA Bond No. in file FED: ESB000226		21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3605 feet 22. Approximate date work will start* 03/01/2026 23. Estimated duration 45 days
24. Attachments		

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- | | |
|---|---|
| 1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification.
6. Such other site specific information and/or plans as may be requested by the BLM. |
|---|---|

25. Signature (Electronic Submission) Title Advisor Regulatory Sr.	Name (Printed/Typed) MELISSA GUIDRY / Ph: (713) 366-5716 Date 03/14/2025	
Approved by (Signature) (Electronic Submission) Title Assistant Field Manager Lands & Minerals	Name (Printed/Typed) CODY LAYTON / Ph: (575) 234-5959 Office Carlsbad Field Office	Date 05/14/2025

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
 Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.



(Continued on page 2)

*(Instructions on page 2)

INSTRUCTIONS

GENERAL: This form is designed for submitting proposals to perform certain well operations, as indicated on Federal and Indian lands and leases for action by appropriate Federal agencies, pursuant to applicable Federal laws and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from local Federal offices.

ITEM I: If the proposal is to redrill to the same reservoir at a different subsurface location or to a new reservoir, use this form with appropriate notations. Consult applicable Federal regulations concerning subsequent work proposals or reports on the well.

ITEM 4: Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local Federal offices for specific instructions.

ITEM 14: Needed only when location of well cannot readily be found by road from the land or lease description. A plat, or plats, separate or on the reverse side, showing the roads to, and the surveyed location of, the well, and any other required information, should be furnished when required by Federal agency offices.

ITEMS 15 AND 18: If well is to be, or has been directionally drilled, give distances for subsurface location of hole in any present or objective productive zone.

ITEM 22: Consult applicable Federal regulations, or appropriate officials, concerning approval of the proposal before operations are started.

ITEM 24: If the proposal will involve hydraulic fracturing operations, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The Privacy Act of 1974 and regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 25 U.S.C. 396; 43 CFR 3160

PRINCIPAL PURPOSES: The information will be used to: (1) process and evaluate your application for a permit to drill a new oil, gas, or service well or to reenter a plugged and abandoned well; and (2) document, for administrative use, information for the management, disposal and use of National Resource Lands and resources including (a) analyzing your proposal to discover and extract the Federal or Indian resources encountered; (b) reviewing procedures and equipment and the projected impact on the land involved; and (c) evaluating the effects of the proposed operation on the surface and subsurface water and other environmental impacts.

ROUTINE USE: Information from the record and/or the record will be transferred to appropriate Federal, State, and local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecution, in connection with congressional inquiries and for regulatory responsibilities.

EFFECT OF NOT PROVIDING INFORMATION: Filing of this application and disclosure of the information is mandatory only if you elect to initiate a drilling or reentry operation on an oil and gas lease.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM connects this information to a new evaluation of the technical, safety, and environmental factors involved with drilling for oil and/or gas on Federal and Indian oil and gas leases. This information will be used to analyze and approve applications. Response to this request is mandatory only if the operator elects to initiate drilling or reentry operations on an oil and gas lease. The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Connection Clearance Officer (WO-630), 1849 C Street, N.W., Mail Stop 401 LS, Washington, D.C. 20240.

Additional Operator Remarks

Location of Well

0. SHL: NWSE / 2528 FSL / 1674 FEL / TWSP: 21S / RANGE: 31E / SECTION: 36 / LAT: 32.4347348 / LONG: -103.7283505 (TVD: 0 feet, MD: 0 feet)
PPP: NESE / 2542 FSL / 380 FEL / TWSP: 21S / RANGE: 31E / SECTION: 36 / LAT: 32.4347715 / LONG: -103.7241554 (TVD: 9935 feet, MD: 10429 feet)
PPP: NESE / 2640 FNL / 379 FEL / TWSP: 22S / RANGE: 31E / SECTION: 1 / LAT: 32.4205299 / LONG: -103.7241622 (TVD: 9935 feet, MD: 15070 feet)
PPP: LOT 1 / 0 FSL / 380 FEL / TWSP: 22S / RANGE: 31E / SECTION: 1 / LAT: 32.4277851 / LONG: -103.7241587 (TVD: 9935 feet, MD: 12431 feet)
BHL: SESE / 20 FSL / 380 FEL / TWSP: 22S / RANGE: 31E / SECTION: 1 / LAT: 32.4133218 / LONG: -103.7241656 (TVD: 9935 feet, MD: 17693 feet)

BLM Point of Contact

Name: TENILLE C MOLINA
Title: Land Law Examiner
Phone: (575) 234-2224
Email: TCMOLINA@BLM.GOV

Review and Appeal Rights

A person contesting a decision shall request a State Director review. This request must be filed within 20 working days of receipt of the Notice with the appropriate State Director (see 43 CFR 3165.3). The State Director review decision may be appealed to the Interior Board of Land Appeals, 801 North Quincy Street, Suite 300, Arlington, VA 22203 (see 43 CFR 3165.4). Contact the above listed Bureau of Land Management office for further information.

C-102 Submit Electronically Via OCD Permitting	State of New Mexico Energy, Minerals, & Natural Resources Department OIL CONSERVATION DIVISION	Revised July 9, 2024 PAGE 1 OF 2
		Submittal Type: ☒ Initial Submittal ☐ Amended Report ☐ As Drilled

WELL LOCATION INFORMATION

API Number 30-015 -56881	Pool Code 5695	Pool Name BILBREY BASIN; BONE SPRING
Property Code 337357	Property Name STRESSED DESSERTS 36_1 FED COM	Well Number 4H
OGRID No. 16696	Operator Name OXY USA INC.	Ground Level Elevation 3605'
Surface Owner: ☒ State ☐ Fee ☐ Tribal ☐ Federal		Mineral Owner: ☐ State ☐ Fee ☐ Tribal ☒ Federal

Surface Location

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude (NAD83)	Longitude (NAD83)	County
J	36	21S	31E		2528' FSL	1674' FEL	32.43473481	-103.72835051	EDDY

Bottom Hole Location

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude (NAD83)	Longitude (NAD83)	County
P	01	22S	31E		20' FSL	380' FEL	32.41332183	-103.72416562	EDDY

Dedicated Acres 959.24	Infill or Defining Well INFILL	Defining Well API N/A	Overlapping Spacing Unit (Y/N) N	Consolidation Code N/A
Order Numbers: PENDING			Well setbacks are under Common Ownership: ☐ Yes ☒ No	

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude (NAD83)	Longitude (NAD83)	County
I	36	21S	31E		2592' FSL	380' FEL	32.43490900	-103.72415531	EDDY

First Take Point (FTP)

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude (NAD83)	Longitude (NAD83)	County
I	36	21S	31E		2542' FSL	380' FEL	32.43477157	-103.72415540	EDDY

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude (NAD83)	Longitude (NAD83)	County
P	01	22S	31E		100' FSL	380' FEL	32.41354173	-103.72416561	EDDY

Unitized Area or Area of Uniform Interest N	Spacing Unit Type: ☒ Horizontal ☐ Vertical	Ground Floor Elevation 3605'
---	---	--

OPERATOR CERTIFICATIONS

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and, if the well is a vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

If this well is a horizontal well, I further certify that this organization has received the consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division.

Melissa Guidry 03/14/25

Signature

Date

Melissa Guidry
Printed Name

melissa_guidry@oxy.com
Email Address

SURVEYOR CERTIFICATIONS

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.



Signature and Seal of Professional Surveyor

Certificate Number

Date of Survey

21653

JANUARY 09, 2025

ACREAGE DEDICATION PLATS

STRESSED DESSERTS 36_1 FED COM 4H

PAGE 2 OF 2

SHL (NAD83)
X:727986.18' / Y:522416.13'
LAT:32.43473481 / LON:-103.72835051

SHL (NAD27)
X:686804.34' / Y:522355.23'
LAT:32.43461240 / LON:-103.72785984

KOP (NAD83)
X:729280.14' / Y:522486.86'
LAT:32.43490900 / LON:-103.72415531

KOP (NAD27)
X:688098.29' / Y:522425.95'
LAT:32.43478657 / LON:-103.72366476

FTP (NAD83)
X:729280.39' / Y:522436.86'
LAT:32.43477157 / LON:-103.72415540

FTP (NAD27)
X:688098.55' / Y:522375.95'
LAT:32.43464914 / LON:-103.72366487

PPP-1 (NAD83)
X:729293.84' / Y:519895.18'
LAT:32.42778513 / LON:-103.72415877

PPP-1 (NAD27)
X:688111.92' / Y:519834.34'
LAT:32.42766267 / LON:-103.72366853

PPP-2 (NAD83)
X:729307.82' / Y:517255.71'
LAT:32.42052990 / LON:-103.72416226


PPP-2 (NAD27)
X:688125.82' / Y:517194.94'
LAT:32.42040740 / LON:-103.72367229

LTP (NAD83)
X:729321.27' / Y:514713.40'
LAT:32.41354173 / LON:-103.72416561

LTP (NAD27)
X:688139.20' / Y:514652.70'
LAT:32.41341919 / LON:-103.72367591

BHL (NAD83)
X:729321.72' / Y:514633.40'
LAT:32.41332183 / LON:-103.72416562

BHL (NAD27)
X:688139.66' / Y:514572.70'
LAT:32.41319929 / LON:-103.72367593

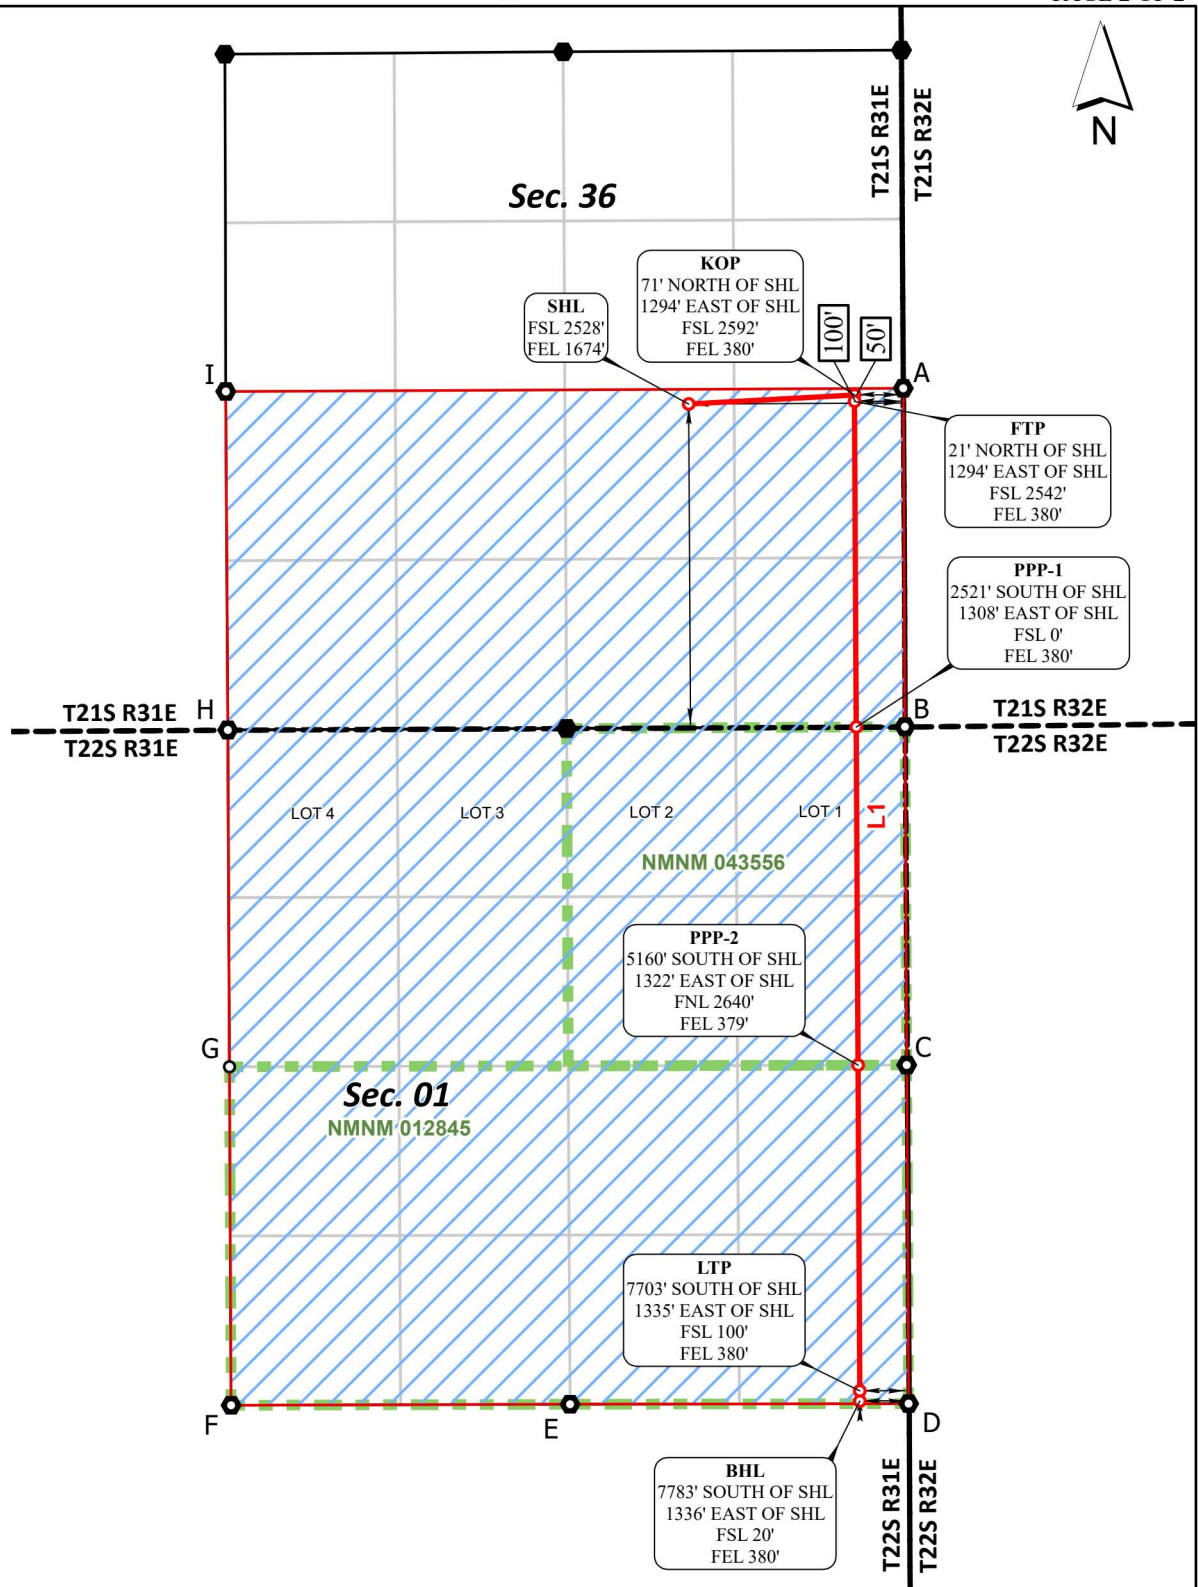**CORNER COORDINATES
NAD 83, SPCS NM EAST**

A - X: 729659.88' / Y:522538.65'
B - X: 729673.35' / Y:519897.17'
C - X: 729686.87' / Y:517256.69'
D - X: 729701.84' / Y:514614.14'
E - X: 727060.07' / Y:514609.01'
F - X: 724415.68' / Y:514601.05'
G - X: 724402.79' / Y:517243.04'
H - X: 724389.93' / Y:519871.47'
I - X: 724374.15' / Y:522513.80'

**CORNER COORDINATES
NAD 27, SPCS NM EAST**

A - X: 688478.03' / Y:522477.73'
B - X: 688491.43' / Y:519836.33'
C - X: 688504.87' / Y:517195.92'
D - X: 688519.77' / Y:514553.44'
E - X: 685878.02' / Y:514548.32'
F - X: 683233.65' / Y:514540.36'
G - X: 683220.83' / Y:517182.28'
H - X: 683208.05' / Y:519810.64'
I - X: 683192.35' / Y:522452.90'

***FTP TO LTP LINE BEARINGS**

LINE	BEARING
L1	S 00°18'12" E ~ 7723.57'

***FTP TO LTP LEASE DISTANCES**

TRACT	DISTANCE
NMNM 043556	2639.50'
NMNM 012845	2542.34'
TOTAL	5181.84'

○ Drill Line Events

● Section Corners

— Drill Line

↔ Dimension Lines

Federal Leases

HSU

○ HSU Corners

JOB No. OXY_0037_SD05_14283

All bearings and coordinates refer to New Mexico State Plane Coordinate System, East Zone, U.S. Survey Feet.

REV 1 ANC 1/8/2025

Distances/areas relative to NAD 83 grid measurements. Combined Scale Factor: 0.99977773 and a Convergence Angle: 0.32273852°



State of New Mexico
Energy, Minerals and Natural Resources Department

Submit Electronically
Via E-permitting

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description

Effective May 25, 2021

I. Operator: OXY USA INC. **OGRID:** 16696 **Date:** 1 0/ 1 4/ 2 4

II. Type: ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
SEE ATTACHED						

IV. Central Delivery Point Name: Lost Tank 35 Central Processing Facility [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
SEE ATTACHED						

VI. Separation Equipment: ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan

EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications

Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature: <i>Melissa Guidry</i>
Printed Name: Melissa Guidry
Title: Regulatory Advisor Sr.
E-mail Address: melissa_guidry@oxy.com
Date: 10/14/2024
Phone: 713-497-2481
OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form)
Approved By:
Title:
Approval Date:
Conditions of Approval:

V. Anticipated Schedule

Well Name	API	WELL LOCATION (ULSTR)	Footages	ANTICIPATED OIL BBL/D	ANTICIPATED GAS MCF/D	ANTICIPATED PROD WATER BBL/D
STRESSED DESSERTS 36_1 FED COM 1H	Pending	K-36-T21S-R31E	2403 FSL 1775 FWL	2200	3300	4700
STRESSED DESSERTS 36_1 FED COM 2H	Pending	K-36-T21S-R31E	2373 FSL 1775 FWL	2200	3300	4700
STRESSED DESSERTS 36_1 FED COM 3H	Pending	J-36-T21S-R31E	2498 FSL 1675 FEL	2200	3300	4700
STRESSED DESSERTS 36_1 FED COM 4H	Pending	J-36-T21S-R31E	2528 FSL 1674 FEL	2200	3300	4700
STRESSED DESSERTS 36_1 FED COM 11H	Pending	K-36-T21S-R31E	2493 FSL 1776 FWL	2000	8000	2500
STRESSED DESSERTS 36_1 FED COM 12H	Pending	K-36-T21S-R31E	2453 FSL 1776 FWL	2000	8000	2500
STRESSED DESSERTS 36_1 FED COM 13H	Pending	J-36-T21S-R31E	2408 FSL 1675 FEL	2000	8000	2500
STRESSED DESSERTS 36_1 FED COM 14H	Pending	J-36-T21S-R31E	2438 FSL 1675 FEL	2000	8000	2500
STRESSED DESSERTS 36_1 FED COM 21H	Pending	K-36-T21S-R31E	2583 FSL 1776 FWL	1800	3500	3700
STRESSED DESSERTS 36_1 FED COM 22H	Pending	K-36-T21S-R31E	2553 FSL 1776 FWL	1800	3500	3700
STRESSED DESSERTS 36_1 FED COM 23H	Pending	J-36-T21S-R31E	2318 FSL 1675 FEL	1800	3500	3700
STRESSED DESSERTS 36_1 FED COM 24H	Pending	J-36-T21S-R31E	2346 FSL 1675 FEL	1800	3500	3700
STRESSED DESSERTS 36_1 FED COM 38H	Pending	J-36-T21S-R31E	2527 FSL 1549 FEL	2000	3800	3200
STRESSED DESSERTS 36_1 FED COM 71H	Pending	K-36-T21S-R31E	2552 FSL 1901 FWL	1000	3500	2300
STRESSED DESSERTS 36_1 FED COM 72H	Pending	K-36-T21S-R31E	2522 FSL 1901 FWL	1000	3500	2300
STRESSED DESSERTS 36_1 FED COM 73H	Pending	J-36-T21S-R31E	2347 FSL 1550 FWL	1000	3500	2300
STRESSED DESSERTS 36_1 FED COM 74H	Pending	J-36-T21S-R31E	2377 FSL 1550 FEL	1000	3500	2300

V. Anticipated Schedule

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
STRESSED DESSERTS 36_1 FED COM 1H	Pending	12/1/2025	01/01/2026	02/01/2026	03/15/2026	03/16/2026
STRESSED DESSERTS 36_1 FED COM 2H	Pending	12/1/2025	01/01/2026	02/01/2026	03/15/2026	03/16/2026
STRESSED DESSERTS 36_1 FED COM 3H	Pending	12/1/2025	01/01/2026	02/01/2026	03/15/2026	03/16/2026
STRESSED DESSERTS 36_1 FED COM 4H	Pending	12/1/2025	01/01/2026	02/01/2026	03/15/2026	03/16/2026
STRESSED DESSERTS 36_1 FED COM 11H	Pending	12/1/2025	01/01/2026	02/01/2026	03/15/2026	03/16/2026
STRESSED DESSERTS 36_1 FED COM 12H	Pending	12/1/2025	01/01/2026	02/01/2026	03/15/2026	03/16/2026
STRESSED DESSERTS 36_1 FED COM 13H	Pending	12/1/2025	01/01/2026	02/01/2026	03/15/2026	03/16/2026
STRESSED DESSERTS 36_1 FED COM 14H	Pending	12/1/2025	01/01/2026	02/01/2026	03/15/2026	03/16/2026
STRESSED DESSERTS 36_1 FED COM 21H	Pending	12/1/2025	01/01/2026	02/01/2026	03/15/2026	03/16/2026
STRESSED DESSERTS 36_1 FED COM 22H	Pending	12/1/2025	01/01/2026	02/01/2026	03/15/2026	03/16/2026
STRESSED DESSERTS 36_1 FED COM 23H	Pending	12/1/2025	01/01/2026	02/01/2026	03/15/2026	03/16/2026
STRESSED DESSERTS 36_1 FED COM 24H	Pending	12/1/2025	01/01/2026	02/01/2026	03/15/2026	03/16/2026
STRESSED DESSERTS 36_1 FED COM 38H	Pending	12/1/2025	01/01/2026	02/01/2026	03/15/2026	03/16/2026
STRESSED DESSERTS 36_1 FED COM 71H	Pending	12/1/2025	01/01/2026	02/01/2026	03/15/2026	03/16/2026
STRESSED DESSERTS 36_1 FED COM 72H	Pending	12/1/2025	01/01/2026	02/01/2026	03/15/2026	03/16/2026
STRESSED DESSERTS 36_1 FED COM 73H	Pending	12/1/2025	01/01/2026	02/01/2026	03/15/2026	03/16/2026
STRESSED DESSERTS 36_1 FED COM 74H	Pending	12/1/2025	01/01/2026	02/01/2026	03/15/2026	03/16/2026

Central Delivery Point Name : Lost Tank 35 Central Processing Facility

Part VI. Separation Equipment

Operator will size the flowback separator to handle 12,000 Bbls of fluid and 6-10MMscfd which is more than the expected peak rates for these wells. Each separator is rated to 1440psig, and pressure control valves and automated communication will cause the wells to shut in in the event of an upset at the facility, therefore no gas will be flared on pad during an upset. Current Oxy practices avoid use of flare or venting on pad, therefore if there is an upset or emergency condition at the facility, the wells will immediately shut down, and reassume production once the condition has cleared.

VII. Operational Practices

Gathering System and Pipeline Notification

Well(s) will be connected to a production facility and fluids will be sent to the facility after initial flowback operations are complete, where a gas transporter system is in place. The gas produced from production facility will be dedicated to MarkWest Energy West Texas Gas Company LLC ("MarkWest") and will be connected to MarkWest's high pressure gathering system located in Lea and Eddy Counties, New Mexico and Loving and Culberson Counties, TX. OXY USA INC. ("OXY") will provide (periodically) to MarkWest a production forecast for wells being sent to their system. In addition, OXY and MarkWest will have periodic conference calls to discuss changes to production forecasts arising out of changes to drilling and completion schedules. Gas from these wells will be processed at MarWest's Preakness and Tornado Processing Plants located in Culberson County, TX and Loving County, Texas respectively. The actual flow of the gas will be based on compression operating parameters and gathering system pressures

Flowback Strategy

After the fracture treatment/completion operations, well(s) will be produced to temporary production tanks and gas will be flared or vented. During flowback, the fluids and sand content will be monitored. When the produced fluids contain minimal sand, the wells will be turned to production facilities. Gas sales should start as soon as the wells start flowing through the production facilities, unless there are operational issues on MPLX system at that time. Based on current information, it is OXY's belief the system can take this gas upon completion of the well(s). Safety requirements during cleanout operations from the use of underbalanced air cleanout systems may necessitate that sand and non-pipeline quality gas be vented and/or flared rather than sold on a temporary basis.

VIII. Best Management Practices

Alternatives to Reduce Flaring

Below are alternatives considered from a conceptual standpoint to reduce the amount of gas flared.

Power Generation – On lease

Only a portion of gas is consumed operating the generator, remainder of gas will be flared


Compressed Natural Gas – On lease

Gas flared would be minimal, but might be uneconomical to operate when gas volume declines


NGL Removal – On lease

Plants are expensive, residue gas is still flared, and uneconomical to operate when gas volume declines

	TANKS BONESPRING	
	Oil (bbl/d)	Gas (mcf/d)
Jan-2024	1,006	1,259
Feb-2024	1,133	1,807
Mar-2024	938	1,919
Apr-2024	790	1,931
May-2024	681	1,965
Jun-2024	596	1,922
Jul-2024	530	1,827
Aug-2024	477	1,744
Sep-2024	432	1,671
Oct-2024	395	1,604
Nov-2024	363	1,543
Dec-2024	337	1,490
Jan-2025	314	1,441
Feb-2025	293	1,393
Mar-2025	274	1,350
Apr-2025	258	1,309
May-2025	243	1,271
Jun-2025	229	1,234
Jul-2025	218	1,200
Aug-2025	207	1,169
Sep-2025	197	1,139
Oct-2025	188	1,110
Nov-2025	179	1,083
Dec-2025	172	1,058
Jan-2026	165	1,034
Feb-2026	159	1,011
Mar-2026	152	988
Apr-2026	147	967
May-2026	141	947
Jun-2026	136	927
Jul-2026	132	908
Aug-2026	127	890
Sep-2026	123	873
Oct-2026	120	856
Nov-2026	116	840
Dec-2026	112	825

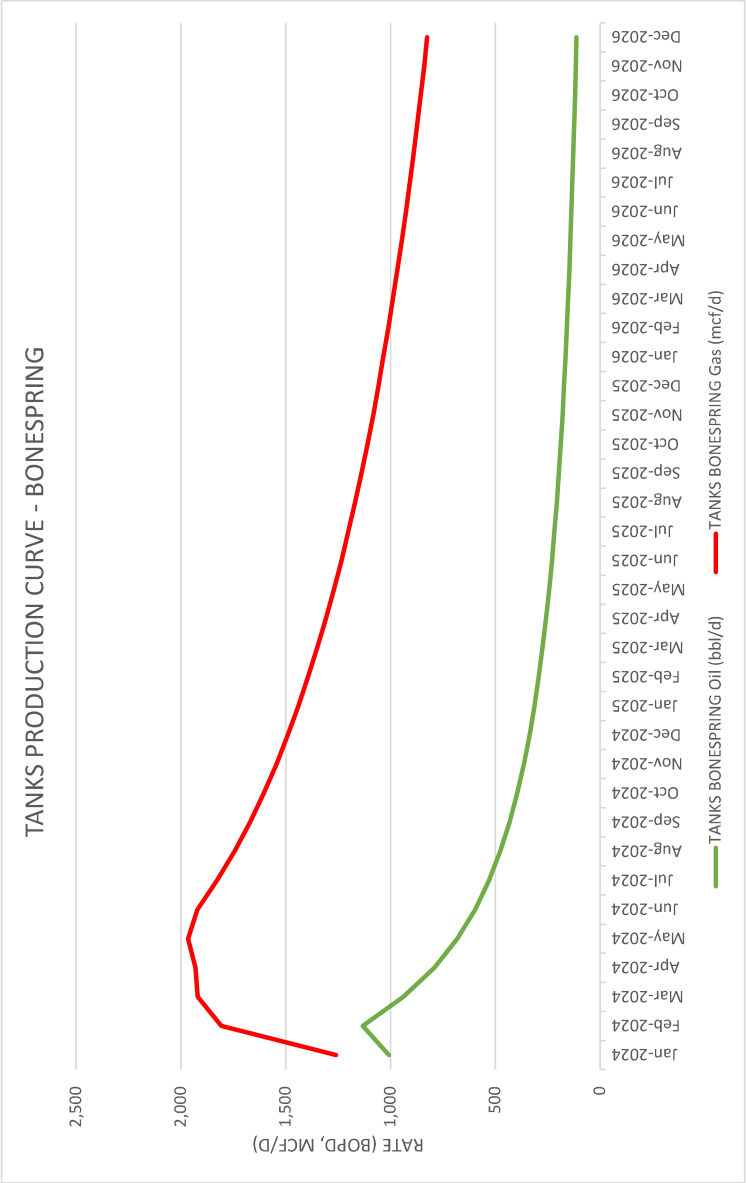

TANKS WOLF CAMP		
	Oil (bbl/d)	Gas (mcf/d)
Jan-2024	2,008	3,461
Feb-2024	1,671	2,856
Mar-2024	1,182	2,118
Apr-2024	921	1,733
May-2024	758	1,490
Jun-2024	644	1,317
Jul-2024	562	1,190
Aug-2024	500	1,091
Sep-2024	450	1,011
Oct-2024	410	944
Nov-2024	376	887
Dec-2024	349	841
Jan-2025	325	800
Feb-2025	304	763
Mar-2025	286	730
Apr-2025	270	700
May-2025	256	674
Jun-2025	243	649
Jul-2025	231	627
Aug-2025	221	607
Sep-2025	211	589
Oct-2025	203	571
Nov-2025	194	555
Dec-2025	187	541
Jan-2026	181	528
Feb-2026	175	515
Mar-2026	169	502
Apr-2026	163	491
May-2026	158	480
Jun-2026	153	470
Jul-2026	149	460
Aug-2026	145	451
Sep-2026	141	442
Oct-2026	137	434
Nov-2026	133	426
Dec-2026	130	419

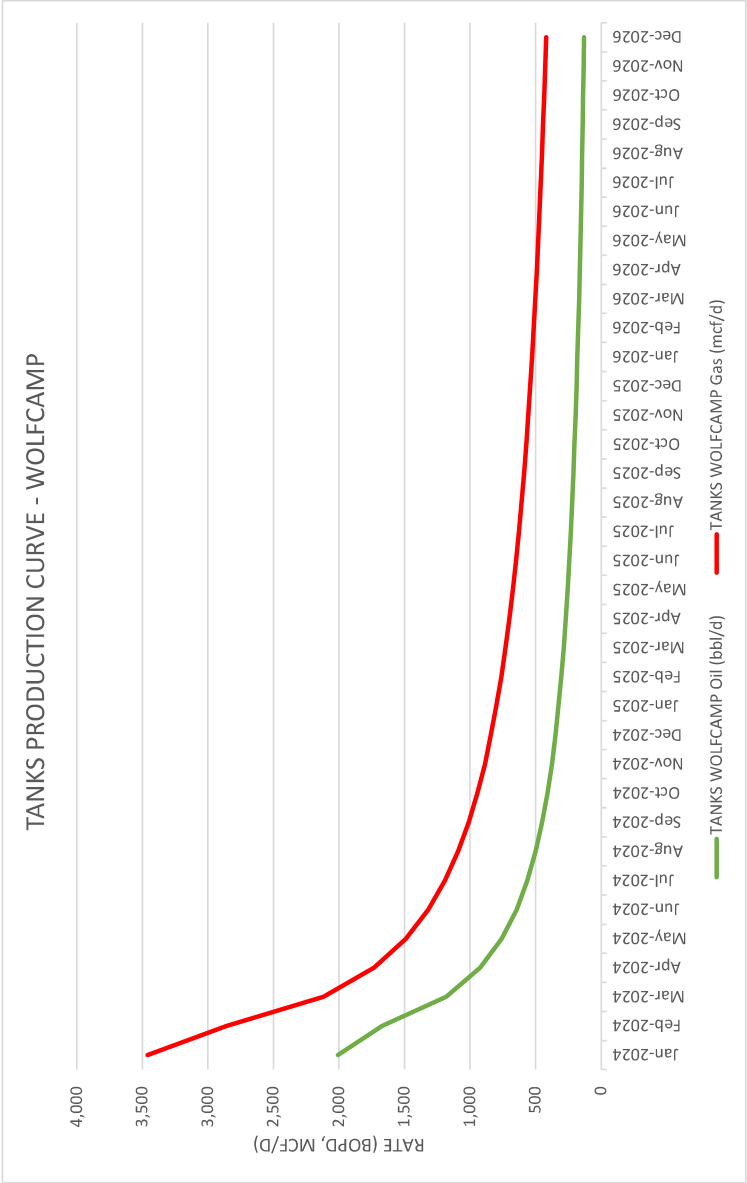

Oxy USA Inc. - STRESSED DESSERTS 36_1 FED COM 4H

Drill Plan

1. Geologic Formations

TVD of Target (ft):	9935	Pilot Hole Depth (ft):	
Total Measured Depth (ft):	17693	Deepest Expected Fresh Water (ft):	776

Delaware Basin

Formation	MD-RKB (ft)	TVD-RKB (ft)	Expected Fluids
Rustler	776	776	
Salado	1043	1043	Salt
Castile	2592	2592	Salt
Delaware	4451	4451	Oil/Gas/Brine
Bell Canyon	4528	4528	Oil/Gas/Brine
Cherry Canyon	5419	5415	Oil/Gas/Brine
Brushy Canyon	6721	6678	Losses
Bone Spring	8554	8443	Oil/Gas
Bone Spring 1st	9632	9481	Oil/Gas
Bone Spring 2nd			Oil/Gas
Bone Spring 3rd			Oil/Gas
Wolfcamp			Oil/Gas
Penn			Oil/Gas
Strawn			Oil/Gas

*H2S, water flows, loss of circulation, abnormal pressures, etc.

2. Casing Program

Section	Hole Size (in)	MD		TVD		Csg. OD (in)	Csg Wt. (ppf)	Grade	Conn.
		From (ft)	To (ft)	From (ft)	To (ft)				
Surface	17.5	0	836	0	836	13.375	54.5	J-55	BTC
Salt	12.25	0	4551	0	4551	10.75	45.5	L-80 HC	BTC-SC
Intermediate	9.875	0	9423	0	9277	7.625	26.4	L-80 HC	BTC
Production	6.75	0	17693	0	9935	5.5	20	P-110	Sprint-SF

All casing strings will be tested in accordance with 43 CFR part 3170 Subpart 3172

All Casing SF Values will meet or exceed those below			
SF Collapse	SF Burst	Body SF Tension	Joint SF Tension
1.00	1.100	1.4	1.4

	Y or N
Is casing new? If used, attach certification as required in 43 CFR 3160	Y
Does casing meet API specifications? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	Y
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the intermediate pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary.	
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-P and SOPA?	Y
If yes, are the first three strings cemented to surface?	Y
Is 2 nd string set 100' to 600' below the base of salt?	Y
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

3. Cementing Program

Section	Stage	Slurry:	Sacks	Yield (ft ³ /ft)	Density (lb/gal)	Excess:	TOC	Placement	Description
Surface	1	Surface - Tail	873	1.33	14.8	100%	-	Circulate	Class C+Accel.
Int.1	1	Intermediate - Tail	85	1.33	14.8	20%	4,051	Circulate	Class C+Accel.
Int.1	1	Intermediate - Lead	639	1.73	12.9	50%	-	Circulate	Class Pozz+Ret.
Int. 2	1	Intermediate 1S - Tail	329	1.68	13.2	5%	6,971	Circulate	Class C+Ret., Disper.
Int. 2	2	Intermediate 2S - Tail BH	445	1.71	13.3	25%	4,051	Bradenhead Post-Frac	Class C+Accel.
Prod.	1	Production - Tail	496	1.84	13.3	25%	8,923	Circulate	Class C+Ret.

Offline Cementing Request

Oxy requests a variance to cement the 9.625" and/or 7.625" intermediate casing strings offline in accordance to the approved variance, EC Tran 461365. Please see Offline Cementing Variance

Bradenhead CBL Request

Oxy requests permission to adjust the CBL requirement after bradenhead cement jobs, on 7-5/8" intermediate casings, as per the agreement reached in the OXY/BLM meeting on September 5, 2019. Please see Bradenhead CBL Variance attachment for further details.

4. Pressure Control Equipment

BOP installed and tested before drilling which hole?	Size?	Min. Required WP	Type		✓	Tested to:	TVD Depth (ft) per Section:
12.25" Hole	13-5/8"	5M	Annular		✓	70% of working pressure	4551
		5M	Blind Ram		✓	250 psi / 5000 psi	
			Pipe Ram				
			Double Ram		✓		
			Other*				
9.875" Hole	13-5/8"	5M	Annular		✓	70% of working pressure	9277
		5M	Blind Ram		✓	250 psi / 5000 psi	
			Pipe Ram				
			Double Ram		✓		
			Other*				
6.75" Hole	13-5/8"	5M	Annular		✓	70% of working pressure	9935
		5M	Blind Ram		✓	250 psi / 5000 psi	
			Pipe Ram				
			Double Ram		✓		
			Other*				

*Specify if additional ram is utilized

BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per 43 CFR part 3170 Subpart 3172 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested.

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke

	Formation integrity test will be performed per 43 CFR part 3170 Subpart 3172.
	On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with 43 CFR part 3170 Subpart 3172.
	A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs and hydrostatic test chart.
Y	Are anchors required by manufacturer?
	A multibowl or a unionized multibowl wellhead system will be employed. The wellhead and connection to the BOPE will meet all API 6A requirements. The BOP will be tested per 43 CFR part 3170 Subpart 3172 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested. We will test the flange connection of the wellhead with a test port that is directly in the flange. We are proposing that we will run the wellhead through the rotary prior to cementing surface casing as discussed with the BLM on October 8, 2015.
	See attached schematics.

BOP Break Testing Request

Oxy requests permission to adjust the BOP break testing requirements as per the agreement reached in the OXY/BLM meeting on September 5, 2019. Please see BOP Break Testing Variance attachment for further details.

Oxy will use Cameron ADAPT wellhead system that uses an OEC top flange connection. This connection has been fully vetted and verified by API to Spec 6A and carries an API monogram.

5. Mud Program

Section	Depth		Depth - TVD		Type	Weight (ppg)	Viscosity	Water Loss
	From (ft)	To (ft)	From (ft)	To (ft)				
Surface	0	836	0	836	Water-Based Mud	8.6 - 8.8	40-60	N/C
Intermediate 1	836	4551	836	4551	Saturated Brine-Based or Oil-Based Mud	8.0 - 10.0	35-45	N/C
Intermediate 2	4551	9423	4551	9277	Water-Based or Oil-Based Mud	8.0 - 10.0	38-50	N/C
Production	9423	17693	9277	9935	Water-Based or Oil-Based Mud	8.0 - 9.6	38-50	N/C

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times. The following is a general list of products: Barite, Bentonite, Gypsum, Lime, Soda Ash, Caustic Soda, Nut Plug, Cedar Fiber, Cotton Seed Hulls, Drilling Paper, Salt Water Clay, CACL2. Oxy will use a closed mud system.

What will be used to monitor the loss or gain of fluid?	PVT/MD Totco/Visual Monitoring
---	--------------------------------

6. Logging and Testing Procedures

Logging, Coring and Testing.		
Yes	Will run GR from TD to surface (horizontal well – vertical portion of hole).	
	Stated logs run will be in the Completion Report and submitted to the BLM.	
No	Logs are planned based on well control or offset log information.	
No	Drill stem test? If yes, explain	
No	Coring? If yes, explain	
Additional logs planned		Interval
No	Resistivity	
No	Density	
Yes	CBL	Production string
Yes	Mud log	Bone Spring – TD
No	PEX	

7. Drilling Conditions

Condition	Specify what type and where?
BH Pressure at deepest TVD	4960 psi
Abnormal Temperature	No
BH Temperature at deepest TVD	160°F

Pump high viscosity sweeps as needed for hole cleaning. The mud system will be monitored visually/manually as well as with an electronic PVT. The necessary mud products for additional weight and fluid loss control will be on location at all times. Appropriately weighted mud will be used to isolate potential gas, oil, and water zones until such time as casing can be cemented into place for

Hydrogen Sulfide (H2S) monitors will be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of 43 CFR part 3170 Subpart 3172. If Hydrogen Sulfide is encountered, measured values and formations will be provided to the BLM.


N	H2S is present
Y	H2S Plan attached

8. Other facets of operation

	Yes/No
Will the well be drilled with a walking/skidding operation? If yes, describe. We plan to drill the 4 well pad in batch by section: all surface sections, intermediate sections and production sections. The wellhead will be secured with a night cap whenever the rig is not over the well.	Yes
Will more than one drilling rig be used for drilling operations? If yes, describe. Oxy requests the option to contract a Surface Rig to drill, set surface casing, and cement for this well. If the timing between rigs is such that Oxy would not be able to preset surface, the Primary Rig will MIRU and drill the well in its entirety per the APD. Please see the attached document for information on the snudder rig	Yes
Total Estimated Cuttings Volume: 1618 bbls	

Revision Date – May 21, 2024

4-String Design – Open Int 1 x Int 2 Annulus

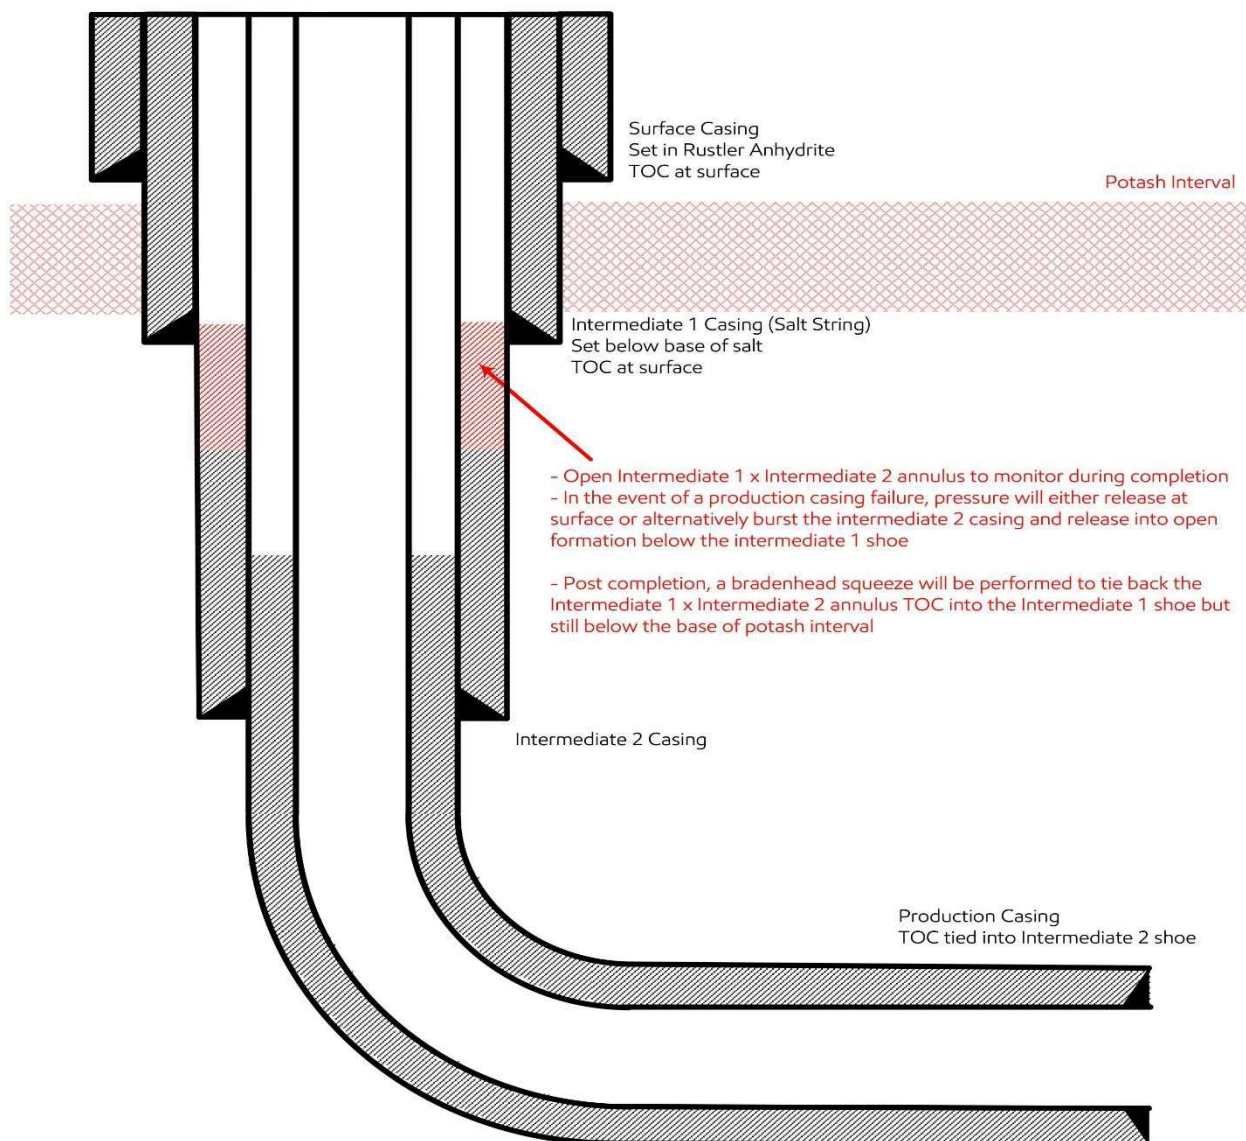
**Update May 2024:**

OXY is aware of the R111-Q update and will comply with these requirements including (but not limited to):

- 1) Alignment with KPLA requirements per schematic above, leaving open annulus for pressure monitoring during frac and utilizing new casing that meets API standards
- 2) Contingency plans in place to divert formation fluids away from salt interval in event of production casing failure
- 3) Bradenhead squeeze to be completed within 180days to tie back TOC to salt string at least 500ft but with top below Marker Bed 126
- 4) Production cement to be tied back no less than 500ft inside previous casing shoe
- 5) While drilling salt interval, separation distance to any active/inactive producing offset well will be ensured such that $SF > 1.0$; Anti-Collision Reports will be provided with APD Packages for review where $SF < 1.5$ against any applicable offset well, or where center-to-center separation against a blind or inclination only surveyed offset well is less than 500ft

Revision Date – May 21, 2024

3-String Design – Open Production Casing Annulus

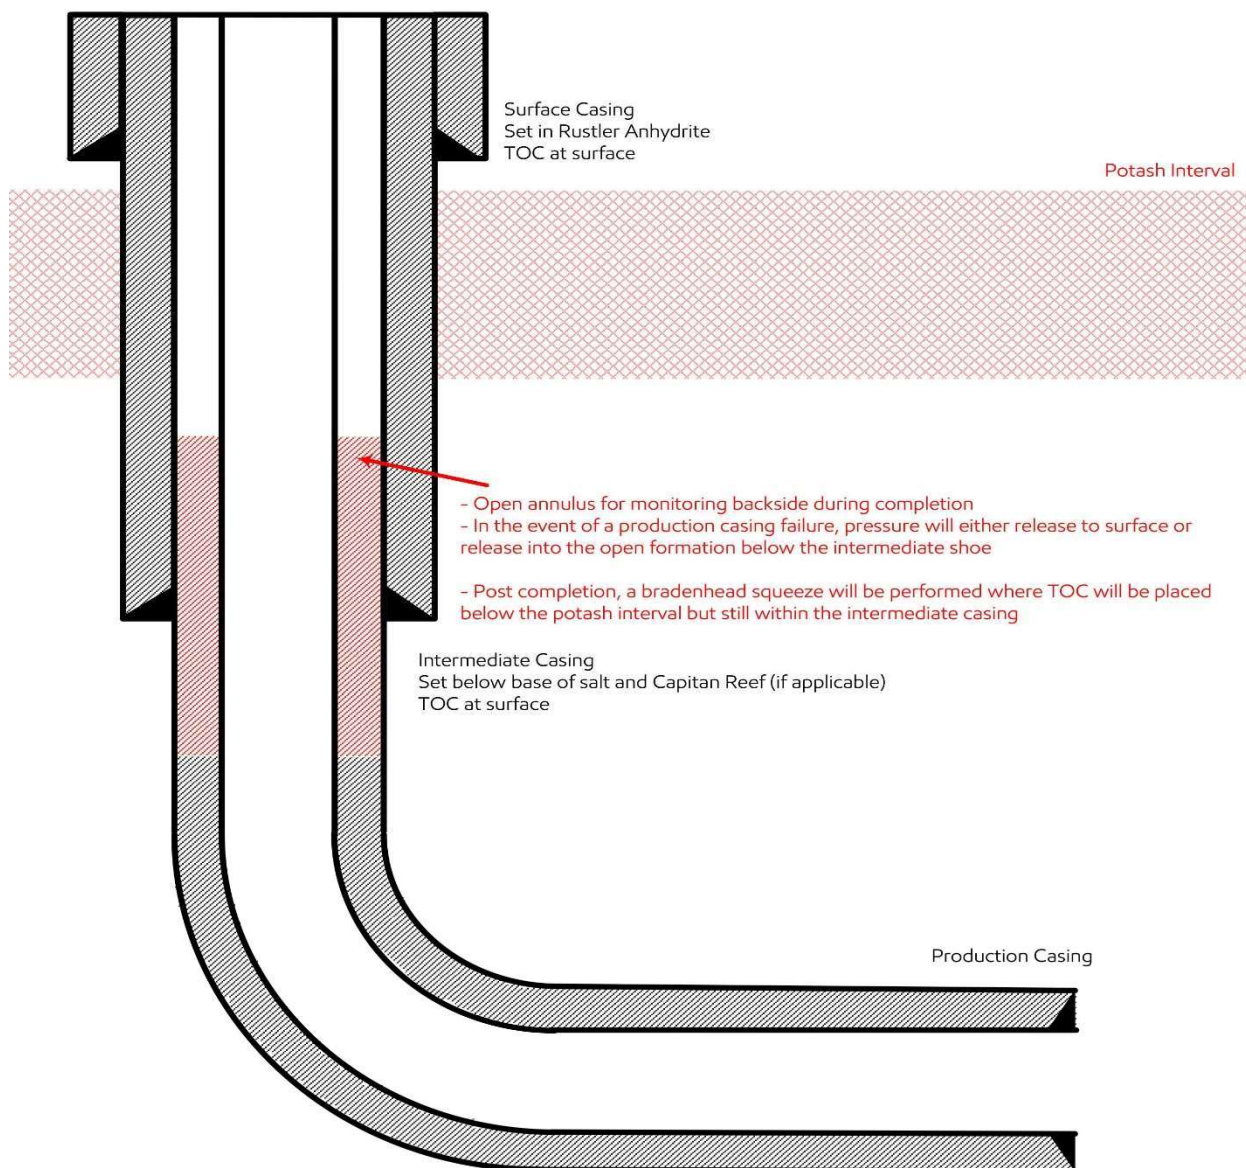

Update May 2024:

OXY is aware of the R111-Q update and will comply with these requirements including (but not limited to):

- 1) Alignment with KPLA requirements per schematic above, leaving open annulus for pressure monitoring during frac and utilizing new casing that meets API standards
- 2) Contingency plans in place to divert formation fluids away from salt interval in event of production casing failure
- 3) Bradenhead squeeze for Production cement to be completed within 180days to tie back TOC to previous casing string at least 500ft but with top below Marker Bed 126
- 4) While drilling salt interval, separation distance to any active/inactive producing offset well will be ensured such that $SF > 1.0$; Anti-Collision Reports will be provided with APD Packages for review where $SF < 1.5$ against any applicable offset well, or where center-to-center separation against a blind or inclination only surveyed offset well is less than 500ft

OXY

PRD NM DIRECTIONAL PLANS (NAD 1983)

Stressed Desserts 36_1 Fed Com

Stressed Desserts 36_1 Fed Com 4H

Wellbore #1

Plan: Permitting Plan

Standard Planning Report

20 June, 2024

OXY

Planning Report

Database:	HOPSPP	Local Co-ordinate Reference:	Well Stressed Desserts 36_1 Fed Com 4H
Company:	ENGINEERING DESIGNS	TVD Reference:	RKB = 25' @ 3630.00ft
Project:	PRD NM DIRECTIONAL PLANS (NAD 1983)	MD Reference:	RKB = 25' @ 3630.00ft
Site:	Stressed Desserts 36_1 Fed Com	North Reference:	Grid
Well:	Stressed Desserts 36_1 Fed Com 4H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permitting Plan		

Project	PRD NM DIRECTIONAL PLANS (NAD 1983)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		Using geodetic scale factor

Site	Stressed Desserts 36_1 Fed Com		
Site Position:		Northing:	522,341.86 usft
From:	Map	Easting:	726,275.74 usft
Position Uncertainty:	0.00 ft	Slot Radius:	13.200 in
		Latitude:	32.434557
		Longitude:	-103.733896

Well	Stressed Desserts 36_1 Fed Com 4H		
Well Position	+N/-S	0.00 ft	Northing:
	+E/-W	0.00 ft	Easting:
Position Uncertainty	2.00 ft	Wellhead Elevation:	ft
Grid Convergence:	0.32 °		
		Latitude:	32.434735
		Longitude:	-103.728351
		Ground Level:	3,605.00 ft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	HDGM_FILE	6/20/2024	6.37	60.05	47,561.20000000

Design	Permitting Plan			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)
	0.00	0.00	0.00	170.26

Plan Survey Tool Program	Date	6/20/2024		
Depth From (ft)	Depth To (ft)	Survey (Wellbore)	Tool Name	Remarks
1	0.00	17,693.36	Permitting Plan (Wellbore #1)	SQC_C705Mb_MWD+IFR1
				MWD+IFR1+Sag+FDIR

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
4,500.00	0.00	0.00	4,500.00	0.00	0.00	0.00	0.00	0.00	0.00	
6,056.07	15.56	87.34	6,037.01	9.73	209.78	1.00	1.00	0.00	87.34	
9,523.07	15.56	87.34	9,376.93	52.83	1,138.83	0.00	0.00	0.00	0.00	
10,429.38	90.00	179.70	9,935.00	-519.26	1,297.14	10.00	8.21	10.19	92.27	
17,693.36	90.00	179.70	9,935.00	-7,783.14	1,335.61	0.00	0.00	0.00	0.00	PBHL (Stressed)

OXY
Planning Report

Database:	HOPSPP	Local Co-ordinate Reference:	Well Stressed Desserts 36_1 Fed Com 4H
Company:	ENGINEERING DESIGNS	TVD Reference:	RKB = 25' @ 3630.00ft
Project:	PRD NM DIRECTIONAL PLANS (NAD 1983)	MD Reference:	RKB = 25' @ 3630.00ft
Site:	Stressed Desserts 36_1 Fed Com	North Reference:	Grid
Well:	Stressed Desserts 36_1 Fed Com 4H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permitting Plan		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00
2,100.00	0.00	0.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.00
2,200.00	0.00	0.00	2,200.00	0.00	0.00	0.00	0.00	0.00	0.00
2,300.00	0.00	0.00	2,300.00	0.00	0.00	0.00	0.00	0.00	0.00
2,400.00	0.00	0.00	2,400.00	0.00	0.00	0.00	0.00	0.00	0.00
2,500.00	0.00	0.00	2,500.00	0.00	0.00	0.00	0.00	0.00	0.00
2,600.00	0.00	0.00	2,600.00	0.00	0.00	0.00	0.00	0.00	0.00
2,700.00	0.00	0.00	2,700.00	0.00	0.00	0.00	0.00	0.00	0.00
2,800.00	0.00	0.00	2,800.00	0.00	0.00	0.00	0.00	0.00	0.00
2,900.00	0.00	0.00	2,900.00	0.00	0.00	0.00	0.00	0.00	0.00
3,000.00	0.00	0.00	3,000.00	0.00	0.00	0.00	0.00	0.00	0.00
3,100.00	0.00	0.00	3,100.00	0.00	0.00	0.00	0.00	0.00	0.00
3,200.00	0.00	0.00	3,200.00	0.00	0.00	0.00	0.00	0.00	0.00
3,300.00	0.00	0.00	3,300.00	0.00	0.00	0.00	0.00	0.00	0.00
3,400.00	0.00	0.00	3,400.00	0.00	0.00	0.00	0.00	0.00	0.00
3,500.00	0.00	0.00	3,500.00	0.00	0.00	0.00	0.00	0.00	0.00
3,600.00	0.00	0.00	3,600.00	0.00	0.00	0.00	0.00	0.00	0.00
3,700.00	0.00	0.00	3,700.00	0.00	0.00	0.00	0.00	0.00	0.00
3,800.00	0.00	0.00	3,800.00	0.00	0.00	0.00	0.00	0.00	0.00
3,900.00	0.00	0.00	3,900.00	0.00	0.00	0.00	0.00	0.00	0.00
4,000.00	0.00	0.00	4,000.00	0.00	0.00	0.00	0.00	0.00	0.00
4,100.00	0.00	0.00	4,100.00	0.00	0.00	0.00	0.00	0.00	0.00
4,200.00	0.00	0.00	4,200.00	0.00	0.00	0.00	0.00	0.00	0.00
4,300.00	0.00	0.00	4,300.00	0.00	0.00	0.00	0.00	0.00	0.00
4,400.00	0.00	0.00	4,400.00	0.00	0.00	0.00	0.00	0.00	0.00
4,500.00	0.00	0.00	4,500.00	0.00	0.00	0.00	0.00	0.00	0.00
4,600.00	1.00	87.34	4,600.00	0.04	0.87	0.11	1.00	1.00	0.00
4,700.00	2.00	87.34	4,699.96	0.16	3.49	0.43	1.00	1.00	0.00
4,800.00	3.00	87.34	4,799.86	0.36	7.84	0.97	1.00	1.00	0.00
4,900.00	4.00	87.34	4,899.68	0.65	13.94	1.72	1.00	1.00	0.00
5,000.00	5.00	87.34	4,999.37	1.01	21.78	2.69	1.00	1.00	0.00
5,100.00	6.00	87.34	5,098.90	1.45	31.35	3.87	1.00	1.00	0.00
5,200.00	7.00	87.34	5,198.26	1.98	42.66	5.26	1.00	1.00	0.00
5,300.00	8.00	87.34	5,297.40	2.58	55.70	6.87	1.00	1.00	0.00
5,400.00	9.00	87.34	5,396.30	3.27	70.46	8.70	1.00	1.00	0.00

OXY

Planning Report

Database:	HOPSPP	Local Co-ordinate Reference:	Well Stressed Desserts 36_1 Fed Com 4H
Company:	ENGINEERING DESIGNS	TVD Reference:	RKB = 25' @ 3630.00ft
Project:	PRD NM DIRECTIONAL PLANS (NAD 1983)	MD Reference:	RKB = 25' @ 3630.00ft
Site:	Stressed Desserts 36_1 Fed Com	North Reference:	Grid
Well:	Stressed Desserts 36_1 Fed Com 4H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permitting Plan		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
5,500.00	10.00	87.34	5,494.93	4.03	86.95	10.73	1.00	1.00	0.00
5,600.00	11.00	87.34	5,593.26	4.88	105.16	12.98	1.00	1.00	0.00
5,700.00	12.00	87.34	5,691.25	5.80	125.07	15.44	1.00	1.00	0.00
5,800.00	13.00	87.34	5,788.87	6.80	146.69	18.10	1.00	1.00	0.00
5,900.00	14.00	87.34	5,886.11	7.89	170.01	20.98	1.00	1.00	0.00
6,000.00	15.00	87.34	5,982.92	9.05	195.02	24.07	1.00	1.00	0.00
6,056.07	15.56	87.34	6,037.01	9.73	209.78	25.89	1.00	1.00	0.00
6,100.00	15.56	87.34	6,079.33	10.28	221.55	27.34	0.00	0.00	0.00
6,200.00	15.56	87.34	6,175.67	11.52	248.35	30.65	0.00	0.00	0.00
6,300.00	15.56	87.34	6,272.00	12.76	275.15	33.96	0.00	0.00	0.00
6,400.00	15.56	87.34	6,368.34	14.01	301.94	37.26	0.00	0.00	0.00
6,500.00	15.56	87.34	6,464.67	15.25	328.74	40.57	0.00	0.00	0.00
6,600.00	15.56	87.34	6,561.00	16.49	355.54	43.88	0.00	0.00	0.00
6,700.00	15.56	87.34	6,657.34	17.74	382.34	47.18	0.00	0.00	0.00
6,800.00	15.56	87.34	6,753.67	18.98	409.13	50.49	0.00	0.00	0.00
6,900.00	15.56	87.34	6,850.01	20.22	435.93	53.80	0.00	0.00	0.00
7,000.00	15.56	87.34	6,946.34	21.46	462.73	57.11	0.00	0.00	0.00
7,100.00	15.56	87.34	7,042.68	22.71	489.52	60.41	0.00	0.00	0.00
7,200.00	15.56	87.34	7,139.01	23.95	516.32	63.72	0.00	0.00	0.00
7,300.00	15.56	87.34	7,235.35	25.19	543.12	67.03	0.00	0.00	0.00
7,400.00	15.56	87.34	7,331.68	26.44	569.92	70.33	0.00	0.00	0.00
7,500.00	15.56	87.34	7,428.02	27.68	596.71	73.64	0.00	0.00	0.00
7,600.00	15.56	87.34	7,524.35	28.92	623.51	76.95	0.00	0.00	0.00
7,700.00	15.56	87.34	7,620.69	30.17	650.31	80.26	0.00	0.00	0.00
7,800.00	15.56	87.34	7,717.02	31.41	677.10	83.56	0.00	0.00	0.00
7,900.00	15.56	87.34	7,813.36	32.65	703.90	86.87	0.00	0.00	0.00
8,000.00	15.56	87.34	7,909.69	33.90	730.70	90.18	0.00	0.00	0.00
8,100.00	15.56	87.34	8,006.03	35.14	757.49	93.48	0.00	0.00	0.00
8,200.00	15.56	87.34	8,102.36	36.38	784.29	96.79	0.00	0.00	0.00
8,300.00	15.56	87.34	8,198.69	37.62	811.09	100.10	0.00	0.00	0.00
8,400.00	15.56	87.34	8,295.03	38.87	837.89	103.40	0.00	0.00	0.00
8,500.00	15.56	87.34	8,391.36	40.11	864.68	106.71	0.00	0.00	0.00
8,600.00	15.56	87.34	8,487.70	41.35	891.48	110.02	0.00	0.00	0.00
8,700.00	15.56	87.34	8,584.03	42.60	918.28	113.33	0.00	0.00	0.00
8,800.00	15.56	87.34	8,680.37	43.84	945.07	116.63	0.00	0.00	0.00
8,900.00	15.56	87.34	8,776.70	45.08	971.87	119.94	0.00	0.00	0.00
9,000.00	15.56	87.34	8,873.04	46.33	998.67	123.25	0.00	0.00	0.00
9,100.00	15.56	87.34	8,969.37	47.57	1,025.47	126.55	0.00	0.00	0.00
9,200.00	15.56	87.34	9,065.71	48.81	1,052.26	129.86	0.00	0.00	0.00
9,300.00	15.56	87.34	9,162.04	50.06	1,079.06	133.17	0.00	0.00	0.00
9,400.00	15.56	87.34	9,258.38	51.30	1,105.86	136.48	0.00	0.00	0.00
9,500.00	15.56	87.34	9,354.71	52.54	1,132.65	139.78	0.00	0.00	0.00
9,523.07	15.56	87.34	9,376.93	52.83	1,138.83	140.54	0.00	0.00	0.00
9,600.00	17.04	114.50	9,450.88	48.62	1,159.43	148.17	10.00	1.92	35.30
9,700.00	22.93	138.56	9,544.97	27.89	1,185.72	173.05	10.00	5.89	24.06
9,800.00	30.92	152.01	9,634.14	-9.49	1,210.73	214.12	10.00	7.99	13.45
9,900.00	39.76	160.16	9,715.69	-62.39	1,233.70	270.14	10.00	8.84	8.14
10,000.00	48.98	165.69	9,787.12	-129.19	1,253.93	339.41	10.00	9.23	5.54
10,100.00	58.41	169.84	9,846.28	-207.87	1,270.80	419.81	10.00	9.43	4.15
10,200.00	67.95	173.22	9,891.35	-296.03	1,283.81	508.90	10.00	9.54	3.38
10,300.00	77.54	176.17	9,920.99	-391.01	1,292.56	603.99	10.00	9.60	2.95
10,400.00	87.17	178.91	9,934.27	-489.90	1,296.78	702.17	10.00	9.63	2.74
10,429.38	90.00	179.70	9,935.00	-519.26	1,297.14	731.17	10.00	9.63	2.68
10,500.00	90.00	179.70	9,935.00	-589.89	1,297.51	800.84	0.00	0.00	0.00
10,600.00	90.00	179.70	9,935.00	-689.89	1,298.04	899.49	0.00	0.00	0.00

OXY

Planning Report

Database:	HOPSPP	Local Co-ordinate Reference:	Well Stressed Desserts 36_1 Fed Com 4H
Company:	ENGINEERING DESIGNS	TVD Reference:	RKB = 25' @ 3630.00ft
Project:	PRD NM DIRECTIONAL PLANS (NAD 1983)	MD Reference:	RKB = 25' @ 3630.00ft
Site:	Stressed Desserts 36_1 Fed Com	North Reference:	Grid
Well:	Stressed Desserts 36_1 Fed Com 4H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permitting Plan		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
10,700.00	90.00	179.70	9,935.00	-789.89	1,298.57	998.13	0.00	0.00	0.00
10,800.00	90.00	179.70	9,935.00	-889.88	1,299.10	1,096.78	0.00	0.00	0.00
10,900.00	90.00	179.70	9,935.00	-989.88	1,299.63	1,195.43	0.00	0.00	0.00
11,000.00	90.00	179.70	9,935.00	-1,089.88	1,300.16	1,294.08	0.00	0.00	0.00
11,100.00	90.00	179.70	9,935.00	-1,189.88	1,300.69	1,392.73	0.00	0.00	0.00
11,200.00	90.00	179.70	9,935.00	-1,289.88	1,301.22	1,491.37	0.00	0.00	0.00
11,300.00	90.00	179.70	9,935.00	-1,389.88	1,301.75	1,590.02	0.00	0.00	0.00
11,400.00	90.00	179.70	9,935.00	-1,489.88	1,302.28	1,688.67	0.00	0.00	0.00
11,500.00	90.00	179.70	9,935.00	-1,589.87	1,302.81	1,787.32	0.00	0.00	0.00
11,600.00	90.00	179.70	9,935.00	-1,689.87	1,303.34	1,885.96	0.00	0.00	0.00
11,700.00	90.00	179.70	9,935.00	-1,789.87	1,303.87	1,984.61	0.00	0.00	0.00
11,800.00	90.00	179.70	9,935.00	-1,889.87	1,304.40	2,083.26	0.00	0.00	0.00
11,900.00	90.00	179.70	9,935.00	-1,989.87	1,304.93	2,181.91	0.00	0.00	0.00
12,000.00	90.00	179.70	9,935.00	-2,089.87	1,305.46	2,280.55	0.00	0.00	0.00
12,100.00	90.00	179.70	9,935.00	-2,189.87	1,305.99	2,379.20	0.00	0.00	0.00
12,200.00	90.00	179.70	9,935.00	-2,289.86	1,306.52	2,477.85	0.00	0.00	0.00
12,300.00	90.00	179.70	9,935.00	-2,389.86	1,307.05	2,576.50	0.00	0.00	0.00
12,400.00	90.00	179.70	9,935.00	-2,489.86	1,307.58	2,675.14	0.00	0.00	0.00
12,500.00	90.00	179.70	9,935.00	-2,589.86	1,308.11	2,773.79	0.00	0.00	0.00
12,600.00	90.00	179.70	9,935.00	-2,689.86	1,308.63	2,872.44	0.00	0.00	0.00
12,700.00	90.00	179.70	9,935.00	-2,789.86	1,309.16	2,971.09	0.00	0.00	0.00
12,800.00	90.00	179.70	9,935.00	-2,889.86	1,309.69	3,069.73	0.00	0.00	0.00
12,900.00	90.00	179.70	9,935.00	-2,989.85	1,310.22	3,168.38	0.00	0.00	0.00
13,000.00	90.00	179.70	9,935.00	-3,089.85	1,310.75	3,267.03	0.00	0.00	0.00
13,100.00	90.00	179.70	9,935.00	-3,189.85	1,311.28	3,365.68	0.00	0.00	0.00
13,200.00	90.00	179.70	9,935.00	-3,289.85	1,311.81	3,464.32	0.00	0.00	0.00
13,300.00	90.00	179.70	9,935.00	-3,389.85	1,312.34	3,562.97	0.00	0.00	0.00
13,400.00	90.00	179.70	9,935.00	-3,489.85	1,312.87	3,661.62	0.00	0.00	0.00
13,500.00	90.00	179.70	9,935.00	-3,589.85	1,313.40	3,760.27	0.00	0.00	0.00
13,600.00	90.00	179.70	9,935.00	-3,689.84	1,313.93	3,858.91	0.00	0.00	0.00
13,700.00	90.00	179.70	9,935.00	-3,789.84	1,314.46	3,957.56	0.00	0.00	0.00
13,800.00	90.00	179.70	9,935.00	-3,889.84	1,314.99	4,056.21	0.00	0.00	0.00
13,900.00	90.00	179.70	9,935.00	-3,989.84	1,315.52	4,154.86	0.00	0.00	0.00
14,000.00	90.00	179.70	9,935.00	-4,089.84	1,316.05	4,253.50	0.00	0.00	0.00
14,100.00	90.00	179.70	9,935.00	-4,189.84	1,316.58	4,352.15	0.00	0.00	0.00
14,200.00	90.00	179.70	9,935.00	-4,289.84	1,317.11	4,450.80	0.00	0.00	0.00
14,300.00	90.00	179.70	9,935.00	-4,389.84	1,317.64	4,549.45	0.00	0.00	0.00
14,400.00	90.00	179.70	9,935.00	-4,489.83	1,318.17	4,648.09	0.00	0.00	0.00
14,500.00	90.00	179.70	9,935.00	-4,589.83	1,318.70	4,746.74	0.00	0.00	0.00
14,600.00	90.00	179.70	9,935.00	-4,689.83	1,319.23	4,845.39	0.00	0.00	0.00
14,700.00	90.00	179.70	9,935.00	-4,789.83	1,319.76	4,944.04	0.00	0.00	0.00
14,800.00	90.00	179.70	9,935.00	-4,889.83	1,320.29	5,042.68	0.00	0.00	0.00
14,900.00	90.00	179.70	9,935.00	-4,989.83	1,320.82	5,141.33	0.00	0.00	0.00
15,000.00	90.00	179.70	9,935.00	-5,089.83	1,321.35	5,239.98	0.00	0.00	0.00
15,100.00	90.00	179.70	9,935.00	-5,189.82	1,321.88	5,338.63	0.00	0.00	0.00
15,200.00	90.00	179.70	9,935.00	-5,289.82	1,322.41	5,437.27	0.00	0.00	0.00
15,300.00	90.00	179.70	9,935.00	-5,389.82	1,322.93	5,535.92	0.00	0.00	0.00
15,400.00	90.00	179.70	9,935.00	-5,489.82	1,323.46	5,634.57	0.00	0.00	0.00
15,500.00	90.00	179.70	9,935.00	-5,589.82	1,323.99	5,733.22	0.00	0.00	0.00
15,600.00	90.00	179.70	9,935.00	-5,689.82	1,324.52	5,831.87	0.00	0.00	0.00
15,700.00	90.00	179.70	9,935.00	-5,789.82	1,325.05	5,930.51	0.00	0.00	0.00
15,800.00	90.00	179.70	9,935.00	-5,889.81	1,325.58	6,029.16	0.00	0.00	0.00
15,900.00	90.00	179.70	9,935.00	-5,989.81	1,326.11	6,127.81	0.00	0.00	0.00
16,000.00	90.00	179.70	9,935.00	-6,089.81	1,326.64	6,226.46	0.00	0.00	0.00
16,100.00	90.00	179.70	9,935.00	-6,189.81	1,327.17	6,325.10	0.00	0.00	0.00

OXY

Planning Report

Database:	HOPSPP	Local Co-ordinate Reference:	Well Stressed Desserts 36_1 Fed Com 4H
Company:	ENGINEERING DESIGNS	TVD Reference:	RKB = 25' @ 3630.00ft
Project:	PRD NM DIRECTIONAL PLANS (NAD 1983)	MD Reference:	RKB = 25' @ 3630.00ft
Site:	Stressed Desserts 36_1 Fed Com	North Reference:	Grid
Well:	Stressed Desserts 36_1 Fed Com 4H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permitting Plan		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
16,200.00	90.00	179.70	9,935.00	-6,289.81	1,327.70	6,423.75	0.00	0.00	0.00
16,300.00	90.00	179.70	9,935.00	-6,389.81	1,328.23	6,522.40	0.00	0.00	0.00
16,400.00	90.00	179.70	9,935.00	-6,489.81	1,328.76	6,621.05	0.00	0.00	0.00
16,500.00	90.00	179.70	9,935.00	-6,589.80	1,329.29	6,719.69	0.00	0.00	0.00
16,600.00	90.00	179.70	9,935.00	-6,689.80	1,329.82	6,818.34	0.00	0.00	0.00
16,700.00	90.00	179.70	9,935.00	-6,789.80	1,330.35	6,916.99	0.00	0.00	0.00
16,800.00	90.00	179.70	9,935.00	-6,889.80	1,330.88	7,015.64	0.00	0.00	0.00
16,900.00	90.00	179.70	9,935.00	-6,989.80	1,331.41	7,114.28	0.00	0.00	0.00
17,000.00	90.00	179.70	9,935.00	-7,089.80	1,331.94	7,212.93	0.00	0.00	0.00
17,100.00	90.00	179.70	9,935.00	-7,189.80	1,332.47	7,311.58	0.00	0.00	0.00
17,200.00	90.00	179.70	9,935.00	-7,289.79	1,333.00	7,410.23	0.00	0.00	0.00
17,300.00	90.00	179.70	9,935.00	-7,389.79	1,333.53	7,508.87	0.00	0.00	0.00
17,400.00	90.00	179.70	9,935.00	-7,489.79	1,334.06	7,607.52	0.00	0.00	0.00
17,500.00	90.00	179.70	9,935.00	-7,589.79	1,334.59	7,706.17	0.00	0.00	0.00
17,600.00	90.00	179.70	9,935.00	-7,689.79	1,335.12	7,804.82	0.00	0.00	0.00
17,693.36	90.00	179.70	9,935.00	-7,783.14	1,335.61	7,896.91	0.00	0.00	0.00

Design Targets									
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (usft)	Easting (usft)	Latitude	Longitude
- hit/miss target - Shape									
KOP (Stressed - plan misses target center by 1295.96ft at 0.00ft MD (0.00 TVD, 0.00 N, 0.00 E) - Point	0.00	0.01	0.00	70.73	1,294.03	522,486.86	729,280.14	32.434909	-103.724156
PBHL (Stressed - plan hits target center - Point	0.00	0.00	9,935.00	-7,783.14	1,335.61	514,633.40	729,321.72	32.413322	-103.724166
FTP (Stressed - plan misses target center by 214.41ft at 10000.00ft MD (9787.12 TVD, -129.19 N, 1253.93 E) - Point	0.00	0.00	9,935.00	20.73	1,294.28	522,436.86	729,280.39	32.434772	-103.724156

Formations						
Measured Depth (ft)	Vertical Depth (ft)	Name	Lithology	Dip (°)	Dip Direction (°)	
776.00	776.00	RUSTLER				
1,043.00	1,043.00	SALADO				
2,592.00	2,592.00	CASTILE				
4,451.00	4,451.00	DELAWARE				
4,528.00	4,528.00	BELL CANYON				
5,418.93	5,415.00	CHERRY CANYON				
6,721.45	6,678.00	BRUSHY CANYON				
8,553.60	8,443.00	BONE SPRING				
9,631.63	9,481.00	BONE SPRING 1ST				

OXY

Planning Report

Database:	HOPSPP	Local Co-ordinate Reference:	Well Stressed Desserts 36_1 Fed Com 4H
Company:	ENGINEERING DESIGNS	TVD Reference:	RKB = 25' @ 3630.00ft
Project:	PRD NM DIRECTIONAL PLANS (NAD 1983)	MD Reference:	RKB = 25' @ 3630.00ft
Site:	Stressed Desserts 36_1 Fed Com	North Reference:	Grid
Well:	Stressed Desserts 36_1 Fed Com 4H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permitting Plan		

Plan Annotations					
Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates		Comment	
		+N/-S (ft)	+E/-W (ft)		
4,500.00	4,500.00	0.00	0.00	Build 1°/100'	
6,056.07	6,037.01	9.73	209.78	Hold 15.56° Tangent	
9,523.07	9,376.93	52.83	1,138.83	KOP, Build 10°/100'	
10,429.38	9,935.00	-519.26	1,297.14	Landing Point	
17,693.36	9,935.00	-7,783.14	1,335.61	TD at 17693.36' MD	

OXY

PRD NM DIRECTIONAL PLANS (NAD 1983)

Stressed Desserts 36_1 Fed Com

Stressed Desserts 36_1 Fed Com 4H

Wellbore #1

Permitting Plan

Anticollision Risk Report

20 June, 2024

OXY
Anticollision Risk Report

Company:	ENGINEERING DESIGNS	Local Co-ordinate Reference:	Well Stressed Desserts 36_1 Fed Com 4H
Project:	PRD NM DIRECTIONAL PLANS (NAD 1983)	TVD Reference:	RKB = 25' @ 3630.00ft
Reference Site:	Stressed Desserts 36_1 Fed Com	MD Reference:	RKB = 25' @ 3630.00ft
Site Error:	0.00	North Reference:	Grid
Reference Well:	Stressed Desserts 36_1 Fed Com 4H	Survey Calculation Method:	Minimum Curvature
Well Error:	2.00	Output errors are at	2.50 sigma
Reference Wellbore	Wellbore #1	Database:	HOPSPP
Reference Design:	Permitting Plan	Offset TVD Reference:	Offset Datum

Wells selected in the offset design

If any of the designs listed here doesn't appear in the below report, you must review the survey program and make sure that it is correct.

Site Name
Offset Well - Wellbore - Design
DR PI FED UNIT 18_7 IPP
DR PI FED UNIT 18-7 IPP 21H - ORIG HOLE - ACTUAL
FEDERAL 01
FEDERAL 1 003 - ORIG HOLE - ACTUAL 00
REGAL LAGER 31_19 FED COM
REGAL LAGER 31_19 FED COM 31H - ORIG HOLE - R
Sec. 1-T22S-R31E
Unocal AHU Federal #2 - ORIG HOLE - ACTUAL 00
Unocal HPC Federal #2 - ORIG HOLE - ACTUAL 00
Sec. 36-T21S-R31E
Lost Tank AIS State #1 - ORIG HOLE - ACTUAL 00
Lost Tank AIS State #6 - ORIG HOLE - ACTUAL 00
Sec. 6-T22S-R32E
Federal 6 #1 - ORIG HOLE - ACTUAL 00
FEDERAL 6 2 - Wellbore #1 - ACTUAL
Rosemary SWD #1 - ORIG HOLE - ACTUAL 00
TOP SPOT 12_13 FEDERAL COM 22S-31E-13
TOP SPOT 12 13 FEDERAL COM 24H - ORIG HOLE - A
TOP SPOT 12 13 FEDERAL COM 25H - ORIG HOLE - A
TOP SPOT 12 13 FEDERAL COM 26H - ORIG HOLE - A
TOP SPOT 12 13 FEDERAL COM 33H - ORIG HOLE - A
TOP SPOT 12_13 FEDERAL COM 35H - ORIG HOLE -

Wellbores with Radioactive Source

Site Name
Offset Well - Wellbore
-

Reference	Permitting Plan		
Filter type:	NO GLOBAL FILTER: Using user defined selection & filtering criteria		
Interpolation Method:	MD Interval 100.00ft	Error Model:	ISCWSA
Depth Range:	0.00 to 5,000.00ft	Scan Method:	Closest Approach 3D
Results Limited by:	Maximum centre distance of 2,506.25ft	Error Surface:	Combined Pedal Curve
Warning Levels Evaluated at:	3.50 Sigma	Casing Method:	Through Borehole Radius

Survey Tool Program		Date	6/20/2024		
From (ft)	To (ft)	Survey (Wellbore)	Tool Name	Description	
0.00	17,693.36	Permitting Plan (Wellbore #1)	SQC_C705Mb_MWD+IFR 1+SAG+FDIR_R5	MWD+IFR1+Sag+FDIR	

OXY
Anticollision Risk Report

Company:	ENGINEERING DESIGNS	Local Co-ordinate Reference:	Well Stressed Desserts 36_1 Fed Com 4H
Project:	PRD NM DIRECTIONAL PLANS (NAD 1983)	TVD Reference:	RKB = 25' @ 3630.00ft
Reference Site:	Stressed Desserts 36_1 Fed Com	MD Reference:	RKB = 25' @ 3630.00ft
Site Error:	0.00	North Reference:	Grid
Reference Well:	Stressed Desserts 36_1 Fed Com 4H	Survey Calculation Method:	Minimum Curvature
Well Error:	2.00	Output errors are at	2.50 sigma
Reference Wellbore	Wellbore #1	Database:	HOPSPP
Reference Design:	Permitting Plan	Offset TVD Reference:	Offset Datum

Summary							
Site Name	Reference Measured Depth (ft)	Offset Measured Depth (ft)	Distance		Separation Factor	Warning	
Offset Well - Wellbore - Design			Between Centres (ft)	Between Ellipses (ft)			
Sec. 36-T21S-R31E							
Lost Tank AIS State #1 - ORIG HOLE - ACTUAL 00	5,000.00	4,983.31	1,128.69	912.25	5.215	CC, ES, SF	
Lost Tank AIS State #6 - ORIG HOLE - ACTUAL 00	3,892.61	3,868.44	626.61	453.90	3.628	CC	
Lost Tank AIS State #6 - ORIG HOLE - ACTUAL 00	4,800.00	4,775.21	631.07	410.69	2.864	ES	
Lost Tank AIS State #6 - ORIG HOLE - ACTUAL 00	5,000.00	4,976.20	639.44	412.57	2.818	SF	

Offset Design												Offset Site Error:	1.79 ft
Sec. 36-T21S-R31E - Lost Tank AIS State #1 - ORIG HOLE - ACTUAL 00												Offset Well Error:	1.79 ft
Survey Program: 250-A027Ub_INC-ONLY_R5													
Reference		Offset		Semi Major Axis		Distance		Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Probability of Collision		Warning
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Between Centres (ft)	Wall-Wall Distance (ft)						
0.00	0.00	0.00	0.00	2.00	2.53	1,147.65	1,146.55				< 1 in 1E+9		
100.00	100.00	82.00	82.00	2.27	3.24	1,147.51	1,146.41	1,139.77	7.74	148.288	< 1 in 1E+9		
200.00	200.00	182.00	182.00	2.73	5.15	1,147.51	1,146.41	1,137.15	10.36	110.777	< 1 in 1E+9		
300.00	300.00	282.01	282.00	3.13	7.39	1,147.51	1,146.41	1,134.07	13.44	85.399	< 1 in 1E+9		
386.98	386.98	368.99	368.98	3.43	9.43	1,147.33	1,146.23	1,131.07	16.25	70.586	< 1 in 1E+9		
400.00	400.00	381.64	381.63	3.48	9.73	1,147.33	1,146.23	1,130.66	16.67	68.816	< 1 in 1E+9		
500.00	500.00	478.83	478.82	3.81	12.06	1,147.48	1,146.38	1,127.58	19.91	57.647	< 1 in 1E+9		
600.00	600.00	582.03	582.00	4.11	14.55	1,147.51	1,146.41	1,124.13	23.37	49.097	< 1 in 1E+9		
696.46	696.46	678.49	678.46	4.38	16.90	1,147.22	1,146.12	1,120.58	26.64	43.063	< 1 in 1E+9		
700.00	700.00	681.96	681.93	4.39	16.98	1,147.22	1,146.12	1,120.46	26.76	42.873	< 1 in 1E+9		
800.00	800.00	780.19	780.16	4.66	19.38	1,147.30	1,146.20	1,117.20	30.10	38.113	< 1 in 1E+9		
900.00	900.00	882.06	882.00	4.92	21.86	1,147.51	1,146.41	1,113.94	33.56	34.189	< 1 in 1E+9		
1,000.00	1,000.00	982.06	982.00	5.16	24.22	1,147.51	1,146.41	1,110.64	36.87	31.126	< 1 in 1E+9		
1,060.94	1,060.94	1,043.00	1,042.93	5.30	25.66	1,147.24	1,146.14	1,108.36	38.88	29.507	< 1 in 1E+9		
1,100.00	1,100.00	1,081.30	1,081.24	5.40	26.56	1,147.26	1,146.16	1,107.11	40.15	28.575	< 1 in 1E+9		
1,200.00	1,200.00	1,179.37	1,179.30	5.62	28.88	1,147.41	1,146.31	1,104.01	43.40	26.440	< 1 in 1E+9		
1,300.00	1,300.00	1,282.08	1,282.00	5.85	31.37	1,147.51	1,146.41	1,100.63	46.88	24.480	< 1 in 1E+9		
1,358.73	1,358.73	1,340.81	1,340.73	5.97	32.81	1,147.38	1,146.28	1,098.49	48.89	23.467	< 1 in 1E+9		
1,400.00	1,400.00	1,381.32	1,381.24	6.06	33.81	1,147.40	1,146.30	1,097.11	50.28	22.818	< 1 in 1E+9		
1,500.00	1,500.00	1,482.10	1,482.00	6.27	36.31	1,147.51	1,146.41	1,093.71	53.79	21.333	< 1 in 1E+9		
1,600.00	1,600.00	1,582.10	1,582.00	6.47	38.95	1,147.51	1,146.41	1,090.04	57.47	19.967	< 1 in 1E+9		
1,626.04	1,626.04	1,607.46	1,607.35	6.52	39.61	1,147.26	1,146.16	1,088.86	58.40	19.643	< 1 in 1E+9		
1,700.00	1,700.00	1,678.81	1,678.70	6.67	41.49	1,147.39	1,146.29	1,086.36	61.03	18.800	< 1 in 1E+9		
1,800.00	1,800.00	1,782.14	1,782.00	6.87	44.22	1,147.51	1,146.41	1,082.66	64.84	17.697	< 1 in 1E+9		
1,856.85	1,856.85	1,838.99	1,838.84	6.97	45.72	1,147.26	1,146.16	1,080.31	66.94	17.138	< 1 in 1E+9		
1,900.00	1,900.00	1,880.61	1,880.46	7.06	46.81	1,147.28	1,146.18	1,078.80	68.48	16.753	< 1 in 1E+9		
2,000.00	2,000.00	1,982.18	1,982.00	7.24	49.50	1,147.51	1,146.41	1,075.27	72.23	15.886	< 1 in 1E+9		
2,100.00	2,100.00	2,082.18	2,082.00	7.43	52.14	1,147.51	1,146.41	1,071.57	75.93	15.112	< 1 in 1E+9		
2,131.53	2,131.53	2,113.30	2,113.11	7.49	52.96	1,147.23	1,146.13	1,070.15	77.09	14.882	< 1 in 1E+9		
2,200.00	2,200.00	2,179.55	2,179.36	7.61	54.72	1,147.32	1,146.22	1,067.79	79.54	14.425	< 1 in 1E+9		
2,300.00	2,300.00	2,282.22	2,282.00	7.79	57.48	1,147.51	1,146.41	1,064.11	83.40	13.759	< 1 in 1E+9		
2,380.71	2,380.71	2,362.91	2,362.69	7.93	59.69	1,147.26	1,146.16	1,060.76	86.50	13.263	< 1 in 1E+9		
2,400.00	2,400.00	2,381.52	2,381.29	7.96	60.20	1,147.26	1,146.16	1,060.05	87.21	13.154	< 1 in 1E+9		
2,500.00	2,500.00	2,477.97	2,477.74	8.14	62.85	1,147.48	1,146.38	1,056.56	90.92	12.621	< 1 in 1E+9		
2,600.00	2,600.00	2,582.27	2,582.00	8.31	66.20	1,147.51	1,146.41	1,051.90	95.60	12.003	< 1 in 1E+9		
2,634.67	2,634.67	2,616.94	2,616.66	8.36	67.33	1,147.18	1,146.08	1,050.00	97.18	11.804	< 1 in 1E+9		
2,700.00	2,700.00	2,679.51	2,679.23	8.47	69.37	1,147.26	1,146.16	1,047.23	100.03	11.469	< 1 in 1E+9		
2,800.00	2,800.00	2,781.29	2,780.89	8.64	72.80	1,147.37	1,146.27	1,042.54	104.83	10.945	< 1 in 1E+9		
2,900.00	2,900.00	2,882.44	2,882.00	8.80	76.22	1,147.51	1,146.41	1,037.88	109.62	10.468	< 1 in 1E+9		
2,941.61	2,941.61	2,923.81	2,923.36	8.87	77.59	1,147.06	1,145.96	1,035.52	111.54	10.284	< 1 in 1E+9		
3,000.00	3,000.00	2,977.80	2,977.34	8.97	79.38	1,147.18	1,146.08	1,033.15	114.04	10.060	< 1 in 1E+9		
3,100.00	3,100.00	3,082.54	3,082.00	9.13	82.80	1,147.51	1,146.41	1,028.69	118.82	9.658	< 1 in 1E+9		
3,182.46	3,182.46	3,165.00	3,164.45	9.26	85.45	1,147.11	1,146.01	1,024.58	122.53	9.362	< 1 in 1E+9		
3,200.00	3,200.00	3,181.67	3,181.12	9.29	85.99	1,147.12	1,146.02	1,023.83	123.28	9.305	< 1 in 1E+9		
3,300.00	3,300.00	3,276.74	3,276.17	9.44	89.05	1,147.41	1,146.31	1,019.84	127.56	8.995	< 1 in 1E+9		
3,400.00	3,400.00	3,382.65	3,382.00	9.60	92.67	1,147.51	1,146.41	1,014.88	132.63	8.652	< 1 in 1E+9		
3,416.54	3,416.54	3,398.67	3,398.01	9.63	93.22	1,147.17	1,146.07	1,013.77	133.40	8.599	< 1 in 1E+9		
3,500.00	3,500.00	3,475.67	3,475.00	9.75	95.89	1,147.45	1,146.35	1,010.32	137.13	8.368	< 1 in 1E+9		
3,600.00	3,600.00	3,582.75	3,582.00	9.91	100.30	1,147.51	1,146.41	1,004.20	143.30	8.007	< 1 in 1E+9		
3,631.55	3,631.55	3,614.10	3,613.33	9.96	101.62	1,147.01	1,145.91	1,001.86	145.15	7.902	< 1 in 1E+9		
3,700.00	3,700.00	3,677.84	3,677.06	10.06	104.30	1,147.17	1,146.07	998.27	148.90	7.704	< 1 in 1E+9		

CC - Min centre to center distance or covergent point, SF - min separation factor, ES - min ellipse separation

OXY

Anticollision Risk Report

Company:	ENGINEERING DESIGNS	Local Co-ordinate Reference:	Well Stressed Desserts 36_1 Fed Com 4H
Project:	PRD NM DIRECTIONAL PLANS (NAD 1983)	TVD Reference:	RKB = 25' @ 3630.00ft
Reference Site:	Stressed Desserts 36_1 Fed Com	MD Reference:	RKB = 25' @ 3630.00ft
Site Error:	0.00	North Reference:	Grid
Reference Well:	Stressed Desserts 36_1 Fed Com 4H	Survey Calculation Method:	Minimum Curvature
Well Error:	2.00	Output errors are at	2.50 sigma
Reference Wellbore	Wellbore #1	Database:	HOPSPP
Reference Design:	Permitting Plan	Offset TVD Reference:	Offset Datum

Offset Design		Sec. 36-T21S-R31E - Lost Tank AIS State #1 - ORIG HOLE - ACTUAL 00										Offset Site Error:	1.79 ft
Survey Program:		250-A027Ub_INC-ONLY_R5										Offset Well Error:	1.79 ft
Reference		Offset		Semi Major Axis		Distance							
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Between Centres (ft)	Wall-Wall Distance (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Probability of Collision	Warning	
3,800.00	3,800.00	3,783.01	3,782.00	10.21	109.12	1,147.51	1,146.41	991.87	155.64	7.373	< 1 in 1E+9		
3,851.67	3,851.67	3,834.30	3,833.25	10.29	111.70	1,146.87	1,145.77	987.63	159.25	7.202	< 1 in 1E+9		
3,900.00	3,900.00	3,876.24	3,875.17	10.36	113.81	1,147.03	1,145.93	984.83	162.20	7.072	< 1 in 1E+9		
4,000.00	4,000.00	3,983.35	3,982.00	10.51	119.04	1,147.51	1,146.41	978.00	169.51	6.770	< 1 in 1E+9		
4,095.95	4,095.95	4,079.30	4,077.88	10.65	123.59	1,146.45	1,145.35	970.59	175.86	6.519	< 1 in 1E+9		
4,100.00	4,100.00	4,082.96	4,081.54	10.66	123.76	1,146.45	1,145.35	970.35	176.11	6.510	< 1 in 1E+9		
4,200.00	4,200.00	4,173.50	4,172.02	10.80	128.05	1,146.91	1,145.81	964.81	182.10	6.298	< 1 in 1E+9		
4,300.00	4,300.00	4,282.21	4,280.43	10.95	132.65	1,147.28	1,146.18	958.74	188.55	6.085	< 1 in 1E+9		
4,400.00	4,400.00	4,383.82	4,382.00	11.09	135.91	1,147.51	1,146.41	954.40	193.11	5.942	< 1 in 1E+9		
4,500.00	4,500.00	4,483.82	4,482.00	11.23	138.80	1,147.51	1,146.41	950.36	197.15	5.820	1 in		
4,600.00	4,600.00	4,583.50	4,581.66	11.36	141.67	1,146.00	1,144.90	944.82	201.18	5.696	1 in		
4,700.00	4,699.96	4,680.82	4,678.96	11.46	144.48	1,143.88	1,142.78	938.77	205.11	5.577	1 in		
4,800.00	4,799.86	4,778.09	4,776.22	11.57	147.29	1,140.49	1,139.39	931.45	209.04	5.456	1 in		
4,900.00	4,899.68	4,883.62	4,881.68	11.68	150.10	1,135.45	1,134.35	922.48	212.97	5.332	1 in		
5,000.00	4,999.37	4,983.31	4,981.37	11.79	152.58	1,128.69	1,127.59	912.25	216.45	5.215	1 in	CC, ES, SF	

OXY
Anticollision Risk Report

Company:	ENGINEERING DESIGNS	Local Co-ordinate Reference:	Well Stressed Desserts 36_1 Fed Com 4H
Project:	PRD NM DIRECTIONAL PLANS (NAD 1983)	TVD Reference:	RKB = 25' @ 3630.00ft
Reference Site:	Stressed Desserts 36_1 Fed Com	MD Reference:	RKB = 25' @ 3630.00ft
Site Error:	0.00	North Reference:	Grid
Reference Well:	Stressed Desserts 36_1 Fed Com 4H	Survey Calculation Method:	Minimum Curvature
Well Error:	2.00	Output errors are at	2.50 sigma
Reference Wellbore	Wellbore #1	Database:	HOPSP
Reference Design:	Permitting Plan	Offset TVD Reference:	Offset Datum

Offset Design												Offset Site Error:	1.79 ft
Survey Program: 268-A027Ub_INC-ONLY_R5												Offset Well Error:	2.00 ft
Reference		Offset		Semi Major Axis		Distance							
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Between Centres (ft)	Wall-Wall Distance (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Probability of Collision	Warning	
0.00	0.00	0.00	0.00	2.00	2.69	628.35	627.25				< 1 in 1E+9		
100.00	100.00	74.00	74.00	2.27	3.14	627.81	626.71	620.18	7.63	82.312	< 1 in 1E+9		
200.00	200.00	174.00	174.00	2.73	4.69	627.81	626.71	618.01	9.79	64.109	< 1 in 1E+9		
300.00	300.00	274.00	274.00	3.13	6.62	627.81	626.71	615.36	12.45	50.428	< 1 in 1E+9		
400.00	400.00	374.00	374.00	3.48	8.73	627.81	626.71	612.45	15.35	40.891	< 1 in 1E+9		
471.46	471.46	445.44	445.44	3.71	10.27	627.47	626.37	609.98	17.49	35.882	< 1 in 1E+9		
500.00	500.00	473.60	473.60	3.81	10.88	627.48	626.38	609.14	18.34	34.213	< 1 in 1E+9		
600.00	600.00	572.26	572.25	4.11	13.05	627.65	626.55	606.30	21.35	29.399	< 1 in 1E+9		
700.00	700.00	674.01	674.00	4.39	15.36	627.81	626.71	603.24	24.56	25.559	< 1 in 1E+9		
769.98	769.98	743.99	743.98	4.58	16.99	627.69	626.59	600.85	26.84	23.388	< 1 in 1E+9		
800.00	800.00	773.72	773.71	4.66	17.69	627.70	626.60	599.89	27.81	22.573	< 1 in 1E+9		
900.00	900.00	874.03	874.00	4.92	20.06	627.81	626.71	596.70	31.11	20.180	< 1 in 1E+9		
1,000.00	1,000.00	974.03	974.00	5.16	22.70	627.81	626.71	593.01	34.79	18.044	< 1 in 1E+9		
1,065.96	1,065.96	1,039.99	1,039.95	5.32	24.45	627.15	626.05	589.92	37.23	16.846	< 1 in 1E+9		
1,100.00	1,100.00	1,073.11	1,073.07	5.40	25.33	627.17	626.07	588.72	38.45	16.310	< 1 in 1E+9		
1,200.00	1,200.00	1,170.42	1,170.37	5.62	27.91	627.54	626.44	585.48	42.06	14.921	< 1 in 1E+9		
1,300.00	1,300.00	1,274.09	1,274.00	5.85	30.64	627.81	626.71	581.94	45.87	13.687	< 1 in 1E+9		
1,400.00	1,400.00	1,374.09	1,374.00	6.06	33.26	627.81	626.71	578.28	49.53	12.675	< 1 in 1E+9		
1,435.72	1,435.72	1,409.08	1,408.97	6.13	34.18	626.98	625.88	576.17	50.81	12.339	< 1 in 1E+9		
1,500.00	1,500.00	1,471.26	1,471.14	6.27	35.81	627.17	626.07	574.07	53.09	11.813	< 1 in 1E+9		
1,600.00	1,600.00	1,574.15	1,574.00	6.47	38.49	627.81	626.71	570.97	56.84	11.045	< 1 in 1E+9		
1,700.00	1,700.00	1,674.15	1,674.00	6.67	40.94	627.81	626.71	567.53	60.28	10.415	< 1 in 1E+9		
1,762.65	1,762.65	1,736.79	1,736.64	6.79	42.48	627.31	626.21	564.88	62.43	10.048	< 1 in 1E+9		
1,800.00	1,800.00	1,773.39	1,773.23	6.87	43.38	627.33	626.23	563.64	63.69	9.849	< 1 in 1E+9		
1,900.00	1,900.00	1,871.37	1,871.21	7.06	45.79	627.62	626.52	560.55	67.06	9.358	< 1 in 1E+9		
2,000.00	2,000.00	1,974.18	1,974.00	7.24	48.32	627.81	626.71	557.20	70.60	8.892	< 1 in 1E+9		
2,060.82	2,060.82	2,035.00	2,034.82	7.36	49.81	627.45	626.35	554.75	72.70	8.631	< 1 in 1E+9		
2,100.00	2,100.00	2,073.08	2,072.90	7.43	50.75	627.48	626.38	553.47	74.01	8.478	< 1 in 1E+9		
2,200.00	2,200.00	2,174.20	2,174.00	7.61	53.24	627.81	626.71	550.32	77.49	8.102	< 1 in 1E+9		
2,300.00	2,300.00	2,274.20	2,274.00	7.79	55.70	627.81	626.71	546.87	80.93	7.757	< 1 in 1E+9		
2,327.27	2,327.27	2,301.03	2,300.83	7.84	56.36	627.45	626.35	545.59	81.86	7.665	< 1 in 1E+9		
2,400.00	2,400.00	2,371.74	2,371.53	7.96	58.10	627.62	626.52	543.33	84.29	7.446	< 1 in 1E+9		
2,500.00	2,500.00	2,474.22	2,474.00	8.14	60.84	627.81	626.71	539.67	88.14	7.123	< 1 in 1E+9		
2,562.66	2,562.66	2,536.87	2,536.65	8.24	62.61	627.45	626.35	536.84	90.61	6.925	< 1 in 1E+9		
2,600.00	2,600.00	2,573.17	2,572.95	8.31	63.64	627.48	626.38	535.43	92.04	6.817	< 1 in 1E+9		
2,700.00	2,700.00	2,674.28	2,674.00	8.47	66.56	627.81	626.71	531.67	96.14	6.530	< 1 in 1E+9		
2,781.17	2,781.17	2,755.45	2,755.15	8.61	69.33	627.18	626.08	527.17	100.01	6.271	< 1 in 1E+9		
2,800.00	2,800.00	2,772.74	2,772.44	8.64	69.92	627.21	626.11	526.37	100.83	6.220	< 1 in 1E+9		
2,900.00	2,900.00	2,874.40	2,874.00	8.80	73.51	627.81	626.71	521.96	105.85	5.931	1 in		
2,952.32	2,952.32	2,926.68	2,926.27	8.89	75.54	627.14	626.04	518.45	108.69	5.770	1 in		
3,000.00	3,000.00	2,968.57	2,968.14	8.97	77.17	627.37	626.27	516.41	110.96	5.654	1 in		
3,100.00	3,100.00	3,074.55	3,074.00	9.13	81.50	627.81	626.71	510.80	117.01	5.366	1 in		
3,200.00	3,200.00	3,174.73	3,174.00	9.29	85.71	627.81	626.71	504.91	122.90	5.108	1 in		
3,265.01	3,265.01	3,239.69	3,238.94	9.39	88.56	626.98	625.88	500.10	126.88	4.942	1 in 69,187,352		
3,300.00	3,300.00	3,269.68	3,268.92	9.44	89.88	627.13	626.03	498.41	128.71	4.872	1 in 59,055,543		
3,400.00	3,400.00	3,374.93	3,374.00	9.60	94.74	627.81	626.71	492.29	135.52	4.633	1 in 34,103,843		
3,425.78	3,425.78	3,400.12	3,399.17	9.64	95.96	626.90	625.80	489.69	137.22	4.569	1 in 29,396,021		
3,500.00	3,500.00	3,463.01	3,462.02	9.75	98.99	627.65	626.55	486.22	141.44	4.438	1 in 21,742,346		
3,578.67	3,578.67	3,553.85	3,552.63	9.88	103.75	626.77	625.67	478.66	148.10	4.232	1 in 13,479,111		
3,600.00	3,600.00	3,571.43	3,570.20	9.91	104.68	626.83	625.73	477.43	149.40	4.196	1 in 12,386,129		
3,700.00	3,700.00	3,675.49	3,674.00	10.06	110.35	627.81	626.71	470.47	157.33	3.990	1 in 7,682,660		
3,735.74	3,735.74	3,711.16	3,709.62	10.11	112.37	626.68	625.58	466.52	160.16	3.913	1 in 6,399,192		
3,800.00	3,800.00	3,763.62	3,762.05	10.21	115.34	627.30	626.20	463.01	164.28	3.818	1 in 5,130,489		
3,892.61	3,892.61	3,868.44	3,866.54	10.35	121.35	626.61	625.51	453.90	172.71	3.628	1 in 3,273,658		
3,900.00	3,900.00	3,874.38	3,872.48	10.36	121.70	626.62	625.52	453.43	173.19	3.618	1 in 3,197,497		
4,000.00	4,000.00	3,976.21	3,974.00	10.51	127.50	627.81	626.71	446.51	181.30	3.463	1 in 2,217,412		
4,048.68	4,048.68	4,024.88	4,022.63	10.58	130.20	626.69	625.59	441.61	185.08	3.386	1 in 1,845,289		
4,100.00	4,100.00	4,066.68	4,064.40	10.66	132.52	627.09	625.99	438.79	188.30	3.330	1 in 1,616,542		
4,194.90	4,194.90	4,171.42	4,168.86	10.79	137.76	626.89	625.79	431.23	195.66	3.204	1 in 1,195,529		
4,200.00	4,200.00	4,175.52	4,172.97	10.80	137.96	626.90	625.80	430.96	195.93	3.200	1 in 1,182,977		
4,300.00	4,300.00	4,276.70	4,274.00	10.95	142.22	627.81	626.71	425.91	201.89	3.110	1 in 955,084		
4,367.88	4,367.88	4,344.57	4,341.85	11.04	144.46	626.91	625.81	421.88	205.03	3.058	1 in 842,106		
4,400.00	4,400.00	4,373.70	4,370.98	11.09	145.42	626.99	625.89	420.61	206.37	3.038	1 in 803,609		
4,500.00	4,500.00	4,476.79	4,474.00	11.23	148.54	627.81	626.71	417.06	210.75	2.979	1 in 697,818		

CC - Min centre to center distance or covergent point, SF - min separation factor, ES - min ellipse separation

OXY

Anticollision Risk Report

Company:	ENGINEERING DESIGNS	Local Co-ordinate Reference:	Well Stressed Desserts 36_1 Fed Com 4H
Project:	PRD NM DIRECTIONAL PLANS (NAD 1983)	TVD Reference:	RKB = 25' @ 3630.00ft
Reference Site:	Stressed Desserts 36_1 Fed Com	MD Reference:	RKB = 25' @ 3630.00ft
Site Error:	0.00	North Reference:	Grid
Reference Well:	Stressed Desserts 36_1 Fed Com 4H	Survey Calculation Method:	Minimum Curvature
Well Error:	2.00	Output errors are at	2.50 sigma
Reference Wellbore	Wellbore #1	Database:	HOPSPP
Reference Design:	Permitting Plan	Offset TVD Reference:	Offset Datum

Offset Design	Sec. 36-T21S-R31E - Lost Tank AIS State #6 - ORIG HOLE - ACTUAL 00										Offset Site Error:	1.79 ft
Survey Program:	268-A027Ub_INC-ONLY_R5										Offset Well Error:	2.00 ft
Reference		Offset		Semi Major Axis		Distance						
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Between Centres (ft)	Wall-Wall Distance (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Probability of Collision	Warning
4,600.00	4,600.00	4,576.78	4,574.00	11.36	150.84	628.26	627.16	414.29	213.98	2.936	1 in 629,871	
4,700.00	4,699.96	4,676.75	4,673.96	11.46	153.15	629.63	628.53	412.43	217.20	2.899	1 in 576,878	
4,800.00	4,799.86	4,775.21	4,772.41	11.57	155.41	631.07	629.97	410.69	220.38	2.864	1 in 530,940	ES
4,900.00	4,899.68	4,873.17	4,870.36	11.68	157.67	634.71	633.61	411.17	223.54	2.839	1 in 503,492	
5,000.00	4,999.37	4,976.20	4,973.37	11.79	160.05	639.44	638.34	412.57	226.88	2.818	1 in 482,033	SF

OXY

Anticollision Risk Report

Company:	ENGINEERING DESIGNS	Local Co-ordinate Reference:	Well Stressed Desserts 36_1 Fed Com 4H
Project:	PRD NM DIRECTIONAL PLANS (NAD 1983)	TVD Reference:	RKB = 25' @ 3630.00ft
Reference Site:	Stressed Desserts 36_1 Fed Com	MD Reference:	RKB = 25' @ 3630.00ft
Site Error:	0.00	North Reference:	Grid
Reference Well:	Stressed Desserts 36_1 Fed Com 4H	Survey Calculation Method:	Minimum Curvature
Well Error:	2.00	Output errors are at	2.50 sigma
Reference Wellbore	Wellbore #1	Database:	HOPSPP
Reference Design:	Permitting Plan	Offset TVD Reference:	Offset Datum

Reference Depths are relative to RKB = 25' @ 3630.00ft

Offset Depths are relative to Offset Datum


Central Meridian is -104.333334 °

Coordinates are relative to: Stressed Desserts 36_1 Fed Com 4H

Coordinate System is US State Plane 1983, New Mexico Eastern Zone

Grid Convergence at Surface is: 0.32°

Ladder Plot

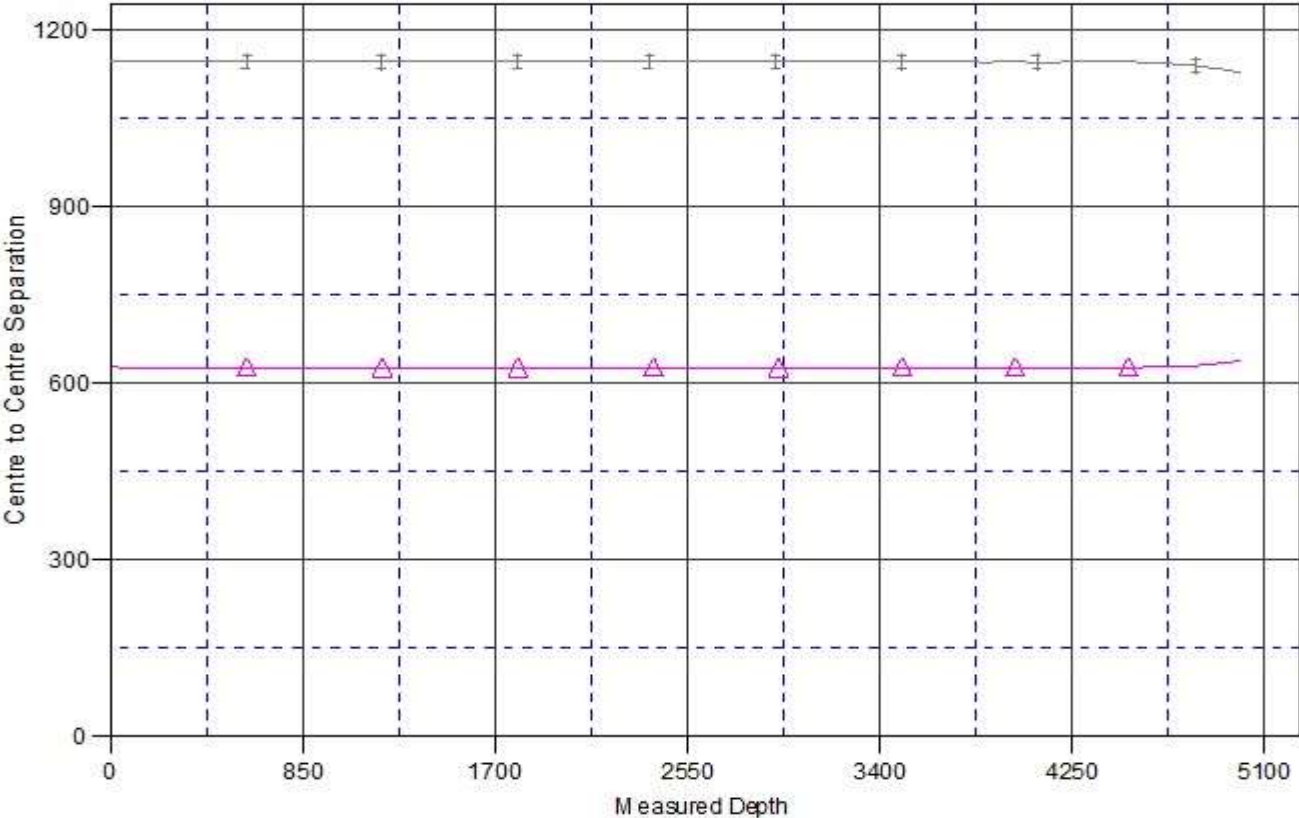

LEGEND

▲ Lost Tank AIS State #6, ORIG HOLE, ACTUAL 00 V0 ✕ Lost Tank AIS State #1, ORIG HOLE, ACTUAL 00 V0

OXY
Anticollision Risk Report

Company:	ENGINEERING DESIGNS	Local Co-ordinate Reference:	Well Stressed Desserts 36_1 Fed Com 4H
Project:	PRD NM DIRECTIONAL PLANS (NAD 1983)	TVD Reference:	RKB = 25' @ 3630.00ft
Reference Site:	Stressed Desserts 36_1 Fed Com	MD Reference:	RKB = 25' @ 3630.00ft
Site Error:	0.00	North Reference:	Grid
Reference Well:	Stressed Desserts 36_1 Fed Com 4H	Survey Calculation Method:	Minimum Curvature
Well Error:	2.00	Output errors are at	2.50 sigma
Reference Wellbore	Wellbore #1	Database:	HOPSPP
Reference Design:	Permitting Plan	Offset TVD Reference:	Offset Datum

Reference Depths are relative to RKB = 25' @ 3630.00ft
Offset Depths are relative to Offset Datum
Central Meridian is -104.333334 °

Coordinates are relative to: Stressed Desserts 36_1 Fed Com 4H
Coordinate System is US State Plane 1983, New Mexico Eastern Zone
Grid Convergence at Surface is: 0.32°



PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME: OXY USA INC.
WELL NAME & NO.: STRESSED DESSERTS 36 1 FEDERAL COM 4H
LOCATION: Sec 36, T21S, R31E
COUNTY: Eddy County, New Mexico ▼

COA

H ₂ S	☐ No ☒ Yes			
Potash / WIPP	☐ None	☐ Secretary	☒ R-111-Q	☒ Open Annulus 4-String Design: Open 1st Int x 2nd Annulus (ICP 2 below Relief Zone) ☐ WIPP
Cave / Karst	☒ Low	☐ Medium	☐ High	☐ Critical
Wellhead	☐ Conventional	☒ Multibowl	☐ Both	☐ Diverter
Cementing	☒ Primary Squeeze	☐ Cont. Squeeze	☒ EchoMeter	☐ DV Tool
Special Req	☐ Capitan Reef	☐ Water Disposal	☒ COM	☐ Unit
Waste Prev.	☐ Self-Certification	☒ Waste Min. Plan	☐ APD Submitted prior to 06/10/2024	
Additional Language	☒ Flex Hose	☒ Casing Clearance	☐ Pilot Hole	☒ Break Testing
	☒ Four-String	☒ Offline Cementing	☐ Fluid-Filled	

APD is within the R-111-Q defined boundary. Operator must follow all procedures and requirements listed within the updated order.

A. HYDROGEN SULFIDE

A Hydrogen Sulfide (H₂S) Drilling Plan shall be activated AT SPUD. As a result, the Hydrogen Sulfide area must meet all requirements from 43 CFR 3176, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

B. CASING

1. The **13-3/8** inch surface casing shall be set at approximately **836** feet (a minimum of 70 feet (Eddy County) into the Rustler Anhydrite, above the salt, and below usable fresh water) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or **500 pounds compressive strength**, whichever is greater. (This is to include the

- lead cement)
- c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The **10-3/4** inch intermediate salt protection casing shall be set at approximately **50'** prior to entering the Delaware group. ***Please set Salt Protection string prior to entering hydrocarbon bearing zone. Well needs to be kept vertical till past the MB 126.*** The minimum required fill of cement behind the **10-3/4** inch intermediate casing is:
- Cement to surface. If cement does not circulate see B.1.a, c-d above. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst, Capitan Reef, or potash.**
3. The **7-5/8** inch second intermediate casing shall be set at approximately **9423** feet. ***PLEASE REVIEW EXTERNAL PRESSURE FOR PRESSURE TEST. PLEASE KEEP CASING FULL FOR COLLAPSE SF.*** The minimum required fill of cement behind the **7-5/8** inch intermediate casing is:

Option 1 (Primary + Post Frac Bradenhead):

- Cement should tie-back **500 feet** into the previous casing but not higher than USGS Marker Bed No. 126. **Operator must verify top of cement per R-111-Q requirements.** Submit results to the BLM. If cement does not circulate, contact the appropriate BLM office. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst, Capitan Reef, or potash.**
- ❖ **A monitored open annulus will be incorporated during completion by leaving the Intermediate Casing 1 x Intermediate Casing 2 annulus un-cemented and monitored inside the Intermediate String.** Operator must follow monitoring requirements listed within R-111-Q. Tieback requirements shall be met within **180 days**.

Operator has proposed to pump down **intermediate 1 x intermediate 2** annulus post completion. **Operator must run Echo-meter to verify Cement Slurry/Fluid top in the annulus OR operator shall run a CBL from TD of the intermediate 2 casing to surface after the second stage BH to verify TOC.** Submit results to the BLM. No displacement fluid/wash out shall be utilized at the top of the cement slurry during second stage bradenhead when running Echo-meter if cement is required to surface. Adjust cement volume and excess based on a fluid caliper or similar method that reflects the as-drilled size of the wellbore.

Operator has proposed an open annulus completion in R-111-Q. Operator shall provide a method of verification pre-completion top of cement. **Submit results to the BLM. Pressure monitoring device and Pressure Safety Valves must be installed at surface on both the intermediate annulus and the production annulus for the life of the well.**

In the event of a casing failure during completion, the operator must contact the BLM at (575-706-2779) and (575-361-2822 Eddy County).

4. The 5-1/2 inch production casing shall be set at approximately 17,693 feet. The minimum required fill of cement behind the 5-1/2 inch production casing is:

Option 1 (Single Stage):

- Cement should tie-back 500 feet into the previous casing but not higher than USGS Marker Bed No. 126. **Operator must verify top of cement per R-111-Q requirements.** Submit results to the BLM. If cement does not circulate, contact the appropriate BLM office. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst, Capitan Reef, or potash.**

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).
1. Operator has proposed a multi-bowl wellhead assembly. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be 5000 (5M) psi. **Variance is approved to use a 5000 (5M) Annular which shall be tested to 3500 psi.**
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. If the cement does not circulate and one-inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
 - e. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172 must be followed.

D. SPECIAL REQUIREMENT (S)

Communitization Agreement

- The operator will submit a Communitization Agreement to the Santa Fe Office, 301 Dinosaur Trail Santa Fe, New Mexico 87508, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all

working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.

- The operator will submit an as-drilled survey well plat of the well completion, but are not limited to, those specified in 43 CFR 3171 and 3172.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

BOPE Break Testing Variance

- BOPE Break Testing is ONLY permitted for intervals utilizing a 5M BOPE or less. **(Annular preventer must be tested to a minimum of 70% of BOPE working pressure and shall be higher than the MASP.)**
- BOPE Break Testing is NOT permitted to drilling the production hole section.
- Variance only pertains to the intermediate hole-sections and no deeper than the Bone Springs formation.
- While in transfer between wells, the BOPE shall be secured by the hydraulic carrier or cradle.
- Any well control event while drilling require notification to the BLM Petroleum Engineer **(575-706-2779)** prior to the commencement of any BOPE Break Testing operations.
- A full BOPE test is required prior to drilling the first deep intermediate hole section. If any subsequent hole interval is deeper than the first, a full BOPE test will be required. (200' TVD tolerance between intermediate shoes is allowable).
- The BLM is to be contacted (575-361-2822 Eddy County) 4 hours prior to BOPE tests.
- As a minimum, a full BOPE test shall be performed at 21-day intervals.
- In the event any repairs or replacement of the BOPE is required, the BOPE shall test as per **43 CFR 3172**.
- If in the event break testing is not utilized, then a full BOPE test would be conducted.

Offline Cementing

Approved for surface and intermediate intervals. Notify the BLM prior to the commencement of any offline cementing procedure.

Casing Clearance

Overlap clearance OK.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

Contact Eddy County Petroleum Engineering Inspection Staff:

Email or call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220;

[BLM NM CFO DrillingNotifications@BLM.GOV](mailto:BLM_NM_CFO_DrillingNotifications@BLM.GOV); (575) 361-2822

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - i. Notify the BLM when moving in and removing the Spudder Rig.
 - ii. Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - iii. BOP/BOPE test to be conducted per **43 CFR 3172** as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
3. For intervals in which cement to surface is required, cement to surface should be verified with a visual check and density or pH check to differentiate cement from spacer and drilling mud. The results should be documented in the driller's log and daily reports.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.

2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends of both lead and tail cement, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-Q potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in **43 CFR 3172**.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's

requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.

3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - i. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - ii. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - iii. Manufacturer representative shall install the test plug for the initial BOP test.
 - iv. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172.6(b)(9) must be followed.
 - v. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - i. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead cement), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - ii. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the cement plug. The BOPE test can be initiated after bumping the cement plug with the casing valve

- open. (only applies to single stage cement jobs, prior to the cement setting up.)
- iii. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer and can be initiated immediately with the casing valve open. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to **43 CFR 3172** with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for 8 hours or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
 - iv. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
 - v. The results of the test shall be reported to the appropriate BLM office.
 - vi. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
 - vii. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
 - viii. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per **43 CFR 3172**.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be

disposed of on the well location or surrounding area. Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

KPI -12/29/2024




Permian Drilling Hydrogen Sulfide Drilling Operations Plan

Open drill site. No homes or buildings are near the proposed location.

1. Escape

Personnel shall escape upwind of wellbore in the event of an emergency gas release. Escape can take place through the lease road on the Southeast side of the location. Personnel need to move to a safe distance and block the entrance to location. If the primary route is not an option due to the wind direction, then a secondary egress route should be taken.

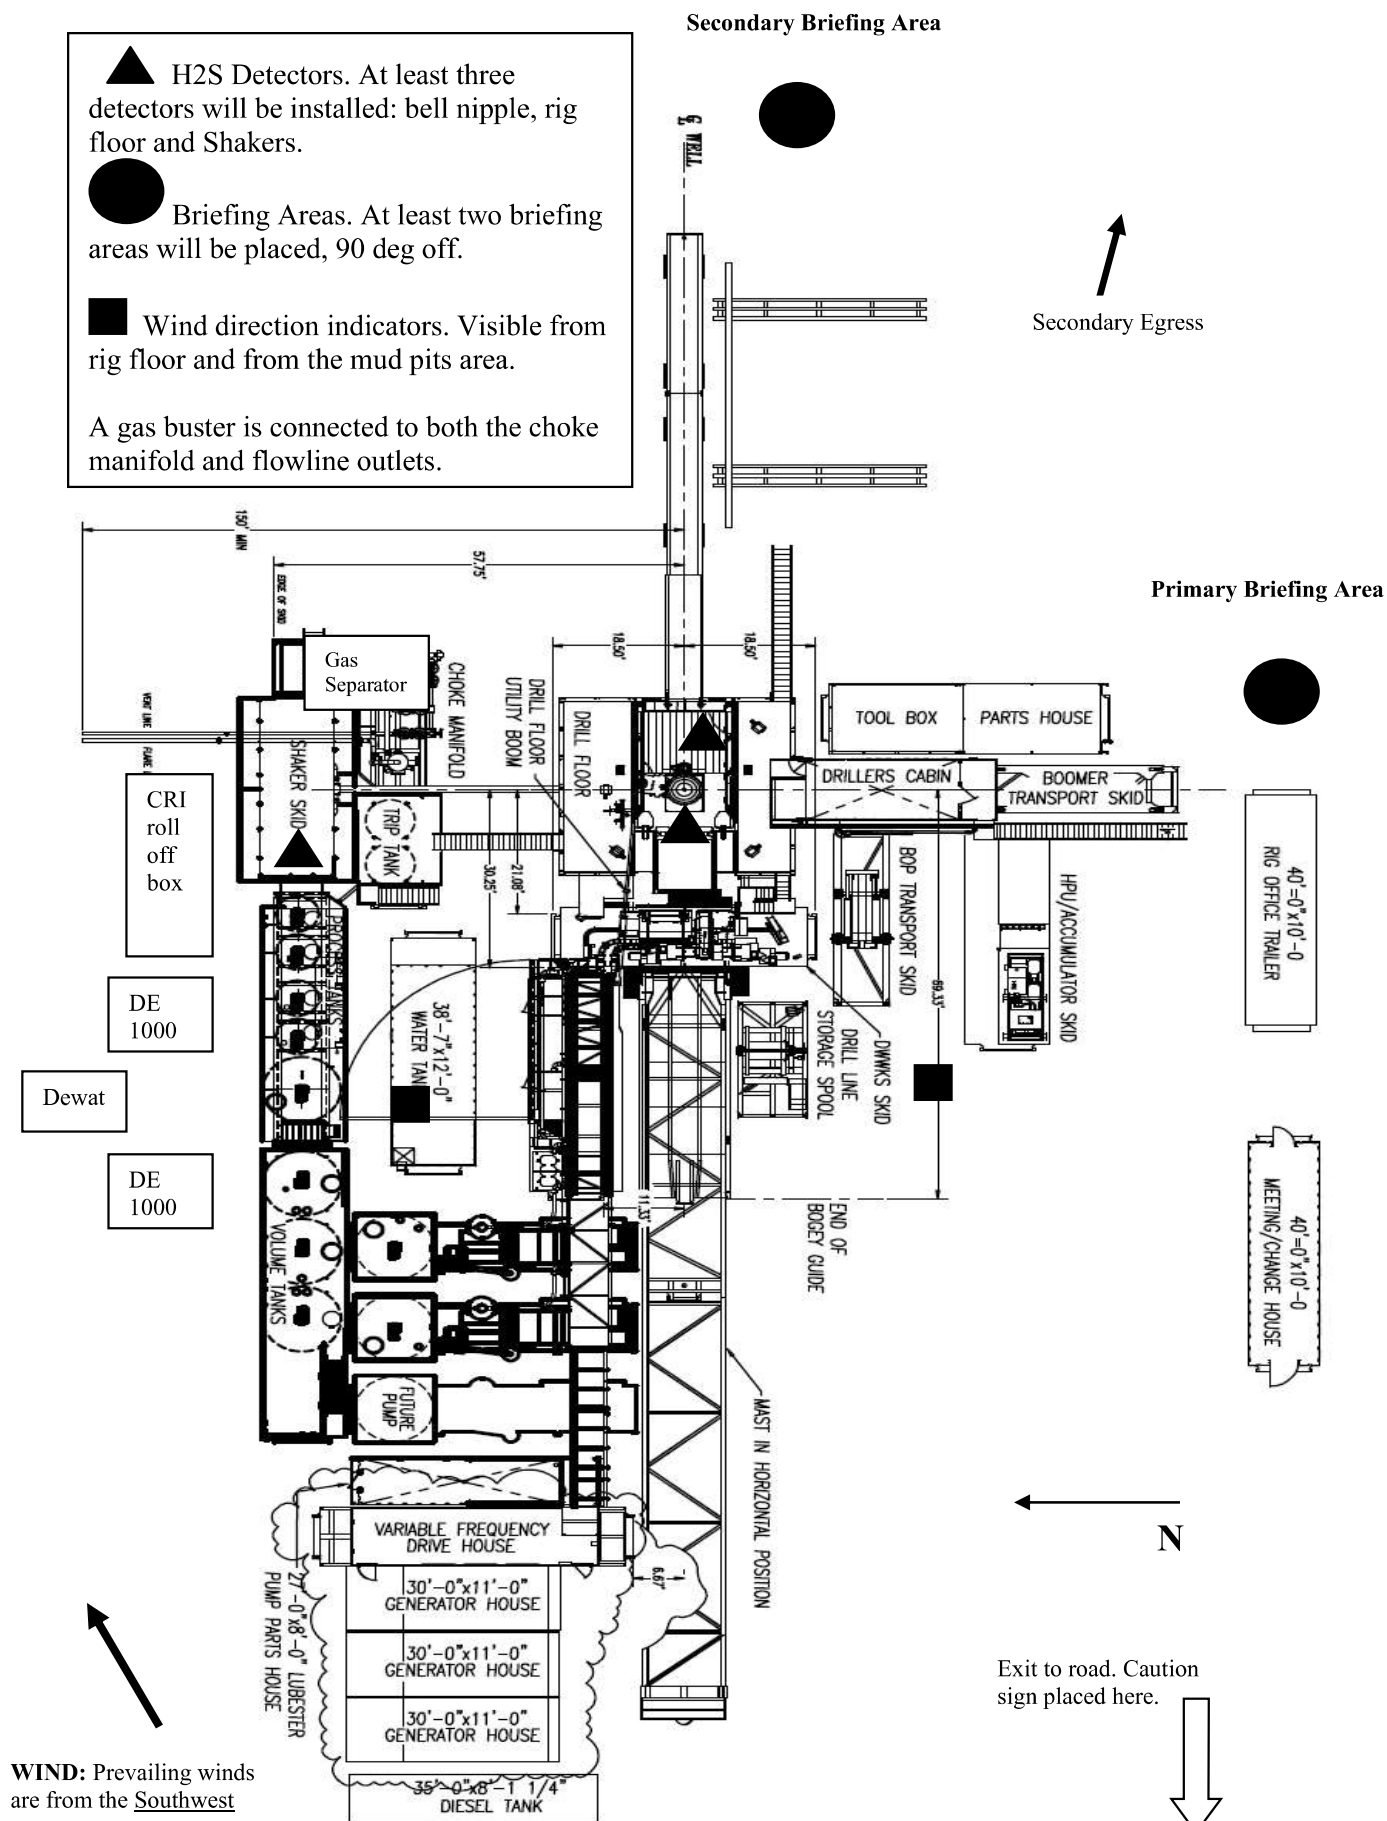



Permian Drilling Hydrogen Sulfide Drilling Operations Plan New Mexico

Scope

This contingency plan establishes guidelines for the public, all company employees, and contract employees who's work activities may involve exposure to hydrogen sulfide (H₂S) gas.

While drilling this well, it is possible to encounter H₂S bearing formations. At all times, the first barrier to control H₂S emissions will be the drilling fluid, which will have a density high enough to control influx.

Objective

1. Provide an immediate and predetermined response plan to any condition when H₂S is detected. All H₂S detections in excess of 10 parts per million (ppm) concentration are considered an Emergency.
2. Prevent any and all accidents, and prevent the uncontrolled release of hydrogen sulfide into the atmosphere.
3. Provide proper evacuation procedures to cope with emergencies.
4. Provide immediate and adequate medical attention should an injury occur.

Discussion

Implementation:	This plan with all details is to be fully implemented before drilling to <u>commence</u> .
Emergency response Procedure:	This section outlines the conditions and denotes steps to be taken in the event of an emergency.
Emergency equipment Procedure:	This section outlines the safety and emergency equipment that will be required for the drilling of this well.
Training provisions:	This section outlines the training provisions that must be adhered to prior to drilling.
Drilling emergency call lists:	Included are the telephone numbers of all persons to be contacted should an emergency exist.
Briefing:	This section deals with the briefing of all people involved in the drilling operation.
Public safety:	Public safety personnel will be made aware of any potential evacuation and any additional support needed.
Check lists:	Status check lists and procedural check lists have been included to insure adherence to the plan.
General information:	A general information section has been included to supply support information.

Hydrogen Sulfide Training

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on the well:

1. The hazards and characteristics of H₂S.
2. Proper use and maintenance of personal protective equipment and life support systems.
3. H₂S detection.
4. Proper use of H₂S detectors, alarms, warning systems, briefing areas, evacuation procedures and prevailing winds.
5. Proper techniques for first aid and rescue procedures.
6. Physical effects of hydrogen sulfide on the human body.
7. Toxicity of hydrogen sulfide and sulfur dioxide.
8. Use of SCBA and supplied air equipment.
9. First aid and artificial respiration.
10. Emergency rescue.

In addition, supervisory personnel will be trained in the following areas:

1. The effects of H₂S on metal components. If high tensile strength tubular is to be used, personnel will be trained in their special maintenance requirements.
2. Corrective action and shut-in procedures when drilling a well, blowout prevention and well control procedures.
3. The contents and requirements of the H₂S Drilling Operations Plan.

H₂S training refresher must have been taken within one year prior to drilling the well. Specifics on the well to be drilled will be discussed during the pre-spud meeting. H₂S and well control (choke) drills will be performed while drilling the well, at least on a weekly basis. This plan shall be available in the well site. All personnel will be required to carry the documentation proving that the H₂S training has been taken.

Service company and visiting personnel

- A. Each service company that will be on this well will be notified if the zone contains H₂S.
- B. Each service company must provide for the training and equipment of their employees before they arrive at the well site.
- C. Each service company will be expected to attend a well site

Emergency Equipment Requirements

1. Well control equipment

The well shall have hydraulic BOP equipment for the anticipated pressures. Equipment is to be tested on installation and follow Oxy Well Control standard, as well as 43 CFR part 3170 Subpart 3172.

Special control equipment:

- A. Hydraulic BOP equipment with remote control on ground. Remotely operated choke.
- B. Rotating head
- C. Gas buster equipment shall be installed before drilling out of surface pipe.

2. Protective equipment for personnel

- A. Four (4) 30-minute positive pressure air packs (2 at each briefing area) on location.
- B. Adequate fire extinguishers shall be located at strategic locations.
- C. Radio / cell telephone communication will be available at the rig.
 - Rig floor and trailers.
 - Vehicle.

3. Hydrogen sulfide sensors and alarms

- A. H₂S sensor with alarms will be located on the rig floor, at the bell nipple, and at the flow line. These monitors will be set to alarm at 10 ppm with strobe light, and audible alarm.
- B. Hand operated detectors with tubes.
- C. H₂S monitor tester (to be provided by contract Safety Company.)
- D. There shall be one combustible gas detector on location at all times.

4. Visual Warning Systems

- A. One sign located at each location entrance with the following language:

**Caution – potential poison gas
Hydrogen sulfide
No admittance without authorization**

Wind sock – wind streamers:

- A. One 36” (in length) wind sock located at protection center, at height visible from rig floor.
- B. One 36” (in length) wind sock located at height visible from pit areas.

Condition flags

- A. One each condition flag to be displayed to denote conditions.

green – normal conditions

yellow – potential danger

red – danger, H2S present

- B. Condition flag shall be posted at each location sign entrance.

5. Mud Program

The mud program is designed to minimize the risk of having H2S and other formation fluids at surface. Proper mud weight and safe drilling practices will be applied. H2S scavengers will be used to minimize the hazards while drilling. Below is a summary of the drilling program.

Mud inspection devices:

Garrett gas train or hatch tester for inspection of sulfide concentration in mud system.

6. Metallurgy

- A. Drill string, casing, tubing, wellhead, blowout preventers, drilling spools or adapters, kill lines, choke manifold, lines and valves shall be suitable for the H2S service.
- B. All the elastomers, packing, seals and ring gaskets shall be suitable for H2S service.

7. Well Testing

No drill stem test will be performed on this well.

8. Evacuation plan

Evacuation routes should be established prior to well spud for each well and discussed with all rig personnel.

9. Designated area

- A. Parking and visitor area: all vehicles are to be parked at a predetermined safe distance from the wellhead.
- B. There will be a designated smoking area.
- C. Two briefing areas on either side of the location at the maximum allowable distance from the well bore so they offset prevailing winds perpendicularly, or at a 45-degree angle if wind direction tends to shift in the area.

Emergency procedures

- A. In the event of any evidence of H₂S level above 10 ppm, take the following steps:
 - 1. The Driller will pick up off bottom, shut down the pumps, slow down the pipe rotation.
 - 2. Secure and don escape breathing equipment, report to the upwind designated safe briefing / muster area.
 - 3. All personnel on location will be accounted for and emergency search should begin for any missing, the Buddy System will be implemented.
 - 4. Order non-essential personnel to leave the well site, order all essential personnel out of the danger zone and upwind to the nearest designated safe briefing / muster area.
 - 5. Entrance to the location will be secured to a higher level than our usual "Meet and Greet" requirement, and the proper condition flag will be displayed at the entrance to the location.
 - 6. Take steps to determine if the H₂S level can be corrected or suppressed and, if so, proceed as required.
- B. If uncontrollable conditions occur:
 - 1. Take steps to protect and/or remove any public in the down-wind area from the rig – partial evacuation and isolation. Notify necessary public safety personnel and appropriate regulatory entities (i.e. BLM) of the situation.

2. Remove all personnel to the nearest upwind designated safe briefing / muster area or off location.
3. Notify public safety personnel of safe briefing / muster area.
4. An assigned crew member will blockade the entrance to the location. No unauthorized personnel will be allowed entry to the location.
5. Proceed with best plan (at the time) to regain control of the well. Maintain tight security and safety procedures.

C. Responsibility:

1. Designated personnel.
 - a. Shall be responsible for the total implementation of this plan.
 - b. Shall be in complete command during any emergency.
 - c. Shall designate a back-up.

- | | |
|---------------------|--|
| All personnel: | <ol style="list-style-type: none"> 1. On alarm, don escape unit and report to the nearest upwind designated safe briefing / muster area upw 2. Check status of personnel (buddy system). 3. Secure breathing equipment. 4. Await orders from supervisor. |
| Drill site manager: | <ol style="list-style-type: none"> 1. Don escape unit if necessary and report to nearest upwind designated safe briefing / muster area. 2. Coordinate preparations of individuals to return to point of release with tool pusher and driller (using the buddy system). 3. Determine H2S concentrations. 4. Assess situation and take control measures. |
| Tool pusher: | <ol style="list-style-type: none"> 1. Don escape unit Report to up nearest upwind designated safe briefing / muster area. 2. Coordinate preparation of individuals to return to point of release with tool pusher drill site manager (using the buddy system). 3. Determine H2S concentration. 4. Assess situation and take control measures. |
| Driller: | <ol style="list-style-type: none"> 1. Don escape unit, shut down pumps, continue |

- rotating DP.
 - 2. Check monitor for point of release.
 - 3. Report to nearest upwind designated safe briefing / muster area.
 - 4. Check status of personnel (in an attempt to rescue, use the buddy system).
 - 5. Assigns least essential person to notify Drill Site Manager and tool pusher by quickest means in case of their absence.
 - 6. Assumes the responsibilities of the Drill Site Manager and tool pusher until they arrive should they be absent.
- Derrick man
- Floor man #1
- Floor man #2
1. Will remain in briefing / muster area until instructed by supervisor.
- Mud engineer:
1. Report to nearest upwind designated safe briefing / muster area.
2. When instructed, begin check of mud for pH and H2S level. (Garett gas train.)
- Safety personnel:
1. Mask up and check status of all personnel and secure operations as instructed by drill site manager.

Taking a kick

When taking a kick during an H2S emergency, all personnel will follow standard Well control procedures after reporting to briefing area and masking up.

Open-hole logging

All unnecessary personnel off floor. Drill Site Manager and safety personnel should monitor condition, advise status and determine need for use of air equipment.

Running casing or plugging

Following the same “tripping” procedure as above. Drill Site Manager and safety personnel should determine if all personnel have access to protective equipment.

Ignition procedures

The decision to ignite the well is the responsibility of the operator (Oxy Drilling Management). The decision should be made only as a last resort and in a situation where it is clear that:

1. Human life and property are endangered.
2. There is no hope controlling the blowout under the prevailing conditions at the well.

Instructions for igniting the well

1. Two people are required for the actual igniting operation. They must wear self-contained breathing units and have a safety rope attached. One man (tool pusher or safety engineer) will check the atmosphere for explosive gases with the gas monitor. The other man is responsible for igniting the well.
2. Primary method to ignite: 25 mm flare gun with range of approximately 500 feet.
3. Ignite upwind and do not approach any closer than is warranted.
4. Select the ignition site best for protection, and which offers an easy escape route.
5. Before firing, check for presence of combustible gas.
6. After lighting, continue emergency action and procedure as before.
7. All unassigned personnel will remain in briefing area until instructed by supervisor or directed by the Drill Site Manager.

Remember: After well is ignited, burning hydrogen sulfide will convert to sulfur dioxide, which is also highly toxic. **Do not assume the area is safe after the well is ignited.**

Status check list

Note: All items on this list must be completed before drilling to production casing point.

1. H2S sign at location entrance.
2. Two (2) wind socks located as required.
3. Four (4) 30-minute positive pressure air packs (2 at each Briefing area) on location for all rig personnel and mud loggers.
4. Air packs inspected and ready for use.
5. Cascade system and hose line hook-up as needed.
6. Cascade system for refilling air bottles as needed.
7. Condition flag on location and ready for use.
8. H2S detection system hooked up and tested.
9. H2S alarm system hooked up and tested.
10. Hand operated H2S detector with tubes on location.
11. 1 – 100' length of nylon rope on location.
12. All rig crew and supervisors trained as required.
13. All outside service contractors advised of potential H2S hazard on well.
14. No smoking sign posted and a designated smoking area identified.
15. Calibration of all H2S equipment shall be noted on the IADC report.

Checked by: _____ Date: _____

Procedural check list during H2S events

Perform each tour:

1. Check fire extinguishers to see that they have the proper charge.
2. Check breathing equipment to ensure that it is in proper working order.
3. Make sure all the H2S detection system is operative.

Perform each week:

1. Check each piece of breathing equipment to make sure that demand or forced air regulator is working. This requires that the bottle be opened and the mask assembly be put on tight enough so that when you inhale, you receive air or feel air flow.
2. BOP skills (well control drills).
3. Check supply pressure on BOP accumulator stand by source.
4. Check breathing equipment mask assembly to see that straps are loosened and turned back, ready to put on.
5. Check pressure on breathing equipment air bottles to make sure they are charged to full volume. (Air quality checked for proper air grade "D" before bringing to location)
6. Confirm pressure on all supply air bottles.
7. Perform breathing equipment drills with on-site personnel.
8. Check the following supplies for availability.
 - A. Emergency telephone list.
 - B. Hand operated H2S detectors and tubes.

General evacuation plan

1. When the company approved supervisor (Drill Site Manager, consultant, rig pusher, or driller) determines the H2S gas cannot be limited to the well location and the public will be involved, he will activate the evacuation plan.
2. Drill Site Manager or designee will notify local government agency that a hazardous condition exists and evacuation needs to be implemented.
3. Company or contractor safety personnel that have been trained in the use of H2S detection equipment and self-contained breathing equipment will monitor H2S concentrations, wind directions, and area of exposure. They will delineate the outer perimeter of the hazardous gas area. Extension to the evacuation area will be determined from information gathered.
4. Law enforcement personnel (state police, police dept., fire dept., and sheriff's dept.) Will be called to aid in setting up and maintaining road blocks. Also, they will aid in evacuation of the public if necessary.
5. After the discharge of gas has been controlled, company safety personnel will determine when the area is safe for re-entry.

Important: Law enforcement personnel will not be asked to come into a contaminated area. Their assistance will be limited to uncontaminated areas. Constant radio contact will be maintained with them.

Emergency actions

Well blowout – if emergency

1. Evacuate all personnel to “Safe Briefing / Muster Areas” or off location if needed.
2. If sour gas – evacuate rig personnel.
3. If sour gas – evacuate public within 3000 ft radius of exposure.
4. Don SCBA and shut well in if possible using the buddy system.
5. Notify Drilling Superintendent and call 911 for emergency help (fire dept and ambulance) if needed.
6. Implement the Blowout Contingency Plan, and Drilling Emergency Action Plan.
6. Give first aid as needed.

Person down location/facility

1. If immediately possible, contact 911. Give location and wait for confirmation.
2. Don SCBA and perform rescue operation using buddy system.

Toxic effects of hydrogen sulfide

Hydrogen sulfide is extremely toxic. The acceptable ceiling concentration for eight-hour exposure is 10 ppm, which is .001% by volume. Hydrogen sulfide is heavier than air (specific gravity – 1.192) and colorless. It forms an explosive mixture with air between 4.3 and 46.0 percent by volume. Hydrogen sulfide is almost as toxic as hydrogen cyanide and is between five and six times more toxic than carbon monoxide. Toxicity data for hydrogen sulfide and various other gases are compared in table i. Physical effects at various hydrogen sulfide exposure levels are shown in table ii.

Table i
Toxicity of various gases

Common name	Chemical formula	Specific gravity (sc=1)	Threshold limit (1)	Hazardous limit (2)	Lethal concentration (3)
Hydrogen Cyanide	Hcn	0.94	10 ppm	150 ppm/hr	300 ppm
Hydrogen Sulfide	H2S	1.18	10 ppm	250 ppm/hr	600 ppm
Sulfur Dioxide	So2	2.21	5 ppm	-	1000 ppm
Chlorine	Cl2	2.45	1 ppm	4 ppm/hr	1000 ppm
Carbon Monoxide	Co	0.97	50 ppm	400 ppm/hr	1000 ppm
Carbon Dioxide	Co2	1.52	5000 ppm	5%	10%
Methane	Ch4	0.55	90,000 ppm	Combustible above 5% in air	

- 1) threshold limit – concentration at which it is believed that all workers may be repeatedly exposed day after day without adverse effects.
- 2) hazardous limit – concentration that will cause death with short-term exposure.
- 3) lethal concentration – concentration that will cause death with short-term exposure.

Toxic effects of hydrogen sulfide

Table ii
Physical effects of hydrogen sulfide

Percent (%)	Ppm	Concentration Grains 100 std. Ft3*	Physical effects
0.001	<10	00.65	Obvious and unpleasant odor.

0.002	10	01.30	Safe for 8 hours of exposure.
0.010	100	06.48	Kill smell in 3 – 15 minutes. May sting eyes and throat.
0.020	200	12.96	Kills smell shortly; stings eyes and throat.
0.050	500	32.96	Dizziness; breathing ceases in a few minutes; needs prompt artificial respiration.
0.070	700	45.36	Unconscious quickly; death will result if not rescued promptly.
0.100	1000	64.30	Unconscious at once; followed by death within minutes.

*at 15.00 psia and 60'f.

Use of self-contained breathing equipment (SCBA)

1. Written procedures shall be prepared covering safe use of SCBA's in dangerous atmosphere, which might be encountered in normal operations or in emergencies. Personnel shall be familiar with these procedures and the available SCBA.
2. SCBA's shall be inspected frequently at random to insure that they are properly used, cleaned, and maintained.
3. Anyone who may use the SCBA's shall be trained in how to insure proper face-piece to face seal. They shall wear SCBA's in normal air and then wear them in a test atmosphere. (note: such items as facial hair {beard or sideburns} and eyeglasses will not allow proper seal.) Anyone that may be reasonably expected to wear SCBA's should have these items removed before entering a toxic atmosphere. A special mask must be obtained for anyone who must wear eyeglasses or contact lenses.
4. Maintenance and care of SCBA's:
 - a. A program for maintenance and care of SCBA's shall include the following:
 1. Inspection for defects, including leak checks.
 2. Cleaning and disinfecting.
 3. Repair.
 4. Storage.
 - b. Inspection, self-contained breathing apparatus for emergency use shall be inspected monthly.
 1. Fully charged cylinders.
 2. Regulator and warning device operation.
 3. Condition of face piece and connections.
 4. Rubber parts shall be maintained to keep them pliable and prevent deterioration.
 - c. Routinely used SCBA's shall be collected, cleaned and disinfected as frequently as necessary to insure proper protection is provided.
5. Persons assigned tasks that requires use of self-contained breathing equipment shall be certified physically fit (medically cleared) for breathing equipment usage at least annually.
6. SCBA's should be worn when:
 - A. Any employee works near the top or on top of any tank unless test reveals less than 10 ppm of H2S.

- B. When breaking out any line where H₂S can reasonably be expected.
- C. When sampling air in areas to determine if toxic concentrations of H₂S exists.
- D. When working in areas where over 10 ppm H₂S has been detected.
- E. At any time there is a doubt as to the H₂S level in the area to be entered.

Rescue
First aid for H₂S poisoning

Do not panic!


Remain calm – think!

1. Don SCBA breathing equipment.
2. Remove victim(s) utilizing buddy system to fresh air as quickly as possible. (go up-wind from source or at right angle to the wind. Not down wind.)
3. Briefly apply chest pressure – arm lift method of artificial respiration to clean the victim's lungs and to avoid inhaling any toxic gas directly from the victim's lungs.
4. Provide for prompt transportation to the hospital, and continue giving artificial respiration if needed.
5. Hospital(s) or medical facilities need to be informed, before-hand, of the possibility of H₂S gas poisoning – no matter how remote the possibility is.
6. Notify emergency room personnel that the victim(s) has been exposed to H₂S gas.


Besides basic first aid, everyone on location should have a good working knowledge of artificial respiration.

Revised CM 6/27/2012


Gas Separator Routing Flex III Rigs

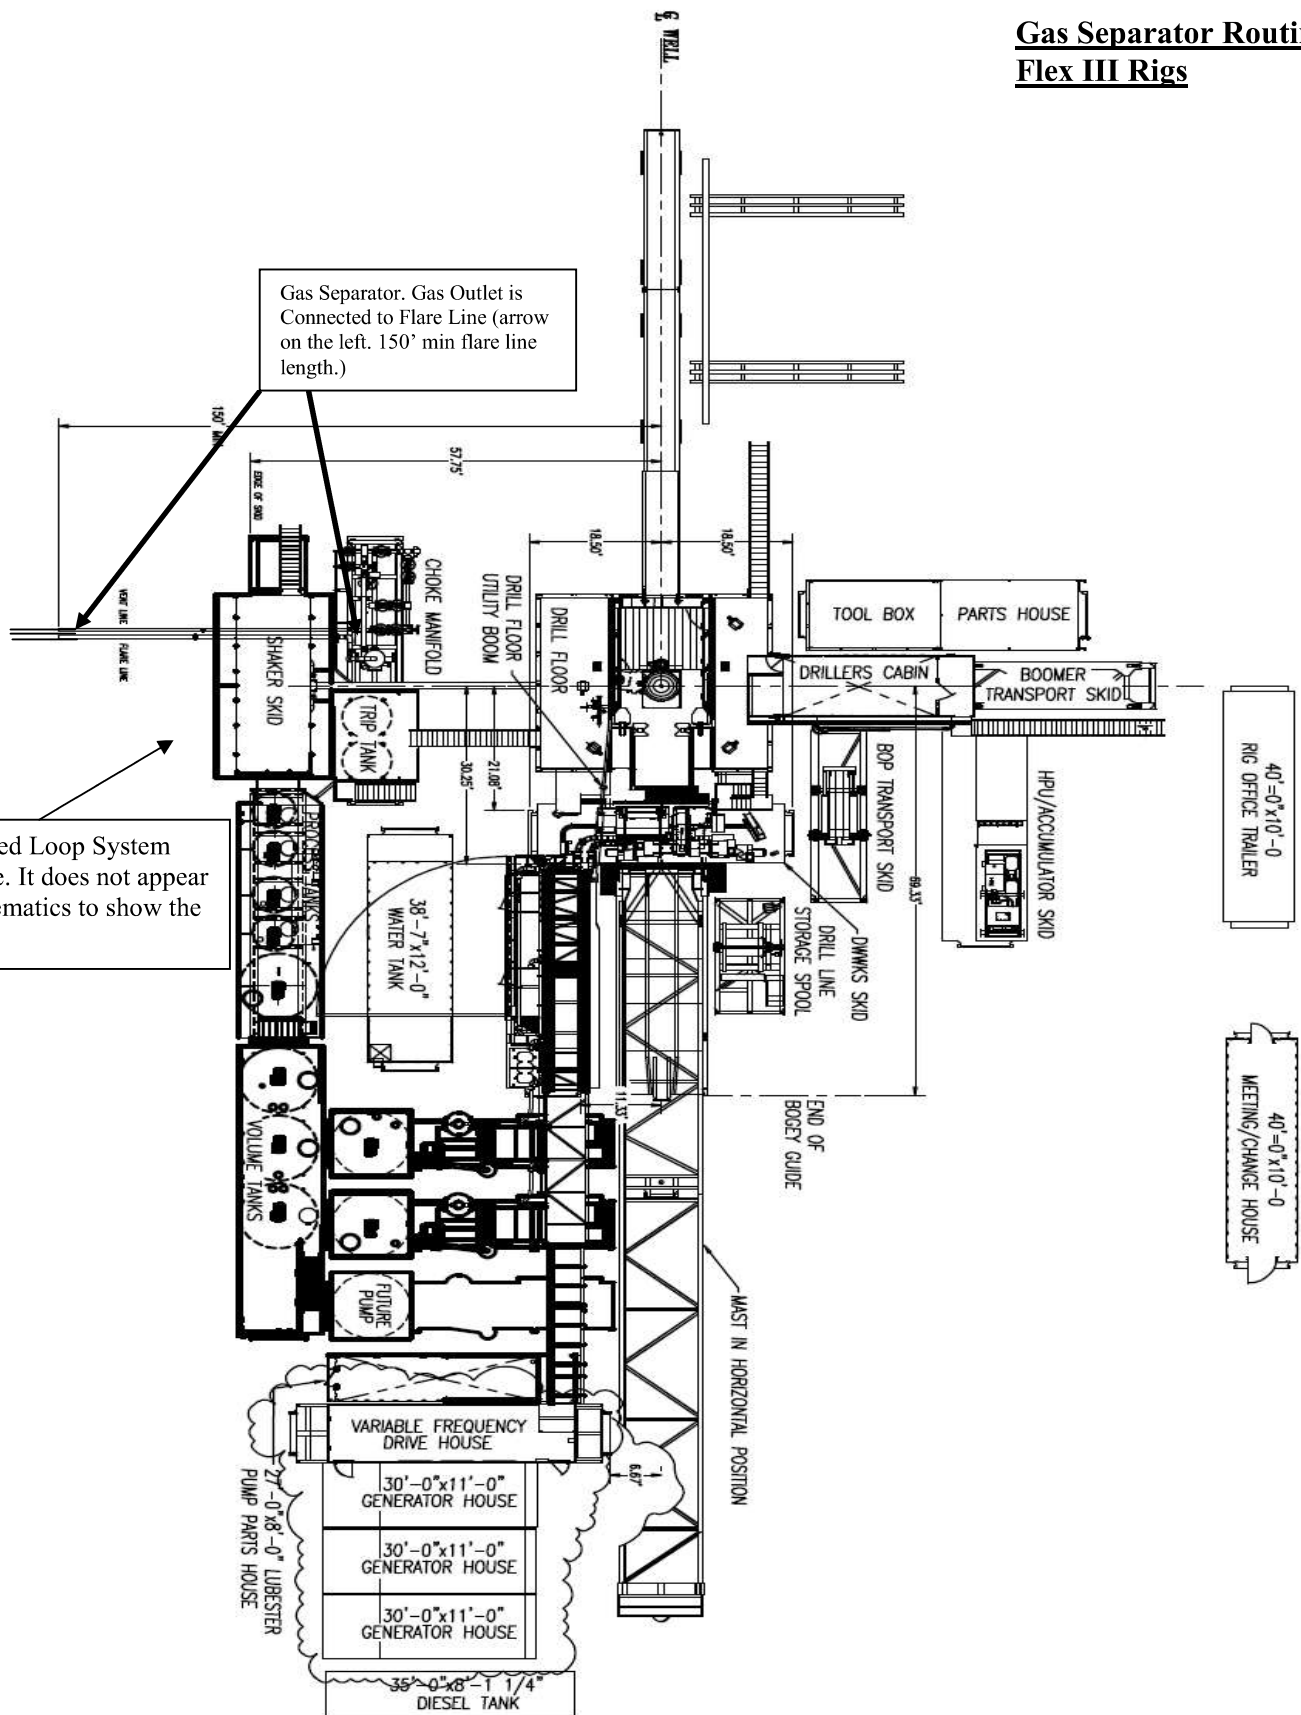

Choke Manifold – Gas Separator (Top View)

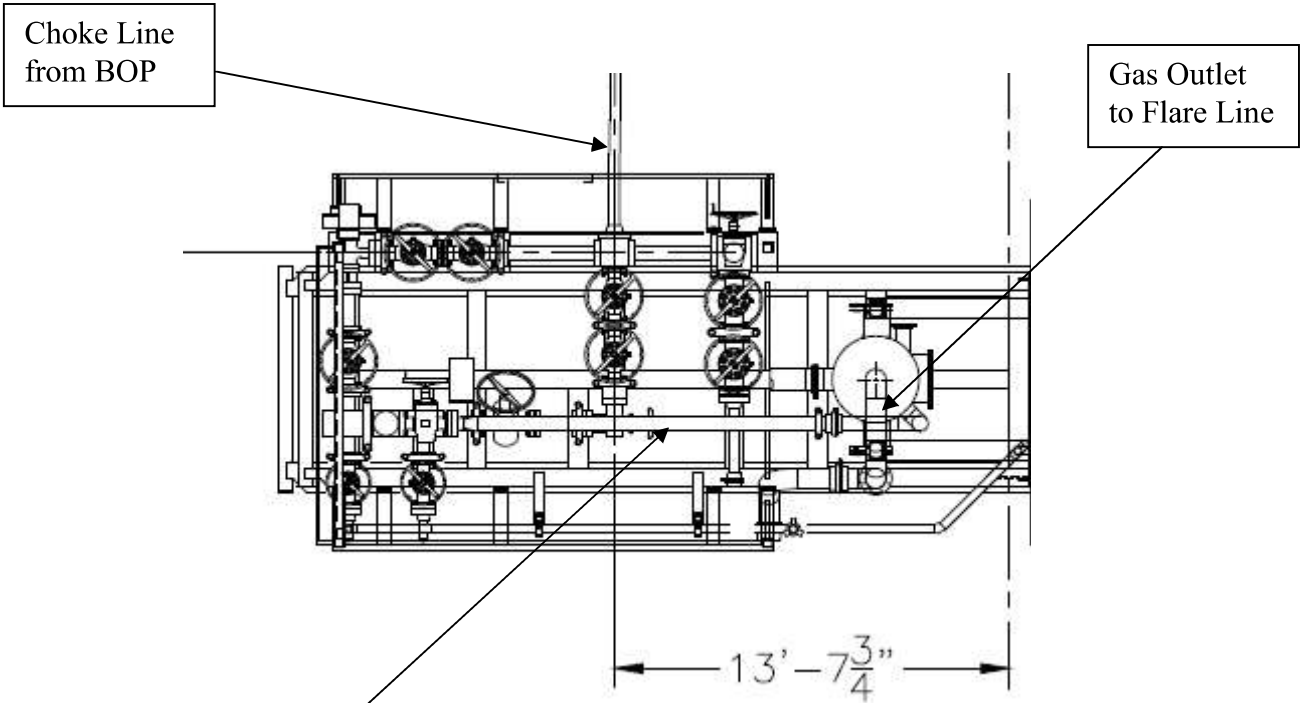

Choke Manifold – Gas Separator (Side View)

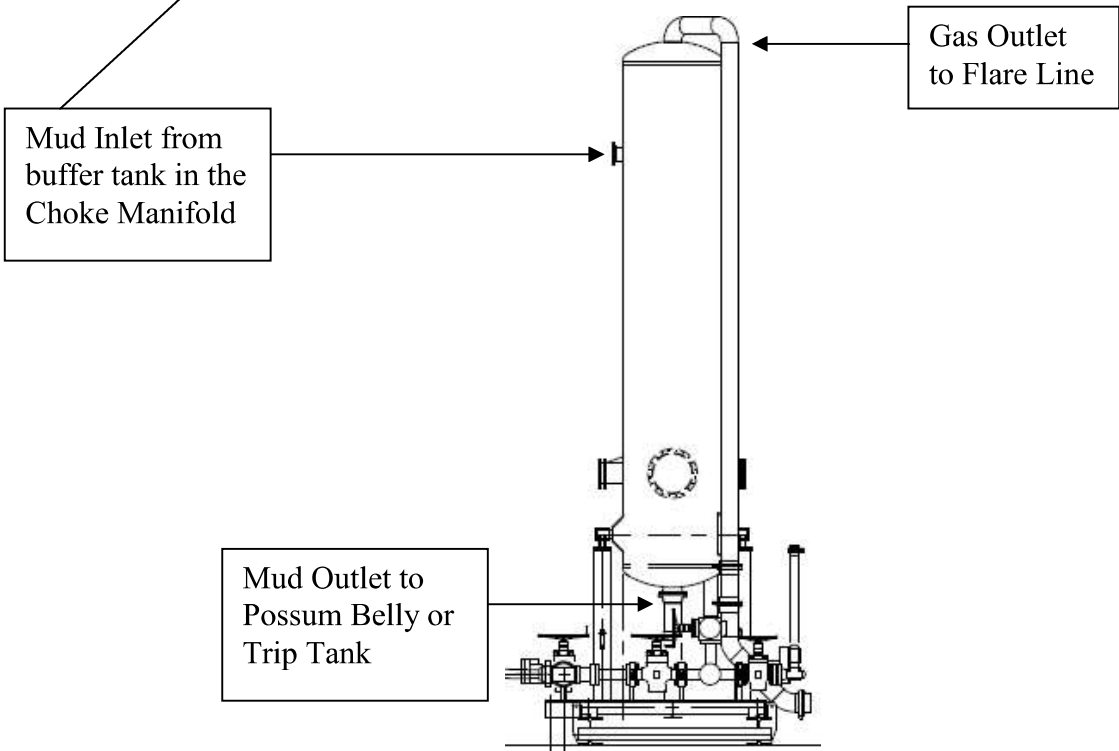



SITE PLAN



LSTTNK_21S31E_36 PAD 2
SEC. 36 TWP. 21-S RGE. 31-E
SURVEY: N.M.P.M.

COUNTY: EDDY

OPERATOR: OXY USA, INC.

U.S.G.S. TOPOGRAPHIC MAP: THE DIVIDE, N.M.

FAA PERMIT NEEDED: NO

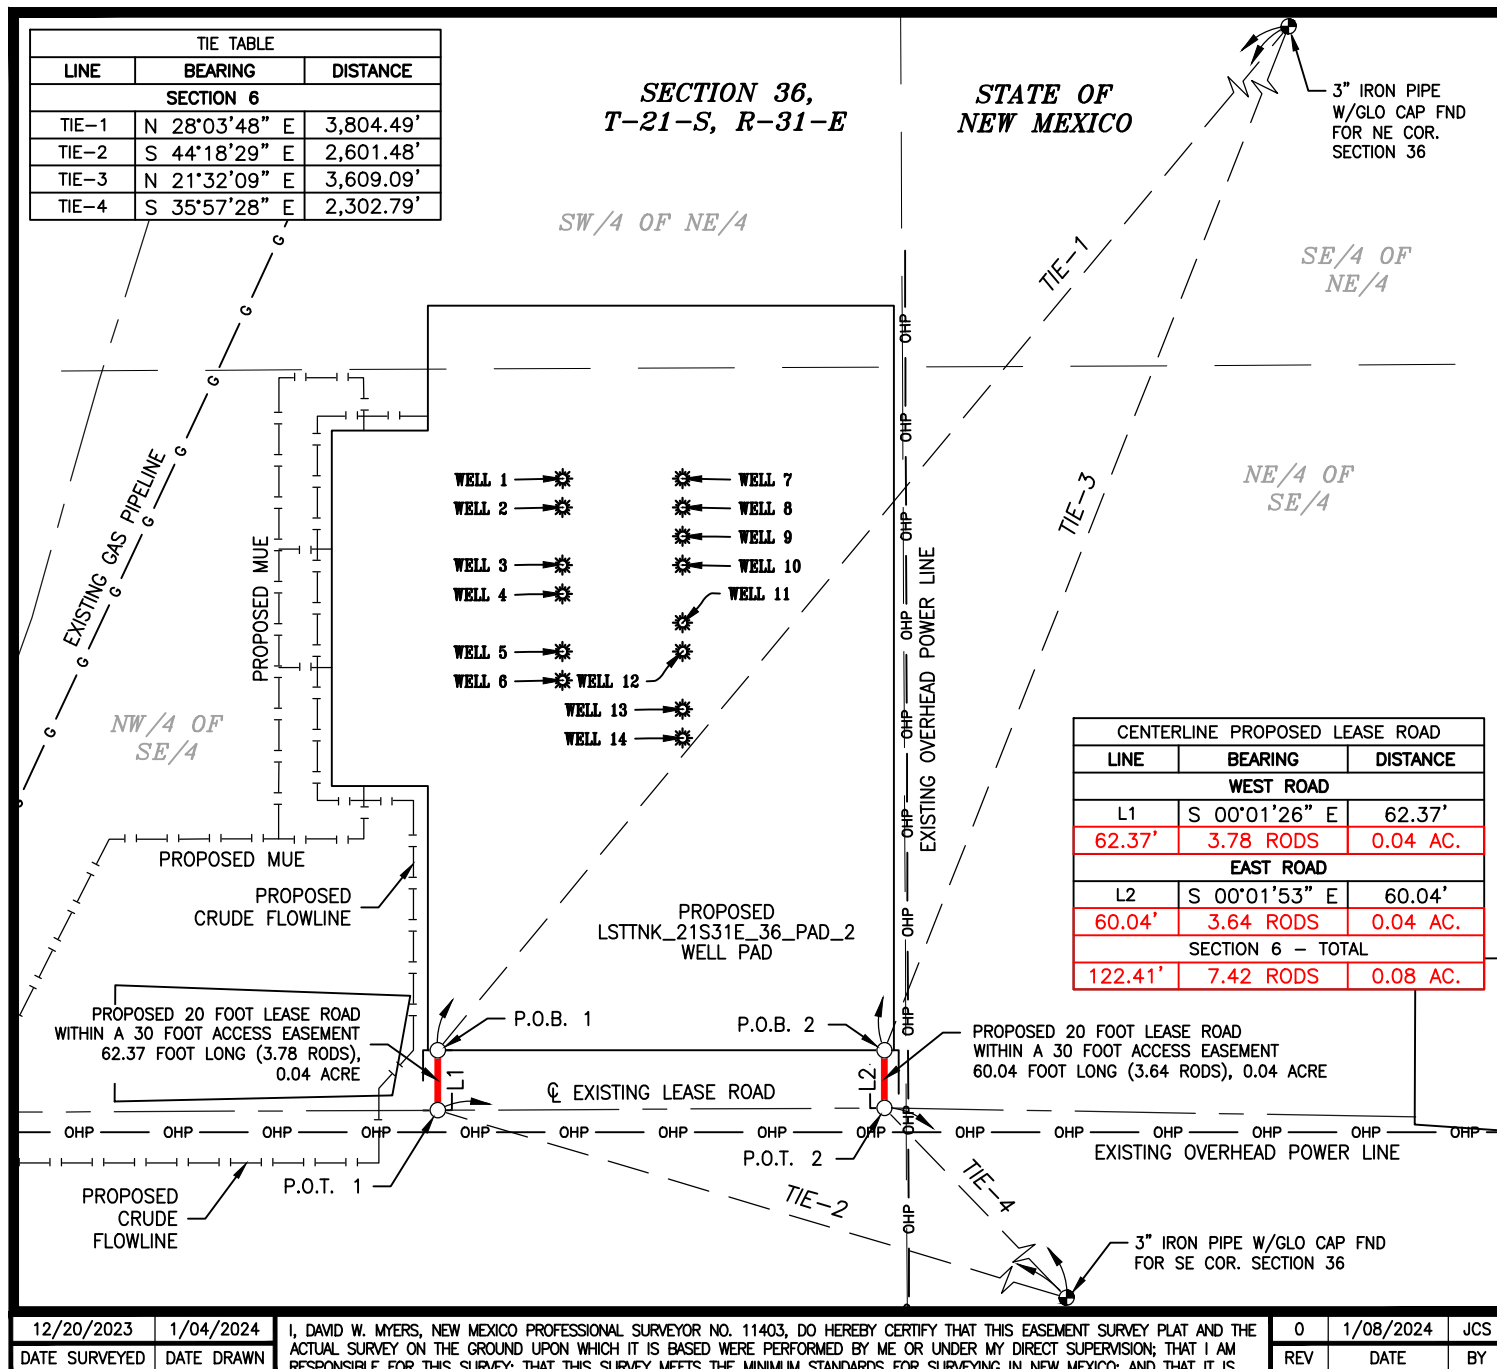


BASIS OF BEARING

ALL BEARINGS AND COORDINATES REFER TO NAD 83, NEW MEXICO STATE PLANE COORDINATE SYSTEM, EAST ZONE, U.S. SURVEY FEET. ALL BEARINGS, DISTANCES, COORDINATES AND AREAS ARE GRID MEASUREMENTS UTILIZING A COMBINED SCALE FACTOR OF 0.99977727 AND A CONVERGENCE ANGLE OF 0.322738518'.

LEGEND	
	EXISTING ROAD
	PROPOSED ROAD
	SURFACE SITE EDGE
	EXIST. PIPELINE
	MONUMENT
	QUARTER SPLIT
	OHP OVERHEAD POWER FENCE
	SECTION LINE
	PROPERTY LINE
	WATER LINE
	SALT WATER LINE

JANUARY 19, 2024



DAVID W. MYERS 11403



PREPARED BY:
DELTA FIELD SERVICES, LLC
510 TRENTON ST.
WEST MONROE, LA 71291
318-323-6900 OFFICE
JOB No. OXY_0037_SD05
SHEET 1 OF 5




SITE PLAN

LSTTNK_21S31E_36 PAD 2
SEC. 36 TWP. 21-S RGE. 31-E
SURVEY: N.M.P.M.
COUNTY: EDDY
OPERATOR: OXY USA, INC.
U.S.G.S. TOPOGRAPHIC MAP: THE DIVIDE, N.M.
FAA PERMIT NEEDED: NO

TANK BATTERY
RECLAMATION
30' TOP SOIL
20' DISTURBANCE AREA

100' 0' 100' 200'
SCALE: 1" = 200'

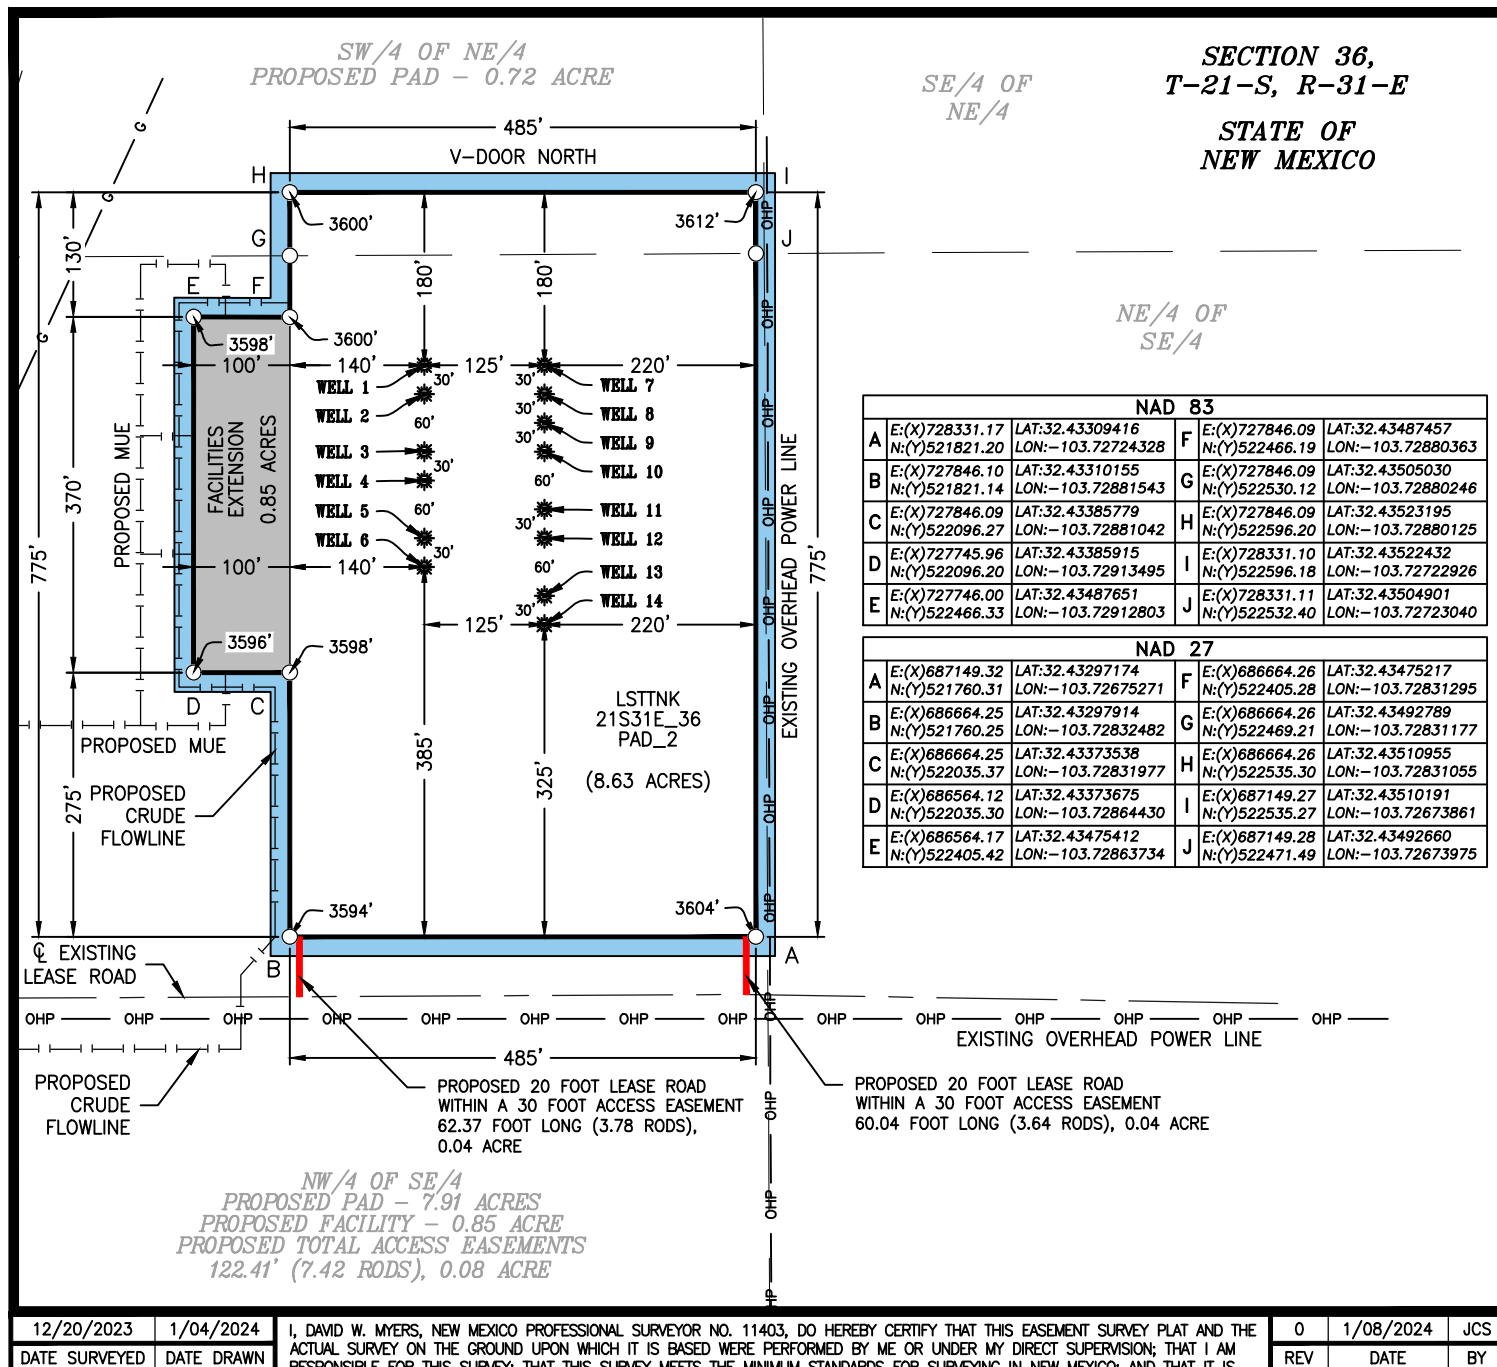

BASIS OF BEARING


ALL BEARINGS AND COORDINATES REFER TO NAD 83, NEW MEXICO STATE PLANE COORDINATE SYSTEM, EAST ZONE, U.S. SURVEY FEET. ALL BEARINGS, DISTANCES, COORDINATES AND AREAS ARE GRID MEASUREMENTS UTILIZING A COMBINED SCALE FACTOR OF 0.99977727 AND A CONVERGENCE ANGLE OF 0.322738518'.

LEGEND

— EXISTING ROAD
— PROPOSED ROAD
— SURFACE SITE EDGE
— EXIST. PIPELINE
— MONUMENT
— QUARTER SPLIT
— OHP
— X — X —
— FENCE
— SECTION LINE
— PROPERTY LINE
— WATER LINE
— SWD
— SALT WATER LINE

JANUARY 19, 2024

DAVID W. MYERS 11403



PREPARED BY:
DELTA FIELD SERVICES, LLC
510 TRENTON ST.
WEST MONROE, LA 71291
318-323-6900 OFFICE
JOB No. OXY_0037_SD05
SHEET 2 OF 5



SITE PLAN


LSTTNK_21S31E_36 PAD 2
SEC. 36 TWP. 21-S RGE. 31-E
SURVEY: N.M.P.M.

COUNTY: EDDY

OPERATOR: OXY USA, INC.

U.S.G.S. TOPOGRAPHIC MAP: THE DIVIDE, N.M.

FAA PERMIT NEEDED: NO

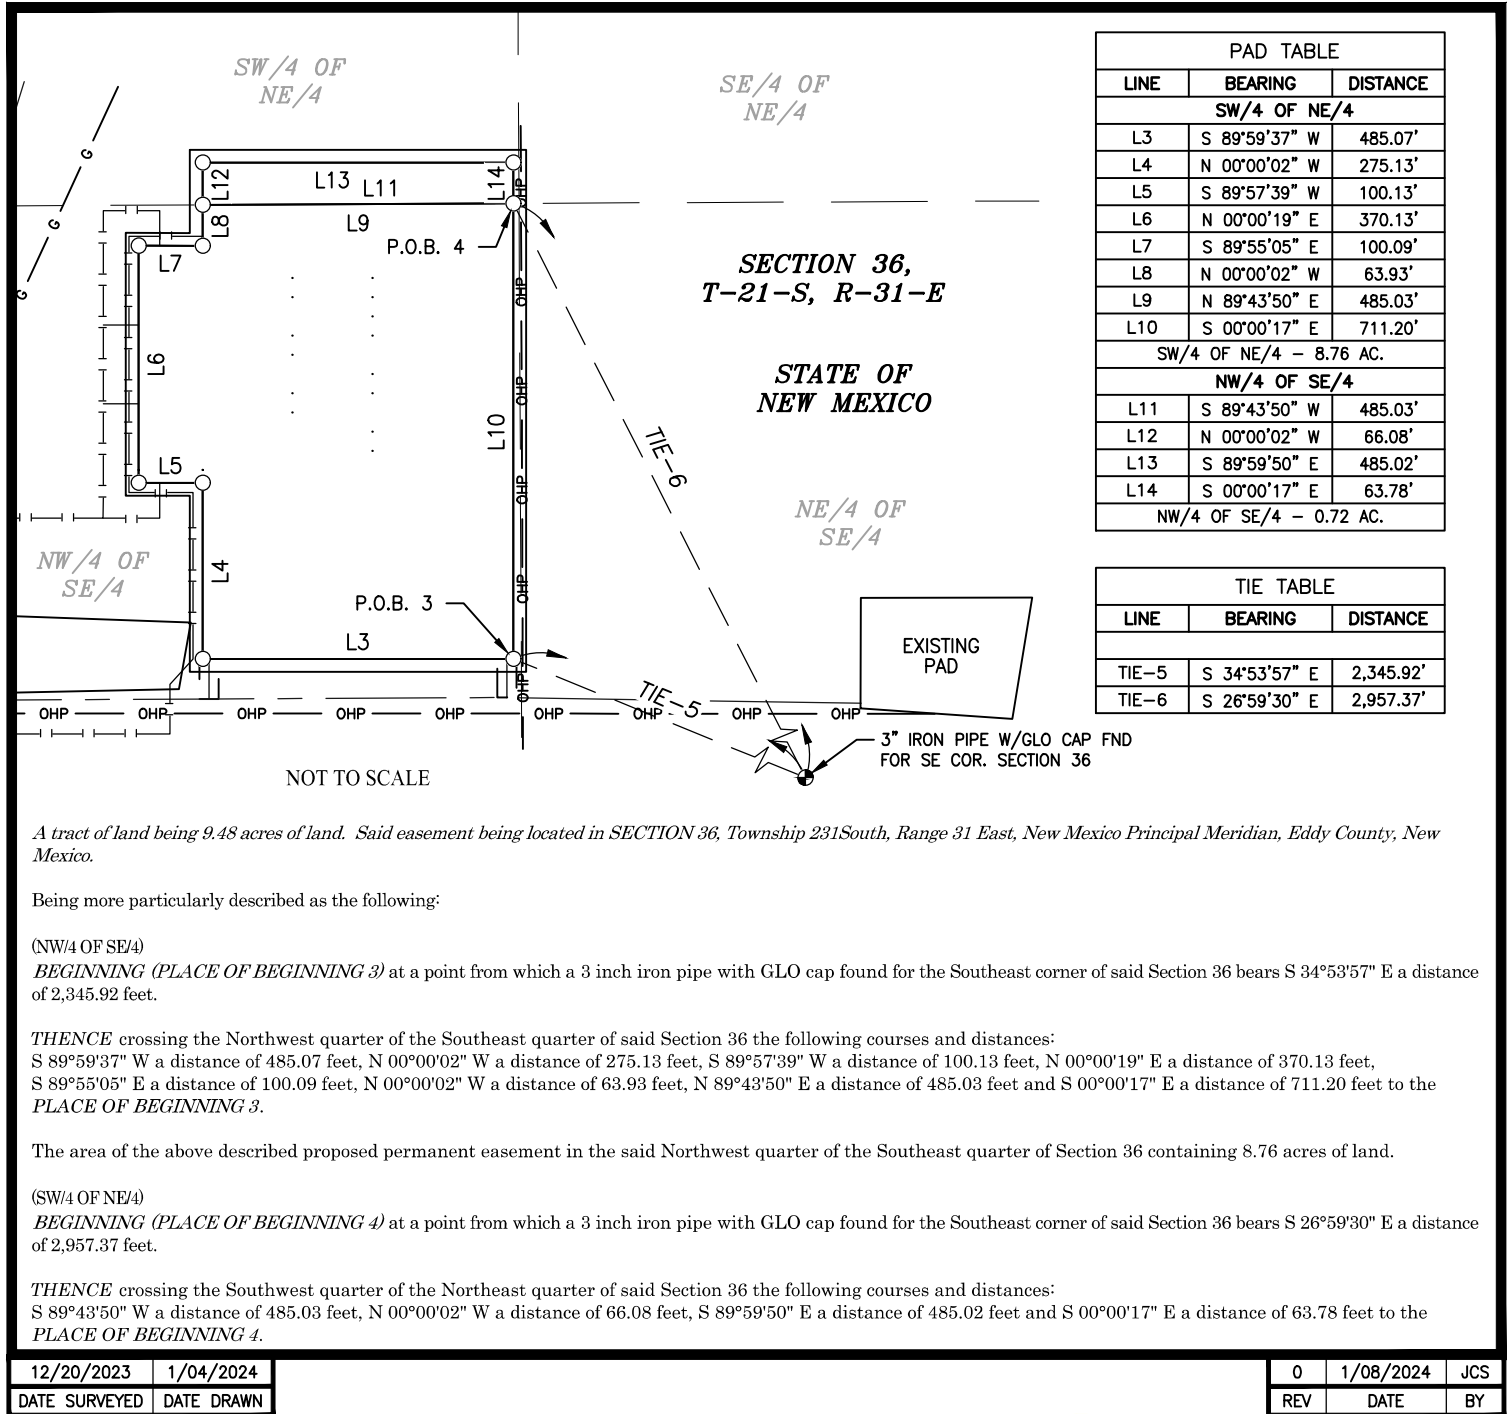

A tract of land being 9.48 acres of land. Said easement being located in SECTION 36, Township 231South, Range 31 East, New Mexico Principal Meridian, Eddy County, New Mexico.

Being more particularly described as the following:

(NW/4 OF SE/4)

BEGINNING (PLACE OF BEGINNING 3) at a point from which a 3 inch iron pipe with GLO cap found for the Southeast corner of said Section 36 bears S 34°53'57" E a distance of 2,345.92 feet.

THENCE crossing the Northwest quarter of the Southeast quarter of said Section 36 the following courses and distances:

S 89°59'37" W a distance of 485.07 feet, N 00°00'02" W a distance of 275.13 feet, S 89°57'39" W a distance of 100.13 feet, N 00°00'19" E a distance of 370.13 feet, S 89°55'05" E a distance of 100.09 feet, N 00°00'02" W a distance of 63.93 feet, N 89°43'50" E a distance of 485.03 feet and S 00°00'17" E a distance of 711.20 feet to the **PLACE OF BEGINNING 3**.

The area of the above described proposed permanent easement in the said Northwest quarter of the Southeast quarter of Section 36 containing 8.76 acres of land.

(SW/4 OF NE/4)

BEGINNING (PLACE OF BEGINNING 4) at a point from which a 3 inch iron pipe with GLO cap found for the Southeast corner of said Section 36 bears S 26°59'30" E a distance of 2,957.37 feet.


THENCE crossing the Southwest quarter of the Northeast quarter of said Section 36 the following courses and distances:

S 89°43'50" W a distance of 485.03 feet, N 00°00'02" W a distance of 66.08 feet, S 89°59'50" E a distance of 485.02 feet and S 00°00'17" E a distance of 63.78 feet to the **PLACE OF BEGINNING 4**.

LEGEND	
	EXISTING ROAD
	PROPOSED ROAD
	SURFACE SITE EDGE
	EXIST. PIPELINE
	MONUMENT
	QUARTER SPLIT
	OHP
	FENCE
	SECTION LINE
	PROPERTY LINE
	WATER LINE
	SALT WATER LINE

JANUARY 19, 2024

DAVID W. MYERS 11403



PREPARED BY:
DELTA FIELD SERVICES, LLC
510 TRENTON ST.
WEST MONROE, LA 71291
318-323-6900 OFFICE
JOB No. OXY_0037_SD05
SHEET 3 OF 5



SITE PLAN

LSTTNK_21S31E_36 PAD 2
SEC. 36 TWP. 21-S RGE. 31-E
SURVEY: N.M.P.M.

COUNTY: EDDY

OPERATOR: OXY USA, INC.

U.S.G.S. TOPOGRAPHIC MAP: THE DIVIDE, N.M.

FAA PERMIT NEEDED: NO



The area of the above described proposed permanent easement in the said Southwest quarter of Northeast quarter containing 0.72 acre of land.

The total area of the above described proposed permanent easement in said Section 36 containing 9.48 acres of land.

All bearings and coordinates refer to NAD 83, New Mexico State Plane Coordinate System, East Zone, U.S. Survey Feet. All bearings, distances, coordinates and areas are grid measurements utilizing a combined scale factor of 0.999777727 and a convergence angle of 0.322738518°.

Title information furnished by OXY USA INC.

Reference accompanying Certificate of Survey prepared in conjunction with this legal description for easement.

STATE OF NEW MEXICO

COUNTY OF EDDY

I, David W. Myers, New Mexico Professional Surveyor No. 11403 do hereby certify that this easement survey plat and the actual survey on the ground upon which it is based were performed by me or under my direct supervision; that I am responsible for this survey; that this survey meets the minimum standards for surveying in New Mexico; and that it is true and correct to the best of my knowledge and belief. I further certify that this survey is not a land division or subdivision as defined in the New Mexico Subdivision Act and that this instrument is an easement survey plat crossing an existing tract or tracts.


12/20/2023	1/04/2024
DATE SURVEYED	DATE DRAWN

0	1/08/2024	JCS
REV	DATE	BY

LEGEND	
	EXISTING ROAD
	PROPOSED ROAD
	SURFACE SITE EDGE
	EXIST. PIPELINE
	MONUMENT
	QUARTER SPLIT
	OHP OVERHEAD POWER FENCE
	SECTION LINE
	PROPERTY LINE
	WATER LINE
	SALT WATER LINE

JANUARY 19, 2024

DAVID W. MYERS 11403



PREPARED BY:
DELTA FIELD SERVICES, LLC
510 TRENTON ST.
WEST MONROE, LA 71291
318-323-6900 OFFICE
JOB No. OXY_0037_SD05
SHEET 4 OF 5



SITE PLAN

LSTTNK_21S31E_36 PAD 2
SEC. 36 TWP. 21-S RGE. 31-E
SURVEY: N.M.P.M.

COUNTY: EDDY

OPERATOR: OXY USA, INC.

U.S.G.S. TOPOGRAPHIC MAP: THE DIVIDE, N.M.

FAA PERMIT NEEDED: NO

WELL 1
STRESSED DESSERTS 36_1 FED COM 4H
OXY USA, INC.

2,528' FSL 1,674' FEL, SECTION 36
NAD 83, SPCS NM EAST
X:727986.18' / Y:522416.13'
LAT:32.43473481N / LON:103.72835051W
NAD 27, SPCS NM EAST
X:686804.34' / Y:522355.23'
LAT:32.43461240N / LON:103.72785984W
ELEVATION = 3,605'

WELL 4
STRESSED DESSERTS 36_1 FED COM 13H
OXY USA, INC.

2,408' FSL 1,675' FEL, SECTION 36
NAD 83, SPCS NM EAST
X:727986.14' / Y:522296.18'
LAT:32.43440511N / LON:103.72835283W
NAD 27, SPCS NM EAST
X:686804.30' / Y:522235.28'
LAT:32.43428270N / LON:103.72786218W
ELEVATION = 3,602'

WELL 7
STRESSED DESSERTS 36_1 FED COM 38H
OXY USA, INC.

2,527' FSL 1,549' FEL, SECTION 36
NAD 83, SPCS NM EAST
X:728111.09' / Y:522416.18'
LAT:32.43473300N / LON:103.72794566W
NAD 27, SPCS NM EAST
X:686929.25' / Y:522355.28'
LAT:32.43461059N / LON:103.72745501W
ELEVATION = 3,608'

WELL 10
STRESSED DESSERTS 36_1 FED COM 35H
OXY USA, INC.

2,437' FSL 1,550' FEL, SECTION 36
NAD 83, SPCS NM EAST
X:727811.13' / Y:522326.15'
LAT:32.43448552N / LON:103.72794717W
NAD 27, SPCS NM EAST
X:686929.29' / Y:522265.24'
LAT:32.43436311N / LON:103.72745652W
ELEVATION = 3,607'

WELL 13
STRESSED DESSERTS 36_1 FED COM 44H
OXY USA, INC.

2,287' FSL 1,551' FEL, SECTION 36
NAD 83, SPCS NM EAST
X:728111.05' / Y:522176.22'
LAT:32.43407343N / LON:103.72795018W
NAD 27, SPCS NM EAST
X:686929.21' / Y:522115.32'
LAT:32.43395102N / LON:103.72745955W
ELEVATION = 3,603'

WELL 2
STRESSED DESSERTS 36_1 FED COM 3H
OXY USA, INC.

2,498' FSL 1,675' FEL, SECTION 36
NAD 83, SPCS NM EAST
X:727986.11' / Y:522386.18'
LAT:32.43465248N / LON:103.72835129W
NAD 27, SPCS NM EAST
X:686804.27' / Y:522325.28'
LAT:32.43453008N / LON:103.72786063W
ELEVATION = 3,606'

WELL 5
STRESSED DESSERTS 36_1 FED COM 24H
OXY USA, INC.

2,348' FSL 1,675' FEL, SECTION 36
NAD 83, SPCS NM EAST
X:727986.11' / Y:522326.21'
LAT:32.43424026N / LON:103.72835404W
NAD 27, SPCS NM EAST
X:686804.27' / Y:522175.31'
LAT:32.43411786N / LON:103.72786340W
ELEVATION = 3,602'

WELL 8
STRESSED DESSERTS 36_1 FED COM 37H
OXY USA, INC.

2,497' FSL 1,550' FEL, SECTION 36
NAD 83, SPCS NM EAST
X:728111.11' / Y:522386.18'
LAT:32.43465054N / LON:103.72794615W
NAD 27, SPCS NM EAST
X:686929.27' / Y:522325.28'
LAT:32.43452813N / LON:103.72745550W
ELEVATION = 3,608'

WELL 11
STRESSED DESSERTS 36_1 FED COM 74H
OXY USA, INC.

2,377' FSL 1,550' FEL, SECTION 36
NAD 83, SPCS NM EAST
X:728111.08' / Y:522266.22'
LAT:32.43432081N / LON:103.72794844W
NAD 27, SPCS NM EAST
X:686929.24' / Y:522205.32'
LAT:32.43419840N / LON:103.72745780W
ELEVATION = 3,606'

WELL 14
STRESSED DESSERTS 36_1 FED COM 43H
OXY USA, INC.

2,257' FSL 1,551' FEL, SECTION 36
NAD 83, SPCS NM EAST
X:728111.03' / Y:522146.26'
LAT:32.43399106N / LON:103.72795078W
NAD 27, SPCS NM EAST
X:686929.19' / Y:522085.36'
LAT:32.43386865N / LON:103.72746016W
ELEVATION = 3,604'

WELL 3
STRESSED DESSERTS 36_1 FED COM 14H
OXY USA, INC.

2,438' FSL 1,675' FEL, SECTION 36
NAD 83, SPCS NM EAST
X:727986.10' / Y:522326.18'
LAT:32.43448754N / LON:103.72835240W
NAD 27, SPCS NM EAST
X:686804.27' / Y:522265.27'
LAT:32.43436514N / LON:103.72786174W
ELEVATION = 3,604'

WELL 6
STRESSED DESSERTS 36_1 FED COM 23H
OXY USA, INC.

2,318' FSL 1,675' FEL, SECTION 36
NAD 83, SPCS NM EAST
X:727986.09' / Y:522206.16'
LAT:32.43415766N / LON:103.72835463W
NAD 27, SPCS NM EAST
X:686804.25' / Y:522145.26'
LAT:32.43403525N / LON:103.72786399W
ELEVATION = 3,602'

WELL 9
STRESSED DESSERTS 36_1 FED COM 36H
OXY USA, INC.

2,467' FSL 1,550' FEL, SECTION 36
NAD 83, SPCS NM EAST
X:728111.07' / Y:522356.20'
LAT:32.43456812N / LON:103.72794680W
NAD 27, SPCS NM EAST
X:686929.24' / Y:522295.29'
LAT:32.43444571N / LON:103.72745616W
ELEVATION = 3,609'

WELL 12
STRESSED DESSERTS 36_1 FED COM 73H
OXY USA, INC.

2,347' FSL 1,550' FEL, SECTION 36
NAD 83, SPCS NM EAST
X:728111.11' / Y:522236.16'
LAT:32.43423818N / LON:103.72794890W
NAD 27, SPCS NM EAST
X:686929.27' / Y:522175.26'
LAT:32.43411578N / LON:103.72745826W
ELEVATION = 3,604'

12/20/2023	1/04/2024
DATE SURVEYED	DATE DRAWN

I, DAVID W. MYERS, NEW MEXICO PROFESSIONAL SURVEYOR NO. 11403, DO HEREBY CERTIFY THAT THIS EASEMENT SURVEY PLAT AND THE ACTUAL SURVEY ON THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY DIRECT SUPERVISION; THAT I AM RESPONSIBLE FOR THIS SURVEY; THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO; AND THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF. I FURTHER CERTIFY THAT THIS SURVEY IS NOT A LAND DIVISION OR SUBDIVISION AS DEFINED IN THE NEW MEXICO SUBDIVISION ACT AND THAT THIS INSTRUMENT IS AN EASEMENT SURVEY PLAT CROSSING AN EXISTING TRACT OR TRACTS.

0	1/08/2024	JCS
REV	DATE	BY


BASIS OF BEARING

ALL BEARINGS AND COORDINATES REFER TO NAD 83, NEW MEXICO STATE PLANE COORDINATE SYSTEM, EAST ZONE, U.S. SURVEY FEET. ALL BEARINGS, DISTANCES, COORDINATES AND AREAS ARE GRID MEASUREMENTS UTILIZING A COMBINED SCALE FACTOR

OF 0.999777727 AND A CONVERGENCE ANGLE OF 0.32278518"

JANUARY 19, 2024


DAVID W. MYERS 11403



PREPARED BY:
DELTA FIELD SERVICES, LLC
510 TRENTON ST.
WEST MONROE, LA 71291
318-323-6900 OFFICE
JOB No. OXY_0037_SD05
SHEET 5 OF 5




10M Choke Panel

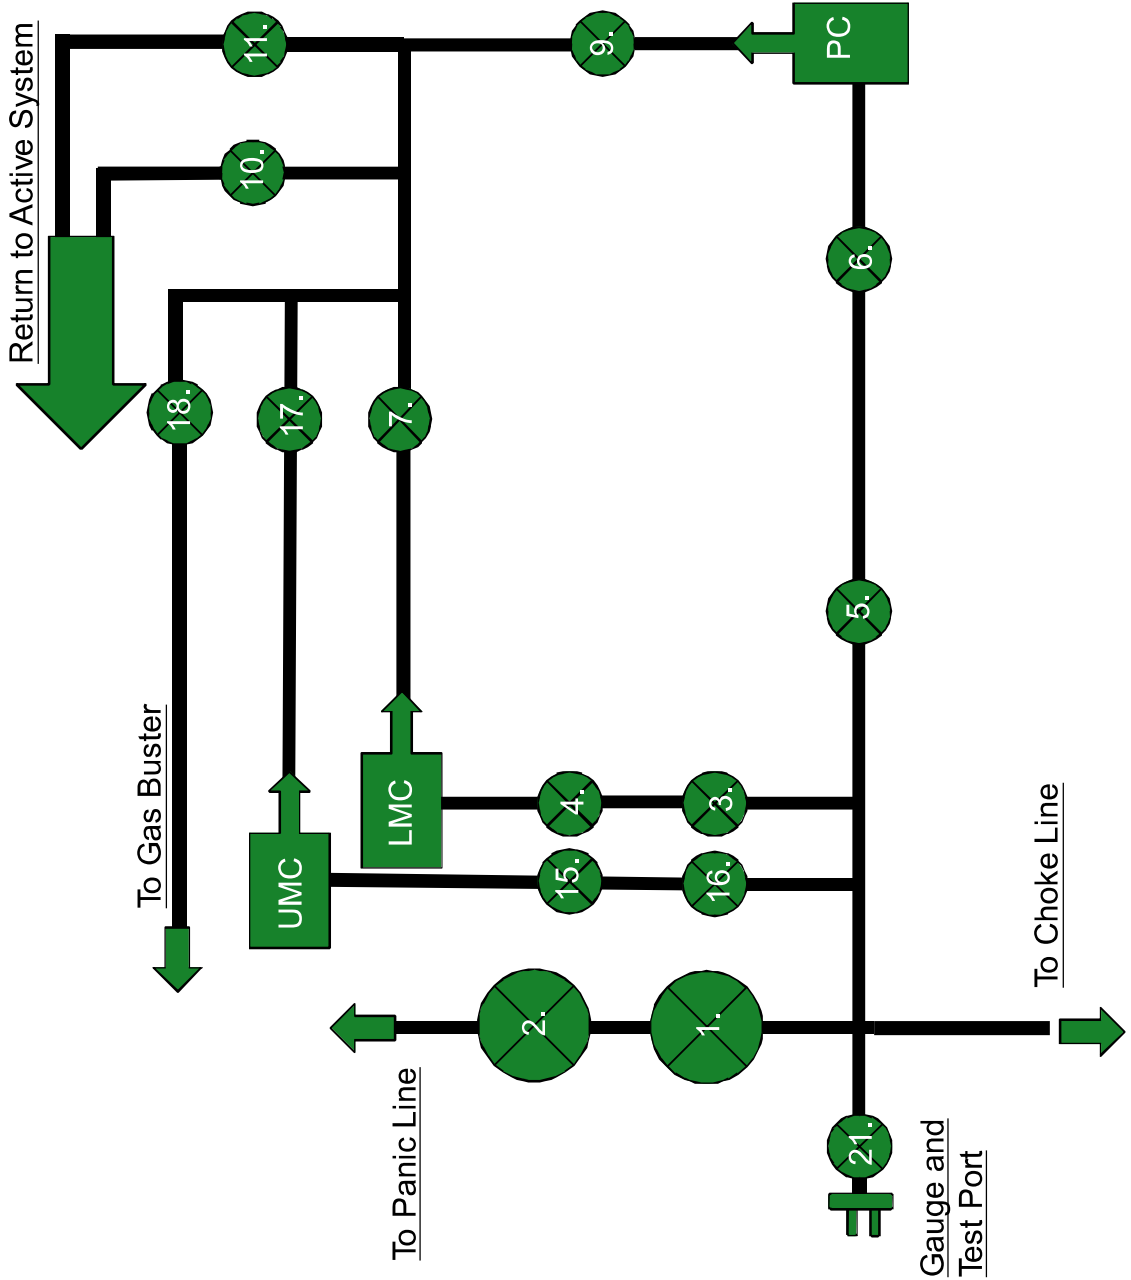

- 1. Choke Manifold Valve
- 2. Choke Manifold Valve
- 3. Choke Manifold Valve
- 4. Choke Manifold Valve
- 5. Choke Manifold Valve
- 6. Choke Manifold Valve
- 7. Choke Manifold Valve
- 8. **PC – Power Choke**
- 9. Choke Manifold Valve
- 10. Choke Manifold Valve
- 11. Choke Manifold Valve
- 12. **LMC – Lower Manual Choke**
- 13. **UMC – Upper manual choke**
- 15. Choke Manifold Valve
- 16. Choke Manifold Valve
- 17. Choke Manifold Valve
- 18. Choke Manifold Valve
- 21. Vertical Choke Manifold Valve


***All Valves 3” minimum**

10M REMOTE KILL LINE SCHEMATIC

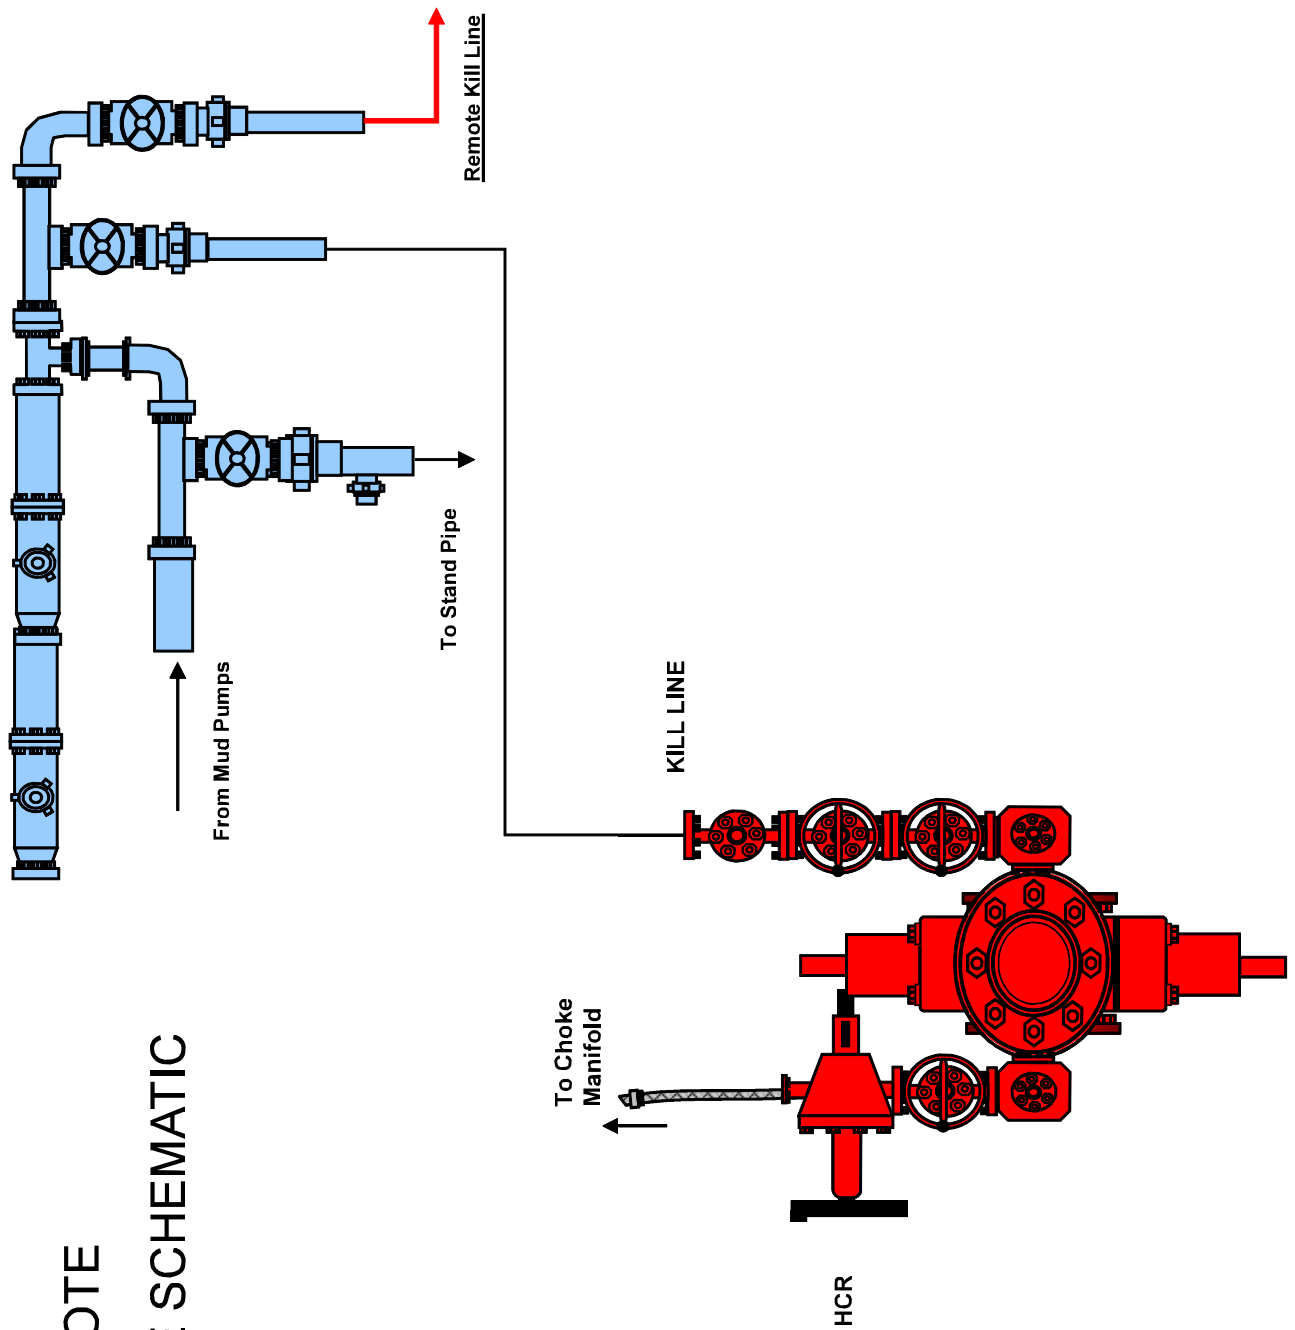


[illegible]


Choke Manifold – Gas Separator (Top View)

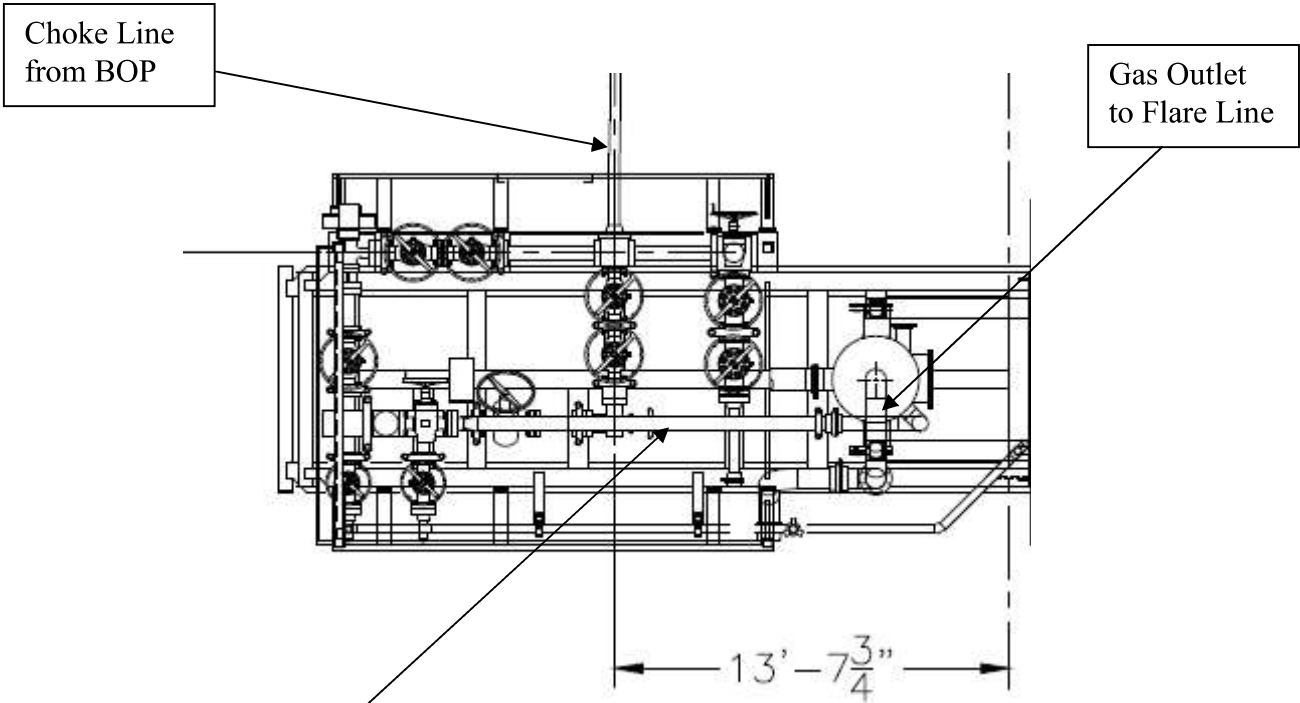

Choke Manifold – Gas Separator (Side View)

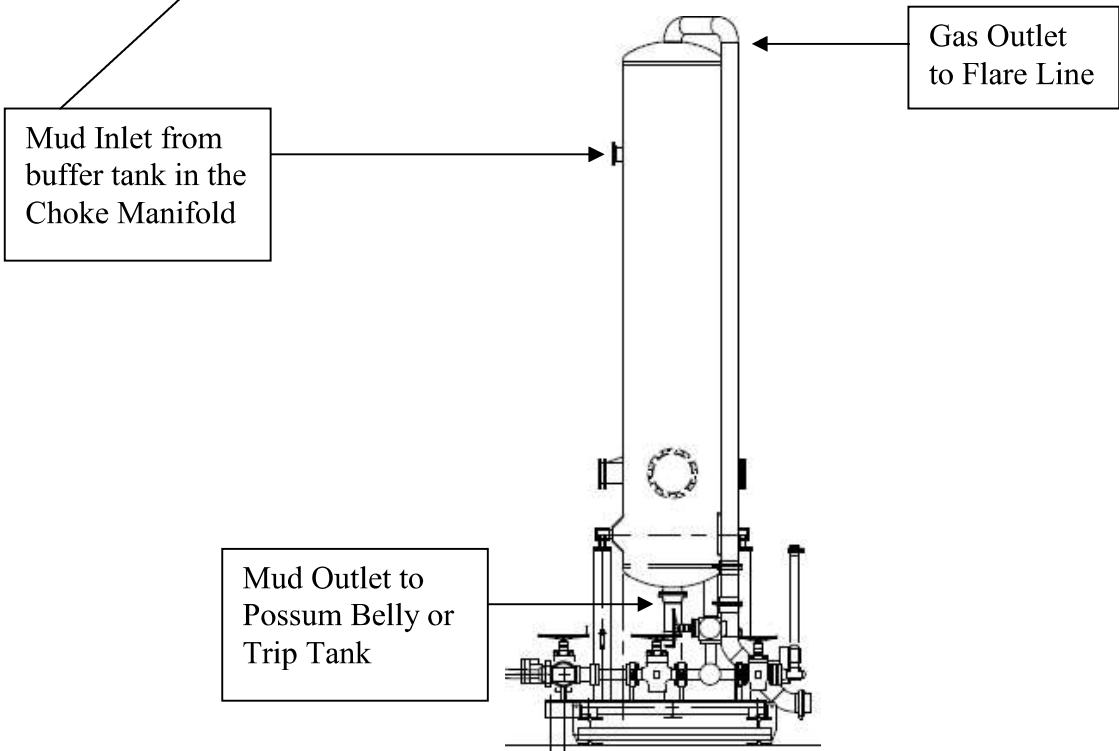


5/10M BOP Stack

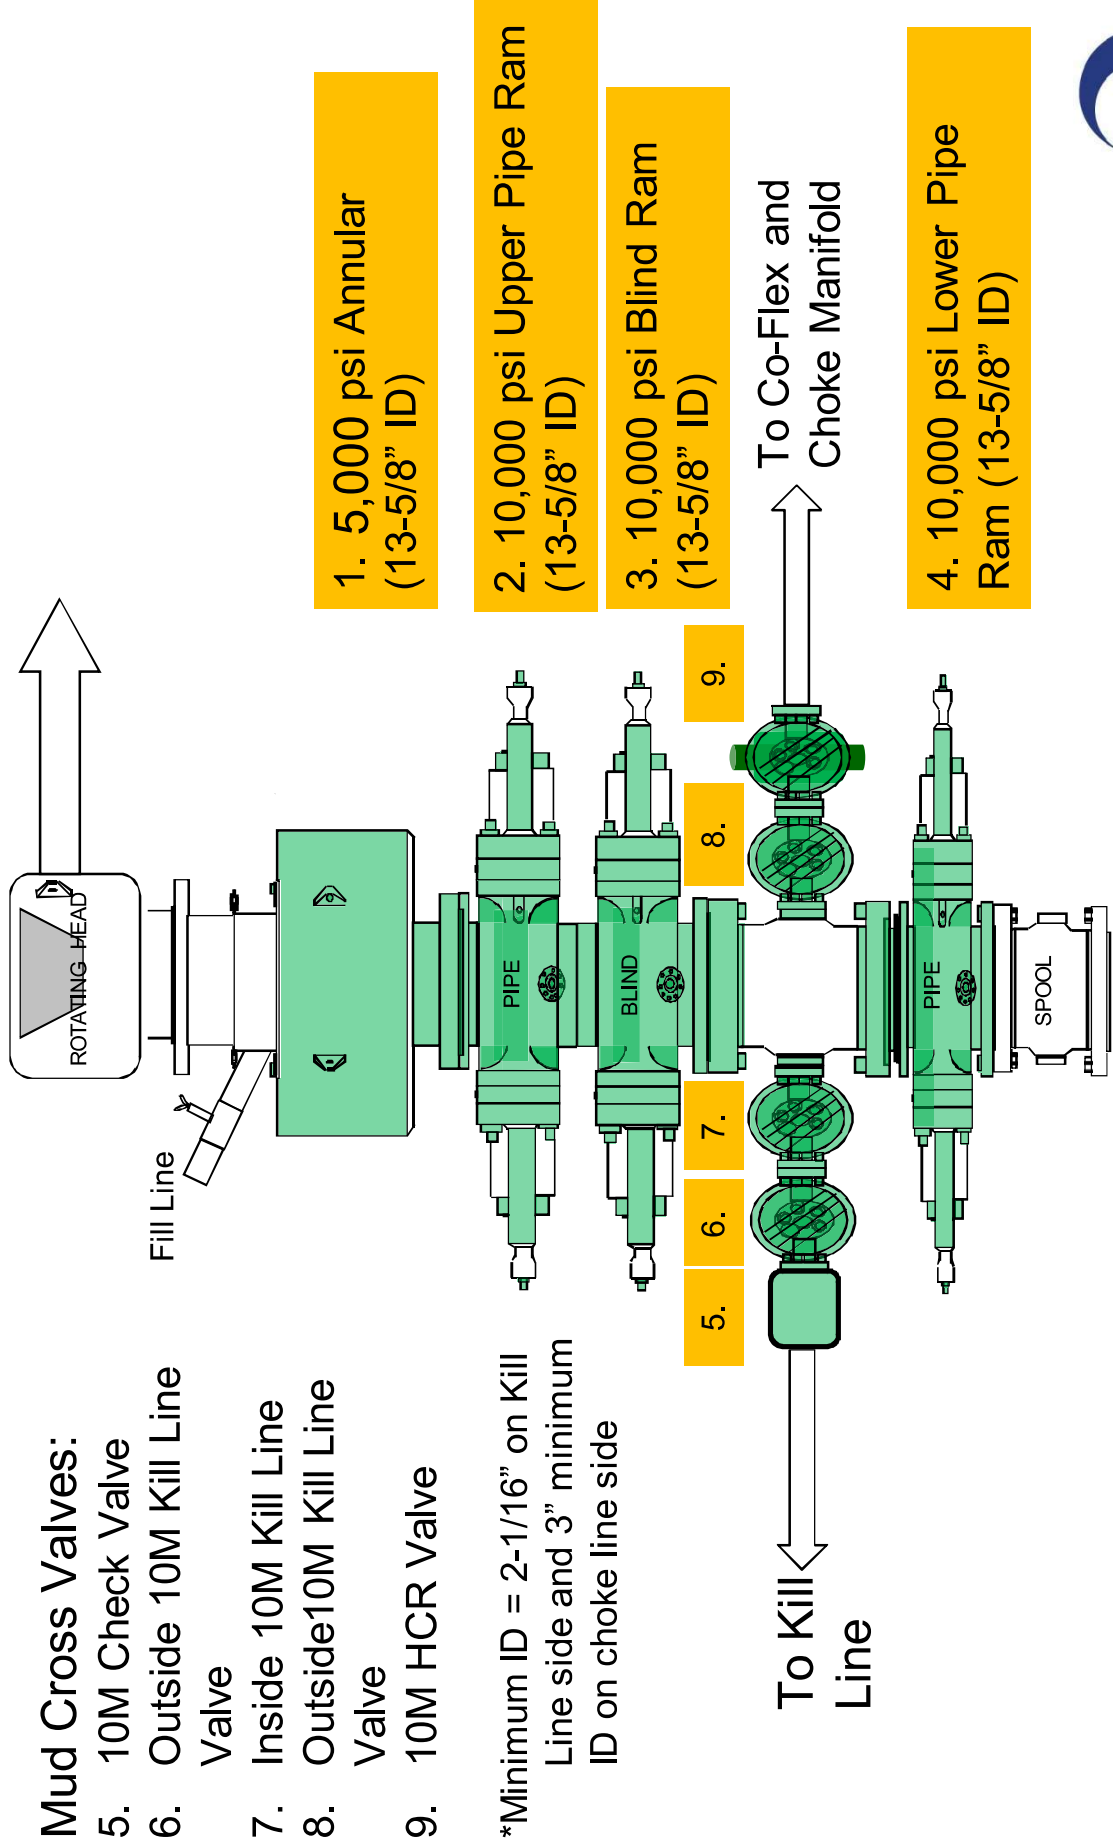

*Minimum ID = 2-1/16" on Kill Line side and 3" minimum ID on choke line side



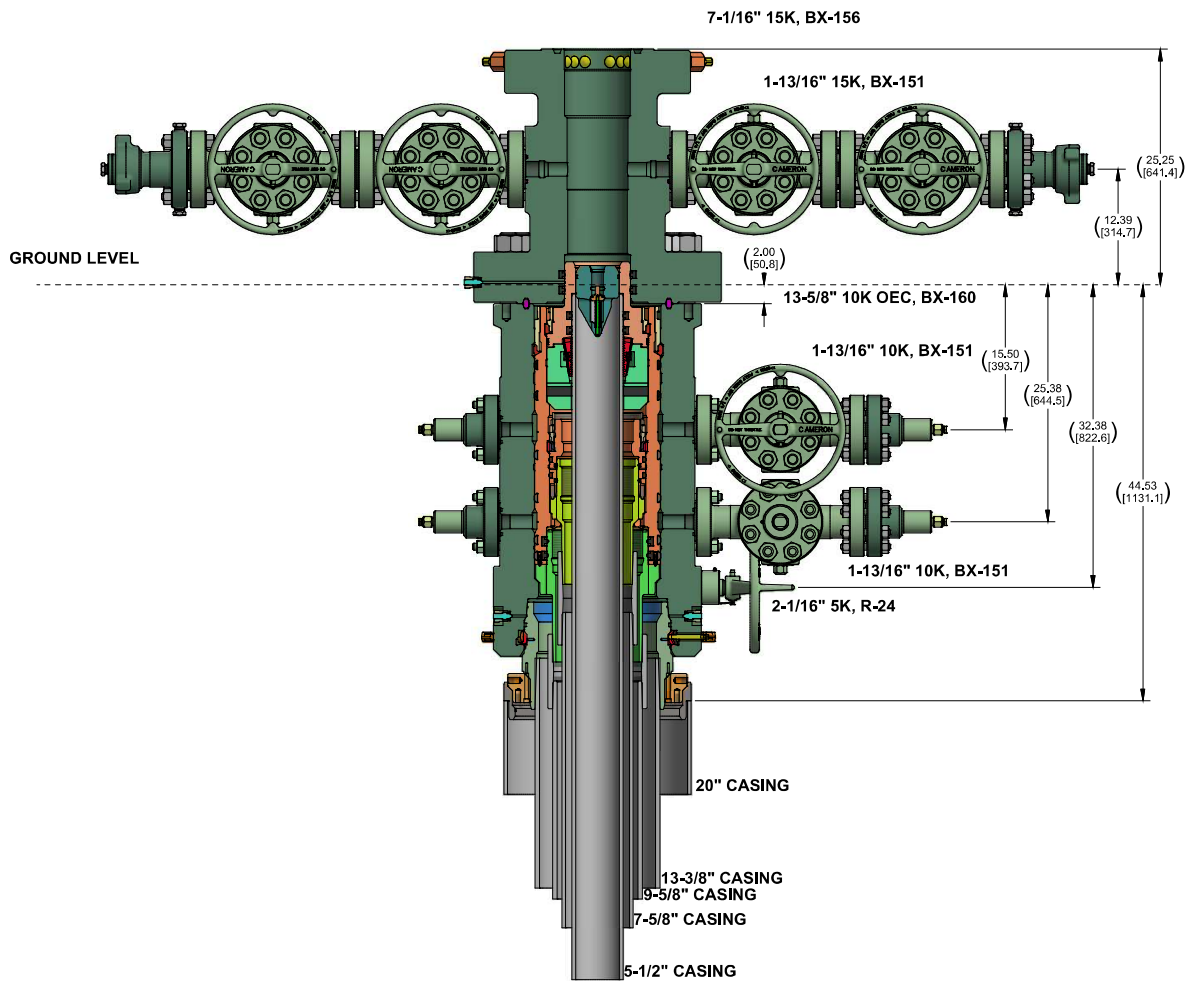

CONFIDENTIAL				
SURFACE TREATMENT	DO NOT SCALE		 A Schlumberger Company	SURFACE SYSTEMS
MATERIAL & TREAT TREAT	DRAWN BY	DATE		
	A. SKLENKA	26 Apr 22		
	CHECKED BY	DATE		
	A. SKLENKA	26 Apr 22		
	APPROVED BY	DATE		
	A. SKLENKA	26 Apr 22		
OXY ADAPT NST 10K 3 STAGE WELLHEAD STANDARD / EMERGENCY SYSTEM				
ESTIMATED WEIGHT	7588.4 LBS (PETROL USE ONLY) 3616.4 KG (174 7536394)	SHEET 1 of 1	LO-096232-62	REV 01
INVESTIGATOR				

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 465387

CONDITIONS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 465387
	Action Type: [C-101] BLM - Federal/Indian Land Lease (Form 3160-3)

CONDITIONS

Created By	Condition	Condition Date
melissaguidry	Cement is required to circulate on both surface and intermediate1 strings of casing.	5/20/2025
melissaguidry	If cement does not circulate on any string, a Cement Bond Log (CBL) is required for that string of casing.	5/20/2025
ward.rikala	Notify the OCD 24 hours prior to casing & cement.	6/23/2025
ward.rikala	File As Drilled C-102 and a directional Survey with C-104 completion packet.	6/23/2025
ward.rikala	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string.	6/23/2025
ward.rikala	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system.	6/23/2025
ward.rikala	Operator must comply with all of the R-111-Q requirements.	6/23/2025