

4 = 30-039-06707
9 = 30-039-06711

3534

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit H Sec. 6 Twp 26 Rng 4

Name of Well/Wells or Pipeline Serviced JICARILLA 119N #4, #9

cps 2014w

Elevation 7149' Completion Date 10/12/88 Total Depth 340' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 140' NO SAMPLE

Depths gas encountered: N/A

Type & amount of coke breeze used: N/A

Depths anodes placed: 280', 272', 264', 256', 248', 240', 232', 185', 175', 165'

Depths vent pipes placed: 334'

Vent pipe perforations: 200'

Remarks: gb #1

RECEIVED
MAY 31 1991
OIL CON. DIV.
DIST. 10

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

MERIDIAN OIL INT.
WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

COMP 10-14-88 JZ

Drilling Log (Attach Hereto) ☐

Completion Date 10/12/88

CPS #	Well Name: Line or Plant:	Work Order #	State:	Ins. Union Check
2014 W	JICARILLA 119N * 4	40577A+B	75V 600' W	☒ Good ☐ Bad
	JICARILLA 119N * 9	52014A	70V 600' W	
Location:	Anode Size:	Anode Type:	Size Bit:	
H-6-26-4	2" X 60"	Durion	6 3/4"	
Depth Drilled	Depth Logged	Drilling Rig Time	Total Lbs. Coke Used	Lost Circulation Mat'l Used
340'	334'			
Anode Depth				
# 1 280	# 2 272	# 3 264	# 4 256	# 5 248
# 6 240	# 7 232	# 8 185	# 9 175	# 10 165
Anode Output (Amps)				
# 1 3.4	# 2 4.4	# 3 4.6	# 4 3.6	# 5 3.8
# 6 3.6	# 7 3.5	# 8 3.9	# 9 4.2	# 10 4.2
Anode Depth				
# 11	# 12	# 13	# 14	# 15
# 16	# 17	# 18	# 19	# 20
Anode Output (Amps)				
# 11	# 12	# 13	# 14	# 15
# 16	# 17	# 18	# 19	# 20
Total Circuit Resistance			No. 8 C.P. Cable Used	No. 2 C.P. Cable Used
Volts 11.77	Amps 16.0	Ohms .65		

Remarks: DAMP SPOT AT 140'. COULD NOT GET WATER SAMPLE.
INSTALLED 334' of 1" PVC VENT pipe, Perforated 200'.
Layed 1/2" fuel line in wire ditch.

GR 4170.00
Rectifier Size: T.E.G. V A 7695.00
Addn'l Depth _____
Depth Credit: - 166 3.50 - 581.00 ✓
Extra Cable: 260' 25 65.00 ✓
Ditch & 1 Cable: 250' 75 187.50 ✓
Ditch & 2 Cable: _____
25' Meter Pole: _____
20' Meter Pole: _____
10' Stub Pole: _____
Junction Box: 1 249.00


11785.50 OK
TAX 589.28 ✓
TOTAL \$12374.78 OK 85

7149

N/A

All Construction Completed

JE Heltz
(Signature)

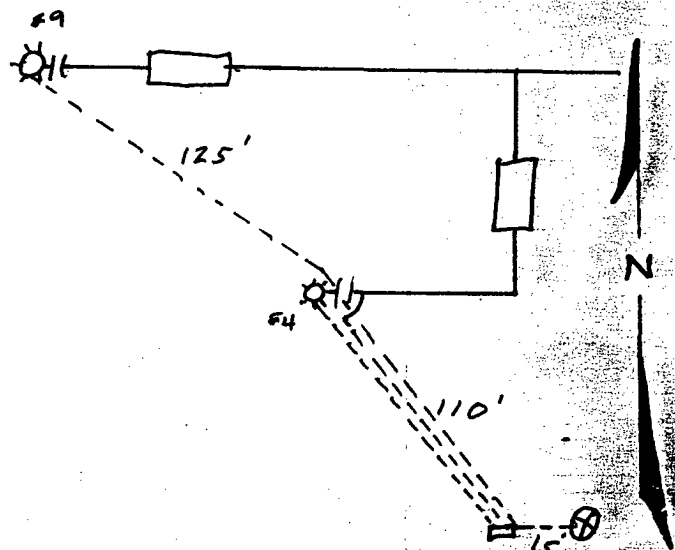

D. CRASS DRILLING CO.

Drill No. 3

2014

DRILLER'S WELL LOG

S. P. No. Tic. 119N #4 Date 10-02-88
Client Meridian Oil Co. Prospect _____
County Rio Arriba State New Mex.

If hole is a redrill or if moved from original staked position show distance
and direction moved: _____

FROM	TO	FORMATION — COLOR — HARDNESS
0	40	shale
40	60	SANDSTONE
60	70	shale
70	130	SANDSTONE
130	140	SAND
140	210	shale
240	230	SANDY shale
230	260	shale
260	280	SANDY shale
280	340	SANDSTONE

Mud _____ Brm _____ Lime _____

Rock Bit Number _____ Make _____

Remarks: DAMP @ 140'

Driller Ronnie Brown