

#69: 30-039-07541
#517: 30-039-24959

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit NE Sec. 25 Twp 29 Rng 7

Name of Well/Wells or Pipeline Serviced SAN JUAN 29-7 UNIT #69, #517
cps 317w

Elevation 6745' Completion Date 9/15/69 Total Depth 350' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 170'

RECEIVED
MAY 31 1991

Depths gas encountered: N/A OIL CON DIS

Type & amount of coke breeze used: 6600 lbs.

Depths anodes placed: 329', 323', 317', 311', 305', 299', 293', 287'

Depths vent pipes placed: 323' OF 3/4" HOSE

Vent pipe perforations: 323'

Remarks: gb #2 PLASTIC MOLD USED TO CAP ANODES. EPOXY POURED ABOVE SHRINK SLEEVE.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

5'18 #209 = 350'

Drilling Log (Attach Hereto) ☒

Completion Date 9-15-69

No 2 GND BED

Well Name 5J. 29-7 # 69		Location NE 25-29-7		CPS No. 317W	
Type & Size Bit Used 7 7/8 - 32131 = 350'		Work Order No. 184-40422-50-20			
Anode Hole Depth 350'	Total Drilling Rig Time 31 Hrs	Total Lbs. Coke Used 6600	Lost Circulation Mat'l Used 0	No. Sacks Mud Used 3	
Anode Depth	# 1 329	# 2 323	# 3 317	# 4 311	# 5 305
Anode Output (Amps)	# 1 3.7	# 2 4.9	# 3 4.9	# 4 3.5	# 5 3.7
Anode Depth	# 6 299	# 7 293	# 8 287	# 9	# 10
Anode Output (Amps)	# 6 4.2	# 7 4.1	# 8 4.0	# 9	# 10
Anode Depth	# 11	# 12	# 13	# 14	# 15
Anode Output (Amps)	# 11	# 12	# 13	# 14	# 15
Total Circuit Resistance	Volts 12.5		Amps 9.5		Ohms 1.31
No. 8 C.P. Cable Used		2784		No. 2 C.P. Cable Used	
20					


Remarks: 3/4" Hosc to No 2 Anode - Perforated All

Plastic Mold used to Cap Anodes -
Epoxy Poured Above Shrink Sleeve

All Construction Completed

Amela
(Signature)

GROUND BED LAYOUT SKETCH

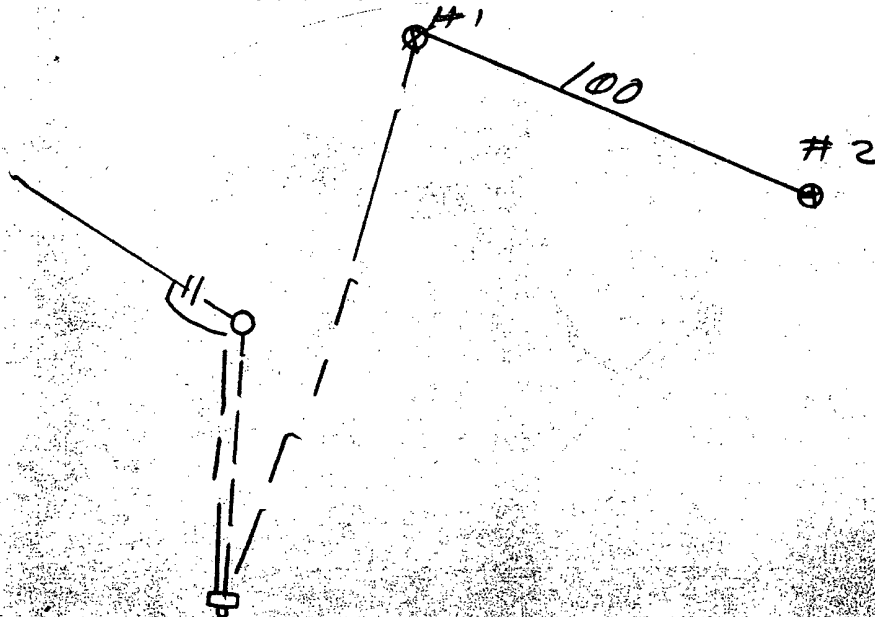

EL PASO NATURAL GAS COMPANY
DRILLING DEPARTMENT

DAILY DRILLING REPORT

WELL NO. 317W CONTRACTOR Menarch Over RIG NO. 146 REPORT NO. 317 DATE 19

MORNING

DAYLIGHT

EVENING

Driller				Total Man In Crew				Driller				Total Man In Crew							
FROM		TO		FORMATION		WT-BIT	R.P.M.	FROM		TO		FORMATION		WT-BIT	R.P.M.				
0	150	25	shale																
100	200	25																	
200	250	shale																	
NO. DC				SIZE				NO. DC				SIZE							
STANDS				SINGLES				STANDS				SINGLES							
DOWN ON KELLY				TOTAL DEPTH				DOWN ON KELLY				TOTAL DEPTH							
MUD RECORD				MUD, ADDITIVES USED AND RECEIVED				MUD RECORD				MUD, ADDITIVES USED AND RECEIVED							
Time		Vis		Time		Vis		Time		Vis		Time		Vis					
TIME BREAKDOWN				TIME BREAKDOWN				TIME BREAKDOWN				TIME BREAKDOWN							
FROM		TO		FROM		TO		FROM		TO		FROM		TO					
9-11-69 - 1 1/2 Hrs				9-12-69 - 9 Hrs				9-13-69 - 6 Hrs				9-14-69 - 11 Hrs				9-15-69 - 3 1/2 Hrs			

REMARKS

REMARKS

REMARKS

9-11-69 - Left old loc. 10am. Moved rigged up on new loc. 11am. Dredged loc. 11am. 9-12-69 - Left old loc. 10am. Moved rigged up on new loc. 11am. Dredged loc. 11am. 9-13-69 - Left old loc. 10am. Moved rigged up on new loc. 11am. Dredged loc. 11am. 9-14-69 - Left old loc. 10am. Moved rigged up on new loc. 11am. Dredged loc. 11am. 9-15-69 - Left old loc. 10am. Moved rigged up on new loc. 11am. Dredged loc. 11am.

SIGNED: Donella