

3467

30-089-24237

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit G Sec. 14 Twp 30 Rng 7

Name of Well/Wells or Pipeline Serviced SAN JUAN 30-6 UNIT #464

cps 2049w

Elevation 6269' Completion Date 10/24/88 Total Depth 500' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 240'

Depths gas encountered: N/A

Type & amount of coke breeze used: N/A

Depths anodes placed: 490', 484', 461', 456', 425', 420', 415', 385', 380', 375'

Depths vent pipes placed: 500'

Vent pipe perforations: 260'

Remarks: gb #1

RECEIVED

MAY 31 1991

OIL CON. DIV
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Comp 10-26-88
Completion Date 10-24-88

Drilling Log (Attach Hereto) ☐


CPS #	Well Name, Line or Plant:	Work Order #	Sector:	Ins. Union Check
2049W	San Juan 30-6#464	3328A	6005 = 26V	☒ Good ☐ Bad
Location: G14-30-7 Anode Size: 2" x 60" Anode Type: Duriron Size Bit: 6 3/4				
Depth Drilled: 500'	Depth Logged: 500'	Drilling Rig Time	Total Lbs. Coke Used	Loss Circulation Mat'l Used
Anode Depth #1 490' #2 484' #3 461' #4 456' #5 425' #6 420' #7 415' #8 385' #9 380' #10 375'				
Anode Output (Amps) #1 2.0 #2 1.7 #3 2.5 #4 2.3 #5 3.2 #6 3.0 #7 2.0 #8 3.3 #9 2.2 #10 3.2				
Anode Depth #11 #12 #13 #14 #15 #16 #17 #18 #19 #20				
Anode Output (Amps) #11 #12 #13 #14 #15 #16 #17 #18 #19 #20				
Total Circuit Resistance		No. 8 C.P. Cable Used		No. 2 C.P. Cable Used
Volts 12.32 Amps 9.5 Ohms 1.29				

Remarks: Water at 240' sample taken. Installed 500' of 1" PVC vent pipe bottom 260 feet perforated. Checked and run final test on anodes next a.m., showed decrease in resistance

GR 4074.00
Rectifier Size: 40 V 16 A 669.00
Addn'l Depth: 0
Depth Credit: 0
Extra Cable: 150' @ .24 36.00
Ditch & 1 Cable: 130' @ .70 91.00
Ditch & 2 Cable: 0
25' Meter Pole: 0
20' Meter Pole: 1 @ 297.00 297.00
10' Stub Pole: 0
Junction Box: 1 @ 225.00 225.00
5392.00
tax 269.60
5661.60 *AK 20*

All Construction Completed

Calvin Rodman
(Signature)

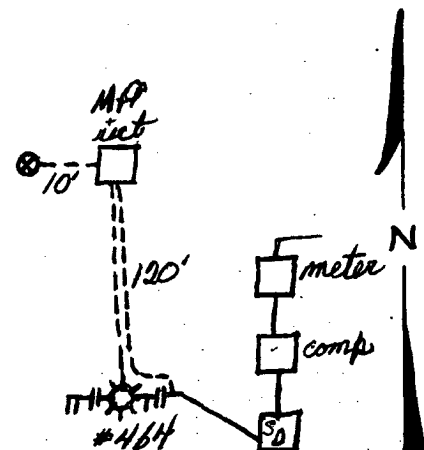

6269