Form 3160-3 (April 2004)

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

ייים ר	OMB No. 1004-0137 Expires March 31, 7007
Luit	5. Lease Serial No.

6. If Indian, Allotee or Tribe Name

nai iv	O.		
	3734	 20	A

APPLICATION FOR PERMIT TO DRILL OR REENTER

		التجحد	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		
la. Type of work: XDRILL REENTE	R	€ 3	7 If Unit or CA Agree	ement, Name and	No.
lb. Type of Well: Oil Well X Gas Well Other	⊠Single Zone	le Zone	8. Lease Name and W Gold 1	Vell No. Medal #91	
Name of Operator Dugan Production Corp.			9. API Well No.	0-045-3	4225
3a. Address 709 East Murray Drive	3b. Phone No. (include area code)		10. Field and Pool, or E		
Farmington, NM 87401	505-325-1821			uitland	
4. Location of Well (Report Invation clearly and in accordance with any	i State requirements.*)		11. Sec., T. R. M. or Bl	•	
Atsurface 1000' FNL & 1000' FEL, Lat. 3	36.27438 N		A Sec. 31, T	24N, R10	W
At proposed prod. zone Same as above Long.	107.93155 W		NMPM		
14. Distance in miles and direction from nearest town or post office*	;		12. County or Parish San Juan	13. St	ate NM
Approx. 35-miles SE of Bloomfield,					. 71'1
15. Distance from proposed* location to nearest	16. No. of acres in lease	•	g Unit dedicated to this w		
property or lease line, ft. (Also to nearest drig, unit line, if any)	1594.4 Acres		2 - 320.0 Acı	res	
18. Distance from proposed location*	19. Proposed Depth		BIA Bond No.		
to nearest well, drilling, completed, Approx. 2250' applied for, on this lease, ft.	1140 Feet	C	on File		
21. Elevations (Show whether DF, KDB, RT, GL, etc.)	22. Approximate date work will start	t*	23. Estimated duration)	
GL-6534'	ASAP		5-Days		
	24. Attachments				
he following, completed in accordance with the requirements of Onshor	e Oil and Gas Order No.1, shall be at	tached to thi	is form:		1
Well plat certified by a registered surveyor.	4. Bond to cover the	e operation	ns unless covered by an	existing bond or	ı file (see
2. A Drilling Plan.	Item 20 above).		-	-	
 A Surface Use Plan (if the location is on National Forest System I SUPO shall be filed with the appropriate Forest Service Office). 		pecific info	ormation and/or plans as	may be required	by the
25. Signature // 2	Name (Printed/Typed)			Date	† 22
Kurttegili	Kurt Fagrel:	ius		March 12	, 2007
Title Geologist					
Approved by (Signisus)	Name (Printed/Typed)			Date 4//-	2/07
Title AEM	Office F-6				
Application approval does not warrant or certify that the applicant holds conduct operations thereon.	s legal or equitable title to those right	s in the sub	ject lease which would er	ntitle the applica	ni to 97077
Conditions of approval if any are attached					/%

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on page 2)

Conditions of approval, if any, are attached

A water based gel-mud will be used to drill surface and production casing hole. Standard 2,000 psi BOP will be used to drill production hole. The Fruitland Coal will be completed from approximately 965' - 990'. The interval will be fracture stimulated.

> This action is subject to technical and procedural review pursuant to 43 CFR 3165.3 and appeal pursuant to 43 CFR 3165.4

DRILLING OPERATIONS AUTHORIZED ARE SUBJECT TO COMPLIANCE WITH ATTACHED "GENERAL REQUIREMENTS".

NOTIFY AZTED OCD 24 HRS. **PRIOR TO CASING & CEMENT**

APR 2007

OIL CONS. DIV. DIST. 3

NMOCD

District I 1625 N. French Dr., Hobbs, NM 88240

State of New Mexico Energy, Minerals & Natural Resources Department

Revised October 12, 2005

Instructions on back Submit to Appropriate District Office State Lease - 4 Copies Fee Lease - 3 Copies

District II 1301 W. Grand Avenue, Artesia, NM BB210 District III 1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe. NM 87505

District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

'API Number

320.0 Acres - (E/2)

277 N/A 12 AM 8: 43

REULI

'Pool Name


AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATEON PLAT

*Popl Code

12 Dedicated Acres		•			19 Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.	·	
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
						f Different			
Α	31	24N	10W		1000	NORTH	1000	EAST	SAN JUAN
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
				;	¹⁰ Surface	Location			-
00651	.5			DUGAN	PRODUCTIO	UCTION CORPORATION 6534			
'OGRID N	_	*Operator Name				9	*Elevation		
3693	3		GOLD MEDAL					91	
Property	1				*Property			*W	ell Number
30-045	- 34	225		71629		ВА	SIN FRUITL	AND COAL	

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

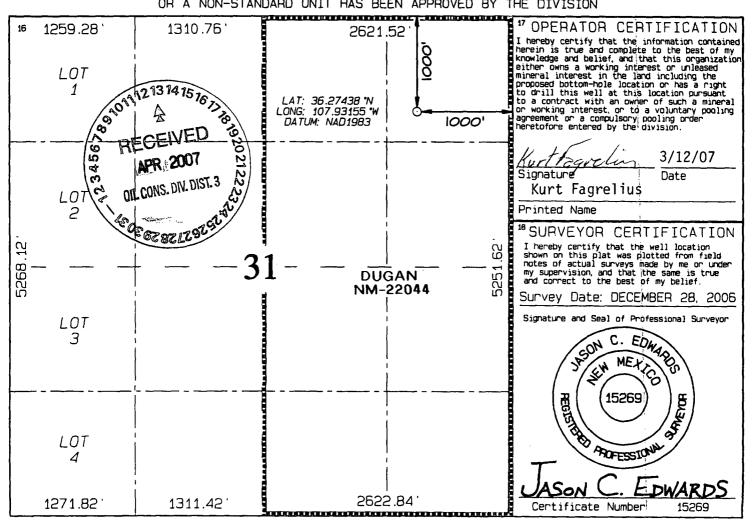

Submit 3 Copies To Appropriate District Office	State of New Mexico	Form C-103
District I	Energy, Minerals and Natural Resources	WELL API NO. 2/10.2
1625 N. French Dr., Hobbs, NM 88240 District II	ow conformation purison	WELL API NO. 30-045-34225
1301 W. Grand Ave., Artesia, NM 88210	OIL CONSERVATION DIVISION	5. Indicate Type of Lease Federal XX
District III 1000 Rio Brazos Rd., Aztec, NM 87410	1220 South St. Francis Dr.	STATE FEE
District IV 1220 S. St. Francis Dr., Santa Fe, NM	Santa Fe, NM 87505	6. State Oil & Gas Lease No.
87505		Federal NM-22044
	S AND REPORTS ON WELLS	7. Lease Name or Unit Agreement Name
	S TO DRILL OR TO DEEPEN OR PLUG BACK TO A ION FOR PERMIT" (FORM C-101) FOR SUCH	Gold Medal
PROPOSALS.)		8. Well Number 91
1. Type of Well: Oil Well Ga 2. Name of Operator	s Well X Other	9. OGRID Number
Dugan Pro	oduction Corp.	9. OGRAD (Valitibel) 006515
3. Address of Operator	Murray Drive, Farmington, NM 87401	10. Pool name or Wildcat
	Muliay blive, raimington, Nr 57401	Basin Fruitland Coal
4. Well Location		
1	1000 feet from the <u>north</u> line and 1	
Section 31	Township 24N Range 10W	NMPM County San Juan
1	1. Elevation (Show whether DR, RKB, RT, GR, etc. GL-6534	
Pit or Below-grade Tank Application X or Cl		
	+100 Distance from nearest fresh water well +1000 Dis	tance from nearest surface water 200'
Pit Liner Thickness: 12 mil		onstruction Material Synthetic
	propriate Box to Indicate Nature of Notice,	Report or Other Data
12. Check ripp	or indicate rating of rionee,	Report of Other Bata
NOTICE OF INTE		SEQUENT REPORT OF:
· · · · · · · · · · · · · · · · · · ·	PLUG AND ABANDON REMEDIAL WOR CHANGE PLANS COMMENCE DR	
	MULTIPLE COMPL CASING/CEMEN	
OTHER: Reserve pit for dril	ling (lined) 🗵 OTHER:	
of starting any proposed work)	d operations. (Clearly state all pertinent details, an . SEE RULE 1103. For Multiple Completions: A	d give pertinent dates, including estimated date
or recompletion.	. OBB ROBB 1103. Tol Manaple Completions. At	addition we mode diagram of proposed completion
•	•	
A water based gel mud	will be used to drill surface and pr	roduction casing hole.
Standard 2,000 psi BOI	will be used to drill production ha	ole. The Fruitland Coal
will be completed from	a approximately 965' - 990'. The in	terval will be fracture
stimulated.		
		•
* *		
d.		
Thoraby partification that the information of	ye in true and complete to the back of Co. 1	Latine value
grade tank has been/will be constructed or clos	ve is true and complete to the best of my knowledged according to NMOCD guidelines ☒, a general permit ☐	e and belief. I further certify that any pit or below- or an (attached) alternative OCD-approved plan .
11 +	/5	
SIGNATURE / Communication Kurt Fagrelius	TITLE Geologist kfagrelius@duganproduct	DATE 3/12/2007 ion.com 505-325-1821
Type or print name	E-mail address:	Telephone No.
For State Use Only	\mathcal{I}	-
1! <i>L</i> .	-1	ልነጋር 1 ለ ሳስብ

APPROVED BY: Conditions of Approval (if any):

THE OL & GAS INSPECTOR, DIST. 63

_DATE_APR 1 6 2007

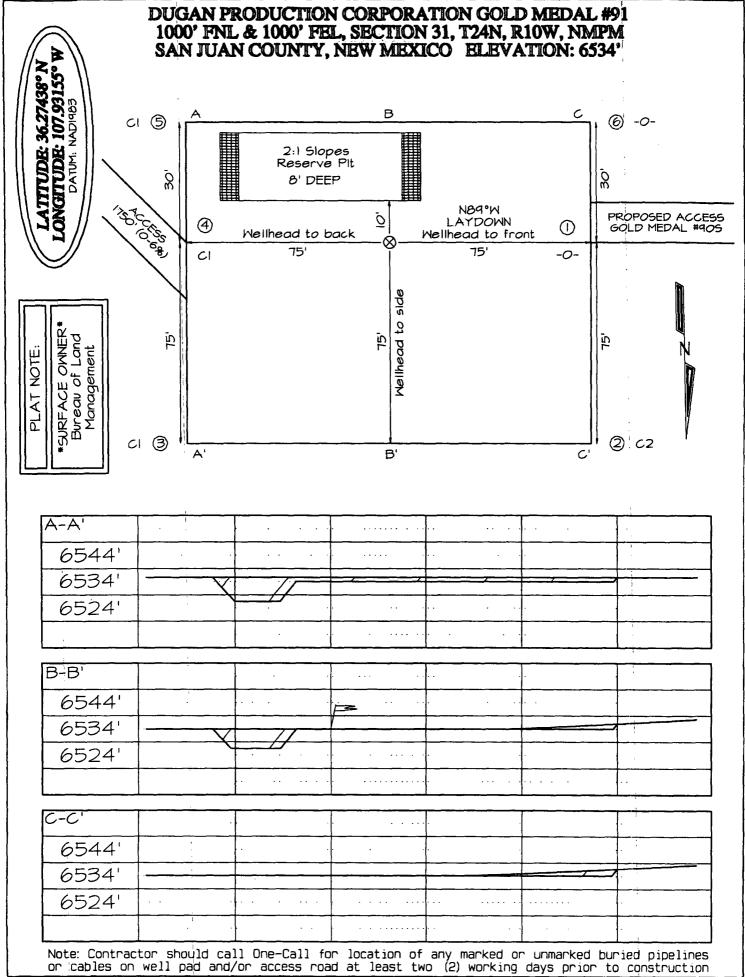


EXHIBIT B OPERATIONS PLAN Gold Medal #91

APPROXIMATE FORMATION TOPS:

Total Depth	1140′
Pictured Cliffs	995′
Fruitland	625′
Kirtland	220′
Ojo Alamo	150′

Catch samples every 10 feet from 850 feet to total depth,

LOGGING PROGRAM:

Run cased hole GR-CCL-CNL from total depth to surface.

CASING PROGRAM:

Hole	Casing		Setting	Grade and
Size	Size	Wt./ft.	Depth	Condition
12-1/4"	8-5/8"	24#	120′	J-55
7"	5-1/2"	14#	1140′	J-55

Plan to drill a 12-1/4" hole and set 120' of 8-5/8" OD, 24#, J-55 surface casing. Then plan to drill a 7" hole to total depth with gel-water mud program to test the Fruitland Coal. 5-1/2", 14#, J-55 production casing will be run and cemented. Cased hole GR-CCL-CNL log will be run. Productive zone will be perforated and fractured. After frac, the well will be cleaned out and production equipment will be installed.

CEMENTING PROGRAM:

Surface: Cement to surface with 70 cf Class B + 2% CaCl₂.

Circulate to surface.

Production Stage-Cement with 110 cf 2%lodense with

%# celloflake/sx followed by 75 cf Class "B" with

%# celloflake/sx.

Total cement slurry for production stage is 185 cf

Circulate cement to surface.

An adequate spacer will be pumped ahead of the cement slurry to help prevent mud contamination of the cement. An adequate number of casing centralizers will be run through usable water zones to ensure that casing is centralized through these zones. The adequate number of centralizers will be determined based on

API standards. Centralizers to impart a swirling action around the casing will be used just below and into the base of the lowest usable water zone. These devices will assist mud displacement, increase cement bonding potential and create an effective hydraulic seal. A chronological log will be kept which records the pump rate, pump pressure, slurry density, and slurry volume for the cement job. The log will be sent to the BLM after completion of the job.

WELLHEAD EQUIPMENT:

Huber 8-5/8"x5-1/2" casing head, 1000# WP, tested to 2000#. Huber 5-1/2"x2-7/8" tubing head, 1000# WP, tested to 2000#.

BOP and Related Equipment will include for a 2000 psi system: (Exhibit D)

Annular preventer, double ram, or 2 rams with one being blind and one being a pipe ram.

Kill line (2" minimum)

- 1 kill line valve (2" minimum)
- 1 choke line valve
- 2 chokes

Upper kelly cock valve with handle available Safety valve and subs to fit all drill string connections in use.

Pressure gauge on choke manifold.


2" minimum choke line.


Fill-up line.

Contacts:

Dugan Prod.Corp. Office & Radio Dispatch: 325-1821

Mark Brown	327-3632 320-8247	(H) (M)
Kurt Fagrelius	325-4327 320-8248	
John Alexander	325-6927 320-1935	

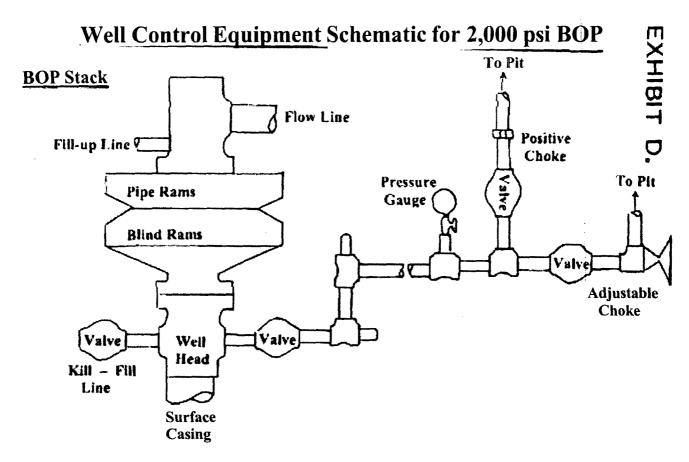

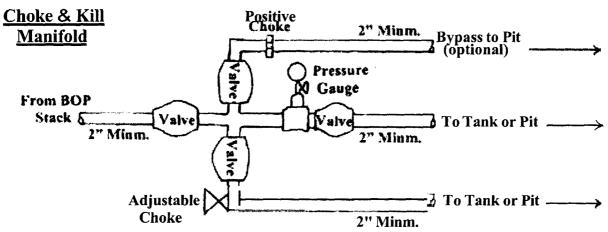

Working Pressure for all equipment is 2,000 psi or greater

DUGAN PRODUCTION CORP.

GOLD MEDAL #91