

Form 3160-3  
(June 2015)FORM APPROVED  
OMB No. 1004-0137  
Expires: January 31, 2018UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
**APPLICATION FOR PERMIT TO DRILL OR REENTER**

|                                                                                                                                                   |                                       |                                               |
|---------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------------------|
| 1a. Type of work: <input type="checkbox"/> DRILL <input type="checkbox"/> REENTER                                                                 |                                       | 5. Lease Serial No.                           |
| 1b. Type of Well: <input type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other                              |                                       | 6. If Indian, Allottee or Tribe Name          |
| 1c. Type of Completion: <input type="checkbox"/> Hydraulic Fracturing <input type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone |                                       | 7. If Unit or CA Agreement, Name and No.      |
| 2. Name of Operator                                                                                                                               |                                       | 8. Lease Name and Well No.                    |
| 3a. Address                                                                                                                                       |                                       | 9. API Well No.<br><b>30-015-57178</b>        |
| 3b. Phone No. (include area code)                                                                                                                 |                                       | 10. Field and Pool, or Exploratory            |
| 4. Location of Well (Report location clearly and in accordance with any State requirements. *)<br>At surface<br>At proposed prod. zone            |                                       | 11. Sec., T. R. M. or Blk. and Survey or Area |
| 14. Distance in miles and direction from nearest town or post office*                                                                             |                                       | 12. County or Parish                          |
|                                                                                                                                                   |                                       | 13. State                                     |
| 15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any)                             | 16. No of acres in lease              | 17. Spacing Unit dedicated to this well       |
| 18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft.                                        | 19. Proposed Depth                    | 20. BLM/BIA Bond No. in file                  |
| 21. Elevations (Show whether DF, KDB, RT, GL, etc.)                                                                                               | 22. Approximate date work will start* | 23. Estimated duration                        |
| 24. Attachments                                                                                                                                   |                                       |                                               |

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- |                                                                                                                                                |                                                                                                 |
|------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| 1. Well plat certified by a registered surveyor.                                                                                               | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan.                                                                                                                            | 5. Operator certification.                                                                      |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be requested by the BLM.            |

|                         |                      |      |
|-------------------------|----------------------|------|
| 25. Signature           | Name (Printed/Typed) | Date |
| Title                   |                      |      |
| Approved by (Signature) | Name (Printed/Typed) | Date |
| Title                   |                      |      |
| Office                  |                      |      |

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.  
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\*Per 19.15.14.9 NMAC, OXY USA Inc. certifies no addition of PFAS chemicals to fluids used in the completion of recompletion of the subject well.



(Continued on page 2)

\*(Instructions on page 2)

## Additional Operator Remarks

### Location of Well

0. SHL: NENE / 992 FNL / 1102 FEL / TWSP: 25S / RANGE: 29E / SECTION: 12 / LAT: 32.149294 / LONG: -103.932991 ( TVD: 0 feet, MD: 0 feet )

PPP: NWNE / 100 FNL / 1700 FEL / TWSP: 25S / RANGE: 29E / SECTION: 12 / LAT: 32.151735 / LONG: -103.934929 ( TVD: 11228 feet, MD: 11650 feet )

PPP: NWNE / 0 FNL / 1696 FEL / TWSP: 25S / RANGE: 29E / SECTION: 13 / LAT: 32.137415 / LONG: -103.934904 ( TVD: 11228 feet, MD: 16333 feet )

BHL: SWSE / 20 FSL / 1700 FEL / TWSP: 25S / RANGE: 29E / SECTION: 13 / LAT: 32.122851 / LONG: -103.934878 ( TVD: 11228 feet, MD: 21634 feet )

### BLM Point of Contact

Name: TENILLE C MOLINA

Title: Land Law Examiner

Phone: (575) 234-2224

Email: TCMOLINA@BLM.GOV

|                                                          |                                                                                                     |                      |                                                       |
|----------------------------------------------------------|-----------------------------------------------------------------------------------------------------|----------------------|-------------------------------------------------------|
| C-102<br><br>Submit Electronically<br>Via OCD Permitting | State of New Mexico<br>Energy, Minerals & Natural Resources Department<br>OIL CONSERVATION DIVISION | Revised July 9, 2024 |                                                       |
|                                                          |                                                                                                     | Submittal<br>Type:   | <input checked="" type="checkbox"/> Initial Submittal |
|                                                          |                                                                                                     |                      | <input type="checkbox"/> Amended Report               |
|                                                          |                                                                                                     |                      | <input type="checkbox"/> As Drilled                   |

## WELL LOCATION INFORMATION

|                                                                                                                                                        |                                             |                                                                                                                                                                   |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| API Number<br>30-015-57178                                                                                                                             | Pool Code<br>98220                          | Pool Name<br><b>PURPLE SAGE; WOLFCAMP</b>                                                                                                                         |
| Property Code<br><b>328295</b>                                                                                                                         | Property Name<br>CORRAL GORGE 12-13 FED COM | Well Number<br>53H                                                                                                                                                |
| OGRID No.<br>16696                                                                                                                                     | Operator Name<br>OXY USA INC.               | Ground Level Elevation<br>3146.5'                                                                                                                                 |
| Surface Owner: <input checked="" type="checkbox"/> State <input type="checkbox"/> Fee <input type="checkbox"/> Tribal <input type="checkbox"/> Federal |                                             | Mineral Owner: <input checked="" type="checkbox"/> State <input type="checkbox"/> Fee <input type="checkbox"/> Tribal <input checked="" type="checkbox"/> Federal |

## Surface Location

|         |               |                 |              |     |                           |                            |                                 |                                    |                |
|---------|---------------|-----------------|--------------|-----|---------------------------|----------------------------|---------------------------------|------------------------------------|----------------|
| UL<br>A | Section<br>12 | Township<br>25S | Range<br>29E | Lot | Ft. from N/S<br>992 NORTH | Ft. from E/W<br>1,102 EAST | Latitude (NAD 83)<br>32.149294° | Longitude (NAD 83)<br>-103.932991° | County<br>EDDY |
|---------|---------------|-----------------|--------------|-----|---------------------------|----------------------------|---------------------------------|------------------------------------|----------------|

## Bottom Hole Location

|         |               |                 |              |     |                          |                           |                                 |                                    |                |
|---------|---------------|-----------------|--------------|-----|--------------------------|---------------------------|---------------------------------|------------------------------------|----------------|
| UL<br>O | Section<br>13 | Township<br>25S | Range<br>29E | Lot | Ft. from N/S<br>20 SOUTH | Ft. from E/W<br>1700 EAST | Latitude (NAD 83)<br>32.122851° | Longitude (NAD 83)<br>-103.934878° | County<br>EDDY |
|---------|---------------|-----------------|--------------|-----|--------------------------|---------------------------|---------------------------------|------------------------------------|----------------|

|                        |                                          |                                                                                                    |                                             |                                 |
|------------------------|------------------------------------------|----------------------------------------------------------------------------------------------------|---------------------------------------------|---------------------------------|
| Dedicated Acres<br>640 | Infill or Defining Well<br><b>INFILL</b> | Defining Well API<br><b>30-015-47207</b>                                                           | Overlapping Spacing Unit (Y/N)<br><b>NO</b> | Consolidation Code<br><b>NA</b> |
| Order Numbers.         |                                          | Well setbacks are under Common Ownership: <input type="checkbox"/> Yes <input type="checkbox"/> No |                                             |                                 |

## Kick Off Point (KOP)

|         |               |                 |              |     |                          |                           |                                 |                                    |                |
|---------|---------------|-----------------|--------------|-----|--------------------------|---------------------------|---------------------------------|------------------------------------|----------------|
| UL<br>B | Section<br>12 | Township<br>25S | Range<br>29E | Lot | Ft. from N/S<br>50 NORTH | Ft. from E/W<br>1700 EAST | Latitude (NAD 83)<br>32.151873° | Longitude (NAD 83)<br>-103.934929° | County<br>EDDY |
|---------|---------------|-----------------|--------------|-----|--------------------------|---------------------------|---------------------------------|------------------------------------|----------------|

## First Take Point (FTP)

|         |               |                 |              |     |                           |                           |                                 |                                    |                |
|---------|---------------|-----------------|--------------|-----|---------------------------|---------------------------|---------------------------------|------------------------------------|----------------|
| UL<br>B | Section<br>12 | Township<br>25S | Range<br>29E | Lot | Ft. from N/S<br>100 NORTH | Ft. from E/W<br>1700 EAST | Latitude (NAD 83)<br>32.151735° | Longitude (NAD 83)<br>-103.934929° | County<br>EDDY |
|---------|---------------|-----------------|--------------|-----|---------------------------|---------------------------|---------------------------------|------------------------------------|----------------|

## Last Take Point (LTP)


|         |               |                 |              |     |                           |                           |                                 |                                    |                |
|---------|---------------|-----------------|--------------|-----|---------------------------|---------------------------|---------------------------------|------------------------------------|----------------|
| UL<br>O | Section<br>13 | Township<br>25S | Range<br>29E | Lot | Ft. from N/S<br>100 SOUTH | Ft. from E/W<br>1700 EAST | Latitude (NAD 83)<br>32.123071° | Longitude (NAD 83)<br>-103.934879° | County<br>EDDY |
|---------|---------------|-----------------|--------------|-----|---------------------------|---------------------------|---------------------------------|------------------------------------|----------------|

|                                                        |                                                                                                    |                         |
|--------------------------------------------------------|----------------------------------------------------------------------------------------------------|-------------------------|
| Unitized Area or Area of Uniform Interest<br><b>NA</b> | Spacing Unit Type <input checked="" type="checkbox"/> Horizontal <input type="checkbox"/> Vertical | Ground Floor Elevation: |
|--------------------------------------------------------|----------------------------------------------------------------------------------------------------|-------------------------|

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>OPERATOR CERTIFICATIONS</b><br><br><i>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and, if the well is a vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.</i><br><br><i>If this well is a horizontal well, I further certify that this organization has received the consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division.</i><br><br><i>Leslie T. Reeves</i> 4/30/2025<br><br>Signature _____ Date _____<br><b>LESLIE REEVES</b><br><br>Printed Name _____<br><b>LESLIE_REEVES@OXY.COM</b><br><br>Email Address _____ | <b>SURVEYOR CERTIFICATIONS</b><br><br><i>I hereby certify that the well location shown on this plat was plotted from the field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</i><br><br><br><br>Signature and Seal of Professional Surveyor _____<br>23782 August 10, 2023<br><br>Certificate Number _____ Date of Survey _____ |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Note: No allowable will be assigned to this completion until all interest have been consolidated or a non-standard unit has been approved by the division.

|                                             |                    |                           |                                                      |
|---------------------------------------------|--------------------|---------------------------|------------------------------------------------------|
| Property Name<br>CORRAL GORGE 12-13 FED COM | Well Number<br>53H | Drawn By<br>Z.L. 08-21-23 | Revised By<br>REV. 3 T.I.R. 03-28-25 (UPDATE FORMAT) |
|---------------------------------------------|--------------------|---------------------------|------------------------------------------------------|


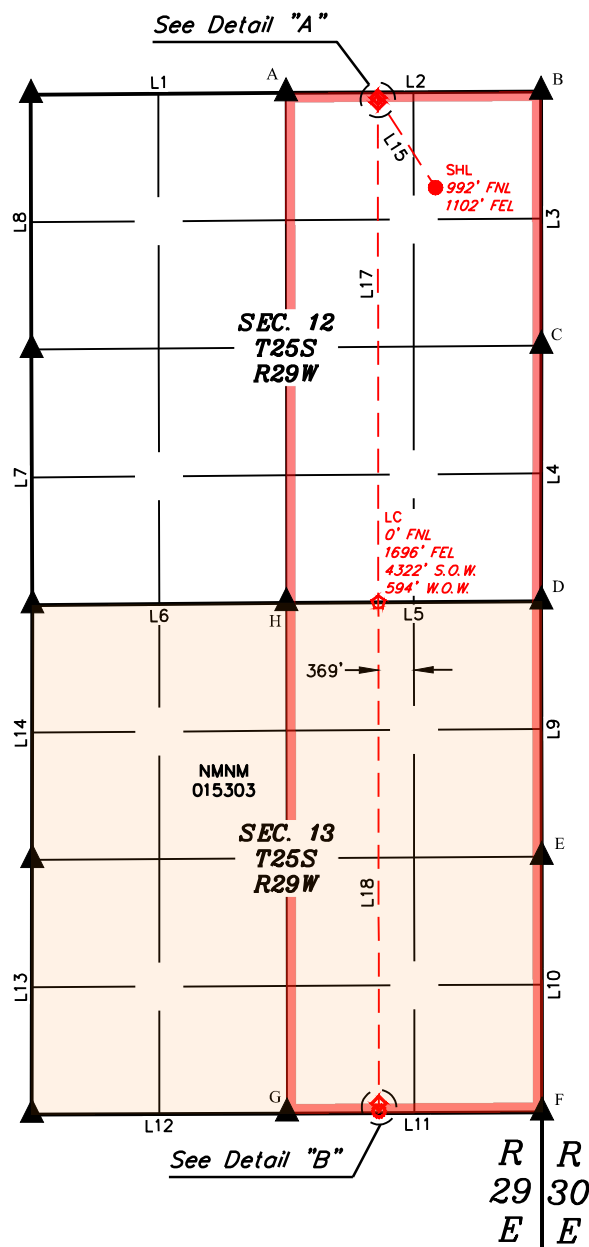


## NOTE:

- Distances referenced on plat to section lines are perpendicular.
- Basis of Bearings is a Transverse Mercator Projection with a Central Meridian of W103°53'00" (NAD 83)
- Colored areas within section lines represent Federal oil & gas leases.

| HSU COORDINATES |                                    |            |                                    |            |
|-----------------|------------------------------------|------------|------------------------------------|------------|
|                 | NAD 27 N.M. STATE PLANE, EAST ZONE |            | NAD 83 N.M. STATE PLANE, EAST ZONE |            |
| POINT           | NORTHING                           | EASTING    | NORTHING                           | EASTING    |
| A               | 419196.70'                         | 622491.58' | 419255.09'                         | 663676.24' |
| B               | 419223.60'                         | 625149.05' | 419281.99'                         | 666333.73' |
| C               | 416577.29'                         | 625163.70' | 416635.62'                         | 666348.45' |
| D               | 413914.95'                         | 625172.81' | 413973.23'                         | 666357.64' |
| E               | 411254.49'                         | 625188.92' | 411312.71'                         | 666373.83' |
| F               | 408594.25'                         | 625204.05' | 408652.42'                         | 666389.03' |
| G               | 408570.70'                         | 622546.39' | 408628.87'                         | 663731.34' |
| H               | 413886.77'                         | 622518.99' | 413945.05'                         | 663703.80' |

- = SURFACE HOLE LOCATION
- ◆ = KICK OFF POINT/FIRST TAKE POINT/LAST TAKE POINT
- ☆ = LEASE CROSSING
- = BOTTOM HOLE LOCATION
- ▲ = SECTION CORNER LOCATED
- = HORIZONTAL SPACING UNIT
- S.O.W. = SOUTH OF WELL
- W.O.W. = WEST OF WELL



| LINE TABLE |             |          |
|------------|-------------|----------|
| LINE       | DIRECTION   | LENGTH   |
| L1         | S89°37'24"W | 2657.23' |
| L2         | S89°39'34"W | 2658.17' |
| L3         | N00°04'46"W | 2646.95' |
| L4         | N00°02'30"E | 2662.95' |
| L5         | S89°37'52"W | 2654.54' |
| L6         | S89°30'00"W | 2646.75' |
| L7         | N00°10'06"W | 2662.50' |
| L8         | N00°10'27"W | 2654.36' |
| L9         | N00°06'33"W | 2661.12' |
| L10        | N00°05'17"W | 2660.88' |
| L11        | S89°43'54"W | 2658.35' |
| L12        | S89°43'46"W | 2657.66' |
| L13        | N00°03'31"E | 2654.12' |
| L14        | N00°03'48"E | 2652.67' |
| L15        | N32°34'13"W | 1113.62' |
| L16        | S00°04'46"E | 50.00'   |
| L17        | S00°03'30"E | 5210.73' |
| L18        | S00°03'30"E | 5219.03' |
| L19        | S00°05'17"E | 80.00'   |

| NAD 83 (SURFACE HOLE LOCATION)            |  |
|-------------------------------------------|--|
| LATITUDE = 32°08'57.46" (32.149294°)      |  |
| LONGITUDE = -103°55'58.77" (-103.932991°) |  |
| NAD 27 (SURFACE HOLE LOCATION)            |  |
| LATITUDE = 32°08'57.01" (32.149171°)      |  |
| LONGITUDE = -103°55'57.02" (-103.932507°) |  |
| STATE PLANE NAD 83 (N.M. EAST)            |  |
| N: 418279.02' E: 665237.71'               |  |
| STATE PLANE NAD 27 (N.M. EAST)            |  |
| N: 418220.65' E: 624053.02'               |  |


| NAD 83 (KICK OFF POINT)                   |  |
|-------------------------------------------|--|
| LATITUDE = 32°09'06.74" (32.151873°)      |  |
| LONGITUDE = -103°56'05.75" (-103.934929°) |  |
| NAD 27 (KICK OFF POINT)                   |  |
| LATITUDE = 32°09'06.30" (32.151749°)      |  |
| LONGITUDE = -103°56'04.00" (-103.934445°) |  |
| STATE PLANE NAD 83 (N.M. EAST)            |  |
| N: 419214.80' E: 664634.42'               |  |
| STATE PLANE NAD 27 (N.M. EAST)            |  |
| N: 419156.41' E: 623449.76'               |  |

| NAD 83 (FIRST TAKE POINT)                 |  |
|-------------------------------------------|--|
| LATITUDE = 32°09'06.25" (32.151735°)      |  |
| LONGITUDE = -103°56'04.00" (-103.934444°) |  |
| NAD 27 (FIRST TAKE POINT)                 |  |
| LATITUDE = 32°09'05.80" (32.151612°)      |  |
| LONGITUDE = -103°56'04.00" (-103.934444°) |  |
| STATE PLANE NAD 83 (N.M. EAST)            |  |
| N: 419164.81' E: 664634.70'               |  |
| STATE PLANE NAD 27 (N.M. EAST)            |  |
| N: 419106.42' E: 623450.04'               |  |

| NAD 83 (LEASE CROSSING)                   |  |
|-------------------------------------------|--|
| LATITUDE = 32°08'14.69" (32.137415°)      |  |
| LONGITUDE = -103°56'05.65" (-103.934904°) |  |
| NAD 27 (LEASE CROSSING)                   |  |
| LATITUDE = 32°08'14.25" (32.137291°)      |  |
| LONGITUDE = -103°56'03.91" (-103.934420°) |  |
| STATE PLANE NAD 83 (N.M. EAST)            |  |
| N: 413955.22' E: 664661.77'               |  |
| STATE PLANE NAD 27 (N.M. EAST)            |  |
| N: 413896.94' E: 623476.96'               |  |



| NAD 83 (LAST TAKE POINT)                  |  |
|-------------------------------------------|--|
| LATITUDE = 32°07'23.06" (32.123071°)      |  |
| LONGITUDE = -103°56'05.56" (-103.934879°) |  |
| NAD 27 (LAST TAKE POINT)                  |  |
| LATITUDE = 32°07'22.61" (32.122947°)      |  |
| LONGITUDE = -103°56'03.82" (-103.934395°) |  |
| STATE PLANE NAD 83 (N.M. EAST)            |  |
| N: 408737.34' E: 664688.87'               |  |
| STATE PLANE NAD 27 (N.M. EAST)            |  |
| N: 408679.17' E: 623503.91'               |  |

| NAD 83 (BOTTOM HOLE LOCATION)             |  |
|-------------------------------------------|--|
| LATITUDE = 32°07'22.26" (32.122851°)      |  |
| LONGITUDE = -103°56'05.56" (-103.934878°) |  |
| NAD 27 (BOTTOM HOLE LOCATION)             |  |
| LATITUDE = 32°07'21.82" (32.122727°)      |  |
| LONGITUDE = -103°56'03.82" (-103.934394°) |  |
| STATE PLANE NAD 83 (N.M. EAST)            |  |
| N: 408657.35' E: 664689.33'               |  |
| STATE PLANE NAD 27 (N.M. EAST)            |  |
| N: 408599.19' E: 623504.37'               |  |



SCALE



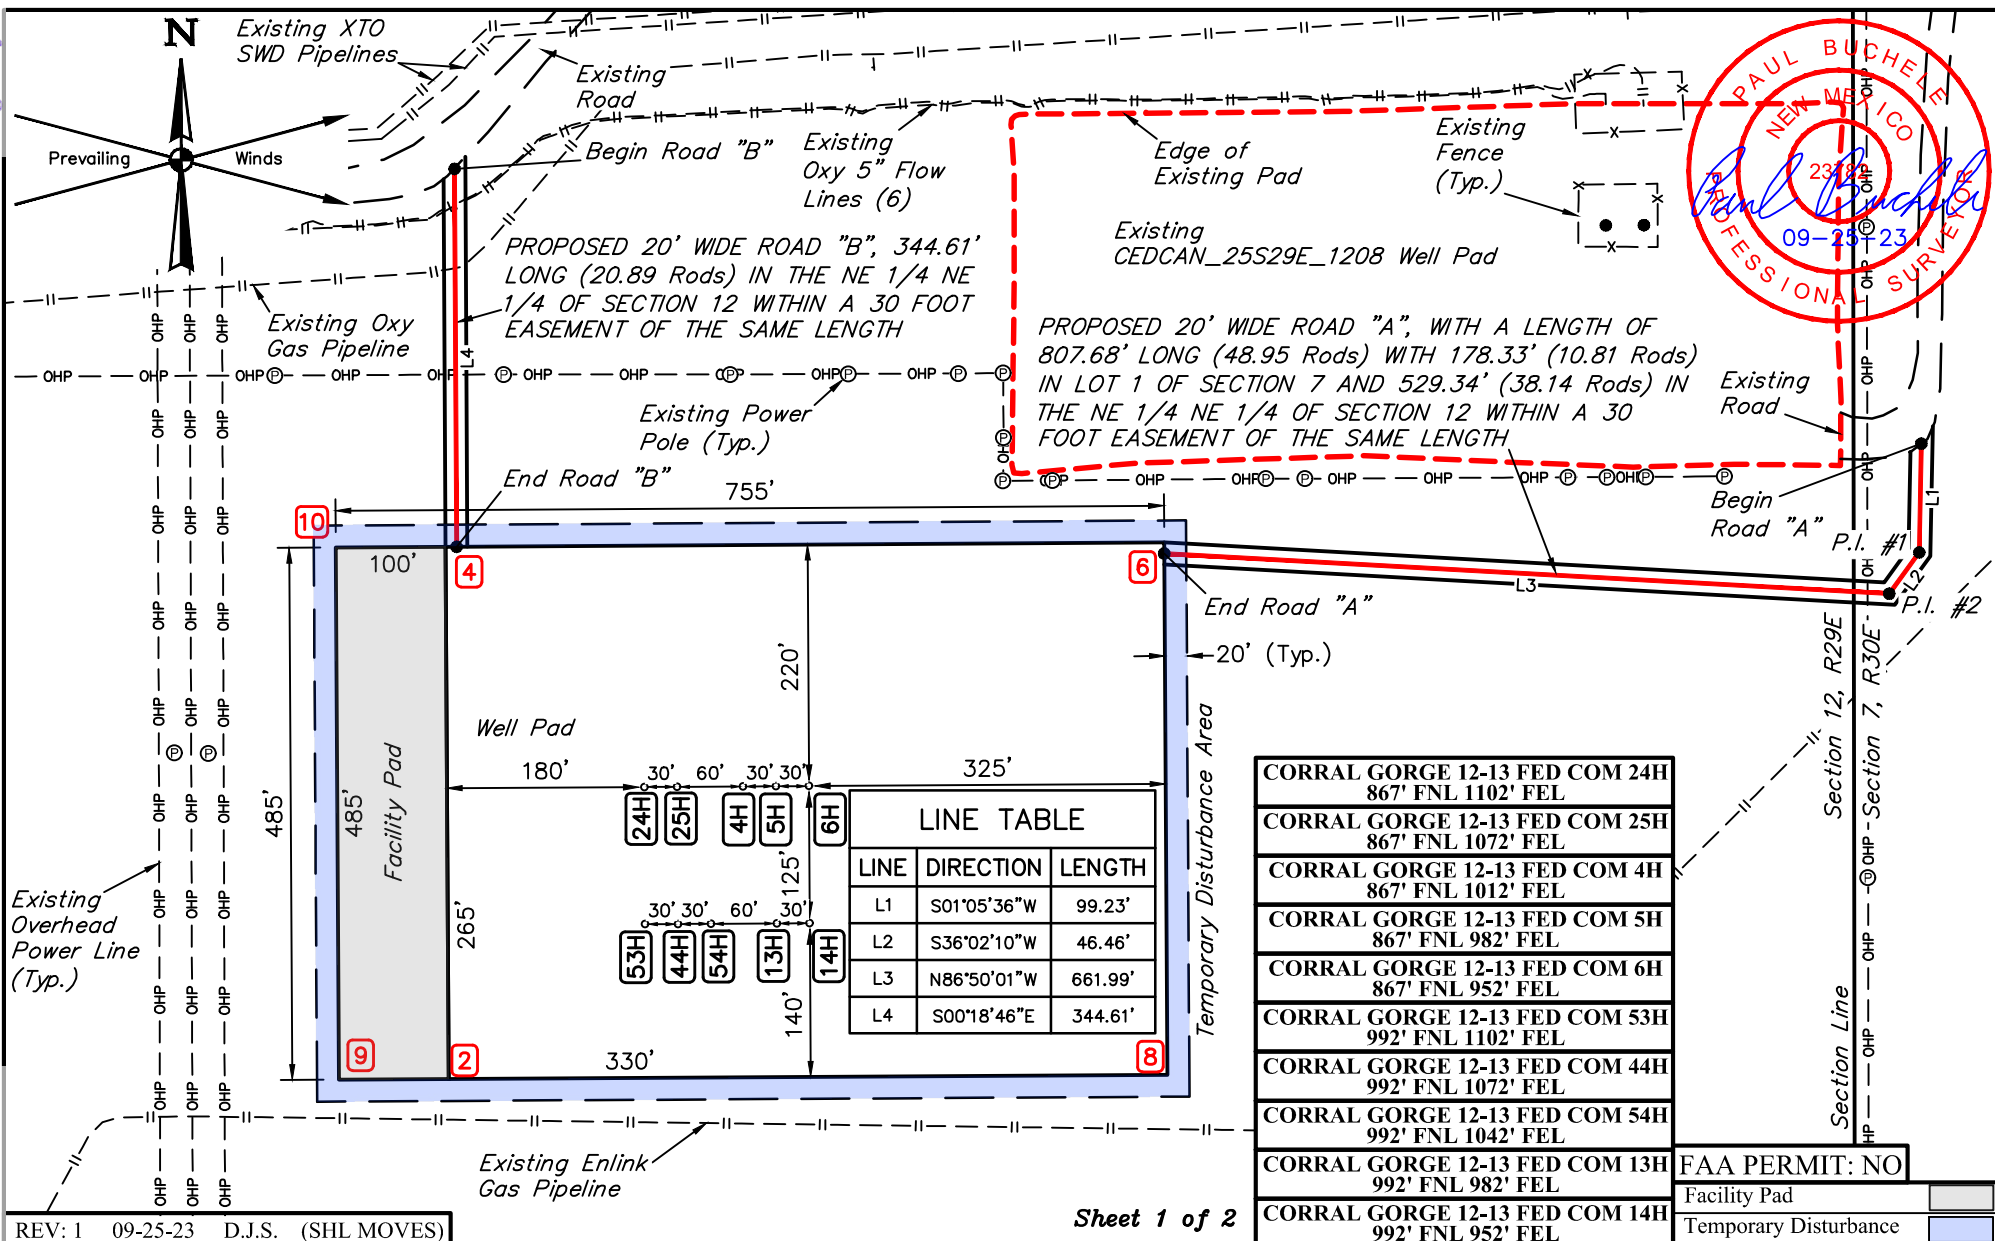

|                                |                    |
|--------------------------------|--------------------|
| CORRAL GORGE 12-13 FED COM 24H | 867' FNL 1102' FEL |
| CORRAL GORGE 12-13 FED COM 25H | 867' FNL 1072' FEL |
| CORRAL GORGE 12-13 FED COM 4H  | 867' FNL 1012' FEL |
| CORRAL GORGE 12-13 FED COM 5H  | 867' FNL 982' FEL  |
| CORRAL GORGE 12-13 FED COM 6H  | 867' FNL 952' FEL  |
| CORRAL GORGE 12-13 FED COM 53H | 992' FNL 1102' FEL |
| CORRAL GORGE 12-13 FED COM 44H | 992' FNL 1072' FEL |
| CORRAL GORGE 12-13 FED COM 54H | 992' FNL 1042' FEL |
| CORRAL GORGE 12-13 FED COM 13H | 992' FNL 982' FEL  |
| CORRAL GORGE 12-13 FED COM 14H | 992' FNL 952' FEL  |

|                       |
|-----------------------|
| FAA PERMIT: NO        |
| Facility Pad          |
| Temporary Disturbance |

REV: 1 09-25-23 D.J.S. (SHL MOVES)

Sheet 1 of 2

**OXY USA INC.**


**CEDCAN 25S29E 1207**  
**NE 1/4 NE 1/4, SECTION 12, T25S, R29E, N.M.P.M.**  
**EDDY COUNTY, NEW MEXICO**

|                  |            |          |           |
|------------------|------------|----------|-----------|
| SURVEYED BY      | C.T., K.H. | 08-10-23 | SCALE     |
| DRAWN BY         | Z.L.       | 08-21-23 | 1" = 175' |
| <b>SITE PLAN</b> |            |          |           |



**UELS, LLC**  
 Corporate Office \* 85 South 200 East  
 Vernal, UT 84078 \* (435) 789-1017

|                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                      |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>24H - EL: 3147.4'</b><br><b>NAD 83</b><br>LATITUDE = 32°08'58.70" (32.149638°)<br>LONGITUDE = -103°55'58.78" (-103.932994°)<br><b>NAD 27</b><br>LATITUDE = 32°08'58.25" (32.149514°)<br>LONGITUDE = -103°55'57.03" (-103.932509°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418403.99' E: 665236.45'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418345.62' E: 624051.76'             | <b>25H - EL: 3147.5'</b><br><b>NAD 83</b><br>LATITUDE = 32°08'58.70" (32.149638°)<br>LONGITUDE = -103°55'58.43" (-103.932897°)<br><b>NAD 27</b><br>LATITUDE = 32°08'58.25" (32.149515°)<br>LONGITUDE = -103°55'56.68" (-103.932412°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418404.29' E: 665266.44'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418345.92' E: 624081.75'               | <b>4H - EL: 3147.6'</b><br><b>NAD 83</b><br>LATITUDE = 32°08'58.70" (32.149639°)<br>LONGITUDE = -103°55'57.73" (-103.932703°)<br><b>NAD 27</b><br>LATITUDE = 32°08'58.26" (32.149516°)<br>LONGITUDE = -103°55'55.99" (-103.932218°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418404.90' E: 665326.43'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418346.53' E: 624141.73'                | <b>5H - EL: 3147.7'</b><br><b>NAD 83</b><br>LATITUDE = 32°08'58.70" (32.149640°)<br>LONGITUDE = -103°55'57.38" (-103.932606°)<br><b>NAD 27</b><br>LATITUDE = 32°08'58.26" (32.149516°)<br>LONGITUDE = -103°55'55.64" (-103.932122°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418405.20' E: 665356.42'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418346.83' E: 624171.73'                | <b>6H - EL: 3147.4'</b><br><b>NAD 83</b><br>LATITUDE = 32°08'58.71" (32.149640°)<br>LONGITUDE = -103°55'57.03" (-103.932509°)<br><b>NAD 27</b><br>LATITUDE = 32°08'58.26" (32.149517°)<br>LONGITUDE = -103°55'55.29" (-103.932025°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418405.51' E: 665386.41'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418347.13' E: 624201.72'  |
| <b>53H - EL: 3146.5'</b><br><b>NAD 83</b><br>LATITUDE = 32°08'57.46" (32.149294°)<br>LONGITUDE = -103°55'58.77" (-103.932991°)<br><b>NAD 27</b><br>LATITUDE = 32°08'57.01" (32.149171°)<br>LONGITUDE = -103°55'57.02" (-103.932507°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418279.02' E: 665237.71'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418220.65' E: 624053.02'             | <b>44H - EL: 3146.6'</b><br><b>NAD 83</b><br>LATITUDE = 32°08'57.46" (32.149295°)<br>LONGITUDE = -103°55'58.42" (-103.932894°)<br><b>NAD 27</b><br>LATITUDE = 32°08'57.02" (32.149171°)<br>LONGITUDE = -103°55'56.67" (-103.932410°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418279.32' E: 665267.71'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418220.95' E: 624083.01'               | <b>54H - EL: 3146.5'</b><br><b>NAD 83</b><br>LATITUDE = 32°08'57.46" (32.149295°)<br>LONGITUDE = -103°55'58.07" (-103.932797°)<br><b>NAD 27</b><br>LATITUDE = 32°08'57.02" (32.149172°)<br>LONGITUDE = -103°55'56.33" (-103.932313°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418279.63' E: 665297.70'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418221.26' E: 624113.00'               | <b>13H - EL: 3146.8'</b><br><b>NAD 83</b><br>LATITUDE = 32°08'57.47" (32.149296°)<br>LONGITUDE = -103°55'57.37" (-103.932604°)<br><b>NAD 27</b><br>LATITUDE = 32°08'57.02" (32.149173°)<br>LONGITUDE = -103°55'55.63" (-103.932119°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418280.24' E: 665357.68'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418221.87' E: 624172.99'               | <b>14H - EL: 3147.1'</b><br><b>NAD 83</b><br>LATITUDE = 32°08'57.47" (32.149297°)<br>LONGITUDE = -103°55'57.02" (-103.932507°)<br><b>NAD 27</b><br>LATITUDE = 32°08'57.02" (32.149173°)<br>LONGITUDE = -103°55'55.28" (-103.932022°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418280.54' E: 665387.68'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418222.17' E: 624202.98' |
| <b>2 - EL: 3144.2'</b><br><b>NAD 83</b><br>LATITUDE = 32°08'56.06" (32.148906°)<br>LONGITUDE = -103°56'00.85" (-103.933570°)<br><b>NAD 27</b><br>LATITUDE = 32°08'55.62" (32.148783°)<br>LONGITUDE = -103°55'59.11" (-103.933085°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418137.24' E: 665059.18'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418078.87' E: 623874.48'               | <b>4 - EL: 3148.4'</b><br><b>NAD 83</b><br>LATITUDE = 32°09'00.86" (32.150239°)<br>LONGITUDE = -103°56'00.89" (-103.933580°)<br><b>NAD 27</b><br>LATITUDE = 32°09'00.42" (32.150116°)<br>LONGITUDE = -103°55'59.14" (-103.933095°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418622.11' E: 665054.27'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418563.73' E: 623869.59'                 | <b>6 - EL: 3155.3'</b><br><b>NAD 83</b><br>LATITUDE = 32°09'00.90" (32.150251°)<br>LONGITUDE = -103°55'53.27" (-103.931464°)<br><b>NAD 27</b><br>LATITUDE = 32°09'00.46" (32.150127°)<br>LONGITUDE = -103°55'51.53" (-103.930979°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418628.74' E: 665709.10'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418570.36' E: 624524.41'                 | <b>8 - EL: 3150.2'</b><br><b>NAD 83</b><br>LATITUDE = 32°08'56.10" (32.148918°)<br>LONGITUDE = -103°55'53.23" (-103.931454°)<br><b>NAD 27</b><br>LATITUDE = 32°08'55.66" (32.148794°)<br>LONGITUDE = -103°55'51.49" (-103.930969°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418143.86' E: 665714.01'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418085.50' E: 624529.31'                 | <b>9 - EL: 3145.0'</b><br><b>NAD 83</b><br>LATITUDE = 32°08'56.06" (32.148905°)<br>LONGITUDE = -103°56'02.01" (-103.933893°)<br><b>NAD 27</b><br>LATITUDE = 32°08'55.61" (32.148781°)<br>LONGITUDE = -103°56'00.27" (-103.933408°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418136.22' E: 664959.20'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418077.86' E: 623774.51'   |
| <b>10 - EL: 3144.7'</b><br><b>NAD 83</b><br>LATITUDE = 32°09'00.86" (32.150238°)<br>LONGITUDE = -103°55'02.05" (-103.933903°)<br><b>NAD 27</b><br>LATITUDE = 32°09'00.41" (32.150114°)<br>LONGITUDE = -103°56'00.31" (-103.933418°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418621.10' E: 664954.30'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418562.72' E: 623769.61'              | <b>BEGIN ACCESS ROAD "A" - 3165.8'</b><br><b>NAD 83</b><br>LATITUDE = 32°09'01.80" (32.150500°)<br>LONGITUDE = -103°55'45.24" (-103.929234°)<br><b>NAD 27</b><br>LATITUDE = 32°09'01.35" (32.150376°)<br>LONGITUDE = -103°55'43.50" (-103.928750°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418721.87' E: 666398.84'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418663.49' E: 625214.14' | <b>PI #1 ACCESS ROAD "A" - 3162.7'</b><br><b>NAD 83</b><br>LATITUDE = 32°09'00.82" (32.150227°)<br>LONGITUDE = -103°55'45.26" (-103.929240°)<br><b>NAD 27</b><br>LATITUDE = 32°09'00.37" (32.150103°)<br>LONGITUDE = -103°55'43.52" (-103.928756°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418622.66' E: 666397.36'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418564.29' E: 625212.66' | <b>PI #2 ACCESS ROAD "A" - 3161.6'</b><br><b>NAD 83</b><br>LATITUDE = 32°09'00.45" (32.150124°)<br>LONGITUDE = -103°55'45.58" (-103.929328°)<br><b>NAD 27</b><br>LATITUDE = 32°09'00.00" (32.150000°)<br>LONGITUDE = -103°55'43.84" (-103.928844°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418584.99' E: 666370.19'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418526.62' E: 625185.49' |                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>END ACCESS ROAD "A" - 3155.3'</b><br><b>NAD 83</b><br>LATITUDE = 32°09'00.80" (32.150223°)<br>LONGITUDE = -103°55'53.27" (-103.931464°)<br><b>NAD 27</b><br>LATITUDE = 32°09'00.36" (32.150100°)<br>LONGITUDE = -103°55'51.52" (-103.930979°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418618.79' E: 665709.20'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418560.41' E: 624524.51' | <b>BEGIN ACCESS ROAD "B" - 3139.1'</b><br><b>NAD 83</b><br>LATITUDE = 32°09'04.27" (32.151187°)<br>LONGITUDE = -103°56'00.79" (-103.933554°)<br><b>NAD 27</b><br>LATITUDE = 32°09'03.83" (32.151063°)<br>LONGITUDE = -103°55'59.05" (-103.933069°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418966.73' E: 665060.95'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418908.35' E: 623876.27' | <b>END ACCESS ROAD "B" - 3148.5'</b><br><b>NAD 83</b><br>LATITUDE = 32°09'00.86" (32.150239°)<br>LONGITUDE = -103°56'00.77" (-103.933548°)<br><b>NAD 27</b><br>LATITUDE = 32°09'00.42" (32.150116°)<br>LONGITUDE = -103°55'59.03" (-103.933063°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418622.21' E: 665064.27'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418563.83' E: 623879.58'   |                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                      |



Sheet 2 of 2

REV: 1 09-25-23 D.J.S. (SHL MOVES)

**NOTES:**

- Underground utilities shown on this sheet are for visualization purposes only, actual locations to be determined prior to construction.
- Basis of Bearings is a Transverse Mercator Projection with a Central Meridian of W103°53'00" (NAD 83)



**UELS, LLC**  
 Corporate Office \* 85 South 200 East  
 Vernal, UT 84078 \* (435) 789-1017

|                    |            |          |              |
|--------------------|------------|----------|--------------|
| <b>SURVEYED BY</b> | C.T., K.H. | 08-10-23 | <b>SCALE</b> |
| <b>DRAWN BY</b>    | Z.L.       | 08-21-23 | N/A          |
| <b>SITE PLAN</b>   |            |          |              |

**CEDCAN 25S29E 1207**  
**NE 1/4 NE 1/4, SECTION 12, T25S, R29E, N.M.P.M.**  
**EDDY COUNTY, NEW MEXICO**

State of New Mexico  
Energy, Minerals and Natural Resources Department

Submit Electronically  
Via E-permitting

Oil Conservation Division  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

## NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

### Section 1 – Plan Description

Effective May 25, 2021

**I. Operator:** OXY USA INC. **OGRID:** 16696 **Date:** 0 4/ 2 5/ 2 5

**II. Type:** ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: \_\_\_\_\_

**III. Well(s):** Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

| Well Name    | API | ULSTR | Footages | Anticipated Oil BBL/D | Anticipated Gas MCF/D | Anticipated Produced Water BBL/D |
|--------------|-----|-------|----------|-----------------------|-----------------------|----------------------------------|
| SEE ATTACHED |     |       |          |                       |                       |                                  |
|              |     |       |          |                       |                       |                                  |

**IV. Central Delivery Point Name:** CORRAL GORGE CTB [See 19.15.27.9(D)(1) NMAC]

**V. Anticipated Schedule:** Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

| Well Name    | API | Spud Date | TD Reached Date | Completion Commencement Date | Initial Flow Back Date | First Production Date |
|--------------|-----|-----------|-----------------|------------------------------|------------------------|-----------------------|
| SEE ATTACHED |     |           |                 |                              |                        |                       |
|              |     |           |                 |                              |                        |                       |

**VI. Separation Equipment:** ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

**VII. Operational Practices:** ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

**VIII. Best Management Practices:** ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

## **Section 2 – Enhanced Plan**

### **EFFECTIVE APRIL 1, 2022**

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

#### **IX. Anticipated Natural Gas Production:**

| Well | API | Anticipated Average Natural Gas Rate MCF/D | Anticipated Volume of Natural Gas for the First Year MCF |
|------|-----|--------------------------------------------|----------------------------------------------------------|
|      |     |                                            |                                                          |
|      |     |                                            |                                                          |

#### **X. Natural Gas Gathering System (NGGS):**

| Operator | System | ULSTR of Tie-in | Anticipated Gathering Start Date | Available Maximum Daily Capacity of System Segment Tie-in |
|----------|--------|-----------------|----------------------------------|-----------------------------------------------------------|
|          |        |                 |                                  |                                                           |
|          |        |                 |                                  |                                                           |

**XI. Map.** ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

**XII. Line Capacity.** The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

**XIII. Line Pressure.** Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

**XIV. Confidentiality:** ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

### **Section 3 - Certifications**

**Effective May 25, 2021**

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

***If Operator checks this box, Operator will select one of the following:***

**Well Shut-In.** ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

**Venting and Flaring Plan.** ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

### **Section 4 - Notices**

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

Page 8

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

|                                                                                                  |
|--------------------------------------------------------------------------------------------------|
| Signature: <i>Melissa Guidry</i>                                                                 |
| Printed Name: Melissa Guidry                                                                     |
| Title: Regulatory Advisor Sr.                                                                    |
| E-mail Address: melissa_guidry@oxy.com                                                           |
| Date: 04/25/25                                                                                   |
| Phone: 713-497-2481                                                                              |
| <b>OIL CONSERVATION DIVISION</b><br><b>(Only applicable when submitted as a standalone form)</b> |
| Approved By:                                                                                     |
| Title:                                                                                           |
| Approval Date:                                                                                   |
| Conditions of Approval:                                                                          |

## III. Well(s)

| Well Name                      | API     | WELL LOCATION (ULSTR) | Footages           | ANTICIPATED OIL BBL/D | ANTICIPATED GAS MCF/D | ANTICIPATED PROD WATER BBL/D |
|--------------------------------|---------|-----------------------|--------------------|-----------------------|-----------------------|------------------------------|
| CORRAL GORGE 12_13 FED COM 41H | Pending | C-12-25S-29E          | 960' FNL 1444' FWL | 1012                  | 9500                  | 3700                         |
| CORRAL GORGE 12_13 FED COM 42H | Pending | C-12-25S-29E          | 960' FNL 1504' FWL | 1012                  | 9500                  | 3700                         |
| CORRAL GORGE 12_13 FED COM 43H | Pending | B-12-25S-29E          | 668' FNL 2396' FEL | 1012                  | 9500                  | 3700                         |
| CORRAL GORGE 12_13 FED COM 44H | Pending | A-12-25S-29E          | 992' FNL 1072' FEL | 1012                  | 9500                  | 3700                         |
| CORRAL GORGE 12_13 FED COM 51H | Pending | C-12-25S-29E          | 960' FNL 1474' FWL | 1012                  | 9500                  | 3700                         |
| CORRAL GORGE 12_13 FED COM 52H | Pending | B-12-25S-29E          | 668' FNL 2426' FEL | 1012                  | 9500                  | 3700                         |
| CORRAL GORGE 12_13 FED COM 53H | Pending | A-12-25S-29E          | 992' FNL 1102' FEL | 1012                  | 9500                  | 3700                         |
| CORRAL GORGE 12_13 FED COM 54H | Pending | A-12-25S-29E          | 992' FNL 1042' FEL | 1012                  | 9500                  | 3700                         |



## V. Anticipated Schedule

| Well Name                      | API     | Spud Date  | TD Reached Date | Completion Commencement Date | Initial Flow Back Date | First Production Date |
|--------------------------------|---------|------------|-----------------|------------------------------|------------------------|-----------------------|
| CORRAL GORGE 12_13 FED COM 41H | Pending | 04/29/2026 | 07/03/2026      | 08/06/2026                   | 09/01/2026             | 09/06/2026            |
| CORRAL GORGE 12_13 FED COM 42H | Pending | 05/04/2026 | 06/23/2026      | 08/06/2026                   | 08/30/2026             | 09/06/2026            |
| CORRAL GORGE 12_13 FED COM 43H | Pending | 04/26/2026 | 07/01/2026      | 08/03/2026                   | 08/29/2026             | 09/05/2026            |
| CORRAL GORGE 12_13 FED COM 44H | Pending | 05/02/2026 | 06/20/2026      | 08/03/2026                   | 08/27/2026             | 09/05/2026            |
| CORRAL GORGE 12_13 FED COM 51H | Pending | 05/10/2026 | 06/12/2026      | 08/06/2026                   | 09/02/2026             | 09/06/2026            |
| CORRAL GORGE 12_13 FED COM 52H | Pending | 05/15/2026 | 06/01/2026      | 08/06/2026                   | 08/28/2026             | 09/06/2026            |
| CORRAL GORGE 12_13 FED COM 53H | Pending | 05/07/2026 | 06/10/2026      | 08/03/2026                   | 09/01/2026             | 09/05/2026            |
| CORRAL GORGE 12_13 FED COM 54H | Pending | 05/13/2026 | 05/30/2026      | 08/03/2026                   | 08/31/2026             | 09/05/2026            |

Central Delivery Point Name : Corral Gorge CTB

**Part VI. Separation Equipment**

Operator will size the flowback separator to handle 5,000 Bbls of fluid and 9 -10 MMscfd which is more than the expected peak rates for these wells. Each separator is rated to 1440 psig, and pressure control valves and automated communication will cause the wells to shut in in the event of an upset at the facility, therefore no gas will be flared on pad during an upset. Current Oxy practices avoid use of flare or venting on pad, therefore if there is an upset or emergency condition at the facility, the wells will immediately shut down, and reassume production once the condition has cleared.

## **VII. Operational Practices**

### **Gathering System and Pipeline Notification**

Well(s) will be connected to a production facility after flowback operations are complete, where a gas transporter system is in place. The gas produced from the production facility is sent to ETC Texas Pipeline, LTD ("ETC") and Enterprise Field Services, LLC ("Enterprise") via the Oxy gas network. This network is connected to Enterprise and ETC high pressure gathering systems located in Eddy County, New Mexico. Produced gas is compressed by OXY USA INC. ("OXY") to the appropriate pressures for each gathering system. OXY provides (periodically) to ETC and Enterprise a drilling, completion and estimated first production date for wells that are scheduled to be drilled in the foreseeable future. In addition, OXY has periodic conference calls with these Midstream companies to discuss changes to drilling and completion schedules. Gas from these wells will be processed at the following plants:

Orla Plant Processing Plant located in Sec. 35, Block 57, T2, T&P RR CO, Reeves, County, Texas.

OXY USA WTP LP Processing Plant located in Sec. 23, Twn. 21S, Rng. 23E, Eddy County, New Mexico.

### **Flowback Strategy**

After the fracture treatment/completion operations, well(s) will be produced to temporary production tanks and gas will be flared or vented. During flowback, the fluids and sand content will be monitored. When the produced fluids contain minimal sand, the wells will be turned to production facilities. Gas sales should start as soon as the wells start flowing through the production facilities, unless there are operational issues on Enterprise system at that time. Based on current information, it is OXY's belief the system can take this gas upon completion of the well(s).

Safety requirements during cleanout operations from the use of underbalanced air cleanout systems may necessitate that sand and non-pipeline quality gas be vented and/or flared rather than sold on a temporary basis.

### **VIII. Best Management Practices**

#### **Alternatives to Reduce Flaring**

Below are alternatives considered from a conceptual standpoint to reduce the amount of gas flared.

##### **Power Generation – On lease**

Only a portion of gas is consumed operating the generator, remainder of gas will be flared


##### **Compressed Natural Gas – On lease**

Gas flared would be minimal, but might be uneconomical to operate when gas volume declines


##### **NGL Removal – On lease**

Plants are expensive, residue gas is still flared, and uneconomical to operate when gas volume declines

|          | SOUTH BONESPRING |             |
|----------|------------------|-------------|
|          | Oil (bbl/d)      | Gas (mcf/d) |
| Jan-2024 | 1,250            | 5,135       |
| Feb-2024 | 1,184            | 6,041       |
| Mar-2024 | 933              | 5,849       |
| Apr-2024 | 670              | 5,349       |
| May-2024 | 517              | 4,893       |
| Jun-2024 | 421              | 4,401       |
| Jul-2024 | 355              | 3,994       |
| Aug-2024 | 306              | 3,652       |
| Sep-2024 | 270              | 3,368       |
| Oct-2024 | 240              | 3,125       |
| Nov-2024 | 217              | 2,915       |
| Dec-2024 | 197              | 2,731       |
| Jan-2025 | 181              | 2,566       |
| Feb-2025 | 167              | 2,426       |
| Mar-2025 | 155              | 2,301       |
| Apr-2025 | 145              | 2,184       |
| May-2025 | 136              | 2,078       |
| Jun-2025 | 127              | 1,982       |
| Jul-2025 | 120              | 1,894       |
| Aug-2025 | 114              | 1,812       |
| Sep-2025 | 108              | 1,739       |
| Oct-2025 | 102              | 1,670       |
| Nov-2025 | 98               | 1,607       |
| Dec-2025 | 93               | 1,549       |
| Jan-2026 | 89               | 1,493       |
| Feb-2026 | 85               | 1,444       |
| Mar-2026 | 82               | 1,398       |
| Apr-2026 | 79               | 1,353       |
| May-2026 | 76               | 1,311       |
| Jun-2026 | 73               | 1,271       |
| Jul-2026 | 71               | 1,234       |
| Aug-2026 | 68               | 1,198       |
| Sep-2026 | 66               | 1,165       |
| Oct-2026 | 64               | 1,133       |
| Nov-2026 | 62               | 1,104       |
| Dec-2026 | 60               | 1,075       |

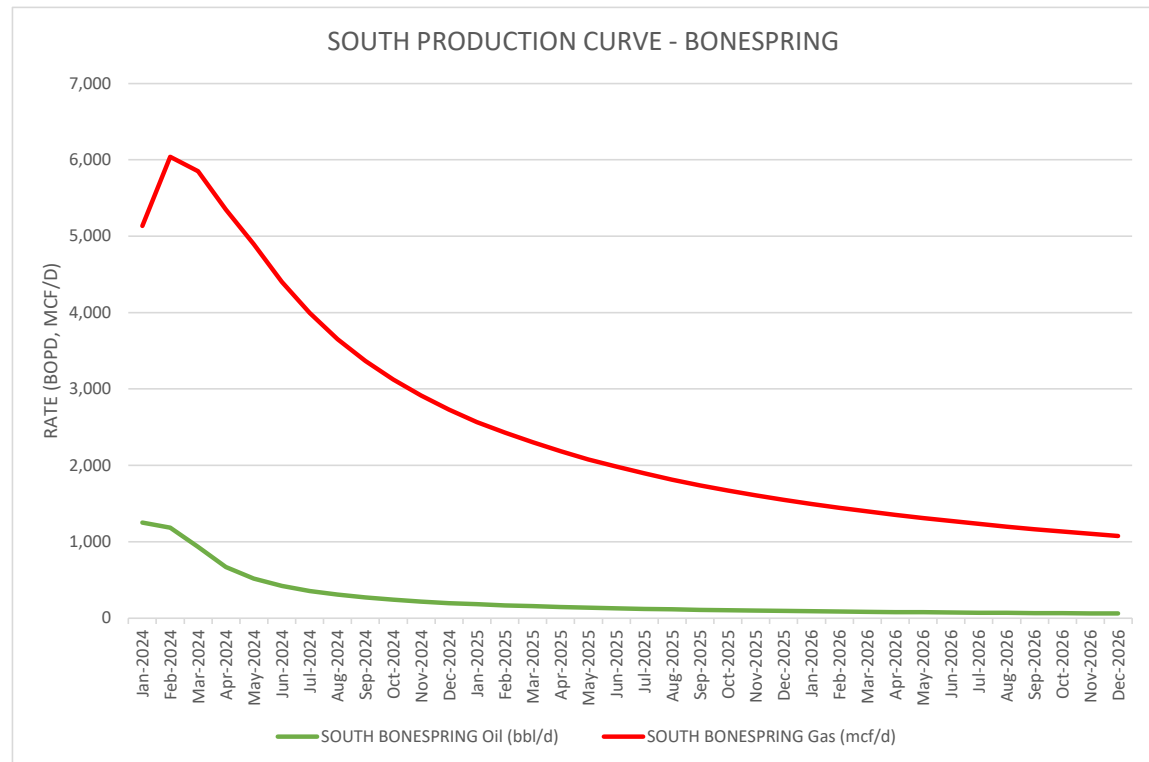

|          | SOUTH WOLFCAMP |             |
|----------|----------------|-------------|
|          | Oil (bbl/d)    | Gas (mcf/d) |
| Jan-2024 | 1,178          | 8,636       |
| Feb-2024 | 995            | 8,951       |
| Mar-2024 | 706            | 7,614       |
| Apr-2024 | 544            | 6,588       |
| May-2024 | 445            | 5,841       |
| Jun-2024 | 377            | 5,261       |
| Jul-2024 | 328            | 4,794       |
| Aug-2024 | 291            | 4,402       |
| Sep-2024 | 261            | 4,076       |
| Oct-2024 | 238            | 3,797       |
| Nov-2024 | 218            | 3,555       |
| Dec-2024 | 201            | 3,343       |
| Jan-2025 | 187            | 3,152       |
| Feb-2025 | 175            | 2,990       |
| Mar-2025 | 165            | 2,844       |
| Apr-2025 | 156            | 2,708       |
| May-2025 | 148            | 2,584       |
| Jun-2025 | 140            | 2,471       |
| Jul-2025 | 133            | 2,368       |
| Aug-2025 | 127            | 2,272       |
| Sep-2025 | 122            | 2,184       |
| Oct-2025 | 117            | 2,104       |
| Nov-2025 | 112            | 2,029       |
| Dec-2025 | 108            | 1,959       |
| Jan-2026 | 104            | 1,893       |
| Feb-2026 | 101            | 1,834       |
| Mar-2026 | 97             | 1,778       |
| Apr-2026 | 94             | 1,725       |
| May-2026 | 91             | 1,674       |
| Jun-2026 | 89             | 1,626       |
| Jul-2026 | 86             | 1,581       |
| Aug-2026 | 84             | 1,538       |
| Sep-2026 | 81             | 1,498       |
| Oct-2026 | 79             | 1,460       |
| Nov-2026 | 77             | 1,423       |
| Dec-2026 | 75             | 1,389       |

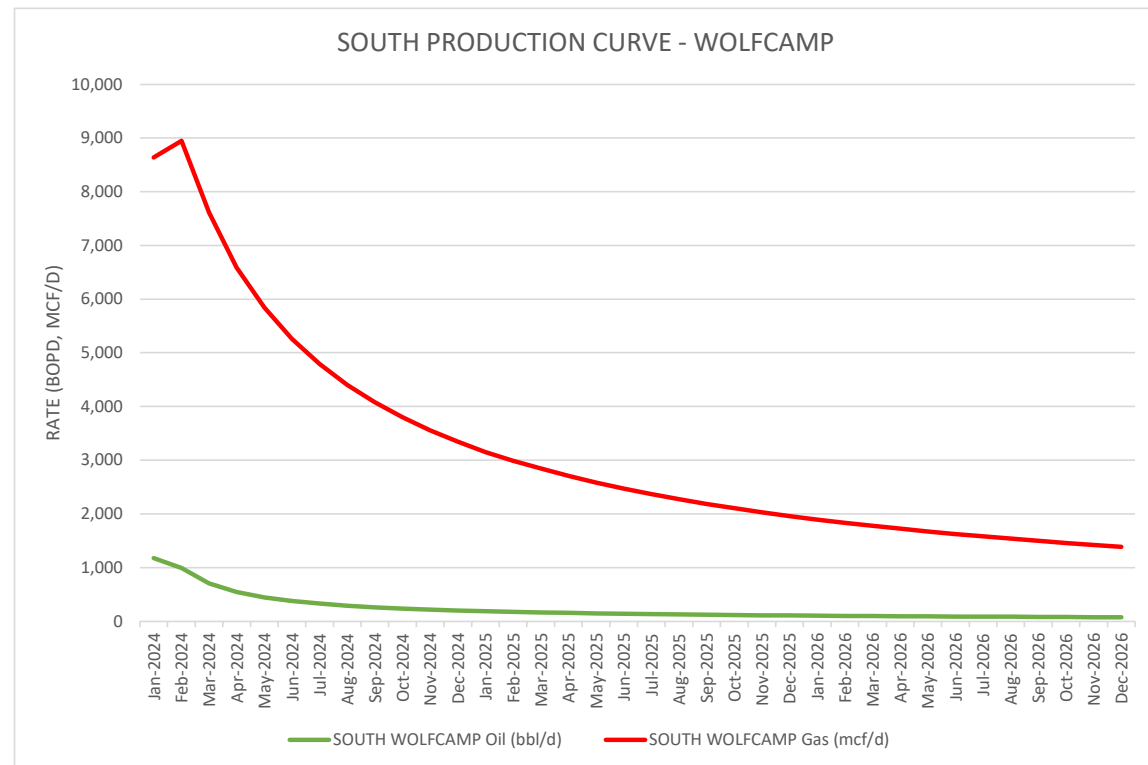

# Oxy USA Inc. - CORRAL GORGE 12-13 FED COM 53H

## Drill Plan

### 1. Geologic Formations

|                            |       |                                    |     |
|----------------------------|-------|------------------------------------|-----|
| TVD of Target (ft):        | 11228 | Pilot Hole Depth (ft):             |     |
| Total Measured Depth (ft): | 21634 | Deepest Expected Fresh Water (ft): | 427 |

### Delaware Basin

| Formation       | MD-RKB (ft) | TVD-RKB (ft) | Expected Fluids |
|-----------------|-------------|--------------|-----------------|
| Rustler         | 427         | 427          |                 |
| Salado          | 854         | 854          | Salt            |
| Castile         | 1818        | 1818         | Salt            |
| Delaware        | 3371        | 3371         | Oil/Gas/Brine   |
| Bell Canyon     | 3374        | 3374         | Oil/Gas/Brine   |
| Cherry Canyon   | 4285        | 4285         | Oil/Gas/Brine   |
| Brushy Canyon   | 5630        | 5615         | Losses          |
| Bone Spring     | 7189        | 7151         | Oil/Gas         |
| Bone Spring 1st | 8162        | 8109         | Oil/Gas         |
| Bone Spring 2nd | 9026        | 8960         | Oil/Gas         |
| Bone Spring 3rd | 10113       | 10030        | Oil/Gas         |
| Wolfcamp        | 10446       | 10358        | Oil/Gas         |
| Penn            |             |              | Oil/Gas         |
| Strawn          |             |              | Oil/Gas         |

\*H2S, water flows, loss of circulation, abnormal pressures, etc.

### 2. Casing Program

| Section      | Hole Size (in) | MD        |         | TVD       |         | Csg. OD (in) | Csg Wt. (ppf) | Grade   | Conn.     |
|--------------|----------------|-----------|---------|-----------|---------|--------------|---------------|---------|-----------|
|              |                | From (ft) | To (ft) | From (ft) | To (ft) |              |               |         |           |
| Surface      | 14.75          | 0         | 794     | 0         | 794     | 10.75        | 45.5          | J-55    | BTC       |
| Intermediate | 9.875          | 0         | 10873   | 0         | 10780   | 7.625        | 26.4          | L-80 HC | BTC       |
| Production   | 6.75           | 0         | 21634   | 0         | 11228   | 5.5          | 20            | P-110   | Sprint-SF |

All casing strings will be tested in accordance with 43 CFR part 3170 Subpart 3172



| All Casing SF Values will meet or exceed those below |          |                 |                  |
|------------------------------------------------------|----------|-----------------|------------------|
| SF Collapse                                          | SF Burst | Body SF Tension | Joint SF Tension |
| 1.00                                                 | 1.100    | 1.4             | 1.4              |

|                                                                                                                                                     | Y or N |
|-----------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| Is casing new? If used, attach certification as required in 43 CFR 3160                                                                             | Y      |
| Does casing meet API specifications? If no, attach casing specification sheet.                                                                      | Y      |
| Is premium or uncommon casing planned? If yes attach casing specification sheet.                                                                    | Y      |
| Does the above casing design meet or exceed BLM's minimum standards?<br>If not provide justification (loading assumptions, casing design criteria). | Y      |
| Will the intermediate pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?                   | Y      |
|                                                                                                                                                     |        |
| Is well located within Capitan Reef?                                                                                                                | N      |
| If yes, does production casing cement tie back a minimum of 50' above the Reef?                                                                     |        |
| Is well within the designated 4 string boundary.                                                                                                    |        |
|                                                                                                                                                     |        |
| Is well located in SOPA but not in R-111-Q?                                                                                                         | N      |
| If yes, are the first 2 strings cemented to surface and 3 <sup>rd</sup> string cement tied back 500' into previous casing?                          |        |
|                                                                                                                                                     |        |
| Is well located in R-111-Q and SOPA?                                                                                                                | N      |
| If yes, are the first three strings cemented to surface?                                                                                            |        |
| Is 2 <sup>nd</sup> string set 100' to 600' below the base of salt?                                                                                  |        |
|                                                                                                                                                     |        |
| Is well located in high Cave/Karst?                                                                                                                 | N      |
| If yes, are there two strings cemented to surface?                                                                                                  |        |
| (For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?                                                              |        |
|                                                                                                                                                     |        |
| Is well located in critical Cave/Karst?                                                                                                             | N      |
| If yes, are there three strings cemented to surface?                                                                                                |        |

**3. Cementing Program**

| Section | Stage | Slurry:                   | Sacks | Yield<br>(ft <sup>3</sup> /ft) | Density<br>(lb/gal) | Excess: | TOC    | Placement  | Description           |
|---------|-------|---------------------------|-------|--------------------------------|---------------------|---------|--------|------------|-----------------------|
| Surface | 1     | Surface - Tail            | 664   | 1.33                           | 14.8                | 100%    | -      | Circulate  | Class C+Accel.        |
| Int.    | 1     | Intermediate 1S - Tail    | 670   | 1.68                           | 13.2                | 5%      | 5,880  | Circulate  | Class C+Ret., Disper. |
| Int.    | 2     | Intermediate 2S - Tail BH | 907   | 1.71                           | 13.3                | 25%     | -      | Bradenhead | Class C+Accel.        |
| Prod.   | 1     | Production - Tail         | 638   | 1.84                           | 13.3                | 25%     | 10,373 | Circulate  | Class C+Ret.          |

**Offline Cementing Request**

Oxy requests a variance to cement the 9.625" and/or 7.625" intermediate casing strings offline in accordance to the approved variance, EC Tran 461365. Please see Offline Cementing Variance attachment for further details.

**Bradenhead CBL Request**

Oxy requests permission to adjust the CBL requirement after bradenhead cement jobs, on 7-5/8" intermediate casings, as per the agreement reached in the OXY/BLM meeting on September 5, 2019. Please see Bradenhead CBL Variance attachment for further details.

**4. Pressure Control Equipment**

| BOP installed and tested before drilling which hole? | Size?   | Min. Required WP | Type       |  | ✓ | Tested to:               | Deepest TVD Depth (ft) per Section: |
|------------------------------------------------------|---------|------------------|------------|--|---|--------------------------|-------------------------------------|
| 9.875" Hole                                          | 13-5/8" | 5M               | Annular    |  | ✓ | 70% of working pressure  | 10780                               |
|                                                      |         | 5M               | Blind Ram  |  | ✓ | 250 psi / 5000 psi       |                                     |
|                                                      |         |                  | Pipe Ram   |  |   |                          |                                     |
|                                                      |         |                  | Double Ram |  | ✓ |                          |                                     |
|                                                      |         |                  | Other*     |  |   |                          |                                     |
| 6.75" Hole                                           | 13-5/8" | 5M               | Annular    |  | ✓ | 100% of working pressure | 11228                               |
|                                                      |         | 10M              | Blind Ram  |  | ✓ | 250 psi / 10000 psi      |                                     |
|                                                      |         |                  | Pipe Ram   |  |   |                          |                                     |
|                                                      |         |                  | Double Ram |  | ✓ |                          |                                     |
|                                                      |         |                  | Other*     |  |   |                          |                                     |

\*Specify if additional ram is utilized

BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per 43 CFR part 3170 Subpart 3172 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested.

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold.

**5M Annular BOP Request**

Per BLM's Memorandum No. NM-2017-008: *Decision and Rationale for a Variance Allowing the Use of a 5M Annular Preventer with a 10M BOP Stack*, Oxy requests to employ a 5M annular with a 10M BOPE stack in the pilot and lateral sections of the well and will ensure that two barriers to flow are maintained at all times. Please see Annular BOP Variance attachment for further details.

|   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|   | Formation integrity test will be performed per 43 CFR part 3170 Subpart 3172.<br>On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with 43 CFR part 3170 Subpart 3172.                                                                                                                                                                                                                                                                                                                                                                   |
|   | A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs and hydrostatic test chart.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Y | Are anchors required by manufacturer?                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|   | A multibowl or a unionized multibowl wellhead system will be employed. The wellhead and connection to the BOPE will meet all API 6A requirements. The BOP will be tested per 43 CFR part 3170 Subpart 3172 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested. We will test the flange connection of the wellhead with a test port that is directly in the flange. We are proposing that we will run the wellhead through the rotary prior to cementing surface casing as discussed with the BLM on October 8, 2015.<br><br>See attached schematics. |

**BOP Break Testing Request**

Oxy requests permission to adjust the BOP break testing requirements as per the agreement reached in the OXY/BLM meeting on September 5, 2019. Please see BOP Break Testing Variance attachment for further details.

**Oxy will use Cameron ADAPT wellhead system that uses an OEC top flange connection. This connection has been fully vetted and verified by API to Spec 6A and carries an API monogram.**

**5. Mud Program**

| Section      | Depth - MD |         | Depth - TVD |         | Type                                   | Weight (ppg) | Viscosity | Water Loss |
|--------------|------------|---------|-------------|---------|----------------------------------------|--------------|-----------|------------|
|              | From (ft)  | To (ft) | From (ft)   | To (ft) |                                        |              |           |            |
| Surface      | 0          | 794     | 0           | 794     | Water-Based Mud                        | 8.6 - 8.8    | 40-60     | N/C        |
| Intermediate | 794        | 10873   | 794         | 10780   | Saturated Brine-Based or Oil-Based Mud | 8.0 - 10.0   | 35-45     | N/C        |
| Production   | 10873      | 21634   | 10780       | 11228   | Water-Based or Oil-Based Mud           | 9.5 - 13.5   | 38-50     | N/C        |

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times. The following is a general list of products: Barite, Bentonite, Gypsum, Lime, Soda Ash, Caustic Soda, Nut Plug, Cedar Fiber, Cotton Seed Hulls, Drilling Paper, Salt Water Clay, CACL2. Oxy will use a closed mud system.

|                                                         |                                |
|---------------------------------------------------------|--------------------------------|
| What will be used to monitor the loss or gain of fluid? | PVT/MD Totco/Visual Monitoring |
|---------------------------------------------------------|--------------------------------|

**6. Logging and Testing Procedures**

| Logging, Coring and Testing. |                                                                              |                   |
|------------------------------|------------------------------------------------------------------------------|-------------------|
| Yes                          | Will run GR from TD to surface (horizontal well – vertical portion of hole). |                   |
|                              | Stated logs run will be in the Completion Report and submitted to the BLM.   |                   |
| No                           | Logs are planned based on well control or offset log information.            |                   |
| No                           | Drill stem test? If yes, explain                                             |                   |
| No                           | Coring? If yes, explain                                                      |                   |
| Additional logs planned      |                                                                              | Interval          |
| No                           | Resistivity                                                                  |                   |
| No                           | Density                                                                      |                   |
| Yes                          | CBL                                                                          | Production string |
| Yes                          | Mud log                                                                      | Bone Spring – TD  |
| No                           | PEX                                                                          |                   |

**7. Drilling Conditions**

| Condition                     | Specify what type and where? |
|-------------------------------|------------------------------|
| BH Pressure at deepest TVD    | 7883 psi                     |
| Abnormal Temperature          | No                           |
| BH Temperature at deepest TVD | 170°F                        |

Pump high viscosity sweeps as needed for hole cleaning. The mud system will be monitored visually/manually as well as with an electronic PVT. The necessary mud products for additional weight and fluid loss control will be on location at all times. Appropriately weighted mud will be used to isolate potential gas, oil, and water zones until such time as casing can be cemented into place for zonal

Hydrogen Sulfide (H2S) monitors will be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of 43 CFR part 3170 Subpart 3172. If Hydrogen Sulfide is encountered, measured values and formations will be provided to the BLM.

|   |                   |
|---|-------------------|
| N | H2S is present    |
| Y | H2S Plan attached |

**8. Other facets of operation**

|                                                                                                                                                                                                                                                                                                                                                                                                                                 | Yes/No |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| Will the well be drilled with a walking/skidding operation? If yes, describe.<br>We plan to drill the 3 well pad in batch by section: all surface sections, intermediate sections and production sections. The wellhead will be secured with a night cap whenever the rig is not over the well.                                                                                                                                 | Yes    |
| Will more than one drilling rig be used for drilling operations? If yes, describe.<br>Oxy requests the option to contract a Surface Rig to drill, set surface casing, and cement for this well. If the timing between rigs is such that Oxy would not be able to preset surface, the Primary Rig will MIRU and drill the well in its entirety per the APD. Please see the attached document for information on the spudder rig. | Yes    |

**Total Estimated Cuttings Volume:** 1599 bbls

# Oxy USA Inc. - Blanket Design Pad Document

## OXY - Blanket Design A

**Pad Name:** CEDCAN\_25S29E\_1207

**SHL:** 992' FNL 1072' FEL, Sec 12, T25S-R29E

Oxy requests for the bellow wells to be approved for the two designs listed in the Blanket Design document (**Blanket Design A –OXY –3S Slim v7.2.**) The MDs and TVDs for all intervals are within the boundary conditions. The max inclination and DLS are also within the boundary conditions (directional plans attached separately for review.)

### 1. Blanket Design - Wells

| Well Name                      | APD #            | Surface |     | Intermediate |       | Production |       |
|--------------------------------|------------------|---------|-----|--------------|-------|------------|-------|
|                                |                  | MD      | TVD | MD           | TVD   | MD         | TVD   |
| CORRAL GORGE 12-13 FED COM 44H | N/A - New Permit | 812     | 812 | 10876        | 10796 | 21756      | 11363 |
| CORRAL GORGE 12-13 FED COM 53H | N/A - New Permit | 794     | 794 | 10873        | 10780 | 21634      | 11228 |
| CORRAL GORGE 12-13 FED COM 54H | N/A - New Permit | 825     | 825 | 10907        | 10807 | 21643      | 11228 |
|                                |                  |         |     |              |       |            |       |
|                                |                  |         |     |              |       |            |       |
|                                |                  |         |     |              |       |            |       |
|                                |                  |         |     |              |       |            |       |
|                                |                  |         |     |              |       |            |       |
|                                |                  |         |     |              |       |            |       |
|                                |                  |         |     |              |       |            |       |
|                                |                  |         |     |              |       |            |       |
|                                |                  |         |     |              |       |            |       |
|                                |                  |         |     |              |       |            |       |

### 2. Review Criteria Table

|                                                                                                                                                     | Y or N |
|-----------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| Is casing new? If used, attach certification as required in 43 CFR 3160                                                                             | Y      |
| Does casing meet API specifications? If no, attach casing specification sheet.                                                                      | Y      |
| Is premium or uncommon casing planned? If yes attach casing specification sheet.                                                                    | Y      |
| Does the above casing design meet or exceed BLM's minimum standards?<br>If not provide justification (loading assumptions, casing design criteria). | Y      |
| Will the intermediate pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?                   | Y      |
| Is well located within Capitan Reef?                                                                                                                | N      |
| If yes, does production casing cement tie back a minimum of 50' above the Reef?                                                                     |        |
| Is well within the designated 4 string boundary.                                                                                                    |        |
| Is well located in SOPA but not in R-111-Q?                                                                                                         | N      |
| If yes, are the first 2 strings cemented to surface and 3 <sup>rd</sup> string cement tied back 500' into previous casing?                          |        |
| Is well located in R-111-Q and SOPA?                                                                                                                | N      |
| If yes, are the first three strings cemented to surface?                                                                                            |        |
| Is 2 <sup>nd</sup> string set 100' to 600' below the base of salt?                                                                                  |        |
| Is well located in high Cave/Karst?                                                                                                                 | N      |
| If yes, are there two strings cemented to surface?                                                                                                  |        |
| (For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?                                                              |        |
| Is well located in critical Cave/Karst?                                                                                                             | N      |
| If yes, are there three strings cemented to surface?                                                                                                |        |

**3. Geologic Formations**

| Formation       | MD-RKB (ft) | TVD-RKB (ft) | Expected Fluids |
|-----------------|-------------|--------------|-----------------|
| Rustler         | 434         | 434          |                 |
| Salado          | 872         | 872          | Salt            |
| Castile         | 1825        | 1825         | Salt            |
| Delaware        | 3379        | 3379         | Oil/Gas/Brine   |
| Bell Canyon     | 3388        | 3388         | Oil/Gas/Brine   |
| Cherry Canyon   | 4299        | 4299         | Oil/Gas/Brine   |
| Brushy Canyon   | 5623        | 5621         | Losses          |
| Bone Spring     | 7187        | 7162         | Oil/Gas         |
| Bone Spring 1st | 8167        | 8127         | Oil/Gas         |
| Bone Spring 2nd | 9029        | 8976         | Oil/Gas         |
| Bone Spring 3rd | 10106       | 10037        | Oil/Gas         |
| Wolfcamp        | 10445       | 10371        | Oil/Gas         |
| Penn            |             |              | Oil/Gas         |
| Strawn          |             |              | Oil/Gas         |

**4. Cementing Program**

| Section | Stage | Slurry:                   | Sacks | Yield<br>(ft <sup>3</sup> /ft) | Density<br>(lb/gal) | Excess: | TOC    | Placement  | Description           |
|---------|-------|---------------------------|-------|--------------------------------|---------------------|---------|--------|------------|-----------------------|
| Surface | 1     | Surface - Tail            | 679   | 1.33                           | 14.8                | 100%    | -      | Circulate  | Class C+Accel.        |
| Int.    | 1     | Intermediate 1S - Tail    | 672   | 1.68                           | 13.2                | 5%      | 5,873  | Circulate  | Class C+Ret., Disper. |
| Int.    | 2     | Intermediate 2S - Tail BH | 906   | 1.71                           | 13.3                | 25%     | -      | Bradenhead | Class C+Accel.        |
| Prod.   | 1     | Production - Tail         | 644   | 1.84                           | 13.3                | 25%     | 10,376 | Circulate  | Class C+Ret.          |





## Oxy Blanket Design - Casing Design "A"



### 1. Casing Program

The designs and associated details listed in this document are the "worst case scenario" boundaries for design safety factors.

Location and lithology have NOT been accounted for in these designs; however, the designs are NOT valid for wells within KPLA Boundaries or Capitan Reef areas. The specific well details will be based on the APD/Sundry package and the information listed in the COA.

The mud program listed below will remain the same between each design variation.

Hole will be full during casing run for well control and tensile SF.

Casing will be kept at least half full during run for these designs to meet BLM collapse SF requirement.

#### Design Variation "A1"

| Section      | Hole Size (in) | MD        |         | TVD       |         | Csg. OD (in) | Csg Wt. (ppf) | Grade   | Conn.                                 |
|--------------|----------------|-----------|---------|-----------|---------|--------------|---------------|---------|---------------------------------------|
|              |                | From (ft) | To (ft) | From (ft) | To (ft) |              |               |         |                                       |
| Surface      | 14.75          | 0         | 1200    | 0         | 1200    | 10.75        | 45.5          | J-55    | BTC                                   |
| Intermediate | 9.875          | 0         | 13111*  | 0         | 12775*  | 7.625        | 26.4          | L-80 HC | BTC<br>Axis HT<br>GBCD                |
| Production   | 6.75           | 0         | 23361   | 0         | 12775   | 5.5          | 20            | P-110   | Wedge 461<br>Sprint SF<br>DWC/C-HT-IS |

\*Curve could be in intermediate or production section

#### Design Variation "A2" - Option to Pivot to Design "B" for Contingency 4S

| Section      | Hole Size (in) | MD        |         | TVD       |         | Csg. OD (in) | Csg Wt. (ppf) | Grade   | Conn.                                 |
|--------------|----------------|-----------|---------|-----------|---------|--------------|---------------|---------|---------------------------------------|
|              |                | From (ft) | To (ft) | From (ft) | To (ft) |              |               |         |                                       |
| Surface      | 17.5           | 0         | 1200    | 0         | 1200    | 13.375       | 54.5          | J-55    | BTC                                   |
| Intermediate | 12.25+         | 0         | 13111*  | 0         | 12775*  | 7.625        | 26.4          | L-80 HC | BTC<br>Axis HT<br>GBCD                |
| Production   | 6.75           | 0         | 23361   | 0         | 12775   | 5.5          | 20            | P-110   | Wedge 461<br>Sprint SF<br>DWC/C-HT-IS |

\*Curve could be in intermediate or production section

†If 4S Contingency is not required, Oxy requests permission to transition from 12.25" to 9.875" Intermediate at some point during the hole section. Cement volumes will be updated on C103 submission.

All casing strings will be tested in accordance with 43 CFR part 3170 Subpart 3172



## Oxy Blanket Design - Casing Design "A"



| All Casing SF Values will meet or exceed those below |          |                 |                  |
|------------------------------------------------------|----------|-----------------|------------------|
| SF Collapse                                          | SF Burst | Body SF Tension | Joint SF Tension |
| 1.00                                                 | 1.100    | 1.4             | 1.4              |

### §Annular Clearance Variance Request

As per the agreement reached in the Oxy/BLM face-to-face meeting on Feb 22, 2018, Oxy requests permission to allow deviation from the 0.422" annular clearance requirement. Please see Annular Clearance Variance attachment for further details.

§Annular Clearance Variance Request may not apply to all connections used or presented.

## 2. Trajectory / Boundary Conditions

| Section      | MD                             |                | TVD              |                | Max. Angle | Max. Planned DLS |
|--------------|--------------------------------|----------------|------------------|----------------|------------|------------------|
|              | Deepest KOP (ft)               | End Build (ft) | Deepest KOP (ft) | End Build (ft) |            |                  |
| Surface      | 0                              | 1200           | 0                | 1200           | 5°         | 1°/100 ft        |
| Intermediate | 5000<br>(inside Cherry Canyon) | 6500           | 4980             | 6390           | 20°        | 2°/100 ft        |
|              | 12211                          | 13111          | 12202            | 12775          | 92° ‡      | 12°/100 ft ‡     |
| Production   | 12211<br>(~100' MD past ICP)   | 13111          | 12202            | 12775          | 92° ‡      | 12°/100 ft ‡     |

‡ Applies only when intermediate casing depth is deepened to landing point to match TVD of production in some areas where required to accommodate higher MWs in depleted areas.

Oxy has reviewed casing burst, collapse, and axial loadcases in Landmark StressCheck with the boundary conditions in the table above which satisfies Oxy and BLM minimum design criteria. Triaxial plots for each casing string is shown in Section 7 and intermediate load case inputs are shown in Section 8.



## Oxy Blanket Design - Casing Design "A"



### 3. Cementing Program

NOTE: Blanket design is for technical review only. The cement volumes will be adjusted to ensure cement tops meet BLM requirements.

#### Design Variation "A1"

| Section | Stage | Slurry:                   | Sacks | Yield (ft <sup>3</sup> /ft) | Density (lb/gal) | Excess: | TOC                  | Placement  | Description           |
|---------|-------|---------------------------|-------|-----------------------------|------------------|---------|----------------------|------------|-----------------------|
| Surface | 1     | Surface - Tail            | 819   | 1.33                        | 14.8             | 100%    | -                    | Circulate  | Class C+Accel.        |
| Int.    | 1     | Intermediate 1S - Tail    | 658   | 1.68                        | 13.2             | 5%      | 7,206                | Circulate  | Class C+Ret., Disper. |
| Int.    | 2     | Intermediate 2S - Tail BH | 1111  | 1.71                        | 13.3             | 25%     | -                    | Bradenhead | Class C+Accel.        |
| Prod.   | 1     | Production - Tail         | 665   | 1.84                        | 13.3             | 25%     | 11,611               | Circulate  | Class C+Ret.          |
| Prod.   | 2*    | Production - Tail BH*     | TBD   | 1.84                        | 13.3             | 50%     | 500' inside prev csg | Circulate  | Class C+Ret.          |

\*Only applies in scenario where planned single stage job TOC is not 500' above previous shoe as designed/programmed requiring bradenhead 2nd stage to meet requirements

#### Design Variation "A2"

| Section | Stage | Slurry:                   | Sacks | Yield (ft <sup>3</sup> /ft) | Density (lb/gal) | Excess: | TOC                  | Placement  | Description           |
|---------|-------|---------------------------|-------|-----------------------------|------------------|---------|----------------------|------------|-----------------------|
| Surface | 1     | Surface - Tail            | 1023  | 1.33                        | 14.8             | 100%    | -                    | Circulate  | Class C+Accel.        |
| Int.    | 1     | Intermediate 1S - Tail    | 658   | 1.68                        | 13.2             | 5%      | 7,206                | Circulate  | Class C+Ret., Disper. |
| Int.    | 2     | Intermediate 2S - Tail BH | 1293  | 1.71                        | 13.3             | 25%     | -                    | Bradenhead | Class C+Accel.        |
| Prod.   | 1     | Production - Tail         | 665   | 1.84                        | 13.3             | 25%     | 11,611               | Circulate  | Class C+Ret.          |
| Prod.   | 2*    | Production - Tail BH*     | TBD   | 1.84                        | 13.3             | 50%     | 500' inside prev csg | Circulate  | Class C+Ret.          |

\*Only applies in scenario where planned single stage job TOC is not 500' above previous shoe as designed/programmed requiring bradenhead 2nd stage to meet requirements

As Reviewed and Approved by BLM on Feb 8, 2024: Oxy uses a Class C / Pozzolan mix on its production cement slurry, which has the same fluid properties as Class H, and has been pilot and field blend tested to have as good or better compressive strength development at our target densities.

#### Offline Cementing Request

Oxy requests a variance to cement the 9.625" and/or 7.625" intermediate casing strings offline in accordance to the approved variance, EC Tran 461365. Please see Offline Cementing Variance attachment for further details.

#### Bradenhead CBL Request

Oxy requests permission to adjust the CBL requirement after bradenhead cement jobs, on 7-5/8" intermediate casings, as per the agreement reached in the OXY/BLM meeting on September 5, 2019. Please see Bradenhead CBL Variance attachment for further details.



## Oxy Blanket Design - Casing Design "A"



### 4. Pressure Control Equipment

| BOP installed and tested before drilling which hole? | Size?   | Min. Required WP | Type       |  | ✓ | Tested to:               | Deepest TVD Depth (ft) per Section: |
|------------------------------------------------------|---------|------------------|------------|--|---|--------------------------|-------------------------------------|
| 9.875" Hole                                          | 13-5/8" | 5M               | Annular    |  | ✓ | 70% of working pressure  | 12775**                             |
|                                                      |         | 5M               | Blind Ram  |  | ✓ | 250 psi / 5000 psi       |                                     |
|                                                      |         |                  | Pipe Ram   |  |   |                          |                                     |
|                                                      |         |                  | Double Ram |  | ✓ |                          |                                     |
|                                                      |         |                  | Other*     |  |   |                          |                                     |
| 6.75" Hole                                           | 13-5/8" | 5M               | Annular    |  | ✓ | 100% of working pressure | 12775                               |
|                                                      |         | 10M              | Blind Ram  |  | ✓ | 250 psi / 10000 psi      |                                     |
|                                                      |         |                  | Pipe Ram   |  |   |                          |                                     |
|                                                      |         |                  | Double Ram |  | ✓ |                          |                                     |
|                                                      |         |                  | Other*     |  |   |                          |                                     |

\*Specify if additional ram is utilized

\*\*Curve could be in intermediate or production section

BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per 43 CFR part 3170 Subpart 3172 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested.

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. See attached schematics.

#### 5M Annular BOP Request

Per BLM's Memorandum No. NM-2017-008: *Decision and Rationale for a Variance Allowing the Use of a 5M Annular Preventer with a 10M BOP Stack*, Oxy requests to employ a 5M annular with a 10M BOPE stack in the pilot and lateral sections of the well and will ensure that two barriers to flow are



## Oxy Blanket Design - Casing Design "A"



Formation integrity test will be performed per 43 CFR part 3170 Subpart 3172.

On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with 43 CFR part 3170 Subpart 3172.

A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. Coflex hoses are in compliance with API 16C and meets inspection and testing requirements. See attached for specs and hydrostatic test chart.

|   |                                       |
|---|---------------------------------------|
| Y | Are anchors required by manufacturer? |
|---|---------------------------------------|

A multibowl or a unionized multibowl wellhead system will be employed. The wellhead and connection to the BOPE will meet all API 6A requirements. The BOP will be tested per 43 CFR part 3170 Subpart 3172 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested. We will test the flange connection of the wellhead with a test port that is directly in the flange. We are proposing that we will run the wellhead through the rotary prior to cementing surface casing as discussed with the BLM on October 8, 2015.

See attached Schematics.

### BOP Break Testing Request

Oxy requests permission to adjust the BOP break testing requirements as per the agreement reached in the OXY/BLM meeting on September 5, 2019. Please see BOP Break Testing Variance attachment for further details.

### Hammer Union Variance

Oxy requests permission for hammer unions behind the choke to be routed to the gas buster. The hammer unions will not be subject to wellbore pressure in compliance with API STD 53.

Oxy will use Cameron ADAPT wellhead system that uses an OEC top flange connection. This connection has been fully vetted and verified by API to Spec 6A and carries an API monogram.



## Oxy Blanket Design - Casing Design "A"



### 5. Mud Program & Drilling Conditions

| Section      | Depth - MD |         | Depth - TVD |         | Type                                   | Weight (ppg) | Viscosity | Water Loss |
|--------------|------------|---------|-------------|---------|----------------------------------------|--------------|-----------|------------|
|              | From (ft)  | To (ft) | From (ft)   | To (ft) |                                        |              |           |            |
| Surface      | 0          | 1200    | 0           | 1200    | Water-Based Mud                        | 8.6 - 8.8    | 40-60     | N/C        |
| Intermediate | 1200       | 13111*  | 1200        | 12775*  | Saturated Brine-Based or Oil-Based Mud | 8.0 - 10.0   | 35-45     | N/C        |
| Production   | 13111      | 23361   | 12775       | 12775   | Water-Based or Oil-Based Mud           | 9.5 - 13.5   | 38-50     | N/C        |

\*Curve could be in intermediate or production section\*

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times. The following is a general list of products: Barite, Bentonite, Gypsum, Lime, Soda Ash, Caustic Soda, Nut Plug, Cedar Fiber, Cotton Seed Hulls, Drilling Paper, Salt Water Clay, CACL2. Oxy will use a closed mud system.

#### Drilling Blind Request

In the event total losses are encountered in the intermediate section, Oxy requests permission to drill blind due to depleted formations where risk of hydrocarbon kicks are unlikely.

- Oxy will first attempt to cure losses before proceeding with drilling blind
- Drilling blind will only be allowed in the Castille and formations below
- While drilling blind, will monitor backside by filling-up on connections and utilize gas monitors
- Depths at which losses occurred and attempt to cure losses with relevant details (LCM sweep info, etc.) will be documented in the drillers log and Subsequent Reports to the BLM.
- If a well control event (hydrocarbon kick) occurs while drilling blind, the BLM will be notified after the well is secured and returned to static.

|                                                         |                                |
|---------------------------------------------------------|--------------------------------|
| What will be used to monitor the loss or gain of fluid? | PVT/MD Totco/Visual Monitoring |
|---------------------------------------------------------|--------------------------------|

Pump high viscosity sweeps as needed for hole cleaning. The mud system will be monitored visually/manually as well as with an electronic PVT. The necessary mud products for additional weight and fluid loss control will be on location at all times. Appropriately weighted mud will be used to isolate potential gas, oil, and water zones until such time as casing can be cemented into place for zonal isolation.




## Oxy Blanket Design - Casing Design "A"




### 6. Wellbore Diagram(s)

**Design Variation "A1"**

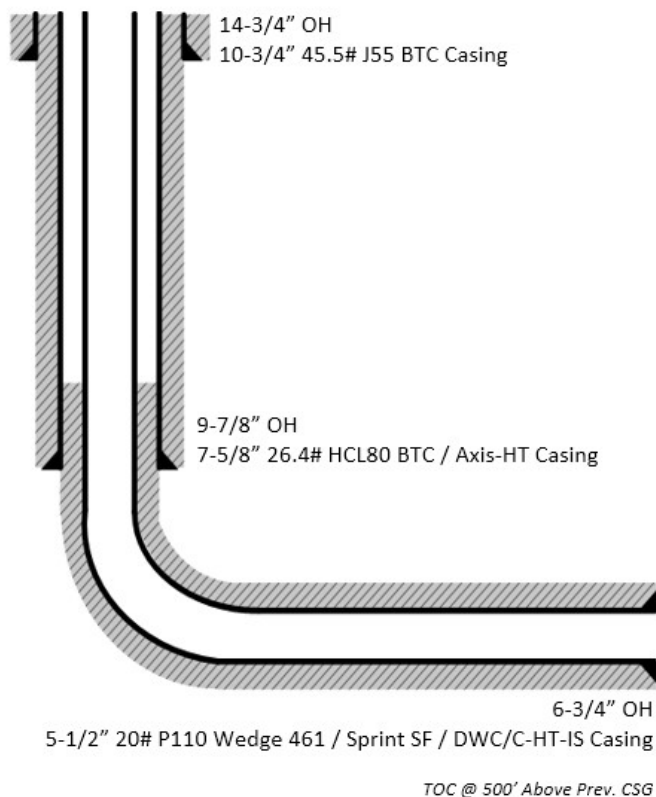

**Design Variation "A2"**

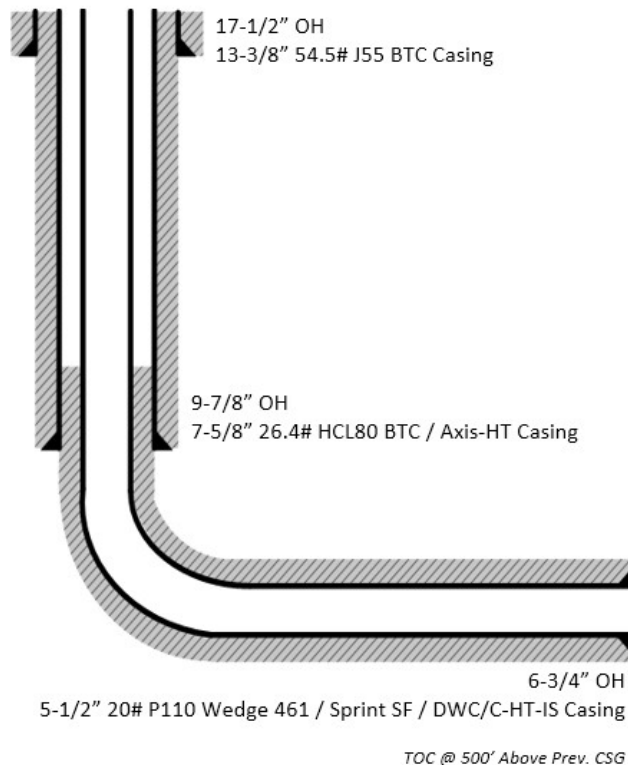






## Oxy Blanket Design - Casing Design "A"




### 7. Landmark StressCheck Screenshots – Triaxial Output

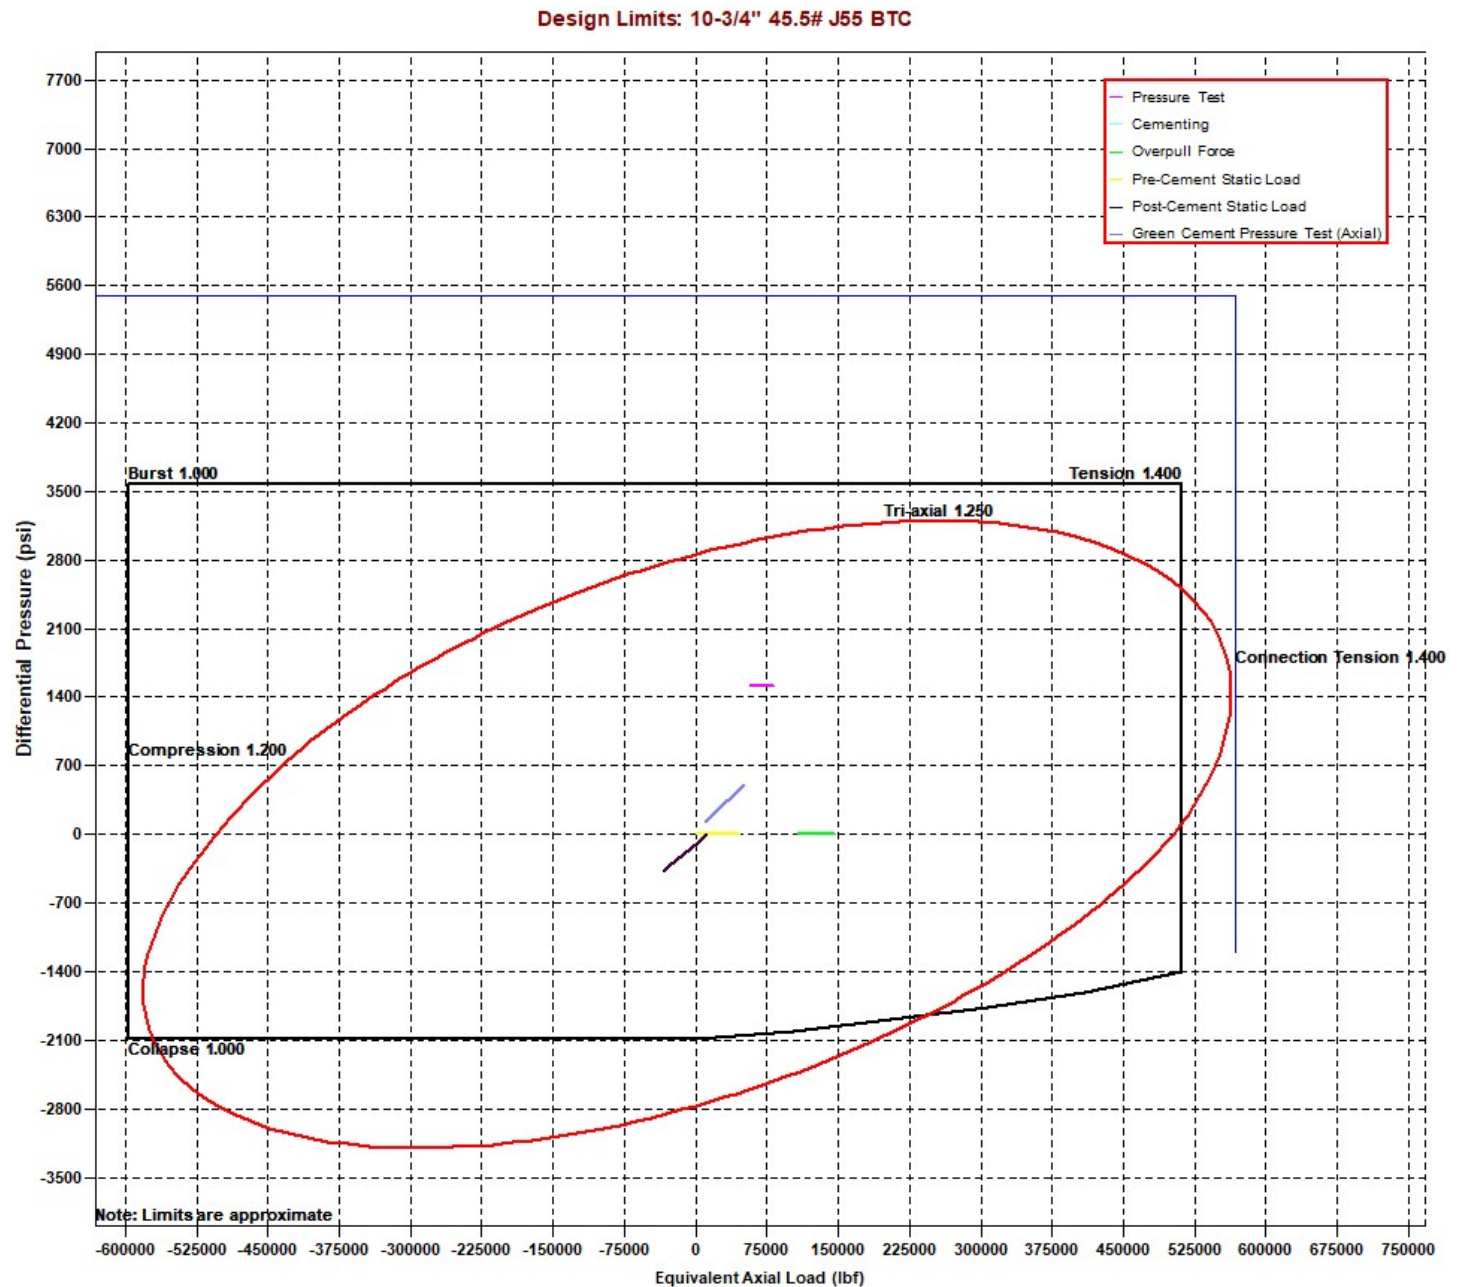





# Oxy Blanket Design - Casing Design "A"

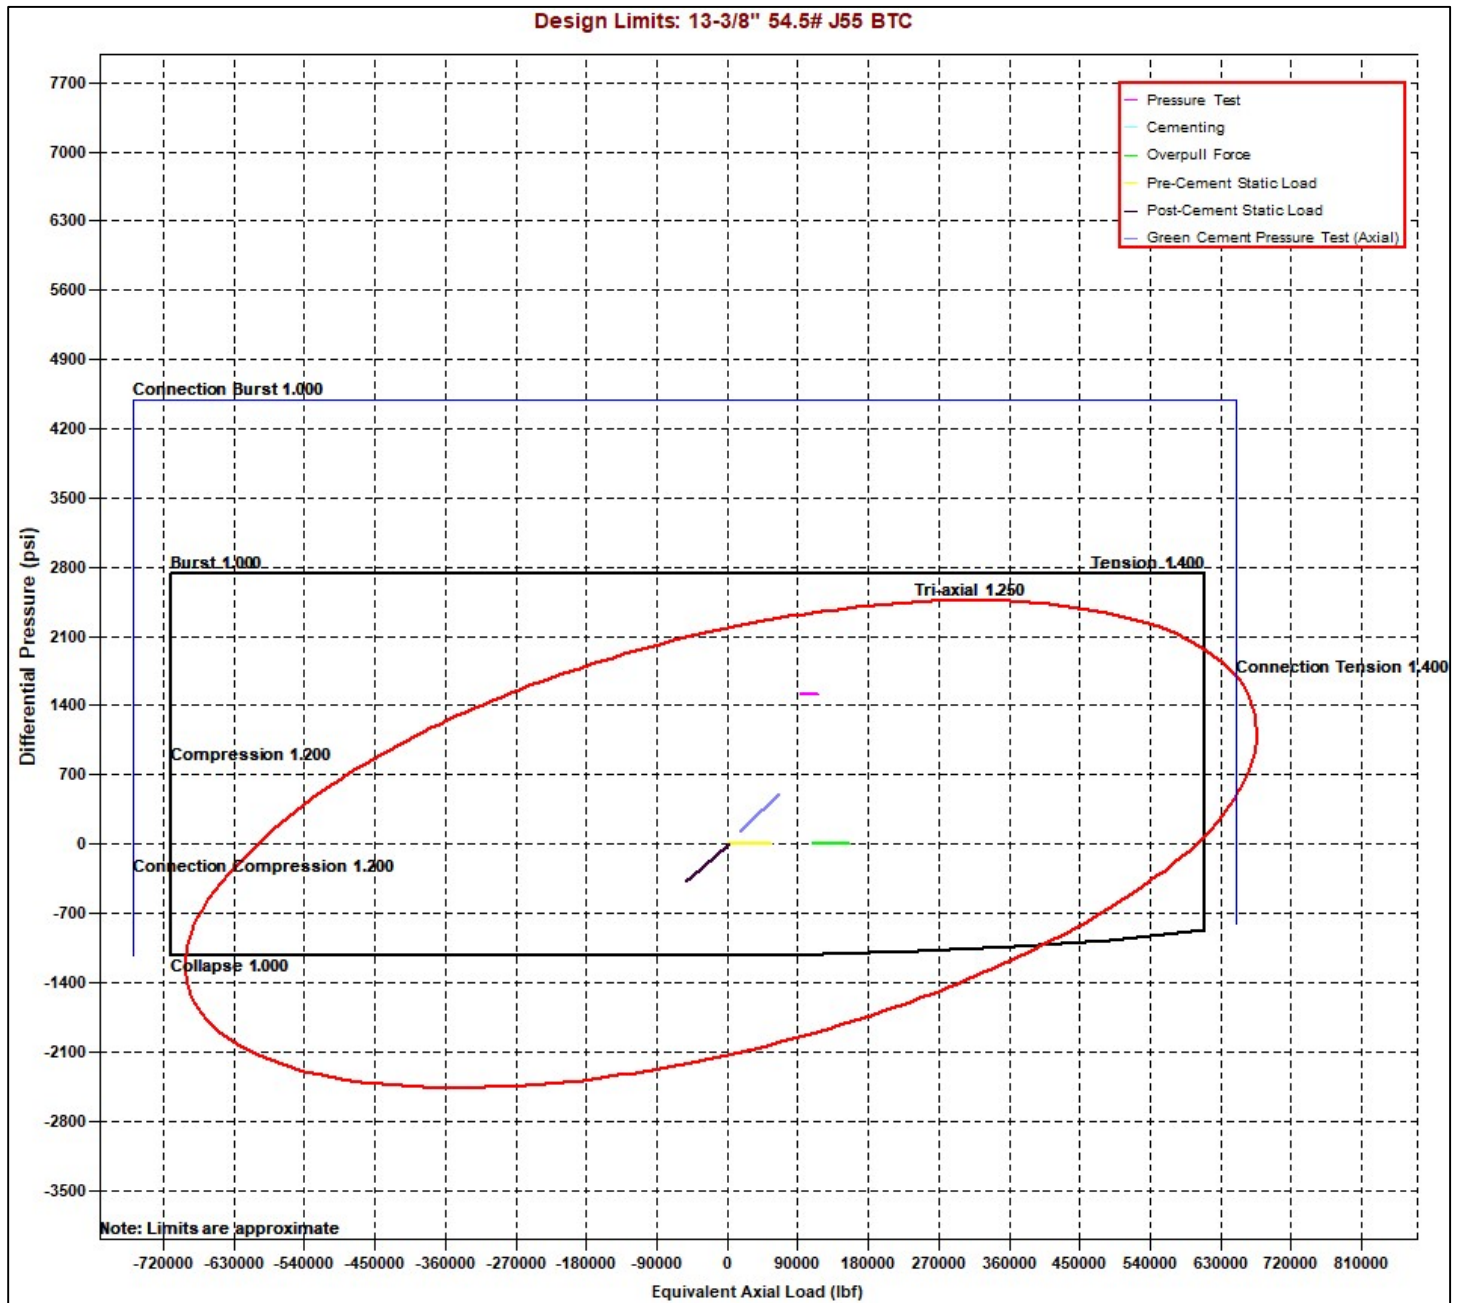




# Oxy Blanket Design - Casing Design "A"



Design Limits: 7-5/8" 26.4# HC-L80 BTC

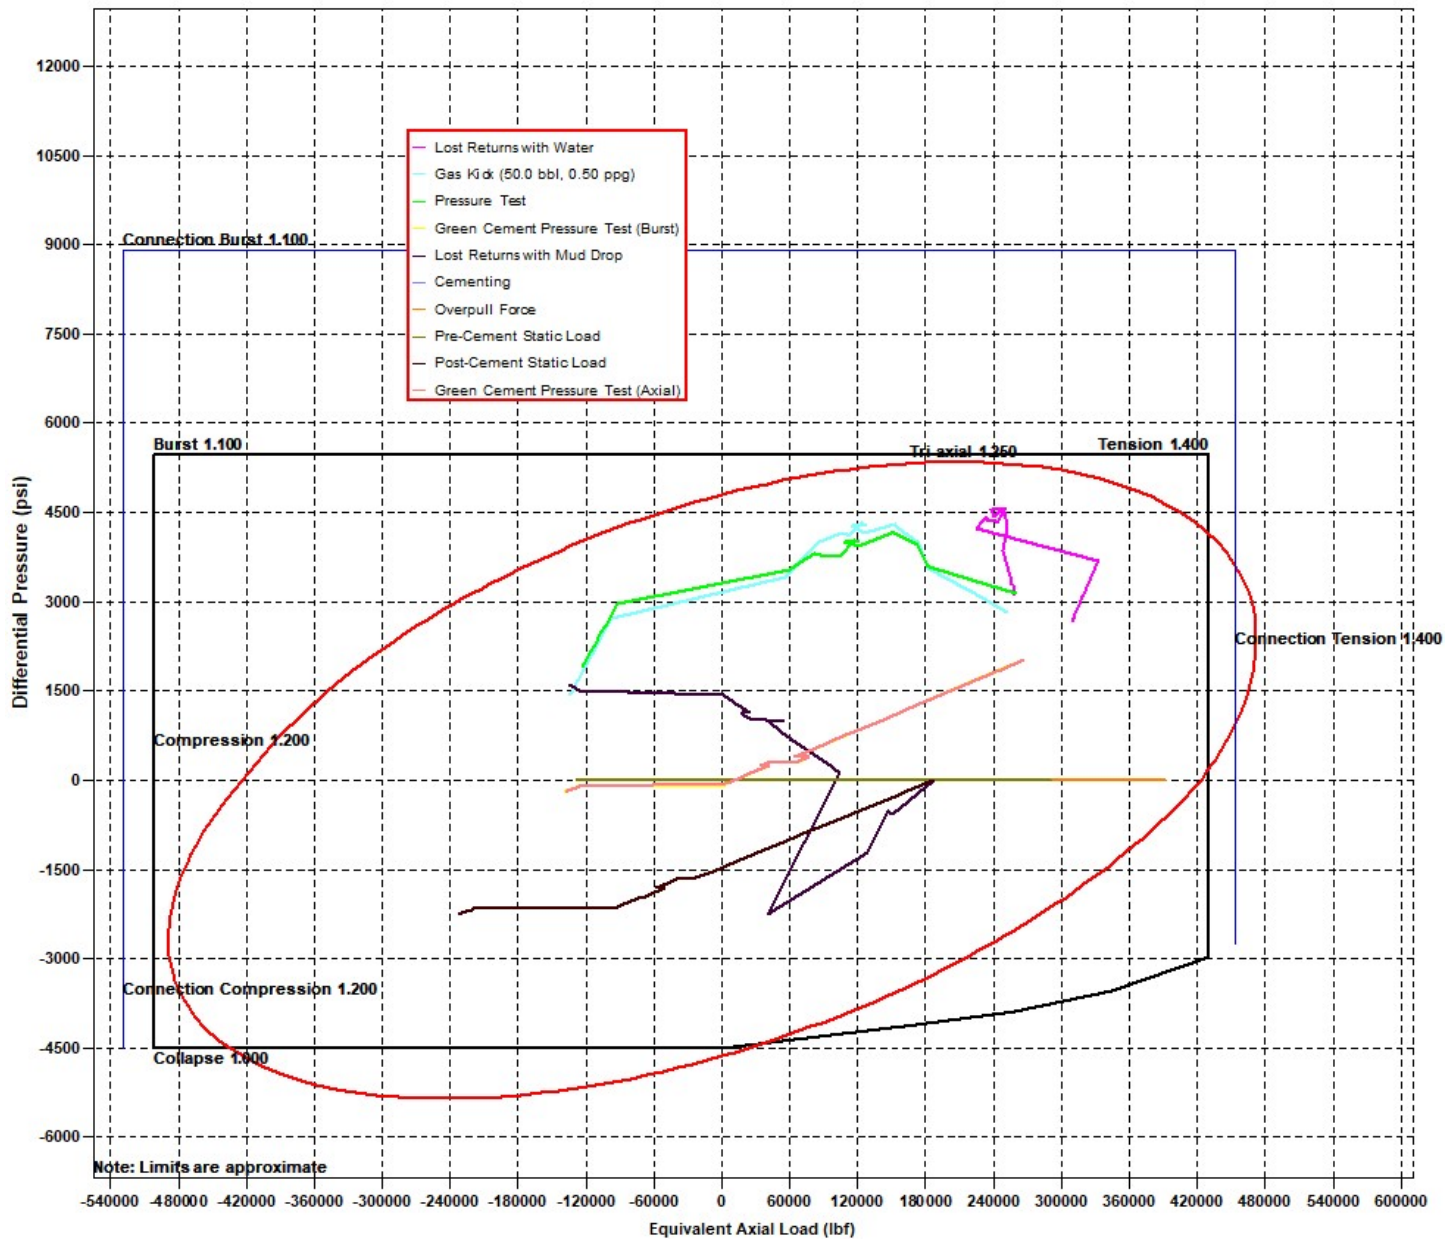




# Oxy Blanket Design - Casing Design "A"



Design Limits: 5-1/2" 20# P110 Sprint SF

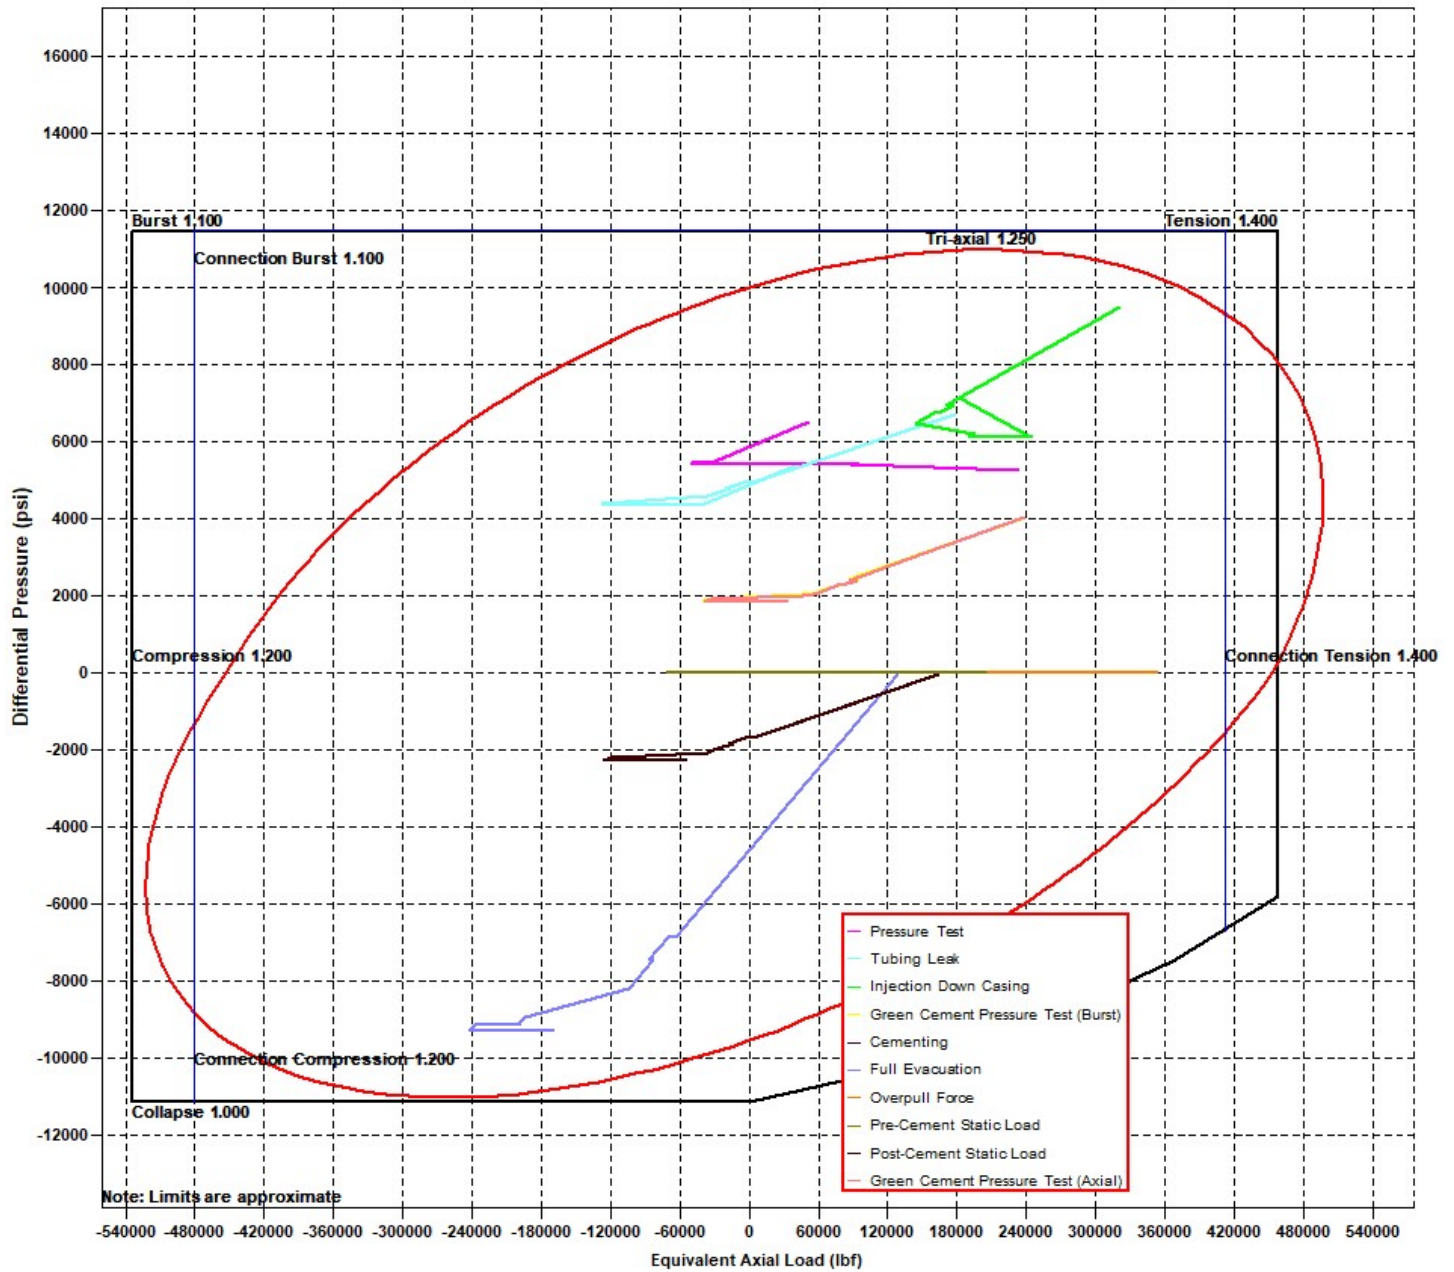



## Oxy Blanket Design - Casing Design "A"



### 8. Landmark StressCheck Screenshots – Inputs for Intermediate CSG Load Cases

#### Burst Load Cases

| General                             |                                           | 7 5/8" Intermediate Casing |
|-------------------------------------|-------------------------------------------|----------------------------|
| <b>Burst Loads Data</b>             |                                           |                            |
| <b>Drilling Load:</b>               | <b>Lost Returns with Water</b>            |                            |
| Fracture at Shoe (MD= 13111.00 ft): | 10591 psi                                 |                            |
| Mud/Water Interface, MD:            | 0.00 ft                                   |                            |
| Mud Weight                          | 11.28 ppg                                 |                            |
| Assigned External Pressure:         | Fluid Gradients (w/ Pore Pressure)        |                            |
| <b>Drilling Load:</b>               | <b>Gas Kick Profile</b>                   |                            |
| Influx Depth, MD:                   | 23361.00 ft                               |                            |
| Kick Volume:                        | 50.0 bbl                                  |                            |
| Kick Intensity                      | 0.50 ppg                                  |                            |
| Maximum Mud Weight:                 | 13.50 ppg                                 |                            |
| Kick Gas Gravity:                   | 0.55 (0.1159 psi/ft @ 182 °F & 9291 psi)  |                            |
| Fracture at Shoe (MD= 13111.00 ft): | 10591 psi                                 |                            |
| Drill Pipe OD:                      | 5.000 in                                  |                            |
| Collar OD:                          | 5.500 in                                  |                            |
| Collar Length:                      | 200.00 ft                                 |                            |
| Assigned External Pressure:         | Fluid Gradients (w/ Pore Pressure)        |                            |
| <b>Drilling Load:</b>               | <b>Pressure Test</b>                      |                            |
| Test Pressure:                      | 3120 psi                                  |                            |
| Mud Weight:                         | 10.00 ppg                                 |                            |
| Assigned External Pressure:         | Fluid Gradients (w/ Pore Pressure)        |                            |
| <b>Drilling Load:</b>               | <b>Green Cement Pressure Test</b>         |                            |
| Test Pressure:                      | 2000 psi                                  |                            |
| Mud Weight at Shoe:                 | 10.00 ppg                                 |                            |
| TOC, MD:                            | 25.00 ft                                  |                            |
| Lead Slurry Density:                | 13.30 ppg                                 |                            |
| Tail Slurry Density:                | 13.30 ppg                                 |                            |
| Tail Slurry Length:                 | 5906.00 ft                                |                            |
| Displacement Fluid Density:         | 10.00 ppg                                 |                            |
| Float Collar Depth, MD:             | 12800.00 ft                               |                            |
| <b>External Pressure:</b>           | <b>Fluid Gradients (w/ Pore Pressure)</b> |                            |
| TOC, MD:                            | 25.00 ft                                  |                            |
| Prior Shoe, MD:                     | 1200.00 ft                                |                            |
| Mud Weight Above TOC:               | 10.00 ppg                                 |                            |
| Fluid Gradient Below TOC:           | 8.33 ppg                                  |                            |
| Wellhead Pressure:                  | 13 psi                                    |                            |
| Pore Pressure In Open Hole:         | Yes                                       |                            |





## Oxy Blanket Design - Casing Design "A"



### Collapse Load Cases

| General                                       |  | 7 5/8" Intermediate Casing                |
|-----------------------------------------------|--|-------------------------------------------|
| Collapse Loads Data                           |  |                                           |
| <b>Drilling Load:</b>                         |  | <b>Cementing</b>                          |
| Mud Weight at Shoe:                           |  | 10.00 ppg                                 |
| TOC, MD:                                      |  | 25.00 ft                                  |
| Lead Slurry Density:                          |  | 13.30 ppg                                 |
| Tail Slurry Density:                          |  | 13.30 ppg                                 |
| Tail Slurry Length:                           |  | 5906.00 ft                                |
| Displacement Fluid Density:                   |  | 10.00 ppg                                 |
| Float Collar Depth, MD:                       |  | 12800.00 ft                               |
| Assigned External Pressure:                   |  | Fluid Gradients (w/ Pore Pressure)        |
| <b>Drilling Load:</b>                         |  | <b>Lost Returns with Mud Drop</b>         |
| Lost Returns Depth, MD:                       |  | 13110.89 ft                               |
| Pore Pressure at Lost Returns Depth:          |  | 8183 psi                                  |
| Pore Pressure Gradient at Lost Returns Depth: |  | 12.33 ppg                                 |
| Mud Weight:                                   |  | 13.50 ppg                                 |
| Mud Drop Level, MD:                           |  | 1106.39 ft                                |
| Assigned External Pressure:                   |  | Fluid Gradients (w/ Pore Pressure)        |
| <b>External Pressure:</b>                     |  | <b>Fluid Gradients (w/ Pore Pressure)</b> |
| TOC, MD:                                      |  | 25.00 ft                                  |
| Prior Shoe, MD:                               |  | 1200.00 ft                                |
| Fluid Gradient Above TOC:                     |  | 10.00 ppg                                 |
| Fluid Gradient Below TOC:                     |  | 10.00 ppg                                 |
| Wellhead Pressure:                            |  | 13 psi                                    |
| Pore Pressure In Open Hole Below TOC:         |  | No                                        |

### Axial Load Cases

| General                     |  | 7 5/8" Intermediate Casing |
|-----------------------------|--|----------------------------|
| Axial Loads Data            |  |                            |
| Overpull Force:             |  | 100000 lbf                 |
| Pre-Cement Static Load:     |  | Yes                        |
| Pickup Force:               |  | 0 lbf                      |
| Post-Cement Static Load:    |  | Yes                        |
| Green Cement Pressure Test: |  | 2000 psi                   |
| Service Loads:              |  | Yes                        |



## Oxy Blanket Design - Casing Design "A"



### 9. Landmark StressCheck Screenshot – Int. Casing Triaxial Results Table (Pressure Test)

StressCheck - [Triaxial Results - Blanket Design A1 \*]

File Edit Wellbore Tubular View Composer Tools Window Help

7 5/8" Intermediate Casing

Pressure Test

|    | Depth (MD)<br>(ft) | Axial Force (lbf)       |                         | Equivalent<br>Axial Load<br>(lbf) | Bending<br>Stress<br>at OD (psi) | Absolute Safety Factor |       |                 |        | Temperature<br>("F) | Pressure (psi) |          | Add'l Pickup To<br>Prevent Buck. (lbf) | Buckled<br>Length (ft) |
|----|--------------------|-------------------------|-------------------------|-----------------------------------|----------------------------------|------------------------|-------|-----------------|--------|---------------------|----------------|----------|----------------------------------------|------------------------|
|    |                    | Apparent<br>(w/Bending) | Actual<br>(w/o Bending) |                                   |                                  | Triaxial               | Burst | Collapse<br>(V) | Axial  |                     | Internal       | External |                                        |                        |
| 28 | 12300              | -142410                 | -17423                  | -94936                            | 16622.5                          | 1.79                   | 2.10  | N/A             | (4.09) | 178                 | 9505           | 6732     |                                        |                        |
| 29 | 12400              | -149639                 | -24652                  | -100590                           | 16622.5                          | 1.87                   | 2.25  | N/A             | (3.89) | 179                 | 9555           | 6970     |                                        |                        |
| 30 | 12400              | -149640                 | -24653                  | -100591                           | 16622.5                          | 1.87                   | 2.25  | N/A             | (3.89) | 179                 | 9555           | 6970     |                                        |                        |
| 31 | 12500              | -156448                 | -31461                  | -105919                           | 16622.5                          | 1.95                   | 2.42  | N/A             | (3.72) | 180                 | 9603           | 7193     |                                        |                        |
| 32 | 12500              | -156449                 | -31462                  | -105920                           | 16622.5                          | 1.95                   | 2.42  | N/A             | (3.72) | 180                 | 9603           | 7193     |                                        |                        |
| 33 | 12550              | -159630                 | -34643                  | -108410                           | 16622.5                          | 1.99                   | 2.50  | N/A             | (3.64) | 180                 | 9625           | 7298     |                                        |                        |
| 34 | 12550              | -159631                 | -34644                  | -108411                           | 16622.5                          | 1.99                   | 2.50  | N/A             | (3.64) | 180                 | 9625           | 7298     |                                        |                        |
| 35 | 12600              | -162630                 | -37643                  | -110759                           | 16622.5                          | 2.03                   | 2.59  | N/A             | (3.58) | 180                 | 9646           | 7396     |                                        |                        |
| 36 | 12600              | -162631                 | -37644                  | -110760                           | 16622.5                          | 2.03                   | 2.59  | N/A             | (3.58) | 180                 | 9646           | 7396     |                                        |                        |
| 37 | 12650              | -165426                 | -40439                  | -112949                           | 16622.5                          | 2.07                   | 2.67  | N/A             | (3.52) | 181                 | 9665           | 7488     |                                        |                        |
| 38 | 12650              | -165427                 | -40440                  | -112950                           | 16622.5                          | 2.07                   | 2.67  | N/A             | (3.52) | 181                 | 9665           | 7488     |                                        |                        |
| 39 | 12700              | -167997                 | -43010                  | -114963                           | 16622.5                          | 2.10                   | 2.76  | N/A             | (3.46) | 181                 | 9683           | 7573     |                                        |                        |
| 40 | 12700              | -167998                 | -43011                  | -114963                           | 16622.5                          | 2.10                   | 2.76  | N/A             | (3.46) | 181                 | 9683           | 7573     |                                        |                        |
| 41 | 12750              | -170322                 | -45335                  | -116784                           | 16622.5                          | 2.13                   | 2.84  | N/A             | (3.41) | 181                 | 9699           | 7649     |                                        |                        |
| 42 | 12750              | -170323                 | -45336                  | -116785                           | 16622.5                          | 2.13                   | 2.84  | N/A             | (3.41) | 181                 | 9699           | 7649     |                                        |                        |
| 43 | 12800              | -172385                 | -47398                  | -118401                           | 16622.5                          | 2.16                   | 2.91  | N/A             | (3.37) | 181                 | 9714           | 7717     |                                        |                        |
| 44 | 12800              | -172386                 | -47399                  | -118401                           | 16622.5                          | 2.16                   | 2.91  | N/A             | (3.37) | 181                 | 9714           | 7717     |                                        |                        |
| 45 | 12850              | -174169                 | -49183                  | -119799                           | 16622.5                          | 2.19                   | 2.98  | N/A             | (3.34) | 182                 | 9726           | 7775     |                                        |                        |
| 46 | 12850              | -174170                 | -49183                  | -119800                           | 16622.5                          | 2.19                   | 2.98  | N/A             | (3.34) | 182                 | 9726           | 7775     |                                        |                        |
| 47 | 12900              | -175662                 | -50675                  | -120969                           | 16622.5                          | 2.21                   | 3.04  | N/A             | (3.31) | 182                 | 9736           | 7824     |                                        |                        |
| 48 | 12950              | -176851                 | -51864                  | -121901                           | 16622.5                          | 2.23                   | 3.09  | N/A             | (3.29) | 182                 | 9745           | 7863     |                                        |                        |
| 49 | 13000              | -177727                 | -52740                  | -122588                           | 16622.5                          | 2.24                   | 3.13  | N/A             | (3.27) | 182                 | 9751           | 7892     |                                        |                        |
| 50 | 13000              | -177728                 | -52741                  | -122588                           | 16622.5                          | 2.24                   | 3.13  | N/A             | (3.27) | 182                 | 9751           | 7892     |                                        |                        |
| 51 | 13050              | -178285                 | -53298                  | -123025                           | 16622.5                          | 2.25                   | 3.15  | N/A             | (3.26) | 182                 | 9755           | 7910     |                                        |                        |
| 52 | 13111              | -178527                 | -53540                  | -123214                           | 16622.5                          | 2.25                   | 3.16  | N/A             | (3.26) | 182                 | 9756           | 7918     |                                        |                        |
| 53 |                    |                         |                         |                                   |                                  |                        |       |                 |        |                     |                |          |                                        |                        |
| 54 |                    |                         |                         |                                   |                                  |                        |       |                 |        |                     |                |          |                                        |                        |
| 55 |                    |                         |                         |                                   |                                  |                        |       |                 |        |                     |                |          |                                        |                        |
| 56 |                    |                         |                         |                                   |                                  |                        |       |                 |        |                     |                |          |                                        |                        |

( ) Compression  
(V) Vector Collapse Safety Factor

Internal Pressure = Surface Pressure + Hydrostatic = 9756 psi

External Pressure = Fluid Gradient w/ Pore Pressure = 7918 psi

Burst SF = 3.16

NOTE: Specific load case inputs for the pressure test can be seen in **Section 8** above. The test pressure does not exceed 70% of the minimum internal yield.



## Oxy Blanket Design - Casing Design "A"



### 10. Intermediate Non-API Casing Spec Sheet



## Technical Data Sheet

7 5/8" 26.40 lbs/ft. L80HC - Axis HT

### Mechanical Properties

|                          |      |        |
|--------------------------|------|--------|
| Minimum Yield Strength   | psi. | 80,000 |
| Maximum Yield Strength   | psi. | 95,000 |
| Minimum Tensile Strength | psi. | 95,000 |

### Dimensions

|                       |         | Pipe  | AXIS HT |
|-----------------------|---------|-------|---------|
| Outside Diameter      | in.     | 7.625 | 8.500   |
| Wall Thickness        | in.     | 0.328 | -       |
| Inside Diameter       | in.     | 6.969 | -       |
| Standard Drift        | in.     | 6.844 | 6.844   |
| Alternate Drift       | in.     | -     | -       |
| Plain End Weight      | lbs/ft. | -     | -       |
| Nominal Linear Weight | lbs/ft. | 26.40 | -       |

### Performance

|                                  |      | Pipe        | AXIS HT     |
|----------------------------------|------|-------------|-------------|
| Minimum Collapse Pressure        | psi. | 4,320       | -           |
| Minimum Internal Yield Pressure  | psi. | 6,020       | 6,020       |
| Minimum Pipe Body Yield Strength | lbs. | 602 x 1,000 | -           |
| Joint Strength                   | lbs. | -           | 635 x 1,000 |

### Make-Up Torques

|                            |         | Pipe | AXIS HT |
|----------------------------|---------|------|---------|
| Optimum Make-Up Torque     | ft/lbs. | -    | 8,000   |
| Maximum Operational Torque | ft/lbs. | -    | 25,000  |

Disclaimer: The content of this Technical Data Sheet is for general information only and does not guarantee performance and/or accuracy, which can only be determined by a professional expert with the specific installation and operation parameters. Information printed or downloaded may not be current and no longer in control by Axis Pipe and Tube. Anyone using the information herein does so at his or her own risk. To verify that you have the latest technical information, please contact Axis Pipe and Tube Technical Sales +1 (979) 599-7600, [www.axispipeandtube.com](http://www.axispipeandtube.com)



# Oxy Blanket Design - Casing Design "A"



## 11. Production Non-API Casing Spec Sheets

Printed on: 11/09/2021

### TenarisHydril Wedge 461<sup>®</sup> MS



| Coupling             | Pipe Body            |
|----------------------|----------------------|
| Grade: P110-4CY      | Grade: P110-4CY      |
| Body: White          | 1st Band: White      |
| 1st Band: Pale Green | 2nd Band: Pale Green |
| 2nd Band: -          | 3rd Band: Pale Green |
| 3rd Band: -          | 4th Band: -          |
|                      | 5th Band: -          |
|                      | 6th Band: -          |

|                      |           |                 |              |       |          |
|----------------------|-----------|-----------------|--------------|-------|----------|
| Outside Diameter     | 5.500 in. | Wall Thickness  | 0.361 in.    | Grade | P110-4CY |
| Min. Wall Thickness  | 87.50 %   | Pipe Body Drift | API Standard | Type  | Casing   |
| Connection OD Option | MS        |                 |              |       |          |

### Pipe Body Data

| Geometry       |           | Performance                  |              |
|----------------|-----------|------------------------------|--------------|
| Nominal OD     | 5.500 in. | Wall Thickness               | 0.361 in.    |
| Nominal Weight | 20 lb/ft  | Plain End Weight             | 19.83 lb/ft  |
| Drift          | 4.653 in. | OD Tolerance                 | API          |
| Nominal ID     | 4.778 in. |                              |              |
|                |           | Body Yield Strength          | 729 x1000 lb |
|                |           | Min. Internal Yield Pressure | 14,360 psi   |
|                |           | SMYS                         | 125,000 psi  |
|                |           | Collapse Pressure            | 12,300 psi   |

### Connection Data

| Geometry             |           | Performance                |              | Make-Up Torques         |              |
|----------------------|-----------|----------------------------|--------------|-------------------------|--------------|
| Connection OD        | 6.050 in. | Tension Efficiency         | 100 %        | Minimum                 | 17,000 ft-lb |
| Coupling Length      | 7.714 in. | Joint Yield Strength       | 729 x1000 lb | Optimum                 | 18,000 ft-lb |
| Connection ID        | 4.778 in. | Internal Pressure Capacity | 14,360 psi   | Maximum                 | 21,600 ft-lb |
| Make-up Loss         | 3.775 in. | Compression Efficiency     | 100 %        |                         |              |
| Threads per inch     | 3.40      | Compression Strength       | 729 x1000 lb | Operation Limit Torques |              |
| Connection OD Option | Ms        | Max. Allowable Bending     | 104 °/100 ft | Operating Torque        | 43,000 ft-lb |
|                      |           | External Pressure Capacity | 12,300 psi   | Yield Torque            | 51,000 ft-lb |
|                      |           | Coupling Face Load         | 273,000 lb   |                         |              |
|                      |           |                            |              | Buck-On                 |              |
|                      |           |                            |              | Minimum                 | 21,600 ft-lb |
|                      |           |                            |              | Maximum                 | 23,100 ft-lb |

### Notes

This connection is fully interchangeable with:  
 Wedge 441® - 5.5 in. - 0.304 / 0.361 in.  
 Wedge 461® - 5.5 in. - 0.304 / 0.415 / 0.476 in.  
 Connections with Dopeless® Technology are fully compatible with the same connection in its Standard version  
 In October 2019, TenarisHydril Wedge XP® 2.0 was renamed TenarisHydril Wedge 461™. Product dimensions and properties remain identical and both connections are fully interchangeable

For the latest performance data, always visit our website: [www.tenaris.com](http://www.tenaris.com)

Tenaris has issued this document for general information only, and the information in this document, including, without limitation, any pictures, drawings or designs ("Information") is not intended to constitute professional or any other type of advice or recommendation and is provided on an "as is" basis. No warranty is given. Tenaris has not independently verified any information – if any – provided by the user in connection with, or for the purpose of, the Information contained hereunder. The use of the Information is at user's own risk and Tenaris does not assume any responsibility or liability of any kind for any loss, damage or injury resulting from, or in connection with any Information contained hereunder or any use thereof. The Information in this document is subject to change or modification without notice. Tenaris's products and services are subject to Tenaris's standard terms and conditions or otherwise to the terms resulting from the respective contracts of sale or services, as the case may be, between petitioner and Tenaris. For more complete information please contact a Tenaris's representative or visit our website at [www.tenaris.com](http://www.tenaris.com). ©Tenaris 2021. All rights reserved.





Oxy Blanket Design - Casing Design "A"




Generated on May 21, 2024



CONNECTION DATA SHEET

OD: 5.500 in.      Grade: P110  
Weight: 20.00 lb/ft      Drift: 4.653 in. (API)  
Wall Th.: 0.361 in.

VAM® SPRINT-SF

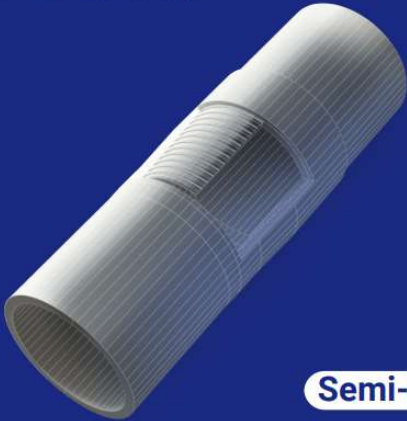

Semi-Flush

Field Torque Values

Make-up Torque (ft-lb)

20,000 MIN  
22,500 OPTI  
25,000 MAX

Torque with Sealability (ft-lb)

36,000 MTS

Locked Flank Torque (ft-lb)

4,500 MIN  
15,750 MAX

(2) MTS: Maximum Torque with Sealability.

PIPE BODY PROPERTIES

|                                   |         |       |
|-----------------------------------|---------|-------|
| Nominal OD                        | 5.500   | in.   |
| Nominal ID                        | 4.778   | in.   |
| Nominal Wall Thickness            | 0.361   | in.   |
| Minimum Wall Thickness            | 87.5    | %     |
| Nominal Weight (API)              | 20.00   | lb/ft |
| Plain End Weight                  | 19.83   | lb/ft |
| Drift                             | 4.653   | in.   |
| Grade Type                        | API 5CT |       |
| Minimum Yield Strength            | 110     | ksi   |
| Maximum Yield Strength            | 140     | ksi   |
| Minimum Ultimate Tensile Strength | 125     | ksi   |
| Pipe Body Yield Strength          | 641     | klb   |
| Internal Yield Pressure           | 12,640  | psi   |
| Collapse Pressure                 | 11,100  | psi   |

CONNECTION PROPERTIES

|                              |                                |             |
|------------------------------|--------------------------------|-------------|
| Connection Type              | Semi-Premium Integral Semi-Flu |             |
| Nominal Connection OD        | 5.783                          | in.         |
| Nominal Connection ID        | 4.718                          | in.         |
| Make-up Loss                 | 5.965                          | in.         |
| Tension Efficiency           | 90                             | % Pipe Body |
| Compression Efficiency       | 90                             | % Pipe Body |
| Internal Pressure Efficiency | 100                            | % Pipe Body |
| External Pressure Efficiency | 100                            | % Pipe Body |

JOINT PERFORMANCES

|                                      |        |          |
|--------------------------------------|--------|----------|
| Tension Strength                     | 577    | klb      |
| Compression Strength                 | 577    | klb      |
| Internal Pressure Resistance         | 12,640 | psi      |
| External Pressure Resistance         | 11,100 | psi      |
| Maximum Bending, Structural          | 78     | °/100 ft |
| Maximum Bending, with Sealability(1) | 30     | °/100 ft |

(1) Sealability rating demonstrated as per API RP 5C5 / ISO 13679



BOOST YOUR EFFICIENCY, REDUCE COSTS  
AND ENSURE 100% WELL INTEGRITY WITH  
VAM® FIELD SERVICE

Scan the QR code  
to contact us



The information available on this Site ("Information") is offered for general information. It is supposed to be correct at the time of publishing on the Site but is not intended to constitute professional advice and is provided 'as is'. Vallourec does not guarantee the completeness and accuracy of this information. Under no circumstances will Vallourec be liable for damage, liability of any kind, or any loss or injury that may result from the credibility given to this information or its use. The information may be amended, corrected, at any time by Vallourec without warning. Vallourec's products and services are subject to Vallourec's The Information may be amended, corrected, and/or supplemented at any time by Vallourec without warning, standard terms and conditions or otherwise to the terms resulting from the respective contracts of sale or services.



Oxy Blanket Design - Casing Design "A"



DWC/C-HT-IS

Connection Data Sheet

| OD (in.) | WEIGHT (lbs./ft.)                  | WALL (in.) | GRADE       | API DRIFT (in.) | RBW% | CONNECTION  |
|----------|------------------------------------|------------|-------------|-----------------|------|-------------|
| 5.500    | Nominal: 20.00<br>Plain End: 19.83 | 0.361      | ‡VST P110MY | 4.653           | 87.5 | DWC/C-HT-IS |

| PIPE PROPERTIES              |         |        |
|------------------------------|---------|--------|
| Nominal OD                   | 5.500   | in.    |
| Nominal ID                   | 4.778   | in.    |
| Nominal Area                 | 5.828   | sq.in. |
| Grade Type                   | API 5CT |        |
| Min. Yield Strength          | 125     | ksi    |
| Max. Yield Strength          | 140     | ksi    |
| Min. Tensile Strength        | 135     | ksi    |
| Yield Strength               | 729     | klb    |
| Ultimate Strength            | 787     | klb    |
| Min. Internal Yield Pressure | 14,360  | psi    |
| Collapse Pressure            | 12,090  | psi    |

| CONNECTION PROPERTIES        |                  |
|------------------------------|------------------|
| Connection Type              | Semi-Premium T&C |
| Connection OD (nom)          | 6.050 in.        |
| Connection ID (nom)          | 4.778 in.        |
| Make-Up Loss                 | 4.125 in.        |
| Coupling Length              | 9.250 in.        |
| Critical Cross Section       | 5.828 sq.in.     |
| Tension Efficiency           | 89.1% of pipe    |
| Compression Efficiency       | 88.0% of pipe    |
| Internal Pressure Efficiency | 86.1% of pipe    |
| External Pressure Efficiency | 100.0% of pipe   |

| CONNECTION PERFORMANCES                     |        |          |
|---------------------------------------------|--------|----------|
| Yield Strength                              | 649    | klb      |
| Parting Load                                | 729    | klb      |
| Compression Rating                          | 641    | klb      |
| Min. Internal Yield Pressure                | 12,360 | psi      |
| External Pressure Resistance                | 12,090 | psi      |
| Maximum Uniaxial Bend Rating                | 91.7   | °/100 ft |
| Reference String Length w 1.4 Design Factor | 22,890 | ft.      |

| FIELD TORQUE VALUES            |             |
|--------------------------------|-------------|
| Min. Make-up torque            | 16,600 ftlb |
| Opti. Make-up torque           | 17,950 ftlb |
| Max. Make-up torque            | 19,300 ftlb |
| Min. Shoulder Torque           | 1,660 ftlb  |
| Max. Shoulder Torque           | 13,280 ftlb |
| Max. Delta Turn                | 0.200 Turns |
| ‡Maximum Operational Torque    | 23,800 ftlb |
| ‡Maximum Torsional Value (MTV) | 26,180 ftlb |

‡ Maximum Operational Torque and Maximum Torsional Value only valid with Vallourec P110MY Material.  
‡ P110MY - Coupling Min Yield Strength is 110ksi and Coupling Max Yield is 125ksi.

"VST = Vallourec Star as the mill source for the pipe, "P110EC" is the grade name"

Need Help? Contact: [tech.support@vam-usa.com](mailto:tech.support@vam-usa.com)

For detailed information on performance properties, refer to DWC Connection Data Notes on following page(s).

Connection specifications within the control of VAM USA were correct as of the date printed. Specifications are subject to change without notice. Certain connection specifications are dependent on the mechanical properties of the pipe. Mechanical properties of mill proprietary pipe grades were obtained from mill publications and are subject to change. Properties of mill proprietary grades should be confirmed with the mill. Users are advised to obtain current connection specifications and verify pipe mechanical properties for each application.

All information is provided by VAM USA or its affiliates at user's sole risk, without liability for loss, damage or injury resulting from the use thereof; and on an "AS IS" basis without warranty or representation of any kind, whether express or implied, including without limitation any warranty of merchantability, fitness for purpose or completeness. This document and its contents are subject to change without notice. In no event shall VAM USA or its affiliates be responsible for any indirect, special, incidental, punitive, exemplary or consequential loss or damage (including without limitation, loss of use, loss of bargain, loss of revenue, profit or anticipated profit) however caused or arising, and whether such losses or damages were foreseeable or VAM USA or its affiliates was advised of the possibility of such damages.

03/04/2024 08:36:50 PM





## Oxy Blanket Design - Casing Design "A"



VAM USA  
2107 CityWest Boulevard Suite 1300  
Houston, TX 77042  
Phone: 713-479-3200  
Fax: 713-479-3234  
VAM® USA Sales E-mail: [VAMUSAsales@vam-usa.com](mailto:VAMUSAsales@vam-usa.com)  
Tech Support Email: [tech.support@vam-usa.com](mailto:tech.support@vam-usa.com)

### DWC Connection Data Sheet Notes:

1. DWC connections are available with a seal ring (SR) option.
2. All standard DWC/C connections are interchangeable for a given pipe OD. DWC connections are interchangeable with DWC/C-SR connections of the same OD and wall.
3. Connection performance properties are based on nominal pipe body and connection dimensions.
4. DWC connection internal and external pressure resistance is calculated using the API rating for buttress connections. API Internal pressure resistance is calculated from formulas 31, 32, and 35 in the API Bulletin 5C3.
5. DWC joint strength is the minimum pipe body yield strength multiplied by the connection critical area.
6. API joint strength is for reference only. It is calculated from formulas 42 and 43 in the API Bulletin 5C3.
7. Bending efficiency is equal to the compression efficiency.
8. The torque values listed are recommended. The actual torque required may be affected by field conditions such as temperature, thread compound, speed of make-up, weather conditions, etc.
9. Connection yield torque is not to be exceeded.
10. Reference string length is calculated by dividing the joint strength by both the nominal weight in air and a design factor (DF) of 1.4. These values are offered for reference only and do not include load factors such as bending, buoyancy, temperature, load dynamics, etc.
11. DWC connections will accommodate API standard drift diameters.
12. DWC/C family of connections are compatible with API Buttress BTC connections. Please contact [tech.support@vam-usa.com](mailto:tech.support@vam-usa.com) for details on connection ratings and make-up.

Connection specifications within the control of VAM USA were correct as of the date printed. Specifications are subject to change without notice. Certain connection specifications are dependent on the mechanical properties of the pipe. Mechanical properties of mill proprietary pipe grades were obtained from mill publications and are subject to change. Properties of mill proprietary grades should be confirmed with the mill. Users are advised to obtain current connection specifications and verify pipe mechanical properties for each application.

All information is provided by VAM USA or its affiliates at user's sole risk, without liability for loss, damage or injury resulting from the use thereof; and on an "AS IS" basis without warranty or representation of any kind, whether express or implied, including without limitation any warranty of merchantability, fitness for purpose or completeness. This document and its contents are subject to change without notice. In no event shall VAM USA or its affiliates be responsible for any indirect, special, incidental, punitive, exemplary or consequential loss or damage (including without limitation, loss of use, loss of bargain, loss of revenue, profit or anticipated profit) however caused or arising, and whether such losses or damages were foreseeable or VAM USA or its affiliates was advised of the possibility of such damages.

03/04/2024 08:36:50 PM



**OXY USA Inc**  
**APD ATTACHMENT: SPUDDER RIG DATA**

**OPERATOR NAME / NUMBER:** OXY USA Inc

**1. SUMMARY OF REQUEST:**

Oxy USA respectfully requests approval for the following operations for the surface hole in the drill plan:


1. Utilize a spudder rig to pre-set surface casing for time and cost savings.

**2. Description of Operations**

1. Spudder rig will move in to drill the surface hole and pre-set surface casing on the well.
  - a. After drilling the surface hole section, the spudder rig will run casing and cement following all of the applicable rules and regulations (43 CFR part 3170 Subpart 3172, all COAs and NMOCD regulations).
  - b. The spudder rig will utilize fresh water-based mud to drill the surface hole to TD. Solids control will be handled entirely on a closed loop basis. No earth pits will be used.
2. The wellhead will be installed and tested as soon as the surface casing is cut off and the WOC time has been reached.
3. A blind flange at the same pressure rating as the wellhead will be installed to seal the wellbore. Pressure will be monitored with needle valves installed on two wingvalves.
  - a. A means for intervention will be maintained while the drilling rig is not over the well.
4. Spudder rig operations are expected to take 2-3 days per well on the pad.
5. The BLM will be contacted and notified 24 hours prior to commencing spudder rig operations.
6. Drilling operations will begin with a larger rig and a BOP stack equal to or greater than the pressure rating that was permitted will be nipped up and tested on the wellhead before drilling operations resume on each well.
  - a. The larger rig will move back onto the location within 90 days from the point at which the wells are secured and the spudder rig is moved off location.
  - b. The BLM will be contacted / notified 24 hours before the larger rig moves back on the pre-set locations.
7. Oxy will have supervision on the rig to ensure compliance with all BLM and NMOCD regulations and to oversee operations.
8. Once the rig is removed, Oxy will secure the wellhead area by placing a guard rail around the cellar area.



# Spudder Rig Layout

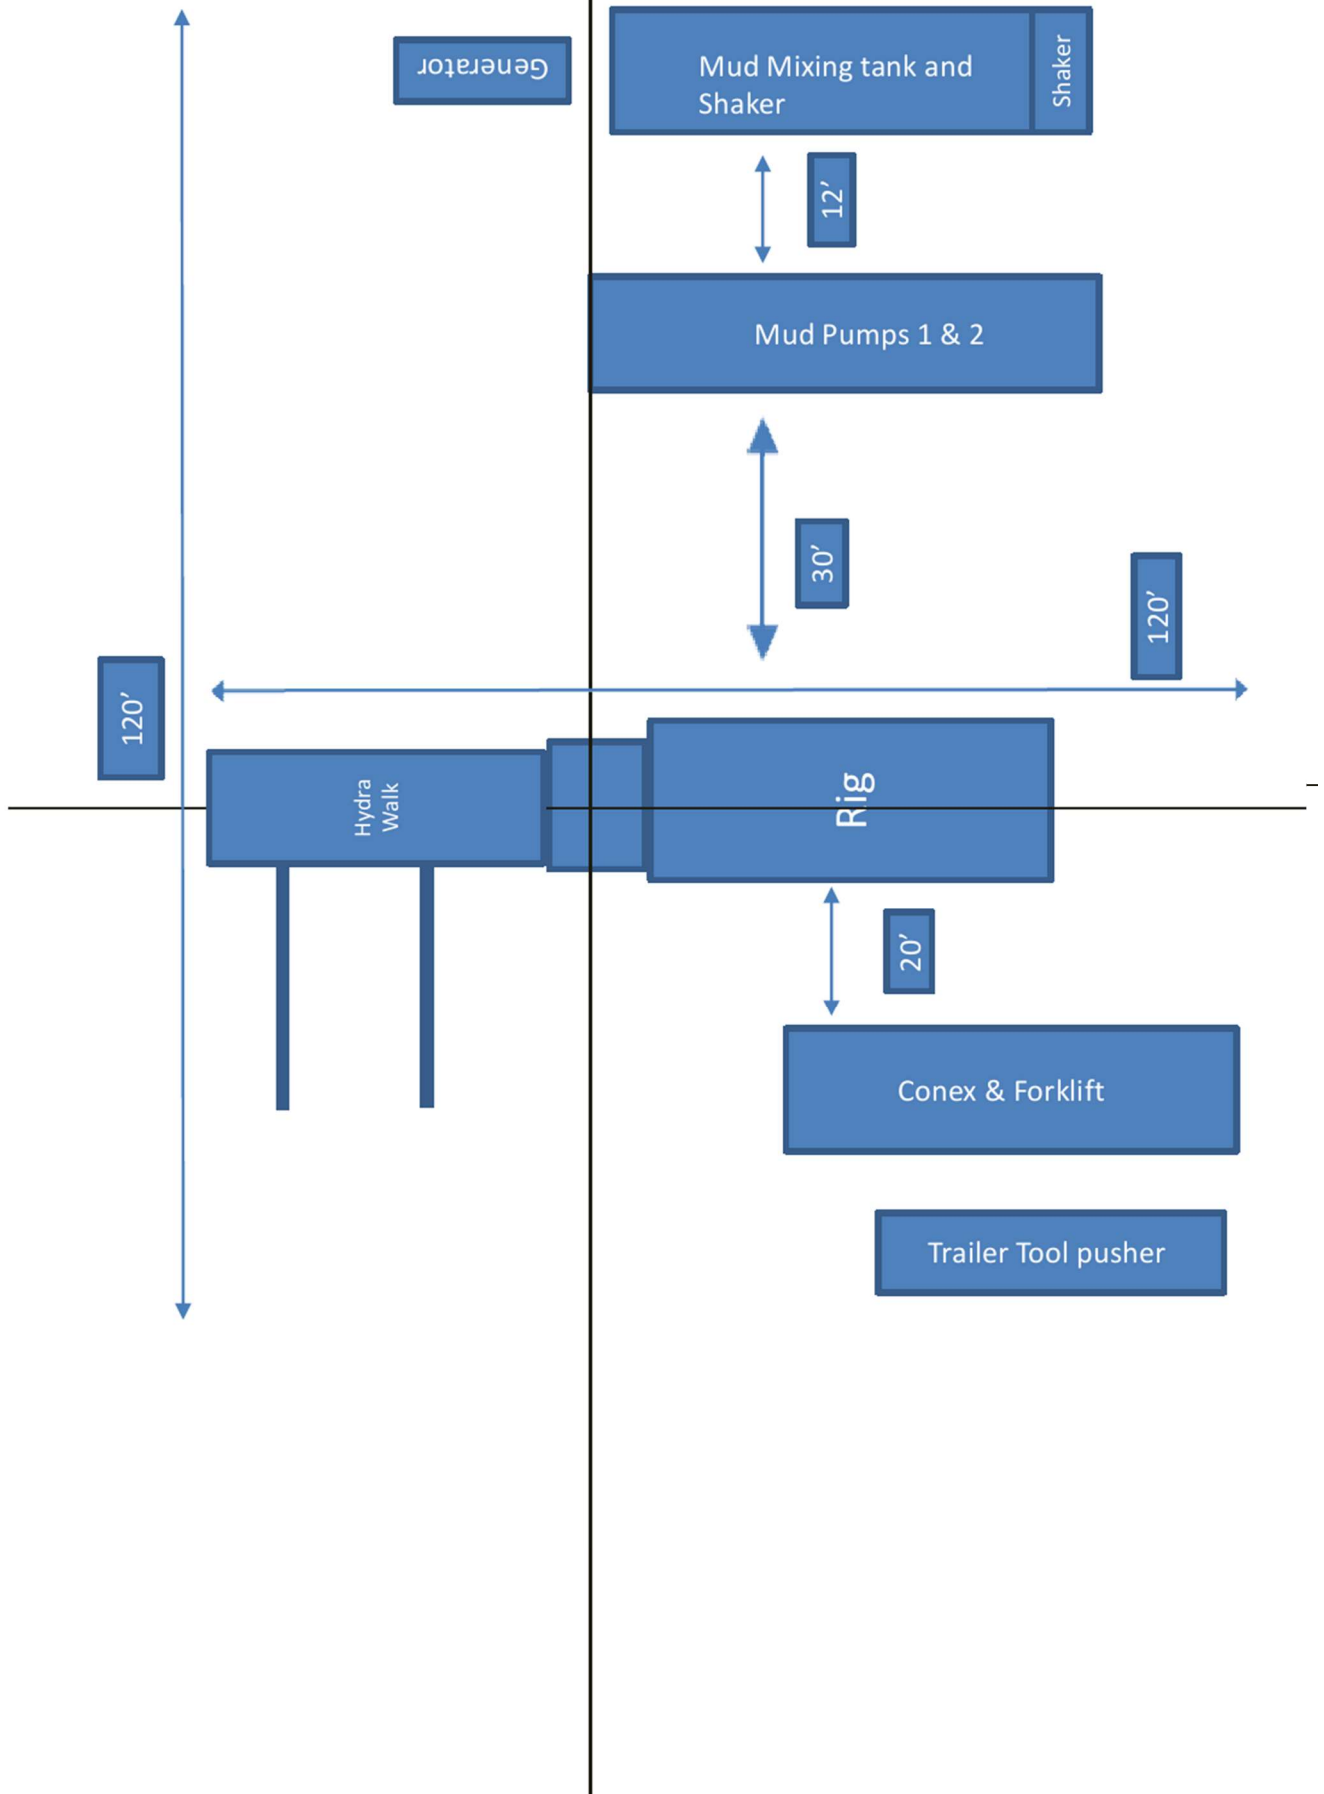

## 5M Annular BOP Variance Request

Per BLM's Memorandum No. NM-2017-008: *Decision and Rationale for a Variance Allowing the Use of a 5M Annular Preventer with a 10M BOP Stack*, Oxy requests to employ a 5M annular with a 10M BOPE stack in the pilot and lateral sections of the well and will ensure that two barriers to flow are maintained at all times. Please see Well Control Plan below.

### Oxy Well Control Plan

#### A. Component and Preventer Compatibility Table

The table below, which covers the drilling and casing of the >5M MASP portion of the well, outlines the tubulars and the compatible preventers in use. This table, combined with the mud program, documents that two barriers to flow can be maintained at all times, independent of the rating of the annular preventer.

Pilot hole and Lateral sections, 10M requirement

| Component                   | OD              | Preventer                                            | RWP |
|-----------------------------|-----------------|------------------------------------------------------|-----|
| Drillpipe                   | 4-1/2"-5"       | Lower 3-1/2 - 5-1/2" VBR<br>Upper 3-1/2 - 5-1/2" VBR | 10M |
| HWDP                        | 4-1/2"-5"       | Lower 3-1/2 - 5-1/2" VBR<br>Upper 3-1/2 - 5-1/2" VBR | 10M |
| Drill collars and MWD tools | 4-3/4" – 5-1/2" | Lower 3-1/2 - 5-1/2" VBR<br>Upper 3-1/2 - 5-1/2" VBR | 10M |
| Mud Motor                   | 4-3/4"          | Lower 3-1/2 - 5-1/2" VBR<br>Upper 3-1/2 - 5-1/2" VBR | 10M |
| Production casing           | 5-1/2"          | Lower 3-1/2 - 5-1/2" VBR<br>Upper 3-1/2 - 5-1/2" VBR | 10M |
| ALL                         | 0" - 13-5/8"    | Annular                                              | 5M  |
| Open-hole                   | 6-3/4"          | Blind Rams                                           | 10M |

VBR = Variable Bore Ram. Compatible range listed in chart.

HWDP = Heavy Weight Drill Pipe

MWD = Measurement While Drilling

#### B. Well Control Procedures

Well control procedures are specific to the rig equipment and the operation at the time the kick occurs. Below are the minimal high-level tasks prescribed to assure a proper shut-in while drilling, tripping, running casing, pipe out of the hole (open hole), and moving the Bottom Hole Assembly (BHA) through the Blowout Preventers (BOP). The pressure at which control is swapped from the annular to another compatible ram will occur when the anticipated pressure is approaching or envisioned to exceed 70% of the 5M annular Rated Working Pressure (RWP) or 3500 PSI.

#### General Procedure While Drilling

1. Sound alarm (alert crew)
2. Space out drill string
3. Shut down pumps (stop pumps and rotary)
4. Shut-in Well (uppermost applicable BOP, typically annular preventer first. The Hydraulic Control Remote (HCR) valve and choke will already be in the closed position).
5. Confirm shut-in
6. Notify tool pusher/company representative
7. Read and record the following:
  - a. SIDPP and SICP
  - b. Pit gain
  - c. Time
8. Regroup and identify forward plan
9. If pressure has built or expected to reach 70% of the annular RWP during kill operations, crew will reconfirm spacing and swap to the upper pipe ram

#### General Procedure While Tripping

1. Sound alarm (alert crew)
2. Stab full opening safety valve and close
3. Space out drill string
4. Shut-in (uppermost applicable BOP, typically annular preventer first. The HCR and choke will already be in the closed position)
5. Confirm shut-in
6. Notify tool pusher/company representative
7. Read and record the following
  - a. SIDPP and SICP
  - b. Pit gain
  - c. Time
  - d. Regroup and identify forward plan
  - e. If pressure has built or is anticipated during the kill to reach the RWP of the annular preventer, confirm spacing and swap to the upper pipe ram

#### General Procedure While Running Casing

1. Sound alarm (alert crew)
2. Stab crossover and full opening safety valve and close
3. Space out string
4. Shut-in (uppermost applicable BOP, typically annular preventer first. The HCR and choke will already be in the closed position).
5. Confirm shut-in
6. Notify tool pusher/company representative
7. Read and record the following:
  - a. SIDPP and SICP
  - b. Pit gain
  - c. Time
  - d. Regroup and identify forward plan.
  - e. If pressure has built or is anticipated during the kill to reach the RWP of the annular preventer, confirm spacing and swap to compatible pipe ram.



General Procedure With No Pipe In Hole (Open Hole)

1. Sound alarm (alert crew)
2. Shut-in with blind rams or BSR. (The HCR and choke will already be in the closed position)
3. Confirm shut-in
4. Notify tool pusher/company representative
5. Read and record the following:
  - a. SICP
  - b. Pit gain
  - c. Time
6. Regroup and identify forward plan

General Procedures While Pulling BHA thru Stack

1. PRIOR to pulling last joint of drill pipe thru the stack.
  - a. Perform flow check, if flowing:
  - b. Sound alarm (alert crew)
  - c. Stab full opening safety valve and close
  - d. Space out drill string with tool joint just beneath the upper pipe ram
  - e. Shut-in using upper pipe ram. (The HCR and choke will already be in the closed position)
  - f. Confirm shut-in
  - g. Notify tool pusher/company representative
  - h. Read and record the following:
    - i. SIDPP and SICP
    - ii. Pit gain
    - iii. Time
    - iv. Regroup and identify forward plan
2. With BHA in the stack and compatible ram preventer and pipe combo immediately available.
  - a. Sound alarm (alert crew)
  - b. Stab crossover and full opening safety valve and close
  - c. Space out drill string with upset just beneath the compatible pipe ram
  - d. Shut-in using compatible pipe ram. (The HCR and choke will already be in the closed position.)
  - e. Confirm shut-in
  - f. Notify tool pusher/company representative
  - g. Read and record the following:
    - i. SIDPP and SICP
    - ii. Pit gain
    - iii. Time
    - iv. Regroup and identify forward plan
3. With BHA in the stack and NO compatible ram preventer and pipe combo immediately available.

- a. Sound alarm (alert crew)
- b. If possible to pick up high enough, pull string clear of the stack and follow “Open Hole” scenario
- c. If impossible to pick up high enough to pull the string clear of the stack
- d. Stab crossover, make up one joint/stand of drill pipe, and full opening safety valve and close
- e. Space out drill string with tool joint just beneath the upper pipe ram
- f. Shut-in using upper pipe ram. (The HCR and choke will already be in the closed position)
- g. Confirm shut-in
- h. Notify tool pusher/company representative
- i. Read and record the following:
  - i. SIDPP and SICP
  - ii. Pit gain
  - iii. Time
- j. Regroup and identify forward plan

## BOP Break Testing Request

Oxy requests permission to adjust the BOP break testing requirements as per the agreement reached in the OXY/BLM meeting on September 5, 2019.

BOP break test under the following conditions:

- After a full BOP test is conducted
- When skidding to drill an intermediate section where ICP is set into the third Bone Spring or shallower.
- When skidding to drill a production section that does not penetrate into the third Bone Spring or deeper.

If the kill line is broken prior to skid, two tests will be performed.

- 1) Wellhead flange, co-flex hose, kill line connections and upper pipe rams
- 2) Wellhead flange, HCR valve, check valve, upper pipe rams

If the kill line is not broken prior to skid, only one test will be performed.

- 1) Wellhead flange, co-flex hose, check valve, upper pipe rams

See supporting information below:

**Subject:** Request for a Variance Allowing Break Testing of a Blowout Preventer Stack

OXY USA Inc. (OXY) requests a variance to allow break testing of the Blowout Preventer (BOP) stack when skidding a drilling rig between wells on multi-well pads. This practice entails retesting only the connections of the **BOP** stack that have been disconnected during this operation and not a complete **BOP** test.

### Background

43 CFR part 3170 Subpart 3172 states that a **BOP** test must be performed whenever any seal subject to test pressure is broken. The current interpretation of the Bureau of Land Management (BLM) is this requires a complete **BOP** test and not just a test of the affected component. 43 CFR part 3170 Subpart 3172, Section I.D.2. states, "Some situations may exist either on a well-by-well basis or field-wide basis whereby it is commonly accepted practice to vary a particular minimum standard(s) established in this Order. This situation can be resolved by requesting a variance...". OXY feels the practice of break testing the **BOP** stack is such a situation. Therefore, as per 43 CFR part 3170 Subpart 3172, Section IV., OXY submits this request for the variance.

### Supporting Rationale

43 CFR part 3170 Subpart 3172 became effective on December 19, 1988, and has remained the standard for regulating BLM onshore drilling operations for almost 30 years. During this time there have been significant changes in drilling technology. **BLM** continues to use the variance request process to allow for the use of modern technology and acceptable engineering practices that have arisen since 43 CFR part 3170 Subpart 3172 was originally released. The drilling rig fleet OXY utilizes in New Mexico was built with many modern upgrades. One of which allows the rigs to skid between wells on multi-well pads. A part of this rig package is a hydraulic winch system which safely installs and removes the BOP from the wellhead and carries it during skidding operations. This technology has made break testing a safe and reliable procedure.

American Petroleum Institute (API) standards, specifications and recommended practices are considered industry standards and are consistently utilized and referenced by the industry. 43 CFR part 3170 Subpart 3172 recognized API Recommended Practices (RP) 53 in its original development. API Standard 53,

*Blowout Prevention Equipment Systems for Drilling Wells* (Fourth Edition, November 2012, Addendum 1, July 2016) recognizes break testing as an acceptable practice. Specifically, API Standard 53, Section 6.5.3.4.1.b states "Pressure tests on the well control equipment shall be conducted after the disconnection or repair of any pressure containment seal in the **BOP** stack, choke line, kill line, choke manifold, or wellhead assembly but limited to the affected component."

The Bureau of Safety and Environmental Enforcement (BSEE), Department of Interior, has also utilized the API standards, specifications and best practices in the development of its offshore oil and gas regulations and incorporates them by reference within its regulations. BSEE issued new offshore regulations under 30 CFR Part 250, *Oil and Gas and Sulphur Operations in the Outer Continental Shelf - Blowout Preventer Systems and Well Control*, which became effective on July 28, 2016. Section 250.737(d.1) states "Follow the testing requirements of API Standard 53". In addition, Section 250.737(d.8) has adopted language from **API** Standard 53 as it states "Pressure test affected **BOP** components following the disconnection or repair of any well-pressure containment seal in the wellhead or **BOP** stack assembly".

Break testing has been approved by the BLM in the past. See the Appendix for a Sundry Notice that was approved in 2015 by the Farmington Field Office. This approval granted permission for the operator to break test when skidding its Aztec 1000 rig on multi-well pads.

Oxy feels break testing and our current procedures meet the intent of 43 CFR part 3170 Subpart 3172 and often exceed it. We have not seen any evidence that break testing results in more components failing tests than seen on full BOP tests. As skidding operations take place within the 30-day full BOPE test window, the BOP shell and components such as the pipe rams and check valve get tested to the full rated working pressure more often. Therefore, there are more opportunities to ensure components are in good working order. Also, Oxy's standard requires complete BOP tests more often than that of 43 CFR part 3170 Subpart 3172. In addition to function testing the annular at least weekly and the pipe and blind rams on each trip, Oxy also performs a choke drill prior to drilling out every casing shoe. As a crew's training is a vital part of well control, this procedure to simulate step one of the Driller's Method exceeds the requirements of 43 CFR part 3170 Subpart 3172.

### Procedures

- 1) OXY to submit the break testing plan in the APD or Sundry Notice (SN) and receive approval prior to implementing (See Appendix for examples)
- 2) OXY would perform BOP break testing on multi-well pads where multiple intermediate sections can be drilled and cased within the 30-day BOP test window
- 3) After performing a complete BOP test on the first well and drilling and casing the hole section, three breaks would be made on the BOP.
  - Between the check valve and the kill line
  - Between the HCR valve and the co-flex hose or the co-flex hose and the manifold
  - Between the BOP flange and the wellhead
- 4) The BOP is then lifted and removed from the wellhead by the hydraulic winch system
- 5) After skidding to the next well, the BOP is moved to the wellhead by the hydraulic winch system and installed
- 6) The choke line and kill line are reconnected
- 7) A test plug is installed in the wellhead with a joint of drill pipe and the internal parts of the check valve are removed
- 8) A shell test is performed against the upper pipe rams testing all three breaks
- 9) The internal parts of the check valve are reinstalled and the HCR valve is closed. A second test is performed on them
- 10) These tests consist of a 250 psi low test and a high test to the value submitted in the APD or SN (e.g., 5000 psi)
- 11) Perform a function test of components not pressure tested to include the lower pipe rams, the blind rams and the annular
- 12) If this were a three well pad, the same three breaks on the BOP would be made and steps 4 through 11 would be repeated
- 13) A second break test would only be done if the third hole section could be completed within the 30-day BOP test window
- 14) If a second break test is performed, additional components that were not tested on the initial break test will be tested on this break test

### Notes:

- a. If any parts of the BOP are changed out or any additional breaks are made during the skidding operation, these affected components would also be tested as in step 10.
- b. As the choke manifold remains stationary during the skidding operation and the only break to the manifold is tested in step 8 above, no further testing of the manifold is done until the next full BOP test.


## **Summary**

OXY requests a variance to allow break testing of the BOP stack when skidding drilling rigs between wells on multi-well pads. API standards, specifications and recommended practices are considered industry standards and are consistently utilized and referenced by the industry and the BLM. API Standard 53 recognizes break testing as an acceptable practice and BSEE adopted language from this standard into its newly created 30 CFR Part 250 which also supports break testing. Due to this, OXY feels this request meets the intent of 43 CFR part 3170



# REQUEST FOR A VARIANCE TO BREAK TEST THE BOP

Permian Resources New Mexico

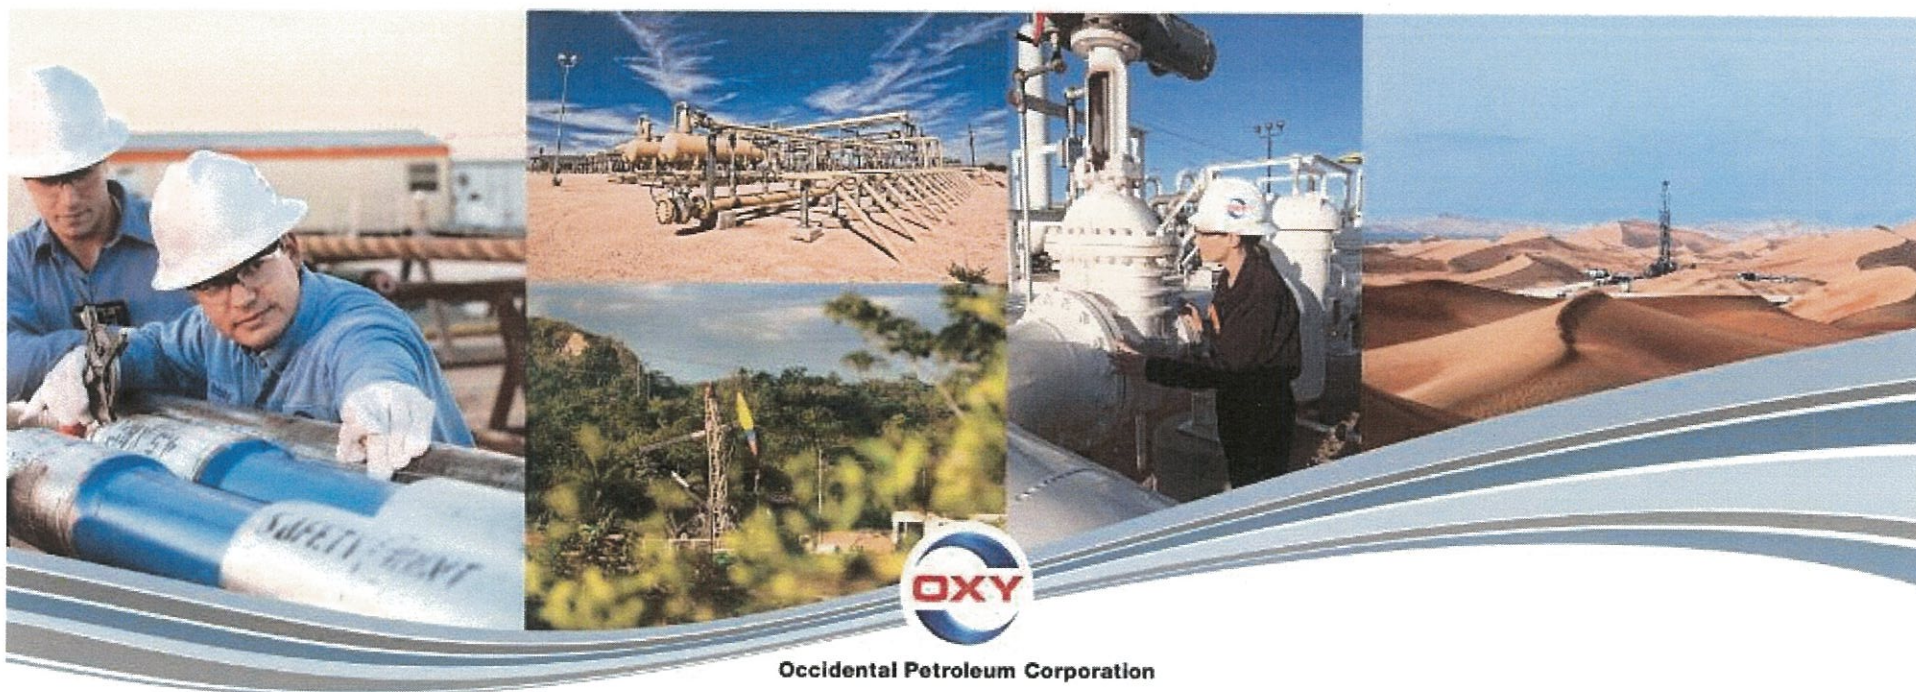



# Request for Variance

OXY USA Inc. (OXY) requests a variance to allow break testing of the Blowout Preventer (BOP) stack when skidding a drilling rig between wells on multi-well pads

- This practice entails retesting only the connections of the BOP stack that have been disconnected during this operation and not a complete BOP test.
- As the choke manifold remains stationary during the skidding operation and the only break to the manifold is tested, no further testing of the manifold is done until the next full BOP test.
- This request is being made as per Section IV of the *Onshore Oil and Gas Order (OOGO) No. 2*

# Rationale for Allowing BOP Break Testing

American Petroleum Institute (API) standards, specifications and recommended practices are considered industry standards and are consistently utilized and referenced by the industry

- API Standard 53, *Blowout Prevention Equipment Systems for Drilling Wells* (Fourth Edition, November 2012, Addendum 1, July 2016) recognizes break testing as an acceptable practice.
- Specifically, API Standard 53, Section 6.5.3.4.1.b states “Pressure tests on the well control equipment shall be conducted after the disconnection or repair of any pressure containment seal in the BOP stack, choke line, kill line, choke manifold, or wellhead assembly but limited to the affected component.”





# Rationale for Allowing BOP Break Testing

The Bureau of Safety and Environmental Enforcement (BSEE), Department of Interior, has also utilized the API standards, specifications and best practices in the development of its offshore oil and gas regulations and incorporates them by reference within its regulations.

- BSEE issued new offshore regulations in July 2016 under 30 CFR Part 250, *Oil and Gas and Sulphur Operations in the Outer Continental Shelf - Blowout Preventer Systems and Well Control*. Within these regulations is language adopted from API Standard 53 which also supports break testing.
- Specifically, Section 250.737(d.8) states “Pressure test affected BOP components following the disconnection or repair of any well-pressure containment seal in the wellhead or BOP stack assembly.”



# Rationale for Allowing BOP Break Testing

Break testing has been approved by the BLM in the past

- The Farmington Field Office approved a Sundry Notice (SN) to allow break testing in 2015
- This SN granted permission for the operator to break test when skidding its Aztec 1000 rig on multi-well pads

Oxy feels break testing and our current procedures meet or exceed the intent of OOGO No. 2

- As skidding operations take place within the 30-day full BOPE test window, the BOP shell and components such as the pipe rams and check valve get tested to the full rated working pressure more often
- Oxy's standard requires complete BOP tests more often than that of OOGO No. 2
- Oxy performs a choke drill prior to drilling out every casing shoe. As a crew's training is a vital part of well control, this procedure to simulate step one of the Driller's Method exceeds the requirements of OOGO No. 2





# Break Testing Procedures

- 1) OXY to submit the break testing plan in the APD or Sundry Notice (SN) and receive approval prior to implementing
- 2) OXY would perform BOP break testing on multi-well pads where multiple intermediate sections can be drilled and cased within the full BOP test window
- 3) After performing a complete BOP test on the first well and drilling and casing the hole section, three breaks would be made on the BOP.
  - Between the check valve and the kill line
  - Between the HCR valve and the co-flex hose or the co-flex hose and the manifold
  - Between the BOP flange and the wellhead
- 4) The BOP is then lifted and removed from the wellhead by the hydraulic winch system
- 5) After skidding to the next well, the BOP is moved to the wellhead by the hydraulic winch system and installed
- 6) The choke line and kill line are reconnected
- 7) A test plug is installed in the wellhead with a joint of drill pipe and the internal parts of the check valve are removed



## Break Testing Procedures

- 8) A shell test is performed against the upper pipe rams testing all three breaks
- 9) The internal parts of the check valve are reinstalled and the HCR valve is closed.  
A second test is performed on them
- 10) These tests consist of a 250 psi low test and a high test to the value submitted in the APD or SN (e.g., 5000 psi)
- 11) Perform a function test of components not pressure tested to include the lower pipe rams, the blind rams and the annular
- 12) If this were a three well pad, the same three breaks on the BOP would be made and steps 4 through 11 would be repeated
- 13) A second break test would only be done if the third hole section could be completed within the 30-day BOP test window
- 14) If a second break test is performed, additional components that were not tested on the first break test will be tested






# Break Testing Procedures and Tests

1. After performing a complete BOP test on the first well, the BOP is removed, the rig is skidded and the BOP is installed on the second well


2. A test plug is installed in the wellhead on drill pipe and the inner components of the check valve are removed

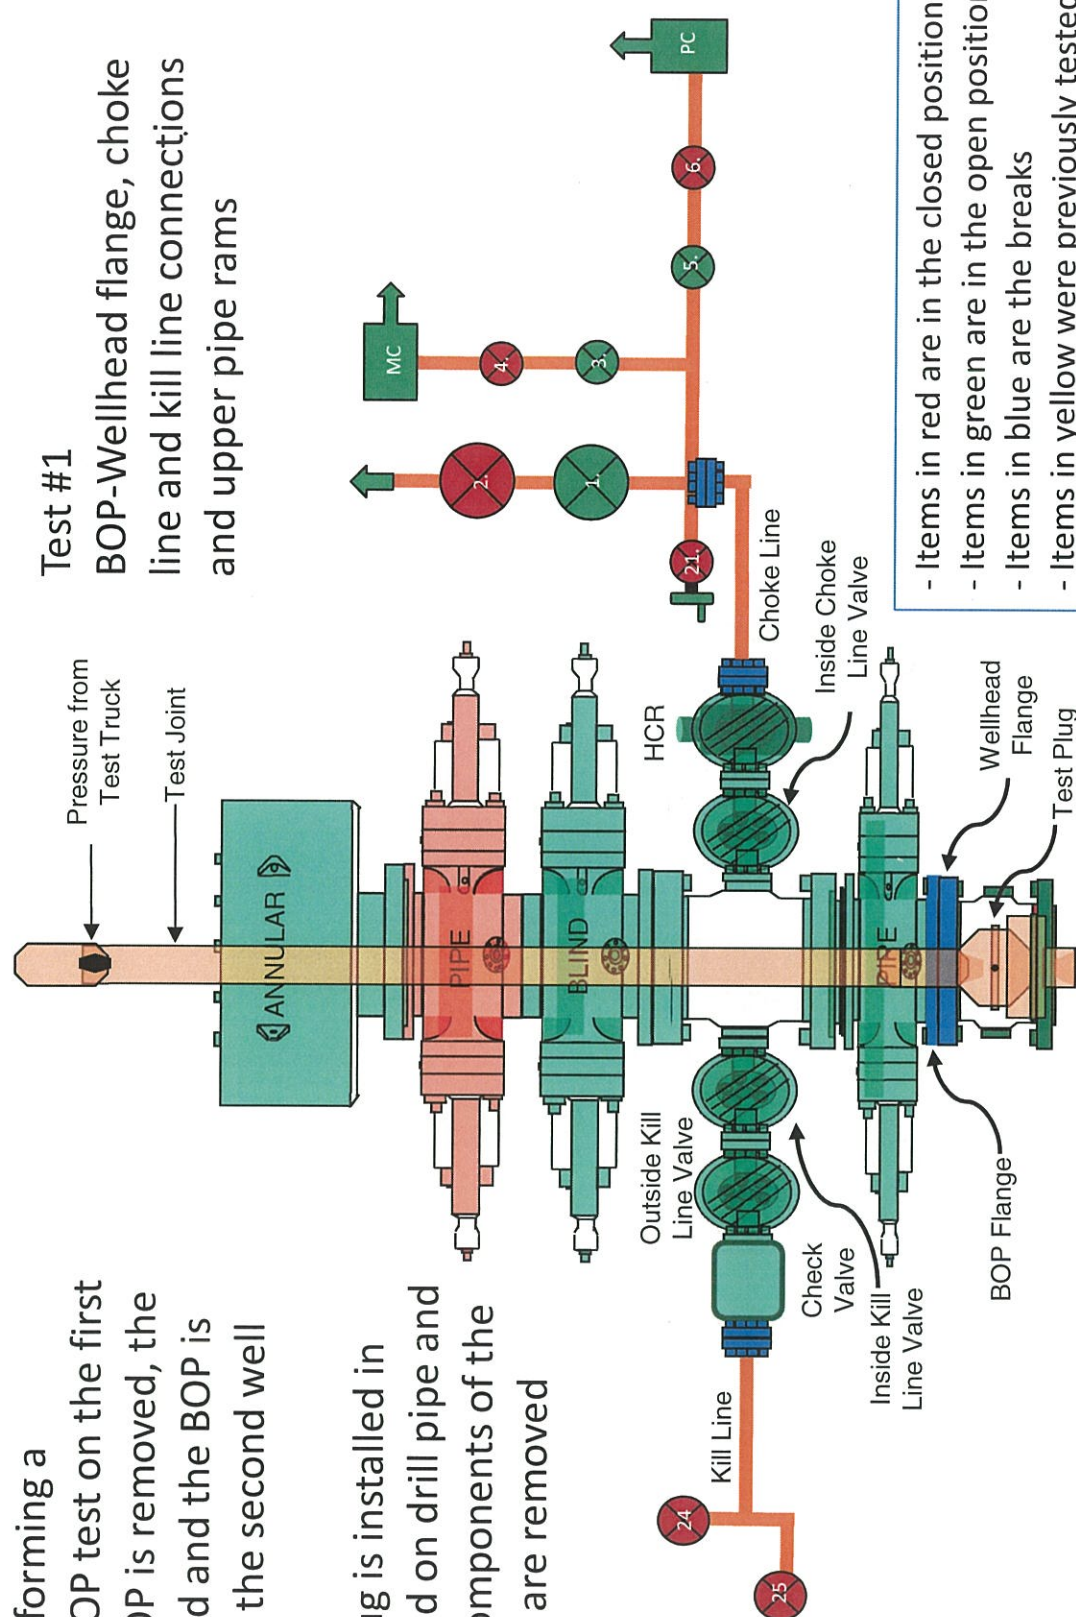



# Break Testing Procedures and Tests

3. After Test #1, the inner components of the check valve are reinstalled and the HCR valve is closed

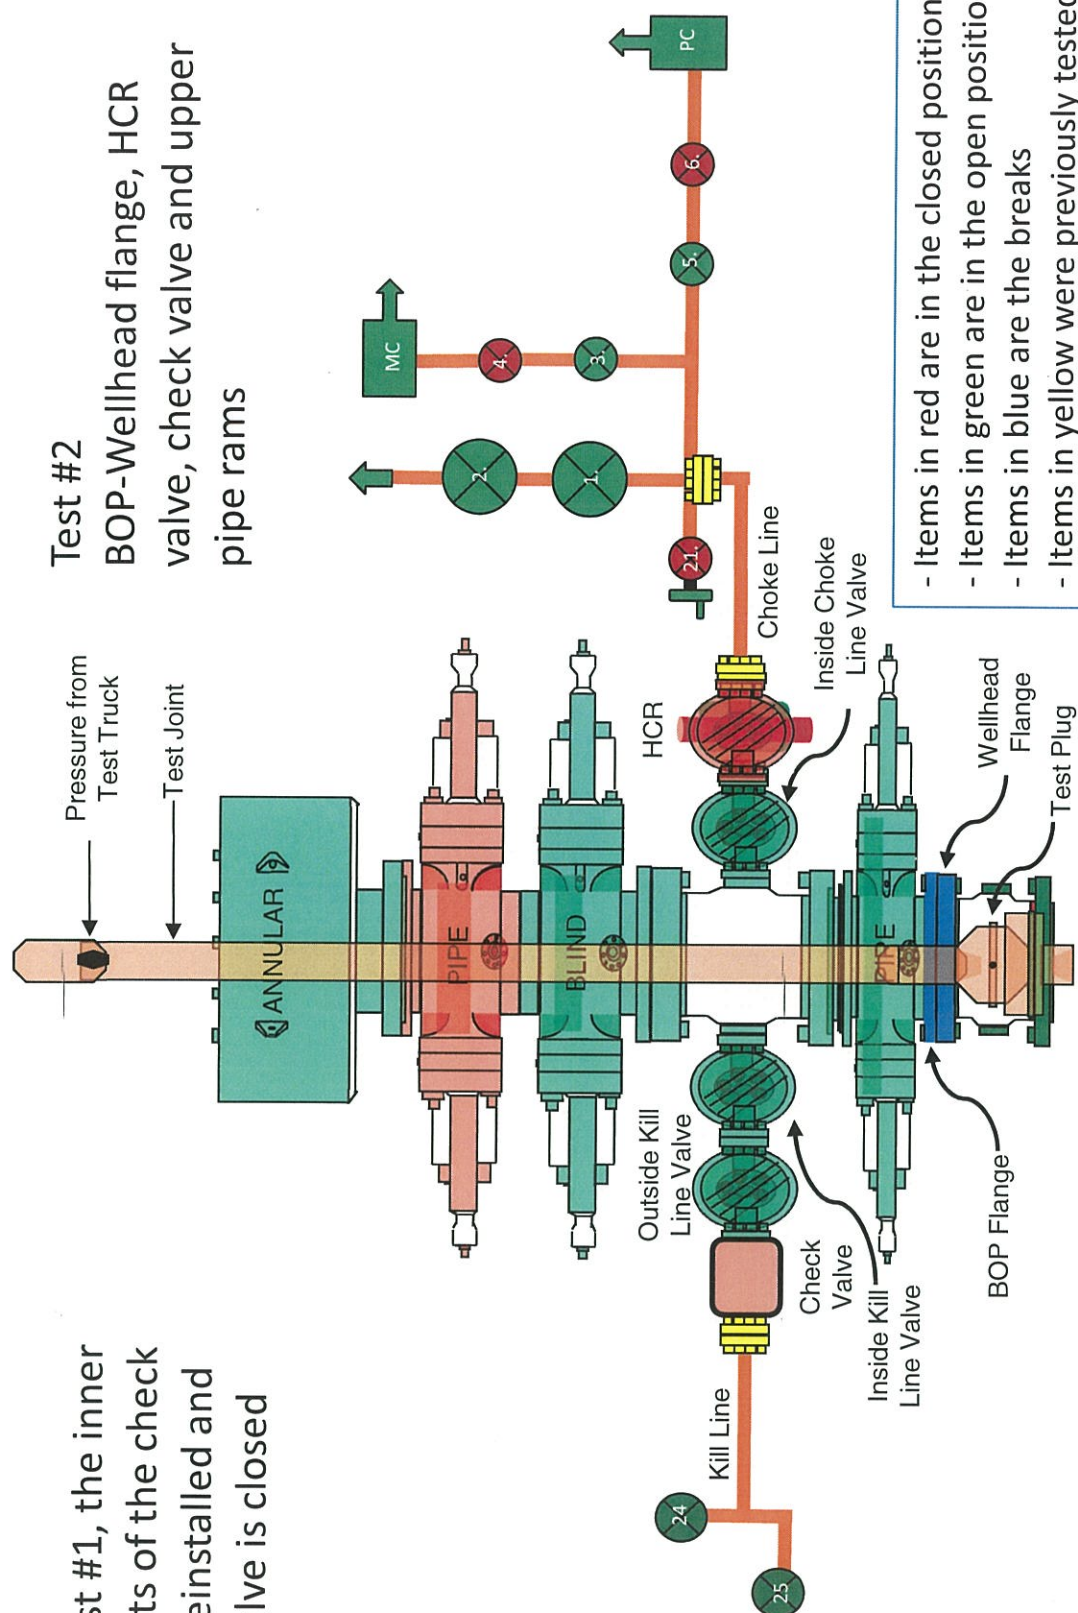




# Second Break Testing Procedures and Tests

Procedures 1 and 2 and Test #1 will be completed as in the first break test (see slide 8)

3. After Test #1, the inner components of the check valve are reinstalled and the inside choke line valve is closed

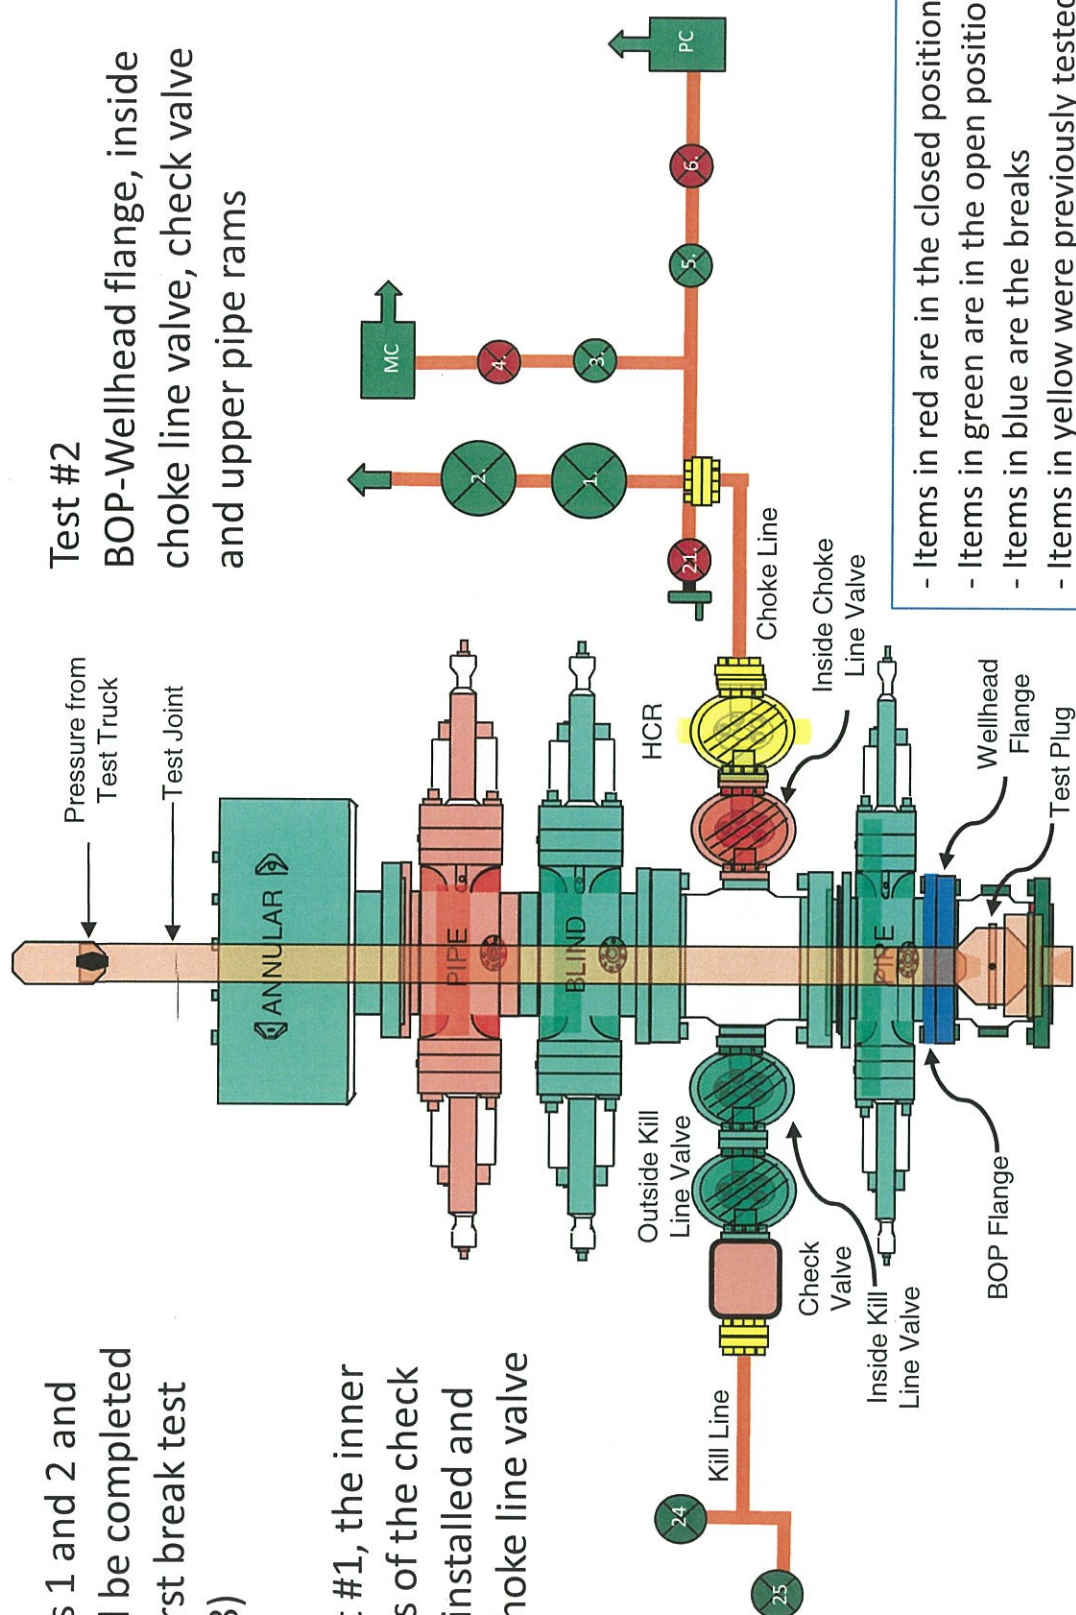



# BOP Handling System



Hydraulic winch system which moves the BOP from its carrier to the wellhead

BOP standing in its carrier








12

# BOP Handling System

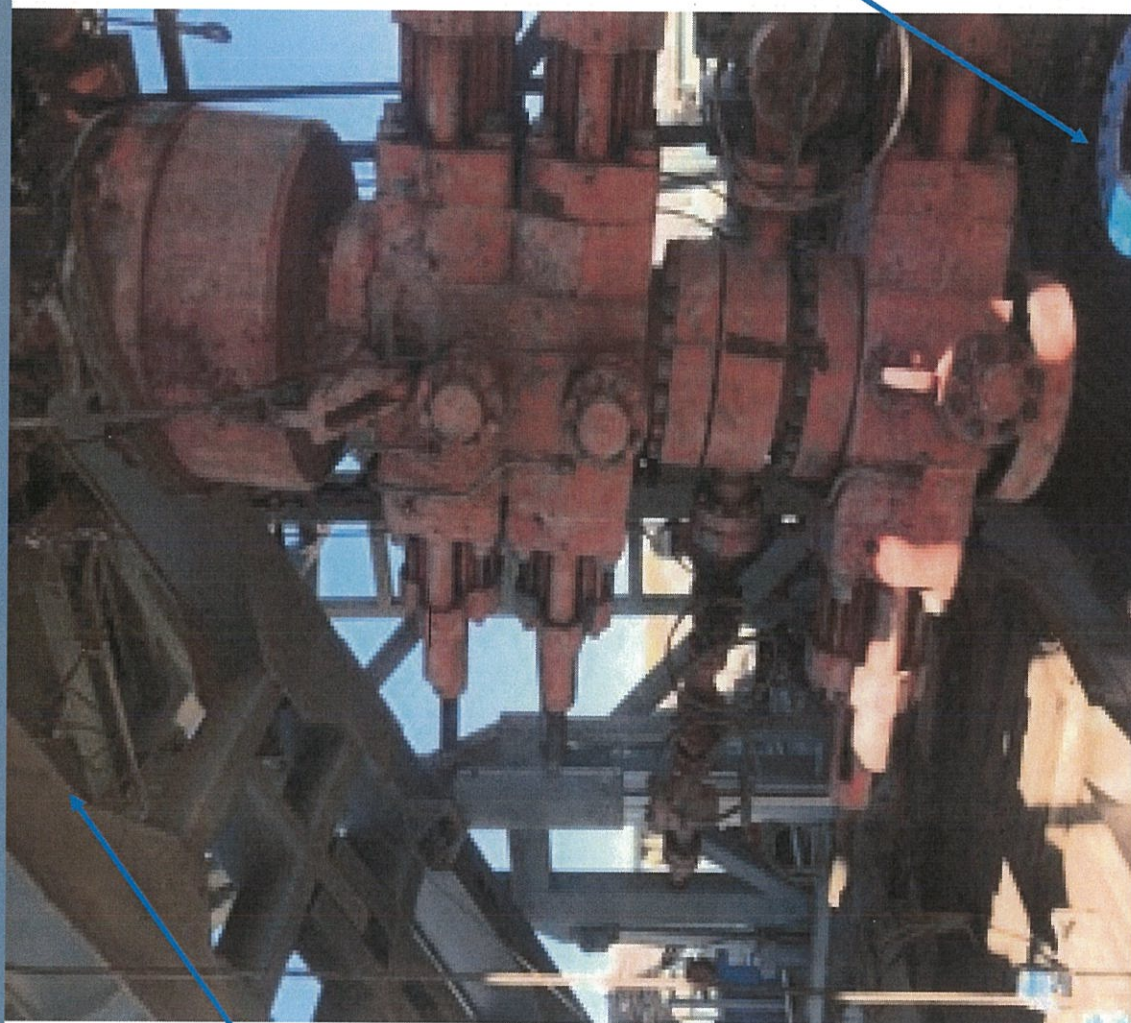

Hydraulic winch  
system moving  
the BOP over to  
the wellhead

Wellhead



## Summary for Variance Request for Break Testing

- API standards, specifications and recommended practices are considered industry standards
  - OOGO No. 2 recognized API Recommended Practices (RP) 53 in its original development
  - API Standard 53 recognizes break testing as an acceptable practice
  - The Bureau of Safety and Environmental Enforcement has utilized API standards, specifications and best practices in the development of its offshore oil and gas regulations
  - API Standard 53 recognizes break testing as an acceptable practice
- OXY feels break testing meets the intent of OOGO No. 2 to protect public health and safety and the environment



## **Bradenhead Cement CBL Variance Request**

Oxy requests permission to adjust the CBL requirement after bradenhead cement jobs, on 7-5/8" intermediate casings, as per the agreement reached in the OXY/BLM meeting on September 5, 2019.

### **Three string wells:**

- CBL will be required on one well per pad
- If the pumped volume of cement is less than permitted in the APD, BLM will be notified and a CBL may be run
- Echometer will be used after bradenhead cement job to determine TOC before pumping top-out cement

### **Four string wells:**

- CBL is not required
- If the pumped volume of cement is less than permitted in the APD, BLM will be notified and a CBL may be run
- Echometer will be used after bradenhead cement job to determine TOC before pumping top-out cement

## Offline Cementing Variance Request

Oxy requests a variance to cement the 9.625" and/or 7.625" intermediate casing strings offline in accordance to the approved variance, EC Tran 461365.

### 1. Cement Program

No changes to the cement program will take place for offline cementing.


### 2. Offline Cementing Procedure

The operational sequence will be as follows:


1. Run casing as per normal operations. While running casing, conduct negative pressure test and confirm integrity of the float equipment (float collar and shoe)
2. Land casing with mandrel
3. Fill pipe with kill weight fluid, do not circulate through floats and confirm well is static
4. Set annular packoff shown below and pressure test to confirm integrity of the seal.  
Pressure ratings of wellhead components and valves is 5,000 psi

Annular packoff with both external and internal seals



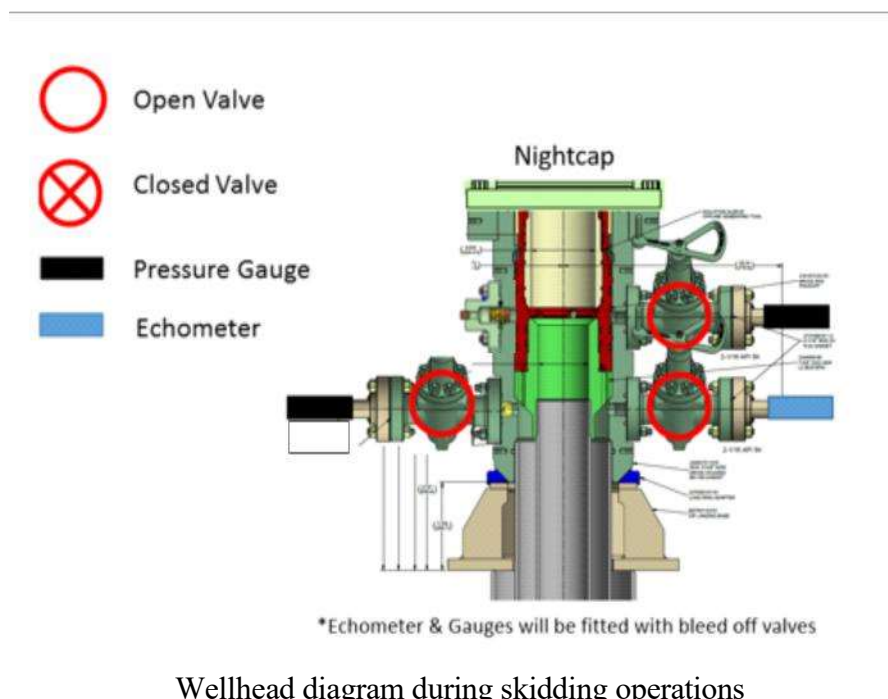

5. After confirmation of both annular barriers and internal barriers, nipple down BOP and install cap flange.
  - a. If any barrier fails to test, the BOP stack will not be nipped down until after the cement job is completed with cement 500ft above the highest formation capable of flow with kill weight mud above or after it has achieved 50 psi compressive strength if cannot be verified.
6. Skid rig to next well on pad.
7. Confirm well is static before removing cap flange, flange will not be removed and offline cementing operations will not commence until well is under control. If well is not static, casing outlet valves will provide access to both the casing ID and annulus. Rig or third party pump truck will kill well prior to cementing or nipping up for further remediation.
  - a. Well Control Plan
    - i. The Drillers Method will be the primary well control method to regain control of the wellbore prior to cementing, if wellbore conditions do not permit the drillers method other methods of well control may be used
    - ii. Rig pumps or a 3<sup>rd</sup> party pump will be tied into the upper casing valve to pump down the casing ID
    - iii. A high pressure return line will be rigged up to lower casing valve and run to choke manifold to control annular pressure
    - iv. Once influx is circulated out of the hole, kill weight mud will be circulated
    - v. Well will be confirmed static
    - vi. Once confirmed static, cap flange will be removed to allow for offline cementing operations to commence
8. Install offline cement tool
9. Rig up cement equipment

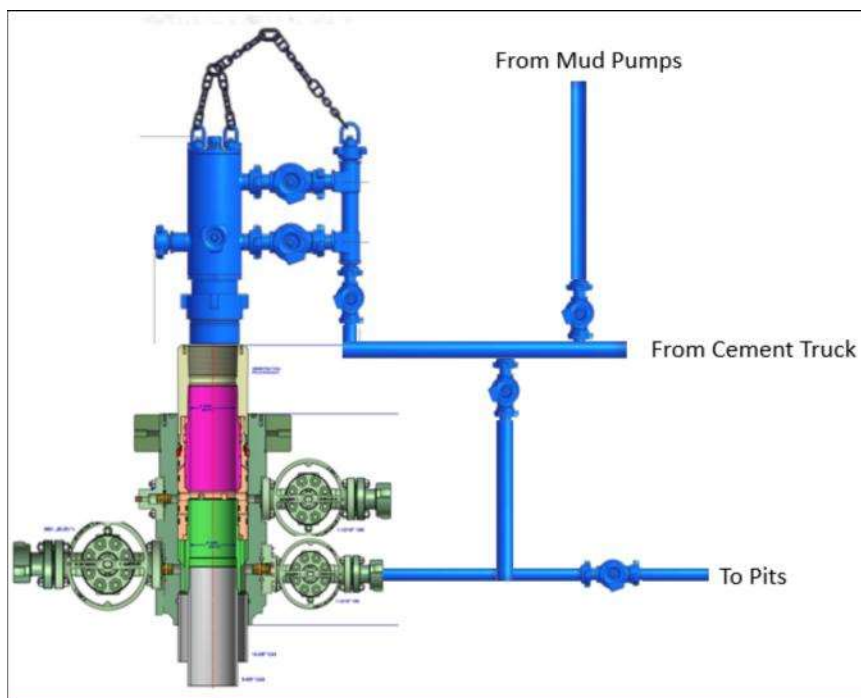

Wellhead diagram during offline cementing operations

10. Circulate bottoms up with cement truck
  - a. If gas is present on bottoms up, well will be shut in and returns rerouted through gas buster to handle entrained gas
  - b. Max anticipated time before circulating with cement truck is 6 hrs
11. Perform cement job taking returns from the annulus wellhead valve
12. Confirm well is static and floats are holding after cement job
13. Remove cement equipment, offline cement tools and install night cap with pressure gauge for monitoring.



# **OXY**

**PRD NM DIRECTIONAL PLANS (NAD 1983)**

**Corral Gorge 12\_13**

**Corral Gorge 12-13 Fed Com 53H**

**Wellbore #1**

**Plan: Permitting Plan**

## **Standard Planning Report**

**17 September, 2024**

OXY  
Planning Report

|           |                                     |                              |                                     |
|-----------|-------------------------------------|------------------------------|-------------------------------------|
| Database: | HOPSPP                              | Local Co-ordinate Reference: | Well Corral Gorge 12-13 Fed Com 53H |
| Company:  | ENGINEERING DESIGNS                 | TVD Reference:               | RKB=25' @ 3171.50ft                 |
| Project:  | PRD NM DIRECTIONAL PLANS (NAD 1983) | MD Reference:                | RKB=25' @ 3171.50ft                 |
| Site:     | Corral Gorge 12_13                  | North Reference:             | Grid                                |
| Well:     | Corral Gorge 12-13 Fed Com 53H      | Survey Calculation Method:   | Minimum Curvature                   |
| Wellbore: | Wellbore #1                         |                              |                                     |
| Design:   | Permitting Plan                     |                              |                                     |

|             |                                     |               |                             |
|-------------|-------------------------------------|---------------|-----------------------------|
| Project     | PRD NM DIRECTIONAL PLANS (NAD 1983) |               |                             |
| Map System: | US State Plane 1983                 | System Datum: | Mean Sea Level              |
| Geo Datum:  | North American Datum 1983           |               |                             |
| Map Zone:   | New Mexico Eastern Zone             |               | Using geodetic scale factor |

|                       |                    |              |                 |
|-----------------------|--------------------|--------------|-----------------|
| Site                  | Corral Gorge 12_13 |              |                 |
| Site Position:        |                    | Northing:    | 418,266.21 usft |
| From:                 | Map                | Easting:     | 662,457.18 usft |
| Position Uncertainty: | 0.00 ft            | Slot Radius: | 13.200 in       |
|                       |                    | Latitude:    | 32.149287       |
|                       |                    | Longitude:   | -103.941976     |

|                      |                                |                     |             |
|----------------------|--------------------------------|---------------------|-------------|
| Well                 | Corral Gorge 12-13 Fed Com 53H |                     |             |
| Well Position        | +N/-S                          | 0.00 ft             | Northing:   |
|                      | +E/-W                          | 0.00 ft             | Easting:    |
| Position Uncertainty | 2.00 ft                        | Wellhead Elevation: | ft          |
| Grid Convergence:    | 0.21 °                         |                     |             |
|                      |                                | Latitude:           | 32.149294   |
|                      |                                | Longitude:          | -103.932991 |
|                      |                                | Ground Level:       | 3,146.50 ft |

|           |             |             |                 |               |                     |
|-----------|-------------|-------------|-----------------|---------------|---------------------|
| Wellbore  | Wellbore #1 |             |                 |               |                     |
| Magnetics | Model Name  | Sample Date | Declination (°) | Dip Angle (°) | Field Strength (nT) |
|           | HDGM_FILE   | 9/16/2019   | 6.80            | 59.80         | 47,842.20000000     |
|           | HDGM_FILE   | 9/17/2024   | 6.35            | 59.65         | 47,286.80000000     |

|                   |                       |            |               |               |
|-------------------|-----------------------|------------|---------------|---------------|
| Design            | Permitting Plan       |            |               |               |
| Audit Notes:      |                       |            |               |               |
| Version:          | Phase:                | PROTOTYPE  | Tie On Depth: | 0.00          |
| Vertical Section: | Depth From (TVD) (ft) | +N/-S (ft) | +E/-W (ft)    | Direction (°) |
|                   | 18.60                 | 0.00       | 0.00          | 183.26        |

|                          |                |                   |                               |                    |
|--------------------------|----------------|-------------------|-------------------------------|--------------------|
| Plan Survey Tool Program | Date 9/17/2024 |                   |                               |                    |
| Depth From (ft)          | Depth To (ft)  | Survey (Wellbore) | Tool Name                     | Remarks            |
| 1                        | 0.00           | 21,633.80         | Permitting Plan (Wellbore #1) | B001Mc_MWD+HRGM_R5 |
|                          |                |                   |                               | MWD+HRGM           |

|                     |                 |             |                     |            |            |                       |                      |                     |         |                    |
|---------------------|-----------------|-------------|---------------------|------------|------------|-----------------------|----------------------|---------------------|---------|--------------------|
| Plan Sections       |                 |             |                     |            |            |                       |                      |                     |         |                    |
| Measured Depth (ft) | Inclination (°) | Azimuth (°) | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Turn Rate (°/100ft) | TFO (°) | Target             |
| 0.00                | 0.00            | 0.00        | 0.00                | 0.00       | 0.00       | 0.00                  | 0.00                 | 0.00                | 0.00    |                    |
| 3,965.00            | 0.00            | 0.00        | 3,965.00            | 0.00       | 0.00       | 0.00                  | 0.00                 | 0.00                | 0.00    |                    |
| 4,964.88            | 10.00           | 329.57      | 4,959.81            | 75.04      | -44.07     | 1.00                  | 1.00                 | 0.00                | 329.57  |                    |
| 10,663.66           | 10.00           | 329.57      | 10,572.04           | 928.23     | -545.18    | 0.00                  | 0.00                 | 0.00                | 0.00    |                    |
| 11,650.03           | 90.00           | 179.70      | 11,228.47           | 361.47     | -600.33    | 10.00                 | 8.11                 | -15.19              | -149.49 |                    |
| 21,634.03           | 90.00           | 179.70      | 11,228.47           | -9,622.40  | -548.42    | 0.00                  | 0.00                 | 0.00                | 0.00    | PBHL (Corral Gorge |

OXY  
Planning Report

|           |                                     |                              |                                     |
|-----------|-------------------------------------|------------------------------|-------------------------------------|
| Database: | HOPSPP                              | Local Co-ordinate Reference: | Well Corral Gorge 12-13 Fed Com 53H |
| Company:  | ENGINEERING DESIGNS                 | TVD Reference:               | RKB=25' @ 3171.50ft                 |
| Project:  | PRD NM DIRECTIONAL PLANS (NAD 1983) | MD Reference:                | RKB=25' @ 3171.50ft                 |
| Site:     | Corral Gorge 12_13                  | North Reference:             | Grid                                |
| Well:     | Corral Gorge 12-13 Fed Com 53H      | Survey Calculation Method:   | Minimum Curvature                   |
| Wellbore: | Wellbore #1                         |                              |                                     |
| Design:   | Permitting Plan                     |                              |                                     |

| Planned Survey      |                 |             |                     |            |            |                       |                       |                      |                     |
|---------------------|-----------------|-------------|---------------------|------------|------------|-----------------------|-----------------------|----------------------|---------------------|
| Measured Depth (ft) | Inclination (°) | Azimuth (°) | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Vertical Section (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Turn Rate (°/100ft) |
| 0.00                | 0.00            | 0.00        | 0.00                | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 100.00              | 0.00            | 0.00        | 100.00              | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 200.00              | 0.00            | 0.00        | 200.00              | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 300.00              | 0.00            | 0.00        | 300.00              | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 400.00              | 0.00            | 0.00        | 400.00              | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 500.00              | 0.00            | 0.00        | 500.00              | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 600.00              | 0.00            | 0.00        | 600.00              | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 700.00              | 0.00            | 0.00        | 700.00              | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 800.00              | 0.00            | 0.00        | 800.00              | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 900.00              | 0.00            | 0.00        | 900.00              | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 1,000.00            | 0.00            | 0.00        | 1,000.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 1,100.00            | 0.00            | 0.00        | 1,100.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 1,200.00            | 0.00            | 0.00        | 1,200.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 1,300.00            | 0.00            | 0.00        | 1,300.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 1,400.00            | 0.00            | 0.00        | 1,400.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 1,500.00            | 0.00            | 0.00        | 1,500.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 1,600.00            | 0.00            | 0.00        | 1,600.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 1,700.00            | 0.00            | 0.00        | 1,700.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 1,800.00            | 0.00            | 0.00        | 1,800.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 1,900.00            | 0.00            | 0.00        | 1,900.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 2,000.00            | 0.00            | 0.00        | 2,000.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 2,100.00            | 0.00            | 0.00        | 2,100.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 2,200.00            | 0.00            | 0.00        | 2,200.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 2,300.00            | 0.00            | 0.00        | 2,300.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 2,400.00            | 0.00            | 0.00        | 2,400.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 2,500.00            | 0.00            | 0.00        | 2,500.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 2,600.00            | 0.00            | 0.00        | 2,600.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 2,700.00            | 0.00            | 0.00        | 2,700.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 2,800.00            | 0.00            | 0.00        | 2,800.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 2,900.00            | 0.00            | 0.00        | 2,900.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 3,000.00            | 0.00            | 0.00        | 3,000.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 3,100.00            | 0.00            | 0.00        | 3,100.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 3,200.00            | 0.00            | 0.00        | 3,200.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 3,300.00            | 0.00            | 0.00        | 3,300.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 3,400.00            | 0.00            | 0.00        | 3,400.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 3,500.00            | 0.00            | 0.00        | 3,500.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 3,600.00            | 0.00            | 0.00        | 3,600.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 3,700.00            | 0.00            | 0.00        | 3,700.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 3,800.00            | 0.00            | 0.00        | 3,800.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 3,900.00            | 0.00            | 0.00        | 3,900.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 3,965.00            | 0.00            | 0.00        | 3,965.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 4,000.00            | 0.35            | 329.57      | 4,000.00            | 0.09       | -0.05      | -0.09                 | 1.00                  | 1.00                 | 0.00                |
| 4,100.00            | 1.35            | 329.57      | 4,099.99            | 1.37       | -0.81      | -1.32                 | 1.00                  | 1.00                 | 0.00                |
| 4,200.00            | 2.35            | 329.57      | 4,199.93            | 4.15       | -2.44      | -4.01                 | 1.00                  | 1.00                 | 0.00                |
| 4,300.00            | 3.35            | 329.57      | 4,299.81            | 8.44       | -4.96      | -8.15                 | 1.00                  | 1.00                 | 0.00                |
| 4,400.00            | 4.35            | 329.57      | 4,399.58            | 14.23      | -8.36      | -13.73                | 1.00                  | 1.00                 | 0.00                |
| 4,500.00            | 5.35            | 329.57      | 4,499.22            | 21.52      | -12.64     | -20.77                | 1.00                  | 1.00                 | 0.00                |
| 4,600.00            | 6.35            | 329.57      | 4,598.70            | 30.31      | -17.80     | -29.25                | 1.00                  | 1.00                 | 0.00                |
| 4,700.00            | 7.35            | 329.57      | 4,697.99            | 40.59      | -23.84     | -39.17                | 1.00                  | 1.00                 | 0.00                |
| 4,800.00            | 8.35            | 329.57      | 4,797.05            | 52.37      | -30.76     | -50.54                | 1.00                  | 1.00                 | 0.00                |
| 4,900.00            | 9.35            | 329.57      | 4,895.86            | 65.64      | -38.55     | -63.34                | 1.00                  | 1.00                 | 0.00                |
| 4,964.88            | 10.00           | 329.57      | 4,959.81            | 75.04      | -44.07     | -72.41                | 1.00                  | 1.00                 | 0.00                |
| 5,000.00            | 10.00           | 329.57      | 4,994.40            | 80.30      | -47.16     | -77.48                | 0.00                  | 0.00                 | 0.00                |
| 5,100.00            | 10.00           | 329.57      | 5,092.88            | 95.27      | -55.95     | -91.93                | 0.00                  | 0.00                 | 0.00                |
| 5,200.00            | 10.00           | 329.57      | 5,191.36            | 110.24     | -64.75     | -106.38               | 0.00                  | 0.00                 | 0.00                |

# OXY

## Planning Report

|                  |                                     |                                     |                                     |
|------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| <b>Database:</b> | HOPSPP                              | <b>Local Co-ordinate Reference:</b> | Well Corral Gorge 12-13 Fed Com 53H |
| <b>Company:</b>  | ENGINEERING DESIGNS                 | <b>TVD Reference:</b>               | RKB=25' @ 3171.50ft                 |
| <b>Project:</b>  | PRD NM DIRECTIONAL PLANS (NAD 1983) | <b>MD Reference:</b>                | RKB=25' @ 3171.50ft                 |
| <b>Site:</b>     | Corral Gorge 12_13                  | <b>North Reference:</b>             | Grid                                |
| <b>Well:</b>     | Corral Gorge 12-13 Fed Com 53H      | <b>Survey Calculation Method:</b>   | Minimum Curvature                   |
| <b>Wellbore:</b> | Wellbore #1                         |                                     |                                     |
| <b>Design:</b>   | Permitting Plan                     |                                     |                                     |

| Planned Survey      |                 |             |                     |            |            |                       |                       |                      |                     |
|---------------------|-----------------|-------------|---------------------|------------|------------|-----------------------|-----------------------|----------------------|---------------------|
| Measured Depth (ft) | Inclination (°) | Azimuth (°) | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Vertical Section (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Turn Rate (°/100ft) |
| 5,300.00            | 10.00           | 329.57      | 5,289.84            | 125.21     | -73.54     | -120.82               | 0.00                  | 0.00                 | 0.00                |
| 5,400.00            | 10.00           | 329.57      | 5,388.32            | 140.18     | -82.33     | -135.27               | 0.00                  | 0.00                 | 0.00                |
| 5,500.00            | 10.00           | 329.57      | 5,486.81            | 155.15     | -91.13     | -149.72               | 0.00                  | 0.00                 | 0.00                |
| 5,600.00            | 10.00           | 329.57      | 5,585.29            | 170.12     | -99.92     | -164.16               | 0.00                  | 0.00                 | 0.00                |
| 5,700.00            | 10.00           | 329.57      | 5,683.77            | 185.10     | -108.71    | -178.61               | 0.00                  | 0.00                 | 0.00                |
| 5,800.00            | 10.00           | 329.57      | 5,782.25            | 200.07     | -117.51    | -193.06               | 0.00                  | 0.00                 | 0.00                |
| 5,900.00            | 10.00           | 329.57      | 5,880.73            | 215.04     | -126.30    | -207.50               | 0.00                  | 0.00                 | 0.00                |
| 6,000.00            | 10.00           | 329.57      | 5,979.21            | 230.01     | -135.09    | -221.95               | 0.00                  | 0.00                 | 0.00                |
| 6,100.00            | 10.00           | 329.57      | 6,077.69            | 244.98     | -143.89    | -236.40               | 0.00                  | 0.00                 | 0.00                |
| 6,200.00            | 10.00           | 329.57      | 6,176.17            | 259.95     | -152.68    | -250.84               | 0.00                  | 0.00                 | 0.00                |
| 6,300.00            | 10.00           | 329.57      | 6,274.65            | 274.92     | -161.47    | -265.29               | 0.00                  | 0.00                 | 0.00                |
| 6,400.00            | 10.00           | 329.57      | 6,373.14            | 289.90     | -170.27    | -279.74               | 0.00                  | 0.00                 | 0.00                |
| 6,500.00            | 10.00           | 329.57      | 6,471.62            | 304.87     | -179.06    | -294.19               | 0.00                  | 0.00                 | 0.00                |
| 6,600.00            | 10.00           | 329.57      | 6,570.10            | 319.84     | -187.85    | -308.63               | 0.00                  | 0.00                 | 0.00                |
| 6,700.00            | 10.00           | 329.57      | 6,668.58            | 334.81     | -196.65    | -323.08               | 0.00                  | 0.00                 | 0.00                |
| 6,800.00            | 10.00           | 329.57      | 6,767.06            | 349.78     | -205.44    | -337.53               | 0.00                  | 0.00                 | 0.00                |
| 6,900.00            | 10.00           | 329.57      | 6,865.54            | 364.75     | -214.23    | -351.97               | 0.00                  | 0.00                 | 0.00                |
| 7,000.00            | 10.00           | 329.57      | 6,964.02            | 379.72     | -223.03    | -366.42               | 0.00                  | 0.00                 | 0.00                |
| 7,100.00            | 10.00           | 329.57      | 7,062.50            | 394.70     | -231.82    | -380.87               | 0.00                  | 0.00                 | 0.00                |
| 7,200.00            | 10.00           | 329.57      | 7,160.98            | 409.67     | -240.61    | -395.31               | 0.00                  | 0.00                 | 0.00                |
| 7,300.00            | 10.00           | 329.57      | 7,259.47            | 424.64     | -249.41    | -409.76               | 0.00                  | 0.00                 | 0.00                |
| 7,400.00            | 10.00           | 329.57      | 7,357.95            | 439.61     | -258.20    | -424.21               | 0.00                  | 0.00                 | 0.00                |
| 7,500.00            | 10.00           | 329.57      | 7,456.43            | 454.58     | -266.99    | -438.65               | 0.00                  | 0.00                 | 0.00                |
| 7,600.00            | 10.00           | 329.57      | 7,554.91            | 469.55     | -275.79    | -453.10               | 0.00                  | 0.00                 | 0.00                |
| 7,700.00            | 10.00           | 329.57      | 7,653.39            | 484.52     | -284.58    | -467.55               | 0.00                  | 0.00                 | 0.00                |
| 7,800.00            | 10.00           | 329.57      | 7,751.87            | 499.50     | -293.37    | -481.99               | 0.00                  | 0.00                 | 0.00                |
| 7,900.00            | 10.00           | 329.57      | 7,850.35            | 514.47     | -302.17    | -496.44               | 0.00                  | 0.00                 | 0.00                |
| 8,000.00            | 10.00           | 329.57      | 7,948.83            | 529.44     | -310.96    | -510.89               | 0.00                  | 0.00                 | 0.00                |
| 8,100.00            | 10.00           | 329.57      | 8,047.31            | 544.41     | -319.75    | -525.33               | 0.00                  | 0.00                 | 0.00                |
| 8,200.00            | 10.00           | 329.57      | 8,145.80            | 559.38     | -328.55    | -539.78               | 0.00                  | 0.00                 | 0.00                |
| 8,300.00            | 10.00           | 329.57      | 8,244.28            | 574.35     | -337.34    | -554.23               | 0.00                  | 0.00                 | 0.00                |
| 8,400.00            | 10.00           | 329.57      | 8,342.76            | 589.32     | -346.13    | -568.67               | 0.00                  | 0.00                 | 0.00                |
| 8,500.00            | 10.00           | 329.57      | 8,441.24            | 604.30     | -354.93    | -583.12               | 0.00                  | 0.00                 | 0.00                |
| 8,600.00            | 10.00           | 329.57      | 8,539.72            | 619.27     | -363.72    | -597.57               | 0.00                  | 0.00                 | 0.00                |
| 8,700.00            | 10.00           | 329.57      | 8,638.20            | 634.24     | -372.51    | -612.02               | 0.00                  | 0.00                 | 0.00                |
| 8,800.00            | 10.00           | 329.57      | 8,736.68            | 649.21     | -381.31    | -626.46               | 0.00                  | 0.00                 | 0.00                |
| 8,900.00            | 10.00           | 329.57      | 8,835.16            | 664.18     | -390.10    | -640.91               | 0.00                  | 0.00                 | 0.00                |
| 9,000.00            | 10.00           | 329.57      | 8,933.65            | 679.15     | -398.89    | -655.36               | 0.00                  | 0.00                 | 0.00                |
| 9,100.00            | 10.00           | 329.57      | 9,032.13            | 694.12     | -407.69    | -669.80               | 0.00                  | 0.00                 | 0.00                |
| 9,200.00            | 10.00           | 329.57      | 9,130.61            | 709.09     | -416.48    | -684.25               | 0.00                  | 0.00                 | 0.00                |
| 9,300.00            | 10.00           | 329.57      | 9,229.09            | 724.07     | -425.27    | -698.70               | 0.00                  | 0.00                 | 0.00                |
| 9,400.00            | 10.00           | 329.57      | 9,327.57            | 739.04     | -434.07    | -713.14               | 0.00                  | 0.00                 | 0.00                |
| 9,500.00            | 10.00           | 329.57      | 9,426.05            | 754.01     | -442.86    | -727.59               | 0.00                  | 0.00                 | 0.00                |
| 9,600.00            | 10.00           | 329.57      | 9,524.53            | 768.98     | -451.65    | -742.04               | 0.00                  | 0.00                 | 0.00                |
| 9,700.00            | 10.00           | 329.57      | 9,623.01            | 783.95     | -460.45    | -756.48               | 0.00                  | 0.00                 | 0.00                |
| 9,800.00            | 10.00           | 329.57      | 9,721.49            | 798.92     | -469.24    | -770.93               | 0.00                  | 0.00                 | 0.00                |
| 9,900.00            | 10.00           | 329.57      | 9,819.98            | 813.89     | -478.03    | -785.38               | 0.00                  | 0.00                 | 0.00                |
| 10,000.00           | 10.00           | 329.57      | 9,918.46            | 828.87     | -486.82    | -799.82               | 0.00                  | 0.00                 | 0.00                |
| 10,100.00           | 10.00           | 329.57      | 10,016.94           | 843.84     | -495.62    | -814.27               | 0.00                  | 0.00                 | 0.00                |
| 10,200.00           | 10.00           | 329.57      | 10,115.42           | 858.81     | -504.41    | -828.72               | 0.00                  | 0.00                 | 0.00                |
| 10,300.00           | 10.00           | 329.57      | 10,213.90           | 873.78     | -513.20    | -843.16               | 0.00                  | 0.00                 | 0.00                |
| 10,400.00           | 10.00           | 329.57      | 10,312.38           | 888.75     | -522.00    | -857.61               | 0.00                  | 0.00                 | 0.00                |
| 10,500.00           | 10.00           | 329.57      | 10,410.86           | 903.72     | -530.79    | -872.06               | 0.00                  | 0.00                 | 0.00                |
| 10,600.00           | 10.00           | 329.57      | 10,509.34           | 918.69     | -539.58    | -886.50               | 0.00                  | 0.00                 | 0.00                |
| 10,663.66           | 10.00           | 329.57      | 10,572.04           | 928.23     | -545.18    | -895.70               | 0.00                  | 0.00                 | 0.00                |

# OXY

## Planning Report

|                  |                                     |                                     |                                     |
|------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| <b>Database:</b> | HOPSPP                              | <b>Local Co-ordinate Reference:</b> | Well Corral Gorge 12-13 Fed Com 53H |
| <b>Company:</b>  | ENGINEERING DESIGNS                 | <b>TVD Reference:</b>               | RKB=25' @ 3171.50ft                 |
| <b>Project:</b>  | PRD NM DIRECTIONAL PLANS (NAD 1983) | <b>MD Reference:</b>                | RKB=25' @ 3171.50ft                 |
| <b>Site:</b>     | Corral Gorge 12_13                  | <b>North Reference:</b>             | Grid                                |
| <b>Well:</b>     | Corral Gorge 12-13 Fed Com 53H      | <b>Survey Calculation Method:</b>   | Minimum Curvature                   |
| <b>Wellbore:</b> | Wellbore #1                         |                                     |                                     |
| <b>Design:</b>   | Permitting Plan                     |                                     |                                     |

| Planned Survey      |                 |             |                     |            |            |                       |                       |                      |                     |
|---------------------|-----------------|-------------|---------------------|------------|------------|-----------------------|-----------------------|----------------------|---------------------|
| Measured Depth (ft) | Inclination (°) | Azimuth (°) | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Vertical Section (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Turn Rate (°/100ft) |
| 10,700.00           | 7.11            | 314.50      | 10,607.97           | 932.52     | -548.38    | -899.81               | 10.00                 | -7.95                | -41.47              |
| 10,800.00           | 7.11            | 224.93      | 10,707.46           | 932.48     | -557.19    | -899.27               | 10.00                 | 0.00                 | -89.57              |
| 10,900.00           | 15.81           | 197.92      | 10,805.43           | 915.10     | -565.77    | -881.43               | 10.00                 | 8.70                 | -27.02              |
| 11,000.00           | 25.47           | 190.41      | 10,898.92           | 880.90     | -573.86    | -846.82               | 10.00                 | 9.66                 | -7.51               |
| 11,100.00           | 35.31           | 186.88      | 10,985.08           | 830.93     | -581.23    | -796.51               | 10.00                 | 9.84                 | -3.53               |
| 11,200.00           | 45.22           | 184.74      | 11,061.29           | 766.70     | -587.64    | -732.03               | 10.00                 | 9.91                 | -2.14               |
| 11,300.00           | 55.15           | 183.23      | 11,125.24           | 690.17     | -592.90    | -655.32               | 10.00                 | 9.93                 | -1.51               |
| 11,400.00           | 65.10           | 182.06      | 11,174.99           | 603.66     | -596.85    | -568.72               | 10.00                 | 9.95                 | -1.18               |
| 11,500.00           | 75.06           | 181.06      | 11,209.02           | 509.80     | -599.38    | -474.87               | 10.00                 | 9.96                 | -1.00               |
| 11,600.00           | 85.02           | 180.14      | 11,226.30           | 411.44     | -600.40    | -376.61               | 10.00                 | 9.96                 | -0.91               |
| 11,650.03           | 90.00           | 179.70      | 11,228.47           | 361.47     | -600.33    | -326.73               | 10.00                 | 9.96                 | -0.88               |
| 11,700.00           | 90.00           | 179.70      | 11,228.47           | 311.50     | -600.07    | -276.85               | 0.00                  | 0.00                 | 0.00                |
| 11,800.00           | 90.00           | 179.70      | 11,228.47           | 211.50     | -599.55    | -177.04               | 0.00                  | 0.00                 | 0.00                |
| 11,900.00           | 90.00           | 179.70      | 11,228.47           | 111.50     | -599.03    | -77.24                | 0.00                  | 0.00                 | 0.00                |
| 12,000.00           | 90.00           | 179.70      | 11,228.47           | 11.50      | -598.51    | 22.57                 | 0.00                  | 0.00                 | 0.00                |
| 12,100.00           | 90.00           | 179.70      | 11,228.47           | -88.50     | -597.99    | 122.38                | 0.00                  | 0.00                 | 0.00                |
| 12,200.00           | 90.00           | 179.70      | 11,228.47           | -188.49    | -597.47    | 222.18                | 0.00                  | 0.00                 | 0.00                |
| 12,300.00           | 90.00           | 179.70      | 11,228.47           | -288.49    | -596.95    | 321.99                | 0.00                  | 0.00                 | 0.00                |
| 12,400.00           | 90.00           | 179.70      | 11,228.47           | -388.49    | -596.43    | 421.80                | 0.00                  | 0.00                 | 0.00                |
| 12,500.00           | 90.00           | 179.70      | 11,228.47           | -488.49    | -595.91    | 521.61                | 0.00                  | 0.00                 | 0.00                |
| 12,600.00           | 90.00           | 179.70      | 11,228.47           | -588.49    | -595.39    | 621.41                | 0.00                  | 0.00                 | 0.00                |
| 12,700.00           | 90.00           | 179.70      | 11,228.47           | -688.49    | -594.87    | 721.22                | 0.00                  | 0.00                 | 0.00                |
| 12,800.00           | 90.00           | 179.70      | 11,228.47           | -788.49    | -594.35    | 821.03                | 0.00                  | 0.00                 | 0.00                |
| 12,900.00           | 90.00           | 179.70      | 11,228.47           | -888.48    | -593.83    | 920.83                | 0.00                  | 0.00                 | 0.00                |
| 13,000.00           | 90.00           | 179.70      | 11,228.47           | -988.48    | -593.31    | 1,020.64              | 0.00                  | 0.00                 | 0.00                |
| 13,100.00           | 90.00           | 179.70      | 11,228.47           | -1,088.48  | -592.79    | 1,120.45              | 0.00                  | 0.00                 | 0.00                |
| 13,200.00           | 90.00           | 179.70      | 11,228.47           | -1,188.48  | -592.27    | 1,220.25              | 0.00                  | 0.00                 | 0.00                |
| 13,300.00           | 90.00           | 179.70      | 11,228.47           | -1,288.48  | -591.75    | 1,320.06              | 0.00                  | 0.00                 | 0.00                |
| 13,400.00           | 90.00           | 179.70      | 11,228.47           | -1,388.48  | -591.23    | 1,419.87              | 0.00                  | 0.00                 | 0.00                |
| 13,500.00           | 90.00           | 179.70      | 11,228.47           | -1,488.48  | -590.71    | 1,519.68              | 0.00                  | 0.00                 | 0.00                |
| 13,600.00           | 90.00           | 179.70      | 11,228.47           | -1,588.48  | -590.19    | 1,619.48              | 0.00                  | 0.00                 | 0.00                |
| 13,700.00           | 90.00           | 179.70      | 11,228.47           | -1,688.47  | -589.67    | 1,719.29              | 0.00                  | 0.00                 | 0.00                |
| 13,800.00           | 90.00           | 179.70      | 11,228.47           | -1,788.47  | -589.15    | 1,819.10              | 0.00                  | 0.00                 | 0.00                |
| 13,900.00           | 90.00           | 179.70      | 11,228.47           | -1,888.47  | -588.63    | 1,918.90              | 0.00                  | 0.00                 | 0.00                |
| 14,000.00           | 90.00           | 179.70      | 11,228.47           | -1,988.47  | -588.11    | 2,018.71              | 0.00                  | 0.00                 | 0.00                |
| 14,100.00           | 90.00           | 179.70      | 11,228.47           | -2,088.47  | -587.59    | 2,118.52              | 0.00                  | 0.00                 | 0.00                |
| 14,200.00           | 90.00           | 179.70      | 11,228.47           | -2,188.47  | -587.07    | 2,218.33              | 0.00                  | 0.00                 | 0.00                |
| 14,300.00           | 90.00           | 179.70      | 11,228.47           | -2,288.47  | -586.55    | 2,318.13              | 0.00                  | 0.00                 | 0.00                |
| 14,400.00           | 90.00           | 179.70      | 11,228.47           | -2,388.46  | -586.03    | 2,417.94              | 0.00                  | 0.00                 | 0.00                |
| 14,500.00           | 90.00           | 179.70      | 11,228.47           | -2,488.46  | -585.51    | 2,517.75              | 0.00                  | 0.00                 | 0.00                |
| 14,600.00           | 90.00           | 179.70      | 11,228.47           | -2,588.46  | -584.99    | 2,617.55              | 0.00                  | 0.00                 | 0.00                |
| 14,700.00           | 90.00           | 179.70      | 11,228.47           | -2,688.46  | -584.47    | 2,717.36              | 0.00                  | 0.00                 | 0.00                |
| 14,800.00           | 90.00           | 179.70      | 11,228.47           | -2,788.46  | -583.95    | 2,817.17              | 0.00                  | 0.00                 | 0.00                |
| 14,900.00           | 90.00           | 179.70      | 11,228.47           | -2,888.46  | -583.43    | 2,916.97              | 0.00                  | 0.00                 | 0.00                |
| 15,000.00           | 90.00           | 179.70      | 11,228.47           | -2,988.46  | -582.91    | 3,016.78              | 0.00                  | 0.00                 | 0.00                |
| 15,100.00           | 90.00           | 179.70      | 11,228.47           | -3,088.46  | -582.39    | 3,116.59              | 0.00                  | 0.00                 | 0.00                |
| 15,200.00           | 90.00           | 179.70      | 11,228.47           | -3,188.45  | -581.87    | 3,216.40              | 0.00                  | 0.00                 | 0.00                |
| 15,300.00           | 90.00           | 179.70      | 11,228.47           | -3,288.45  | -581.35    | 3,316.20              | 0.00                  | 0.00                 | 0.00                |
| 15,400.00           | 90.00           | 179.70      | 11,228.47           | -3,388.45  | -580.83    | 3,416.01              | 0.00                  | 0.00                 | 0.00                |
| 15,500.00           | 90.00           | 179.70      | 11,228.47           | -3,488.45  | -580.31    | 3,515.82              | 0.00                  | 0.00                 | 0.00                |
| 15,600.00           | 90.00           | 179.70      | 11,228.47           | -3,588.45  | -579.79    | 3,615.62              | 0.00                  | 0.00                 | 0.00                |
| 15,700.00           | 90.00           | 179.70      | 11,228.47           | -3,688.45  | -579.27    | 3,715.43              | 0.00                  | 0.00                 | 0.00                |
| 15,800.00           | 90.00           | 179.70      | 11,228.47           | -3,788.45  | -578.75    | 3,815.24              | 0.00                  | 0.00                 | 0.00                |
| 15,900.00           | 90.00           | 179.70      | 11,228.47           | -3,888.44  | -578.23    | 3,915.05              | 0.00                  | 0.00                 | 0.00                |
| 16,000.00           | 90.00           | 179.70      | 11,228.47           | -3,988.44  | -577.71    | 4,014.85              | 0.00                  | 0.00                 | 0.00                |



# OXY

## Planning Report

|                  |                                     |                                     |                                     |
|------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| <b>Database:</b> | HOPSPP                              | <b>Local Co-ordinate Reference:</b> | Well Corral Gorge 12-13 Fed Com 53H |
| <b>Company:</b>  | ENGINEERING DESIGNS                 | <b>TVD Reference:</b>               | RKB=25' @ 3171.50ft                 |
| <b>Project:</b>  | PRD NM DIRECTIONAL PLANS (NAD 1983) | <b>MD Reference:</b>                | RKB=25' @ 3171.50ft                 |
| <b>Site:</b>     | Corral Gorge 12_13                  | <b>North Reference:</b>             | Grid                                |
| <b>Well:</b>     | Corral Gorge 12-13 Fed Com 53H      | <b>Survey Calculation Method:</b>   | Minimum Curvature                   |
| <b>Wellbore:</b> | Wellbore #1                         |                                     |                                     |
| <b>Design:</b>   | Permitting Plan                     |                                     |                                     |

| Planned Survey      |                 |             |                     |            |            |                       |                       |                      |                     |
|---------------------|-----------------|-------------|---------------------|------------|------------|-----------------------|-----------------------|----------------------|---------------------|
| Measured Depth (ft) | Inclination (°) | Azimuth (°) | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Vertical Section (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Turn Rate (°/100ft) |
| 16,100.00           | 90.00           | 179.70      | 11,228.47           | -4,088.44  | -577.19    | 4,114.66              | 0.00                  | 0.00                 | 0.00                |
| 16,200.00           | 90.00           | 179.70      | 11,228.47           | -4,188.44  | -576.67    | 4,214.47              | 0.00                  | 0.00                 | 0.00                |
| 16,300.00           | 90.00           | 179.70      | 11,228.47           | -4,288.44  | -576.15    | 4,314.27              | 0.00                  | 0.00                 | 0.00                |
| 16,400.00           | 90.00           | 179.70      | 11,228.47           | -4,388.44  | -575.63    | 4,414.08              | 0.00                  | 0.00                 | 0.00                |
| 16,500.00           | 90.00           | 179.70      | 11,228.47           | -4,488.44  | -575.11    | 4,513.89              | 0.00                  | 0.00                 | 0.00                |
| 16,600.00           | 90.00           | 179.70      | 11,228.47           | -4,588.43  | -574.59    | 4,613.69              | 0.00                  | 0.00                 | 0.00                |
| 16,700.00           | 90.00           | 179.70      | 11,228.47           | -4,688.43  | -574.07    | 4,713.50              | 0.00                  | 0.00                 | 0.00                |
| 16,800.00           | 90.00           | 179.70      | 11,228.47           | -4,788.43  | -573.55    | 4,813.31              | 0.00                  | 0.00                 | 0.00                |
| 16,900.00           | 90.00           | 179.70      | 11,228.47           | -4,888.43  | -573.03    | 4,913.12              | 0.00                  | 0.00                 | 0.00                |
| 17,000.00           | 90.00           | 179.70      | 11,228.47           | -4,988.43  | -572.51    | 5,012.92              | 0.00                  | 0.00                 | 0.00                |
| 17,100.00           | 90.00           | 179.70      | 11,228.47           | -5,088.43  | -571.99    | 5,112.73              | 0.00                  | 0.00                 | 0.00                |
| 17,200.00           | 90.00           | 179.70      | 11,228.47           | -5,188.43  | -571.47    | 5,212.54              | 0.00                  | 0.00                 | 0.00                |
| 17,300.00           | 90.00           | 179.70      | 11,228.47           | -5,288.43  | -570.95    | 5,312.34              | 0.00                  | 0.00                 | 0.00                |
| 17,400.00           | 90.00           | 179.70      | 11,228.47           | -5,388.42  | -570.43    | 5,412.15              | 0.00                  | 0.00                 | 0.00                |
| 17,500.00           | 90.00           | 179.70      | 11,228.47           | -5,488.42  | -569.91    | 5,511.96              | 0.00                  | 0.00                 | 0.00                |
| 17,600.00           | 90.00           | 179.70      | 11,228.47           | -5,588.42  | -569.39    | 5,611.77              | 0.00                  | 0.00                 | 0.00                |
| 17,700.00           | 90.00           | 179.70      | 11,228.47           | -5,688.42  | -568.87    | 5,711.57              | 0.00                  | 0.00                 | 0.00                |
| 17,800.00           | 90.00           | 179.70      | 11,228.47           | -5,788.42  | -568.35    | 5,811.38              | 0.00                  | 0.00                 | 0.00                |
| 17,900.00           | 90.00           | 179.70      | 11,228.47           | -5,888.42  | -567.83    | 5,911.19              | 0.00                  | 0.00                 | 0.00                |
| 18,000.00           | 90.00           | 179.70      | 11,228.47           | -5,988.42  | -567.31    | 6,010.99              | 0.00                  | 0.00                 | 0.00                |
| 18,100.00           | 90.00           | 179.70      | 11,228.47           | -6,088.41  | -566.80    | 6,110.80              | 0.00                  | 0.00                 | 0.00                |
| 18,200.00           | 90.00           | 179.70      | 11,228.47           | -6,188.41  | -566.28    | 6,210.61              | 0.00                  | 0.00                 | 0.00                |
| 18,300.00           | 90.00           | 179.70      | 11,228.47           | -6,288.41  | -565.76    | 6,310.42              | 0.00                  | 0.00                 | 0.00                |
| 18,400.00           | 90.00           | 179.70      | 11,228.47           | -6,388.41  | -565.24    | 6,410.22              | 0.00                  | 0.00                 | 0.00                |
| 18,500.00           | 90.00           | 179.70      | 11,228.47           | -6,488.41  | -564.72    | 6,510.03              | 0.00                  | 0.00                 | 0.00                |
| 18,600.00           | 90.00           | 179.70      | 11,228.47           | -6,588.41  | -564.20    | 6,609.84              | 0.00                  | 0.00                 | 0.00                |
| 18,700.00           | 90.00           | 179.70      | 11,228.47           | -6,688.41  | -563.68    | 6,709.64              | 0.00                  | 0.00                 | 0.00                |
| 18,800.00           | 90.00           | 179.70      | 11,228.47           | -6,788.41  | -563.16    | 6,809.45              | 0.00                  | 0.00                 | 0.00                |
| 18,900.00           | 90.00           | 179.70      | 11,228.47           | -6,888.40  | -562.64    | 6,909.26              | 0.00                  | 0.00                 | 0.00                |
| 19,000.00           | 90.00           | 179.70      | 11,228.47           | -6,988.40  | -562.12    | 7,009.06              | 0.00                  | 0.00                 | 0.00                |
| 19,100.00           | 90.00           | 179.70      | 11,228.47           | -7,088.40  | -561.60    | 7,108.87              | 0.00                  | 0.00                 | 0.00                |
| 19,200.00           | 90.00           | 179.70      | 11,228.47           | -7,188.40  | -561.08    | 7,208.68              | 0.00                  | 0.00                 | 0.00                |
| 19,300.00           | 90.00           | 179.70      | 11,228.47           | -7,288.40  | -560.56    | 7,308.49              | 0.00                  | 0.00                 | 0.00                |
| 19,400.00           | 90.00           | 179.70      | 11,228.47           | -7,388.40  | -560.04    | 7,408.29              | 0.00                  | 0.00                 | 0.00                |
| 19,500.00           | 90.00           | 179.70      | 11,228.47           | -7,488.40  | -559.52    | 7,508.10              | 0.00                  | 0.00                 | 0.00                |
| 19,600.00           | 90.00           | 179.70      | 11,228.47           | -7,588.39  | -559.00    | 7,607.91              | 0.00                  | 0.00                 | 0.00                |
| 19,700.00           | 90.00           | 179.70      | 11,228.47           | -7,688.39  | -558.48    | 7,707.71              | 0.00                  | 0.00                 | 0.00                |
| 19,800.00           | 90.00           | 179.70      | 11,228.47           | -7,788.39  | -557.96    | 7,807.52              | 0.00                  | 0.00                 | 0.00                |
| 19,900.00           | 90.00           | 179.70      | 11,228.47           | -7,888.39  | -557.44    | 7,907.33              | 0.00                  | 0.00                 | 0.00                |
| 20,000.00           | 90.00           | 179.70      | 11,228.47           | -7,988.39  | -556.92    | 8,007.14              | 0.00                  | 0.00                 | 0.00                |
| 20,100.00           | 90.00           | 179.70      | 11,228.47           | -8,088.39  | -556.40    | 8,106.94              | 0.00                  | 0.00                 | 0.00                |
| 20,200.00           | 90.00           | 179.70      | 11,228.47           | -8,188.39  | -555.88    | 8,206.75              | 0.00                  | 0.00                 | 0.00                |
| 20,300.00           | 90.00           | 179.70      | 11,228.47           | -8,288.38  | -555.36    | 8,306.56              | 0.00                  | 0.00                 | 0.00                |
| 20,400.00           | 90.00           | 179.70      | 11,228.47           | -8,388.38  | -554.84    | 8,406.36              | 0.00                  | 0.00                 | 0.00                |
| 20,500.00           | 90.00           | 179.70      | 11,228.47           | -8,488.38  | -554.32    | 8,506.17              | 0.00                  | 0.00                 | 0.00                |
| 20,600.00           | 90.00           | 179.70      | 11,228.47           | -8,588.38  | -553.80    | 8,605.98              | 0.00                  | 0.00                 | 0.00                |
| 20,700.00           | 90.00           | 179.70      | 11,228.47           | -8,688.38  | -553.28    | 8,705.78              | 0.00                  | 0.00                 | 0.00                |
| 20,800.00           | 90.00           | 179.70      | 11,228.47           | -8,788.38  | -552.76    | 8,805.59              | 0.00                  | 0.00                 | 0.00                |
| 20,900.00           | 90.00           | 179.70      | 11,228.47           | -8,888.38  | -552.24    | 8,905.40              | 0.00                  | 0.00                 | 0.00                |
| 21,000.00           | 90.00           | 179.70      | 11,228.47           | -8,988.38  | -551.72    | 9,005.21              | 0.00                  | 0.00                 | 0.00                |
| 21,100.00           | 90.00           | 179.70      | 11,228.47           | -9,088.37  | -551.20    | 9,105.01              | 0.00                  | 0.00                 | 0.00                |
| 21,200.00           | 90.00           | 179.70      | 11,228.47           | -9,188.37  | -550.68    | 9,204.82              | 0.00                  | 0.00                 | 0.00                |
| 21,300.00           | 90.00           | 179.70      | 11,228.47           | -9,288.37  | -550.16    | 9,304.63              | 0.00                  | 0.00                 | 0.00                |
| 21,400.00           | 90.00           | 179.70      | 11,228.47           | -9,388.37  | -549.64    | 9,404.43              | 0.00                  | 0.00                 | 0.00                |
| 21,500.00           | 90.00           | 179.70      | 11,228.47           | -9,488.37  | -549.12    | 9,504.24              | 0.00                  | 0.00                 | 0.00                |

OXY  
Planning Report

|           |                                     |                              |                                     |
|-----------|-------------------------------------|------------------------------|-------------------------------------|
| Database: | HOPSPP                              | Local Co-ordinate Reference: | Well Corral Gorge 12-13 Fed Com 53H |
| Company:  | ENGINEERING DESIGNS                 | TVD Reference:               | RKB=25' @ 3171.50ft                 |
| Project:  | PRD NM DIRECTIONAL PLANS (NAD 1983) | MD Reference:                | RKB=25' @ 3171.50ft                 |
| Site:     | Corral Gorge 12_13                  | North Reference:             | Grid                                |
| Well:     | Corral Gorge 12-13 Fed Com 53H      | Survey Calculation Method:   | Minimum Curvature                   |
| Wellbore: | Wellbore #1                         |                              |                                     |
| Design:   | Permitting Plan                     |                              |                                     |

| Planned Survey      |                 |             |                     |            |            |                       |                       |                      |                     |
|---------------------|-----------------|-------------|---------------------|------------|------------|-----------------------|-----------------------|----------------------|---------------------|
| Measured Depth (ft) | Inclination (°) | Azimuth (°) | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Vertical Section (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Turn Rate (°/100ft) |
| 21,600.00           | 90.00           | 179.70      | 11,228.47           | -9,588.37  | -548.60    | 9,604.05              | 0.00                  | 0.00                 | 0.00                |
| 21,634.03           | 90.00           | 179.70      | 11,228.47           | -9,622.40  | -548.42    | 9,638.01              | 0.00                  | 0.00                 | 0.00                |

| Design Targets                                                                               |                   |               |              |           |            |            |                 |                |                       |
|----------------------------------------------------------------------------------------------|-------------------|---------------|--------------|-----------|------------|------------|-----------------|----------------|-----------------------|
| Target Name                                                                                  | - hit/miss target | Dip Angle (°) | Dip Dir. (°) | TVD (ft)  | +N/-S (ft) | +E/-W (ft) | Northing (usft) | Easting (usft) |                       |
|                                                                                              | - Shape           |               |              |           |            |            |                 |                | Latitude Longitude    |
| KOP (Corral Gorge                                                                            |                   | 0.00          | 0.00         | 0.00      | 935.85     | -603.34    | 419,214.80      | 664,634.42     | 32.151873 -103.934930 |
| - plan misses target center by 1113.48ft at 0.00ft MD (0.00 TVD, 0.00 N, 0.00 E)             |                   |               |              |           |            |            |                 |                |                       |
| - Point                                                                                      |                   |               |              |           |            |            |                 |                |                       |
| PBHL (Corral Gorge                                                                           |                   | 0.00          | 0.00         | 11,228.47 | -9,622.40  | -548.42    | 408,657.35      | 664,689.33     | 32.122851 -103.934878 |
| - plan hits target center                                                                    |                   |               |              |           |            |            |                 |                |                       |
| - Point                                                                                      |                   |               |              |           |            |            |                 |                |                       |
| FTP (Corral Gorge                                                                            |                   | 0.00          | 0.00         | 11,228.47 | 885.86     | -603.06    | 419,164.81      | 664,634.70     | 32.151735 -103.934929 |
| - plan misses target center by 204.00ft at 11216.58ft MD (11072.79 TVD, 754.81 N, -588.60 E) |                   |               |              |           |            |            |                 |                |                       |
| - Point                                                                                      |                   |               |              |           |            |            |                 |                |                       |

| Formations          |                     |                 |           |         |                   |  |
|---------------------|---------------------|-----------------|-----------|---------|-------------------|--|
| Measured Depth (ft) | Vertical Depth (ft) | Name            | Lithology | Dip (°) | Dip Direction (°) |  |
| 426.50              | 426.50              | RUSTLER         |           |         |                   |  |
| 853.50              | 853.50              | SALADO          |           |         |                   |  |
| 1,817.50            | 1,817.50            | CASTILE         |           |         |                   |  |
| 3,370.50            | 3,370.50            | DELAWARE        |           |         |                   |  |
| 3,373.50            | 3,373.50            | BELL CANYON     |           |         |                   |  |
| 4,284.67            | 4,284.50            | CHERRY CANYON   |           |         |                   |  |
| 5,629.66            | 5,614.50            | BRUSHY CANYON   |           |         |                   |  |
| 7,189.35            | 7,150.50            | BONE SPRING     |           |         |                   |  |
| 8,162.13            | 8,108.50            | BONE SPRING 1ST |           |         |                   |  |
| 9,026.25            | 8,959.50            | BONE SPRING 2ND |           |         |                   |  |
| 10,112.76           | 10,029.50           | BONE SPRING 3RD |           |         |                   |  |
| 10,445.82           | 10,357.50           | WOLFCAMP        |           |         |                   |  |
| 10,592.04           | 10,501.50           | WOLFCAMP A      |           |         |                   |  |

| Plan Annotations    |                     |                   |            |                            |
|---------------------|---------------------|-------------------|------------|----------------------------|
| Measured Depth (ft) | Vertical Depth (ft) | Local Coordinates |            | Comment                    |
|                     |                     | +N/-S (ft)        | +E/-W (ft) |                            |
| 3,965.00            | 3,965.00            | 0.00              | 0.00       | Build 1°/100'              |
| 4,964.88            | 4,959.81            | 75.04             | -44.07     | Hold 10° Tangent           |
| 10,663.66           | 10,572.04           | 928.23            | -545.18    | KOP, Build & Turn 10°/100' |
| 11,650.03           | 11,228.47           | 361.47            | -600.33    | Landing Point              |
| 21,634.03           | 11,228.47           | -9,622.40         | -548.42    | TD at 21634.03' MD         |

## PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

|                             |                                     |
|-----------------------------|-------------------------------------|
| <b>OPERATOR'S NAME:</b>     | OXY USA INC.                        |
| <b>WELL NAME &amp; NO.:</b> | CORRAL GEORGE 12-13 FEDERAL COM 53H |
| <b>LOCATION:</b>            | SEC12 T25S R29E - NMP               |
| <b>COUNTY:</b>              | Eddy County, New Mexico             |

Create COAs

|                                                                                                    |                                                                                                                                                                                                                                                               |                                                                       |
|----------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------|
| <b>H<sub>2</sub>S</b>                                                                              | <b>Cave / Karst</b>                                                                                                                                                                                                                                           | <b>Waste Prevention Rule</b>                                          |
| Present                                                                                            | Low                                                                                                                                                                                                                                                           | Waste Minimization Plan                                               |
| <b>Potash</b>                                                                                      | <b>R-111-Q Design</b>                                                                                                                                                                                                                                         |                                                                       |
| None                                                                                               |                                                                                                                                                                                                                                                               |                                                                       |
| <b>Wellhead</b>                                                                                    | <b>Casing</b>                                                                                                                                                                                                                                                 |                                                                       |
| Multibowl                                                                                          | 3-String Well                                                                                                                                                                                                                                                 |                                                                       |
|                                                                                                    | <input type="checkbox"/> Liner <input type="checkbox"/> Fluid Filled <input type="checkbox"/> Casing Clearance                                                                                                                                                |                                                                       |
|                                                                                                    | <b>Cementing</b>                                                                                                                                                                                                                                              |                                                                       |
| <input checked="" type="checkbox"/> Flex Hose<br><input checked="" type="checkbox"/> Break Testing | <input type="checkbox"/> DV Tool <input checked="" type="checkbox"/> Bradenhead <input checked="" type="checkbox"/> Echometer<br><input checked="" type="checkbox"/> Offline Cement <input type="checkbox"/> Open Annulus <input type="checkbox"/> Pilot Hole |                                                                       |
| <b>Special Requirements</b>                                                                        |                                                                                                                                                                                                                                                               |                                                                       |
| <input type="checkbox"/> Capitan Reef                                                              | <input type="checkbox"/> Water Disposal                                                                                                                                                                                                                       | <input checked="" type="checkbox"/> COM <input type="checkbox"/> Unit |

### A. HYDROGEN SULFIDE

A Hydrogen Sulfide (H<sub>2</sub>S) Drilling Plan shall be activated AT SPUD. As a result, the Hydrogen Sulfide area must meet all requirements from 43 CFR 3176, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

### B. CASING

**WELL APPROVED FOR THE TWO "A" BLANKET DESIGNS (A1 AND A2.)  
PARAMETERS WITHIN BOUNDARY CONDITIONS.**

**DESIGN A1:**

1. The **10-3/4** inch surface casing shall be set at approximately **794** feet (a minimum of **70'** into the Rustler Anhydrite, above the salt, and below usable fresh water) and cemented to the surface.
  - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic-type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
  - b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or **500 pounds compressive strength**, whichever is greater (including lead cement.)
  - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
  - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The minimum required fill of cement behind the **7-5/8** inch intermediate casing is **cement to surface**. If cement does not circulate, see B.1.a, c-d above.

**Bradenhead Squeeze:** Operator has proposed to cement in two stages by conventionally cementing the first stage and performing a bradenhead squeeze on the second stage, contingent upon no returns to surface.

- a. **First stage:** Operator will cement with intent to reach the top of the **Brushy Canyon**.
- b. **Second stage:** Operator to squeeze and top-out. Cement to meet requirements listed for this casing string. If cement does not circulate see B.1.a, c-d above.

Operator has proposed to pump down **Surface X Intermediate 1** annulus. Submit results to the BLM. If cement does not tie-back into the previous casing shoe, a third stage remediation BH may be performed. The appropriate BLM office shall be notified.

**Operator must top out cement after the bradenhead squeeze and verify cement to surface. Operator can also check TOC with Echo-meter. CBL must be run from TD of the 7-5/8" casing to surface if confidence is lacking on the quality of the bradenhead squeeze cement job. Submit results to BLM.**

3. The minimum required fill of cement behind the **5-1/2** inch production casing is at least **200 feet** into previous casing string. Operator shall provide method of verification.
  - If cement does not circulate to surface on the previous casing, this string must come to surface. BLM must be notified with updated cementing and ECD monitoring plans.

**DESIGN A2:**

1. The **13-3/8** inch surface casing shall be set at approximately **794** feet (a minimum of **70'** into the Rustler Anhydrite, above the salt, and below usable fresh water) and cemented to the surface.
  - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic-type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
  - b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or **500 pounds compressive strength**, whichever is greater (including lead cement.)
  - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
  - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The minimum required fill of cement behind the **7-5/8** inch intermediate casing is **cement to surface**. If cement does not circulate, see B.1.a, c-d above.

**Bradenhead Squeeze:** Operator has proposed to cement in two stages by conventionally cementing the first stage and performing a bradenhead squeeze on the second stage, contingent upon no returns to surface.

- a. **First stage:** Operator will cement with intent to reach the top of the **Brushy Canyon**.
- b. **Second stage:** Operator to squeeze and top-out. Cement to meet requirements listed for this casing string. If cement does not circulate see B.1.a, c-d above.

Operator has proposed to pump down **Surface X Intermediate 1** annulus. Submit results to the BLM. If cement does not tie-back into the previous casing shoe, a third stage remediation BH may be performed. The appropriate BLM office shall be notified.

**Operator must top out cement after the bradenhead squeeze and verify cement to surface. Operator can also check TOC with Echo-meter. CBL must be run from TD of the 7-5/8" casing to surface if confidence is lacking on the quality of the bradenhead squeeze cement job. Submit results to BLM.**

3. The minimum required fill of cement behind the **5-1/2** inch production casing is at least **200 feet** into previous casing string. Operator shall provide method of verification.
  - If cement does not circulate to surface on the previous casing, this string must come to surface. BLM must be notified with updated cementing and ECD monitoring plans.



### C. PRESSURE CONTROL

1. Operator has proposed a multi-bowl wellhead assembly. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M) psi** and below the intermediate casing shoe shall be **10,000 (10M) psi**. **Variance is approved to use a 5000 (5M) annular which shall be tested to 3500 psi.**
  - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
  - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
  - c. Manufacturer representative shall install the test plug for the initial BOP test.
  - d. If the cement does not circulate and one-inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
  - e. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172 must be followed.
2. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).

#### **BOPE Break Testing Variance**

**(Note: For a minimum 5M BOPE or less (Utilizing a 10M BOPE system))**

- BOPE Break Testing is ONLY permitted for hole sections with 5M MASP or less.
- The break test should involve a shell test that includes testing the upper pipe rams as proposed.
- Variance only pertains to the hole-sections in and shallower than the Wolfcamp formation. Break testing is NOT allowed when planning to penetrate the Penn group.
- While in transfer between wells, the BOPE shall be secured by the hydraulic carrier or cradle in accordance with API STD 53.
- Any well control event while drilling require notification to the BLM Petroleum Engineer.
- A full BOPE test is required prior to drilling the first intermediate section.
- If a hole section tends to show more background gas than normal, please notify BLM Engineer prior to proceeding with break testing on the next well.
- The BLM PET is to be contacted 4 hours prior to BOPE tests.
  - Eddy County Petroleum Engineering Inspection Staff: (575) 361-2822
  - Lea County Petroleum Engineering Inspection Staff: (575) 689-5981
- As a minimum, a full BOPE test shall be performed at 21-day intervals.
- In the event any repairs or replacement of the BOPE is required, the BOPE shall test as per 43 CFR 3172. Function test is NOT adequate when repairs or replacement of BOPE is needed. Function test is NOT adequate in the event of repairs or replacements.

- If in the event break testing is not utilized, then a full BOPE test would be conducted.

#### **D. SPECIAL REQUIREMENT(S)**

##### **Communitization Agreement:**

- The operator will submit a Communitization Agreement to the Santa Fe Office, 301 Dinosaur Trail Santa Fe, New Mexico 87508, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- The operator will submit an as-drilled survey well plat of the well completion, but are not limited to, those specified in 43 CFR 3171 and 3172.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

#### **Offline Cementing**

Offline cementing has been approved for **all hole sections, excluding production**. Contact the BLM prior to the commencement of any offline cementing procedure.

## GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

**Contact Lea County Petroleum Engineering Inspection Staff:**

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575) 689-5981

**Contact Eddy County Petroleum Engineering Inspection Staff:**

Email or call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220;

[BLM\\_NM\\_CFO\\_DrillingNotifications@BLM.GOV](mailto:BLM_NM_CFO_DrillingNotifications@BLM.GOV); (575) 361-2822

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
  - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
  - b. When the operator proposes to set surface casing with Spudder Rig
    - i. Notify the BLM when moving in and removing the Spudder Rig.
    - ii. Notify the BLM when moving in the 2<sup>nd</sup> Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
    - iii. BOP/BOPE test to be conducted per **43 CFR 3172** as soon as 2<sup>nd</sup> Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
3. For intervals in which cement to surface is required, cement to surface should be verified with a visual check and density or pH check to differentiate cement from spacer and drilling mud. The results should be documented in the driller's log and daily reports.

### A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement

- program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends of both lead and tail cement, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
  3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
  4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
  5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
  6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
  7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
  8. Whenever a casing string is cemented in the R-111-Q potash area, the NMOCD requirements shall be followed.

## **B. PRESSURE CONTROL**

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in **43 CFR 3172**.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard

- bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
  4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
    - i. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
    - ii. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
    - iii. Manufacturer representative shall install the test plug for the initial BOP test.
    - iv. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172.6(b)(9) must be followed.
    - v. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
  5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
    - i. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead cement), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
    - ii. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the cement plug. The BOPE test can be initiated after bumping the cement plug with the casing valve open. (only applies to single stage cement jobs, prior to the cement setting up.)



- iii. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer and can be initiated immediately with the casing valve open. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to **43 CFR 3172** with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for 8 hours or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- iv. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- v. The results of the test shall be reported to the appropriate BLM office.
- vi. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- vii. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- viii. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per **43 CFR 3172**.

### **C. DRILLING MUD**

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

### **D. WASTE MATERIAL AND FLUIDS**

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area. Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

KPI 7/17/2025




## **Permian Drilling Hydrogen Sulfide Drilling Operations Plan**

Open drill site. No homes or buildings are near the proposed location.

### **1. Escape**

Personnel shall escape upwind of wellbore in the event of an emergency gas release. Escape can take place through the lease road on the Southeast side of the location. Personnel need to move to a safe distance and block the entrance to location. If the primary route is not an option due to the wind direction, then a secondary egress route should be taken.

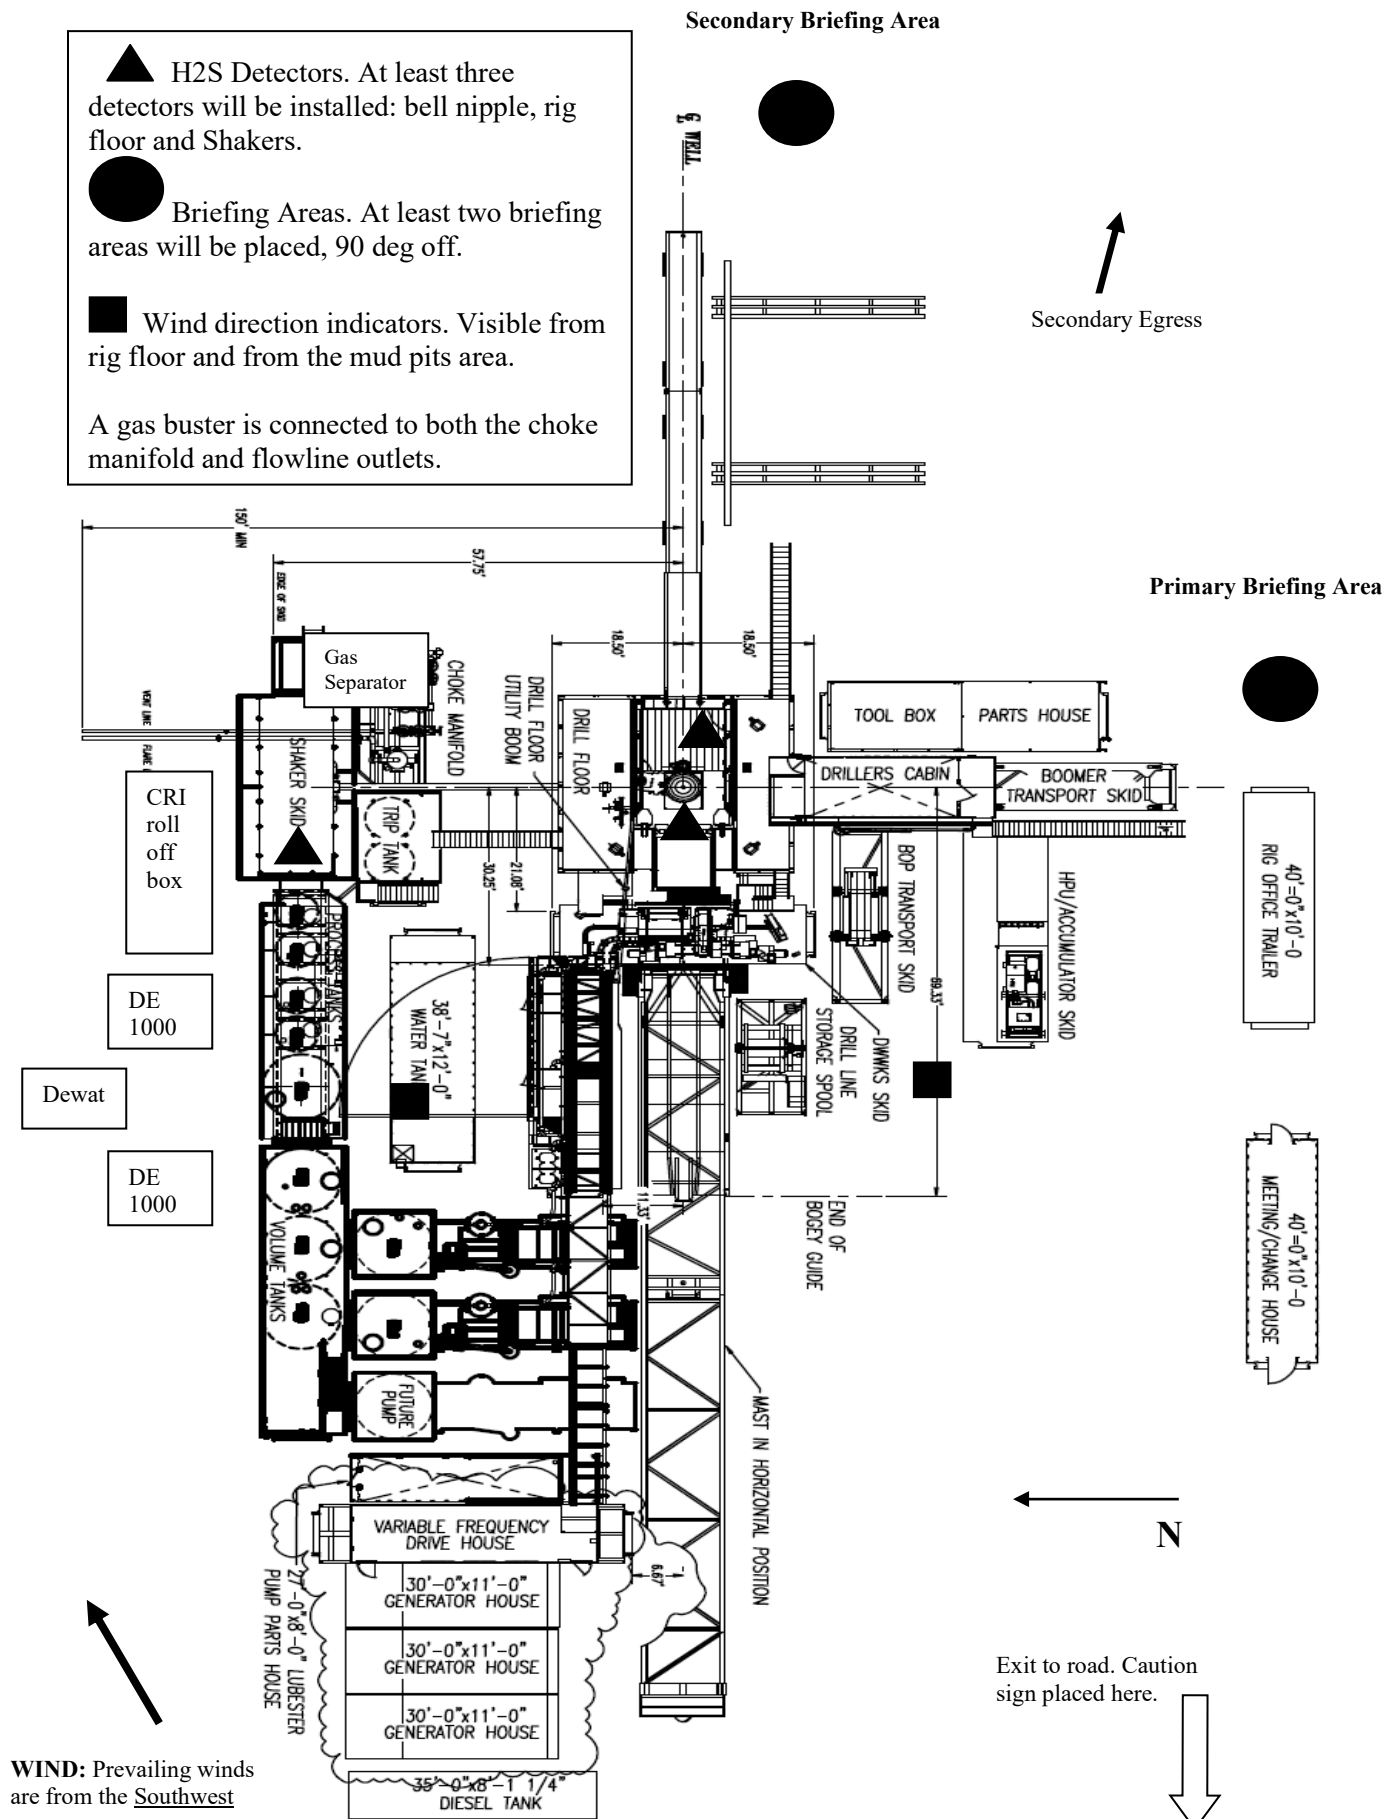



## **Permian Drilling Hydrogen Sulfide Drilling Operations Plan New Mexico**

### **Scope**

This contingency plan establishes guidelines for the public, all company employees, and contract employees who's work activities may involve exposure to hydrogen sulfide (H<sub>2</sub>S) gas.

While drilling this well, it is possible to encounter H<sub>2</sub>S bearing formations. At all times, the first barrier to control H<sub>2</sub>S emissions will be the drilling fluid, which will have a density high enough to control influx.

### **Objective**

1. Provide an immediate and predetermined response plan to any condition when H<sub>2</sub>S is detected. All H<sub>2</sub>S detections in excess of 10 parts per million (ppm) concentration are considered an Emergency.
2. Prevent any and all accidents, and prevent the uncontrolled release of hydrogen sulfide into the atmosphere.
3. Provide proper evacuation procedures to cope with emergencies.
4. Provide immediate and adequate medical attention should an injury occur.

### **Discussion**

|                                |                                                                                                               |
|--------------------------------|---------------------------------------------------------------------------------------------------------------|
| Implementation:                | This plan with all details is to be fully implemented before drilling to <u>commence</u> .                    |
| Emergency response Procedure:  | This section outlines the conditions and denotes steps to be taken in the event of an emergency.              |
| Emergency equipment Procedure: | This section outlines the safety and emergency equipment that will be required for the drilling of this well. |
| Training provisions:           | This section outlines the training provisions that must be adhered to prior to drilling.                      |
| Drilling emergency call lists: | Included are the telephone numbers of all persons to be contacted should an emergency exist.                  |
| Briefing:                      | This section deals with the briefing of all people involved in the drilling operation.                        |
| Public safety:                 | Public safety personnel will be made aware of any potential evacuation and any additional support needed.     |
| Check lists:                   | Status check lists and procedural check lists have been included to insure adherence to the plan.             |
| General information:           | A general information section has been included to supply support information.                                |



### **Hydrogen Sulfide Training**

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on the well:

1. The hazards and characteristics of H<sub>2</sub>S.
2. Proper use and maintenance of personal protective equipment and life support systems.
3. H<sub>2</sub>S detection.
4. Proper use of H<sub>2</sub>S detectors, alarms, warning systems, briefing areas, evacuation procedures and prevailing winds.
5. Proper techniques for first aid and rescue procedures.
6. Physical effects of hydrogen sulfide on the human body.
7. Toxicity of hydrogen sulfide and sulfur dioxide.
8. Use of SCBA and supplied air equipment.
9. First aid and artificial respiration.
10. Emergency rescue.

In addition, supervisory personnel will be trained in the following areas:

1. The effects of H<sub>2</sub>S on metal components. If high tensile strength tubular is to be used, personnel will be trained in their special maintenance requirements.
2. Corrective action and shut-in procedures when drilling a well, blowout prevention and well control procedures.
3. The contents and requirements of the H<sub>2</sub>S Drilling Operations Plan.

H<sub>2</sub>S training refresher must have been taken within one year prior to drilling the well. Specifics on the well to be drilled will be discussed during the pre-spud meeting. H<sub>2</sub>S and well control (choke) drills will be performed while drilling the well, at least on a weekly basis. This plan shall be available in the well site. All personnel will be required to carry the documentation proving that the H<sub>2</sub>S training has been taken.

#### **Service company and visiting personnel**

- A. Each service company that will be on this well will be notified if the zone contains H<sub>2</sub>S.
- B. Each service company must provide for the training and equipment of their employees before they arrive at the well site.
- C. Each service company will be expected to attend a well site

### **Emergency Equipment Requirements**

#### 1. Well control equipment

The well shall have hydraulic BOP equipment for the anticipated pressures. Equipment is to be tested on installation and follow Oxy Well Control standard, as well as 43 CFR part 3170 Subpart 3172.

*Special control equipment:*

- A. Hydraulic BOP equipment with remote control on ground.  
Remotely operated choke.
- B. Rotating head
- C. Gas buster equipment shall be installed before drilling out of surface pipe.

#### 2. Protective equipment for personnel

- A. Four (4) 30-minute positive pressure air packs (2 at each briefing area) on location.
- B. Adequate fire extinguishers shall be located at strategic locations.
- C. Radio / cell telephone communication will be available at the rig.
  - Rig floor and trailers.
  - Vehicle.

#### 3. Hydrogen sulfide sensors and alarms

- A. H<sub>2</sub>S sensor with alarms will be located on the rig floor, at the bell nipple, and at the flow line. These monitors will be set to alarm at 10 ppm with strobe light, and audible alarm.
- B. Hand operated detectors with tubes.
- C. H<sub>2</sub>S monitor tester (to be provided by contract Safety Company.)
- D. There shall be one combustible gas detector on location at all times.

#### 4. Visual Warning Systems

- A. One sign located at each location entrance with the following language:

**Caution – potential poison gas  
Hydrogen sulfide  
No admittance without authorization**

*Wind sock – wind streamers:*

- A. One 36” (in length) wind sock located at protection center, at height visible from rig floor.
- B. One 36” (in length) wind sock located at height visible from pit areas.

*Condition flags*

- A. One each condition flag to be displayed to denote conditions.

**green – normal conditions**

**yellow – potential danger**

**red – danger, H2S present**

- B. Condition flag shall be posted at each location sign entrance.

5. Mud Program

The mud program is designed to minimize the risk of having H2S and other formation fluids at surface. Proper mud weight and safe drilling practices will be applied. H2S scavengers will be used to minimize the hazards while drilling. Below is a summary of the drilling program.

*Mud inspection devices:*

Garrett gas train or hatch tester for inspection of sulfide concentration in mud system.

6. Metallurgy

- A. Drill string, casing, tubing, wellhead, blowout preventers, drilling spools or adapters, kill lines, choke manifold, lines and valves shall be suitable for the H2S service.
- B. All the elastomers, packing, seals and ring gaskets shall be suitable for H2S service.

7. Well Testing

No drill stem test will be performed on this well.

8. Evacuation plan

Evacuation routes should be established prior to well spud for each well and discussed with all rig personnel.

9. Designated area

- A. Parking and visitor area: all vehicles are to be parked at a predetermined safe distance from the wellhead.
- B. There will be a designated smoking area.
- C. Two briefing areas on either side of the location at the maximum allowable distance from the well bore so they offset prevailing winds perpendicularly, or at a 45-degree angle if wind direction tends to shift in the area.

**Emergency procedures**

- A. In the event of any evidence of H<sub>2</sub>S level above 10 ppm, take the following steps:
  - 1. The Driller will pick up off bottom, shut down the pumps, slow down the pipe rotation.
  - 2. Secure and don escape breathing equipment, report to the upwind designated safe briefing / muster area.
  - 3. All personnel on location will be accounted for and emergency search should begin for any missing, the Buddy System will be implemented.
  - 4. Order non-essential personnel to leave the well site, order all essential personnel out of the danger zone and upwind to the nearest designated safe briefing / muster area.
  - 5. Entrance to the location will be secured to a higher level than our usual "Meet and Greet" requirement, and the proper condition flag will be displayed at the entrance to the location.
  - 6. Take steps to determine if the H<sub>2</sub>S level can be corrected or suppressed and, if so, proceed as required.
- B. If uncontrollable conditions occur:
  - 1. Take steps to protect and/or remove any public in the down-wind area from the rig – partial evacuation and isolation. Notify necessary public safety personnel and appropriate regulatory entities (i.e. BLM) of the situation.

2. Remove all personnel to the nearest upwind designated safe briefing / muster area or off location.
3. Notify public safety personnel of safe briefing / muster area.
4. An assigned crew member will blockade the entrance to the location. No unauthorized personnel will be allowed entry to the location.
5. Proceed with best plan (at the time) to regain control of the well. Maintain tight security and safety procedures.

C. Responsibility:

1. Designated personnel.
  - a. Shall be responsible for the total implementation of this plan.
  - b. Shall be in complete command during any emergency.
  - c. Shall designate a back-up.

- All personnel:
1. On alarm, don escape unit and report to the nearest upwind designated safe briefing / muster area upw
  2. Check status of personnel (buddy system).
  3. Secure breathing equipment.
  4. Await orders from supervisor.

- Drill site manager:
1. Don escape unit if necessary and report to nearest upwind designated safe briefing / muster area.
  2. Coordinate preparations of individuals to return to point of release with tool pusher and driller (using the buddy system).
  3. Determine H2S concentrations.
  4. Assess situation and take control measures.

- Tool pusher:
1. Don escape unit Report to up nearest upwind designated safe briefing / muster area.
  2. Coordinate preparation of individuals to return to point of release with tool pusher drill site manager (using the buddy system).
  3. Determine H2S concentration.
  4. Assess situation and take control measures.

- Driller:
1. Don escape unit, shut down pumps, continue



- rotating DP.
  - 2. Check monitor for point of release.
  - 3. Report to nearest upwind designated safe briefing / muster area.
  - 4. Check status of personnel (in an attempt to rescue, use the buddy system).
  - 5. Assigns least essential person to notify Drill Site Manager and tool pusher by quickest means in case of their absence.
  - 6. Assumes the responsibilities of the Drill Site Manager and tool pusher until they arrive should they be absent.
- Derrick man
- Floor man #1
- Floor man #2
- Mud engineer:
- 1. Will remain in briefing / muster area until instructed by supervisor.
- 1. Report to nearest upwind designated safe briefing / muster area.
  - 2. When instructed, begin check of mud for ph and H2S level. (Garett gas train.)
- Safety personnel:
- 1. Mask up and check status of all personnel and secure operations as instructed by drill site manager.

### **Taking a kick**

When taking a kick during an H2S emergency, all personnel will follow standard Well control procedures after reporting to briefing area and masking up.

### **Open-hole logging**

All unnecessary personnel off floor. Drill Site Manager and safety personnel should monitor condition, advise status and determine need for use of air equipment.

### **Running casing or plugging**

Following the same “tripping” procedure as above. Drill Site Manager and safety personnel should determine if all personnel have access to protective equipment.

### **Ignition procedures**

The decision to ignite the well is the responsibility of the operator (Oxy Drilling Management). The decision should be made only as a last resort and in a situation where it is clear that:

1. Human life and property are endangered.
2. There is no hope controlling the blowout under the prevailing conditions at the well.

### **Instructions for igniting the well**

1. Two people are required for the actual igniting operation. They must wear self-contained breathing units and have a safety rope attached. One man (tool pusher or safety engineer) will check the atmosphere for explosive gases with the gas monitor. The other man is responsible for igniting the well.
2. Primary method to ignite: 25 mm flare gun with range of approximately 500 feet.
3. Ignite upwind and do not approach any closer than is warranted.
4. Select the ignition site best for protection, and which offers an easy escape route.
5. Before firing, check for presence of combustible gas.
6. After lighting, continue emergency action and procedure as before.
7. All unassigned personnel will remain in briefing area until instructed by supervisor or directed by the Drill Site Manager.

**Remember:** After well is ignited, burning hydrogen sulfide will convert to sulfur dioxide, which is also highly toxic. **Do not assume the area is safe after the well is ignited.**

**Status check list**

Note: All items on this list must be completed before drilling to production casing point.

1. H2S sign at location entrance.
2. Two (2) wind socks located as required.
3. Four (4) 30-minute positive pressure air packs (2 at each Briefing area) on location for all rig personnel and mud loggers.
4. Air packs inspected and ready for use.
5. Cascade system and hose line hook-up as needed.
6. Cascade system for refilling air bottles as needed.
7. Condition flag on location and ready for use.
8. H2S detection system hooked up and tested.
9. H2S alarm system hooked up and tested.
10. Hand operated H2S detector with tubes on location.
11. 1 – 100' length of nylon rope on location.
12. All rig crew and supervisors trained as required.
13. All outside service contractors advised of potential H2S hazard on well.
14. No smoking sign posted and a designated smoking area identified.
15. Calibration of all H2S equipment shall be noted on the IADC report.

Checked by: \_\_\_\_\_ Date: \_\_\_\_\_

**Procedural check list during H2S events**

**Perform each tour:**

1. Check fire extinguishers to see that they have the proper charge.
2. Check breathing equipment to ensure that it is in proper working order.
3. Make sure all the H2S detection system is operative.

**Perform each week:**

1. Check each piece of breathing equipment to make sure that demand or forced air regulator is working. This requires that the bottle be opened and the mask assembly be put on tight enough so that when you inhale, you receive air or feel air flow.
2. BOP skills (well control drills).
3. Check supply pressure on BOP accumulator stand by source.
4. Check breathing equipment mask assembly to see that straps are loosened and turned back, ready to put on.
5. Check pressure on breathing equipment air bottles to make sure they are charged to full volume. ( Air quality checked for proper air grade "D" before bringing to location)
6. Confirm pressure on all supply air bottles.
7. Perform breathing equipment drills with on-site personnel.
8. Check the following supplies for availability.
  - A. Emergency telephone list.
  - B. Hand operated H2S detectors and tubes.

**General evacuation plan**

1. When the company approved supervisor (Drill Site Manager, consultant, rig pusher, or driller) determines the H2S gas cannot be limited to the well location and the public will be involved, he will activate the evacuation plan.
2. Drill Site Manager or designee will notify local government agency that a hazardous condition exists and evacuation needs to be implemented.
3. Company or contractor safety personnel that have been trained in the use of H2S detection equipment and self-contained breathing equipment will monitor H2S concentrations, wind directions, and area of exposure. They will delineate the outer perimeter of the hazardous gas area. Extension to the evacuation area will be determined from information gathered.
4. Law enforcement personnel (state police, police dept., fire dept., and sheriff's dept.) Will be called to aid in setting up and maintaining road blocks. Also, they will aid in evacuation of the public if necessary.
5. After the discharge of gas has been controlled, company safety personnel will determine when the area is safe for re-entry.

**Important: Law enforcement personnel will not be asked to come into a contaminated area. Their assistance will be limited to uncontaminated areas. Constant radio contact will be maintained with them.**



### **Emergency actions**

#### **Well blowout – if emergency**

1. Evacuate all personnel to “Safe Briefing / Muster Areas” or off location if needed.
2. If sour gas – evacuate rig personnel.
3. If sour gas – evacuate public within 3000 ft radius of exposure.
4. Don SCBA and shut well in if possible using the buddy system.
5. Notify Drilling Superintendent and call 911 for emergency help (fire dept and ambulance) if needed.
6. Implement the Blowout Contingency Plan, and Drilling Emergency Action Plan.
6. Give first aid as needed.

#### **Person down location/facility**

1. If immediately possible, contact 911. Give location and wait for confirmation.
2. Don SCBA and perform rescue operation using buddy system.

### Toxic effects of hydrogen sulfide

Hydrogen sulfide is extremely toxic. The acceptable ceiling concentration for eight-hour exposure is 10 ppm, which is .001% by volume. Hydrogen sulfide is heavier than air (specific gravity – 1.192) and colorless. It forms an explosive mixture with air between 4.3 and 46.0 percent by volume. Hydrogen sulfide is almost as toxic as hydrogen cyanide and is between five and six times more toxic than carbon monoxide. Toxicity data for hydrogen sulfide and various other gases are compared in table i. Physical effects at various hydrogen sulfide exposure levels are shown in table ii.

Table i  
Toxicity of various gases

| Common name      | Chemical formula | Specific gravity (sc=1) | Threshold limit (1) | Hazardous limit (2)         | Lethal concentration (3) |
|------------------|------------------|-------------------------|---------------------|-----------------------------|--------------------------|
| Hydrogen Cyanide | Hcn              | 0.94                    | 10 ppm              | 150 ppm/hr                  | 300 ppm                  |
| Hydrogen Sulfide | H2S              | 1.18                    | 10 ppm              | 250 ppm/hr                  | 600 ppm                  |
| Sulfur Dioxide   | So2              | 2.21                    | 5 ppm               | -                           | 1000 ppm                 |
| Chlorine         | Cl2              | 2.45                    | 1 ppm               | 4 ppm/hr                    | 1000 ppm                 |
| Carbon Monoxide  | Co               | 0.97                    | 50 ppm              | 400 ppm/hr                  | 1000 ppm                 |
| Carbon Dioxide   | Co2              | 1.52                    | 5000 ppm            | 5%                          | 10%                      |
| Methane          | Ch4              | 0.55                    | 90,000 ppm          | Combustible above 5% in air |                          |

- 1) threshold limit – concentration at which it is believed that all workers may be repeatedly exposed day after day without adverse effects.
- 2) hazardous limit – concentration that will cause death with short-term exposure.
- 3) lethal concentration – concentration that will cause death with short-term exposure.

### Toxic effects of hydrogen sulfide

Table ii  
Physical effects of hydrogen sulfide

| Percent (%) | Ppm | Concentration           | Physical effects             |
|-------------|-----|-------------------------|------------------------------|
|             |     | Grains<br>100 std. Ft3* |                              |
| 0.001       | <10 | 00.65                   | Obvious and unpleasant odor. |

|       |      |       |                                                                                    |
|-------|------|-------|------------------------------------------------------------------------------------|
| 0.002 | 10   | 01.30 | Safe for 8 hours of exposure.                                                      |
| 0.010 | 100  | 06.48 | Kill smell in 3 – 15 minutes. May sting eyes and throat.                           |
| 0.020 | 200  | 12.96 | Kills smell shortly; stings eyes and throat.                                       |
| 0.050 | 500  | 32.96 | Dizziness; breathing ceases in a few minutes; needs prompt artificial respiration. |
| 0.070 | 700  | 45.36 | Unconscious quickly; death will result if not rescued promptly.                    |
| 0.100 | 1000 | 64.30 | Unconscious at once; followed by death within minutes.                             |

\*at 15.00 psia and 60'f.

**Use of self-contained breathing equipment (SCBA)**

1. Written procedures shall be prepared covering safe use of SCBA's in dangerous atmosphere, which might be encountered in normal operations or in emergencies. Personnel shall be familiar with these procedures and the available SCBA.
2. SCBA's shall be inspected frequently at random to insure that they are properly used, cleaned, and maintained.
3. Anyone who may use the SCBA's shall be trained in how to insure proper face-piece to face seal. They shall wear SCBA's in normal air and then wear them in a test atmosphere. (note: such items as facial hair {beard or sideburns} and eyeglasses will not allow proper seal.) Anyone that may be reasonably expected to wear SCBA's should have these items removed before entering a toxic atmosphere. A special mask must be obtained for anyone who must wear eyeglasses or contact lenses.
4. Maintenance and care of SCBA's:
  - a. A program for maintenance and care of SCBA's shall include the following:
    1. Inspection for defects, including leak checks.
    2. Cleaning and disinfecting.
    3. Repair.
    4. Storage.
  - b. Inspection, self-contained breathing apparatus for emergency use shall be inspected monthly.
    1. Fully charged cylinders.
    2. Regulator and warning device operation.
    3. Condition of face piece and connections.
    4. Rubber parts shall be maintained to keep them pliable and prevent deterioration.
  - c. Routinely used SCBA's shall be collected, cleaned and disinfected as frequently as necessary to insure proper protection is provided.
5. Persons assigned tasks that requires use of self-contained breathing equipment shall be certified physically fit (medically cleared) for breathing equipment usage at least annually.
6. SCBA's should be worn when:
  - A. Any employee works near the top or on top of any tank unless test reveals less than 10 ppm of H<sub>2</sub>S.

- B. When breaking out any line where H<sub>2</sub>S can reasonably be expected.
- C. When sampling air in areas to determine if toxic concentrations of H<sub>2</sub>S exists.
- D. When working in areas where over 10 ppm H<sub>2</sub>S has been detected.
- E. At any time there is a doubt as to the H<sub>2</sub>S level in the area to be entered.

**Rescue**  
**First aid for H<sub>2</sub>S poisoning**

Do not panic!

Remain calm – think!


1. Don SCBA breathing equipment.
2. Remove victim(s) utilizing buddy system to fresh air as quickly as possible. (go up-wind from source or at right angle to the wind. Not down wind.)
3. Briefly apply chest pressure – arm lift method of artificial respiration to clean the victim's lungs and to avoid inhaling any toxic gas directly from the victim's lungs.
4. Provide for prompt transportation to the hospital, and continue giving artificial respiration if needed.
5. Hospital(s) or medical facilities need to be informed, before-hand, of the possibility of H<sub>2</sub>S gas poisoning – no matter how remote the possibility is.
6. Notify emergency room personnel that the victim(s) has been exposed to H<sub>2</sub>S gas.

Besides basic first aid, everyone on location should have a good working knowledge of artificial respiration.


Revised CM 6/27/2012





Oxy Single Centrifuge  
Closed Loop System – New  
Mexico Flex III  
May 28, 2013

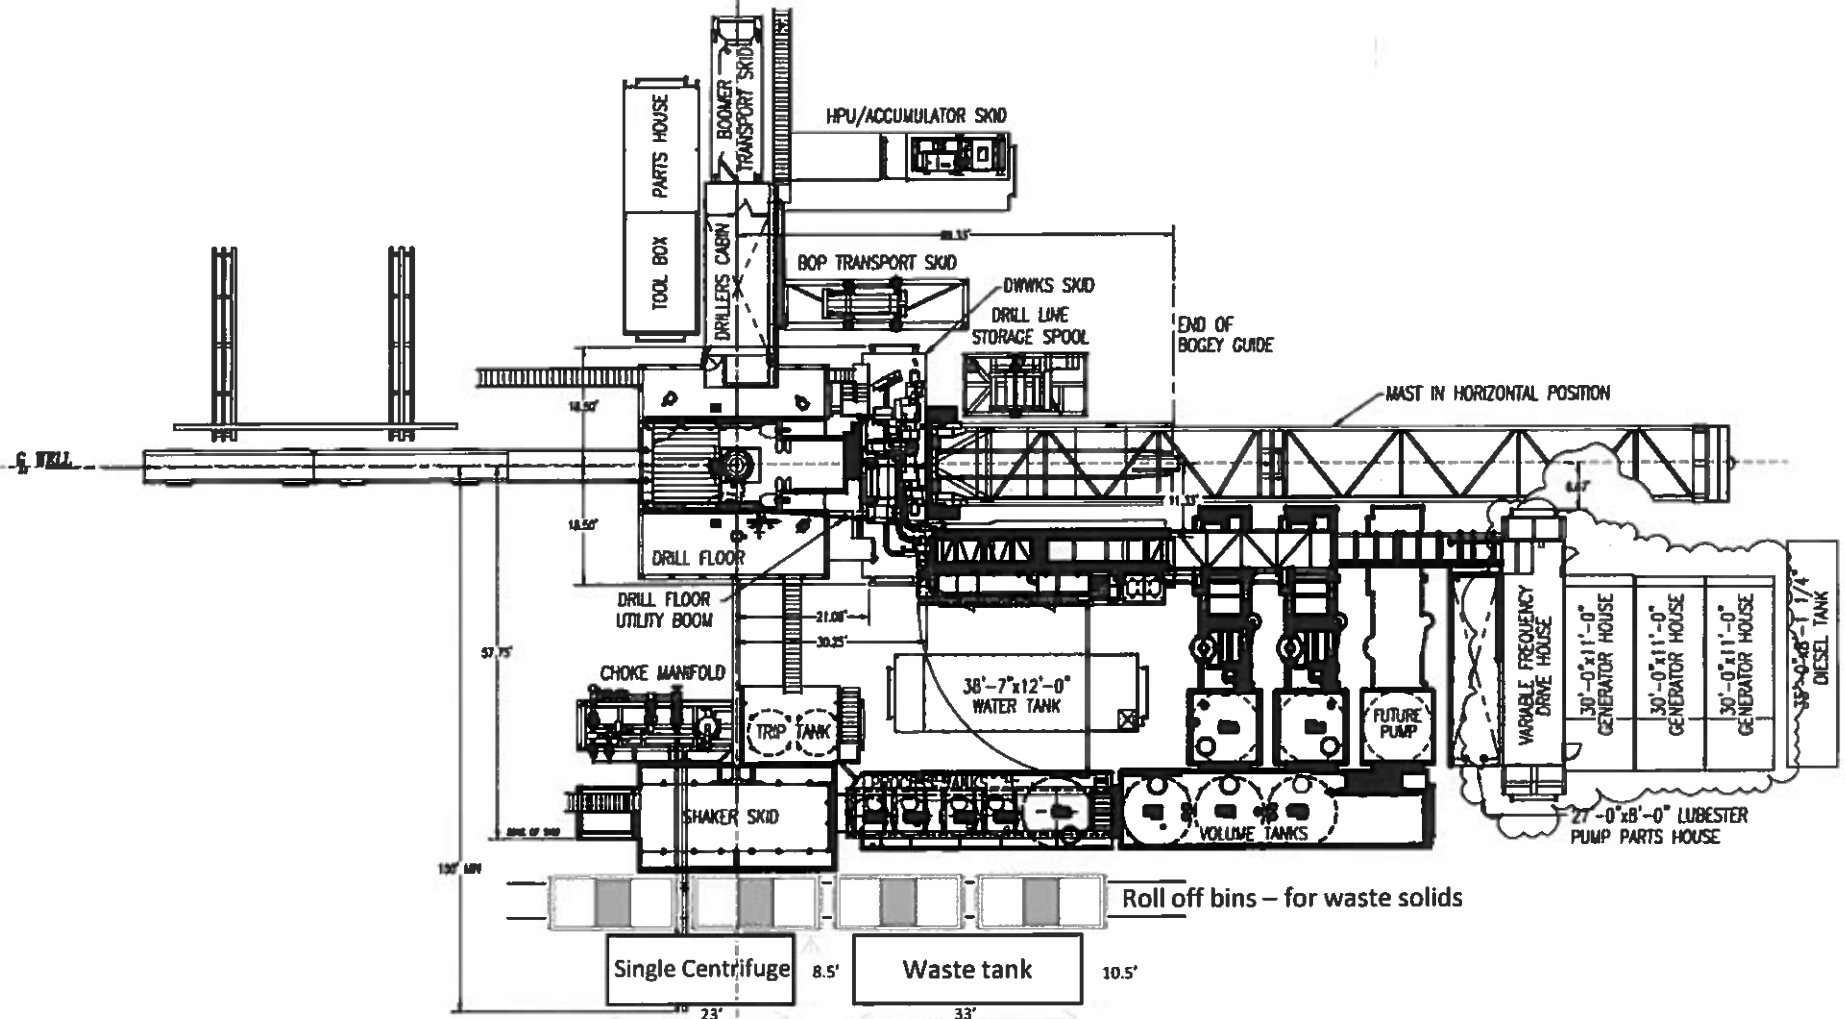

Oxy

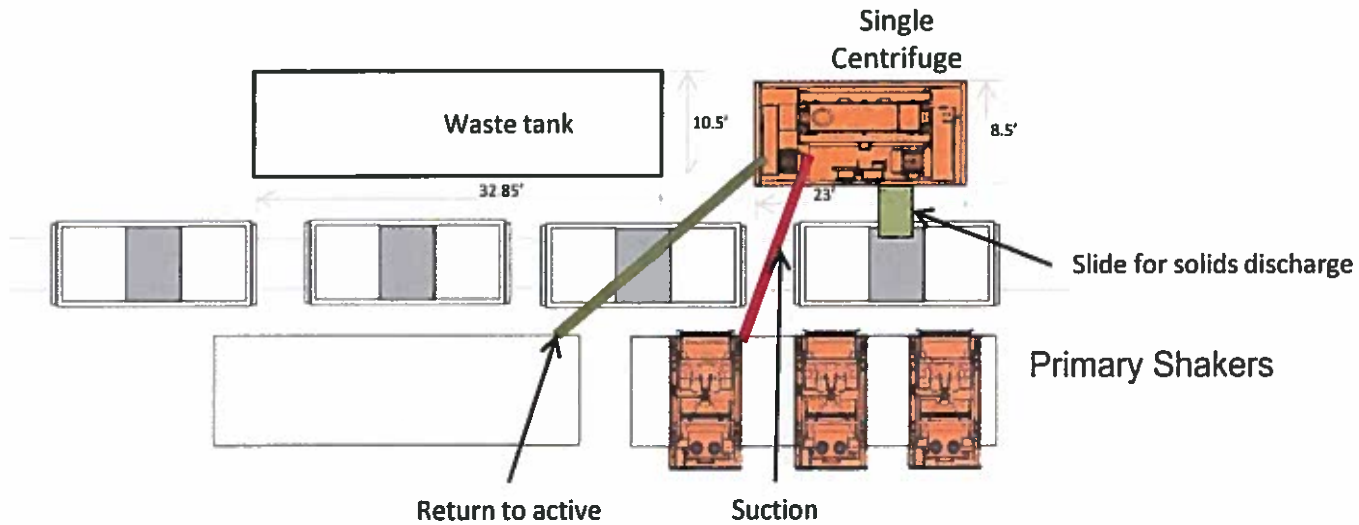

Oxy Single Centrifuge  
Closed Loop System – New  
Mexico Flex III  
May 28, 2013

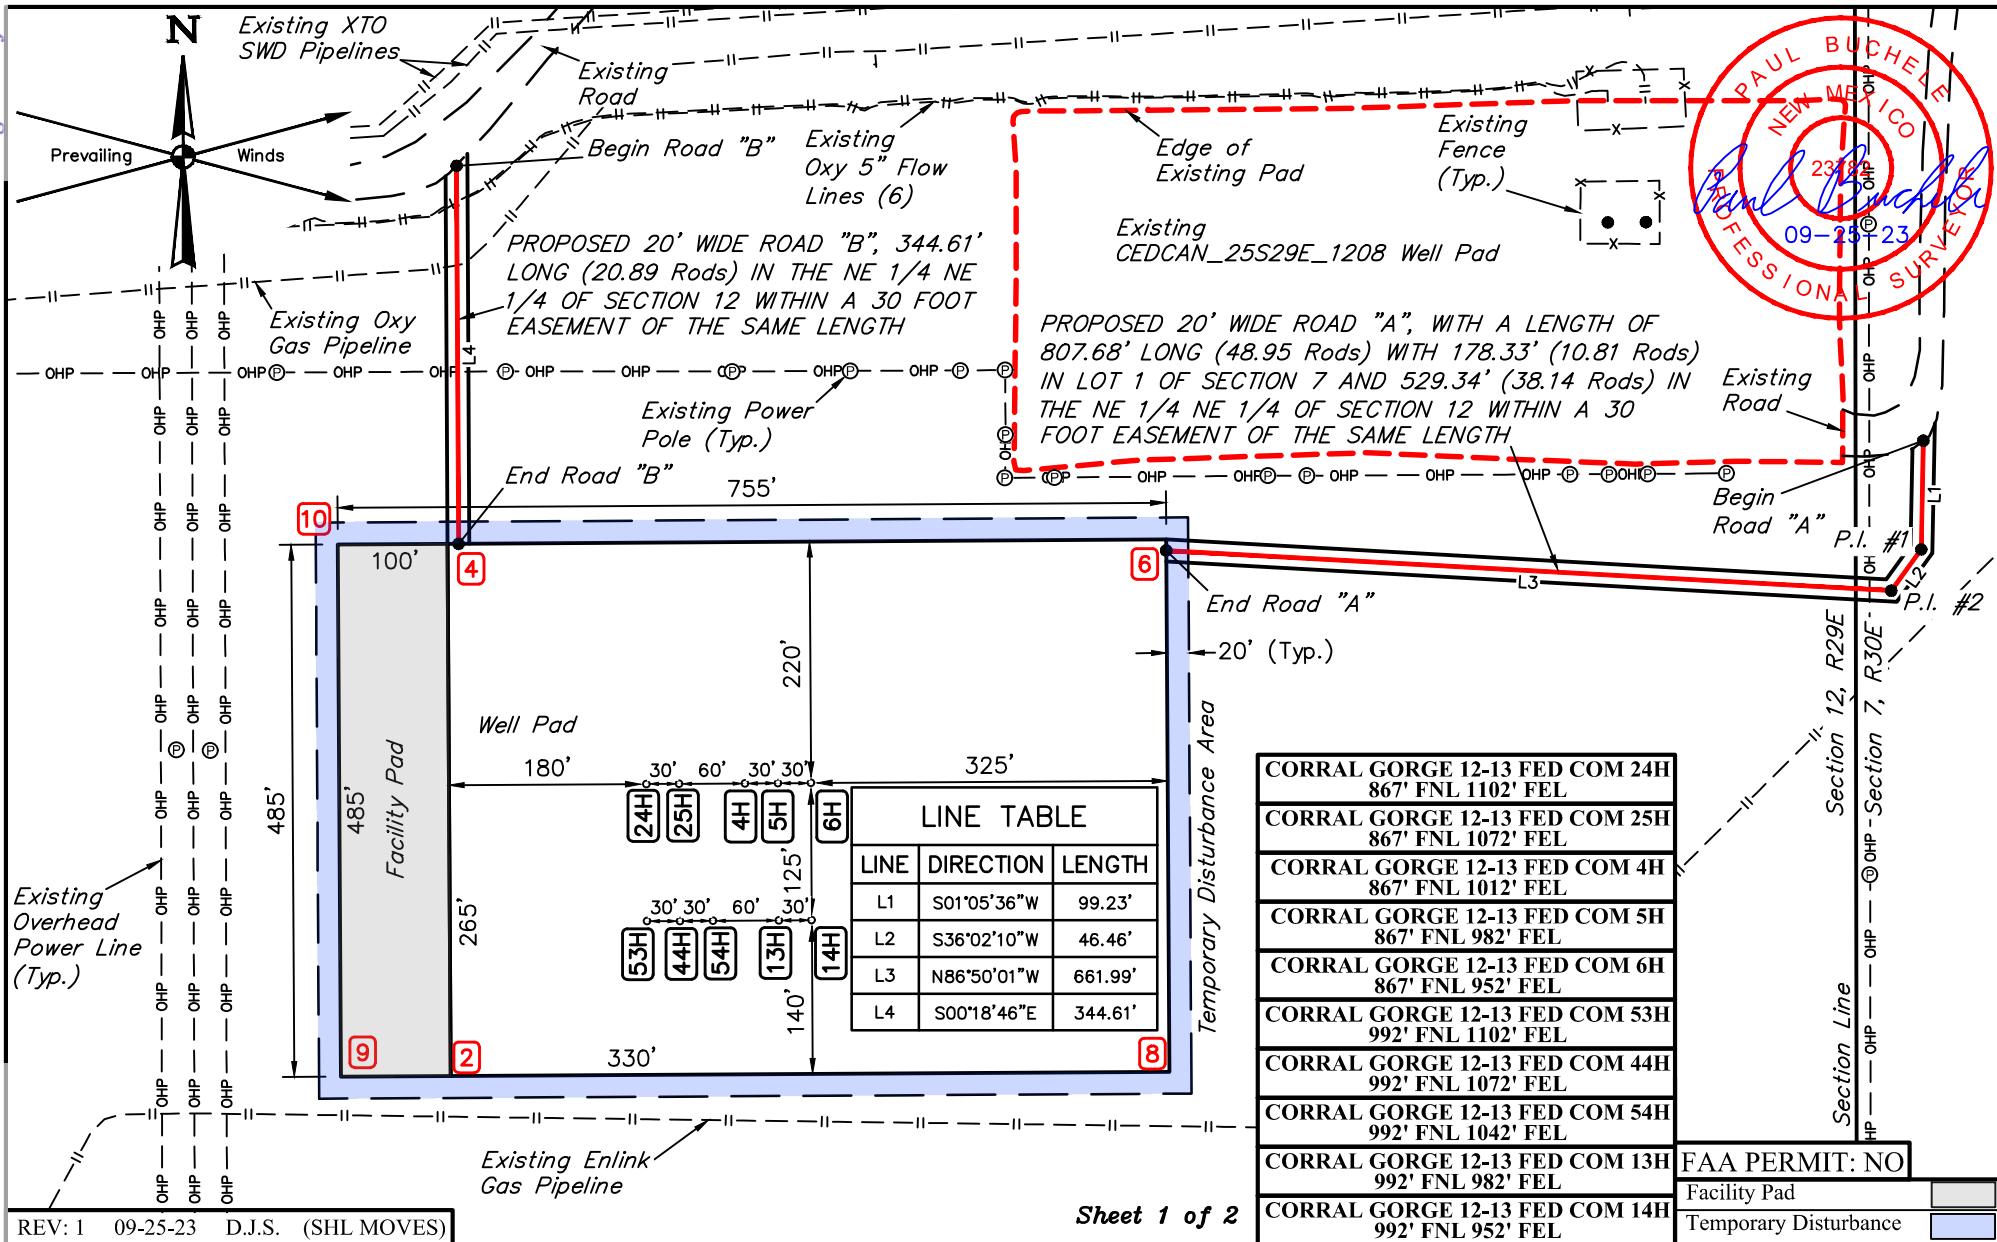

|                                |                    |
|--------------------------------|--------------------|
| CORRAL GORGE 12-13 FED COM 24H | 867' FNL 1102' FEL |
| CORRAL GORGE 12-13 FED COM 25H | 867' FNL 1072' FEL |
| CORRAL GORGE 12-13 FED COM 4H  | 867' FNL 1012' FEL |
| CORRAL GORGE 12-13 FED COM 5H  | 867' FNL 982' FEL  |
| CORRAL GORGE 12-13 FED COM 6H  | 867' FNL 952' FEL  |
| CORRAL GORGE 12-13 FED COM 53H | 992' FNL 1102' FEL |
| CORRAL GORGE 12-13 FED COM 44H | 992' FNL 1072' FEL |
| CORRAL GORGE 12-13 FED COM 54H | 992' FNL 1042' FEL |
| CORRAL GORGE 12-13 FED COM 13H | 992' FNL 982' FEL  |
| CORRAL GORGE 12-13 FED COM 14H | 992' FNL 952' FEL  |

|                       |
|-----------------------|
| FAA PERMIT: NO        |
| Facility Pad          |
| Temporary Disturbance |



**UELS, LLC**  
Corporate Office \* 85 South 200 East  
Vernal, UT 84078 \* (435) 789-1017

**OXY USA INC.**

**CEDCAN 25S29E 1207**  
**NE 1/4 NE 1/4, SECTION 12, T25S, R29E, N.M.P.M.**  
**EDDY COUNTY, NEW MEXICO**

|                    |            |          |              |
|--------------------|------------|----------|--------------|
| <b>SURVEYED BY</b> | C.T., K.H. | 08-10-23 | <b>SCALE</b> |
| <b>DRAWN BY</b>    | Z.L.       | 08-21-23 | 1" = 175'    |

**SITE PLAN**

|                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                      |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>24H - EL: 3147.4'</b><br><b>NAD 83</b><br>LATITUDE = 32°08'58.70" (32.149638°)<br>LONGITUDE = -103°55'58.78" (-103.932994°)<br><b>NAD 27</b><br>LATITUDE = 32°08'58.25" (32.149514°)<br>LONGITUDE = -103°55'57.03" (-103.932509°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418403.99' E: 665236.45'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418345.62' E: 624051.76'             | <b>25H - EL: 3147.5'</b><br><b>NAD 83</b><br>LATITUDE = 32°08'58.70" (32.149638°)<br>LONGITUDE = -103°55'58.43" (-103.932897°)<br><b>NAD 27</b><br>LATITUDE = 32°08'58.25" (32.149515°)<br>LONGITUDE = -103°55'56.68" (-103.932412°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418404.29' E: 665266.44'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418345.92' E: 624081.75'               | <b>4H - EL: 3147.6'</b><br><b>NAD 83</b><br>LATITUDE = 32°08'58.70" (32.149639°)<br>LONGITUDE = -103°55'57.73" (-103.932703°)<br><b>NAD 27</b><br>LATITUDE = 32°08'58.26" (32.149516°)<br>LONGITUDE = -103°55'55.99" (-103.932218°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418404.90' E: 665326.43'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418346.53' E: 624141.73'                | <b>5H - EL: 3147.7'</b><br><b>NAD 83</b><br>LATITUDE = 32°08'58.70" (32.149640°)<br>LONGITUDE = -103°55'57.38" (-103.932606°)<br><b>NAD 27</b><br>LATITUDE = 32°08'58.26" (32.149516°)<br>LONGITUDE = -103°55'55.64" (-103.932122°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418405.20' E: 665356.42'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418346.83' E: 624171.73'                | <b>6H - EL: 3147.4'</b><br><b>NAD 83</b><br>LATITUDE = 32°08'58.71" (32.149640°)<br>LONGITUDE = -103°55'57.03" (-103.932509°)<br><b>NAD 27</b><br>LATITUDE = 32°08'58.26" (32.149517°)<br>LONGITUDE = -103°55'55.29" (-103.932025°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418405.51' E: 665386.41'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418347.13' E: 624201.72'  |
| <b>53H - EL: 3146.5'</b><br><b>NAD 83</b><br>LATITUDE = 32°08'57.46" (32.149294°)<br>LONGITUDE = -103°55'58.77" (-103.932991°)<br><b>NAD 27</b><br>LATITUDE = 32°08'57.01" (32.149171°)<br>LONGITUDE = -103°55'57.02" (-103.932507°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418279.02' E: 665237.71'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418220.65' E: 624053.02'             | <b>44H - EL: 3146.6'</b><br><b>NAD 83</b><br>LATITUDE = 32°08'57.46" (32.149295°)<br>LONGITUDE = -103°55'58.42" (-103.932894°)<br><b>NAD 27</b><br>LATITUDE = 32°08'57.02" (32.149171°)<br>LONGITUDE = -103°55'56.67" (-103.932410°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418279.32' E: 665267.71'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418220.95' E: 624083.01'               | <b>54H - EL: 3146.5'</b><br><b>NAD 83</b><br>LATITUDE = 32°08'57.46" (32.149295°)<br>LONGITUDE = -103°55'58.07" (-103.932797°)<br><b>NAD 27</b><br>LATITUDE = 32°08'57.02" (32.149172°)<br>LONGITUDE = -103°55'56.33" (-103.932313°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418279.63' E: 665297.70'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418221.26' E: 624113.00'               | <b>13H - EL: 3146.8'</b><br><b>NAD 83</b><br>LATITUDE = 32°08'57.47" (32.149296°)<br>LONGITUDE = -103°55'57.37" (-103.932604°)<br><b>NAD 27</b><br>LATITUDE = 32°08'57.02" (32.149173°)<br>LONGITUDE = -103°55'55.63" (-103.932119°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418280.24' E: 665357.68'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418221.87' E: 624172.99'               | <b>14H - EL: 3147.1'</b><br><b>NAD 83</b><br>LATITUDE = 32°08'57.47" (32.149297°)<br>LONGITUDE = -103°55'57.02" (-103.932507°)<br><b>NAD 27</b><br>LATITUDE = 32°08'57.02" (32.149173°)<br>LONGITUDE = -103°55'55.28" (-103.932022°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418280.54' E: 665387.68'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418222.17' E: 624202.98' |
| <b>2 - EL: 3144.2'</b><br><b>NAD 83</b><br>LATITUDE = 32°08'56.06" (32.148906°)<br>LONGITUDE = -103°56'00.85" (-103.933570°)<br><b>NAD 27</b><br>LATITUDE = 32°08'55.62" (32.148783°)<br>LONGITUDE = -103°55'59.11" (-103.933085°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418137.24' E: 665059.18'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418078.87' E: 623874.48'               | <b>4 - EL: 3148.4'</b><br><b>NAD 83</b><br>LATITUDE = 32°09'00.86" (32.150239°)<br>LONGITUDE = -103°56'00.89" (-103.933580°)<br><b>NAD 27</b><br>LATITUDE = 32°09'00.42" (32.150116°)<br>LONGITUDE = -103°55'59.14" (-103.933095°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418622.11' E: 665054.27'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418563.73' E: 623869.59'                 | <b>6 - EL: 3155.3'</b><br><b>NAD 83</b><br>LATITUDE = 32°09'00.90" (32.150251°)<br>LONGITUDE = -103°55'53.27" (-103.931464°)<br><b>NAD 27</b><br>LATITUDE = 32°09'00.46" (32.150127°)<br>LONGITUDE = -103°55'51.53" (-103.930979°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418628.74' E: 665709.10'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418570.36' E: 624524.41'                 | <b>8 - EL: 3150.2'</b><br><b>NAD 83</b><br>LATITUDE = 32°08'56.10" (32.148918°)<br>LONGITUDE = -103°55'53.23" (-103.931454°)<br><b>NAD 27</b><br>LATITUDE = 32°08'55.66" (32.148794°)<br>LONGITUDE = -103°55'51.49" (-103.930969°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418143.86' E: 665714.01'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418085.50' E: 624529.31'                 | <b>9 - EL: 3145.0'</b><br><b>NAD 83</b><br>LATITUDE = 32°08'56.06" (32.148905°)<br>LONGITUDE = -103°56'02.01" (-103.933893°)<br><b>NAD 27</b><br>LATITUDE = 32°08'55.61" (32.148781°)<br>LONGITUDE = -103°56'00.27" (-103.933408°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418136.22' E: 664959.20'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418077.86' E: 623774.51'   |
| <b>10 - EL: 3144.7'</b><br><b>NAD 83</b><br>LATITUDE = 32°09'00.86" (32.150238°)<br>LONGITUDE = -103°56'02.05" (-103.933903°)<br><b>NAD 27</b><br>LATITUDE = 32°09'00.41" (32.150114°)<br>LONGITUDE = -103°56'00.31" (-103.933418°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418621.10' E: 664954.30'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418562.72' E: 623769.61'              | <b>BEGIN ACCESS ROAD "A" - 3165.8'</b><br><b>NAD 83</b><br>LATITUDE = 32°09'01.80" (32.150500°)<br>LONGITUDE = -103°55'45.24" (-103.929234°)<br><b>NAD 27</b><br>LATITUDE = 32°09'01.35" (32.150376°)<br>LONGITUDE = -103°55'43.50" (-103.928750°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418721.87' E: 666398.84'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418663.49' E: 625214.14' | <b>PI #1 ACCESS ROAD "A" - 3162.7'</b><br><b>NAD 83</b><br>LATITUDE = 32°09'00.82" (32.150227°)<br>LONGITUDE = -103°55'45.26" (-103.929240°)<br><b>NAD 27</b><br>LATITUDE = 32°09'00.37" (32.150103°)<br>LONGITUDE = -103°55'43.52" (-103.928756°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418622.66' E: 666397.36'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418564.29' E: 625212.66' | <b>PI #2 ACCESS ROAD "A" - 3161.6'</b><br><b>NAD 83</b><br>LATITUDE = 32°09'00.45" (32.150124°)<br>LONGITUDE = -103°55'45.58" (-103.929328°)<br><b>NAD 27</b><br>LATITUDE = 32°09'00.00" (32.150000°)<br>LONGITUDE = -103°55'43.84" (-103.928844°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418584.99' E: 666370.19'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418526.62' E: 625185.49' |                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>END ACCESS ROAD "A" - 3155.3'</b><br><b>NAD 83</b><br>LATITUDE = 32°09'00.80" (32.150223°)<br>LONGITUDE = -103°55'53.27" (-103.931464°)<br><b>NAD 27</b><br>LATITUDE = 32°09'00.36" (32.150100°)<br>LONGITUDE = -103°55'51.52" (-103.930979°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418618.79' E: 665709.20'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418560.41' E: 624524.51' | <b>BEGIN ACCESS ROAD "B" - 3139.1'</b><br><b>NAD 83</b><br>LATITUDE = 32°09'04.27" (32.151187°)<br>LONGITUDE = -103°56'00.79" (-103.933554°)<br><b>NAD 27</b><br>LATITUDE = 32°09'03.83" (32.151063°)<br>LONGITUDE = -103°55'59.05" (-103.933069°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418966.73' E: 665060.95'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418908.35' E: 623876.27' | <b>END ACCESS ROAD "B" - 3148.5'</b><br><b>NAD 83</b><br>LATITUDE = 32°09'00.86" (32.150239°)<br>LONGITUDE = -103°56'00.77" (-103.933548°)<br><b>NAD 27</b><br>LATITUDE = 32°09'00.42" (32.150116°)<br>LONGITUDE = -103°55'59.03" (-103.933063°)<br><b>STATE PLANE NAD 83 (N.M. EAST)</b><br>N: 418622.21' E: 665064.27'<br><b>STATE PLANE NAD 27 (N.M. EAST)</b><br>N: 418563.83' E: 623879.58'   |                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                      |



Sheet 2 of 2

REV: 1 09-25-23 D.J.S. (SHL MOVES)

**NOTES:**

- Underground utilities shown on this sheet are for visualization purposes only, actual locations to be determined prior to construction.
- Basis of Bearings is a Transverse Mercator Projection with a Central Meridian of W103°53'00" (NAD 83)

**OXY USA INC.**


**CEDCAN 25S29E 1207**  
**NE 1/4 NE 1/4, SECTION 12, T25S, R29E, N.M.P.M.**  
**EDDY COUNTY, NEW MEXICO**

|                    |            |          |              |
|--------------------|------------|----------|--------------|
| <b>SURVEYED BY</b> | C.T., K.H. | 08-10-23 | <b>SCALE</b> |
| <b>DRAWN BY</b>    | Z.L.       | 08-21-23 | N/A          |
| <b>SITE PLAN</b>   |            |          |              |




**UELS, LLC**  
 Corporate Office \* 85 South 200 East  
 Vernal, UT 84078 \* (435) 789-1017


# 10M Choke Panel


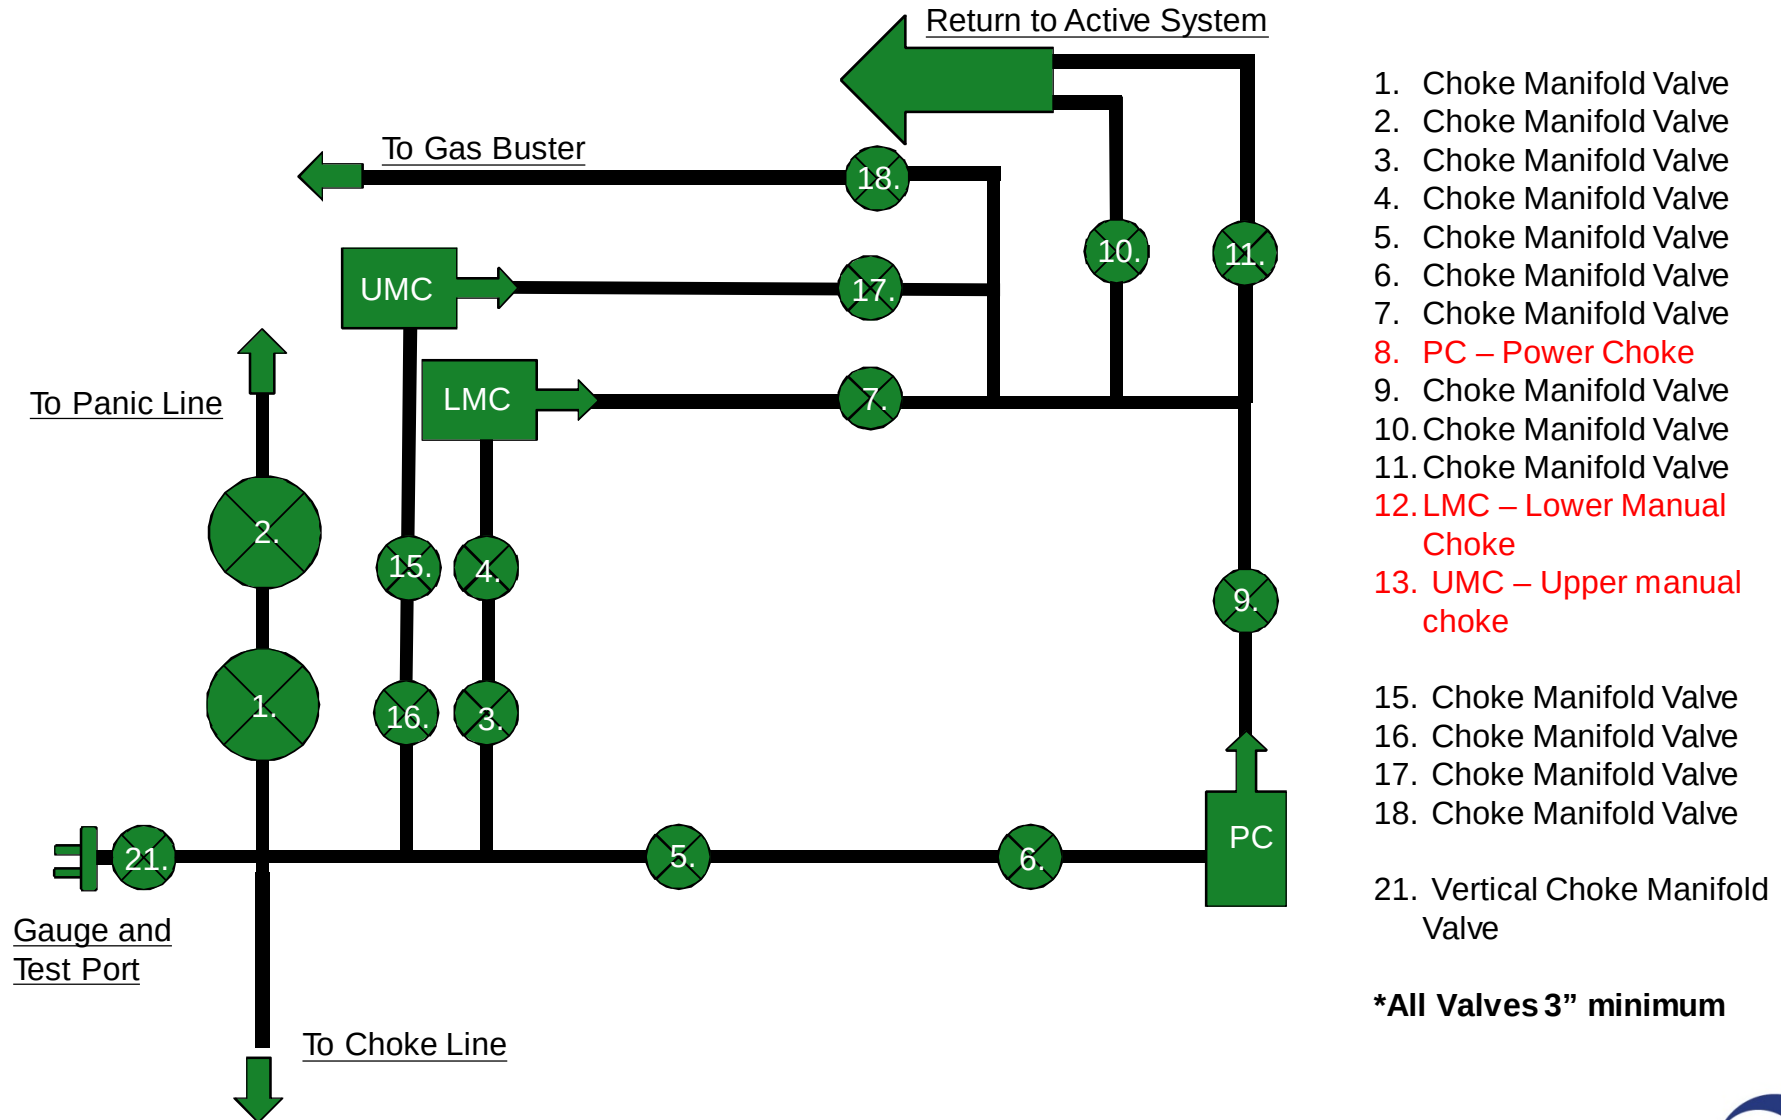




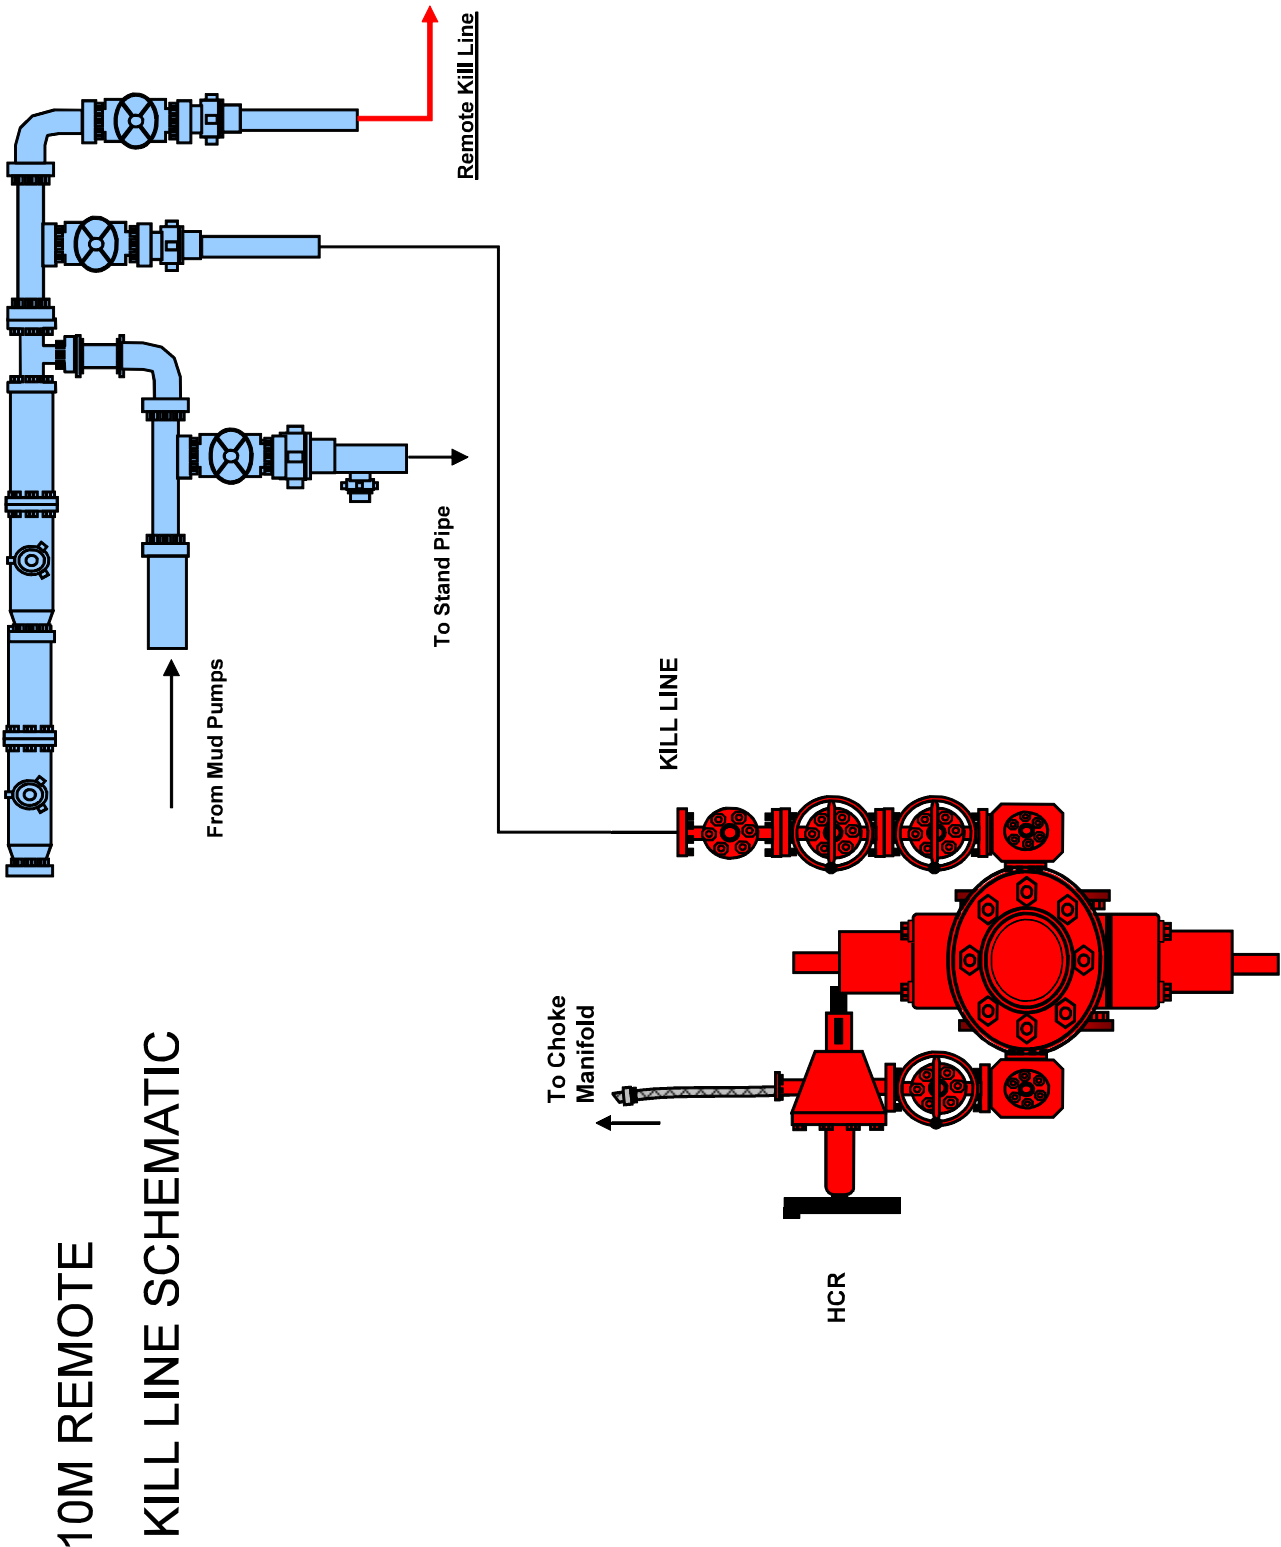

## Gas Separator Routing Flex III Rigs

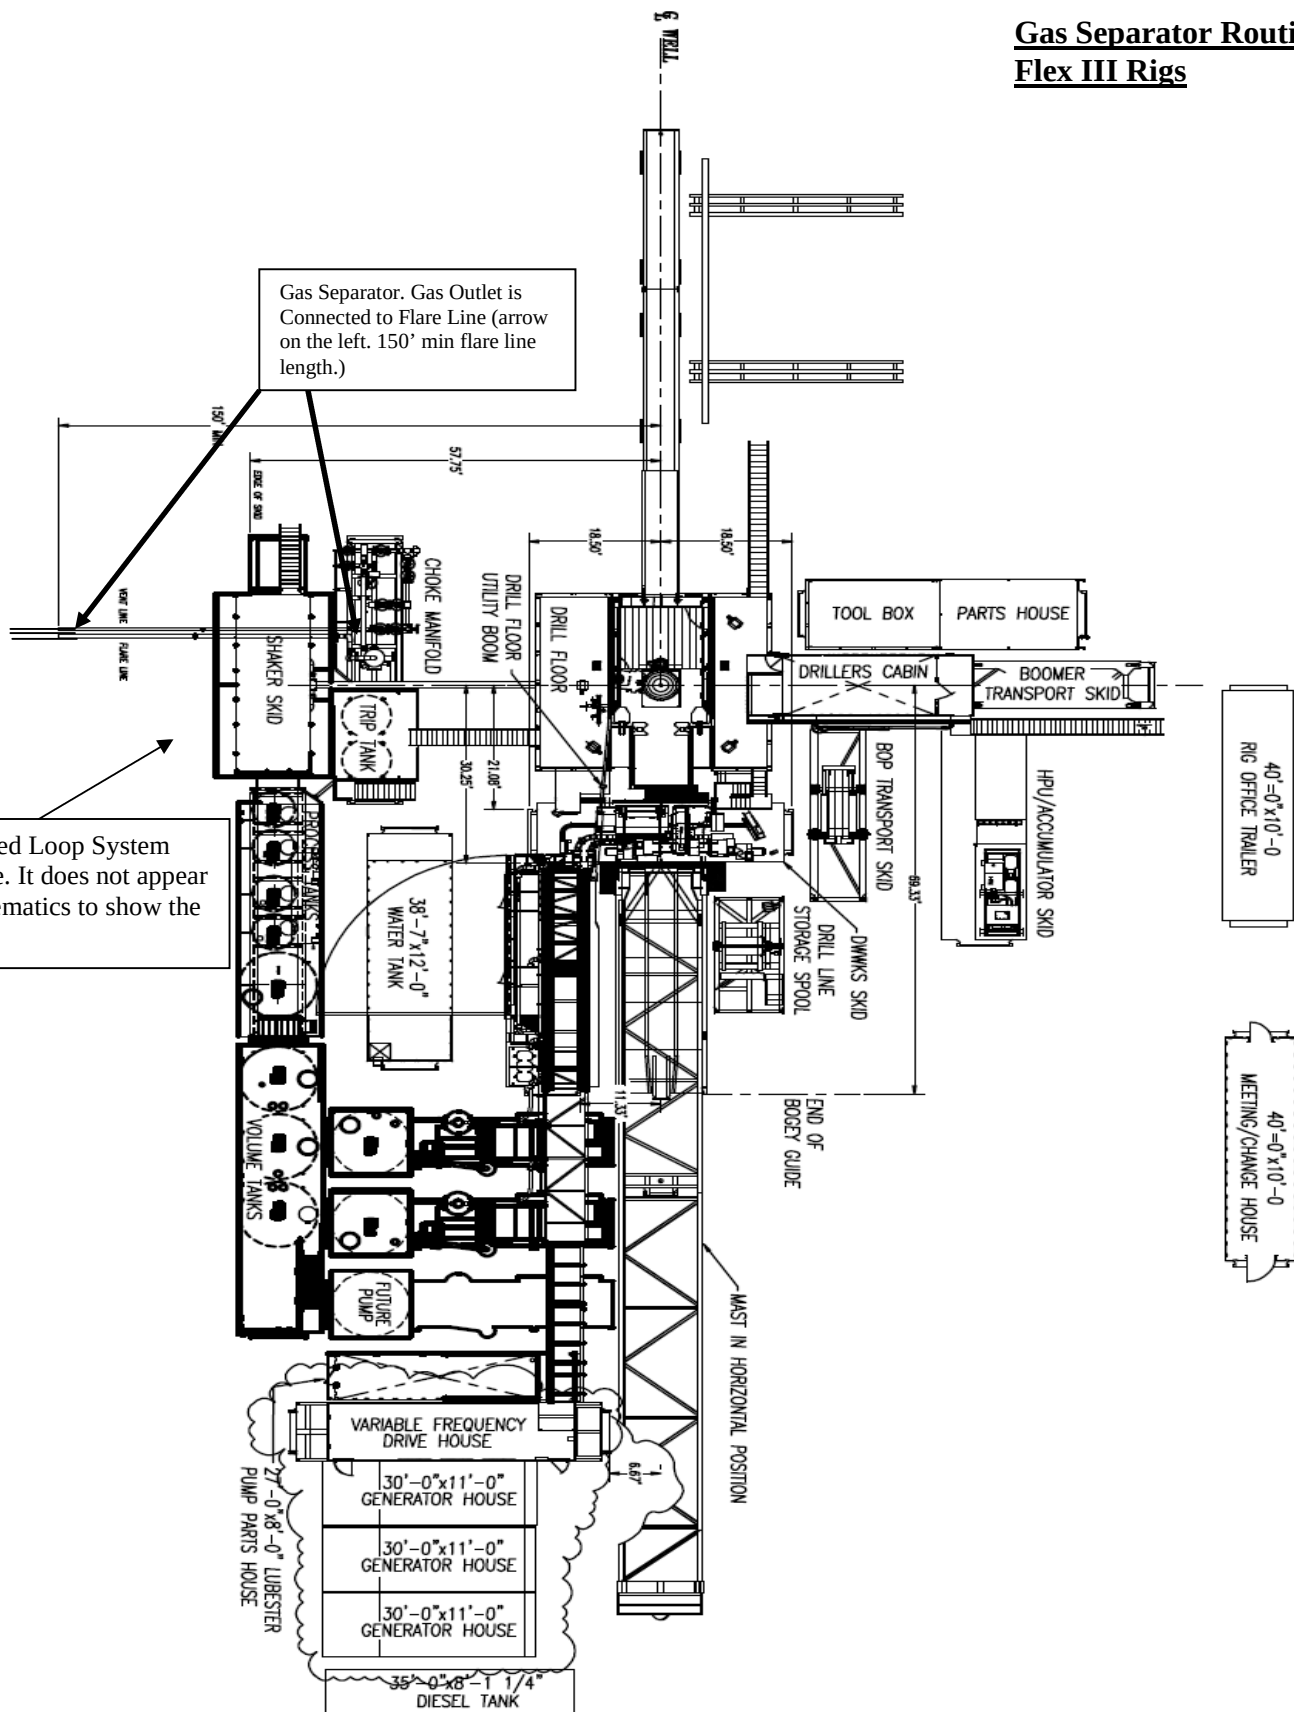

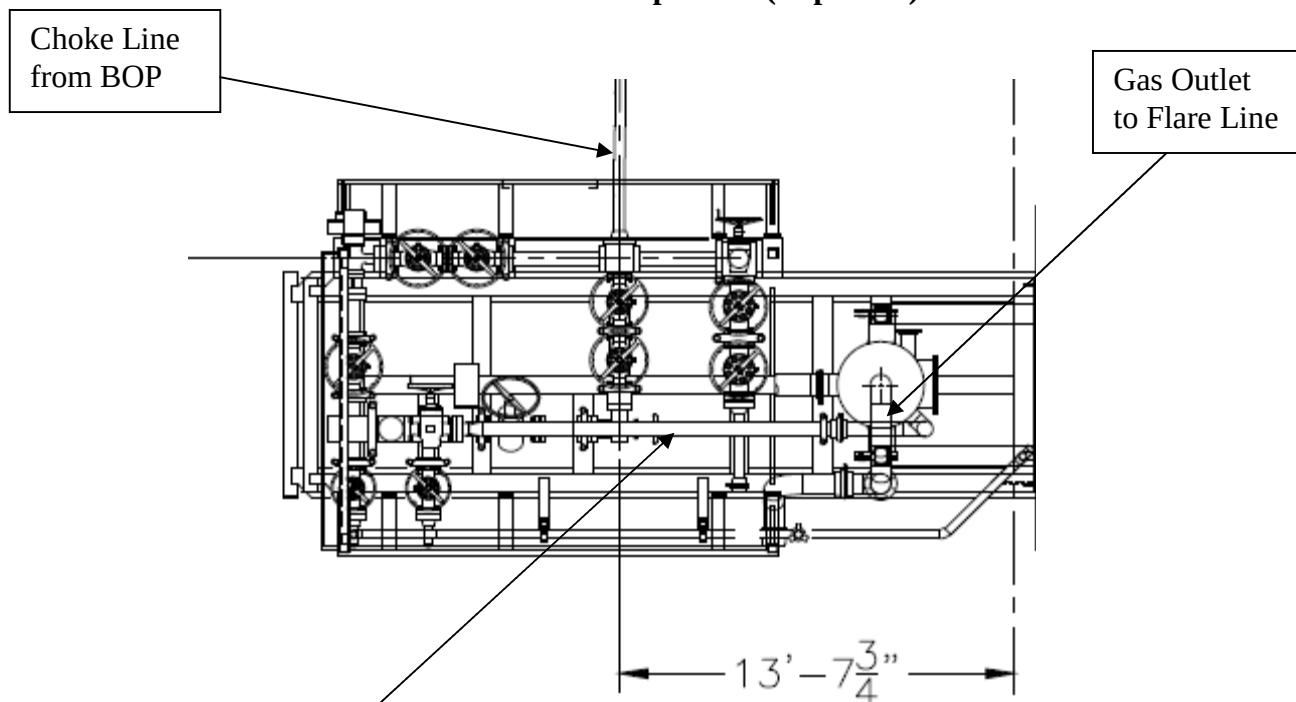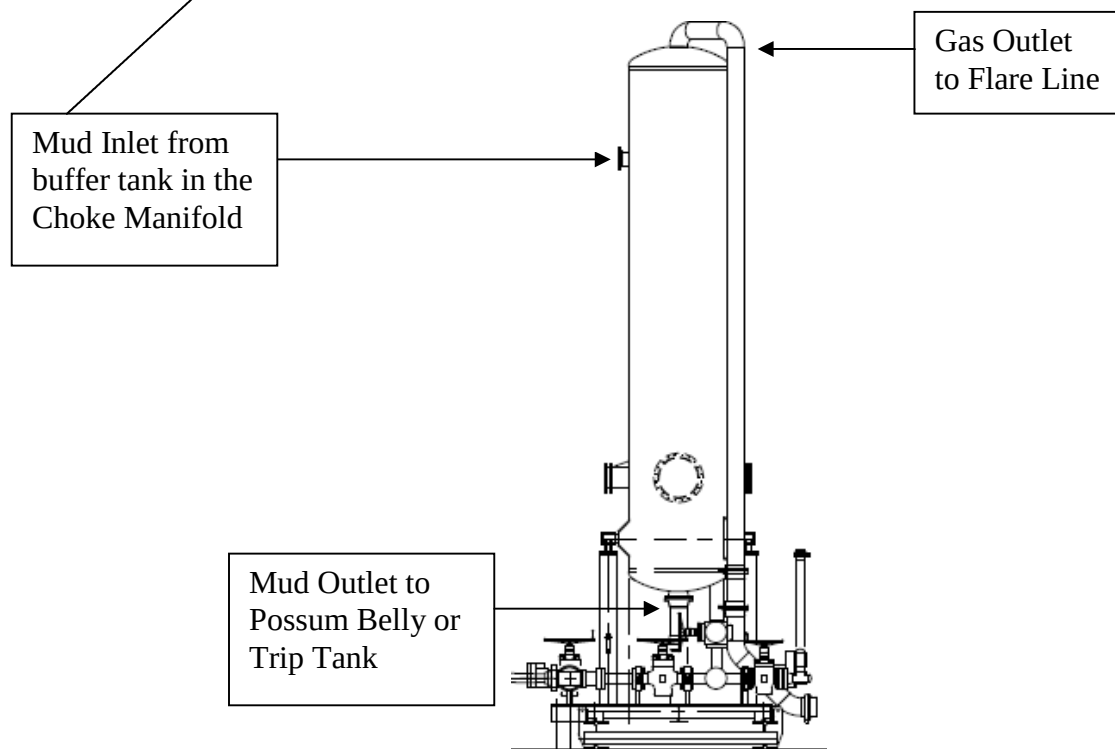**Choke Manifold – Gas Separator (Top View)****Choke Manifold – Gas Separator (Side View)**

**Certificate of Conformity**

ContiTech

|                                                                                                                       |                                                                                  |                                                                                                                         |                                      |
|-----------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|--------------------------------------|
| <b>Certificate Number</b><br>H100161                                                                                  | <b>COM Order Reference</b><br>1429702                                            | <b>Customer Name &amp; Address</b><br>HELMERICH & PAYNE DRILLING CO<br>1434 SOUTH BOULDER AVE<br>TULSA, OK 74119<br>USA |                                      |
| <b>Customer Purchase Order No:</b><br>740382384                                                                       |                                                                                  |                                                                                                                         |                                      |
| <b>Project:</b>                                                                                                       |                                                                                  |                                                                                                                         |                                      |
| <b>Test Center Address</b><br>ContiTech Oil & Marine Corp.<br>11535 Brittmoore Park Drive<br>Houston, TX 77041<br>USA | <b>Accepted by COM Inspection</b><br>Signed: Gerson Mejia-Lazo<br>Date: 06/27/22 |                                                                                                                         | <b>Accepted by Client Inspection</b> |

We certify that the items detailed below meet the requirements of the customer's Purchase Order referenced above, and are in conformance with the specifications given below.

| Item | Part No.        | Description                              | Qty | Serial Number | Specifications     |
|------|-----------------|------------------------------------------|-----|---------------|--------------------|
| 30   | RECERTIFICATION | 3" ID 10K Choke and Kill Hose x 35ft OAL | 1   | 70024         | ContiTech Standard |

ContiTech Oil Marine Corp.

11535 Brittmoore Park Drive Houston, TX 77041, USA

Internal

## Hydrostatic Test Certificate



ContiTech

|                                                                                                                       |                                                                                  |                                                                                                                         |
|-----------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| <b>Certificate Number</b><br>H100161                                                                                  | <b>COM Order Reference</b><br>1429702                                            | <b>Customer Name &amp; Address</b><br>HELMERICH & PAYNE DRILLING CO<br>1434 SOUTH BOULDER AVE<br>TULSA, OK 74119<br>USA |
| <b>Customer Purchase Order No:</b><br>740382384                                                                       |                                                                                  |                                                                                                                         |
| <b>Project:</b>                                                                                                       |                                                                                  |                                                                                                                         |
| <b>Test Center Address</b><br>ContiTech Oil & Marine Corp.<br>11535 Brittmoore Park Drive<br>Houston, TX 77041<br>USA | <b>Accepted by COM Inspection</b><br>Signed: Gerson Mejia-Lazo<br>Date: 06/27/22 | <b>Accepted by Client Inspection</b>                                                                                    |


We certify that the goods detailed hereon have been inspected as described below by our Quality Management System, and to the best of our knowledge are found to conform the requirements of the above referenced purchase order as issued to ContiTech Oil & Marine Corporation.

| Item | Part No. | Description | Qty | Serial Number | Work. Press. (psi) | Test Press. (psi) | Test Time (minutes) |
|------|----------|-------------|-----|---------------|--------------------|-------------------|---------------------|
|------|----------|-------------|-----|---------------|--------------------|-------------------|---------------------|

|    |                 |                                          |   |       |        |        |    |
|----|-----------------|------------------------------------------|---|-------|--------|--------|----|
| 30 | RECERTIFICATION | 3" ID 10K Choke and Kill Hose x 35ft OAL | 1 | 70024 | 10,000 | 15,000 | 60 |
|----|-----------------|------------------------------------------|---|-------|--------|--------|----|

| Record Information |                   |
|--------------------|-------------------|
| Start Time         | 6/8/2022 12:49:19 |
| End Time           | 6/8/2022 14:07:25 |
| Interval           | 00:01:00          |
| Number             | 79                |
| MaxValue           | 15762             |
| MinValue           | -7                |
| AvgValue           | 14395             |
| RecordName         | 70024-sh          |
| RecordNumber       | 235               |

| Gauge Information |              |
|-------------------|--------------|
| Model             | ADT680       |
| SN                | 21817380014  |
| Range             | (0-40000)psi |
| Unit              | psi          |

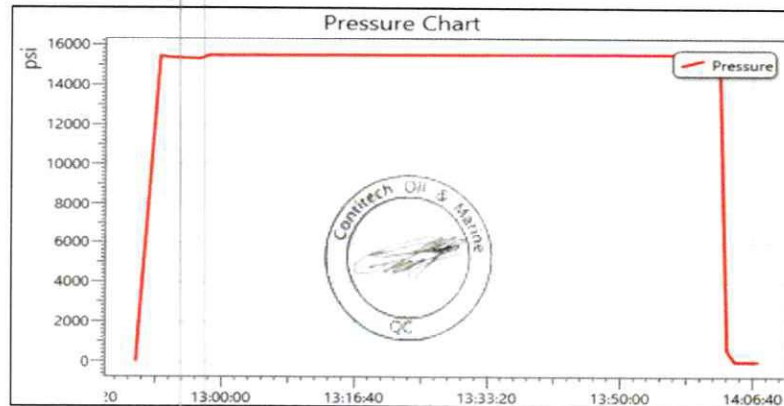

ContiTech Oil Marine Corp.

11535 Brittmoore Park Drive Houston, TX 77041, USA

Internal



SIGNATURE: *Norma Cobb*  
 TITLE: QUALITY ASSURANCE  
 DATE: 11/20/2019

CUSTOMER: A-7 AUSTIN INC DBA AUSTIN HOSE  
 CUSTOMERS P.O.#: 4128128 (RIG 1 PO 002773)  
 CUSTOMER P/N: 10KFR3.012.0CK411610KFIXXFLT SSA SC LE  
 PART DESCRIPTION: 3" X 12 FT GATES CHOKE & KILL HOSE ASSEMBLY WITH STAINLESS STEEL ARMOR C/W 4 1/16 10K FIX X FLOAT H2S SUITED FLANGES WITH BX 155 RING GROOVE SUPPLIED WITH SAFETY CLAMPS & SLINGS & LIFT EYE CLAMPS  
 SALES ORDER #: 516982  
 QUANTITY: 1  
 SERIAL #: H2-112019-4

This is to certify that all parts and materials included in this shipment have manufactured and/or processed in accordance with various Gates and API assembly and test specifications. Records of required tests are on-file and subject to examination. Test reports and subsequent test graphs have been made available with this shipment. Additional supporting documentation related to materials, welding, weld inspections, and heat-treatment activities are available upon request.

## CERTIFICATE OF CONFORMANCE

EMAIL: Troy.Schmidt@gates.com

FAX:

PHONE : (281) 602-4119

Houston, TX. 77086

7603 Prairie Oak Dr.

Gates Engineering & Services North America



THIS WROTE 23/22  
 IN USE  
 AS

02.9  
 130021  
 2019  
 CHOKES  
 HOSE



Revision 1\_022819

|                    |
|--------------------|
| PRODUCTION         |
| 11/20/2019         |
| <i>[Signature]</i> |

Production:  
Date :  
Signature :

|                    |
|--------------------|
| QUALITY            |
| 11/20/2019         |
| <i>[Signature]</i> |

F-PRD-005

Quality:  
Date :  
Signature :

**Gates Engineering & Services North America certifies that:**

The following hose assembly has successfully passed all pressure testing requirements set forth in Gates specifications: GTS-04-052 (for 5K assemblies) or GTS-04-053 (10K assemblies), which include reference to Specification API 16C (2nd Edition); sections 7.5.4, 7.5.9, and 10.8.7. A test graph will accompany this test certificate to illustrate conformity to test requirements. This hose assembly was pressure tested using equipment and instrumentation that has been calibrated in accordance with the requirements set forth in the GESNA management system.

|                          |
|--------------------------|
| 4 1/16 10K FLANGES FLOAT |
| L41242 113018            |
| 15,000 PSI               |
| 10,000 PSI               |

End Fitting 2:  
Assembly Code:  
Test Pressure:  
Working Pressure:

|                                       |
|---------------------------------------|
| 4 1/16 10K FLANGES FIXED              |
| 68903010-9879429                      |
| 10KFR3.012.0CK411610KFIXFLT 55A 5C LE |

End Fitting 1:  
Grade Star No.:  
CUSTOMER P/N:

|                                                                                                                                                                                                      |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 3" X 12 FT GATES CHOKER & KILL HOSE ASSEMBLY WITH STAINLESS STEEL ARMOR C/W 4 1/16 10K FIX X FLOAT H25 SUITED FLANGES WITH BX 155 RING GROOVE SUPPLIED WITH SAFETY CLAMPS & SLINGS & LIFT EYE CLAMPS |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Product Description:

|               |
|---------------|
| 11/20/2019    |
| H2-112019-4   |
| Norma Cabrera |

Test Date:  
Hose Serial No.:  
Created By:

|                                |
|--------------------------------|
| A-7 AUSTIN INC DBA AUSTIN HOSE |
| 4128128 (RIG 1 PO 002773)      |
| 516982                         |

Customer:  
Customer Ref.:  
Invoice No.:

## PRESSURE TEST CERTIFICATE

PHONE: (281) 602 - 4119  
FAX:  
EMAIL: Troy.Schmidt@gates.com  
WEB: www.gates.com


GATES ENGINEERING &amp; SERVICES NORTH AMERICA

7603 Prairie Oak Dr.  
Houston, TX 77086







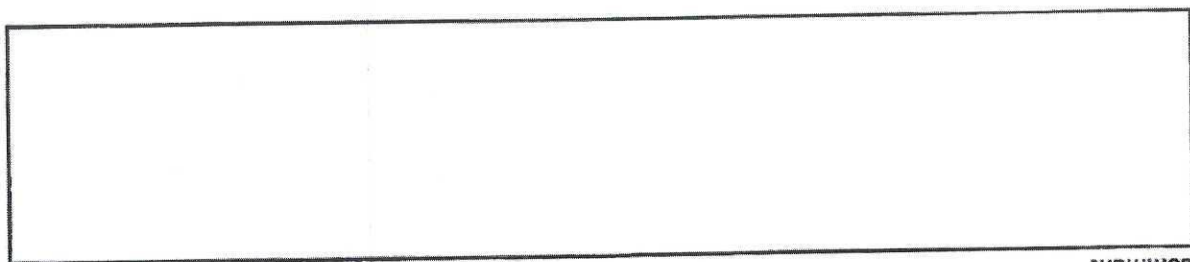

Comment

| Description | Serial number | Calibration date | Calibration due date |
|-------------|---------------|------------------|----------------------|
| S-25-A-W    | 110AMCLO      | 2019-03-17       | 2020-03-15           |
| S-25-A-W    | 110APO2K      | 2019-04-16       | 2020-04-14           |


GAUGE TRACEABILITY



## TEST REPORT

11/20/2019 12:13:07 PM

H2-1987

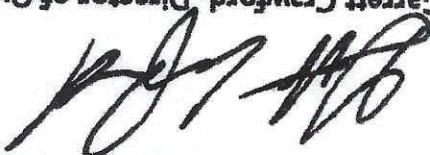Rev Date: 12/17/2019  
OF-018-OF, Rev NewGarrett Crawford, Director of Quality  
DW Industries Inc.

Certificate Issue Date: 2/27/2020

I DO HEREBY CERTIFY, AS THE AUTHORIZED REPRESENTATIVE OF DW INDUSTRIES, THAT THE PRODUCT LISTED ABOVE ARE OF THE QUALITY SPECIFIED AND CONFORM TO ALL REQUIREMENTS OF THE PURCHASE ORDER, INCLUDING: QUALITY CONTROL CLAUSES, DESIGN SPECIFICATIONS, DRAWINGS, PRESERVATION, PACKAGING, MARKING, AND PHYSICAL IDENTIFICATION REQUIREMENTS AND HAS BEEN PROCESSED IN ACCORDANCE WITH ISO-9001:2015, API Q1 AND API SPEC 7K.

| Purchase Order Information      |                     |                                  |                                                                    | Customer Name:                |                           |
|---------------------------------|---------------------|----------------------------------|--------------------------------------------------------------------|-------------------------------|---------------------------|
| Customer Part Number:           | OA-5640-4815-1002-4 | Part Description:                | 3" 10,000 psi WP CHOKE HOSE M X F 4" 1002 HAMMER UNIONS C/W CLAMPS | CONTACT PAUL HOFFMAN FOR INFO | CITADEL DRILLING          |
| QTY Ordered:                    | 1                   | Assembly Date:                   | 02/26/2020                                                         |                               |                           |
| DW Industries Part Number:      | OA-5640-4815-1002-4 | Serial Number:                   | 022620DW-2                                                         |                               |                           |
| Customer Purchase Order Number: |                     | DW Industries Work Order Number: | 20020163                                                           |                               |                           |
|                                 |                     |                                  |                                                                    | Customer Contact:             | PAUL HOFFMAN 432-241-5360 |

DW INDUSTRIES INC.  
6287 Long Drive  
Houston, TX 77087  
Tel. 713 644-8372 Fax 713-644-4947

COPY

Certificate of Performance





QP-018-OF, Rev New  
Rev Date: 12/17/2019Garrett Crawford, Director of Quality  
DW Industries Inc.


Certificate Issue Date: 2/27/2020

I DO HEREBY CERTIFY, AS THE AUTHORIZED REPRESENTATIVE OF DW INDUSTRIES, THAT THE PRODUCT LISTED ABOVE ARE OF THE QUALITY SPECIFIED AND CONFORM TO ALL REQUIREMENTS OF THE PURCHASE ORDER, INCLUDING: QUALITY CONTROL CLAUSES, DESIGN SPECIFICATIONS, DRAWINGS, PRESERVATION, PACKAGING, MARKING, AND PHYSICAL IDENTIFICATION REQUIREMENTS AND HAS BEEN PROCESSED IN ACCORDANCE WITH ISO-9001:2015, API Q1 AND API SPEC 7K.

| Purchase Order Information      |                               |                                  |                                                                                        | Customer Name:   |                                                   |
|---------------------------------|-------------------------------|----------------------------------|----------------------------------------------------------------------------------------|------------------|---------------------------------------------------|
| Customer Part Number:           | OA-5640-4822-4-1/16FXFL-ALE   | Part Description:                | 3" 10,000 PSI WP CHOKE HOSE 4-1/16" FIXED BY FLOAT FLANGES C/W SS ARMOR & LIFTING EYES | CITADEL DRILLING | Customer Contact:<br>PAUL HOFFMAN<br>432-241-5360 |
| QTY Ordered:                    | 1                             | Assembly Date:                   | 02/26/2020                                                                             |                  |                                                   |
| DW Industries Part Number:      | OA-5640-4822-4-1/16FXFL-ALE   | Serial Number:                   | 022620DW-1                                                                             |                  |                                                   |
| Customer Purchase Order Number: | CONTACT PAUL HOFFMAN FOR INFO | DW Industries Work Order Number: | 20020164                                                                               |                  |                                                   |

DW INDUSTRIES INC.  
6287 LONG DRIVE  
Houston, TX 77067  
Tel. 713 644-8372 Fax 713-644-4947

**COPY**  
**Certificate of Conformance**

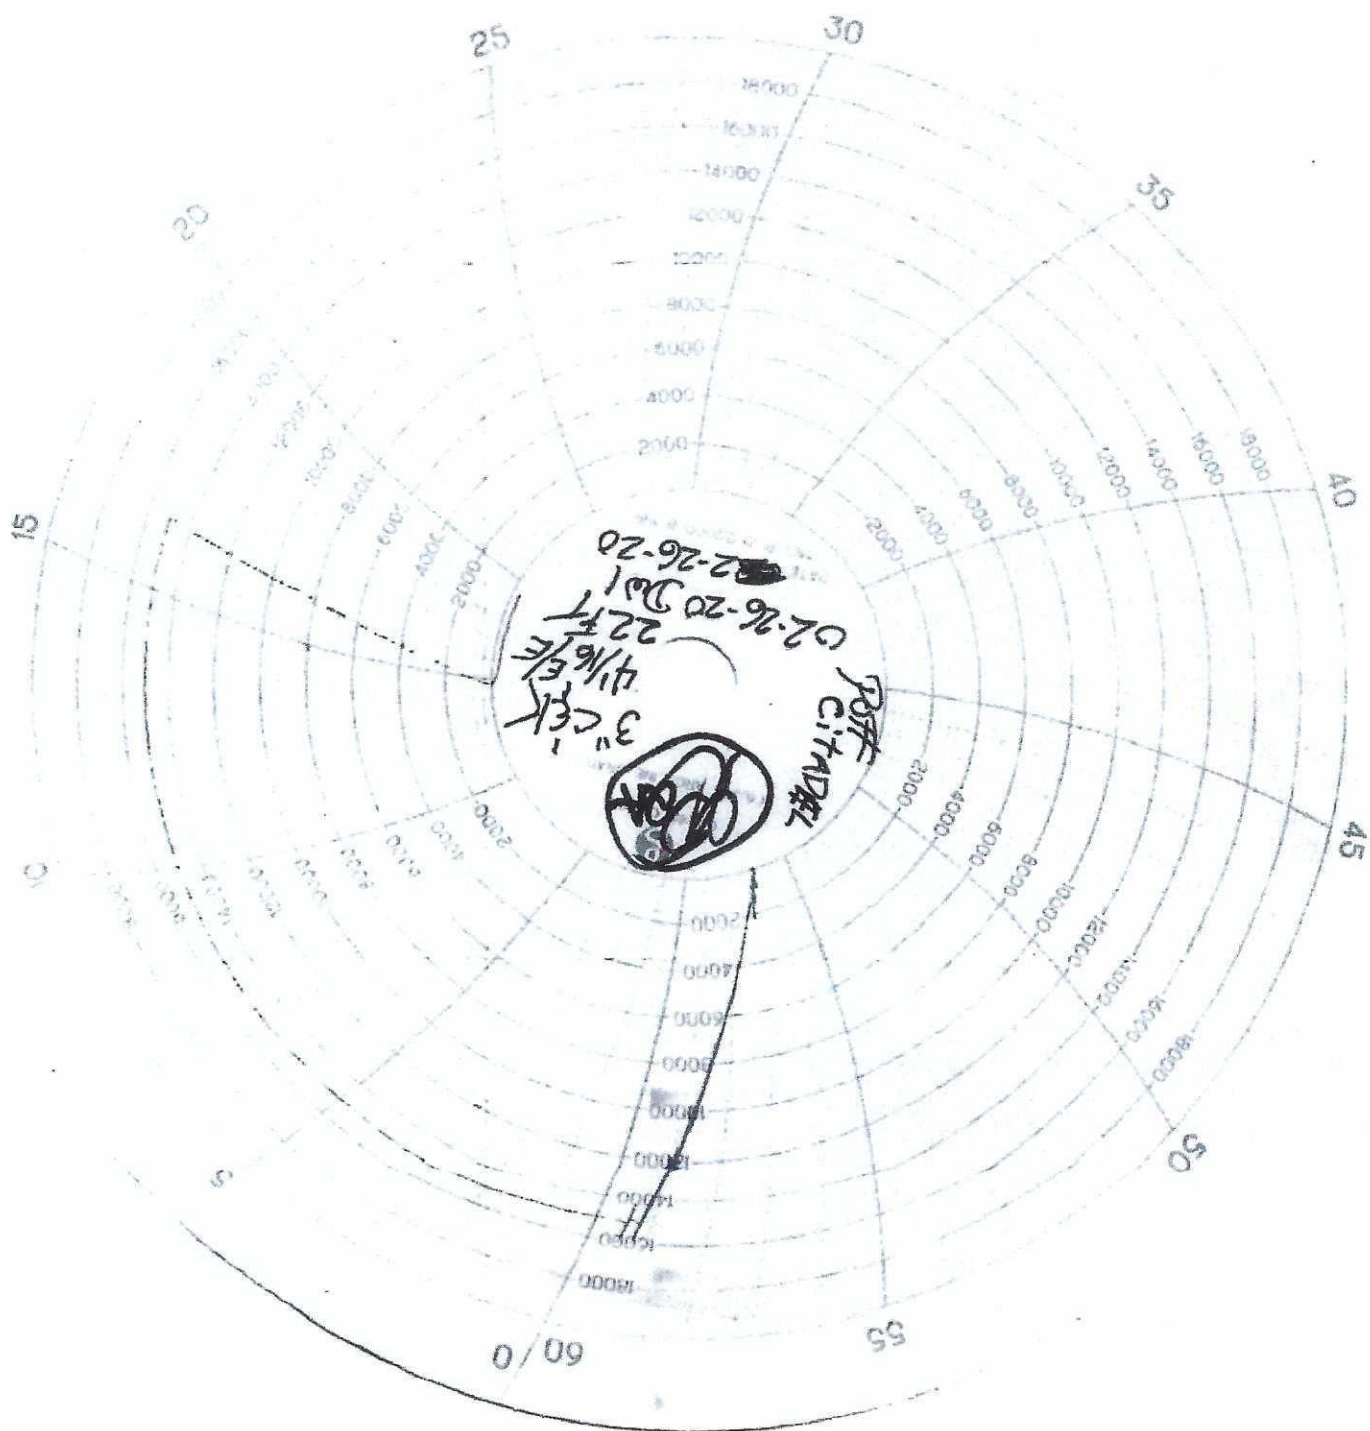

COPY



Quality Assurance,  
DW Industries, Inc.


Certificate Issue Date: 1/27/2023

I DO HEREBY CERTIFY, AS THE AUTHORIZED REPRESENTATIVE OF DW INDUSTRIES, THAT THE PRODUCT LISTED ABOVE ARE OF THE QUALITY SPECIFIED AND CONFORM TO ALL REQUIREMENTS OF THE PURCHASE ORDER, INCLUDING: QUALITY CONTROL CLAUSES, DESIGN SPECIFICATIONS, DRAWINGS, PRESERVATION, PACKAGING, MARKING, AND PHYSICAL IDENTIFICATION REQUIREMENTS AND HAS BEEN PROCESSED IN ACCORDANCE WITH ISO-9001:2015, API Q1 AND API SPEC 7K.

| Purchase Order Information      |                             |  |  | Customer Name:                   |                   |
|---------------------------------|-----------------------------|--|--|----------------------------------|-------------------|
| Customer Part Number:           |                             |  |  | ASUTIN HOSE                      | Customer Contact: |
| QTY Ordered:                    | 1                           |  |  | JUDY LOERA                       |                   |
| DW Industries Part Number:      | OA-PS5038-64154"-602        |  |  | DW Industries Work Order Number: | 23010065          |
| Customer Purchase Order Number: | 00704977                    |  |  | Serial Number:                   | 23010065          |
| Part Description:               | 4"X154" 3K W/4" FIG 602 MXF |  |  | Assembly Date:                   | 1/27/2023         |

DW INDUSTRIES INC.  
6287 Long Drive  
Houston, TX 77087  
Tel. 713 644-8372 Fax 713-644-4947

Certificate of Conformance

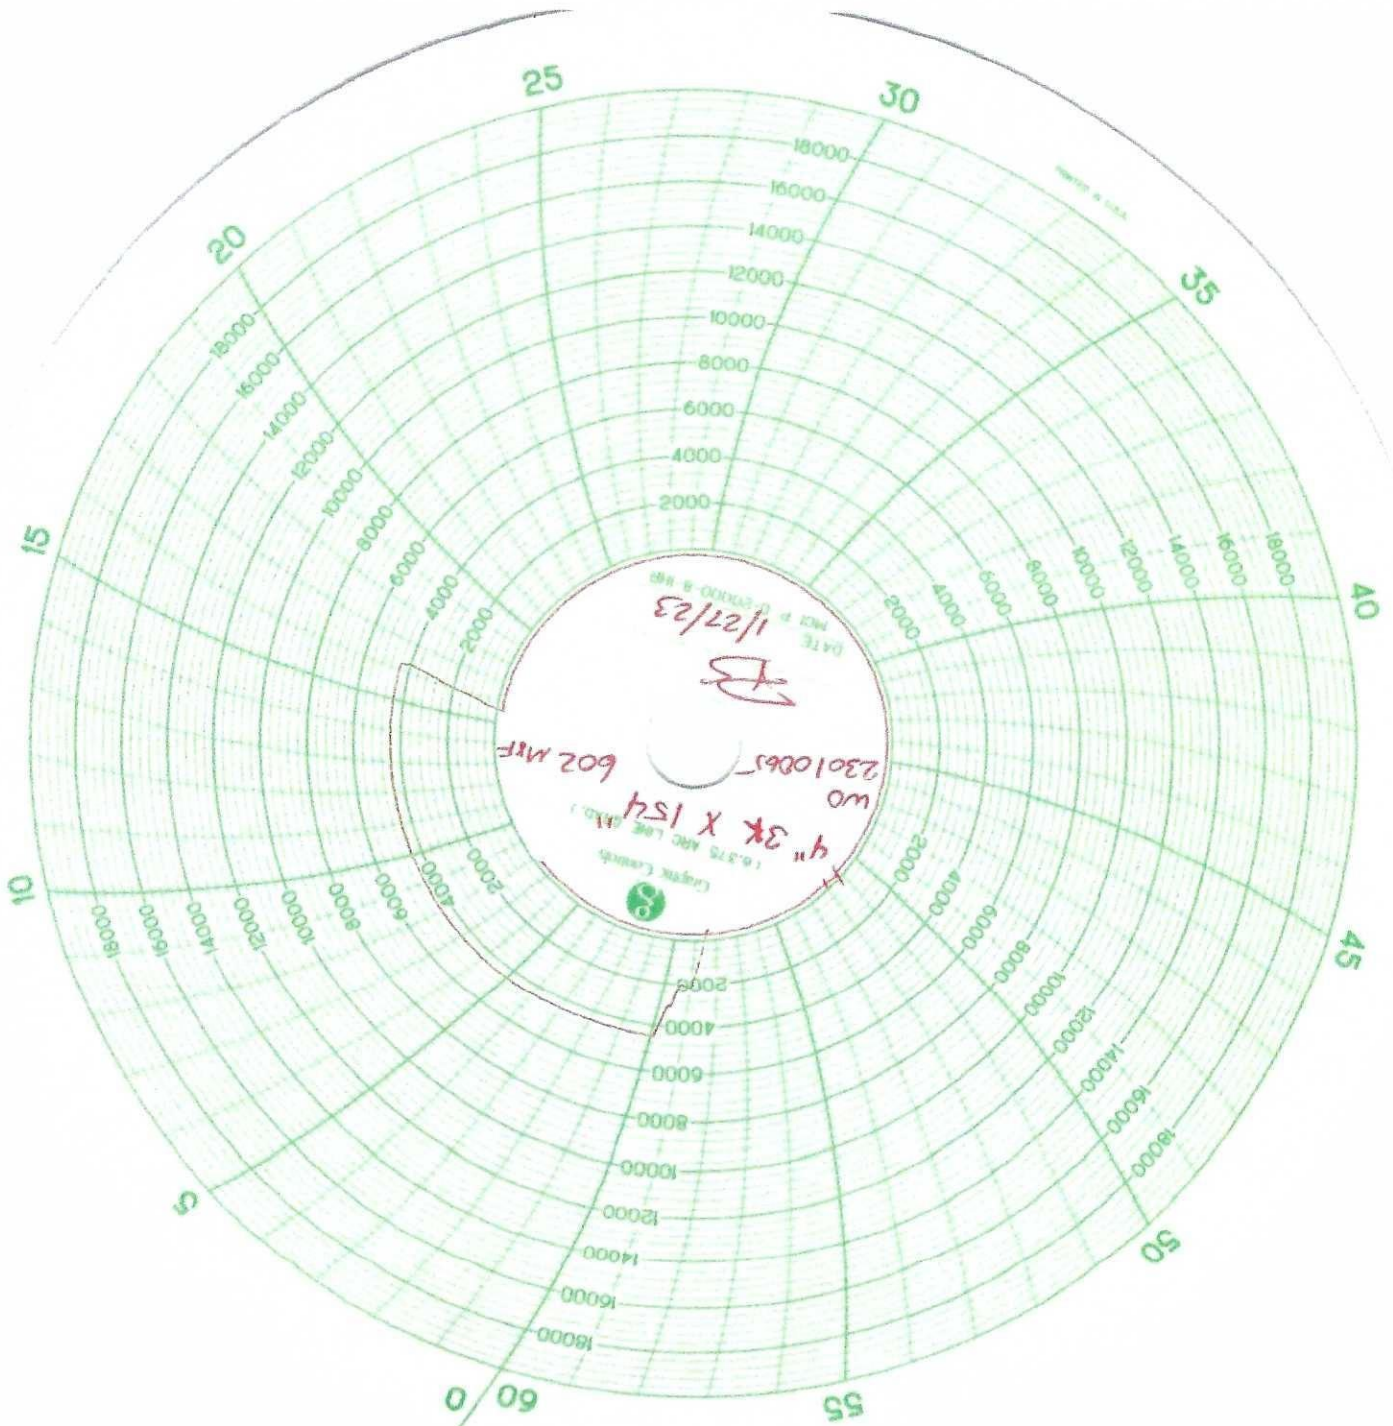



IN SERVICE  
12-20-21

**GATES ENGINEERING & SERVICES NORTH AMERICA**  
7603 Prairie Oak Dr. Suite 190  
Houston, TX. 77086

**PHONE: +1 (281) 602-4100**  
**FAX: +1 (281) 602-4147**  
**EMAIL: gesna.quality@gates.com**  
**WEB: www.gates.com/ollandgas**

**PRESSURE TEST CERTIFICATE**

|                |                                |                  |             |
|----------------|--------------------------------|------------------|-------------|
| Customer:      | A-7 AUSTIN INC DBA AUSTIN HOSE | Test Date:       | 10/15/2021  |
| Customer Ref.: | 00595477                       | Hose Serial No.: | H3-101521-2 |
| Invoice No.:   | 521925                         | Created By:      | Micky Mhina |

|                      |                                                                                                                                                                                             |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Description: | 3" X 35' GATES FIRE RATED CHOKE & KILL HOSE ASSEMBLY SUITED FOR H2S SERVICE C/W 4 1/16 10K FIXED X FLOAT HEAT TREATED FLANGES SUPPLIED WITH STAINLESS STEEL ARMOR SAFETY CLAMPS & LIFT EYES |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|                  |                                       |                   |                                       |
|------------------|---------------------------------------|-------------------|---------------------------------------|
| End Fitting 1:   | 4 1/16 10K FIXED FLANGE               | End Fitting 2:    | 4 1/16 10K FLOAT HEAT TREATED FLANGES |
| Oracle Star No.: | 68703010-10074881                     | Assembly Code:    | L41975 091719                         |
| CUSTOMER P/N:    | 10K3.035.0CK411610KFIXXFLTW/SSA/SC/LE | Test Pressure:    | 15,000 PSI.                           |
|                  |                                       | Working Pressure: | 10,000 PSI.                           |

**Gates Engineering & Services North America certifies that:**

The following hose assembly has successfully passed all pressure testing requirements set forth in Gates specifications: GTS-04-052 (for 5K assemblies) or GTS-04-053 (10K assemblies) or GTS-04-048 (15K assemblies), which include reference to Specification API 16C (2nd Edition); sections 7.5.4, 7.5.9, and 10.8.7. A test graph will accompany this test certificate to illustrate conformity to test requirements. This hose assembly was pressure tested using equipment and instrumentation that has been calibrated in accordance with the requirements set-forth in the GESNA management system.

|             |                    |
|-------------|--------------------|
| Quality:    | QUALITY            |
| Date :      | 10/15/2021         |
| Signature : | <i>Micky Mhina</i> |

F-PRD-005B

|             |                    |
|-------------|--------------------|
| Production: | PRODUCTION         |
| Date :      | 10/15/2021         |
| Signature : | <i>[Signature]</i> |

Revision 6\_05032021



**BLACK GOLD®**

**GATES ENGINEERING & SERVICES NORTH AMERICA**  
**7603 Prairie Oak Dr.**  
**Houston, TX. 77086**

**PHONE: +1 (281) 602-4100**  
**FAX: +1 (281) 602-4147**  
**EMAIL: gesna.quality@gates.com**  
**WEB: www.gates.com/ollandgas**

## CERTIFICATE OF CONFORMANCE

This is to certify that all parts and materials included in this shipment have manufactured and/or processed in accordance with various Gates and API assembly and test specifications. Records of required tests are on-file and subject to examination. Test reports and subsequent test graphs have been made available with this shipment. Additional supporting documentation related to materials, welding, weld inspections, and heat-treatment activities are available upon request.

**CUSTOMER:** A-7 AUSTIN INC DBA AUSTIN HOSE  
**CUSTOMER P.O.#:** 00595477  
**CUSTOMER P./N.#:** 10K3.035.0CK411610KFIXXFLTW/SSA/SC/LE  
**PART DESCRIPTION:** 3" X 35' GATES FIRE RATED CHOKE & KILL HOSE ASSEMBLY SUITED FOR H2S  
SERVICE C/W 4 1/16 10K FIXED X FLOAT HEAT TREATED FLANGES SUPPLIED WITH  
STAINLESS STEEL ARMOR SAFETY CLAMPS & LIFT EYES  
**SALES ORDER #:** 521925  
**QUANTITY:** 1  
**SERIAL #:** H3-101521-2

SIGNATURE: \_\_\_\_\_

A handwritten signature in black ink, appearing to read "M. Lopez" or similar, written over a horizontal line.

TITLE: \_\_\_\_\_

QUALITY ASSURANCE

DATE: \_\_\_\_\_

10/15/2021



H3-6963

10/15/2021 10:15:57 AM

## TEST REPORT

**CUSTOMER**

Company: Austin Distributing

Production description:

Sales order #: 521925

Customer reference:

**TEST OBJECT**

Serial number: H3-101521-2

Lot number: L41975091719

Description:

Hose ID: 3" 10k ck

Part number:

**TEST INFORMATION**

Test procedure: GTS-04-053

Test pressure: 15000.00 psi

Test pressure hold: 3600.00 sec

Work pressure: 10000.00 psi

Work pressure hold: 900.00 sec

Length difference: 0.00 %

Length difference: 0.00 inch

Fitting 1: 3.0 x 4-1/16 10K

Part number:

Description:

Fitting 2: 3.0 x 4-1/16 10K

Part number:

Description:


Visual check:

Pressure test result: PASS

Length measurement result:

Length: 35 feet

Test operator: francisco

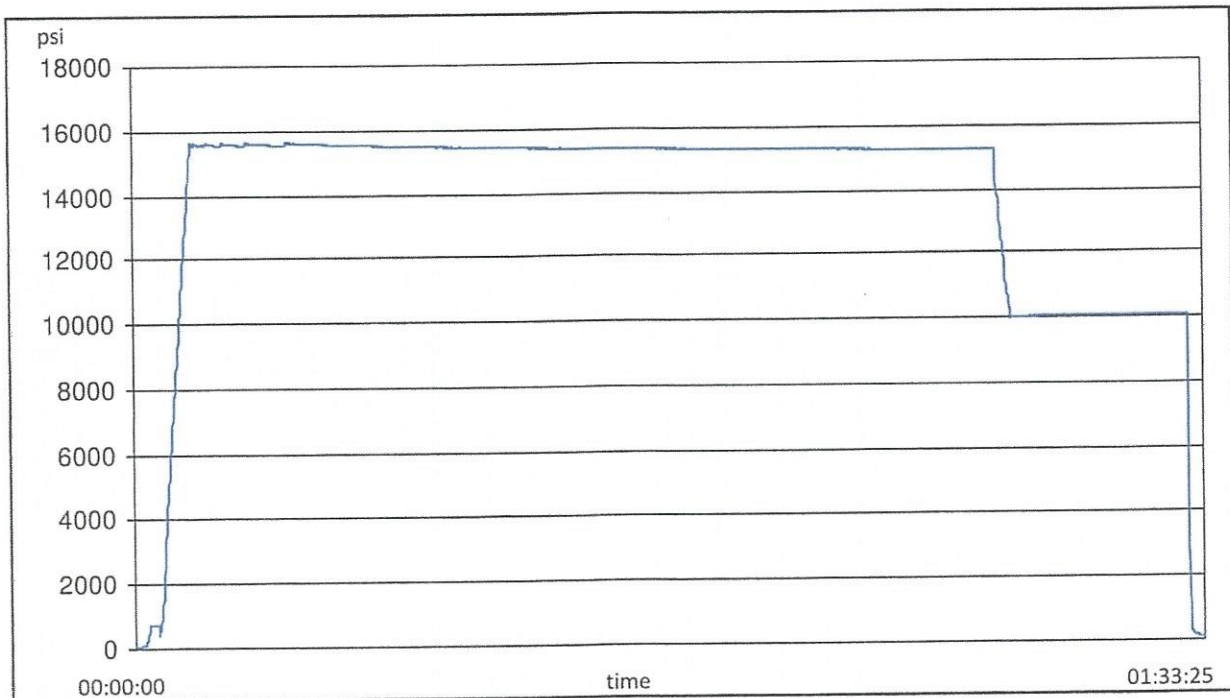



10/15/2021 10:15:57 AM

# TEST REPORT

| Description | Serial number | Calibration date | Calibration due date |
|-------------|---------------|------------------|----------------------|
| S-25-A-W    | 110AQA1S      | 2021-02-24       | 2022-02-24           |
| S-25-A-W    | 110D3PHQ      | 2021-03-11       | 2022-03-11           |

Comment

|  |
|--|
|  |
|--|

## Hydrostatic Test Certificate

ContiTech

|                                                                                                                       |  |                                                                                  |  |                                                                                                                         |  |
|-----------------------------------------------------------------------------------------------------------------------|--|----------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------------------------------------------|--|
| <b>Certificate Number</b><br>H100163                                                                                  |  | <b>COM Order Reference</b><br>1429702                                            |  | <b>Customer Name &amp; Address</b><br>HELMERICH & PAYNE DRILLING CO<br>1434 SOUTH BOULDER AVE<br>TULSA, OK 74119<br>USA |  |
| <b>Customer Purchase Order No:</b><br>740382384                                                                       |  |                                                                                  |  |                                                                                                                         |  |
| <b>Project:</b>                                                                                                       |  |                                                                                  |  |                                                                                                                         |  |
| <b>Test Center Address</b><br>ContiTech Oil & Marine Corp.<br>11535 Brittmoore Park Drive<br>Houston, TX 77041<br>USA |  | <b>Accepted by COM Inspection</b><br>Signed: Gerson Mejia-Lazo<br>Date: 07/14/22 |  | <b>Accepted by Client Inspection</b>                                                                                    |  |

We certify that the goods detailed hereon have been inspected as described below by our Quality Management System, and to the best of our knowledge are found to conform the requirements of the above referenced purchase order as issued to ContiTech Oil & Marine Corporation.

| Item | Part No. | Description | Qty | Serial Number | Work. Press. (psi) | Test Press. (psi) | Test Time (minutes) |
|------|----------|-------------|-----|---------------|--------------------|-------------------|---------------------|
|------|----------|-------------|-----|---------------|--------------------|-------------------|---------------------|

50 RECERTIFICATION

3" ID 10K Choke and Kill Hose x 35ft OAL

1

70025


10,000

15,000

60

| Record Information |                    |
|--------------------|--------------------|
| Start Time         | 6/14/2022 11:42:08 |
| End Time           | 6/14/2022 12:56:14 |
| Interval           | 00:01:00           |
| Number             | 75                 |
| MaxValue           | 15888              |
| MinValue           | -8                 |
| AvgValue           | 14184              |
| RecordName         | 70025-sh           |
| RecordNumber       | 237                |

| Gauge Information |              |
|-------------------|--------------|
| Model             | ADT680       |
| SN                | 21817380014  |
| Range             | (0-40000)psi |
| Unit              | psi          |

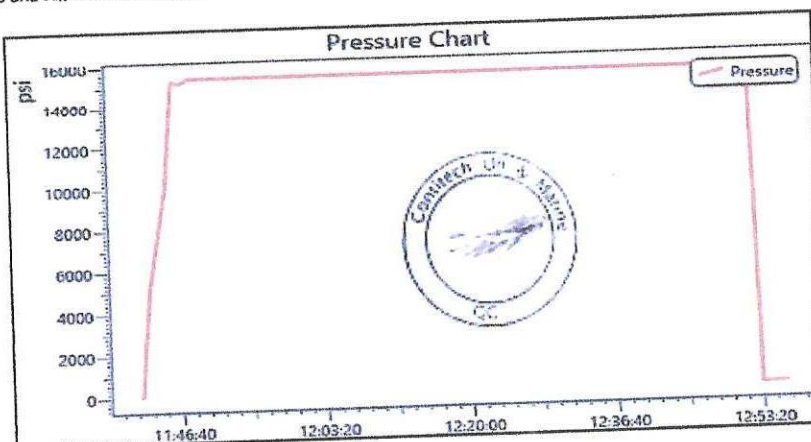





## Certificate of Conformity

ContiTech

|                                                                                                                       |                                                                                                                                                                    |                                                                                                                         |  |
|-----------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|--|
| <b>Certificate Number</b><br>H100163                                                                                  | <b>COM Order Reference</b><br>1429702                                                                                                                              | <b>Customer Name &amp; Address</b><br>HELMERICH & PAYNE DRILLING CO<br>1434 SOUTH BOULDER AVE<br>TULSA, OK 74119<br>USA |  |
| <b>Customer Purchase Order No:</b> 740382384                                                                          |                                                                                                                                                                    |                                                                                                                         |  |
| <b>Project:</b>                                                                                                       |                                                                                                                                                                    |                                                                                                                         |  |
| <b>Test Center Address</b><br>ContiTech Oil & Marine Corp.<br>11535 Brittmoore Park Drive<br>Houston, TX 77041<br>USA | <b>Accepted by COM Inspection</b><br>Signed: Gerson Mejia-Lazo<br>Date: 07/14/22  | <b>Accepted by Client Inspection</b>                                                                                    |  |

We certify that the items detailed below meet the requirements of the customer's Purchase Order referenced above, and are in conformance with the specifications given below.

| Item | Part No.        | Description                              | Qty | Serial Number | Specifications     |
|------|-----------------|------------------------------------------|-----|---------------|--------------------|
| 50   | RECERTIFICATION | 3" ID 10K Choke and Kill Hose x 35ft OAL | 1   | 70025         | ContiTech Standard |

ARMORED CHOKE HOSE

Installed

8-29-22






ContiTech

 CONTITECH RUBBER  
Industrial Kft.

No: QC-DB- 120 / 2019

Page: 16 / 91

| QUALITY CONTROL<br>INSPECTION AND TEST CERTIFICATE                                                                                                                                                                                                                                                                                                                                                 |           |                                                                                                                                                                            |         | CERT. N°: 75819     |  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|---------------------|--|
| PURCHASER: ContiTech Oil & Marine Corp.                                                                                                                                                                                                                                                                                                                                                            |           |                                                                                                                                                                            |         | P.O. N°: 4501225327 |  |
| CONTITECH RUBBER order N°: 1127442                                                                                                                                                                                                                                                                                                                                                                 |           | HOSE TYPE: 3" ID Choke and Kill Hose                                                                                                                                       |         |                     |  |
| HOSE SERIAL N°: 75819                                                                                                                                                                                                                                                                                                                                                                              |           | NOMINAL / ACTUAL LENGTH: 10,67 m / 10,68 m                                                                                                                                 |         |                     |  |
| W.P. 69,0 MPa 10000 psi                                                                                                                                                                                                                                                                                                                                                                            |           | T.P. 103,5 MPa 15000 psi                                                                                                                                                   |         | Duration: 60 min.   |  |
| Pressure test with water at ambient temperature                                                                                                                                                                                                                                                                                                                                                    |           |                                                                                                                                                                            |         |                     |  |
| See attachment ( 1 page )                                                                                                                                                                                                                                                                                                                                                                          |           |                                                                                                                                                                            |         |                     |  |
| COUPLINGS Type                                                                                                                                                                                                                                                                                                                                                                                     | Serial N° | Quality                                                                                                                                                                    | Heat N° |                     |  |
| 3" coupling with<br>4 1/16" 10K API Swivel Flange end<br>Hub                                                                                                                                                                                                                                                                                                                                       | 6026      | AISI 4130                                                                                                                                                                  | A0607J  |                     |  |
|                                                                                                                                                                                                                                                                                                                                                                                                    |           | AISI 4130                                                                                                                                                                  | 040841  |                     |  |
|                                                                                                                                                                                                                                                                                                                                                                                                    |           | AISI 4130                                                                                                                                                                  | 54194   |                     |  |
| 3" coupling with<br>4 1/16" 10K API b.w. Flange end                                                                                                                                                                                                                                                                                                                                                | 6016      | AISI 4130                                                                                                                                                                  | A0607J  |                     |  |
|                                                                                                                                                                                                                                                                                                                                                                                                    |           | AISI 4130                                                                                                                                                                  | 040431  |                     |  |
| <b>Not Designed For Well Testing</b> <b>API Spec 16 C 2<sup>nd</sup> Edition– FSL2</b><br><b>Temperature rate: "B"</b>                                                                                                                                                                                                                                                                             |           |                                                                                                                                                                            |         |                     |  |
| All metal parts are flawless                                                                                                                                                                                                                                                                                                                                                                       |           |                                                                                                                                                                            |         |                     |  |
| WE CERTIFY THAT THE ABOVE HOSE HAS BEEN MANUFACTURED IN ACCORDANCE WITH THE TERMS OF THE ORDER INSPECTED AND PRESSURE TESTED AS ABOVE WITH SATISFACTORY RESULT.                                                                                                                                                                                                                                    |           |                                                                                                                                                                            |         |                     |  |
| STATEMENT OF CONFORMITY: We hereby certify that the above items/equipment supplied by us are in conformity with the terms, conditions and specifications of the above Purchaser Order and that these items/equipment were fabricated inspected and tested in accordance with the referenced standards, codes and specifications and meet the relevant acceptance criteria and design requirements. |           |                                                                                                                                                                            |         |                     |  |
| COUNTRY OF ORIGIN HUNGARY/EU                                                                                                                                                                                                                                                                                                                                                                       |           |                                                                                                                                                                            |         |                     |  |
| Date:                                                                                                                                                                                                                                                                                                                                                                                              | Inspector | Quality Control                                                                                                                                                            |         |                     |  |
| 08. April 2019.                                                                                                                                                                                                                                                                                                                                                                                    |           | ContiTech Rubber<br>Industrial Kft.<br>Quality Control Dept.<br>(1)                                                                                                        |         |                     |  |
|                                                                                                                                                                                                                                                                                                                                                                                                    |           |   |         |                     |  |



## Hose Assembly Evaluation Sheet

|                         |                        |                                                                                                                 |                                                                   |         |                                                                        |
|-------------------------|------------------------|-----------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------|---------|------------------------------------------------------------------------|
| Prepared by             | Cristian Rivera        | Date:                                                                                                           | 8/27/2022                                                         | QIN:    | N/A                                                                    |
| Customer:               | HELMERICH & PAYNE, INC | Location:                                                                                                       | H&P INT'L DRILLING CO 210 MAGNOLIA DR GALENA PARK, TX, 77547-2738 |         |                                                                        |
| User contact:           | MITCH MCKINNIS         | Phone:                                                                                                          |                                                                   | e-mail: | <a href="mailto:mitch.mckinnis@hpinc.com">mitch.mckinnis@hpinc.com</a> |
|                         | <b>Parameters</b>      | <b>Hose Details</b>                                                                                             |                                                                   |         | <b>Test Status</b>                                                     |
| Application Information | PO                     | 740398454 (88000240   SN:70035)                                                                                 |                                                                   |         | PASS                                                                   |
|                         | Gates SO               | 525035                                                                                                          |                                                                   |         |                                                                        |
|                         | Serial #:              | 88000240   SN:70035                                                                                             |                                                                   |         |                                                                        |
|                         | As Tested Serial:      | H2-082722-1 RE-TEST                                                                                             |                                                                   |         |                                                                        |
|                         | Hose ID:               | 3 IN                                                                                                            |                                                                   |         |                                                                        |
|                         | Hose type:             | INSPECT AND RETEST CUSTOMER HOSE 3IN X 35FT CHOKE & KILL ASSEMBLY C/W 4-1/16 FLANGES BX155 RING GROOVE EACH END |                                                                   |         |                                                                        |
|                         | Working pressure:      | 10000 PSI.                                                                                                      |                                                                   |         |                                                                        |

### 1. Visual Examination

An API 16C, IN X 35FT CHOKE & KILL ASSEMBLY C/W 4-1/16 FLANGES BX155 RING GROOVE EACH END received from HELMERICH & PAYNE, INC for inspection, testing and external cosmetic repairs. The hydrostatic pressure testing was requested to 15000 PSI., by the customer HELMERICH & PAYNE, INC

Visual inspection and examination of external hose assembly showed some cosmetic dents and repairable damages to the external armor at distance 32ft 9in. from EF2. (Need to fix a part of the hose.)

Both external & internal hose body and couplings of the hose were examined. Visual Inspection photos are in Table 2, while post inspection/testing pictures are in Table 4.

The hose was hydrostatically tested at 15000 PSI. test pressure with an hour-long hold. On completion of hydrostatic testing, an internal baroscopic examination was carried out, to check the condition of internal hose areas, mainly hose tube and coupling hose interface.

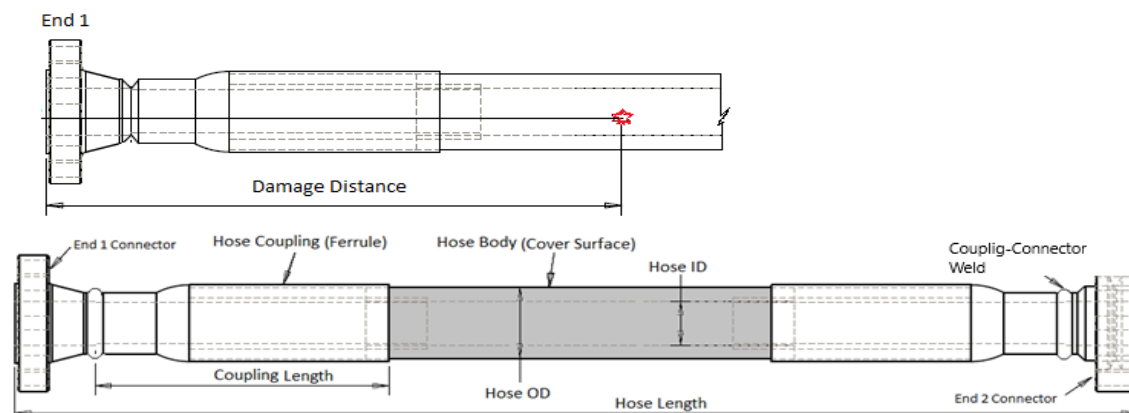


Figure 1: Generic Hose Assembly



Hose Assembly Evaluation Sheet

1.0 Observations and comments

|   | Comments                                                                                                                          |
|---|-----------------------------------------------------------------------------------------------------------------------------------|
| 1 | <div></div> <p>Photos: ID.</p>                  |
| 2 | <div></div> <p>Photo: Damaged armor areas</p> |





Hose Assembly Evaluation Sheet


|   |                                                                                                                                                                                                  |
|---|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 3 | <div data-bbox="326 195 1252 871"></div> <p data-bbox="688 945 886 972">Photos: At Shipping.</p>               |
| 4 | <div data-bbox="319 1005 1291 1715"></div> <p data-bbox="639 1751 935 1776">Photos: Armor and Engraving.</p> |



## Hose Assembly Evaluation Sheet

|   |                                                                                                                                           |
|---|-------------------------------------------------------------------------------------------------------------------------------------------|
| 5 |  <p style="text-align: center;">Photo: In the Crate</p> |
|---|-------------------------------------------------------------------------------------------------------------------------------------------|

## 2. Hydro Static Pressure test

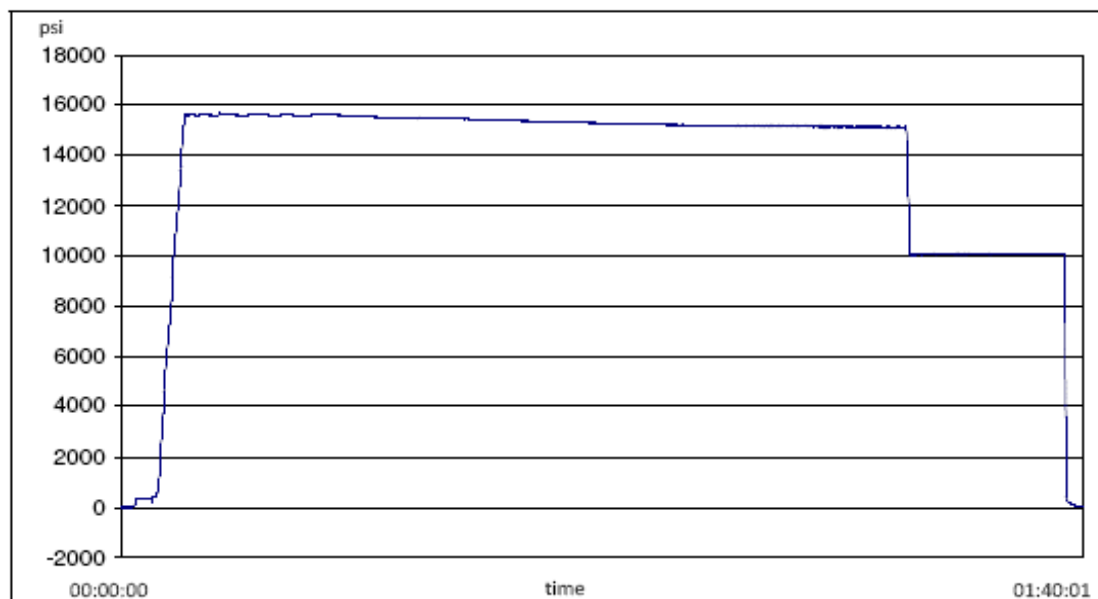

## 2.1 Hydrostatic Pressure test Procedures

|   | Hose Type                                  | Test Specification | Test Date  | Technician    |
|---|--------------------------------------------|--------------------|------------|---------------|
| 1 | IN X 35FT CHOKE & KILL ASSEMBLY C/W 4-1/16 | 3 10K C&K          | 2022-08-27 | Martin Orozco |

## 2.2 Gates Hydrostatic Pressure tester

|   | Test Equipment | Serial No | Last Cal Date | Cal Due Date |
|---|----------------|-----------|---------------|--------------|
| 1 | S-25-A-W       | 110AMCLO  | 2022-01-10    | 2023-01-10   |
| 2 | S-25-A-W       | 110BSEUZ  | 2022-03-09    | 2023-03-09   |





## Hose Assembly Evaluation Sheet

### 2.3 Hydro Static Test Pressure results

|   | Details                                 | Results |      |
|---|-----------------------------------------|---------|------|
| 1 | Hydrostatic Test Results <sup>(1)</sup> | Pass    | Fail |
| 2 | Failure Mode                            | None    |      |
| 3 | Hose Dispatched to the customer?        | Yes     | No   |

#### Note:

1. Hydrostatic Pressure report is given in Appendix 1


## 3. Hose borescope inspection

### 3.2 Internal Failure Details

|   | Type of Failure        | Location of Defect | Ref. Photo | Defect Details |
|---|------------------------|--------------------|------------|----------------|
| 1 | Liner breach/ collapse | None               |            | None           |
| 2 | Bulges/ Blisters       | None               |            | None           |
| 3 | Other breach/failures  | None               |            | None           |



Photos: Liner/Coupling Interface END 1

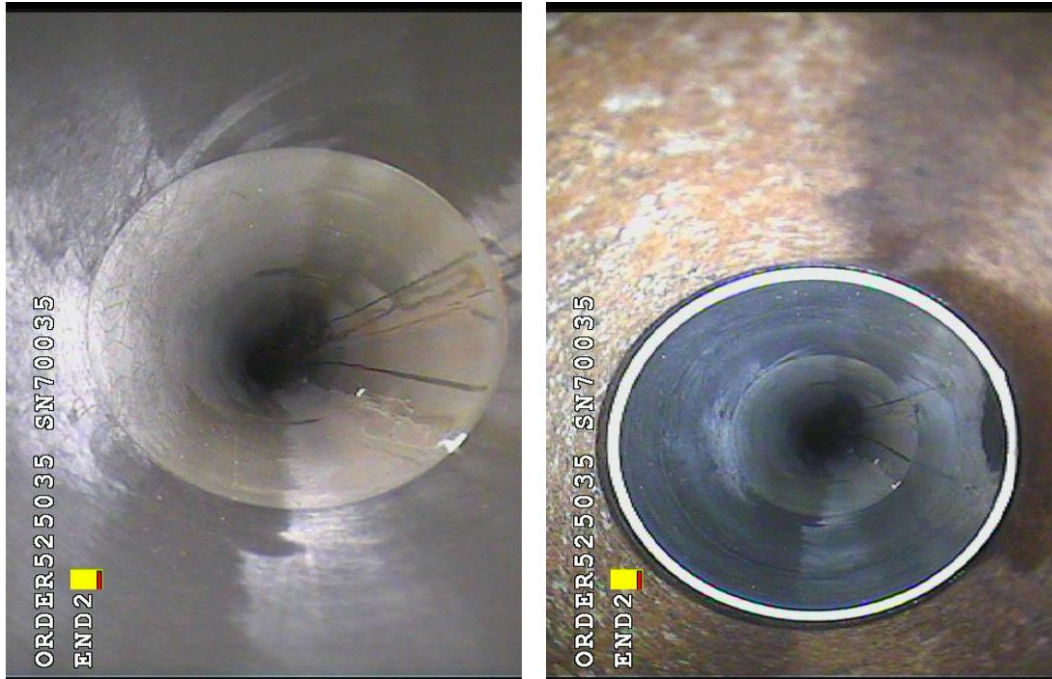**Hose Assembly Evaluation Sheet**

Photos: Liner/Coupling Interface END 2

**Note**

Borescope completed? Yes

**4. Summary**

Hose assembly successfully tested to requested test pressure of 15000 PSI. with an hour hold. It was then serialized and stamped, as H2-082722-1 RE-TEST. The bore scope showed no blisters or delamination in the internal lining/tube area. External damages were repaired as agreed with the customer.



## Hose Assembly Evaluation Sheet

APPENDIX 1:  
Pressure Chart

H2-8316

8/27/2022 8:51:22 AM

## TEST REPORT

## CUSTOMER

Company:

Production description:

Sales order #:

525035

Customer reference: 740398454 (88000240 |  
SN:70035)

## TEST OBJECT

Serial number:

H2-082722-1

Lot number:

Description:

Hose ID:

3 10k C&amp;K

Part number:

## TEST INFORMATION

Test procedure:

3 10K C&amp;K

Test pressure:

15000.00 psi

Test pressure hold:

3600.00 sec

Work pressure:

10000.00 psi

Work pressure hold:

900.00 sec

Length difference:

0.00 %

Length difference:

0.00 inch

Fitting 1:

3.0 x 4-1/16 10K

Part number:

Description:

Fitting 2:

3.0 x 4-1/16 10K

Part number:

Description:

Visual check:

Pressure test result:

PASS


Length measurement result:

Length:

35 feet

Test operator:

Martin

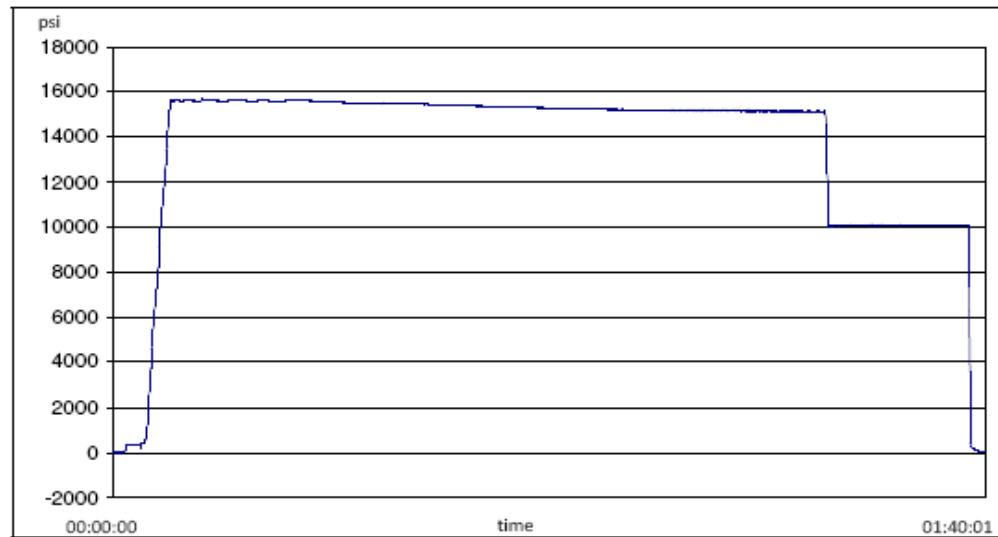

Filename: D:\Certificates\Report\_082722-H2-082722-1.pdf

Page 1/2

Hose Assembly Evaluation Sheet



H2-8316

8/27/2022 8:51:22 AM

TEST REPORT

GAUGE TRACEABILITY

| Description | Serial number | Calibration date | Calibration due date |
|-------------|---------------|------------------|----------------------|
| S-25-A-W    | 110AMCLO      | 2022-01-10       | 2023-01-10           |
| S-25-A-W    | 110BSEUZ      | 2022-03-09       | 2023-03-09           |

Comment



## Hose Assembly Evaluation Sheet

APPENDIX 2:  
Certificate of Conformance

**GATES ENGINEERING & SERVICES NORTH AMERICA**  
7603 Prairie Oak Dr.  
Houston, TX. 77086

PHONE: +1 (281) 602-4100  
FAX: +1 (281) 602-4147  
EMAIL: [gesna.quality@gates.com](mailto:gesna.quality@gates.com)  
WEB: [www.gates.com/oilandgas](http://www.gates.com/oilandgas)


**CERTIFICATE OF CONFORMANCE**

This is to verify that the items detailed below meet the requirements of the Customer's Purchase Order referenced herein, and are in Conformance with applicable specifications, and that Records of Required Tests are on file and subject to examination. The following items were inspected and hydrostatically tested at **Gates Engineering & Services North America** facilities in Houston, TX, USA.

**CUSTOMER:** HELMERICH & PAYNE, INC  
**CUSTOMER P.O.#:** 740398454 (88000240 | SN:70035)  
**CUSTOMER P/N:** 88000240 | SN:70035


**PART DESCRIPTION:** INSPECT AND RETEST CUSTOMER HOSE 3IN X 35FT CHOKE & KILL ASSEMBLY C/W 4-1/16  
FLANGES BX155 RING GROOVE EACH END


**SALES ORDER #:** 525035  
**QUANTITY:** 1  
**SERIAL #:** H2-082722-1 RE-TEST

**SIGNATURE:**   
**TITLE:** QUALITY ASSURANCE  
**DATE:** 8/27/2022



# 5/10M BOP Stack

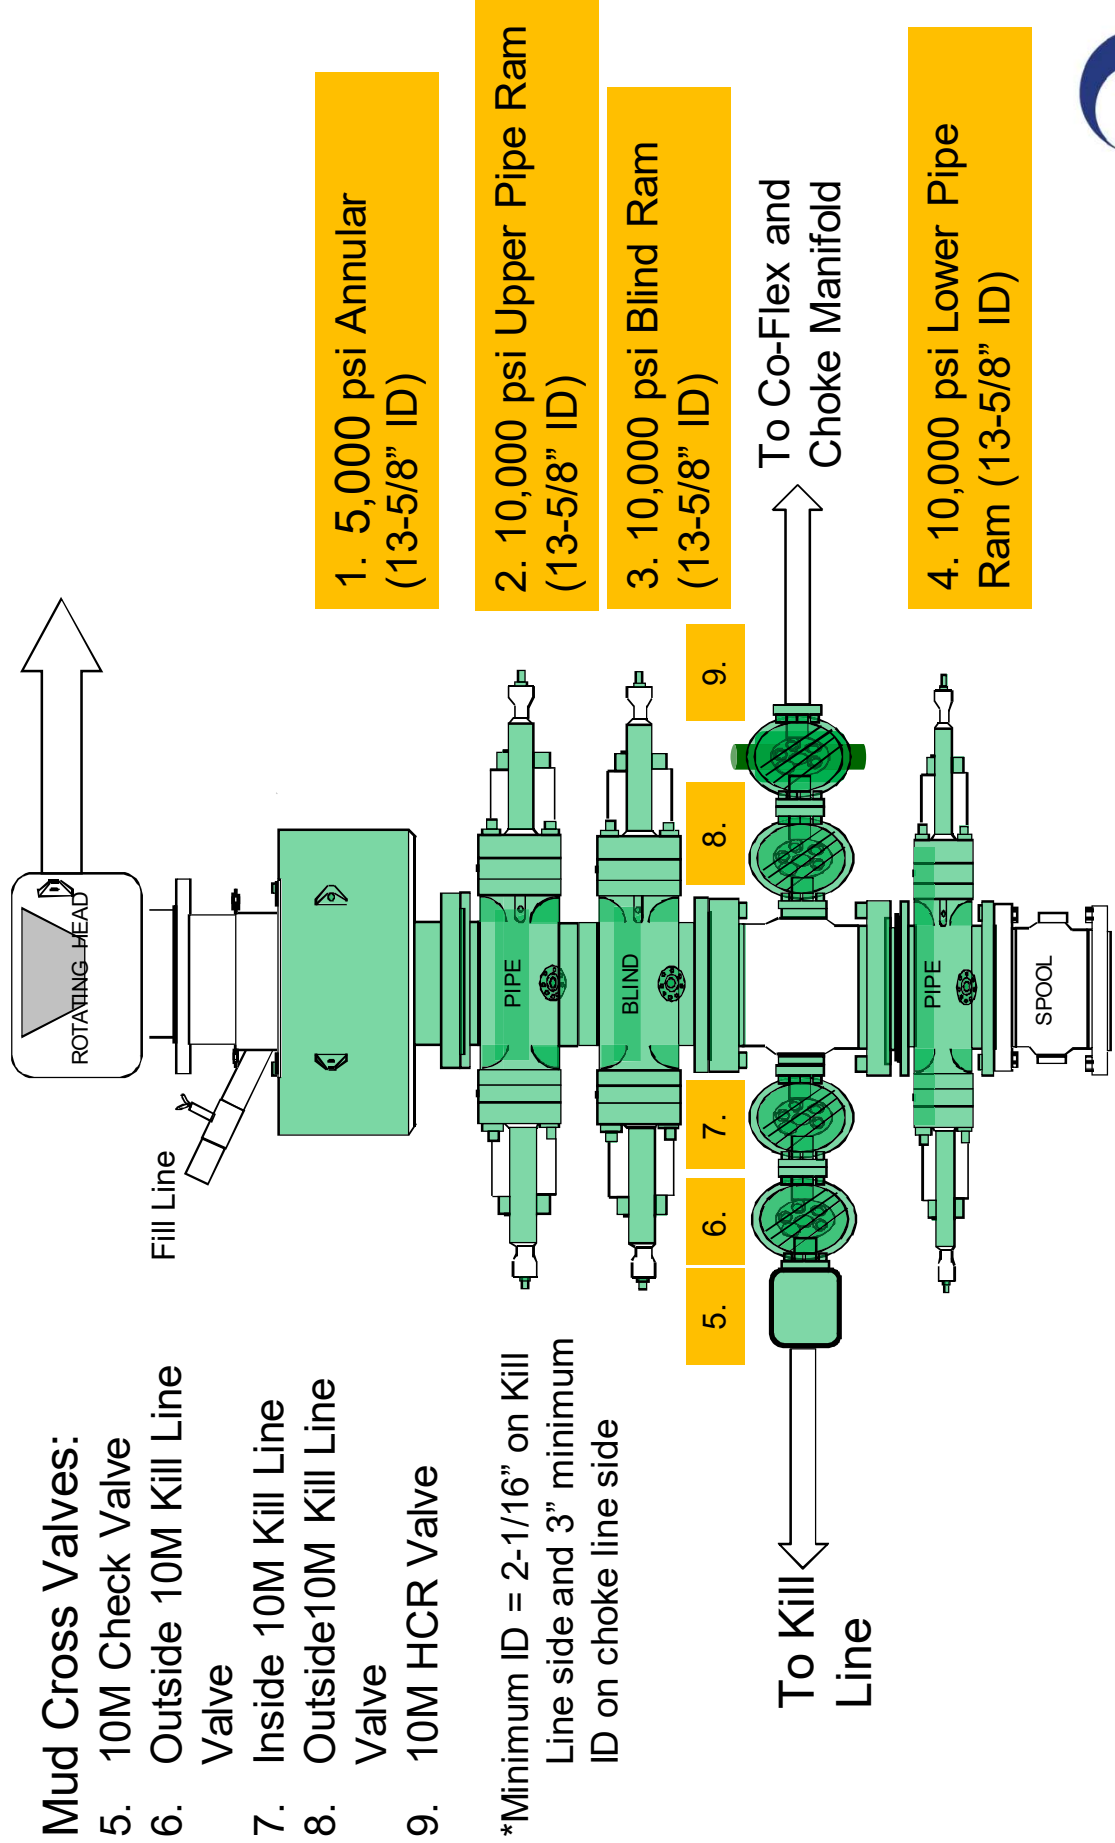

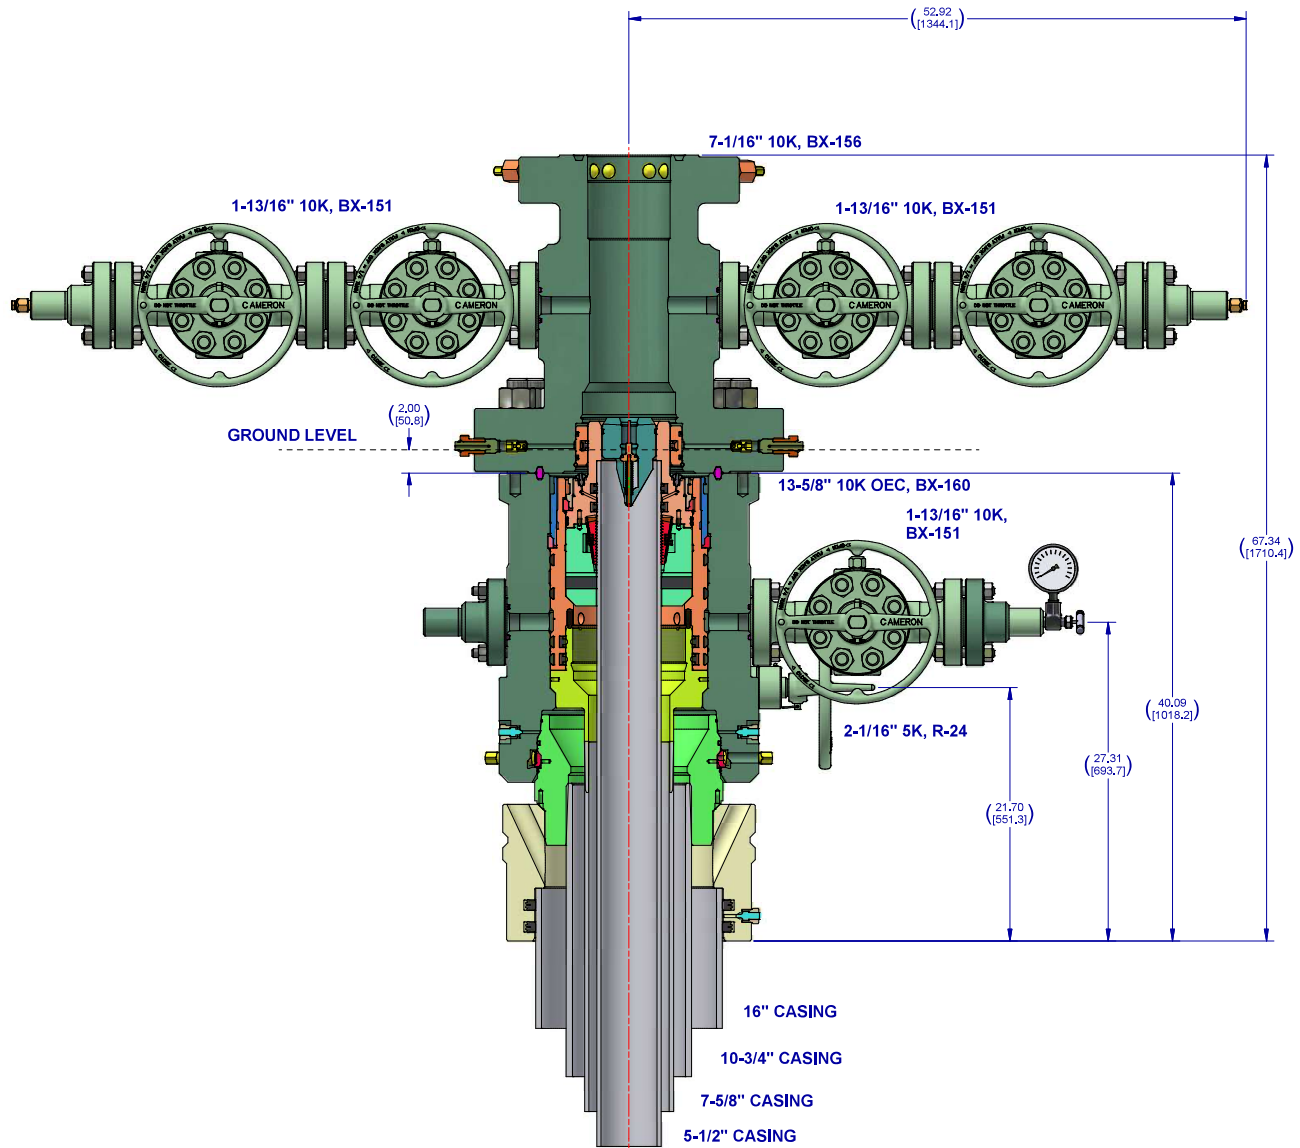**Notes:**

1. THIS IS A PROPOSAL DRAWING AND DIMENSIONS SHOWN ARE SUBJECT TO CHANGE DURING THE FINAL DESIGN PROCESS.

2. DIGITALLY ENABLED SOLUTIONS, CHOKES AND ESD'S AVAILABLE ON REQUEST

| CONFIDENTIAL                                    |                   |                                                                                                                 |                                            |
|-------------------------------------------------|-------------------|-----------------------------------------------------------------------------------------------------------------|--------------------------------------------|
| SURFACE TREATMENT                               | DO NOT SCALE      | <br>A Schlumberger Company | SURFACE SYSTEMS                            |
| DRAWN BY<br>D. GOTTUNG                          | DATE<br>2 Dec 21  |                                                                                                                 |                                            |
| CHECKED BY<br>D. GOTTUNG                        | DATE<br>2 Dec 21  |                                                                                                                 |                                            |
| APPROVED BY<br>D. GOTTUNG                       | DATE<br>2 Dec 21  |                                                                                                                 |                                            |
| ESTIMATED WEIGHT<br>6515.617 LBS<br>2955.434 KG | INTERNAL USE ONLY | SHEET<br>4 of 4                                                                                                 | SD-053434-94-05<br>REV<br>01<br>10/01/2021 |

## OXY's Minimum Design Criteria

Burst, Collapse, and Tensile SF are calculated using Landmark's Stress Check (Casing Design) software. A sundry will be requested if any lesser grade or different size casing is substituted.

### 1) Casing Design Assumptions

#### a) Burst Loads

##### CSG Test (Surface)

- Internal: Displacement fluid + pressure required to comply with regulatory casing test pressures. This will comply with both 43 CFR part 3170 Subpart 3172 and 19.15.16 of the OCD Rules.
- External: Pore pressure in open hole.

##### CSG Test (Intermediate)

- Internal: Displacement fluid + pressure required to comply with regulatory casing test pressures. This will comply with both 43 CFR part 3170 Subpart 3172 and 19.15.16 of the OCD Rules.
- External: Mud Weight to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

##### CSG Test (Production)

- Internal:
  - For Drilling: Displacement fluid + pressure required to comply with regulatory casing test pressures. This will comply with both 43 CFR part 3170 Subpart 3172 and 19.15.16 of the OCD Rules.
  - For Production: The design pressure test should be the greater of (1) the planned test pressure prior to stimulation down the casing. (2) the regulatory test pressure, and (3) the expected gas lift system pressure. The design test fluid should be the fluid associated with pressure test having the greatest pressure.
- External:
  - For Drilling: Mud Weight to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.
  - For Production: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

##### Gas Column (Surface)

- Internal: Assumes a full column of gas in the casing with a Gas/Oil Gradient of 0.1 psi/ft in the absence of better information. It is limited to the controlling pressure based on the fracture pressure at the shoe or the maximum expected pore pressure within the next drilling interval, whichever results in a lower surface pressure.
- External: Fluid gradient below TOC, pore pressure from the TOC to the Intermediate CSG shoe (if applicable), and MW of the drilling mud that was in the hole when the CSG was run from Intermediate CSG shoe to surface.

##### Bullheading (Surface / Intermediate)

- Internal: The string must be designed to withstand a pressure profile based on the fracture pressure at the casing shoe with a column of water above the shoe plus an additional surface pressure (in psi) of  $0.02 \times MD$  of the shoe to account for pumping friction pressure.
- External: Mud weight to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

**Gas Kick (Intermediate)**

- The string must be designed to at least a gas kick load case unless the rig is unable to detect a kick. For the gas kick load case, the internal pressure profile must be based on a minimum volume of 50 bbl or the minimum kick detection capability of the rig, whichever is greater, and a kick intensity of 2.0 ppg for Class 1, 1.0 ppg of Class 2, and 0.5 ppg for Class 3 and 4 wells.
- Internal: Influx depth of the maximum pore pressure of 0.55 "gas kick gravity" of gas to surface while drilling the next hole section.
- External: Mud weight to the TOC, cement mix water gradient below TOC, and pore pressure in open hole.

**Tubing Leak Near Surface While Producing (Production)**

- Internal: SITP plus a packer fluid gradient to the shoe or top of packer.
- External: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

**Tubing Leak Near Surface While Stimulating (Production)**

- Internal: Surface pressure or pressure-relief system pressure, whichever is lower plus packer fluid gradient.
- External: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

**Injection / Stimulation Down Casing (Production)**

- Internal: Surface pressure plus injection fluid gradient.
- External: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

**b) Collapse Loads****Lost Circulation (Surface / Intermediate)**

- Internal: Lost circulation at the TD of the next hole section, and the fluid level falls to a depth where the hydrostatic of the mud equals pore pressure at the depth of the lost circulation zone.
- External: MW of the drilling mud that was in the hole when the casing was run. Cementing (Surface / Intermediate / Production)

- Internal: Displacement fluid density.
- External: Mud weight from TOC to surface and cement slurry weight from TOC to casing shoe.

**Full Evacuation (Production)**

- Internal: Full void pipe.
- External: MW of drilling mud in the hole when the casing was run.

**c) Tension Loads****Running Casing (Surface / Intermediate / Production)**

- Axial: Buoyant weight of the string plus the lesser of 100,000 lb or the string weight in air.

**Green Cement (Surface / Intermediate / Production)**

- Axial: Buoyant weight of the string plus cement plug bump pressure load.



CONNECTION DATA SHEET

OD: 5.500 in.


Grade: P110 RY

Weight: 20.00 lb/ft

Drift: 4.653 in. (API)

Wall Th.: 0.361 in.

VAM<sup>®</sup> SPRINT-SF

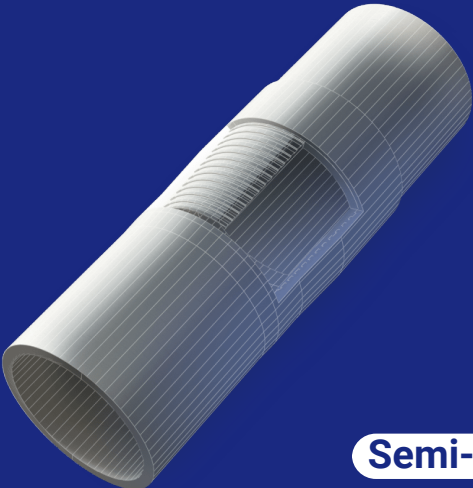

Semi-Flush

Field Torque Values

Make-up Torque (ft-lb)

20,000 MIN

22,500 OPTI

25,000 MAX

Torque with Sealability (ft-lb)

36,000 MTS

Locked Flank Torque (ft-lb)

4,500 MIN

15,750 MAX

(2) MTS: Maximum Torque with Sealability.

PIPE BODY PROPERTIES

|                                   |                  |       |
|-----------------------------------|------------------|-------|
| Nominal OD                        | 5.500            | in.   |
| Nominal ID                        | 4.778            | in.   |
| Nominal Wall Thickness            | 0.361            | in.   |
| Minimum Wall Thickness            | 87.5             | %     |
| Nominal Weight (API)              | 20.00            | lb/ft |
| Plain End Weight                  | 19.83            | lb/ft |
| Drift                             | 4.653            | in.   |
| Grade Type                        | Controlled Yield |       |
| Minimum Yield Strength            | 110              | ksi   |
| Maximum Yield Strength            | 125              | ksi   |
| Minimum Ultimate Tensile Strength | 140              | ksi   |
| Pipe Body Yield Strength          | 641              | klb   |
| Internal Yield Pressure           | 12,640           | psi   |
| Collapse Pressure                 | 11,110           | psi   |

CONNECTION PROPERTIES

|                              |                       |             |
|------------------------------|-----------------------|-------------|
| Connection Type              | Semi-Premium Integral |             |
| Nominal Connection OD        | 5.783                 | in.         |
| Nominal Connection ID        | 4.718                 | in.         |
| Make-up Loss                 | 5.965                 | in.         |
| Tension Efficiency           | 90                    | % Pipe Body |
| Compression Efficiency       | 90                    | % Pipe Body |
| Internal Pressure Efficiency | 100                   | % Pipe Body |
| External Pressure Efficiency | 100                   | % Pipe Body |

JOINT PERFORMANCES

|                                      |        |          |
|--------------------------------------|--------|----------|
| Tension Strength                     | 577    | klb      |
| Compression Strength                 | 577    | klb      |
| Internal Pressure Resistance         | 12,640 | psi      |
| External Pressure Resistance         | 11,110 | psi      |
| Maximum Bending, Structural          | 78     | °/100 ft |
| Maximum Bending, with Sealability(1) | 30     | °/100 ft |

(1) Sealability rating demonstrated as per API RP 5C5 / ISO 13679



BOOST YOUR EFFICIENCY, REDUCE COSTS  
AND ENSURE 100% WELL INTEGRITY WITH

VAM<sup>®</sup> FIELD SERVICE

Scan the QR code  
to contact us



The information available on this Site ("Information") is offered for general information. It is supposed to be correct at the time of publishing on the Site but is not intended to constitute professional advice and is provided 'as is'. Vallourec does not guarantee the completeness and accuracy of this Information. Under no circumstances will Vallourec be liable for damage, liability of any kind, or any loss or injury that may result from the credibility given to this Information or its use. The Information may be amended, corrected, or updated at any time by Vallourec without warning. Vallourec's products and services are subject to Vallourec's The Information may be amended, corrected, and/or supplemented at any time by Vallourec without warning, standard terms and conditions or otherwise to the terms resulting from the respective contracts of sale or services.

Released to Imaging: 9/2/2025 2:07:36 PM



Sante Fe Main Office  
Phone: (505) 476-3441

General Information  
Phone: (505) 629-6116

Online Phone Directory  
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico  
Energy, Minerals and Natural Resources  
Oil Conservation Division  
1220 S. St Francis Dr.  
Santa Fe, NM 87505

ACKNOWLEDGMENTS  
  
Action 489603

ACKNOWLEDGMENTS

|                                                                        |                                                                           |
|------------------------------------------------------------------------|---------------------------------------------------------------------------|
| Operator:<br><br>OXY USA INC<br>P.O. Box 4294<br>Houston, TX 772104294 | OGRID:<br><br>16696                                                       |
|                                                                        | Action Number:<br><br>489603                                              |
|                                                                        | Action Type:<br><br>[C-101] BLM - Federal/Indian Land Lease (Form 3160-3) |

ACKNOWLEDGMENTS

|                          |                                                                                                                            |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------|
| <input type="checkbox"/> | I hereby certify that no additives containing PFAS chemicals will be added to the completion or recompletion of this well. |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------|

Sante Fe Main Office  
Phone: (505) 476-3441

General Information  
Phone: (505) 629-6116

Online Phone Directory  
<https://www.emnrd.nm.gov/oecd/contact-us>

**State of New Mexico**  
**Energy, Minerals and Natural Resources**  
**Oil Conservation Division**  
**1220 S. St Francis Dr.**  
**Santa Fe, NM 87505**

CONDITIONS

Action 489603

**CONDITIONS**

|                                                                    |                                                                       |
|--------------------------------------------------------------------|-----------------------------------------------------------------------|
| Operator:<br>OXY USA INC<br>P.O. Box 4294<br>Houston, TX 772104294 | OGRID:<br>16696                                                       |
|                                                                    | Action Number:<br>489603                                              |
|                                                                    | Action Type:<br>[C-101] BLM - Federal/Indian Land Lease (Form 3160-3) |

**CONDITIONS**

| Created By   | Condition                                                                                                                                                                                                                                                             | Condition Date |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| lesliereeves | Cement is required to circulate on both surface and intermediate1 strings of casing.                                                                                                                                                                                  | 7/29/2025      |
| lesliereeves | If cement does not circulate on any string, a Cement Bond Log (CBL) is required for that string of casing.                                                                                                                                                            | 7/29/2025      |
| ward.rikala  | Notify the OCD 24 hours prior to casing & cement.                                                                                                                                                                                                                     | 9/2/2025       |
| ward.rikala  | File As Drilled C-102 and a directional Survey with C-104 completion packet.                                                                                                                                                                                          | 9/2/2025       |
| ward.rikala  | Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string. | 9/2/2025       |
| ward.rikala  | Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system.                  | 9/2/2025       |
| ward.rikala  | No additives containing PFAS chemicals will be added to the drilling fluids or completion fluids used during drilling, completions, or recompletions operations.                                                                                                      | 9/2/2025       |