

777

1R- 30-045 -26426
9- 30-045 -21567
10- 30-045 -09209

E

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit NE Sec. 27 Twp 30 Rng 10

Name of Well/Wells or Pipeline Serviced RIDDLE B #9, #10, #1R

cps 1033w

Elevation 6230' Completion Date 6/66 Total Depth 160' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. N/A

Depths gas encountered: N/A


Type & amount of coke breeze used: 2400 lbs.

Depths anodes placed: 155', 145', 140', 130', 125', 115'

Depths vent pipes placed: N/A

Vent pipe perforations: N/a

Remarks: gb #1

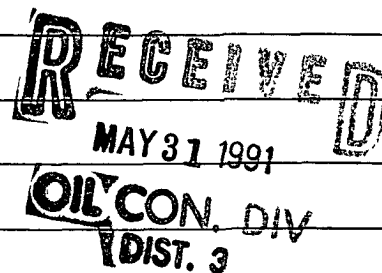

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

DATA SHEET NO.

1033 W

DEPTH, FT.	DRILLER'S LOG	DRILL PIPE TO STRUCTURE			EXPLORING ANODE TO STRUCTURE			DEPTH, TOP OF ANODES
		E	I	R	E	I	R	
	SAND				12.0			
10						0.1		
20						0.2		
30						1.4		
40						3.2		
50						1.4		
60	YELLOW CLAY w/ss					1.2		
70						1.3		
80		12.0	13.0			2.2		
90						3.4		
100	BLUE CLAY		15.0			4.1		
110						3.0		
120	BLUE SANDY CLAY		17.0			4.3		115
130						4.4		125
140			23.0			3.2		130
150	GRAY					4.0		140
160		12.0	27.0		12.0	3.4		145
170								155
180								
190								
200								
210								
220								
230								
240								
250								
260								
270								
280								
290								
300								

GROUNDING RESISTANCE: (1) VOLTS 9 + AMPS 9 = 1.0 OHMS

(2) VIBROGROUND 0.9 OHMS



cathodic protection service

HOUSTON TEXAS