

E

770

1-30-045-21586

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SE Sec. 36 Twp 26 Rng 9

Name of Well/Wells or Pipeline Serviced DOW MARKS COM #1

cps 1089w

Elevation 6327' Completion Date 6/1/77 Total Depth 300' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 80'

Depths gas encountered: N/A

Type & amount of coke breeze used: 43 SACKS

Depths anodes placed: 260', 250', 240', 230', 220', 210', 195', 185', 150', 115'

Depths vent pipes placed: 280'

Vent pipe perforations: 200'

Remarks: 1 gb #1

RECEIVED
MAY 31 1991
OIL CON. DIV
DIST. 2

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Handwritten: 9 He

Drilling Log (Attach Hereto) ☐

Completion Date **6-1-77**

Well Name Dow MARKS Com. #1		Location SE 36-26-9		CPS No. 1089W																																																																																					
Type & Size Bit Used 6 3/4				Work Order No. 55992.19-50.2.																																																																																					
Anode Hole Depth 300 X 280	Total Drilling Rig Time	Total Lbs. C.C. Used 3843	Lost Circulation Mat'l Used	No. Sacks Mud Used																																																																																					
<table border="1"> <tr> <td colspan="2">Anode Depth</td> <td colspan="2"></td> <td colspan="2"></td> </tr> <tr> <td>#1 260</td> <td>#2 250</td> <td>#3 240</td> <td>#4 230</td> <td>#5 220</td> <td>#6 210</td> </tr> <tr> <td colspan="2">Anode Output (Amps)</td> <td colspan="2"></td> <td colspan="2"></td> </tr> <tr> <td>#1 3.8</td> <td>#2 4.7</td> <td>#3 5.1</td> <td>#4 5.0</td> <td>#5 5.3</td> <td>#6 4.7</td> </tr> <tr> <td colspan="2">Anode Depth</td> <td colspan="2"></td> <td colspan="2"></td> </tr> <tr> <td>#7 195</td> <td>#8 185</td> <td>#9 150</td> <td>#10 115</td> <td colspan="2"></td> </tr> <tr> <td colspan="2">Anode Output (Amps)</td> <td colspan="2"></td> <td colspan="2"></td> </tr> <tr> <td>#7 4.8</td> <td>#8 4.8</td> <td>#9 3.5</td> <td>#10 3.8</td> <td colspan="2"></td> </tr> <tr> <td colspan="2">Anode Depth</td> <td colspan="2"></td> <td colspan="2"></td> </tr> <tr> <td>#11</td> <td>#12</td> <td>#13</td> <td>#14</td> <td>#15</td> <td>#16</td> </tr> <tr> <td colspan="2">Anode Output (Amps)</td> <td colspan="2"></td> <td colspan="2"></td> </tr> <tr> <td>#11</td> <td>#12</td> <td>#13</td> <td>#14</td> <td>#15</td> <td>#16</td> </tr> <tr> <td colspan="2">Total Circuit Resistance</td> <td colspan="2"></td> <td colspan="2">No. 8 C.P. Cable Used</td> </tr> <tr> <td>Volts 11.4</td> <td>Amps 20.6</td> <td>Ohms 0.55</td> <td colspan="2"></td> <td>No. 2 C.P. Cable Used</td> </tr> </table>						Anode Depth						#1 260	#2 250	#3 240	#4 230	#5 220	#6 210	Anode Output (Amps)						#1 3.8	#2 4.7	#3 5.1	#4 5.0	#5 5.3	#6 4.7	Anode Depth						#7 195	#8 185	#9 150	#10 115			Anode Output (Amps)						#7 4.8	#8 4.8	#9 3.5	#10 3.8			Anode Depth						#11	#12	#13	#14	#15	#16	Anode Output (Amps)						#11	#12	#13	#14	#15	#16	Total Circuit Resistance				No. 8 C.P. Cable Used		Volts 11.4	Amps 20.6	Ohms 0.55			No. 2 C.P. Cable Used
Anode Depth																																																																																									
#1 260	#2 250	#3 240	#4 230	#5 220	#6 210																																																																																				
Anode Output (Amps)																																																																																									
#1 3.8	#2 4.7	#3 5.1	#4 5.0	#5 5.3	#6 4.7																																																																																				
Anode Depth																																																																																									
#7 195	#8 185	#9 150	#10 115																																																																																						
Anode Output (Amps)																																																																																									
#7 4.8	#8 4.8	#9 3.5	#10 3.8																																																																																						
Anode Depth																																																																																									
#11	#12	#13	#14	#15	#16																																																																																				
Anode Output (Amps)																																																																																									
#11	#12	#13	#14	#15	#16																																																																																				
Total Circuit Resistance				No. 8 C.P. Cable Used																																																																																					
Volts 11.4	Amps 20.6	Ohms 0.55			No. 2 C.P. Cable Used																																																																																				


Remarks: **STATIC - 79, 600 WEST. DRILL TO 80 WITH AIR BLEW WATER OUT NEXT A.M. - Vent To 280 - PERFORATED 200' SLURRY ~~38~~ COKE**

All Construction Completed

Handwritten Signature: Darrells

(Signature)

GROUND BED LAYOUT SKETCH

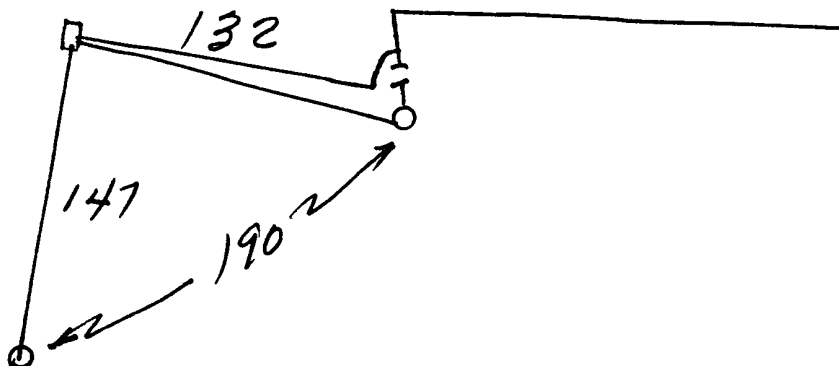

DISTRIBUTION:

WHITE - Division Corrosion Office
YELLOW - Area Corrosion Office
PINK - Originator File

Handwritten: 6327

6-1-77 Dow Marks Com #1 1089 W

MW	gas/mol
16	C ₂ 6.4
30	C ₃ 10.12
44	C ₄ 16.62
58	C ₅ 23.12
72	NC ₆ 29.62
86	IC ₇ 36.12
100	IC ₈ 42.62
114	IC ₉ 49.12
128	IC ₁₀ 55.62
142	IC ₁₁ 62.12

35	7	215	2.5	Drill, 80' - Blew
40	1.1	20	2.7	Water out Next AM,
	1.1		2.4	
50	1.3	30	2.5	
	.9		2.6	Vento 280
60	1.0	40	2.4	Perf 200
	1.3		2.4	
70	1.3	50	2.5	
	1.6		2.4	43
80	1.7	60	2.4	58 Lake
	1.6		2.4	
90	1.7	70	2.1	
	1.8		2.1	
100	1.4	80	T.D. 280	1 260 2.7 38
	1.1			2 250 2.8 47
10	1.5	90		3 240 3.0 51
	2.0			4 230 2.9 50
20	1.7	300		5 220 3.2 53
	.9			6 210 2.8 47
30	.6			7 195 2.9 48
	.5			8 185 2.7 48
40	1.1			9 150 2.1 35
	1.6			10 115 2.3 38
50	2.1			
	1.4			
60	.9			
	.5			
70	.5			
	.7			
80	2.1			
	2.3			
90	2.5			
	2.1			
100	1.5			
	2.3			
110	2.4			

MW	MSC	gas/mol
44	CO ₂	6.38
34	H ₂ S	5.17
28	N ₂	4.16
2	H ₂	3.38

11.4 W 20.6A = 0.55

DAILY DRILLING REPORT

[illegible]

SIGNED: Toolpusher

____ Company Supervisor