Sundry Print Repor

U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

FFD

Well Name: SALADO DRAW 18 26 33 Well Location: T26S / R33E / SEC 19 /

NENW / 32.03559 / -103.612917

County or Parish/State: LEA /

Well Number: 4H Type of Well: OIL WELL Allottee or Tribe Name:

Lease Number: NMNM27506 **Unit or CA Name: Unit or CA Number:**

US Well Number: 3002542279 Operator: CHEVRON USA

INCORPORATED

Subsequent Report

Sundry ID: 2879076

Type of Action: Temporary Abandonment Type of Submission: Subsequent Report

Date Sundry Submitted: 10/29/2025 Time Sundry Submitted: 12:51

Date Operation Actually Began: 10/08/2024

Actual Procedure: Chevron USA Inc has this wellbore temporarily abandoned for the Salado Draw 18 26 33 Fed 4H (API: 30-025-42279) and is requesting an additional 12-month temporary abandonment due to water influx and to maintain wellbore integrity while evaluating use of wellbores for shallow injection monitoring, CLGC, or water shutoff before proceeding with P&A of wellbore. Most recent well test was on 6/14/23: 0 - BOPD, 0 - MCF (197 MCF lift gas and 197 MCF), 81 - BWPD Please see TA procedure below along with attachments. Procedure 10/8/2024: 1 Rig up pulling unit and prepare to pull out of hole with tbg. 2 Rig up slickline and RIH with GR to ~8824'. 3 RIH w/CIBP set @ 8670' w/slickline & top with 35' of class H cement with dump bailer 4 Release slickline unit and pressure test plug and cement to 500 psi test good. 5 Re-run 274 joints 2-3/8" tbg end of tbg @ 8,590'. 6 Rig down and release slickline and pulling unit. 7 Schedule regulatory test of CIBP.

SR Attachments

Actual Procedure

Salado Draw 18 26 33 FED 4H SR TA Ext 20251029124940.pdf

SR Conditions of Approval

Specialist Review

TA_COA_20251031151539.pdf

Page 1 of 2

eived by OCD: 10/31/2025 4:03:22 PM Well Name: SALADO DRAW 18 26 33

FED

Well Location: T26S / R33E / SEC 19 / NENW / 32.03559 / -103.612917

County or Parish/State: LEA/ 2 of

Well Number: 4H

Type of Well: OIL WELL

Allottee or Tribe Name:

Lease Number: NMNM27506

Unit or CA Name:

Unit or CA Number:

US Well Number: 3002542279

Operator: CHEVRON USA

INCORPORATED

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: TONY VALLEJO Signed on: OCT 29, 2025 12:50 PM

Name: CHEVRON USA INCORPORATED

Title: Environmental Regulatory Specialist NM

Street Address: 6301 DEAUVILLE BLVD

City: MIDLAND State: TX

Phone: (432) 450-1413

Email address: JVALLEJO@CHEVRON.COM

Field

Representative Name:

Street Address:

City:

State:

Zip:

Phone:

Email address:

BLM Point of Contact

BLM POC Name: JONATHON W SHEPARD

BLM POC Title: Petroleum Engineer

BLM POC Phone: 5752345972

Signature: Jonathon Shepard

BLM POC Email Address: jshepard@blm.gov

Disposition: Approved

Disposition Date: 10/31/2025

Page 2 of 2

Form 3160-5

UNITED STATES

FORM APPROVED
OMB No. 1004-0220
Expires: October 31, 2027

(October 2024)	DEF	ARTMENT OF THE I	NTERIOR	Expires: October 31, 2027		
					5. Lease Serial No.	
	ot use this f	OTICES AND REPO Form for proposals to TUSE Form 3160-3 (A	o drill or to	re-enter an	6. If Indian, Allottee or Tribe	Name
		TRIPLICATE - Other instru		7. If Unit of CA/Agreement, Name and/or No.		
1. Type of Well	002	7111 2107112 Olinor mone	- Circle on page	<u>-</u>		
Oil Wel	ll Gas V	Vell Other			8. Well Name and No.	
2. Name of Operator					9. API Well No.	
3a. Address			3b. Phone No. (i	nclude area code	2) 10. Field and Pool or Explora	tory Area
4. Location of Well (Footage, Sec., T.,R.,M., or Survey Description)					11. Country or Parish, State	
	12. CHE	CK THE APPROPRIATE B	OX(ES) TO INDI	CATE NATURE	OF NOTICE, REPORT OR OT	HER DATA
TYPE OF SUBN	MISSION			TYI	PE OF ACTION	
Notice of Intent	;	Acidize Alter Casing	Deeper Hydrau	n Ilic Fracturing	Production (Start/Resume) Reclamation	Water Shut-Off Well Integrity
Subsequent Rep	oort	Casing Repair	=	onstruction	Recomplete	Other
Final Abandonn	nent Notice	Change Plans Convert to Injection	Plug ar	nd Abandon	Temporarily Abandon Water Disposal	
14. I hereby certify that	the foregoing is	true and correct Name (Pri	inted/Typed)			
14. I hereby certify that the foregoing is true and correct. Name (<i>Printed/Typed</i>)				Title		
Signature Date				Date		
		THE SPACE	FOR FEDE	RAL OR ST	ATE OFICE USE	
Approved by						
				Title		Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.						

Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c)and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

(Form 3160-5, page 2)

Additional Information

Additional Remarks

- 3 RIH w/CIBP set @ 8670' w/slickline & top with 35' of class H cement with dump bailer
- 4 Release slickline unit and pressure test plug and cement to 500 psi test good.
- 5 Re-run 274 joints 2-3/8" tbg end of tbg @ 8,590'.
- 6 Rig down and release slickline and pulling unit.
- 7 Schedule regulatory test of CIBP.

Location of Well

 $0. \ SHL: \ NENW \ / \ 200 \ FNL \ / \ 1993 \ FWL \ / \ TWSP: \ 26S \ / \ RANGE: \ 33E \ / \ SECTION: \ 19 \ / \ LAT: \ 32.03559 \ / \ LONG: \ -103.612917 \ (\ TVD: \ 0 \ feet \) \ MD: \ 0 \ feet \)$

 $PPP: NENW \ / \ 200 \ FNL \ / \ 1993 \ FWL \ / \ TWSP: \ 26S \ / \ RANGE: \ 33E \ / \ SECTION: \ 19 \ / \ LAT: \ 0.0 \ / \ LONG: \ 0.0 \ (\ TVD: \ 0 \ feet, \ MD: \ 0 \ feet \)$

BHL: NENW / 280 FNL / 2275 FWL / TWSP: 26S / RANGE: 33E / SECTION: 18 / LAT: 0.0 / LONG: 0.0 (TVD: 0 feet, MD: 0 feet)

BUREAU OF LAND MANAGEMENT

Carlsbad Field Office 620 East Greene Street Carlsbad, New Mexico 88220 575-234-5972

Conditions of Approval for Temporary Abandonment of Wells

Definition: A temporarily abandoned well is a completion that is not capable of production in paying quantities, but which may have future value. Pursuant to 43 CFR 3162.3-4 (c), no well may be temporarily abandoned for more than 30 days without the prior approval of the authorized officer.

- 1. TA status will be effective for a period of up to one year from the date of sundry approval and can be renewed annually thereafter per IM NM-2016-017.
- 2. A bridge plug (CIBP) must be installed 50 to 100 feet above any open perforations/open hole/kick off point. The CIBP must be capped with either a minimum of 25 sacks of cement if placed with tubing or 35 feet of cement if placed with a bailer. The top of the cement must be verified by tagging.
- 3. The wellbore must be filled with corrosion inhibited fluid and pressure tested to 500 psi. The casing shall be capable of holding this pressure for at least 30 minutes. If the well does not pass the casing integrity test, then the operator shall, within 30 days, submit a procedure to either repair the casing or to plug and abandon the well.
- 4. Contact the appropriate BLM office at least 24 hours prior to the scheduled Casing Integrity Test. For wells in Eddy County, 575-361-2822; Lea County 575-393-3612.
- 5. All downhole production/injection equipment (tubing, rods, etc.) shall be removed from the casing if it is not isolated by a packer.
- 6. A bradenhead test must be conducted. If the test indicates a problem, a remedial plan and time frame for remediation shall be submitted within ninety (90) days of the test.
- 7. Submit a subsequent Sundry Notice (Form 3160-5) with the following information:
 - a. A well bore diagram with all perforations, CIBP's, and tops of cement on CIBP's.
 - b. A description of the temporary abandonment procedure.
 - c. A clear copy or the original of the pressure test chart.

Chevron USA Inc has this wellbore temporarily abandoned for the Salado Draw 18 26 33 Fed 4H (API: 30-025-42279) and is requesting an additional 12-month temporary abandonment due to water influx and to maintain wellbore integrity while evaluating use of wellbores for shallow injection monitoring, CLGC, or water shutoff before proceeding with P&A of wellbore.

Most recent well test was on 6/14/23:

0 - BOPD, 0 - MCF (197 MCF lift gas and 197 MCF), 81 - BWPD

Please see TA procedure below along with attachments.

Procedure 10/8/2024:

- 1 Rig up pulling unit and prepare to pull out of hole with tbg.
- 2 Rig up slickline and RIH with GR to ~8824'.
- 3 RIH w/CIBP set @ 8670' w/slickline & top with 35' of class H cement with dump bailer
- 4 Release slickline unit and pressure test plug and cement to 500 psi test good.
- 5 Re-run 274 joints 2-3/8" tbg end of tbg @ 8,590'.
- 6 Rig down and release slickline and pulling unit.
- 7 Schedule regulatory test of CIBP.

BUREAU OF LAND MANAGEMENT

Carlsbad Field Office 620 East Greene Street Carlsbad, New Mexico 88220 575-234-5972

Conditions of Approval for Temporary Abandonment of Wells

Definition: A temporarily abandoned well is a completion that is not capable of production in paying quantities, but which may have future value. Pursuant to 43 CFR 3162.3-4 (c), no well may be temporarily abandoned for more than 30 days without the prior approval of the authorized officer.


- 1. TA status will be effective for a period of up to one year from the date of sundry approval and can be renewed annually thereafter per IM NM-2016-017.
- 2. A bridge plug (CIBP) must be installed 50 to 100 feet above any open perforations/open hole/kick off point. The CIBP must be capped with either a minimum of 25 sacks of cement if placed with tubing or 35 feet of cement if placed with a bailer. The top of the cement must be verified by tagging.
- 3. The wellbore must be filled with corrosion inhibited fluid and pressure tested to 500 psi. The casing shall be capable of holding this pressure for at least 30 minutes. If the well does not pass the casing integrity test, then the operator shall, within 30 days, submit a procedure to either repair the casing or to plug and abandon the well.
- 4. Contact the appropriate BLM office at least 24 hours prior to the scheduled Casing Integrity Test. For wells in Eddy County, 575-361-2822; Lea County 575-393-3612.
- 5. All downhole production/injection equipment (tubing, rods, etc.) shall be removed from the casing if it is not isolated by a packer.
- 6. A bradenhead test must be conducted. If the test indicates a problem, a remedial plan and time frame for remediation shall be submitted within ninety (90) days of the test.
- 7. Submit a subsequent Sundry Notice (Form 3160-5) with the following information:
 - a. A well bore diagram with all perforations, CIBP's, and tops of cement on CIBP's.
 - b. A description of the temporary abandonment procedure.
 - c. A clear copy or the original of the pressure test chart.

Received by OCD: 10/31/2025 4:03:22 PM

SALADO DRAW 18 26 33 FEDERAL 4H FINAL WBD


Page 9 of

API#: 30-025-42279 Spud 11/21/2014 Chevno: PD1918 Complete 9/9/2015 Field: Jennings Elevation 3189 KΒ 33 Lea County, Nm County

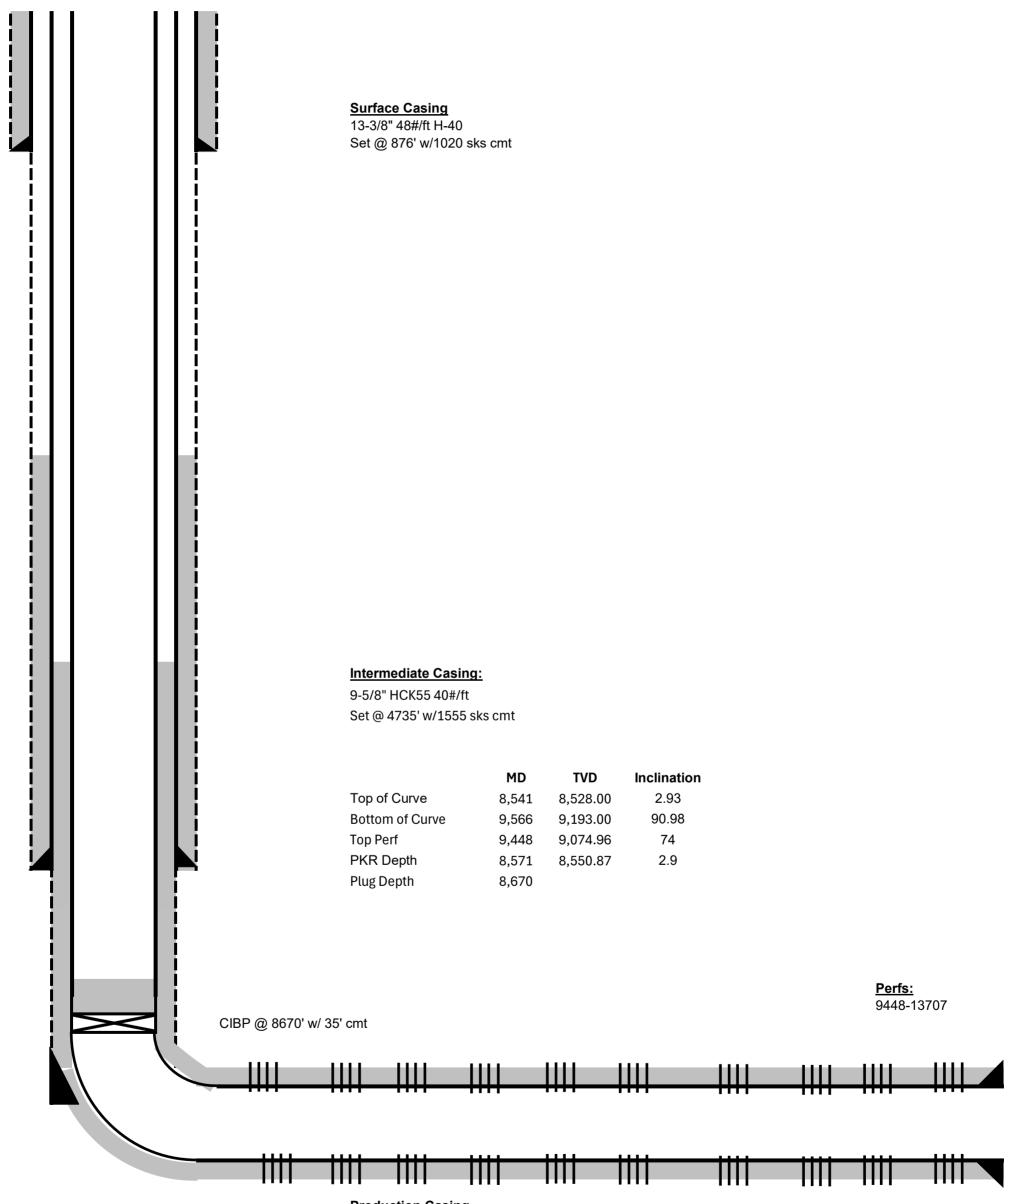

Production Casing
5-1/2" 17#/ft P-110

Set @ 13,900' w/1595 sks cmt

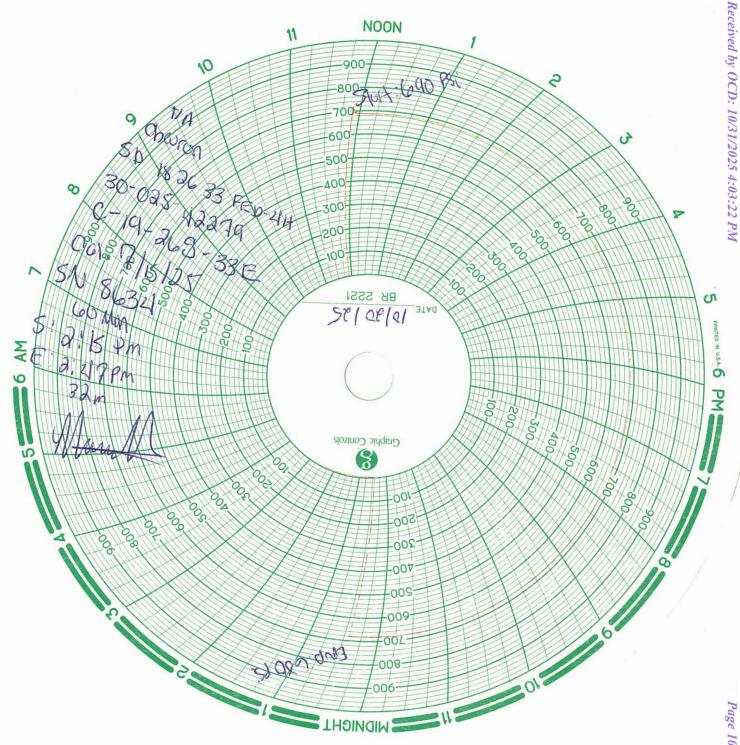

Sante Fe Main Office Phone: (505) 476-3441

General Information Phone: (505) 629-6116

Online Phone Directory https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

CONDITIONS

Action 522237

CONDITIONS

Operator:	OGRID:
CHEVRON U S A INC	4323
6301 Deauville Blvd	Action Number:
Midland, TX 79706	522237
	Action Type:
	[C-103] Sub. Temporary Abandonment (C-103U)

CONDITIONS

Cr	eated By		Condition Date
g	cordero	None	12/5/2025