

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 Copies to OCD Aztec Office)

SS-3

30-045-22891

Operator: BLACKWOOD & NICHOLS CO. Location: Unit E, Sec. 24, Twp 30N, Rng 8W.

Name of Well/Wells or Pipeline Serviced NEBU 103A

Elevation 6320' Completion Date 7-14-93 Total Depth 305' Land Type* Surface: F Mineral: SF-078615

Casing, Sizes, Types & Depths 8-5/8" SCH 40 P.V.C. - 100'

If Casing is cemented, show amounts & types used 20 sks Portland Zia I-II

If Cement or Bentonite Plugs have been placed, show depths & amounts used N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. Damp at 170', no sample taken

Depths gas encountered: N/A


Type & amount of coke breeze used: Asbury & Lorasco - 3,800#

Depths anodes placed: 177' to 282'

Depths vent pipes placed: TD to 4' above ground level

Vent pipe perforations: 305' to 105'

Remarks: Groundbed located 300° NW of North & 200' from wellhead

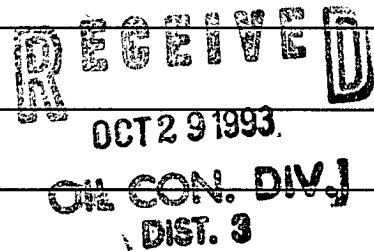

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

Signed by: James K. Allen

Title: Operations Engineer Date: 10/14/93

BLACKWOOD & NICHOLS
CATHODIC GROUND BED
DRILLERS REPORT

CP# 53 WELL# NER 103A

S 24 T 32N R 8W

DEPTH	STRATA	NOTES	DEPTH	STRATA	NOTES
10'	↑ SANDSTONE ↓				
20'					
30'					
40'					
50'					
60'					
70'					
80'					
90'					
100					

DRILLER Gene Montoya

INSPECTOR Joe McIntosh

