

1502

E

30-045-24 T63

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS.
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit L Sec. 29 Twp 31 Rng 12

Name of Well/Wells or Pipeline Serviced TALIAFERRO #7
cps 6298w

Elevation N/A Completion Date 12/16/86 Total Depth 320' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 100' & 170'

Depths gas encountered: N/A

Type & amount of coke breeze used: 1500 lbs.

Depths anodes placed: 300', 290', 280', 270', 260', 250', 240', 230', 220', 200'

Depths vent pipes placed: 320'

Vent pipe perforations: 150'

Remarks: gb #1

RECEIVED
MAY 31 1987
OIL CON. DIV.
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

BURGE CORROSION SYSTEM, INC.

P.O. BOX 1359 - PHONE 334-6141
AZTEC, NEW MEXICO 87410

Drilling Log (Attach Hereto). ☒

6298W

Completion Date December 16, 1986


Well Name Taliaferro #7		Location Union Texas Petroleum		L 29-31N-12W	
Type & Size Bit Used 6 & 3/4"				Work Order No.	
Anode Hole Depth 320'	Total Drilling Rig Time 7 Hrs.	Total Lbs. Coke Used 1500#	Lost Circulation Mat'l Used	No. Sacks Mud Used	
Anode Depth					
#1 300	#2 290	#3 280	#4 270	#5 260	#6 250
#7 240	#8 230	#9 220	#10 200		
Anode Output (Amps)					
#1 5.2	#2 3.7	#3 3.6	#4 3.5	#5 4.5	#6 3.7
#7 3.6	#8 4.4	#9 3.9	#10 3.6		
Anode Depth					
#11	#12	#13	#14	#15	#16
#17	#18	#19	#20		
Anode Output (Amps)					
#11	#12	#13	#14	#15	#16
#17	#18	#19	#20		
Total Circuit Resistance				No. 8 C.P. Cable Used	No. 2 C.P. Cable Used
Volts 11.4	Amps 21.2	Ohms 0.52		2700'	

Remarks: Water was standing at 165' when the hole was logged. Used 320' of 1" vent pipe with 150' of perforations.

All Construction Completed

Cody Munkiewicz
(Signature)

GROUND BED LAYOUT SKETCH

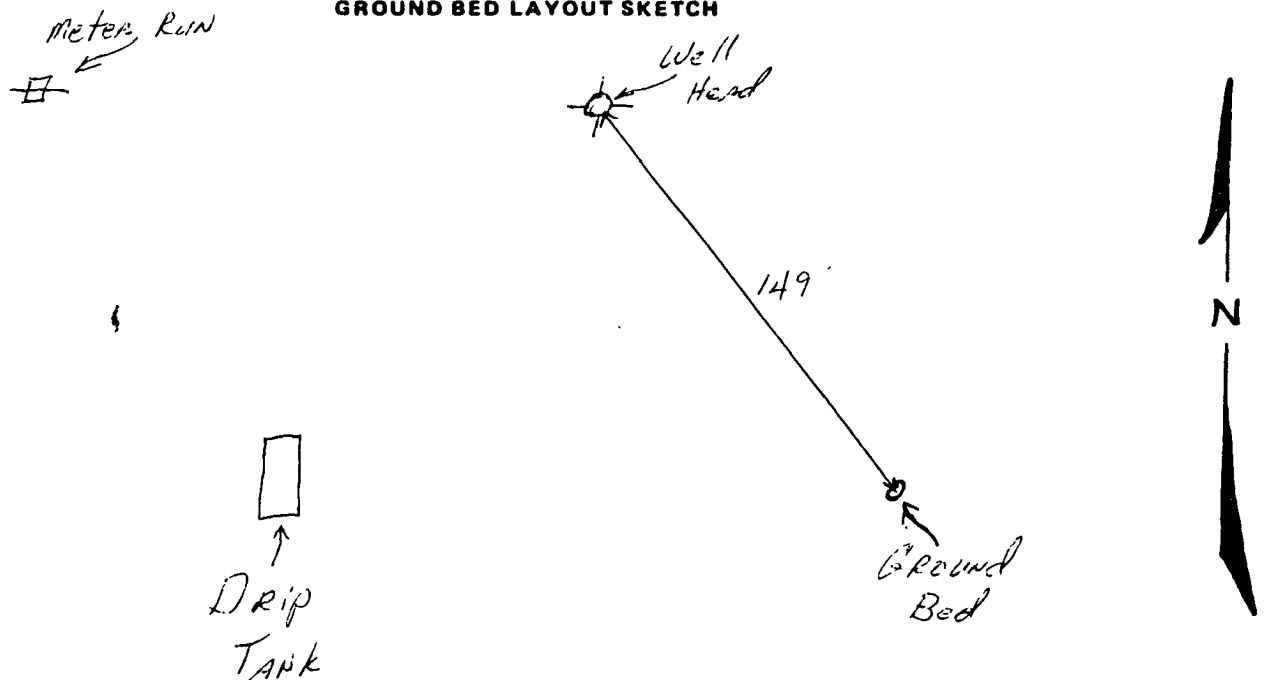

WATER AT	FEET	HOLE MADE:
100' and 170'		320'

DESCRIPTION OF FORMATION

[illegible]

REMARKS: Hole was making approx. 35 gallons of water per minute.

Dritler

Cody Munkres

Tool Dresser