

91- 30-039-18242
423- 30-039-24459

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit NE Sec. 28 Twp 30 Rng 7

Name of Well/Wells or Pipeline Serviced SAN JUAN 30-6 UNIT #91, #423
cps 281w

Elevation 6817 Completion Date 8/20/74 Total Depth 440' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 250'

RECEIVED

MAY 31 1991

Depths gas encountered: N/A

OIL CON. DIV
DIST. 3

Type & amount of coke breeze used: 8000 lbs.

Depths anodes placed: 360', 350', 335', 325', 315', 305', 285', 276', 265', 255'

Depths vent pipes placed: N/A

Vent pipe perforations: 300'

Remarks: gb #2

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

logged

Drilling Log (Attach Hereto). ☐

Completion Date 8/20/74


Well Name SON JUAN 30-6 #91				Location NE 28-30N-7W				CPS No. 281W											
Type & Size Bit Used 6 3/4"								Work Order No. 40074											
Anode Hole Depth 440		Total Drilling Rig Time		Total Lbs. Coke Used 8,000 EST		Lost Circulation Mat'l Used		No. Sacks Mud Used											
Anode Depth																			
# 1	360	# 2	350	# 3	335	# 4	315	# 5	315	# 6	305	# 7	285	# 8	275	# 9	265	# 10	255
Anode Output (Amps)																			
# 1	4.0	# 2	4.0	# 3	3.4	# 4	3.7	# 5	4.5	# 6	3.7	# 7	3.4	# 8	3.5	# 9	3.5	# 10	4.5
Anode Depth																			
# 11		# 12		# 13		# 14		# 15		# 16		# 17		# 18		# 19		# 20	
Anode Output (Amps)																			
# 11		# 12		# 13		# 14		# 15		# 16		# 17		# 18		# 19		# 20	
Total Circuit Resistance				No. 8 C.P. Cable Used				No. 2 C.P. Cable Used											
Volts 11.4		Amps 16.0		Ohms 0.71		75'													

Remarks: Driller said water @ 250' water standing
in hole @ 425' after 1 hr vent hose
perforated 300' pumped 2 loads water
to above water zone completed by slurry

All Construction Completed

Edward R. Paulk
(Signature)

GROUND BED LAYOUT SKETCH

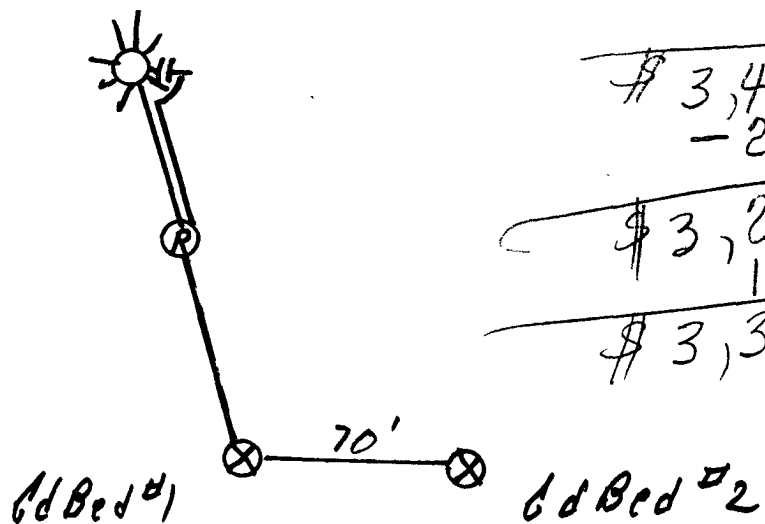

\$3,409.00
30.00 CABLE

\$3,439.00
- 230.00 Depth Credit

\$3,209.00
128.36 TAX

\$3,337.36 TOTAL

STORM WATER WELL DRILLING INC.

DIAMOND CORE DRILLING
DIAMOND DRILLING EQUIPMENT
GROUTING
FOUNDATION TESTING
MINING
QUARRYING
SHAFT SINKING
WATER WELL DRILLING

CONTRACTORS
14991 W. 44TH AVENUE
GOLDEN, COLORADO 80401
PHONE (303) 278-9505

GENERAL OFFICE
14991 W. 44TH AVENUE
BAILEY OFFICE
CALL 1-838-4821

Drill 10TK

Date 8-21-74

Owner CPS 281 W

Location
City FARMINGTON State NM County

From	To	Formation	Color	Hardness
0	60	Sandstone	Tan	Med
60	90	Sandy shale	Gray	"
90	130	" "	Brown	"
130	180	" "	Gray	"
180	200	Sandstone	Brown	"
200	210	Sandy shale	Gray	"
210	220	Shale	Blue Gray	"
220	280	Sandy shale	Gray	"
280	300	Shale	Blue Gray	"
300	310	Sandy shale	Gray	"
310	400	Shale	Blue Gray	"
400	420	Sandstone & shale	" "	"
420	440	Shale	" "	"
Inject @ 40				
Water @ 250				

Total Hours _____
Equipment Down Time _____
Hours Drilling 7
Driller Bill
Helper Ray
Helper Fred

C.P.S. Time _____
S.W.W.D.I. Time _____
Total Footage _____
Approval of
C.P.S. Engineer _____

$$0.4 = x$$

2184

00018
04/15/80

[illegible]