

53 - 30-039-07158

85 - 30-039-82359

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SW Sec. 5 Twp 27 Rng 5

Name of Well/Wells or Pipeline Serviced SAN JAUN 27-5 UNIT #53, #85

cps 740w

Elevation 6660' Completion Date 4/5/66 Total Depth 260' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 60' TO 80'

Depths gas encountered: N/A

Type & amount of coke breeze used: 4625 lbs.

Depths anodes placed: 214', 208', 202', 196', 120', 114', 108', 102', 77'

Depths vent pipes placed: 214' OF 3/4" PLASTIC HOSE

Vent pipe perforations: BOTTOM 60' FROM 85' TO 125'

Remarks: gb #1

RECEIVED
MAY 31 1991
OIL CON. DIV.
DIST.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG


Date 4-5-66

Well Name <u>SJU 27-5 #85 & #53</u>			CPS No. <u>740 W1</u>		
Location <u>SW-5-27-5</u>			Work Order No. <u>184-54280-50-20</u>		
Anode Hole Depth <u>260</u>	Total Drilling Rig Time <u>22 1/2 Hrs</u>	Type & Size Bit Used <u>7 7/8 AG 081 = 90</u>	No. Sacks Mud Used <u>0</u>		
No. Sacks Lost Circulation Mat'l Used <u>0</u>	Anode Depth				
	#1 <u>214</u>	#2 <u>208</u>	#3 <u>202</u>	#4 <u>196</u>	#5 <u>120</u>
Total Lbs. Coke Used <u>4625</u>	Anode Output (Volts)				
	#1 <u>2.8</u>	#2 <u>4.0</u>	#3 <u>4.2</u>	#4 <u>4.1</u>	#5 <u>4.9</u>
Total Circuit Resistance			No. Ft. Surface Cable Conduit		
Volts <u>11.2</u>	Amps <u>13.0</u>	Ohms <u>0.86</u>	<u>1521 To Anodes</u>		
Drilling Log (Attach Hereto). ☐			7 <u>108</u>	8 <u>102</u>	9 <u>77</u>
			7 <u>5.9</u>	8 <u>5.6</u>	9 <u>3.4</u>
			10 <u>0</u>	10 <u>0</u>	


Remarks: Static #85 600' E = .70 - #53 - 600' S = .74
3/4" Plastic Hose to No. 1 Anode = 125' - 15 lbs Phosphate to G.
Hose Perforated Bottom 60' & From 85 To 125'
Good All Rectifier 30-20-2 NEG. Ser# 65C 6698

All Construction Completed

Barrel
(Signature)

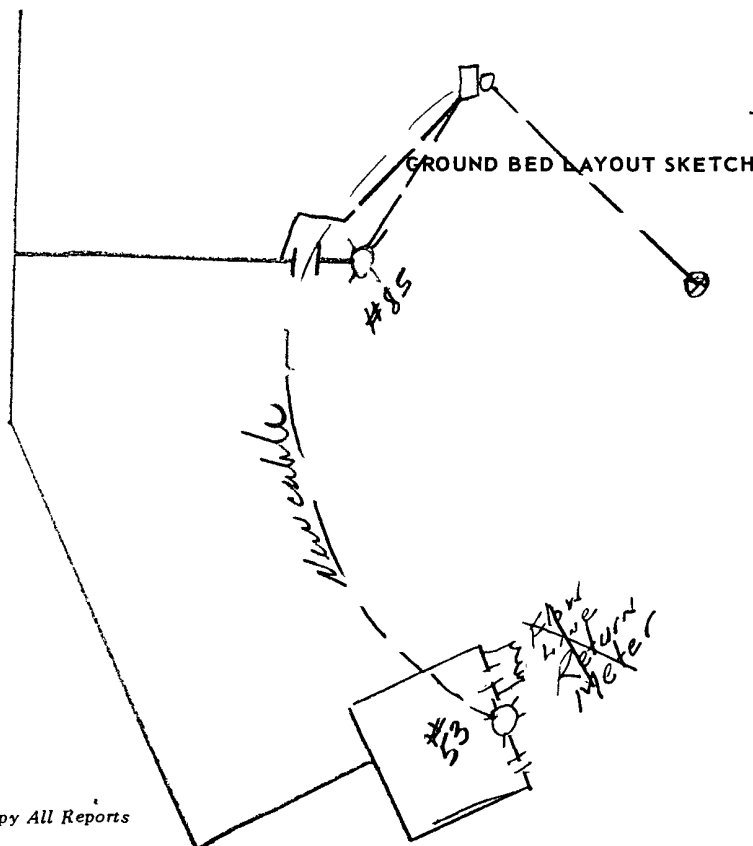

1521'
450'
1471'



[illegible]

SIGNED: Toolpusher

Company Supervisor