Di 16 Di 13 Di 10 District IV 1220 S. St. Francis Dr., Santa Fe, NM&		State of New Mexico ils and Natural Resources Department iservation Division 1220 South St. Francis Dr. 13 Santa Fe, NM 87505	Form C-144 July 21, 2008 For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office. For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.
		Loop System, Below-Grade	
Prop	osed Alternativ	e Method Permit or Closure F	Plan Application
Type of action: Existing BGT	Closure of a pi Modification to Closure plan on	closed-loop system, below-grade tank, o t, closed-loop system, below-grade tank, o an existing permit aly submitted for an existing permitted or	or proposed alternative method
Ū	nk, or proposed altern		
Please be advised that approval of this	request does not relieve t	<i>m C-144) per individual pit, closed-loop syste</i> the operator of liability should operations result in possibility to comply with any other applicable of	em, below-grade tank or alternative request n pollution of surface water, ground water or the overnmental authority's rules, regulations or ordinances.
1.			5380
)	
		nship <u>28N</u> Range <u>10W</u> Co	
		Longitude <u>107.9066</u>	NAD: 🛄 1927 🔀 1983
Surface Owner: 🛛 Federal 🗌 Stat	e 🗌 Private 🗌 Tribal 1	Trust or Indian Allotment	
String-Reinforced	over Cavitation 🔲 P&A e: Thickness	mil 🔲 LLDPE 🗌 HDPE 🗌 PVC 🗋 Of	her Dimensions: L x W x D
3.			
intent)	orilling a new well 🔲 V		ich require prior approval of a permit or notice of
Lined Unlined Liner type: Liner Seams: Welded Factor		mil	Other
4.			
Below-grade tank: Subsection	n I of 19.15.17.11 NMA	AC	
		Produced Water	
Tank Construction material:			
		e sidewalls, liner, 6-inch lift and automatic ov	verflow shut-off
		Other Visible sidewalls, vaulted, autor	
_		DPE PVC Other	
Liner type. Thickness			
5. <u>Alternative Method:</u> Submittal of an exception request i	s required Exceptions	must be submitted to the Santa Fe Environme	ntal Bureau office for consideration of approval.
Saommai of an exception request h	stequired. Exceptions	mast be submitted to the build rie Environme	and salear other for consideration of approval.

Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)

Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church)

Four foot height, four strands of barbed wire evenly spaced between one and four feet

Alternate. Please specify Four foot height, steel mesh field fence (hogwire) with pipe top railing

Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)

Screen Netting Other Expanded metal or solid vaulted top

Monthly inspections (If netting or screening is not physically feasible)

8.

10.

7

Signs: Subsection C of 19.15.17.11 NMAC

12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers

Signed in compliance with 19.15.3.103 NMAC

Administrative Approvals and Exceptions:

Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.

Please check a box if one or more of the following is requested, if not leave blank:

Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau office for consideration of approval.

Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

Siting Criteria (regarding permitting): 19.15.17.10 NMAC

Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acce material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appro office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of a Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to dry above-grade tanks associated with a closed-loop system.	opriate district approval.
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	🗌 Yes 🛛 No
 Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site 	Yes 🛛 No
 Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks) Visual inspection (certification) of the proposed site; Aerial photo; Satellite image 	☐ Yes ⊠ No ☐ NA
 Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to permanent pits) Visual inspection (certification) of the proposed site; Aerial photo; Satellite image 	☐ Yes ☐ No ⊠ NA
 Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site 	Yes 🛛 No
 Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. Written confirmation or verification from the municipality; Written approval obtained from the municipality 	🗌 Yes 🛛 No
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map: Topographic map: Visual inspection (certification) of the proposed site	🗌 Yes 🛛 No

Within the area overlying a subsurface mine.

Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division

Within an unstable area.

-	Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological
	Society; Topographic map

Within a 100-year floodplain.

FEMA map

Yes No

Yes No

🗌 Yes 🖾 No

·····		
Temporary Pits, Emergency Pits, and Below-grade Tar Instructions: Each of the following items must be attach		
attached. Image: Mydrogeologic Report (Below-grade Tanks) - based Image: Hydrogeologic Data (Temporary and Emergency Piteria Compliance Demonstrations - based upper String Criteria Compliance Demonstrations - ba	s) - based upon the requirements of Parag pon the appropriate requirements of 19.1	graph (2) of Subsection B of 19.15.17.9 NMAC
Design Plan - based upon the appropriate requirement		
 Operating and Maintenance Plan - based upon the ap Closure Plan (Please complete Boxes 14 through 18, 		
and 19.15.17.13 NMAC	in applicable) - based upon the appropria	the requirements of Subsection C of 19.15.17.9 HWAC
Previously Approved Design (attach copy of design)	API Number:	or Permit Number
^{12.} Closed-loop Systems Permit Application Attachment C Instructions: Each of the following items must be attach attached.	ed to the application. Please indicate, by	y a check mark in the box, that the documents are
 Geologic and Hydrogeologic Data (only for on-site Siting Criteria Compliance Demonstrations (only fo Design Plan - based upon the appropriate requireme Operating and Maintenance Plan - based upon the appropriate requirement 	r on-site closure) - based upon the approp nts of 19.15.17.11 NMAC	priate requirements of 19.15.17.10 NMAC
Closure Plan (Please complete Boxes 14 through 18 and 19.15.17.13 NMAC	, if applicable) - based upon the appropria	ate requirements of Subsection C of 19.15.17.9 NMAC
Previously Approved Design (attach copy of design)	API Number:	
Previously Approved Operating and Maintenance Plan		(Applies only to closed-loop system that use
above ground steel tanks or haul-off bins and propose to in		
13.		
Permanent Pits Permit Application Checklist: Subsect Instructions: Each of the following items must be attach attached.		y a check mark in the box, that the documents are
Hydrogeologic Report - based upon the requirement	s of Paragraph (1) of Subsection B of 19.	15.17.9 NMAC
Siting Criteria Compliance Demonstrations - based		
Climatological Factors Assessment		
 Certified Engineering Design Plans - based upon the Dike Protection and Structural Integrity Design - ba 	e appropriate requirements of 19.15.17.11 sed upon the appropriate requirements of	19151711 NMAC
Leak Detection Design - based upon the appropriate	requirements of 19.15.17.11 NMAC	
Liner Specifications and Compatibility Assessment	- based upon the appropriate requirement	s of 19.15.17.11 NMAC
Quality Control/Quality Assurance Construction and Operating and Maintenance Plan - based upon the a		MAC
 Operating and Maintenance Plan - based upon the a Freeboard and Overtopping Prevention Plan - based 		
Nuisance or Hazardous Odors, including H ₂ S, Preve		
Emergency Response Plan		
 Oil Field Waste Stream Characterization Monitoring and Inspection Plan 		
Erosion Control Plan		
Closure Plan - based upon the appropriate requirement	ents of Subsection C of 19.15.17.9 NMA	C and 19.15.17.13 NMAC
14. Proposed Closure: 19.15.17.13 NMAC		
Instructions: Please complete the applicable boxes, Boxe		
Type: Drilling Workover Emergency Cavi	tation 🗌 P&A 🗌 Permanent Pit 🛛	Below-grade Tank 🗌 Closed-loop System
Proposed Closure Method: X Waste Excavation and Ren		
Waste Removal (Closed-I	oop systems only) Dnly for temporary pits and closed-loop s	vstems)
	On-site Trench Burial	ystenis,
		Santa Fe Environmental Bureau for consideration)
15. Waste Excavation and Removal Closure Plan Checklist closure plan. Please indicate, by a check mark in the box	, that the documents are attached.	ach of the following items must be attached to the
 Protocols and Procedures - based upon the appropria Confirmation Sampling Plan (if applicable) - based 	ate requirements of 19.15.17.13 NMAC	section E of 19 15 17 13 NMAC
Disposal Facility Name and Permit Number (for liqu	uids, drilling fluids and drill cuttings)	
Soil Backfill and Cover Design Specifications - base	ed upon the appropriate requirements of S	Subsection H of 19.15.17.13 NMAC
Re-vegetation Plan - based upon the appropriate req Site Reclamation Plan - based upon the appropriate		

٩

^{16.} Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: (19.15.17.13.) Instructions: Please indentify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if facilities are required.	
Disposal Facility Name: Disposal Facility Permit Number:	
Disposal Facility Name: Disposal Facility Permit Number:	
Will any of the proposed closed-loop system operations and associated activities occur on or in areas that <i>will not</i> be used for future ser Yes (If yes, please provide the information below) No	vice and operations?
Required for impacted areas which will not be used for future service and operations: Soil Backfill and Cover Design Specifications based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection 1 of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC	с
^{17.} Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable sour provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate dist considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Just demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.	rict office or may be
Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
 Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site 	🗌 Yes 🗌 No
 Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Visual inspection (certification) of the proposed site; Aerial photo; Satellite image 	Yes No
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	🗋 Yes 🗌 No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	Yes No
 Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site 	🗌 Yes 🗌 No
 Within the area overlying a subsurface mine. Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division 	Yes No
 Within an unstable area. Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	🗋 Yes 🗌 No
Within a 100-year floodplain. - FEMA map	Yes No
 18. On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure play a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19. 	

Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC
 Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC

Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC
 Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot be achieved)
 Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC

Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC

Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

<u>1 1 2</u>		
19. Operator Application Certification:		
I hereby certify that the information submitted with this application is to	rue, accurate and complete to	the best of my knowledge and belief.
Name (Print): Kim Champlin		Environmental Representative
Signature: him Champen	Date:	01/21/2009
e-mail address: kim_champlin@xtocnergy.com		
e-mail address: <u>kim_champin(@xtochergy.com</u>	Terephone	
20.		
OCD Approval: Permit Application (including closure plan)	Closure Plan (only) 📋 OCI	D Conditions (see attachment)
OCD Representative Signature:		Approval Date:
Title:	OCD Permit Nun	1ber:
21.		
Closure Report (required within 60 days of closure completion): So		
Instructions: Operators are required to obtain an approved closure pl	an prior to implementing any	closure activities and submitting the closure report.
The closure report is required to be submitted to the division within 60 section of the form until an approved closure plan has been obtained a	l days of the completion of the	e closure activities. Please do not complete this
section of the form until an approved closure plan has been obtained t		
		npletion Date:
22.		
Closure Method: Waste Excavation and Removal On-Site Closure Method	Alternative Closure Method	Waste Removal (Closed-loop systems only)
If different from approved plan, please explain.		
23.		
Closure Report Regarding Waste Removal Closure For Closed-loop		
Instructions: Please indentify the facility or facilities for where the liq	uids, drilling fluids and drill	cuttings were disposed. Use attachment if more than
two facilities were utilized.		
Disposal Facility Name:		Permit Number:
Disposal Facility Name:		Permit Number:
Were the closed-loop system operations and associated activities perform Yes (If yes, please demonstrate compliance to the items below)		t be used for future service and operations?
Required for impacted areas which will not be used for future service an Site Reclamation (Photo Documentation)	nd operations:	
Soil Backfilling and Cover Installation		
Re-vegetation Application Rates and Seeding Technique		
24.		
Closure Report Attachment Checklist: Instructions: Each of the for	llowing items must be attache	d to the closure report. Please indicate, by a check
mark in the box, that the documents are attached. Proof of Closure Notice (surface owner and division)		
Proof of Deed Notice (required for on-site closure)		
Plot Plan (for on-site closures and temporary pits)		
Confirmation Sampling Analytical Results (if applicable)		
Waste Material Sampling Analytical Results (required for on-site	closure)	
 Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation 		
Re-vegetation Application Rates and Seeding Technique		
Site Reclamation (Photo Documentation)		
On-site Closure Location: Latitude	Longitude	NAD: 1927 1983
25.		
Operator Closure Certification:		
I hereby certify that the information and attachments submitted with this belief. I also certify that the closure complies with all applicable closure	s closure report is true, accurate a requirements and conditions	te and complete to the best of my knowledge and
Name (Print):	Title:	
Signature:	Date:	
e-mail address:	Telephone	

NEW MEXICO Gas Wed Flat DIL CONSERVATION COMMISSION Dat TANO Openat Well No. Name of Producing Formation Mary REd Cl. A. Pro: Fulc No. Acres Dedicated to the Well 160 indicate land stress and seew ownership TOWNSHIP - 2 PA SECTION . 2 RANGE JOW ĩЪ, €,: MAY 1 1954 OIL CON. COM. . I hereby certify that the information given above is the stid complete to the best of my knowledge. Name Held Hidk Position Fill Engi Representing Stand NJ CI + G Address FARMINGTON 4 5 (over)

RECEIVE MAR - 91994 OIL CON. DI

A = =			Client:	XTO Energy
Lodestar Services	, inc.	Pit Permit	Project:	Pit Permits
PO Box 4465, Durango,	CO 81302	Siting Criteria	Revised:	19-Jan-09
V			Prepared by:	Brooke Herb
API#:	3	0-045-07126	USPLSS:	T28N,R10W,S28M
Name:	DA	VIDSON JC C #1	Lat/Long:	36.62875, -107.9066
Depth to groundwater:		> 100'	Geologic formation:	Nacimiento Formation
Distance to closest continuously flowing watercourse:	4.96 mile	s S of San Juan River		
Distance to closest	1.11 miles	S of Creighton Canyon		
significant watercourse,		85' N of concrete lined		
lakebed, playa lake, or	-	ditch; 1.76 miles W of		
sinkhole:	Arme	enta Canyon Wash		
			Soil Type:	Entisols
Permanent residence, school, hospital, institution or church within 300'		No		
			Annual Precipitation:	8.71 inches (Bloomfield)
Domestic fresh water vell or spring within 500'		No	Precipitation Notes:	Historical Daily Max Bloomfield 4.19"
Any other fresh water well or spring within 1000'		No		
Within incorporated municipal boundaries		No	Attached Documents:	Groundwater report and Data; FEMA Flood Zone Map
Vithin defined municipal fresh water well field		No		Aerial Photo, Topo Map, Mines Mills and Quarries Ma
			ſ	at status
Wetland within 500'		No	Mining Activity:	None Near
Within unstable area		No	l	
Within 100 year flood plain	No - FE	MA Flood Zone 'X'		
Additional Notes:				

DAVIDSON JC C #1 Below Ground Tank Hydrogeologic Report for Siting Criteria

General Geology and Hydrology

. . .

The San Juan Basin is a typical Rocky Mountain basin with a gently dipping southern flank and a steeply dipping northern flank. Asymmetrically layered Tertiary sandstones and shales, along with Quaternary alluvial deposits, dominate surficial geology (Dane and Bachman, 1965). The proposed pit location will be located in the southern Kutz Canyon region of the San Juan Basin. The predominant geologic formation is the Nacimiento Formation of Tertiary age, which underlies surface soils and is often exposed (Dane and Bachman, 1965). Deposits of Quaternary alluvial and aeolian sands occur prominently near the surface of the area, especially near streams and washes.

Cretaceous and Tertiary sandstones, as well as Quaternary alluvial deposits serve as the primary aquifers in the San Juan basin (Stone et al., 1983). In most of the proposed area, the Nacimiento Formation lies at the surface and grades into the Animas Formation to the west. Thickness of the Nacimiento ranges from 418 to 2232 feet (Stone et al., 1983). Aquifers within the coarser and continuous sandstone bodies of the Nacimiento Formation are between 0 and 1000' deep in this section of the basin (Stone et al., 1983). Groundwater within these aquifers flows toward the San Juan River.

The prominent soil type at the proposed site are entisols and aridisols, which are defined as soils that exhibit little to no any profile development (www.emnrd.state.nm.us). Soils are basically unaltered from their parent rock. Miles of arroyos, washes and intermittent streams exist as part of the drainage network towards the San Juan River. These features often cut into soil and other unconsolidated materials, contributing to sedimentation downstream. The sudden influx of water from storm events easily erodes the soils that cover the area. The sudden influx of water from storm events easily erodes the soils that cover the area and prohibits effective recharge to the underlying aquifers.

Dry and arid weather further prohibit active recharge. The climate of the region is arid, averaging 8 to 12 inches of rainfall annually. As is typical of the southwestern United States monsoonal weather patterns, most precipitation falls from August through October. The heaviest rainfall occurs in the summer in isolated, intense cloudbursts. November through June is relatively dry. Snow generally falls from December to mid-February and averages less than one-half inch in depth. However, most recharge occurs during the winter months during snowmelt periods from the upper elevations (Western Regional Climate Center www.wrcc.dri.edu).

The predominant vegetation is sagebrush and grasses with a more restricted pinon-juniper association (Dick-Peddie, 1993). However, vegetation is very sparse and discontinuous.

Site Specific Hydrogeology

٠,


Depth to groundwater is estimated to be greater than 100 feet. This estimation is based on data from Stone and others (1983), the USGS Groundwater Atlas of the United States and depth to groundwater data published on the New Mexico State Engineer's iWaters Database website. Local topography and proximity to surface hydrologic features are also taken into consideration.


Beds of water-yielding sandstone are present in the Nacimiento Formation, which are fluvial in origin and are interbedded with siltstone, shale and coal. Porous sandstones form the principal aquifers, while relatively impermeable shales form confining units between the aquifers (Stone et al., 1983). Local aquifers exist within the Nacimiento Formation at depths greater than 100 feet and thicknesses of the aquifer can be up to 3500 feet (USGS, Groundwater Atlas of the US).

The site in question is located near Kutz Canyon, where deeply eroded sandstone-capped mesas and slope-forming mudstones occur in a sparsely vegetated and arid badlands-type setting. Broad shalely hills are interspersed with occasional sandstone outcrops, and systems of dry washes and their tributaries are evident on the attached aerial image.

The pit will be located on a relatively flat mesa top at an elevation of approximately 6105 feet. It will be approximately 888 feet from the Kutz Canyon tributary system and 2.75 miles east of Kutz Wash. Groundwater is expected to be shallow within Kutz Wash. However, the significant distance between the Canyon and the site, as well as an elevation difference of over 400 feet suggests groundwater is greater than 100 feet at the proposed site.

State iWaters data points are sparsely distributed in this region, but there is an iWaters data point approximately 2.42 miles to the south of the site. Depth to groundwater within the well is 170 feet below ground surface. A map showing the location of wells in reference to the proposed pit location is attached (SJ00034).

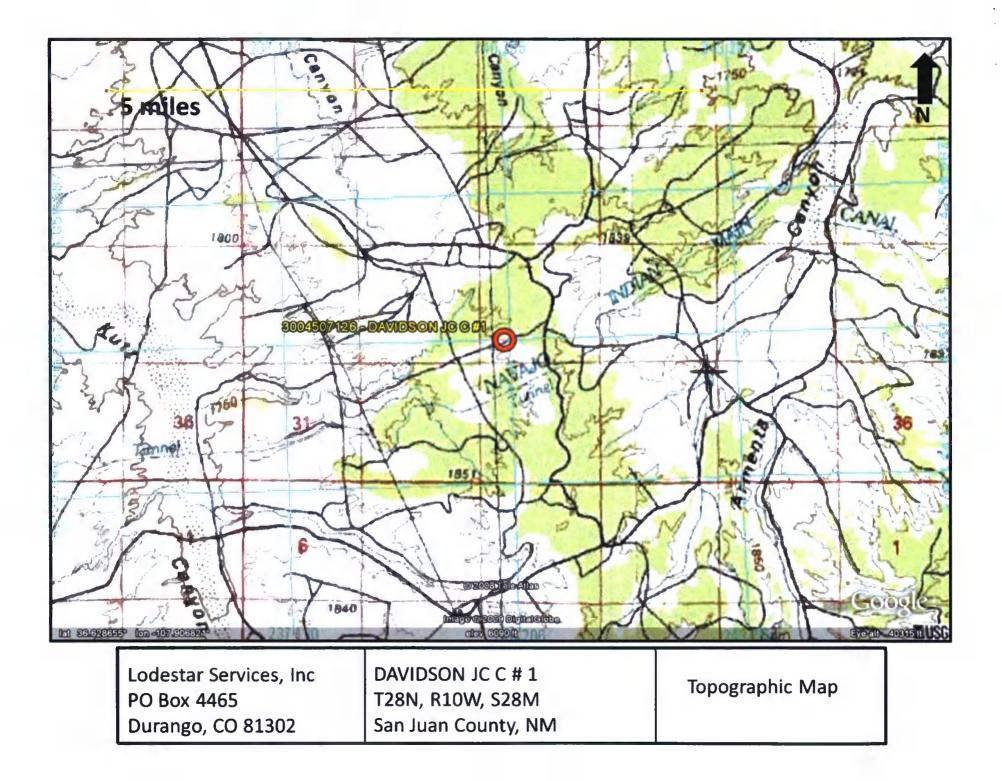

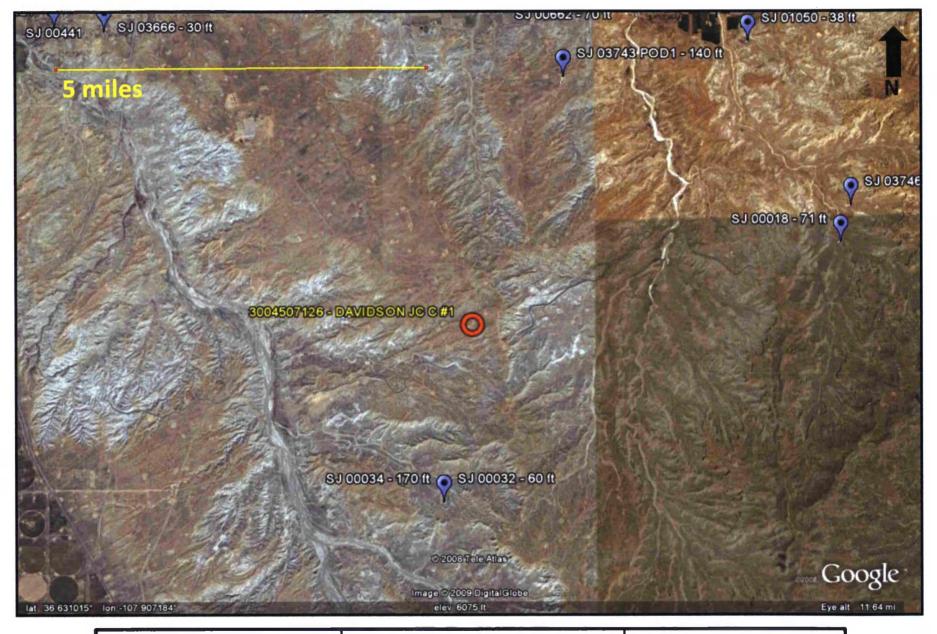

Lodestar Services, Inc PO Box 4465 Durango, CO 81302	DAVIDSON JC C # 1 T28N, R10W, S28M San Juan County, NM	iWaters Groundwater Data Map
--	--	---------------------------------

New Mexico Office of the State Engineer POD Reports and Downloads

.

Township: 29h Range: 10V Sections:

WATER COLUMN REPORT 10/27/2008

						SW 4=SE)							
						<pre>smallest)</pre>			Depth	Depth	Water	(in	feet)
POD Number	Tws	Rng		q	qq	Zone	X	Y	Well	Water	Column		
RG 36732 DCL	29N	10W	25	2					500	450	50		
SJ 00785 S	29N	10W	04	2	4 2				.20				
SJ 00680	29N	10W	13	2	2				40	10	30		
SJ 00785 NEW	29N	10W	13	4					60	20	40		
SJ 00785 S-2	29N	10 W	13	4					60	20	40		
SJ 03023	29N	100	18	1	3 1				90	65	25		
SJ 03502	29N	10W	18	1	3 1				150				
SJ 03081	29N	10W	13	3	1 4				20				
SJ 02078	29N	10W	19	3	1 1				40	9	31		
SJ 00303	29N	10W	19	3	3				20	-5	15		
SJ 02860	29N	10W	19	4	44				21	2	19		
SJ 02900	29N	10W	20	3	1 2				70				
SJ 01140	29N	10W	20	3	2 2				25	ĉ	19		
SJ 01990	29N	10W	20	4	1				40	12	28		
SJ 02548	29N	101	20	4	4				12	2	10		
SJ 02547	29N	10W	20	4	4				12	2	10		
SJ 03535	29N	10W	21	3	2 3				15				
SJ 03455	29N	10W	21	3	3 1				20	17	3		
SJ 03456	29N	10W	21	3	3 2				20	17	3		
SJ 03441	29N	10W	21	4	3 3				40	30	10		
SJ 03470	29N	10W	21	4	3 4				20	7	13		
SJ 01474	29N	10W	21	4	4				25				
SJ 03180	29N	10W	21	4	4 4				50	15	35		
SJ 03713 POD1	29N	10W	22	2	3				265	20	245		
SJ 02820	29N	10W	23	4	1 1				82	16	66		
SJ 02896	29N	10W	24	1	4 1				110	34	76		
SJ 02275	29N	10W	24	1	4 2				40	20	20		

SJ 00092	29N	10W	24	2	4	2				33		
SJ 02802	29N	10W	24	3	1	2				132	30	1
SJ 02907	29N	10W	24	3	2	3				60		
SJ 02122	29N	101	25	4	1					εŪ	12	
SJ 01019	29N	10W	26	1	3	3				50	4	
SJ 01056	29N	10W	27	3	2					50	31	
SJ 02216	29N	10W	28	1	2					30	7	
SJ 03582	29N	10%	28	1	3	3				10	4	
SJ 02151	29N	10W	28	2	1	2	ĨNÎ	484€00	2075600	37	20	
SJ 03652	29N	10W	28	2	2	1				34	÷	
SJ 03142	29N	10W	28	2	2	2				38	22	
SJ 03637	29N	10%	28	$\widehat{\mathbb{Z}}$	3	1				21	ΙÛ	
SJ 03582 POD2	29N	10W	28	2	3	3				28	5	
SJ 02840	29N	10W	28	3	4	1				55	32	
SJ 00506	29N	10W	23	4	3					73	55	
SJ 00662	29N	10W	28	4	4	З				93	70	
SJ 00497	29N	10W	29	3	2	3				35	35	
SJ 03777 POD1	29N	10W	29	4	4	2		270344	2071311	100	50	
SJ 00473	29N		30	2	4					58	10	
SJ 03743 POD1	29N	10W	33	4	4	3				490	1,40	3
SJ 01051	29N	10W	35	2	2	2				90	30	
SJ 01050	29N	10W	36	1	4					85	38	

•

.

New Mexico Office of the State Engineer POD Reports and Downloads

1

Township: 29% Range: 09V Sections: 3.4,5.8,7.8,9.10


WATER COLUMN REPORT 10/24/2008

	(quarter	s ar	e 1=1	M2	2=	=NB	3=SW 4=SI	E)						
	(quarter	s ar	e big	gge	st	t to	smalles	t)		Depth	Depth	Water	(in	feet)
POD Number	Twa	Rng	Sec	P	P	P	Zone	X	Y	Well	Water	Column		
SJ 02369 CLW	29N	0.977	03	1	2	4				13	10	3		
SJ 02376	2 9 N	0 9 W	03	1	2	4				13	10	3		
SJ 02369	29N	0.90	03	1	2	4				23				
SJ 02103	2 9N	0.9W	03	1	З					21	4	17		
SJ 01494	29N	0.977	03	2	2					12	8	7		
SJ 03300	29N	0.977	03	Z	2	2				21	4	17		
SJ 03362 POD2	29N	0.97/	03	2	2	4				21	6	15		
SJ 03362	29N	0.9W	03	2	$\overline{2}$	4				38	12	26		
SJ 02567	29N	0.977	03	2	4	3				14	2	12		
SJ 03200	29N	0.97/	03	3	1	1				28	13	15		
SJ 02946	29N	0.9%	03	4	2	1				95	40	53		
SJ 03490	2 9 N	0.9W	04	1	1	3				42.	20	22		
SJ 03491	29N	0.97/	04	1	1	3				7.6				
SJ 03566	2 9N	0.9W	04	1	3	4				30				
SJ 03531	29N	0.977	04	1	4	1				3.0				
SJ 03530	2 9 N	0.97/	04	1	4	1				3.0				
SJ 03466	2 9 N	0.977	0.4	2	1	3				40				
SJ 02554	2 9 N	0.97/	04	2	1	4				13	5	8		
SJ 03118	2 9 N	0 9W	05	Ξ	2	3				250				
SJ 03092	2 9 N	0.97/	05	4	1	1				40	16	24		
SJ 03182	29N	0 9W	05	4	1	1				42	18	24		
SJ 03599	29N	0.99	05	4	1	1				42	20	22		
SJ 00584	29N	0 9W	0.6	3	4					143	4.0	103		
SJ 00785	2 9 N	0.90	07	З	4	2				60				
SJ 03389	2 9 N	097	07	4	4	2				20				
SJ 03536	29N	0 9 W	07	4	4	2				19	6	13		
SJ 01176	29N	0 9W	08	1	1					150	70	8Đ		

SJ 02822	2 9 N	0.90 0.8	1 1	3	100	
SJ 00436	29N	09W 08	1 3		130	100
SJ 03534	2 9 N	09W 08.	3 1	3	4 1	24
SJ 02279	29N	090 09	1 1	-12	30	6
SJ 00102	29N	090 09	1 2	1	20	5

-

. ·

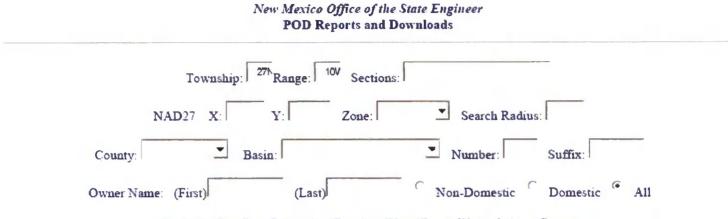

.

POD / Surface Data ReportAvg Depth to Water ReportWater Column Report

WATER COLUMN REPORT 10/30/2008

(quarters are 1=NW 2=NE 3=SW 4=SE) (quarters are biggest to smallest)									(in feet)				
POD Number	Tws	Rng	Sec	P	q	P	Zone	x	Y	Well	Water	Column	
SJ 00032	27N	2.097	08	2	2	3				235	60	175	
SJ 00033	27N	100	0.5	2	2	3				204			
SJ 00034	27N	2074	08	2	2	3				235	170	65	

Record Count: 3

New Mexico Office of the State Engineer POD Reports and Downloads .

.


Township: 27h Range: 11V Sections:


POD / Surface Data ReportAvg Depth to Water ReportWater Column Report


WATER COLUMN REPORT 10/30/2008

(quarters are 1=NW 2=NE 3=SW 4=SE) (quarters are biggest to smallest)									Depth	Depth	Water	(in feet)
POD Number	Twa	Rng	Sec	P	a a	Zone	X	Y	Well	Water	Column	
SJ 01787	27N	117	07	2	2				630			
SJ 00077	271	110	26	2	1 3				1102	5.50	552	

Record Count: 2

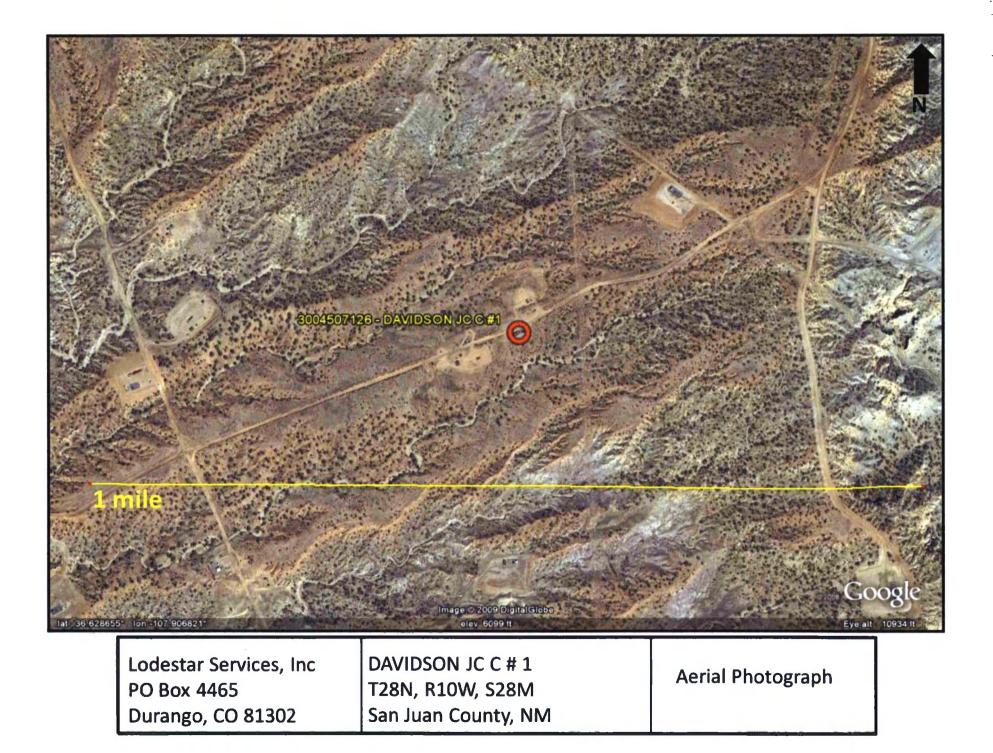

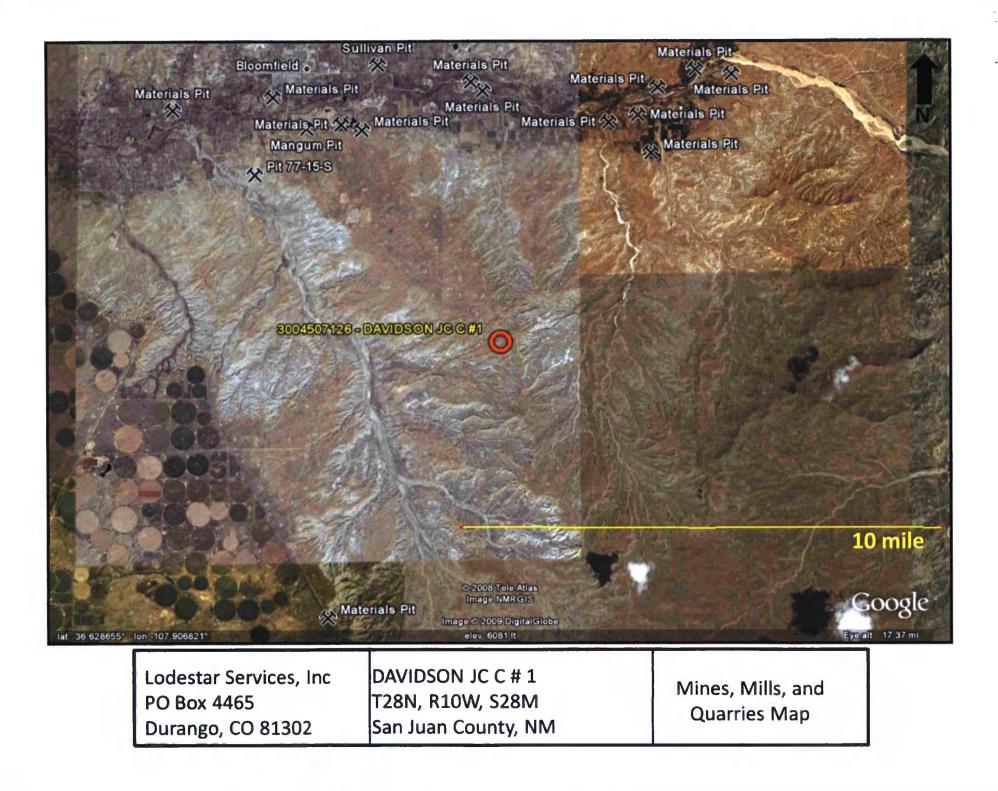

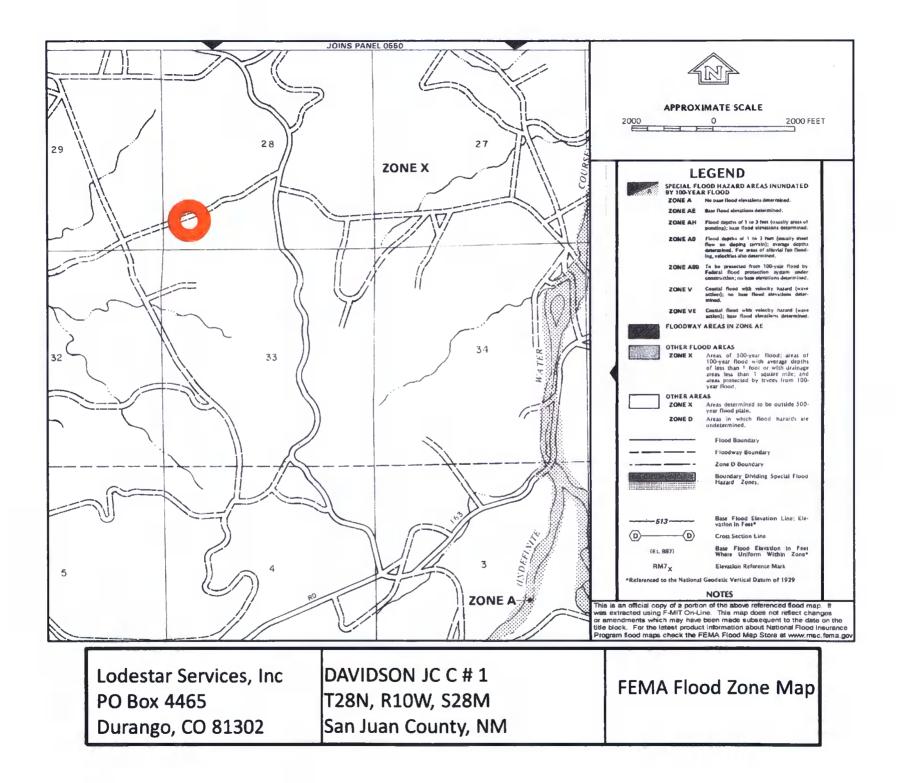

XTO Energy Inc. San Juan Basin (Northwest New Mexico) General Design and Construction Plan For Below-Grade Tanks

In accordance with Rule 19.15.17.11 NMAC the following information describes the design and construction of below-grade tanks on XTO Energy Inc. (XTO) locations. This is XTO's standard procedure for all below-grade tanks. A separate plan will be submitted for any below-grade tank which does not conform to this plan.

General Plan

- 1. XTO will design and construct below-grade tanks to contain liquids and solids and prevent contamination of fresh water and protect public health and environment.
- 2. XTO will post a well sign, in compliance with 19.15.3.103 NMAC, on the existing well site operated by XTO where the existing below-grade tank is located. The sign will list the Operator on record as the operator, the location of the well site by unit letter, section, township, range, and emergency telephone numbers.
- 3. XTO is requesting approval of an alternative fencing to be used on below-grade tank locations. Below-grade tank locations will be fenced utilizing 48" steel mesh field-fence (hogwire) with pipe railing along the top. A 6' chain link fence will be utilized around the well pad if the well site is within a city limits or ¼ mile of a permanent residence, school, hospital, institution or church. Below-grade tanks located within 1000' of a permanent residence, school, hospital, institution or church will be fenced by 6' chain link fence with at least two strands of barbed wire at the top. All gates associated with below-grade tanks will remain closed and locked when responsible individuals are not on site.
- 4. XTO shall construct below-grade tanks with an expanded metal covering or solid vaulted top on the top of the below-grade tank.
- 5. XTO will ensure that below-grade tanks are constructed of materials resistant to the below-grade tank's particular contents and resistant to damage from sunlight. Tanks will be constructed of A36 carbon steel with 3/16" sides and ¼" bottom. (See attached drawing).
- 6. The below-grade tank system will have a properly constructed foundation consisting of a level base free of rocks, debris, sharp edges or irregularities to prevent punctures, cracks or indentations of the liner or tank bottom. Sand bedding (4") will be placed on top of a level foundation to ensure prevention of punctures, cracks or indentations of the liner or tank bottom.
- 7. XTO will construct a berm and/or diversion ditch in a manner that prevents the collection of surface water run-on. Below-grade tanks will be equipped with automatic high level shut-off devices as well as manually operated shut-off valves. (See attached drawing).
- 8. XTO will construct and use below-grade tanks that do not have double walls. The below-grade tank sidewalls will be open for visual inspection for leaks. The sidewalls of the cellar will be constructed with 2" X 12" pine sidewalls and 4" X 4" pine brace posts. The below-grade tank


XTO Energy Inc. San Juan Basin (Northwest New Mexico) General Design and Construction Plan For Below-Grade Tanks Page 2

۰.

. .

bottom will be elevated a minimum of 6" above the underlying ground surface and the belowgrade tank will be underlain with a geomembrane liner to divert leaked liquid to a location that can be visually inspected. (See attached drawing).

- 9. XTO will equip below-grade tanks designed in this manner with a properly functioning automatic high-level shut-off control device and manual controls to prevent overflows. (See attached drawing).
- 10. XTO will demonstrate to the OCD that the geomembrane liner complies with the specifications of Subparagraph (a) of Paragraph (4) of Subsection I of 19.15.17.11 NMAC and obtain approval from OCD prior to the installation of the design. The geomembrane liner shall have a hydraulic conductivity no greater than 1 x 10-9 cm/sec. The geomembrane liner shall be composed of an impervious, synthetic material that is resistant to petroleum hydrocarbons, salts and acidics and alkaline solutions. The liner material shall be resistant to ultraviolet light. Liner compatibility shall comply with EPA SW-846 method 9090A. (See attached drawing).
- 11. The general specifications for design and construction are attached.

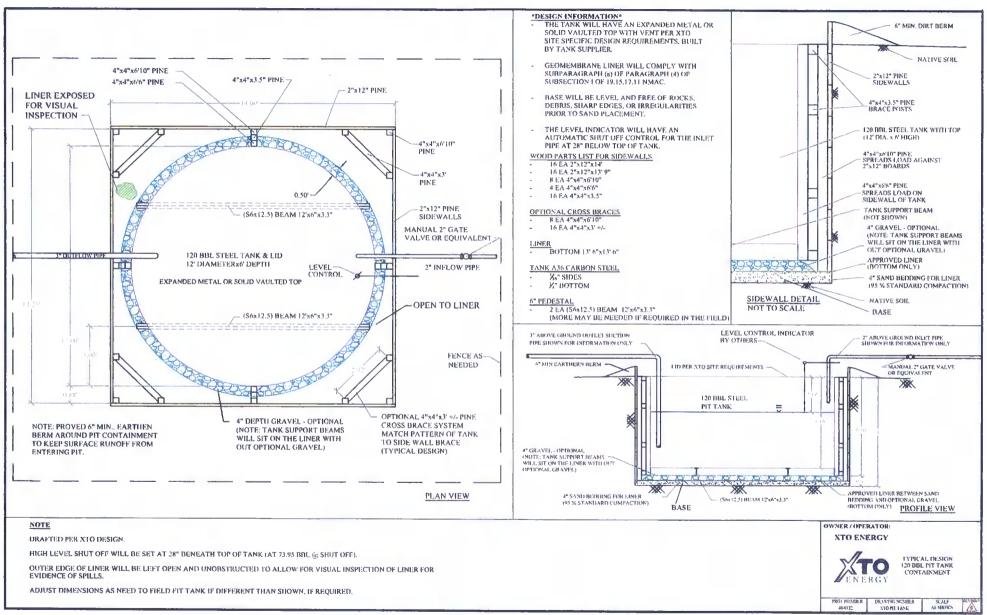

^{7:(}Sirr/XFD_PITEANROCAD-Typical Designs XTD PIT TANK dog XFD PIT TANK dog

XTO Energy Inc. San Juan Basin (Northwest New Mexico) General Maintenance and Operating Plan For Below-Grade Tanks

In accordance with Rule 19.15.17.12 NMAC the following information describes the operation and maintenance of below-grade tanks on XTO Energy Inc. (XTO) locations. This is XTO's standard procedure for all below-grade tanks. A separate plan will be submitted for any below-grade tank which does not conform to this plan.

General Plan

. .

۰.

- XTO will operate and maintain below-grade tanks to contain liquids and solids, maintain the integrity of the liner and secondary containment system, prevent contamination of fresh water and protect public health and the environment. Fluid levels will be monitored weekly and high levels will be removed as necessary. Monthly inspections will be conducted to monitor integrity of below-grade tank systems and below-grade tanks will be equipped with automatic high-level shut-off devices.
- 2. XTO will not allow below-grade tanks to overflow and will use berms and/or diversion ditch to prevent surface run on to enter the below-grade tank. Below-grade tanks will be equipped with automatic high-level shut-off control devices as well as manually operated shut-off valves. See attached drawing for vault design and placement of diversion berms and shut-off devices.
- 3. XTO will continuously remove any visible or measurable layer of oil from the fluid surface of below-grade tanks in order to prevent significant accumulation of oil.
 - XTO will inspect the below-grade tank monthly and maintain written records for five years. Monthly inspections will consist of documenting the following: (see attached template), Well Name
 - API # Sec., Twn., Rng. XTO Inspector's name Inspection date and time Visible tears in liner Visible signs of tank overflow Collection of surface run on Visible layer of oil Visible signs of tank leak Estimated freeboard
- 5. XTO will maintain adequate freeboard to prevent over topping of the below-grade tank. High level shut-off devices control the freeboard at an average of 28" beneath the top of the tank.
- 6. XTO will not discharge into or store any hazardous waste in any below-grade tank.
- 7. If a below-grade tank develops a leak, or if any penetration of a below-grade tank occurs below the liquids surface, XTO will remove all liquids above the damage or leak line within 48 hours,

XTO Energy Inc. San Juan Basin (Northwest New Mexico) General Maintenance and Operating Plan For Below-Grade Tanks Page 2

• • •

notify the appropriate division district office within 48 hours of the discovery and repair the damage or replace the below-grade tank. If an existing below-grade tank does not meet current requirements of Paragraphs 1-4 of Subsection I of 19.15.17.11 NMAC the tank will be modified or retrofitted to comply. If compliance can not be achieved XTO will implement the approved closure plan.

MONTHLY BELOW GRADE TANK INSPECTION FORM										
Well Nan	ne:				API No.:					
Legals	Sec:		Township:	· · · · · · · · · · · · · · · · ·	Range:					
XTO Inspector's Name	Inspection Date	Inspection Time	Any visible liner tears (Y/N)	Any visible signs of tank overflows (Y/N)	Collection of surface run on (Y/N)	Visible layer	Any visible signs of a tank leak (Y/N)	Freeboard Est. (ft)		
Notes:	Provide De	tailed Descri	ption:							
					_					
Misc:										
				· · · · · · · · · · · · · · · · · · ·						

XTO Energy Inc. San Juan Basin (Northwest New Mexico) General Closure Plan For Below-Grade Tanks

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure requirements of below-grade tanks on XTO Energy Inc. (XTO) locations. This is XTO's standard procedure for all below-grade tanks. A separate plan will be submitted for any below-grade tank which does not conform to this plan.

General Plan

• •

- 1. XTO will close below-grade tanks within the time periods provided in 19.15.17.13 NMAC, or by an earlier date that the division requires because of imminent danger to fresh water, public health or the environment.
- XTO will close a below-grade tank that does not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years after June 16, 2008, if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC.
- 3. XTO will close a permitted below-grade tank within 60 days of cessation of the below-grade tank's operation or as required by the transitional provisions of Subsection B of 19.15.17.17 NMAC in accordance with a closure plan that the appropriate division district office approves. The closure report will be filed on form C-144.
- 4. XTO will remove liquids and sludge from below-grade tanks prior to implementing a closure method and will dispose of the liquids and sludge in a division-approved facility. Approved facilities and waste streams include:

Envirotech Permit No. NM01-0011 and IEI Permit No. NM 01-0010B Soil contaminated by exempt petroleum hydrocarbons Produced sand, pit sludge and contaminated bottoms from storage of exempt wastes Basin Disposal Permit No. NM01-005

- Produced water
- 5. XTO will remove the below-grade tank and dispose of it in a division approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office has approved prior to removal. Any associated liners will be removed, properly cleaned and disposed of per 19.15.9.712 NMAC at San Juan County Landfill. Documentation of the final disposition will be included in the closure report.
- 6. XTO will remove any on-site equipment associated with a below-grade tank unless the equipment is required for some other purpose.
- 7. XTO will test the soils beneath the below-grade tank to determine whether a release has occurred. At a minimum 5 point composite sample will be collected along with individual grab samples from any area that is wet, discolored or showing other evidence of a release. Samples will be

XTO Energy Inc. San Juan Basin (Northwest New Mexico) General Closure Plan For Below-Grade Tanks Page 2

analyzed for BTEX, TPH and chlorides to demonstrate that the benzene concentration, as determined by EPA SW-846 methods 8021B or 8260B or EPA method that the division approves, does not exceed 0.2 mg/kg; total BTEX concentration, as determined by EPA SW-846 methods 8021B or 8260B or other EPA method that the division approves, does not exceed 50 mg/kg; the TPH concentration, as determined by EPA method 418.1 or other EPA method that the division approves, does not exceed 100mg/kg; and the chloride concentration, as determined by EPA method 300.1 or other EPA method that the division approves, does not exceed 250 mg/kg, or the background concentration, whichever is greater. XTO will notify the division of its results on form C-141.

- 8. If XTO or the division determines that a release has occurred, XTO will comply with 19.15.3.116 NMAC and 19.15.1.19NMAC as appropriate.
- 9. If the sampling program demonstrates that a release has not occurred or that any release does not exceed the concentrations specified in Paragraph (4) of Subsection E of 19.15.17.13 NMAC, XTO will backfill the excavation with compacted, non-waste containing, earthen material; construct a division prescribed soil cover; recontour and re-vegetate the site.
- Notice of Closure operations will be given to the Aztec Division District III office between 72 hours and one week prior to the start of closure activities via email or verbally. The notification will include the following:
 - i. Operator's name
 - ii. Well Name and API Number
 - iii. Location by Unit Letter, Section, Township, and Range

The surface owner shall also be notified prior to the implementation of any closure operations of below-grade tanks as per the approved closure plan using certified mail, return receipt requested.

- 11. Re-contouring of location will match fit, shape, line, form and texture of the surrounding area. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be placed in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.
- 12. A minimum of 4 feet of cover shall be achieved and the cover shall include 1 foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater. Soil cover will be constructed to the site's existing grade and ponding of water and erosion of the cover material will be prevented with drainage control, natural drainages and silt traps where needed.
- 13. XTO will seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other divisionapproved methods. BLM or Forest Service stipulated seed mixes will be used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

XTO Energy Inc. San Juan Basin (Northwest New Mexico) General Closure Plan For Below-Grade Tanks Page 3

- 14. All closure activities will include proper documentation and be available for review upon request and will be submitted in closure report form to OCD within 60 days of closure of the below-grade tank. Closure report will be filed on form C-144 and incorporate the following:
 - i. Proof of closure notice to division and surface owner;
 - ii. Details on capping and covering, where applicable;
 - iii. Inspection reports;
 - iv. Confirmation sampling analytical results;
 - v. Disposal facility name(s) and permit number(s);
 - vi. Soil backfilling and cover installation;
 - vii. Re-vegetation application rates and seeding techniques, (or approved alternative to re-vegetation requirements if applicable);
 - viii. Photo documentation of the site reclamation.

