REGISTERED

1220 S. St. Francis Dr., Santa Fe, NM 87505

District IV

rerals and Natural Resources
Department

onservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505 For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office.
For permanent pits and exceptions submit to

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Pit, Closed-Loop System, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application

Type of action: Existing BGT	Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method Modification to an existing permit
	Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system,
below-grade tank	x, or proposed alternative method

Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request

Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.

Operator: X10 Energy, Inc. OGRID #: 5380	
Address: #382 County Road 3100, Aztec, NM 87410	
Facility or well name: Pipkin PO #2	
API Number: <u>30-045-06631</u> OCD Permit Number:	
U/L or Qtr/Qtr L Section 08 Township 27N Range 10W County: San Jua	<u>n</u>
Center of Proposed Design: Latitude 36.58646 Longitude 107.92327	NAD: □1927 🛛 1983
Surface Owner: X Federal X State Private Tribal Trust or Indian Allotment	
2.	
Pit: Subsection F or G of 19.15.17.11 NMAC	
Temporary: Drilling Workover	
☐ Permanent ☐ Emergency ☐ Cavitation ☐ P&A	
☐ Lined ☐ Unlined Liner type: Thicknessmil ☐ LLDPE ☐ HDPE ☐ PVC ☐ Other	
☐ String-Reinforced	
Liner Seams: Welded Factory Other Volume: bbl Dimensions: L	x W x D
3.	-
Closed-loop System: Subsection H of 19.15.17.11 NMAC	
Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior apprintent)	oval of a permit or notice of
☐ Drying Pad ☐ Above Ground Steel Tanks ☐ Haul-off Bins ☐ Other	
Lined Unlined Liner type: Thicknessmil LLDPE HDPE PVC Other	
Liner Seams: Welded Factory Other	
4.	
Below-grade tank: Subsection I of 19.15.17.11 NMAC	
Volume: 95 bbl Type of fluid: Produced Water	
Tank Construction material: Steel	
☐ Secondary containment with leak detection ☐ Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off	
☐ Visible sidewalls and liner ☐ Visible sidewalls only ☒ Other _Visible sidewalls, vaulted, automatic high-level shut of	off, no liner
Liner type: Thickness mil HDPE PVC Other	
5.	
Alternative Method:	
Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for	consideration of approval.

Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)								
Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, institution or church)	hospital,							
Four foot height, four strands of barbed wire evenly spaced between one and four feet								
Alternate. Please specify Four foot height, steel mesh field fence (hogwire) with pipe top railing								
7.	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,							
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)								
Screen Netting Other Expanded metal or solid vaulted top								
Monthly inspections (If netting or screening is not physically feasible)								
8. Signs: Subsection C of 19.15.17.11 NMAC								
12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers								
Signed in compliance with 19.15.3.103 NMAC								
ZJ organie in companie with 1990 or 19								
9. Administrative Approvals and Exceptions:								
Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.								
Please check a box if one or more of the following is requested, if not leave blank: Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau	office for							
consideration of approval. Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.								
10.								
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accept material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the approach office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of a Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to dry	priate district pproval.							
above-grade tanks associated with a closed-loop system.								
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☑ No							
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☑ No							
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks)	Yes No							
 Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. 	☐ Yes ☐ No							
(Applies to permanent pits) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	⊠ NA							
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock	☐ Yes ⊠ No							
watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site								
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.	☐ Yes ☑ No							
- Written confirmation or verification from the municipality; Written approval obtained from the municipality								
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☒ No							
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☒ No							
 Within an unstable area. Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	☐ Yes ⊠ No							
Within a 100-year floodplain FEMA map	☐ Yes ☒ No							

11. Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are
attached. ☐ Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC ☐ Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC ☐ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC ☐ Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC ☐ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC ☐ Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API Number: or Permit Number:
Previously Approved Design (attach copy of design) APT Number: or Permit Number
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API Number:
Previously Approved Operating and Maintenance Plan API Number: (Applies only to closed-loop system that use
above ground steel tanks or haul-off bins and propose to implement waste removal for closure)
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.
Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. ☑ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC ☑ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC ☑ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) ☑ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC ☑ Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: (19.15.17.13.I Instructions: Please indentify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if facilities are required.	O NMAC) more than two							
Disposal Facility Name: Disposal Facility Permit Number:								
Disposal Facility Name: Disposal Facility Permit Number:								
Will any of the proposed closed-loop system operations and associated activities occur on or in areas that will not be used for future ser Yes (If yes, please provide the information below) No	vice and operations?							
Required for impacted areas which will not be used for future service and operations: Soil Backfill and Cover Design Specifications based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC								
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable sour provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate dist considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justi demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.	rict office or may be							
Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No							
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No							
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA							
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	Yes No							
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No							
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	☐ Yes ☐ No							
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No							
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	Yes No							
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No							
 Within an unstable area. Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	☐ Yes ☐ No							
Within a 100-year floodplain FEMA map	☐ Yes ☐ No							
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.13 NMAC Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot be achieved) Soil Cover Design - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC								

<u>, </u>		
Operator Application Certification:		
I hereby certify that the information submitted with this application	is true, accurate and complete to the	e best of my knowledge and belief.
	Title:	Environmental Representative
Signature: Min Champlin	Date:01/3	30/2009
		(505) 333-3100
20.		
OCD Approval: Permit Application (including closure plan)	Closure Plan (only) OCD (Conditions (see attachment)
OCD Representative Signature:		Approval Date:
Title:	OCD Permit Numb	er:
Closure Report (required within 60 days of closure completion): Instructions: Operators are required to obtain an approved closure The closure report is required to be submitted to the division within section of the form until an approved closure plan has been obtained	e plan prior to implementing any cl 60 days of the completion of the c ed and the closure activities have b	losure activities and submitting the closure report. losure activities. Please do not complete this
22.		
Closure Method: Waste Excavation and Removal On-Site Closure Method If different from approved plan, please explain.	Alternative Closure Method	☐ Waste Removal (Closed-loop systems only)
Closure Report Regarding Waste Removal Closure For Closed-le Instructions: Please indentify the facility or facilities for where the two facilities were utilized.		
Disposal Facility Name:	Disposal Facility Per	mit Number:
Disposal Facility Name:		mit Number:
Were the closed-loop system operations and associated activities per Yes (If yes, please demonstrate compliance to the items below		e used for future service and operations?
Required for impacted areas which will not be used for future services Site Reclamation (Photo Documentation) Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique	e and operations:	
Closure Report Attachment Checklist: Instructions: Each of the mark in the box, that the documents are attached. Proof of Closure Notice (surface owner and division) Proof of Deed Notice (required for on-site closure) Plot Plan (for on-site closures and temporary pits) Confirmation Sampling Analytical Results (if applicable) Waste Material Sampling Analytical Results (required for on-site pisposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation)	site closure)	
On-site Closure Location: Latitude	Longitude	NAD: 1927 1983
Operator Closure Certification: I hereby certify that the information and attachments submitted with belief. I also certify that the closure complies with all applicable closure.	this closure report is true, accurate a sure requirements and conditions sp	and complete to the best of my knowledge and ecified in the approved closure plan.
Name (Print):	Title:	
Signature:	Date:	
e-mail address:	Telephone:	

NEW MEXICO OIL CONSERVATION COMMISSION Well Location and Acreage Dedication Plat

SECTION A.	Date March 9, 1964
Operator Pan American Petroleum Corporation Lease	P. O. Pipkin
Well No. 2 Unit Letter .L. Section 8 Township 2	7 North Range 10 WestNMPM
Located 1500 Feet From South Line, 1190	Feet From West Line
County San Juan G. L. Elevation Report Later Dedica	offed Acreage 320 Acres
Name of Producing Formation Dakota Pool	Basin Dakota
1. Is the Operator the only owner* in the dedicated acreage outlined on the p.	lat below? Yes No 🕱 .
2. If the answer to question One is "No," have the interests of all the own agreement or otherwise? Yes No If answer is "Yes," Type Lointly owned acreage - all owners approved drilling of we	pe of Consol dation
3. If the answer to question Two is "No," list all the owners and their resp	
DWNER	LAND CESCHOTEPEIL
	RULIVEN
	(MINITO)
	MAR 1 6 1964
SECTION B.	COAL _
	DIST. 3
	This is to certify that the informa-
	tion in Section A above is true and
	complete to the best of my knowl- edge and belief.
	edge and belief.
	PAN AMERICAN PETROLEUM CORP.
	7.11. Hallugarnics
	F. H. Hollingsworth
i	RE-PRESENTATIVE
	P. O. Box 480
	Farmington, New Mexico
Sec.	
	This is to certify that the well loca-
	tion, shown on the plantin Section B
ST-077875	Ewes platted from field mates of ac- tual surveys made by me or under
	my supervision and that the same
	is true and correct to the best of
H	mv knowledge and belief.
	Date Surveyed Feb. 4, 1964
1500	Four States Engineering Co.
	Garact V. Oce h. Show
	HED STERED ENGINEER OR LANG BURVEYOR
	TT Centercare No. 3602

Lodestar Services, In PO Box 4465, Durango, CO 8	Citing (ritoria	Client: Project: Revised: Prepared by:	XTO Energy Pit Permits 1/27/2009 Daniel Newman
API#:	30-045-06631	USPLSS:	T27N,R10W,08L
Name:	Pipkin PO # 2	Lat/Long:	36.58646 / -107.92327
Depth to groundwater:	> 100 feet	Geologic formation:	Nacimiento Formation
Distance to closest continuously flowing watercourse:	miles south of the San Juan River		
Distance to closest significant watercourse, lakebed, playa lake, or sinkhole:	2 feet east of an unnamed arroyo		
Permanent residence, school, hospital, institution or church within 300'	No	Soil Type:	Entisols & Aridsoils
		Annual Precipitation:	Bloomfield 8.71", Farmington 8.21", Otis 10.41"average
Domestic fresh water well or spring within 500'	No	Precipitation Notes:	Historical daily max: Bloomfield 4.19"
Any other fresh water well or spring within 1000'	No		
Within incorporated municipal boundaries	No	Attached Documents:	
Within defined municipal fresh water well field	cipal fresh water No		Topo map, ground water data map, ariel photo, mines and quarries map, FEMA map
Wetland within 500'	No	Mining Activity:	No
Within unstable area	No		

Additional Notes:

FEMA Zone 'X'

Within 100 year flood

plain

Pipkin PO # 2 Below Ground Tank Hydrogeologic Report for Siting Criteria

General Geology and Hydrology

The San Juan Basin is a typical Rocky Mountain basin with a gently dipping southern flank and a steeply dipping northern flank. Asymmetrically layered Tertiary sandstones and shales, along with Quaternary alluvial deposits, dominate surficial geology (Dane and Bachman, 1965). The proposed pit location will be located in the southern Kutz Canyon region of San Juan County. The predominant geologic formation is the Nacimiento Formation of Tertiary age, which underlies surface soils and is often exposed (Dane and Bachman, 1965). Deposits of Quaternary alluvial and aeolian sands occur prominently near the surface of the area, especially near streams and washes.

Cretaceous and Tertiary sandstones, as well as Quaternary alluvial deposits serve as the primary aquifers in the San Juan basin (Stone et al., 1983). In most of the proposed area, the Nacimiento Formation lies at the surface and grades into the Animas Formation to the west. Thickness of the Nacimiento ranges from 418 to 2232 feet (Stone et al., 1983). Aquifers within the coarser and continuous sandstone bodies of the Nacimiento Formation are between 0 and 1000' deep in this section of the basin (Stone et al., 1983). Groundwater within these aquifers flows toward the San Juan River.

The prominent soil type at the proposed site are entisols and aridsoils, which are defined as soils that exhibit little to no any profile development (www.emnrd.state.nm.us). Soils are basically unaltered from their parent rock. Miles of arroyos washes and intermittent streams exist as part of the drainage network towards the San Juan River. These features often cut into soil and other unconsolidated materials, contributing to sedimentation downstream. The sudden influx of water from storm events easily erodes the soils that cover the area and prohibits effective recharge to the underlying aquifers.

Dry and arid weather further prohibit active recharge. The climate of the region is arid, averaging 8 to 12 inches of rain fall annually. As is typical of the southwestern United States monsoonal weather patterns, most precipitation fall from August through October. The heaviest rainfall occurs in the summer in isolated, intense cloudbursts. November through June is relatively dry. Snow generally falls from December to mid-February and averages less than one-half inch in depth. However, most recharge occurs during the winter months during snowmelt periods from the upper elevations (Western Regional Climate Center www.wrcc.dri.edu)

The predominant vegetation is sagebrush and grasses with a more restricted pinion-juniper association (Dick-Peddie, 1993). However, vegetation is very sparse and discontinuous.

Site Specific Hydrogeology

Depth to groundwater is estimated to be greater than 100 feet. This estimation is based on data from Stone and others (1983), the USGS Groundwater Atlas of the United States and depth to groundwater data published on the New Mexico State Engineer's iWaters Database website. Local topography and proximity to surface hydrologic features are also taken into consideration.

Beds of water-yielding sandstone are present in the Nacimiento Formation, which are fluvial in origin and are interbedded with siltstone, shale and coal. Porous sandstones form the principal aquifers, while relatively impermeable shales form confining units between the aquifers (Stone et al., 1983). Local aquifers exist within the Nacimiento Formation at depth s greater than 100 feet and thicknesses of the aquifer can be up to 3500 feet (USGS, Groundwater Atlas of the US).


The site in question is located near Kutz Canyon, where deeply eroded sandstone-capped mesas and slope-forming mudstone occur in a sparsely vegetated and arid badlands-type setting. Broad shaley hills are interspersed with occasional sandstone outcrops, and systems of dry washes and their tributaries are evident on the attached aerial image.

The pit will be located approximately 1.27 miles east of Kutz Canyon at an elevation of approximately 5,938 feet. Ground water is expected to be shallow within Kutz Canyon. The floor of Kutz Canyon sits at 5,812 feet, an elevation difference of approximately 120 feet exists between the site and the floor of Kutz Canyon. The elevation difference of approximately 120 feet between the proposed site and the floor of Kutz Canyon, suggests that depth to groundwater is greater than 100 feet at the proposed site.

Lined channels associated with the Navajo Irrigation Project supply water for nearby agriculture lands, which are characterized by center-pivot irrigation patterns. During spring and summer, irrigation practices often produces shallow perched aquifers that are not defined in published literature. These shallow zones of water are not continuous and are not saturated year round.


Groundwater data available from the NM State Engineer's iWaters Database for wells near the proposed site are attached. A map showing the locations of wells in reference to the proposed pit location is also attached. Water drops show locations of wells and the labels for each water drop indicate depth to groundwater in feet. The closest well to the site (SJ00032) is at an elevation of approximately 4,573 feet and is located 1.08 miles to the snortheast this well puts depth to groundwater at 60 feet below the surface. However this site is not representative of the proposed site, for it place groundwater at an elevation above the proposed site. The elevation difference of approximately 120 feet between the floor of Kutz Canyon and the proposed site should be used as the deciding factor on distance to groundwater in this case, seeing how the water wells surrounding the proposed sites cannot be used to accurately judge distance to groundwater. The

observations made within this report suggest that distance to groundwater to be greater than 100 feet deep at the proposed location.

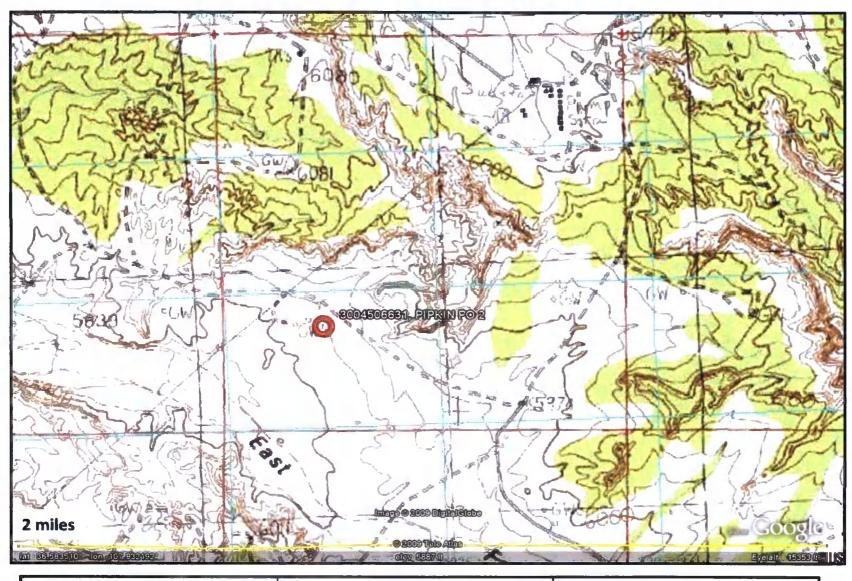

Lodestar Services, Inc PO Box 4465 Durango, CO 81302 Pipkin PO # 2 T27N,R10W,08L SAN JUAN COUNTY, NM

TOPOGRAPHIC MAP

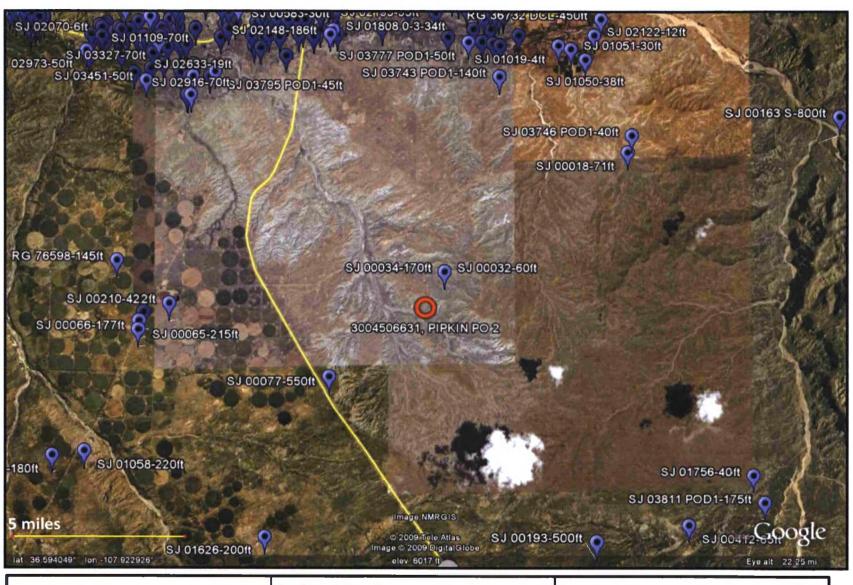

Lodestar Services, Inc PO Box 4465 Durango, CO 81302 Pipkin PO # 2 T27N,R10W,08L SAN JUAN COUNTY, NM

i-Waters Ground Water Data Map

AVERAGE DEPTH OF WATER REPORT 11/11/2008 (Depth Water in Feet)

								(Deptn	water in	reet)
Bsn	Tws	Rng	Sec	Zone	X	Y	Wells	Min	Max	Avg
SJ	26N	09W	11				1	40.	40	40
SJ	26N	09W	12				1	175	175	175
SJ	26N	09W	16				1	65	€5	65
5J	2 6N	09W	26				3	215	234	226

AVERAGE DEPTH OF WATER REPORT 11/10/2008

								(Depth	Water in	Feet)
Bsn	Tws	Rng S	Sec	Zone	x	Y	Wells	Min	Max	Avg
SJ	27N	10W 0	8(2	€0	170	115

AVERAGE DEPTH OF WATER REPORT 11/03/2008

								(Deptn	water in	reet)
Bsn	Tws	Rng	Sec	Zone	X	Y	Wells	Min	Max	Avg
SJ	27N	11W	26				1	550	550	550

AVERAGE DEPTH OF WATER REPORT 11/03/2008

								(Deptn	water in	reet)
Bsn	Tws	Rng	Sec	Zone	X	Y	Wells	Min	Max	Avg
RG	27N	12W	02				1	145	145	145
SJ	27N	12W	13				4	1.77	422	306

AVERAGE DEPTH OF WATER REPORT 01/21/2009

								(Depth	Water in	Feet)
Bsn	Tws	Rng	Sec	Zone	X	Y	Wells	Min	Max	Avg
SJ	29N	OSW	14				1	480	480	480
SJ	28N	O'SW	17				1			
SJ	28N	OSW	18				1	800	800	800

Record Count: 3

AVERAGE DEPTH OF WATER REPORT 01/09/2009

								(Depth	Water in	Feet)
Bsn	Tws	Rng	Sec	Zone	X	Y	Wells	Min	Max	Avg
SJ	28N	09W	20				2	40	71.	5€

Record Count: 2

AVERAGE DEPTH OF WATER REPORT 01/05/2009

								(Depth	Water in	Peet)
Bsn	Tws	Rng	Sec	Zone	X	Y	Wells	Min	Max	Avg
SJ	29N	09W	02				28	3	71	11
SJ	29N	0.9W	03				10	2	40	11
SJ	29N	0 9 W	04				2	5	20	13
SJ	29N	09W	05				3	16	20	18
SJ	29N	09W	06				1	40	40	40
SJ	29N	09W	07				1	€	€	٤
SJ	29N	09W	08				3	24	100	65
SJ	29N	09W	09				2	5	6	6
SJ	29N	OSW	09		273716	2090921	1	250	250	250
SJ	29N	OSW	16				2	87	100	94
SJ	29N	09W	18				9	1	5	4

AVERAGE DEPTH OF WATER REPORT 11/15/2008

								(Depth	Water in	Feet)
Bsn	Tws	Rng	Sec	Zone	X	Y	Wells	Min	Max	Avg
RG	29N	107	25				1	450	450	450
SJ	29N	1077	13				3	10	20	17
SJ	29N	100	18				1	65	€5	€5
SJ	29N	100	19				3	2	9	5
SJ	29N	1077	20				4	2	12	€
ಶರ	29N	100	21				5	7	30	17
SJ	29N	100	22				1	20	20	20
SJ	29N	10W	23				1	16	16	1€
SJ	29N	10W	24				3	20	34	28
SJ	29N	10W	25				1	12	12	12
SJ	29N	10W	26				1	4	4	4
SJ	29N	100	27				1	31	31	31
SJ	29N	100	28				9	4	70	23
SJ	29N	10W	28	W	484600	2075600	1	2.0	20	20
SJ	29N	10.00	29				1	35	35	35
SJ	29N	10W	29		270344	2071311	1	50	50	5 Û
SJ	29N	LOW	3 Ū				1	10	10	10
SJ	29N	1077	33				1	140	140	140
SJ	29N	10W	35				1	30	3.0	30,
SJ	29N	10W	36				1	38	38	38


AVERAGE DEPTH OF WATER REPORT 11/10/2008

		AVDIG	102 2		, ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	10111 1	2, 20, 20	(Depth	Water in	Feet)
Bsn	Tws	Rng	Sec	Zone	X	Y	Wells	Min	Max	Avg
SJ	29N	11W	07				2	55	210	133
SJ	29N	110	10				1	48	48	48
SJ	29N	1100	13				1	300	300	300
SJ	29N	1100	14				4	€	5.€	24
SJ	29N	11W	15				3	12	30	21
SJ	29N	110	16				1	40	4.0	40
SJ	29N	110	17				2	6	80	43
SJ	29N	110	19				3	18	55	31
SJ	29N	117	19		440000	2077700	1	6	ϵ	€.
SJ	29N	117	20				2	3	30	17
SJ	29N	1177	21				7	8	55	18
SJ	29N	1,197	22				25	3	5.9	15
SJ	29N	11W	23				15	15	30	21
SJ	29N	11W	24				2	12	18	15
SJ	29N	11W	25				1	25	25	25:
SJ	29N	11W	26				1	43	43	43
SJ	29N	11W	27				20	€	186	29
SJ	29N	11W	2,8				9	5	115	27
SJ	29N	1100	28		267348	2075529	1	15	15	15
SJ	29N	1100	29				9	4	28	13
SJ	29N	11W	30				,6	ϵ	25	16
SJ	29N	1100	31				1	40	40	40
SJ	29N	1100	31		26.6438	2067001	1	45	45	45
SJ	29N	1100	33				1	30	30.	3.0

Record Count: 119




Lodestar Services, Inc PO Box 4465 Durango, CO 81302 Pipkin PO # 2 T27N,R10W,08L SAN JUAN COUNTY, NM **AERIAL PHOTOGRAPH**

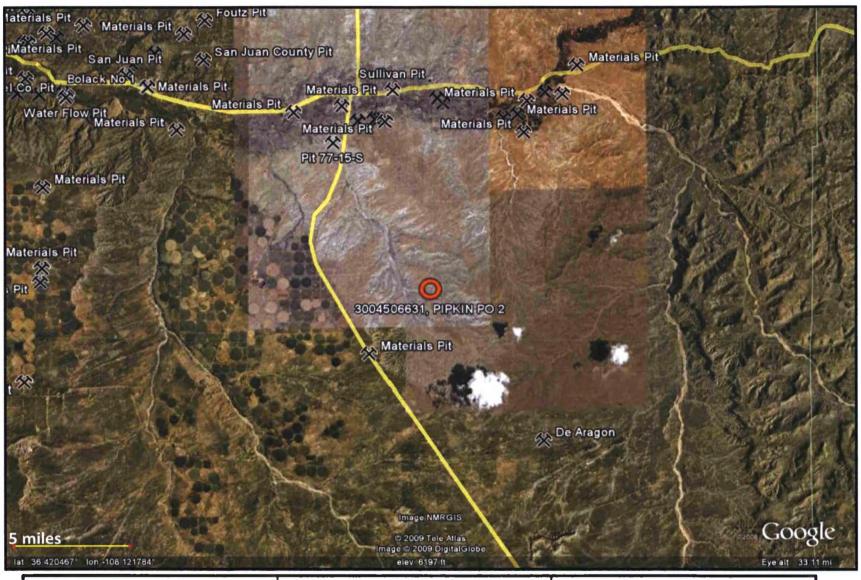

Lodestar Services, Inc PO Box 4465 Durango, CO 81302 Pipkin PO # 2 T27N,R10W,08L SAN JUAN COUNTY, NM

Mines and Quarries Map

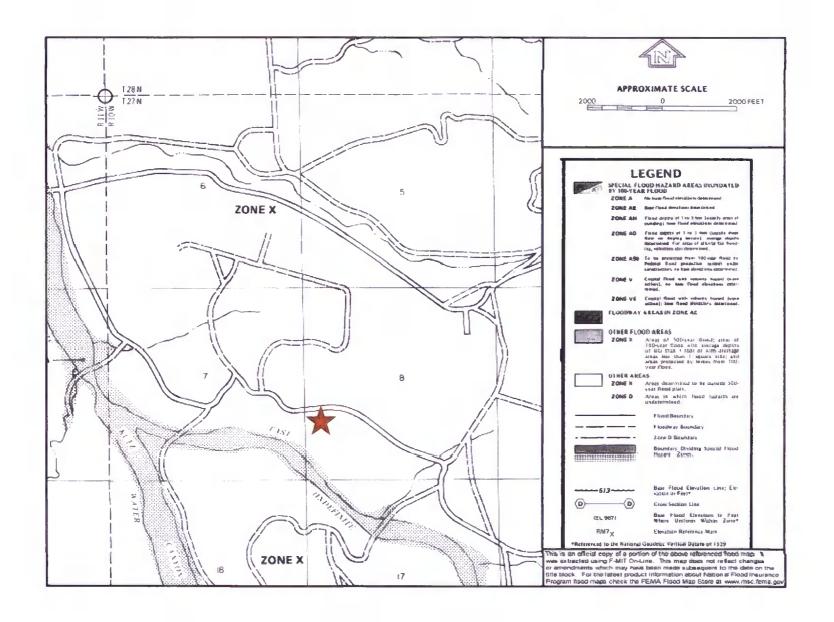

XTO Energy Inc. San Juan Basin (Northwest New Mexico) General Design and Construction Plan For Below-Grade Tanks

In accordance with Rule 19.15.17.11 NMAC the following information describes the design and construction of below-grade tanks on XTO Energy Inc. (XTO) locations. This is XTO's standard procedure for all below-grade tanks. A separate plan will be submitted for any below-grade tank which does not conform to this plan.


General Plan

- 1. XTO will design and construct below-grade tanks to contain liquids and solids and prevent contamination of fresh water and protect public health and environment.
- 2. XTO will post a well sign, in compliance with 19.15.3.103 NMAC, on the existing well site operated by XTO where the existing below-grade tank is located. The sign will list the Operator on record as the operator, the location of the well site by unit letter, section, township, range, and emergency telephone numbers.
- 3. XTO is requesting approval of an alternative fencing to be used on below-grade tank locations. Below-grade tank locations will be fenced utilizing 48" steel mesh field-fence (hogwire) with pipe railing along the top. A 6' chain link fence will be utilized around the well pad if the well site is within a city limits or ½ mile of a permanent residence, school, hospital, institution or church. Below-grade tanks located within 1000' of a permanent residence, school, hospital, institution or church will be fenced by 6' chain link fence with at least two strands of barbed wire at the top. All gates associated with below-grade tanks will remain closed and locked when responsible individuals are not on site.
- 4. XTO shall construct below-grade tanks with an expanded metal covering or solid vaulted top on the top of the below-grade tank.
- 5. XTO will ensure that below-grade tanks are constructed of materials resistant to the below-grade tank's particular contents and resistant to damage from sunlight. Tanks will be constructed of A36 carbon steel with 3/16" sides and \(\lambda'' \) bottom. (See attached drawing).
- 6. The below-grade tank system will have a properly constructed foundation consisting of a level base free of rocks, debris, sharp edges or irregularities to prevent punctures, cracks or indentations of the liner or tank bottom. Sand bedding (4") will be placed on top of a level foundation to ensure prevention of punctures, cracks or indentations of the liner or tank bottom.
- 7. XTO will construct a berm and/or diversion ditch in a manner that prevents the collection of surface water run-on. Below-grade tanks will be equipped with automatic high level shut-off devices as well as manually operated shut-off valves. (See attached drawing).
- 8. XTO will construct and use below-grade tanks that do not have double walls. The below-grade tank sidewalls will be open for visual inspection for leaks. The sidewalls of the cellar will be constructed with 2" X 12" pine sidewalls and 4" X 4" pine brace posts. The below-grade tank

XTO Energy Inc.
San Juan Basin (Northwest New Mexico)
General Design and Construction Plan
For Below-Grade Tanks
Page 2

bottom will be elevated a minimum of 6" above the underlying ground surface and the belowgrade tank will be underlain with a geomembrane liner to divert leaked liquid to a location that can be visually inspected. (See attached drawing).

- XTO will equip below-grade tanks designed in this manner with a properly functioning automatic high-level shut-off control device and manual controls to prevent overflows. (See attached drawing).
- 10. XTO will demonstrate to the OCD that the geomembrane liner complies with the specifications of Subparagraph (a) of Paragraph (4) of Subsection I of 19.15.17.11 NMAC and obtain approval from OCD prior to the installation of the design. The geomembrane liner shall have a hydraulic conductivity no greater than 1 x 10-9 cm/sec. The geomembrane liner shall be composed of an impervious, synthetic material that is resistant to petroleum hydrocarbons, salts and acidics and alkaline solutions. The liner material shall be resistant to ultraviolet light. Liner compatibility shall comply with EPA SW-846 method 9090A. (See attached drawing).
- 11. The general specifications for design and construction are attached.

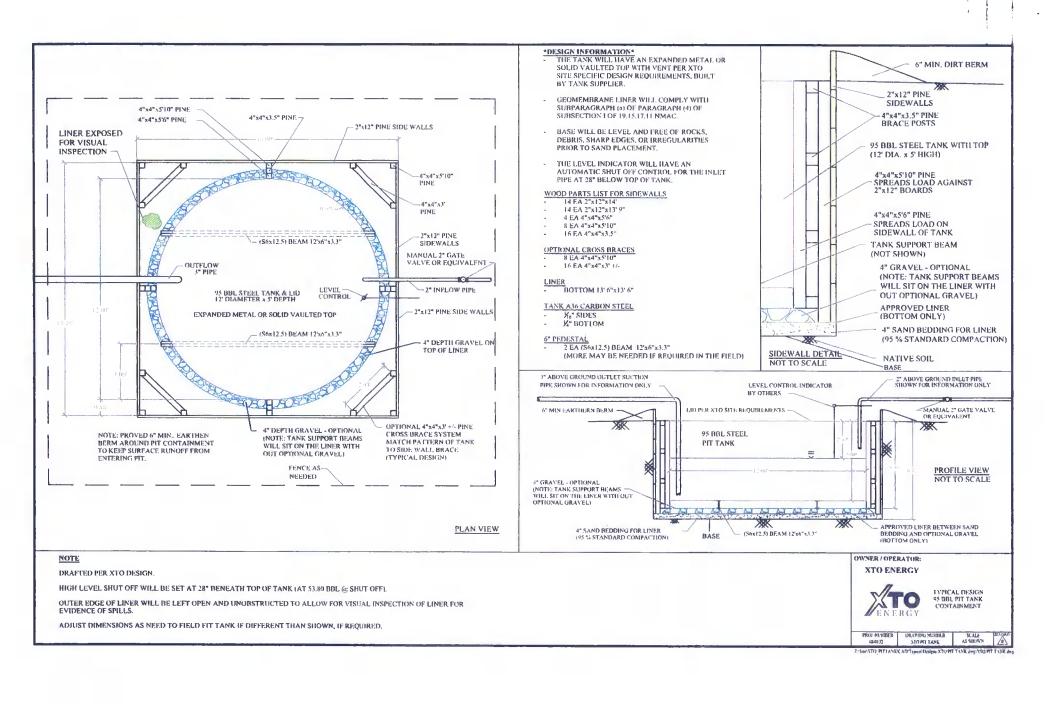

XTO Energy Inc. San Juan Basin (Northwest New Mexico) General Maintenance and Operating Plan For Below-Grade Tanks

In accordance with Rule 19.15.17.12 NMAC the following information describes the operation and maintenance of below-grade tanks on XTO Energy Inc. (XTO) locations. This is XTO's standard procedure for all below-grade tanks. A separate plan will be submitted for any below-grade tank which does not conform to this plan.

General Plan

- XTO will operate and maintain below-grade tanks to contain liquids and solids, maintain the
 integrity of the liner and secondary containment system, prevent contamination of fresh water and
 protect public health and the environment. Fluid levels will be monitored weekly and high levels
 will be removed as necessary. Monthly inspections will be conducted to monitor integrity of
 below-grade tank systems and below-grade tanks will be equipped with automatic high-level
 shut-off devices.
- 2. XTO will not allow below-grade tanks to overflow and will use berms and/or diversion ditch to prevent surface run on to enter the below-grade tank. Below-grade tanks will be equipped with automatic high-level shut-off control devices as well as manually operated shut-off valves. See attached drawing for vault design and placement of diversion berms and shut-off devices.
- 3. XTO will continuously remove any visible or measurable layer of oil from the fluid surface of below-grade tanks in order to prevent significant accumulation of oil.
 - 4. XTO will inspect the below-grade tank monthly and maintain written records for five years. Monthly inspections will consist of documenting the following: (see attached template).

Well Name API#

Sec., Twn., Rng.
XTO Inspector's name
Inspection date and time
Visible tears in liner
Visible signs of tank overflow
Collection of surface run on
Visible layer of oil

Visible signs of tank leak Estimated freeboard

- 5. XTO will maintain adequate freeboard to prevent over topping of the below-grade tank. High level shut-off devices control the freeboard at an average of 28" beneath the top of the tank.
- 6. XTO will not discharge into or store any hazardous waste in any below-grade tank.
- 7. If a below-grade tank develops a leak, or if any penetration of a below-grade tank occurs below the liquids surface, XTO will remove all liquids above the damage or leak line within 48 hours,

XTO Energy Inc.
San Juan Basin (Northwest New Mexico)
General Maintenance and Operating Plan
For Below-Grade Tanks
Page 2

notify the appropriate division district office within 48 hours of the discovery and repair the damage or replace the below-grade tank. If an existing below-grade tank does not meet current requirements of Paragraphs 1-4 of Subsection I of 19.15.17.11 NMAC the tank will be modified or retrofitted to comply. If compliance can not be achieved XTO will implement the approved closure plan.

Sec:		Any visible liner tears (Y/N)	Any visible signs of tank overflows (Y/N)		Visible layer		Freeboard Est. (ft)
nspection	Inspection	Any visible liner	Any visible signs of	Collection of surface	Visible layer	Any visible signs	
		liner	Any visible signs of tank overflows (Y/N)	surface	Visible layer of oil (Y/N)	Any visible signs of a tank leak (Y/N)	
	•						
rovide Det	tailed Descri	ption:					
•							
,							
	rovide De	rovide Detailed Descri	rovide Detailed Description:	rovide Detailed Description:	rovide Detailed Description:	rovide Detailed Description:	rovide Detailed Description:

XTO Energy Inc. San Juan Basin (Northwest New Mexico) General Closure Plan For Below-Grade Tanks

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure requirements of below-grade tanks on XTO Energy Inc. (XTO) locations. This is XTO's standard procedure for all below-grade tanks. A separate plan will be submitted for any below-grade tank which does not conform to this plan.

General Plan

- XTO will close below-grade tanks within the time periods provided in 19.15.17.13 NMAC, or by an earlier date that the division requires because of imminent danger to fresh water, public health or the environment.
- 2. XTO will close a below-grade tank that does not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years after June 16, 2008, if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC.
- 3. XTO will close a permitted below-grade tank within 60 days of cessation of the below-grade tank's operation or as required by the transitional provisions of Subsection B of 19.15.17.17 NMAC in accordance with a closure plan that the appropriate division district office approves. The closure report will be filed on form C-144.
- 4. XTO will remove liquids and sludge from below-grade tanks prior to implementing a closure method and will dispose of the liquids and sludge in a division-approved facility. Approved facilities and waste streams include:

Envirotech Permit No. NM01-0011 and IEI Permit No. NM 01-0010B

Soil contaminated by exempt petroleum hydrocarbons

Produced sand, pit sludge and contaminated bottoms from storage of exempt wastes

Basin Disposal Permit No. NM01-005 Produced water

- 5. XTO will remove the below-grade tank and dispose of it in a division approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office has approved prior to removal. Any associated liners will be removed, properly cleaned and disposed of per 19.15.9.712 NMAC at San Juan County Landfill. Documentation of the final disposition will be included in the closure report.
- 6. XTO will remove any on-site equipment associated with a below-grade tank unless the equipment is required for some other purpose.
- 7. XTO will test the soils beneath the below-grade tank to determine whether a release has occurred. At a minimum 5 point composite sample will be collected along with individual grab samples from any area that is wet, discolored or showing other evidence of a release. Samples will be

XTO Energy Inc.
San Juan Basin (Northwest New Mexico)
General Closure Plan
For Below-Grade Tanks
Page 2

analyzed for BTEX, TPH and chlorides to demonstrate that the benzene concentration, as determined by EPA SW-846 methods 8021B or 8260B or EPA method that the division approves, does not exceed 0.2 mg/kg; total BTEX concentration, as determined by EPA SW-846 methods 8021B or 8260B or other EPA method that the division approves, does not exceed 50 mg/kg; the TPH concentration, as determined by EPA method 418.1 or other EPA method that the division approves, does not exceed 100mg/kg; and the chloride concentration, as determined by EPA method 300.1 or other EPA method that the division approves, does not exceed 250 mg/kg, or the background concentration, whichever is greater. XTO will notify the division of its results on form C-141.

- 8. If XTO or the division determines that a release has occurred, XTO will comply with 19.15.3.116 NMAC and 19.15.1.19NMAC as appropriate.
- 9. If the sampling program demonstrates that a release has not occurred or that any release does not exceed the concentrations specified in Paragraph (4) of Subsection E of 19.15.17.13 NMAC, XTO will backfill the excavation with compacted, non-waste containing, earthen material; construct a division prescribed soil cover; recontour and re-vegetate the site.
- 10. Notice of Closure operations will be given to the Aztec Division District III office between 72 hours and one week prior to the start of closure activities via email or verbally. The notification will include the following:
 - Operator's name
 - ii. Well Name and API Number
 - iii. Location by Unit Letter, Section, Township, and Range

The surface owner shall also be notified prior to the implementation of any closure operations of below-grade tanks as per the approved closure plan using certified mail, return receipt requested.

- 11. Re-contouring of location will match fit, shape, line, form and texture of the surrounding area. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be placed in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.
- 12. A minimum of 4 feet of cover shall be achieved and the cover shall include 1 foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater. Soil cover will be constructed to the site's existing grade and ponding of water and erosion of the cover material will be prevented with drainage control, natural drainages and silt traps where needed.
- 13. XTO will seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM or Forest Service stipulated seed mixes will be used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

XTO Energy Inc. San Juan Basin (Northwest New Mexico) General Closure Plan For Below-Grade Tanks Page 3

- 14. All closure activities will include proper documentation and be available for review upon request and will be submitted in closure report form to OCD within 60 days of closure of the below-grade tank. Closure report will be filed on form C-144 and incorporate the following:
 - i. Proof of closure notice to division and surface owner;
 - ii. Details on capping and covering, where applicable;
 - iii. Inspection reports;
 - iv. Confirmation sampling analytical results;
 - v. Disposal facility name(s) and permit number(s);
 - vi. Soil backfilling and cover installation;
 - vii. Re-vegetation application rates and seeding techniques, (or approved alternative to re-vegetation requirements if applicable);
 - viii. Photo documentation of the site reclamation.

