

1425

30-045-20091

E

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit B Sec. 9 Twp 29 Rng 10

Name of Well/Wells or Pipeline Serviced FEUILLE A #3, NYE #10, #292

cps 2150w

Elevation 5781' Completion Date 6/14/89 Total Depth 400' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 25' & 75'

Depths gas encountered: N/A


Type & amount of coke breeze used: N/A

Depths anodes placed: 365', 355', 345', 335', 325', 310', 300', 290', 260', 250'

Depths vent pipes placed: 390'

Vent pipe perforations: 380'

Remarks: gb. #1

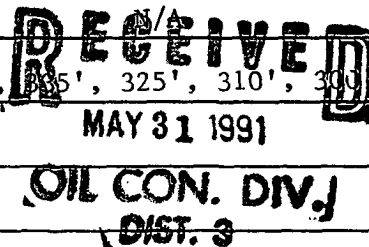

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

**WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG**

Drilling Log (Attach Hereto) ☒

Completion Date: 6-14-89

CPS #	Well Name, Line or Plant:	Work Order #	Static:	Ins. Union Check
2150-w	NYE # 292	3511A	600' w = .788	☒ Good ☐ Bad
	Fewille 'A' #3 PC	51669A		
	NYE # 10 PC	44860A		
Location:	Anode Size:	Anode Type:	Size Bit:	
B9-29-10	2" x 60"	Puriron	6 3/4"	
Depth Drilled:	Depth Logged:	Drilling Rig Time	Total Lbs. Coke Used:	Lost Circulation Mat'l Used:
400'	385'			
Anode Depth:				
# 1 365'	# 2 355'	# 3 345'	# 4 335'	# 5 325'
# 6 310'	# 7 300'	# 8 290'	# 9 260'	# 10 250'
Anode Output (Amps)				
# 1 4.9	# 2 6.0	# 3 4.7	# 4 6.0	# 5 4.9
# 6 4.2	# 7 4.4	# 8 4.0	# 9 4.6	# 10 5.6
Anode Depth:				
# 11	# 12	# 13	# 14	# 15
# 16	# 17	# 18	# 19	# 20
Anode Output (Amps)				
# 11	# 12	# 13	# 14	# 15
# 16	# 17	# 18	# 19	# 20
Total Circuit Resistance:			No. 8 C.P. Cable Used:	No. 2 C.P. Cable Used:
Volts 11.72	Amps 24.1	Ohms 486		

Remarks: Drilled 400', logged 385' Driller said water at 25' + 75'. Installed 390' of 1" PVC vent pipe, perforate bottom 380'


Flow / NEGATIVE TO Fewille A #3 & NYE #10 (EST. 750' + 500')

Rectifier Size: 60 V 30 A
 Addn'l Depth: _____
 Depth Credit: 115' 3.75
 Extra Cable: 310 20
 Ditch & 1 Cable: 315' 70
 25' Meter Pole: _____
 20' Meter Pole: 1
 10' Stub Pole: _____
 Junction Box: 1

All Construction Completed

[Signature]
 (Signature)

GROUND BED LAYOUT SKETCH

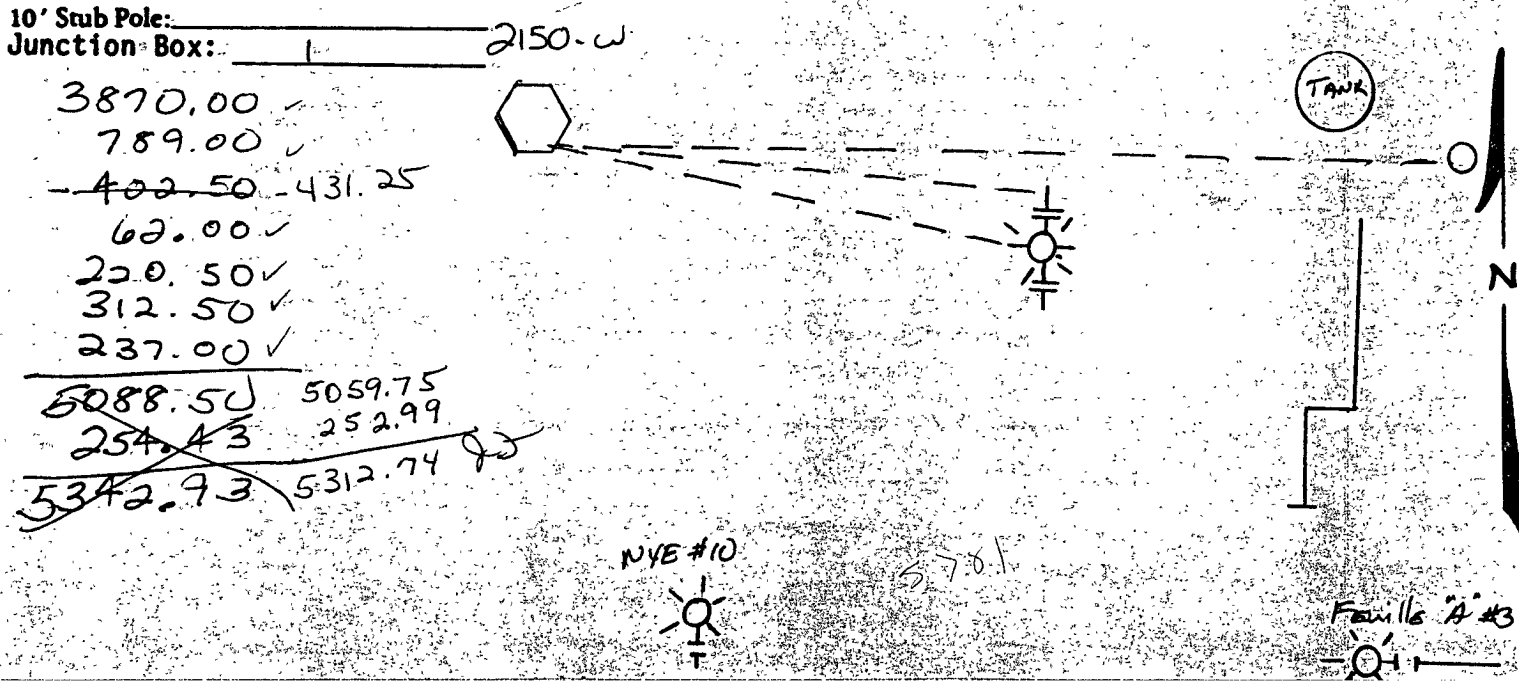

2150
O. CIASS DRILLING CO.

Drill No. 3

DRILLER'S WELL LOG

S. P. No. Nyc # 292 Date 6-14-89

Client Meridian Oil Co. Prospect _____

County SAN JUAN State New Mex

If hole is a redrill or if moved from original staked position show distance
and direction moved: _____

FROM	TO	FORMATION — COLOR — HARDNESS
0	40	SANDSTONE ✓
40	60	Shale
60	90	SANDSTONE ✓
90	110	Shale
110	125	SANDSTONE
125	155	Shale
155	175	SANDSTONE
175	275	Shale
275	300	SANDSTONE
300	330	SANDY SHALE
330	400	Shale

Mud _____ Brn _____ Lime _____

Rock Bit Number _____ Make _____

Remarks: Water @ 25' & 75'

Driller Rennie Brown