Permian Resources-Jalapeno 3 RP—Site Characterization and Remediation Closure Request	
Date of Request	8/2/24
Site Name	Permian Resources (OGRID 372165)- Jalapeno 3 RP
Permian Release ID No.	18316411845
Site GPS:	32.372090, -103.432341
County, State:	Lea County, New Mexico
Site PLSS Location	P-23-T22S-R34E, A-26-T22S-R34E
NMOCD Incident No.	nAPP2319523778

Introduction

Tellus Environmental (TE), on behalf of Permian Resources Operating, LLC (PR, OGRID 372165), submits this Site Characterization, Report of Remediation, and Closure Request for a release at Jalapeno 3 RP (Site) to the New Mexico Oil Conservation Division of the Energy, Minerals, and Natural Resources Department (NMOCD) District 1 Office. This Request provides documentation of delineation, sampling, remedial activities, and analyses that were conducted in the affected area at the Site. The Site is in Unit Letter P, Section 23 of Township 22 South and Range 34 East in Lea County, New Mexico. The GPS coordinates for the release site are 32.372089°N latitude and 103.432340°W longitude. The land surface on which the release occurred is private. The general location of the site is shown in Figure 1. The Permian Resources production facility and other site details are depicted in Figure 2.

Site Characterization

TE characterized the Site according to Table I, Closure Criteria for Soils Impacted by a Release, from New Mexico Administrative Code (NMAC) Title 19, Chapter 15, Part 29, Section 12 (NMAC 19.15.29.12). Depth to groundwater at the Site is conservatively estimated to be less than 50 feet below ground surface (bgs) based on the nearest water well data collected from the New Mexico Office of the State Engineer (NMOSE) and the United States Geological Survey National Water Information System (USGS NWIS).

Three Points of Diversion (PODs) listed on the web site of the NMOSE lie within one-half mile of the Site—CP-01684 POD1, CP-01718 POD1, and CP-01719 POD1. The first of these lists no data but a well depth of 300 feet bgs. The latter two of these PODs indicate water depths exceeding 800 feet bgs. Both have estimated yields of 100 gallons per minute or more. The map and other pertinent documents found during the above search are in Appendix A.

A search of the USGS National Water Information System did not find a groundwater site within one-half mile of the Jalapeno 3 RP site. USGS 322231103262601 22S.34E.23.23131 is the closest USGS NWIS site for which there are data regarding depth to water (DTW). It is approximately 0.72 mi. northwest of the Jalapeno 3 RP site. Depths to water measured in that well from 1968 to 2015 were between 17 and 27 bgs. The closest USGS NWIS site having data regarding DTW is 322738103263701 21S.34E.23.31000, which lies approximately 6.4 miles north of the site of the Jalapeno 3P release site. The map and other pertinent documents found during the above search are in Appendix A.

The affected area does not lie within any the following areas listed in NMAC 19.15.29.12 (4) that would require treatment of the release as if it had occurred where depth to groundwater was less than or equal to 50 feet bgs:

- within 300 feet of any continuously flowing watercourse or any other significant watercourse;
- within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark);
- within 300 feet from an occupied permanent residence, school, hospital, institution, or church;
- within 500 feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes;

- within 1000 feet of any fresh water well or spring;
- within incorporated municipal boundaries or within a defined municipal fresh water well field; covered under a municipal ordinance adopted pursuant to Section 3-27-3 NMSA 1978 as amended, unless the municipality specifically approves;
- within 300 feet of a wetland;
- within the area overlying a subsurface mine;
- within an unstable area; or
- within a 100-year floodplain.

Figures showing results of searches of the National Wetlands Inventory, the karst potential map, and the National Flood Hazard Layer of the Federal Emergency Management Agency (FEMA) are in Appendix A. The Site is located within an area of low karst potential and meets the closure criteria for depth to groundwater ≤50 feet bgs in Table 1 in NMAC 19.15.29.12. The soil closure criteria from that table and Restoration, Reclamation, and Re-vegetation criteria from NMAC 19.15.29.13 are listed below:

Table 1

Regulatory Standard	Chloride	TPH (GRO+DRO+MRO)	TPH (GRO+DRO)	BTEX	Benzene
19.15.29.12 NMAC Table I Closure Criteria for Soils Impacted by a Release (Depth to Water 51-100 feet bgs)	10,000 mg/kg	2500 mg/kg	1000 mg/kg	50 mg/kg	10 mg/kg
19.15.29.13 Restoration, Reclamation and Re-Vegetation (Impacted Area 0-4 Feet)	600 mg/kg	100 mg/kg	Not Defined	50 mg/kg	10 mg/kg

Release Information

Permian Resources Operating, LLC (PR) discovered the major release (25 bbl. or more) of approximately 13 bbl. of crude oil and 244 bbl. of produced water to the ground surface on June 21, 2023. A malfunction resulted in over-pressuring of the SWD system and rupturing of a Y in the Permian line before pressure could be relieved to the pit. All fluids released were outside of lined containment. Fluid recovery was initiated withing 45 minutes of the discovery. All manageable freestanding liquids were recovered. Approximately 4 bbl. of crude and 51 bbl. of produced water were recovered. Photos taken of this release upon its discovery are included in Appendix B.

On-site Assessment and Remediation Activities

Tellus Environmental (TE) began initial assessment of the affected area with collection of samples of soil from 17 auger holes (AH) on July 21, 2023. All samples collected from these auger holes were analyzed for benzene, toluene, ethylbenzene, and total xylenes (BTEX) according to method EPA 8021B, total petroleum hydrocarbons (TPH) according to method EPA 8015B, and chlorides according to method EPA 300.0 at Eurofins Environment Testing in Midland, Texas. Analytical results for these samples are in Table 2. A copy of the certified laboratory report for these samples is in Appendix C.

Removal of affected soil began on October 23, 2023 and continued through November 22, 2023. All excavated soil was staged on plastic sheeting. The excavation was to depths between one and three feet bgs over most of its area; however, excavation extended to greater depths where stained soil was visible in the excavation or analytical results exceeded closure criteria for this release. Extents of excavated areas are shown on Figure 1. Samples of soil were collected from the bottom of excavated areas to demonstrate vertical delineation and from walls of excavated areas to demonstrate lateral delineation within closure criteria for this site. Locations of samples collected for analyses in a laboratory are shown in figures 3 through 11. All samples collected from the excavation were analyzed for benzene, toluene, ethylbenzene, and total xylenes (BTEX) according to method EPA 8021B, total petroleum hydrocarbons (TPH) according to method EPA 8015M, and

chlorides according to method EPA 300.0 at Permian Basin Environmental Lab, LP in Midland, Texas. Analytical results for Initial samples collected at BH-45 @ 1FT, BH-422 @ 3FT, BH-423 @ 3FT, BH-424 @ 3FT, BH-425 @ 3FT, and NWW-1 @ 8 In. exceeded one or closure criteria from Table 1. The excavation was extended vertically or laterally in those areas and additional samples were collected on January 2 and February 19, 2024. All analytical results for bottom hole samples and wall samples collected during remediation of this release are in Table 3. Copies of certified laboratory reports for these samples are in Appendix C.

Importation of replacement soil to the site began on February 14, 2024. Backfilling of the excavation with replacement soil began on February 20 and concluded on March 7, 2024. The crown over the pipeline was built on March 11, 2024. Photos of backfilling activities are included in Appendix B.

PR will seed the prepared soils within the site but not used for operational purposes with a seed mixture representative of indigenous vegetation or another mixture approved by the landowner during the first favorable growing season. An application technique recommended by the seed dealer, or a superseding technique required by NMOCD will be used.

Periodic visits to the site will be conducted to determine the life-form ratio and the per cent vegetative cover. When it has been determined that vegetation has been established that reflects a life-form ratio of plus or minus fifty percent of pre-disturbance levels and a total percent plant cover of at least seventy percent of pre-disturbance levels, excluding noxious weeds, a Final Reclamation Report will be submitted to NMOCD.

Analytical results of samples collected from the bottom of the excavated areas and from their walls meet the required closure criteria for benzene, BTEX, TPH (GRO+DRO+MRO), and chlorides noted in Table 1 above.

Waste Management

Approximately 3770 cubic yards of impacted soil were disposed at Northern Delaware Basin Landfill (NMOCD Permit Number NM163) in Jal, New Mexico between December 15, 2023 and January 10, 2024. Copies of waste manifests for transportation of impacted soil to the disposal facility are in Appendix D.

Request for Closure

Site Characterization, vertical and lateral delineation, and remediation of this release have been conducted at the Jalapeno 3P site in accordance with applicable NMOCD regulation and guidance. Documentation provided in this report supports this request, by Tellus Environmental on behalf of Permian Resources, that Incident nAPP2319523778 be closed with no further remedial action.

Respectfully,

Jamey Fowler

Attachments:
Figure 1—Site Location Map--
Figures 2—Map of Excavations
Figures 3 through 11—Maps Excavations and Sample Locations
Table 2— Summary of Analytical Results in Soil—Auger Holes
Table 3— Summary of Analytical Results in Soil—Bottom Hole and Wall Samples
Appendix A—Site Characterization Documentation
Appendix B—Photographic Log
Appendix C—Certified Laboratory Reports
Appendix D—Waste Transportation Manifests

Figures

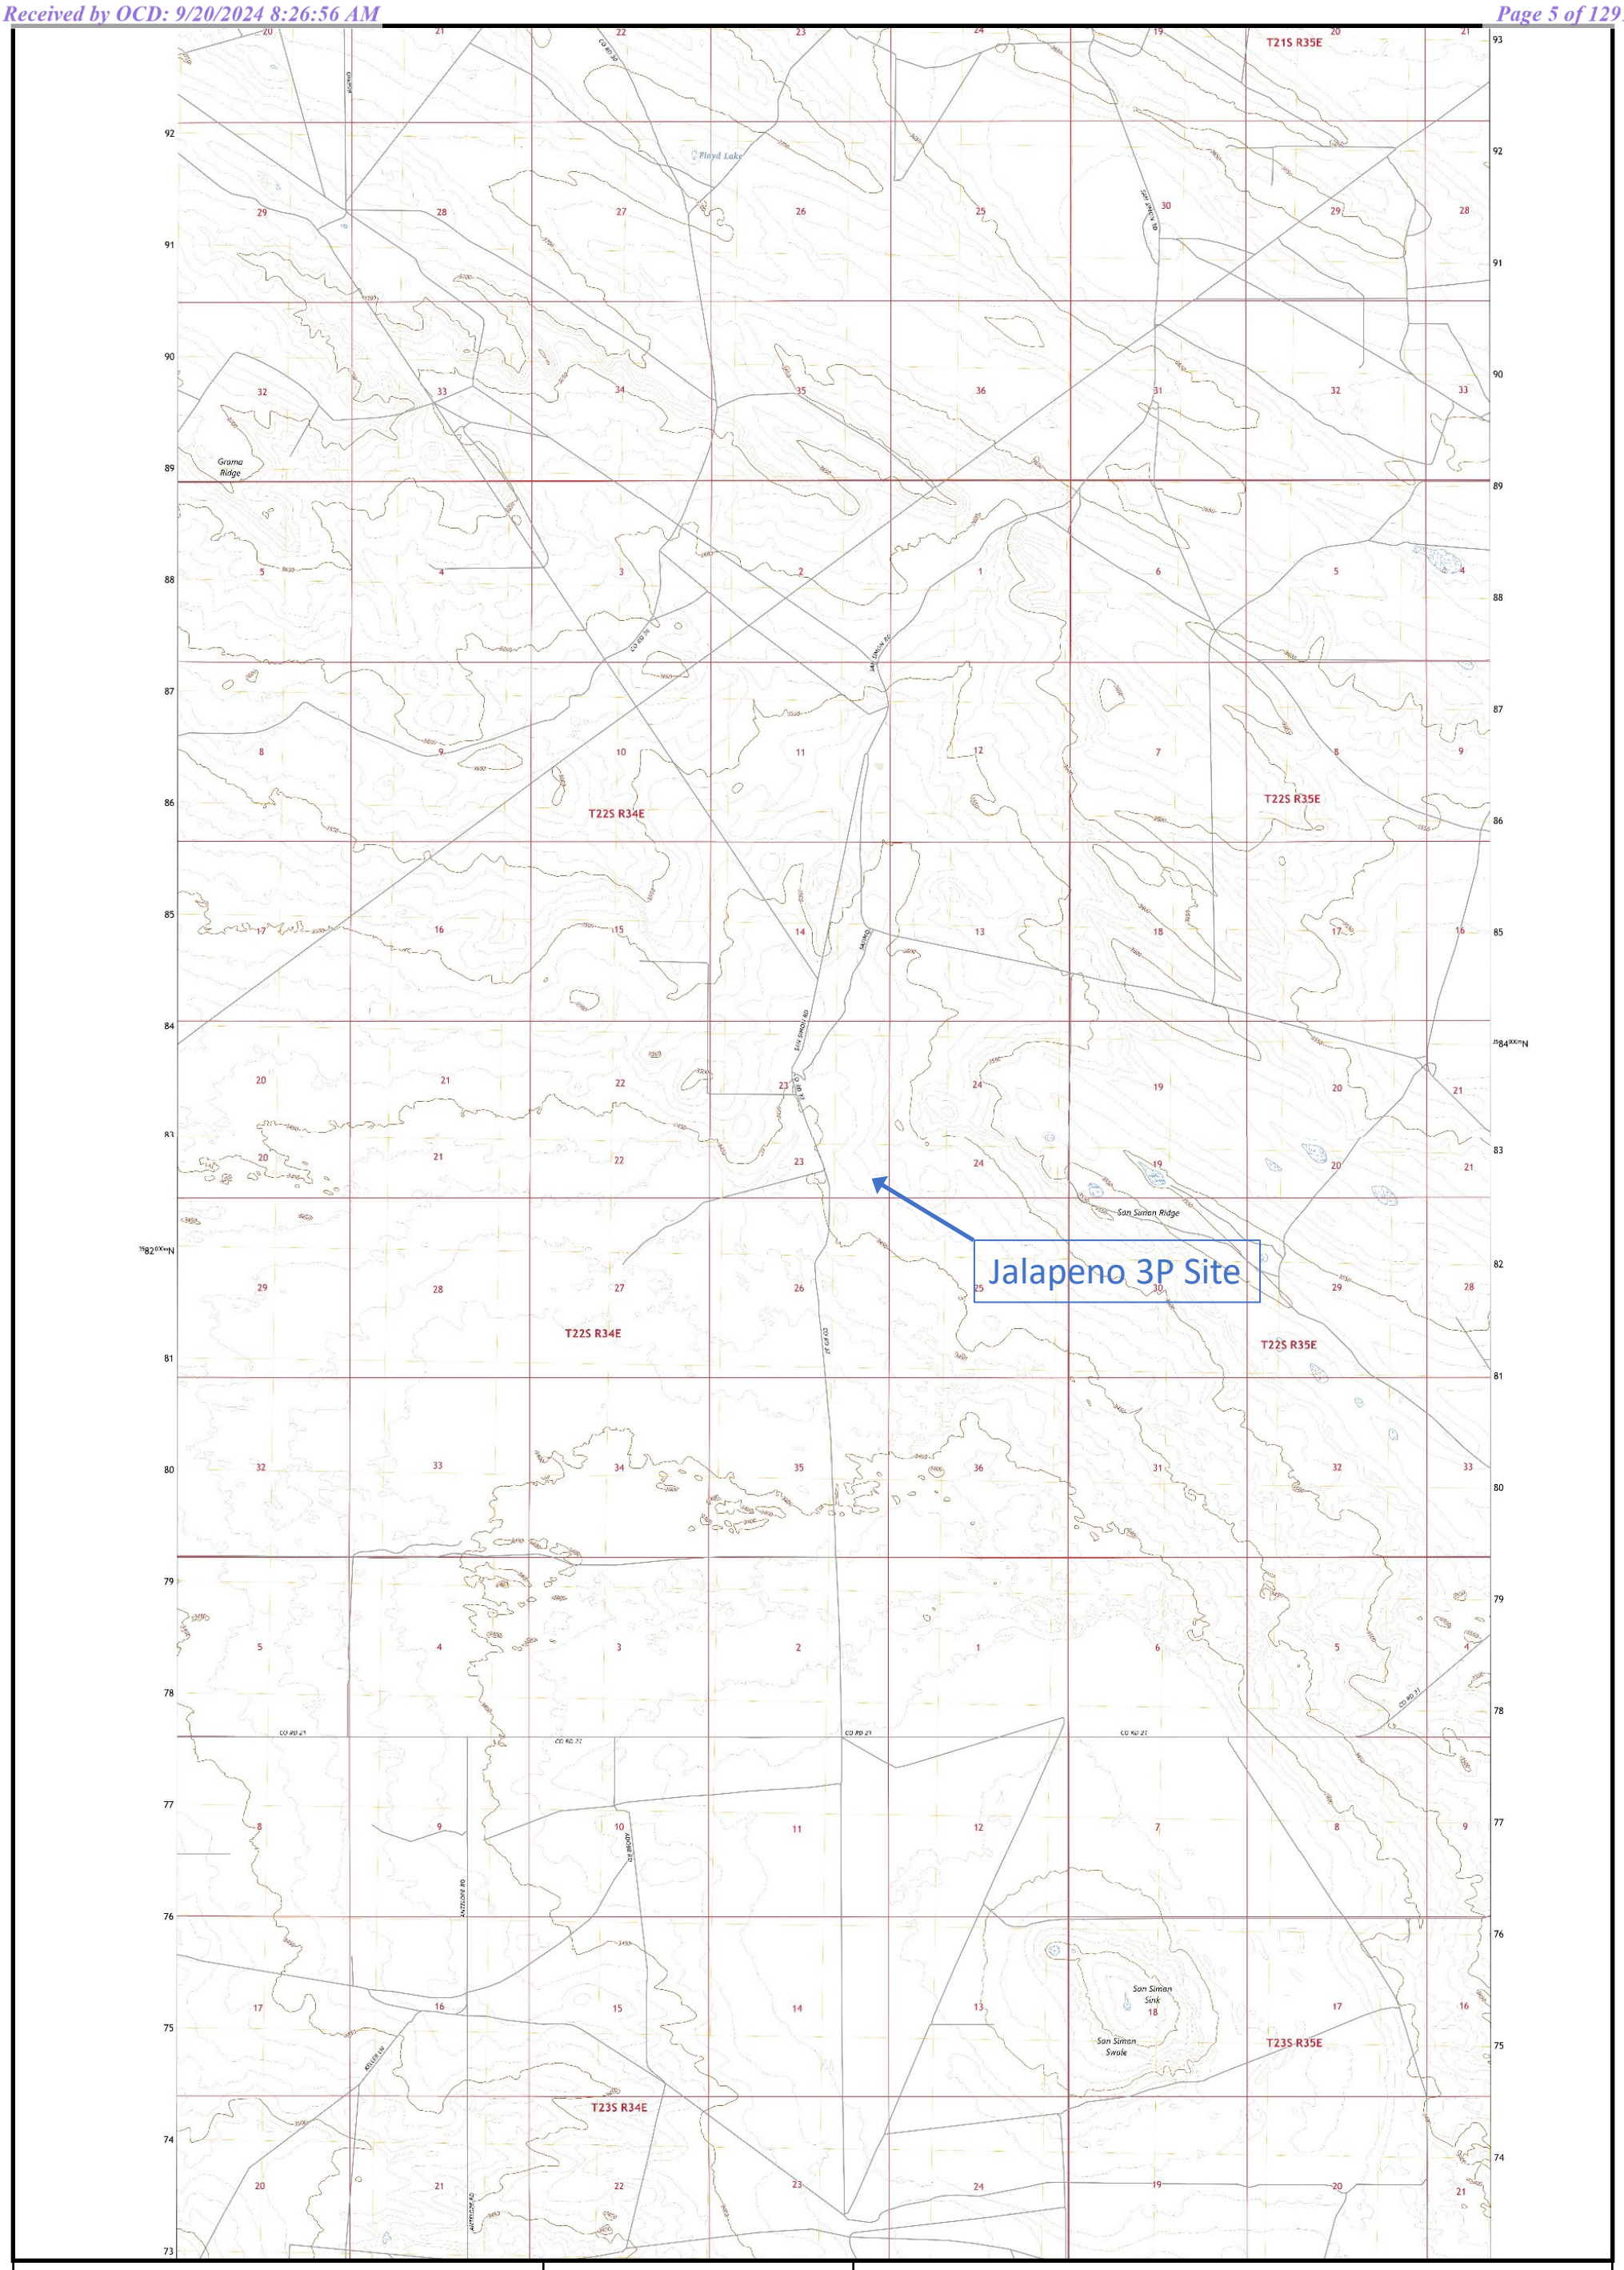

Permian Release ID No. 18316411845	5280 Feet	Figure 1. Site Location Map
Photo Sources: USGS San Simon Ranch Quadrangle 7.5' 20230703 USGS San Simon Sink Quadrangle 7.5' 20230703	TELLUS ENVIRONMENTAL	Permian Resources-Jalapeno 3P Release GPS 32.372089 -103.432340 Lea County, New Mexico
Date: 7/25/24		

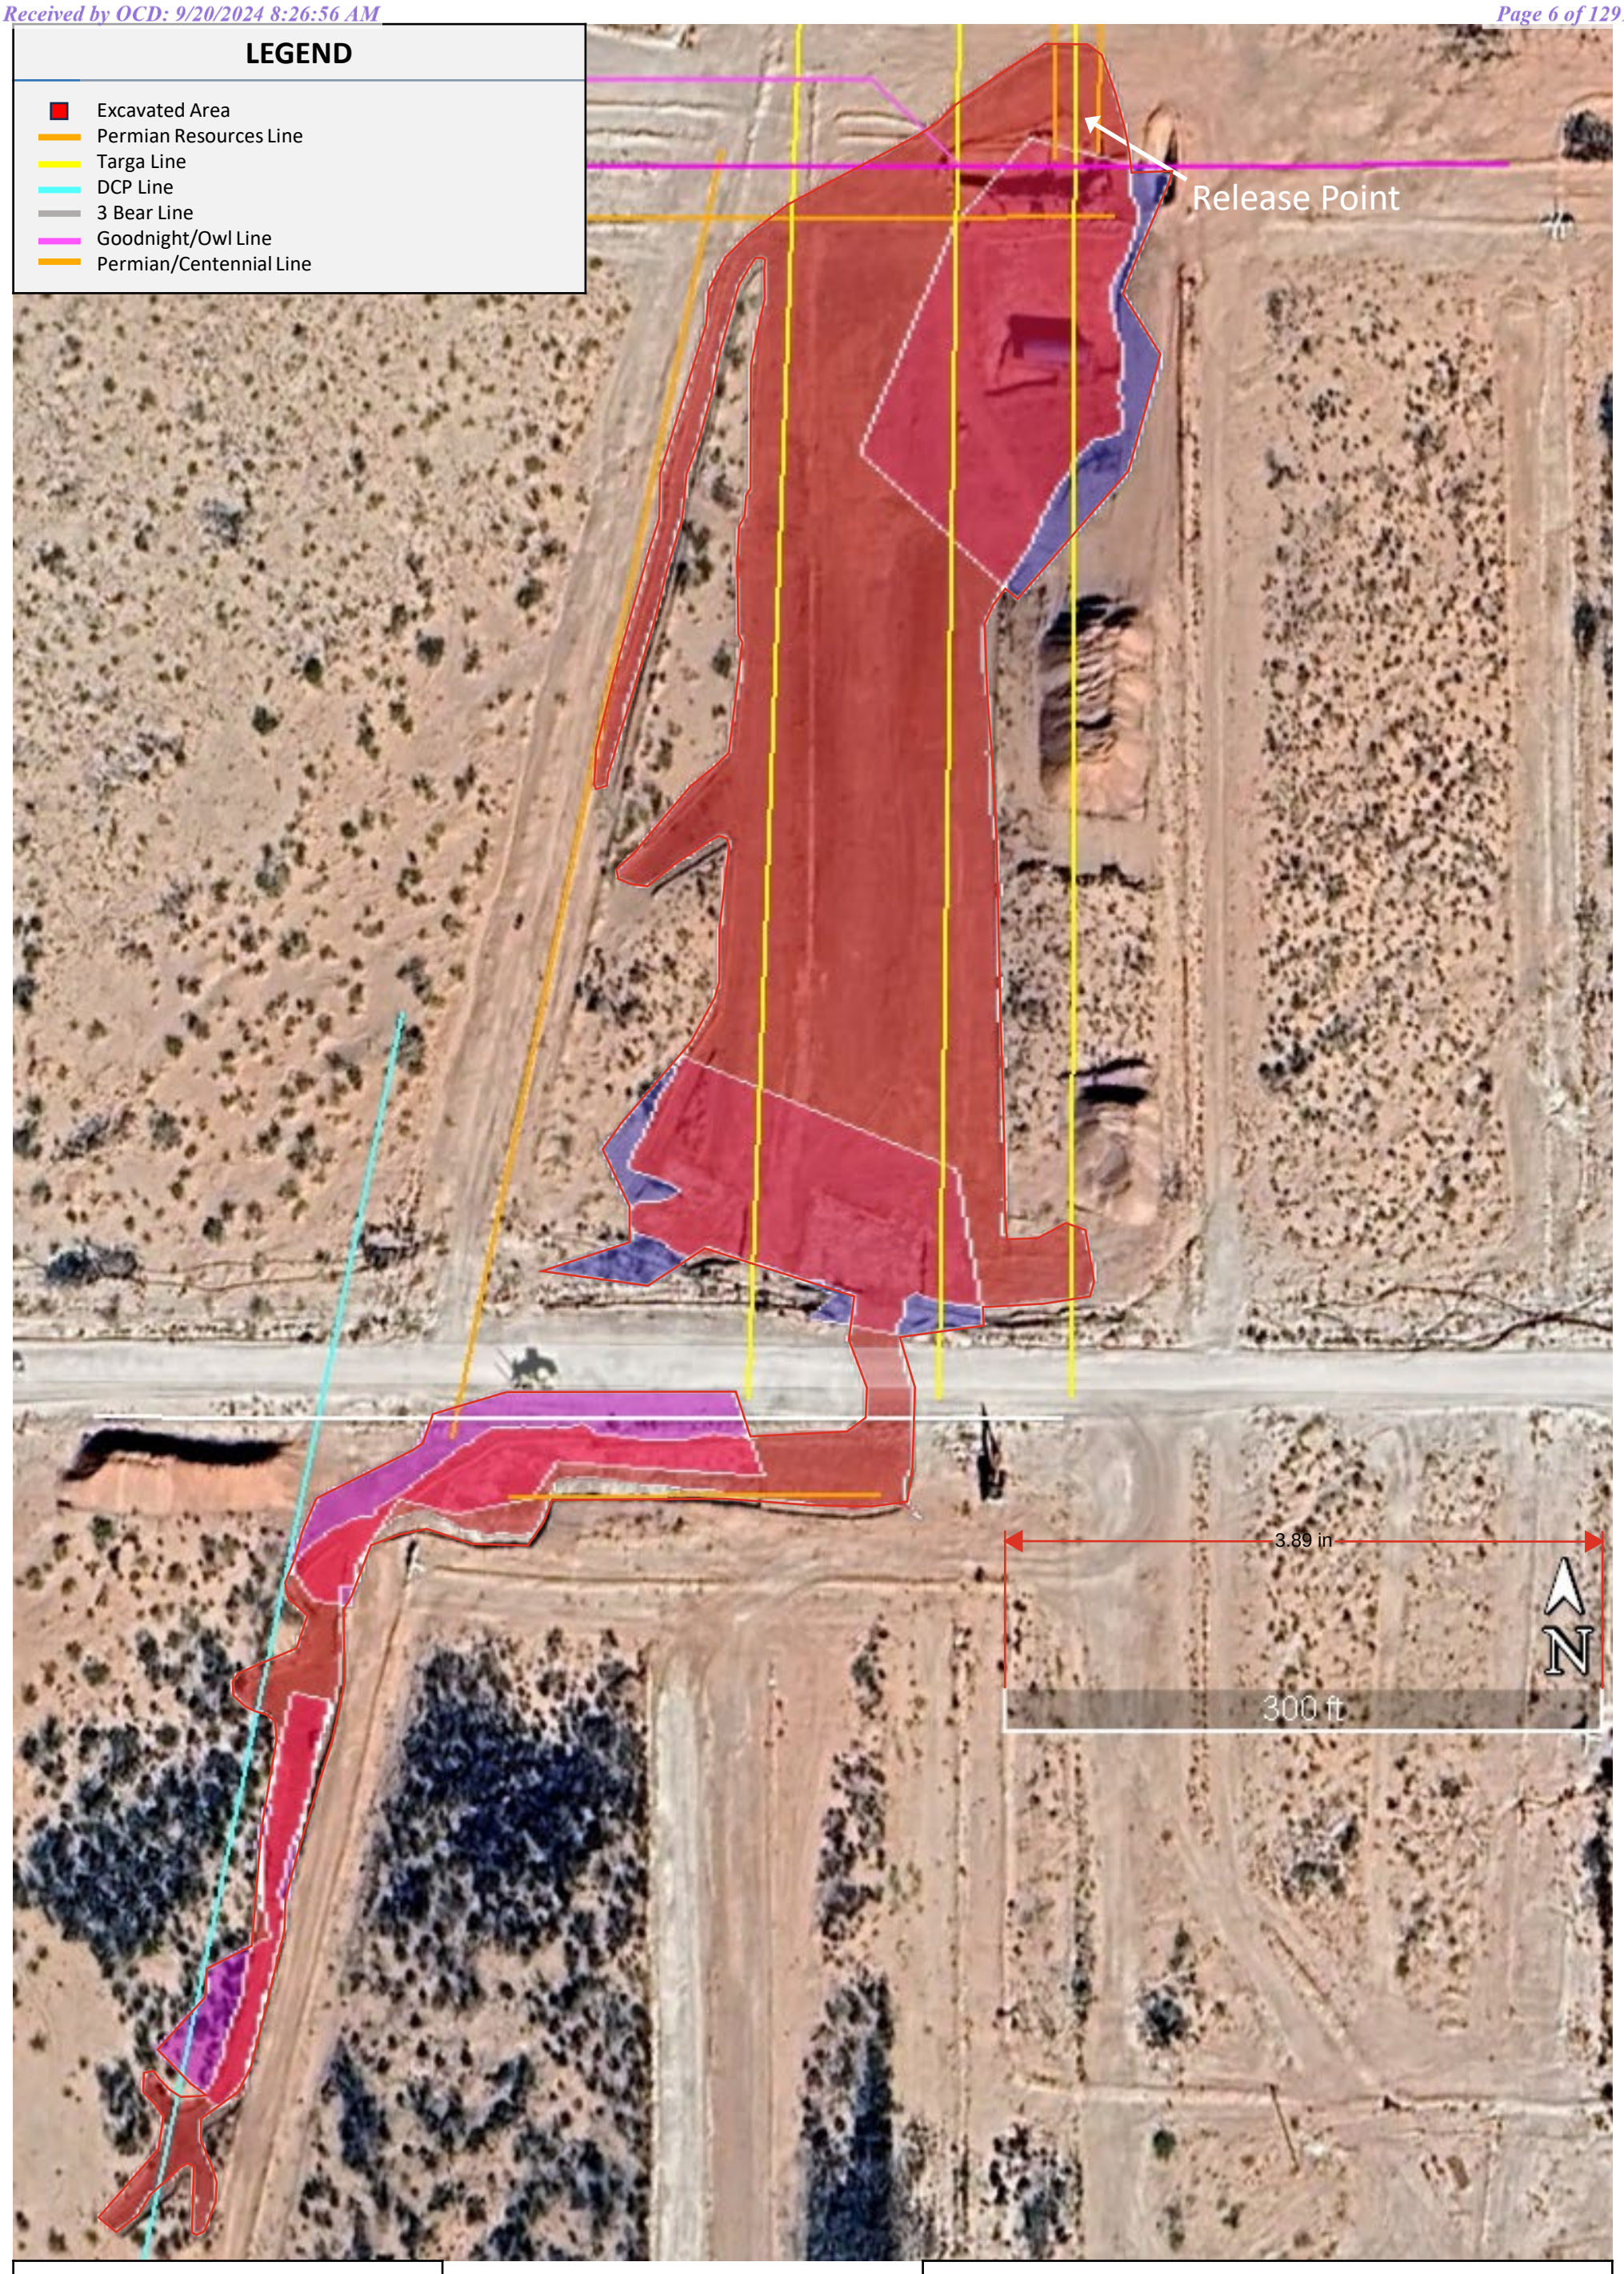

Permian Release ID No. 18316411845
Photo Source: Google Earth
Date: 6/7/24

Figure 2. Map of Excavations

Jalapeno 3 RP Release
GPS 32.372090°, -103.432341°
Lea County, New Mexico

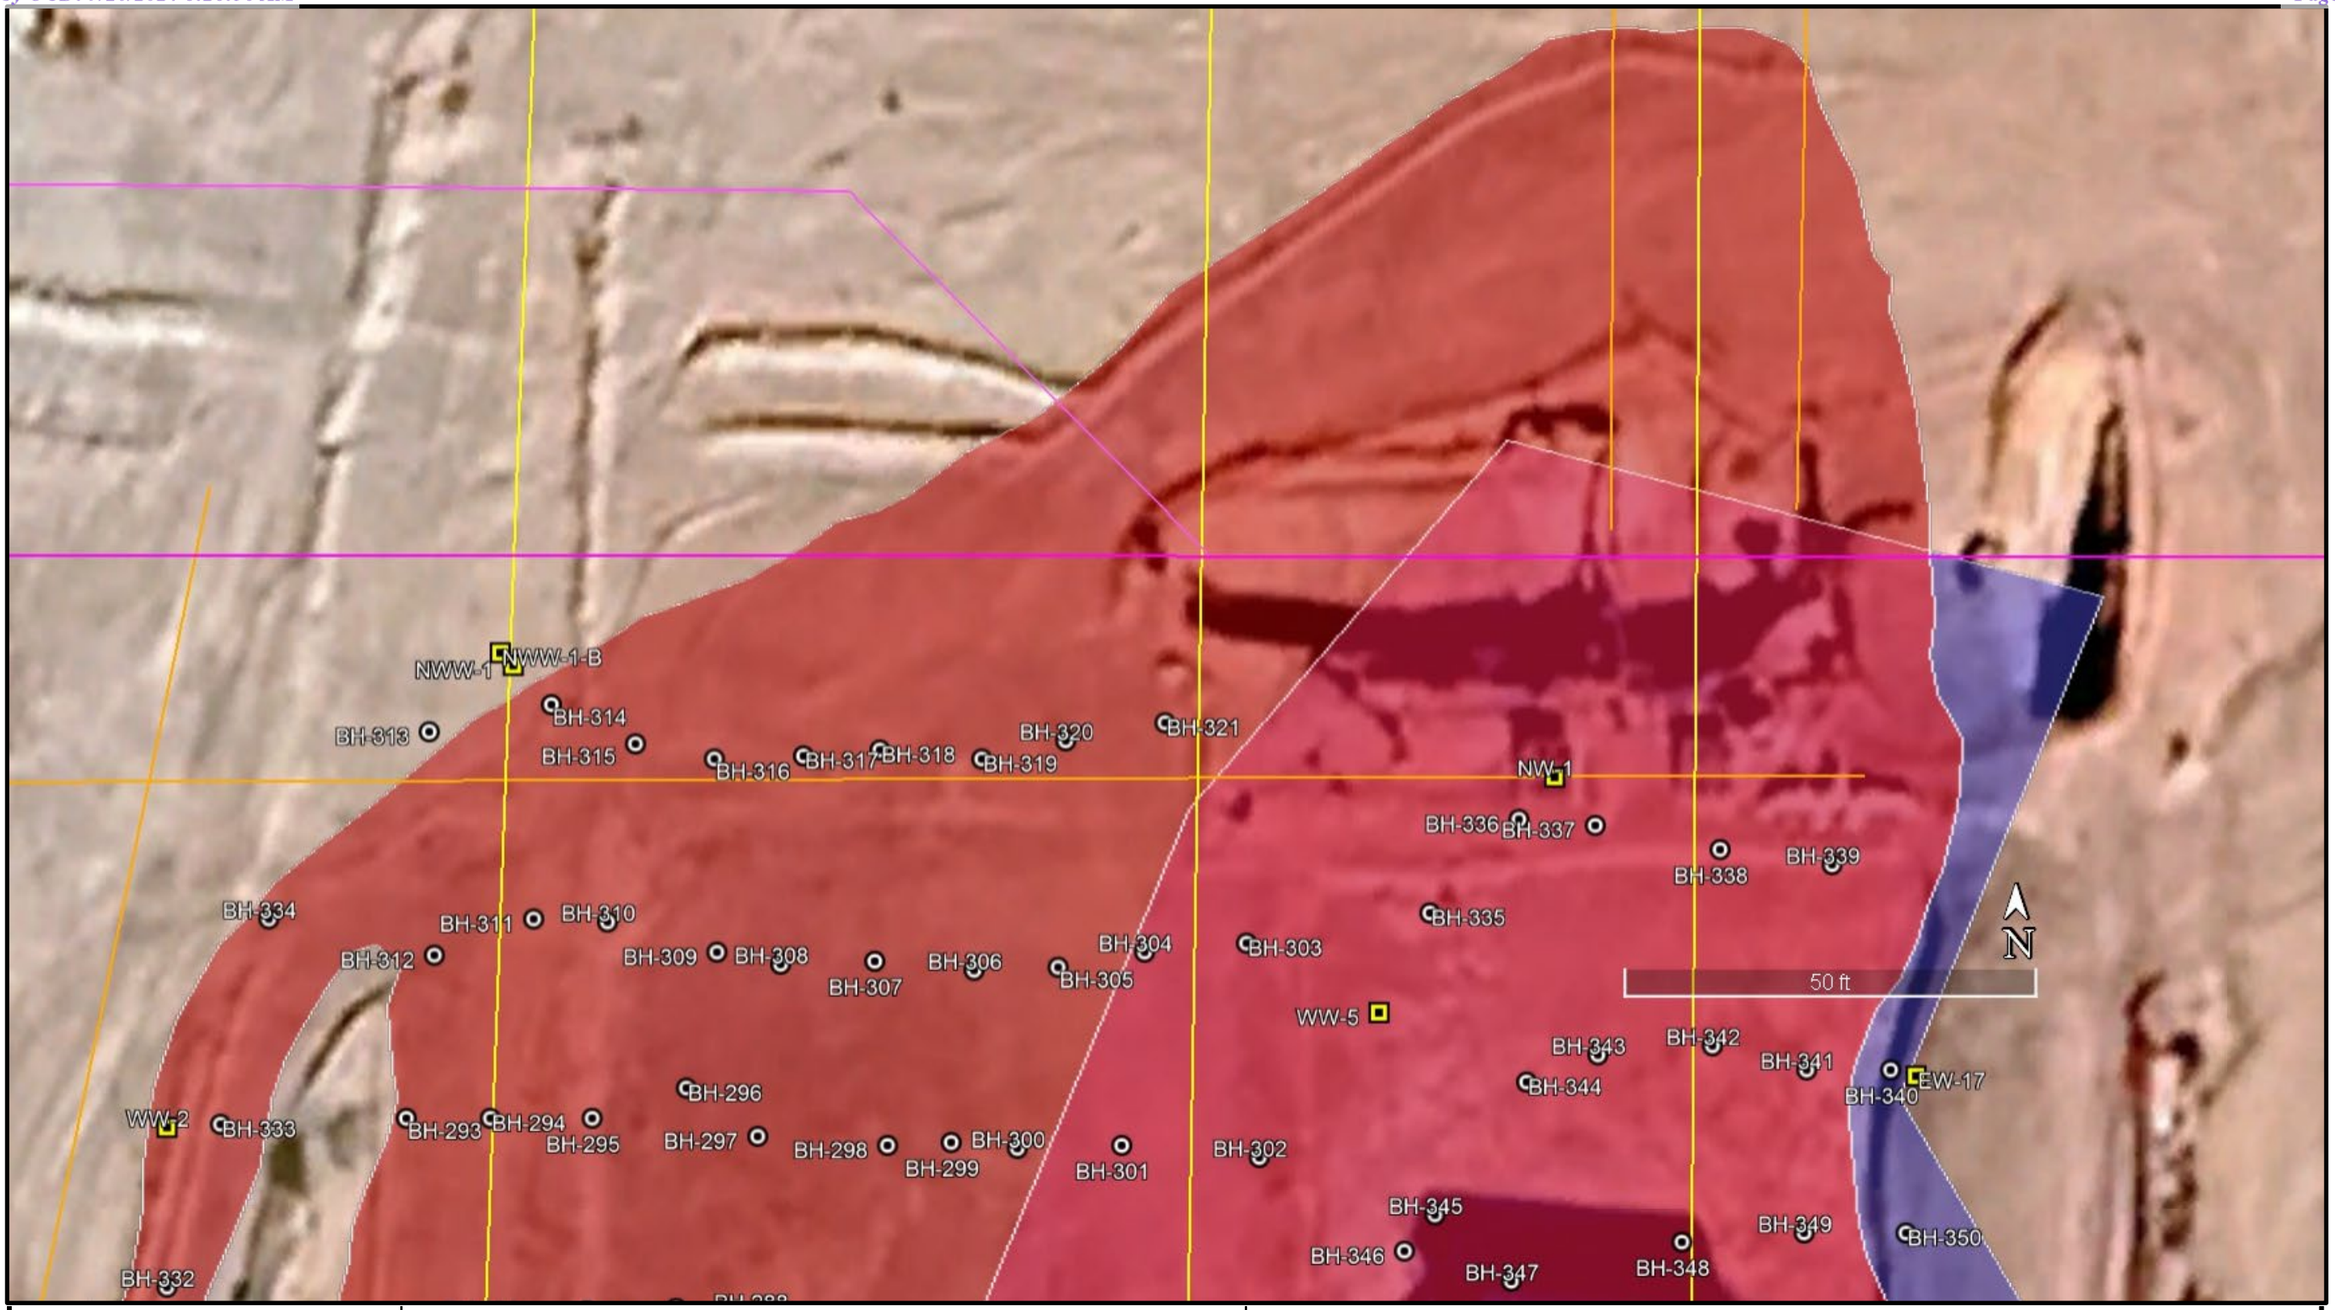

Permian Release ID No. 18316411845	**LEGEND**	TELLUS ENVIRONMENTAL	Figure 3: Map of Excavation and Sample Locations
Photo Source: Google Earth	Excavated Areas Bottom Hole (BH) or Auger Hole (AH) Sample Wall Sample		Jalapeno 3 RP Release GPS 32.372090°, -103.432341° Lea County, New Mexico
Date: 6/7/24			

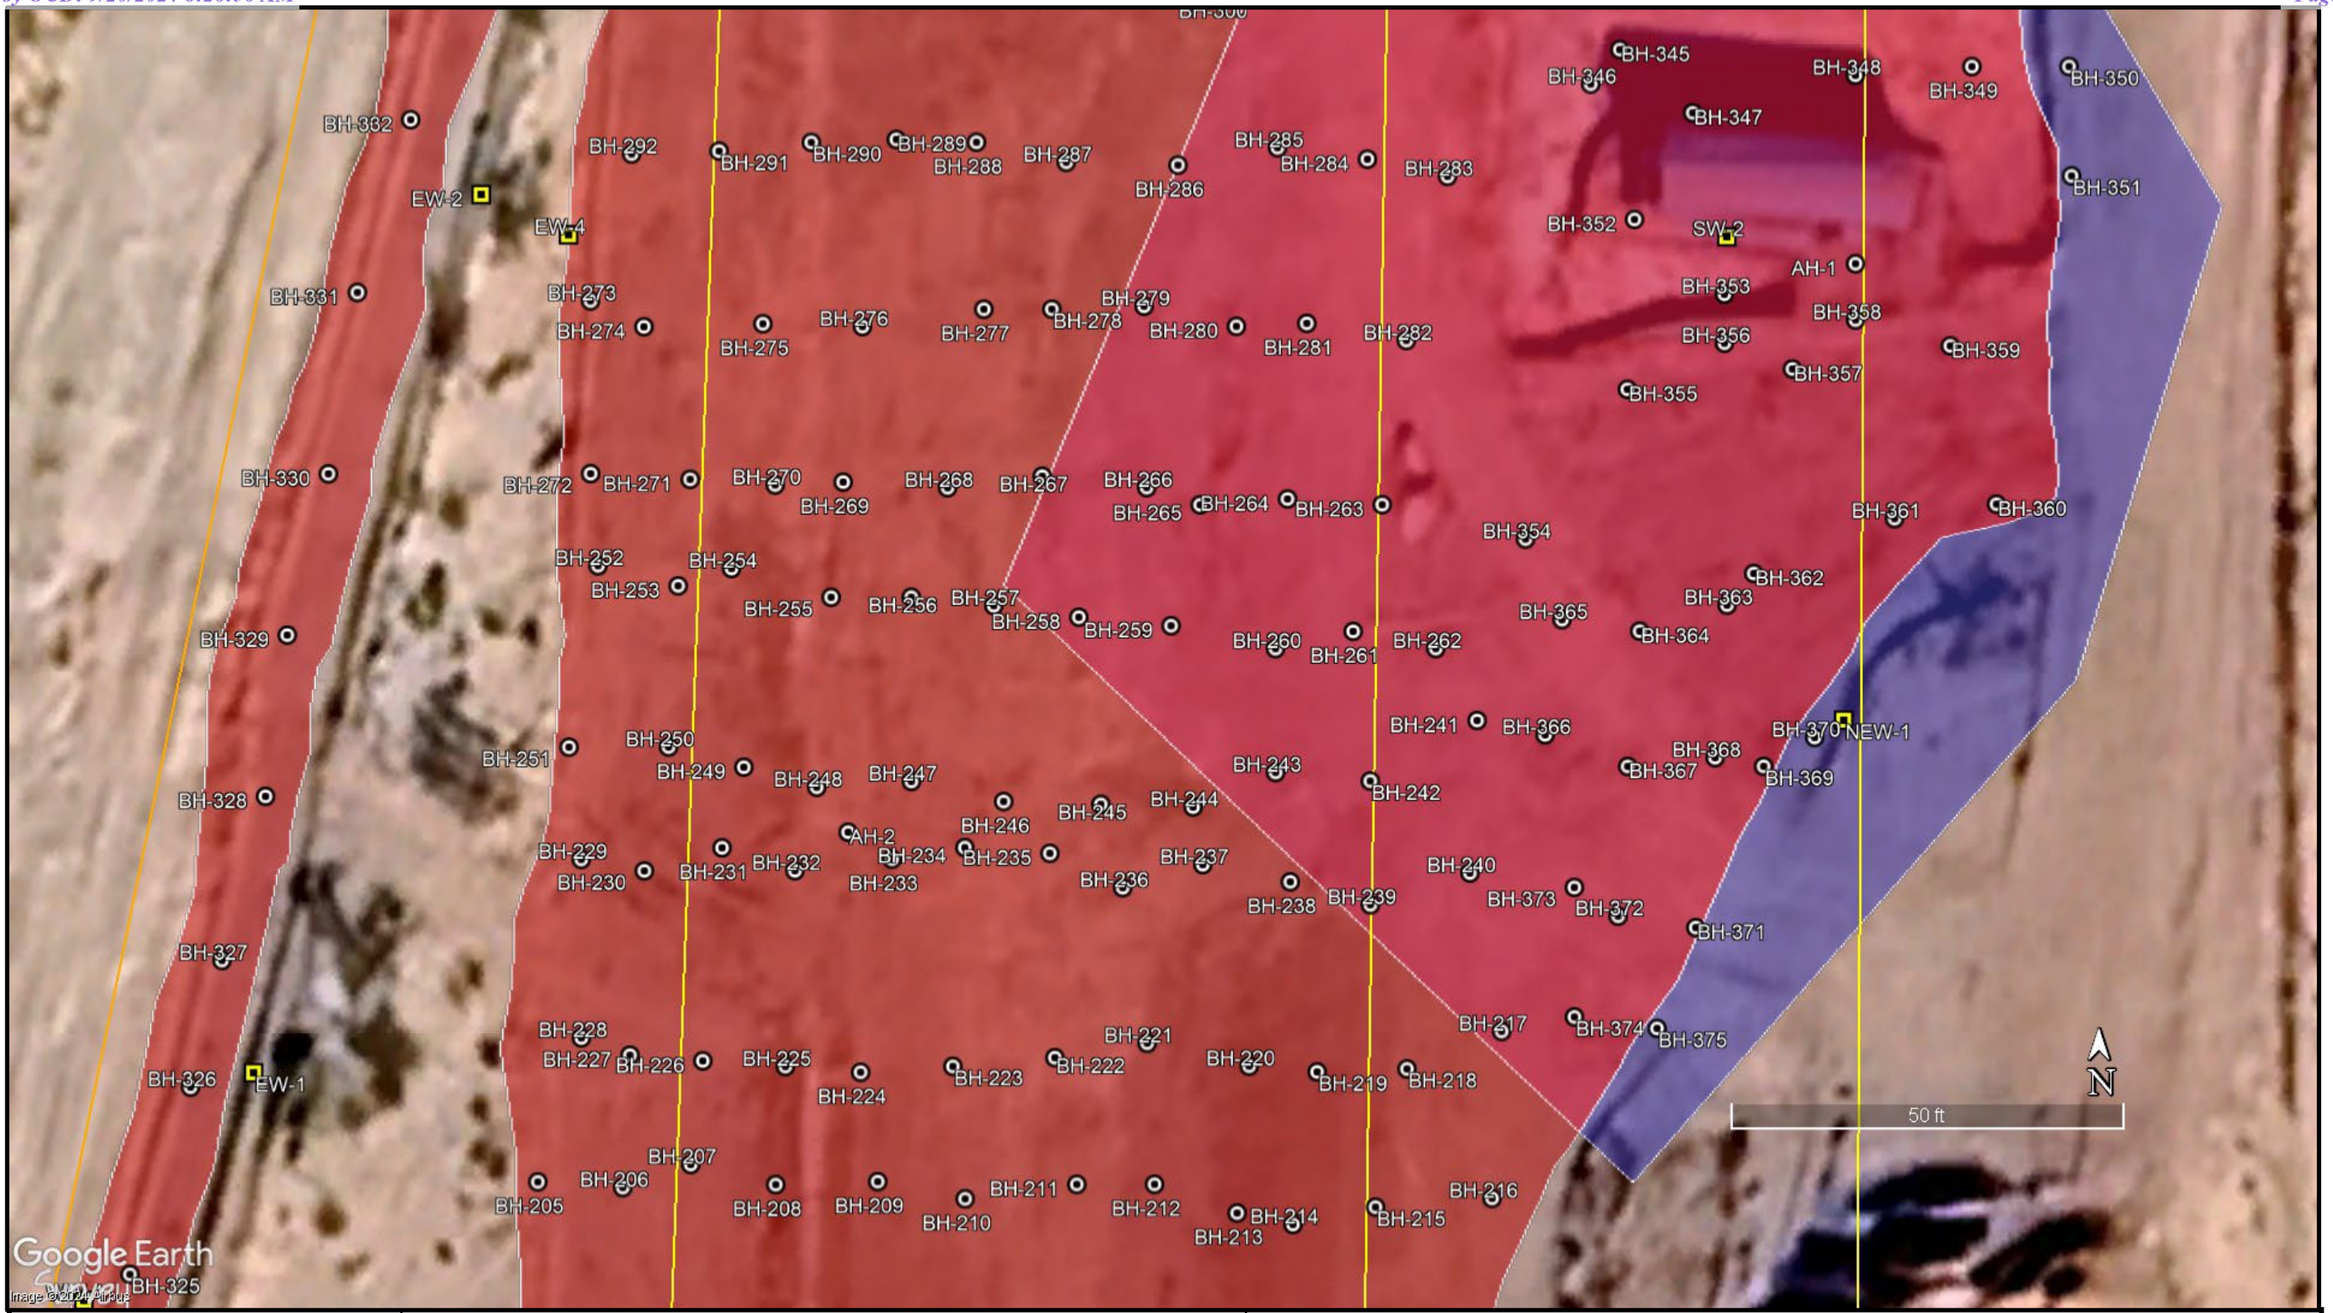

Permian Release ID No. 18316411845 **Photo Source: Google Earth** **Date: 2/26/24**	**LEGEND** Excavated Areas Bottom Hole (BH) or Auger Hole (AH) Sample Wall Sample	TELLUS ENVIRONMENTAL	Figure 4: Map of Excavation and Sample Locations Jalapeno 3 RP Release GPS 32.372090°, -103.432341° Lea County, New Mexico

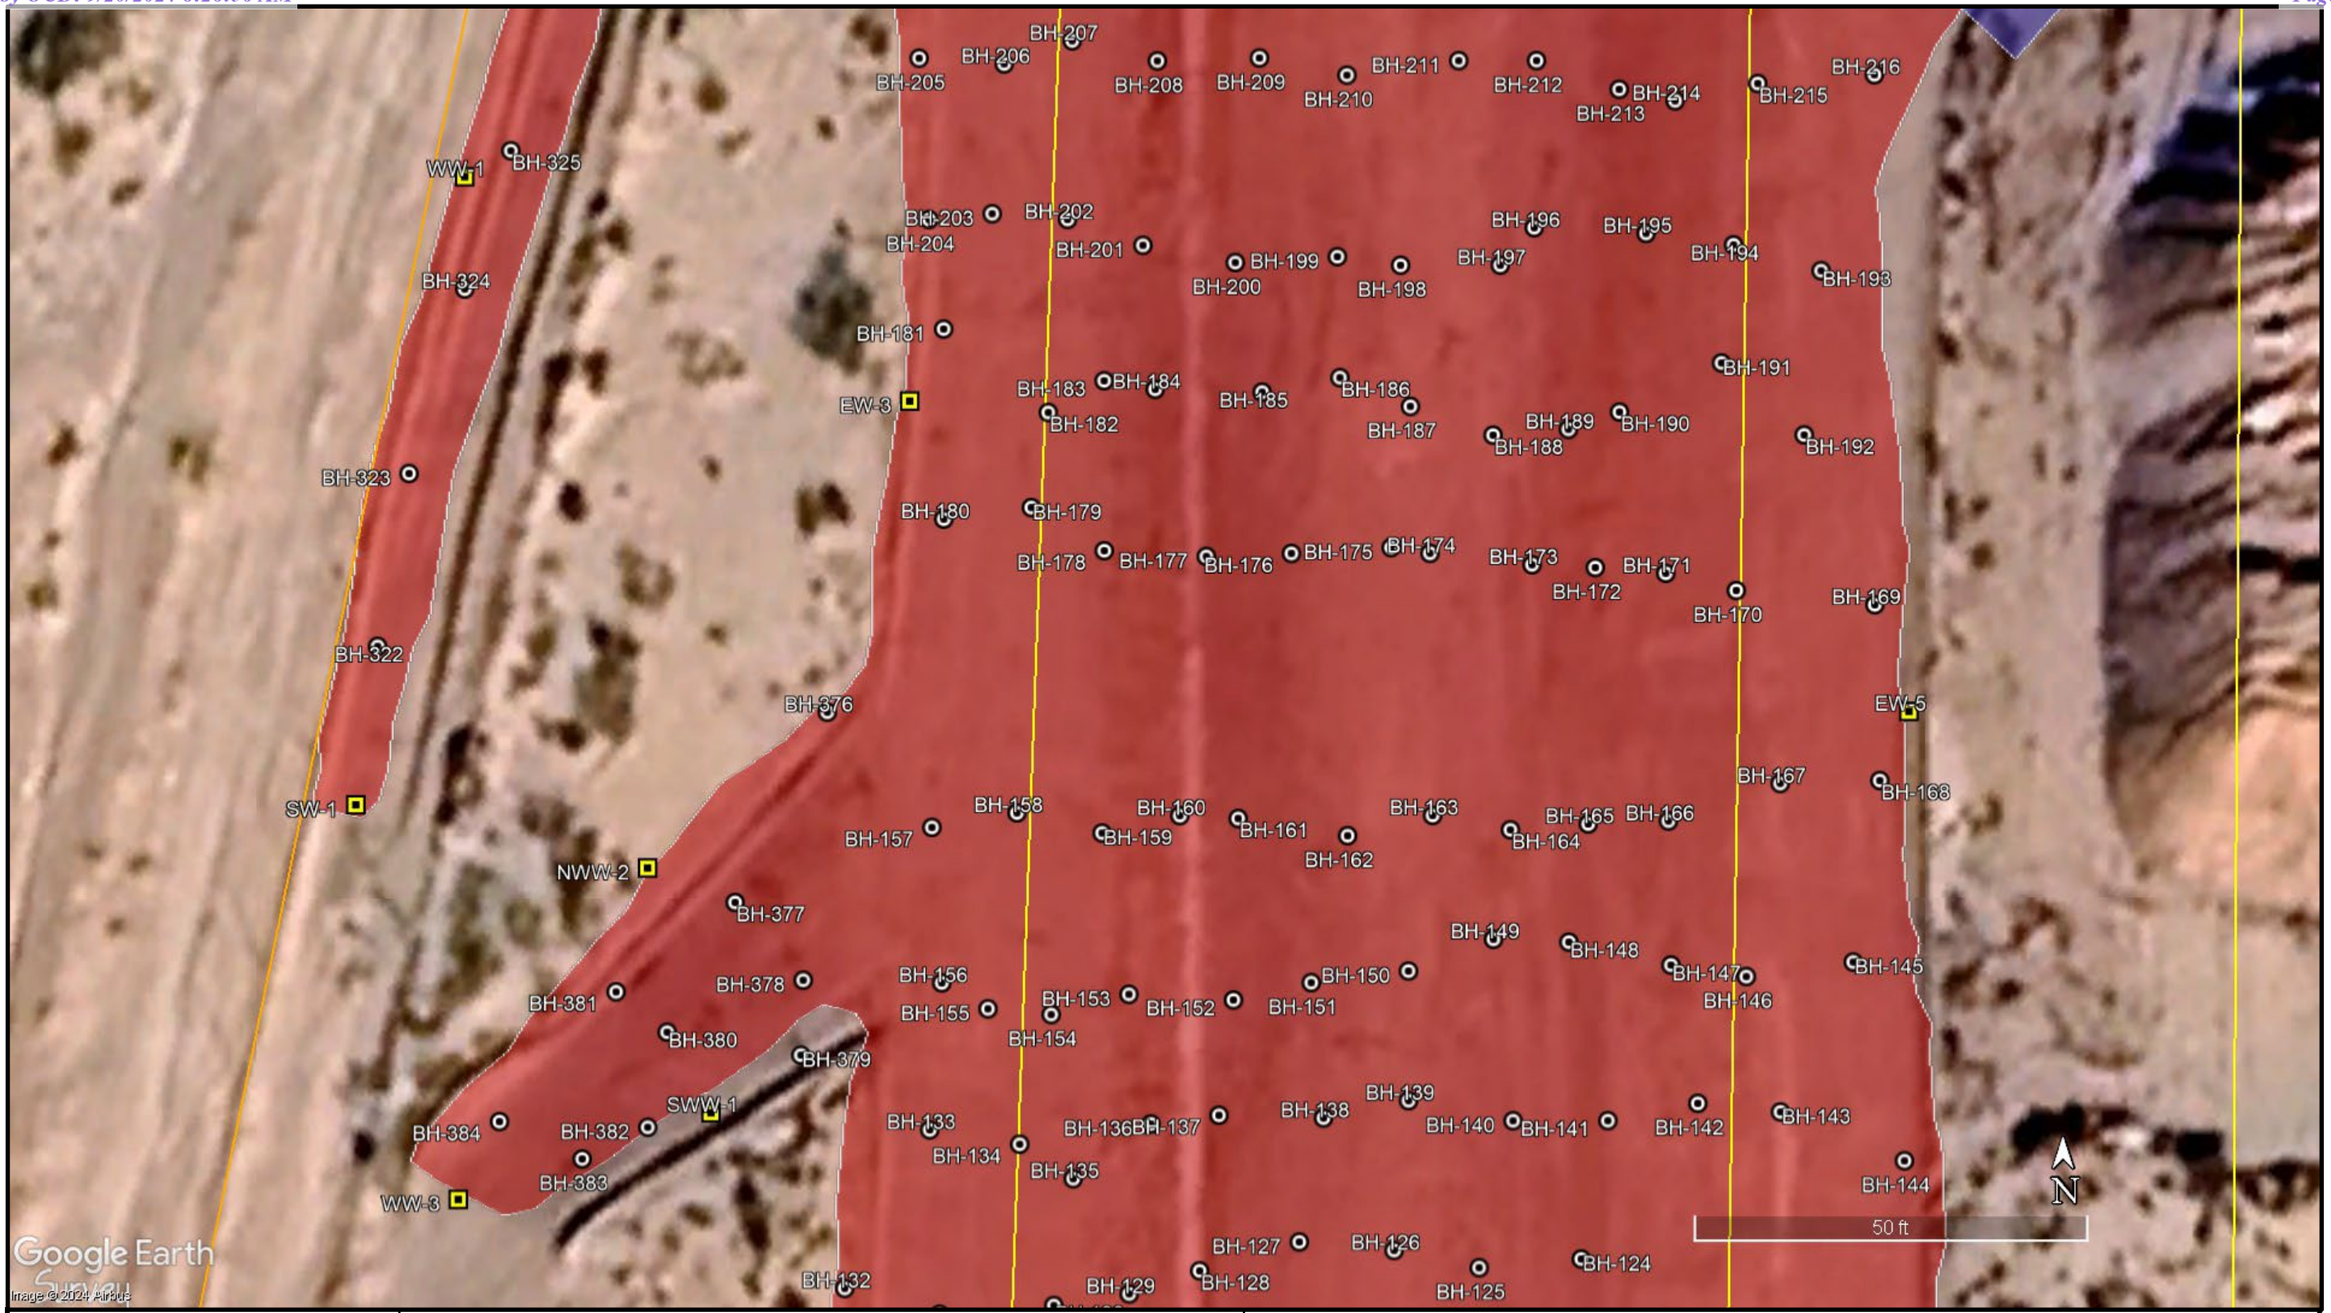

Permian Release ID No. 18316411845	**LEGEND**	TELLUS ENVIRONMENTAL	Figure 5: Map of Excavation and Sample Locations
Photo Source: Google Earth	Excavated Areas Bottom Hole (BH) or Auger Hole (AH) Sample Wall Sample		Jalapeno 3 RP Release GPS 32.372090°, -103.432341° Lea County, New Mexico
Date: 6/7/24			

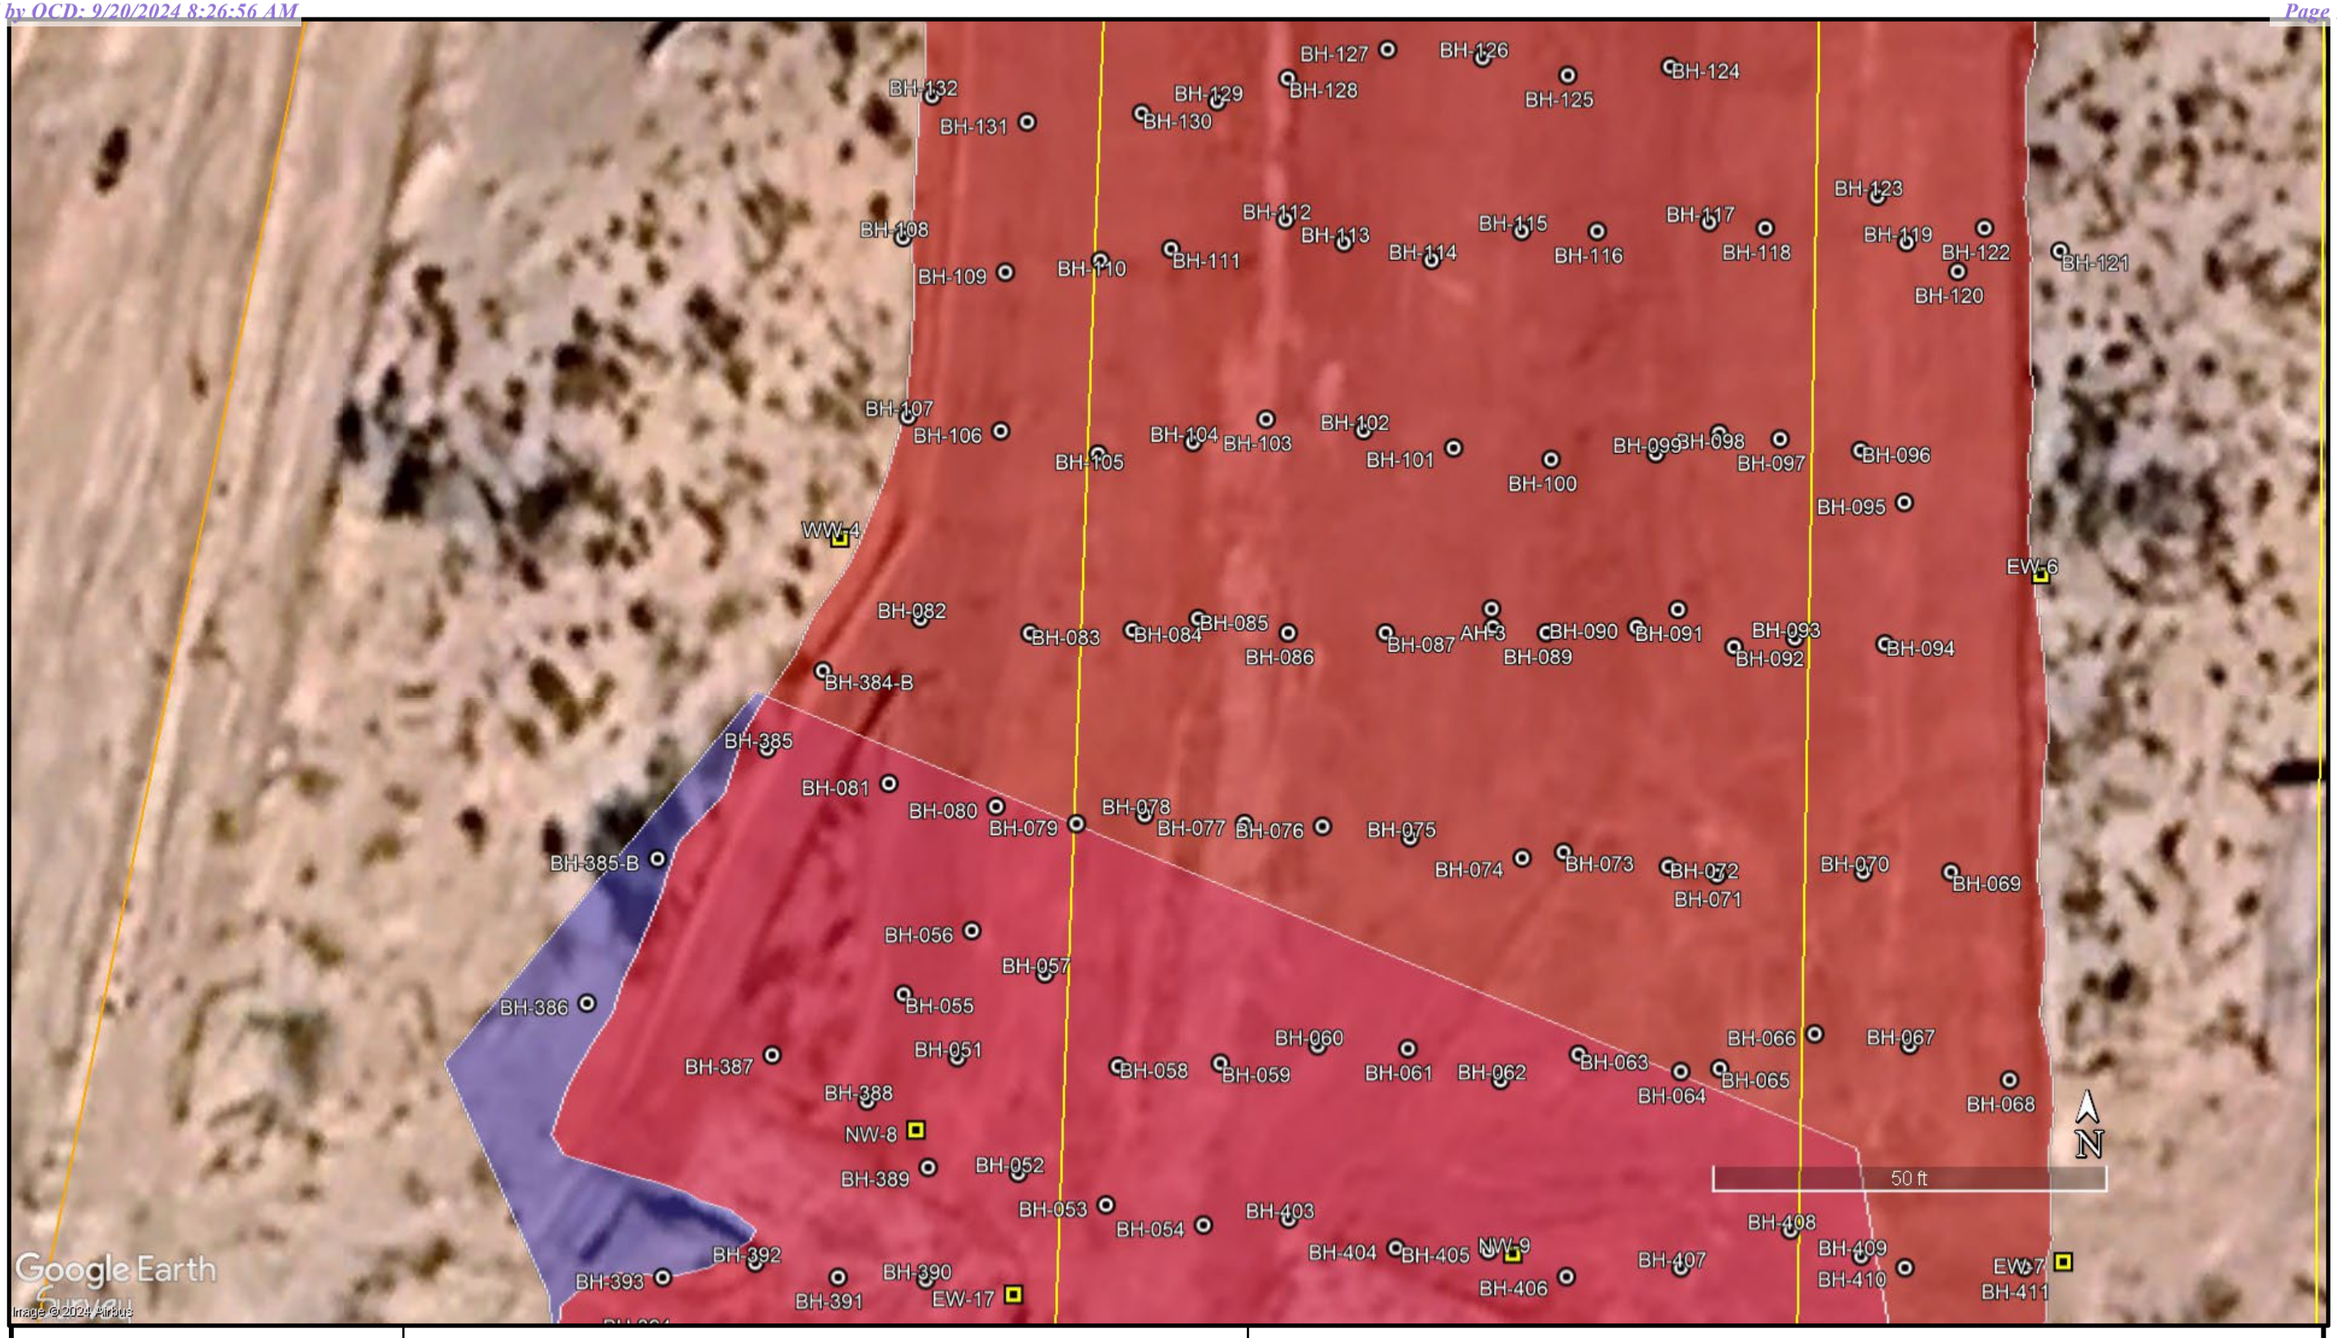

Permian Release ID No. 18316411845	**LEGEND**	Figure 6: Map of Excavation and Sample Locations
Photo Source: Google Earth	Excavated Areas Bottom Hole (BH) or Auger Hole (AH) Sample Wall Sample	Jalapeno 3 RP Release GPS 32.372090°, -103.432341° Lea County, New Mexico
Date: 6/7/24		

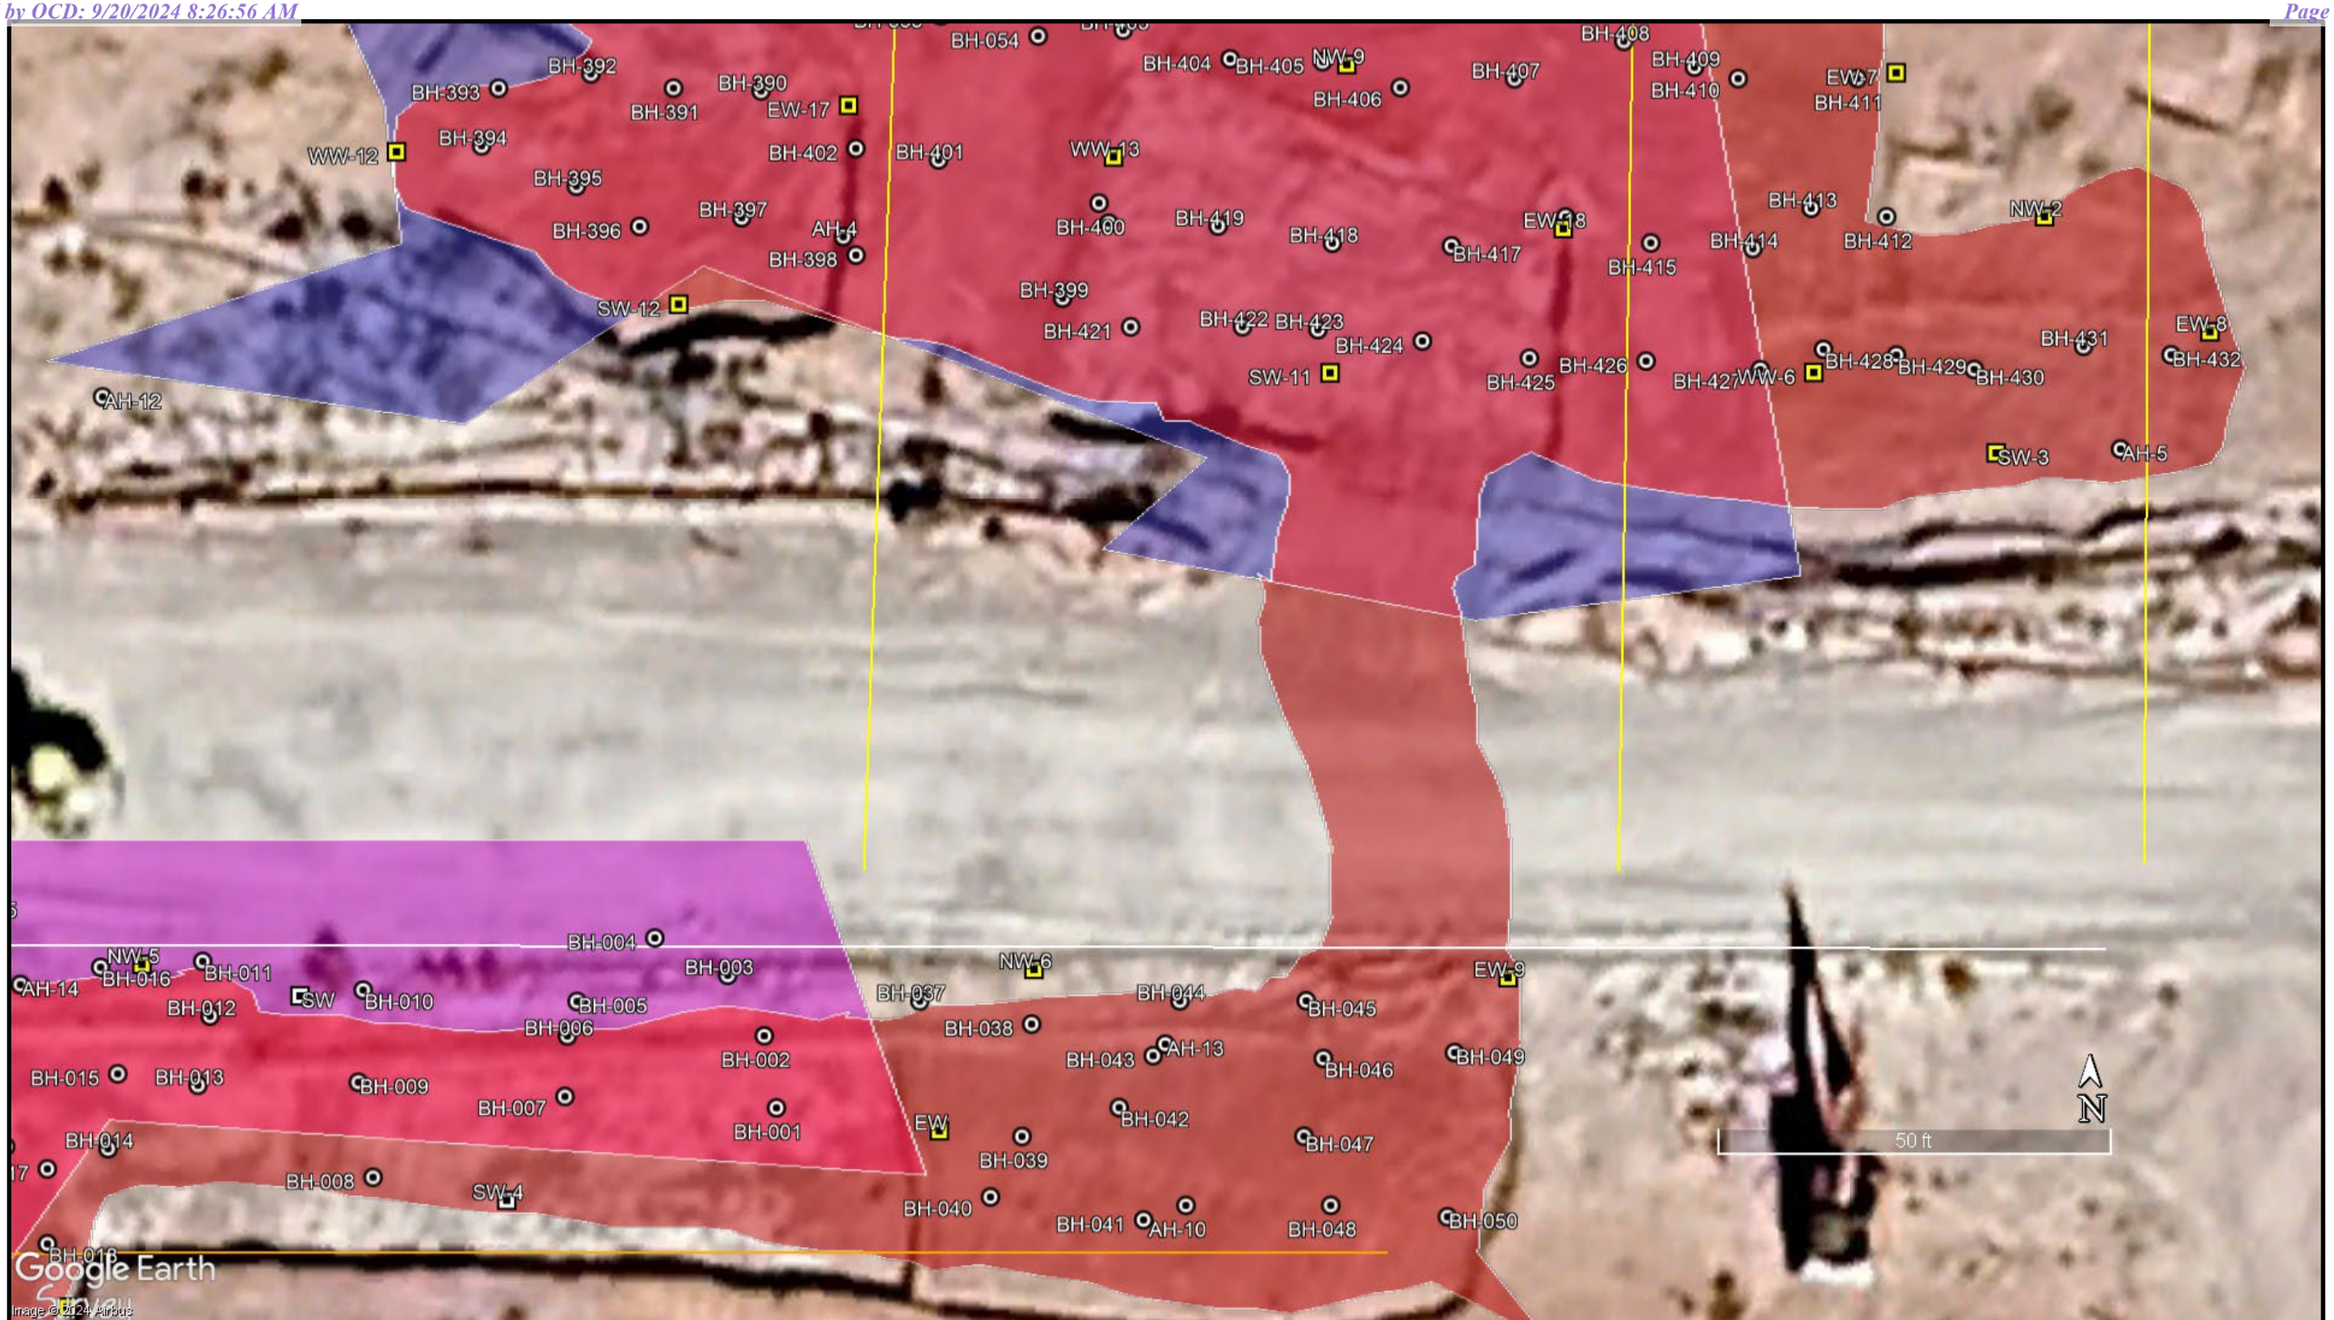

Permian Release ID No. 18316411845	**LEGEND**	TELLUS ENVIRONMENTAL	Figure 7: Map of Excavation and Sample Locations
Photo Source: Google Earth	Excavated Areas Bottom Hole (BH) or Auger Hole (AH) Sample Wall Sample		Jalapeno 3 RP Release GPS 32.372090°, -103.432341° Lea County, New Mexico
Date: 6/7/24			

Permian Release ID No. 18316411845	**LEGEND**	TELLUS ENVIRONMENTAL	Figure 8: Map of Excavation and Sample Locations
Photo Source: Google Earth	Excavated Areas Bottom Hole (BH) or Auger Hole (AH) Sample Wall Sample		Jalapeno 3 RP Release GPS 32.372090°, -103.432341° Lea County, New Mexico
Date: 6/7/24			

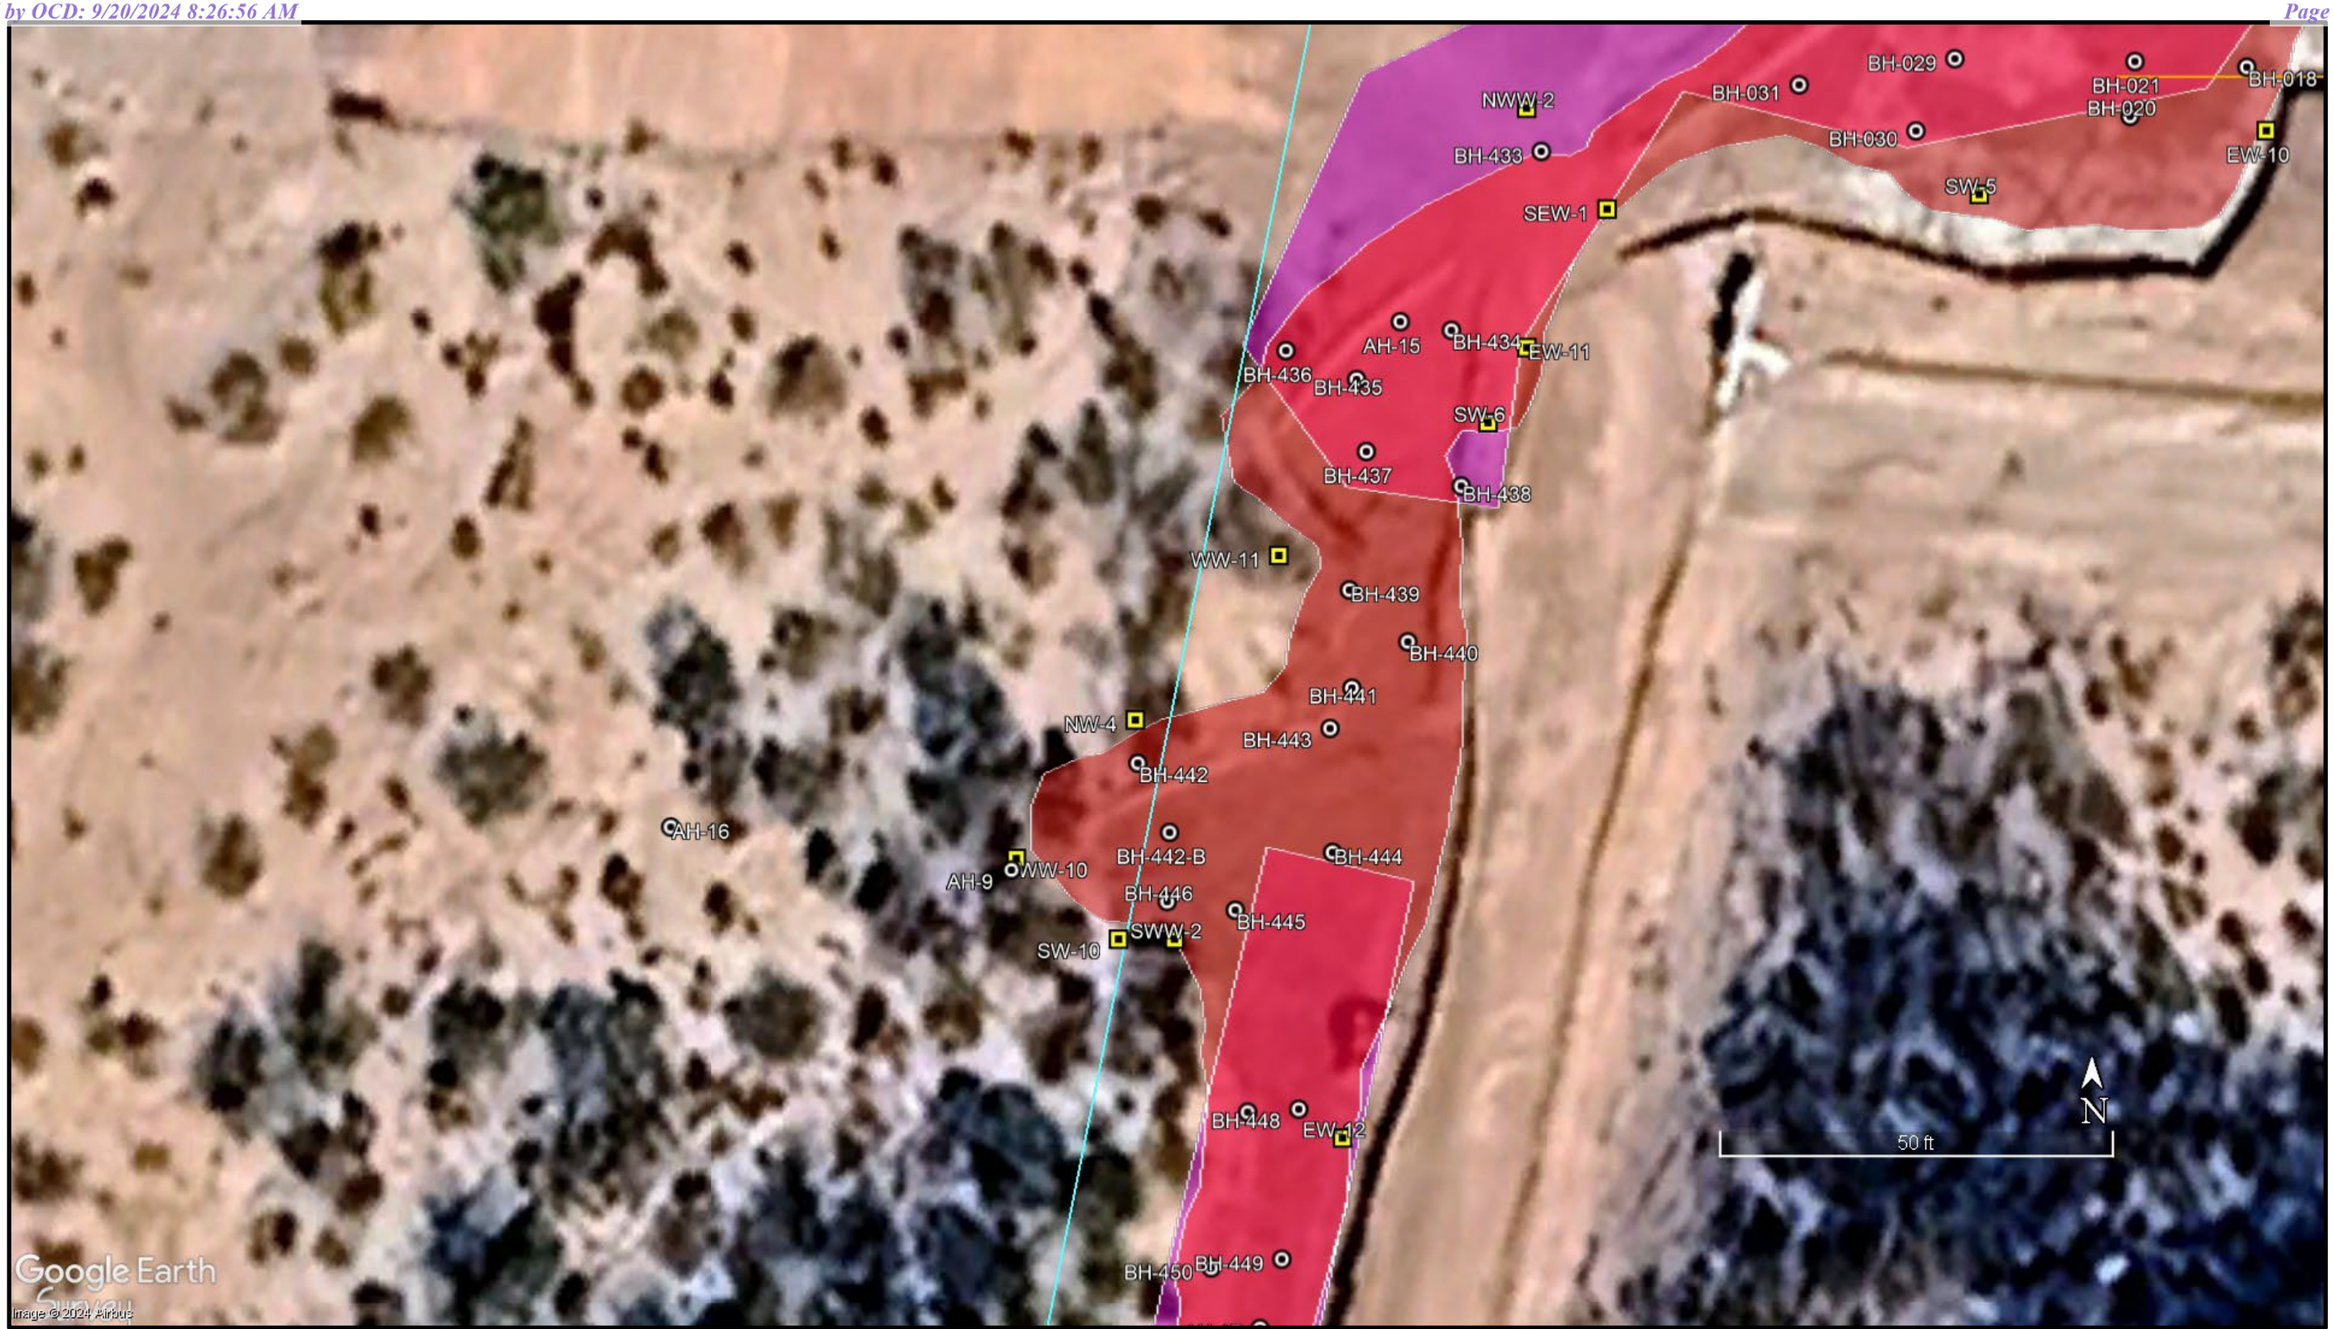

Permian Release ID No. 18316411845 **Photo Source: Google Earth** **Date: 6/7/24**	**LEGEND** Excavated Areas Bottom Hole (BH) or Auger Hole (AH) Sample Wall Sample	TELLUS ENVIRONMENTAL	Figure 9: Map of Excavation and Sample Locations Jalapeno 3 RP Release GPS 32.372090°, -103.432341° Lea County, New Mexico

Permian Release ID No. 18316411845	**LEGEND**	TELLUS ENVIRONMENTAL	Figure 10: Map of Excavation and Sample Locations
Photo Source: Google Earth	Excavated Areas Bottom Hole (BH) or Auger Hole (AH) Sample Wall Sample		Jalapeno 3 RP Release GPS 32.372090°, -103.432341° Lea County, New Mexico
Date: 6/7/24			

Permian Release ID No. 18316411845	**LEGEND**	TELLUS ENVIRONMENTAL	Figure 11: Map of Excavation and Sample Locations
Photo Source: Google Earth	Excavated Areas Bottom Hole (BH) or Auger Hole (AH) Sample Wall Sample		Jalapeno 3 RP Release GPS 32.372090°, -103.432341° Lea County, New Mexico
Date: 6/7/24			

Tables

Table 2
Summary of Analytical Results in Soil—Auger Holes
Jalapeno 3 RP Release
CDev ID No. 18316411845
GPS 32.372090°, -103.432341°
Lea County, New Mexico

Sample ID	Sample Date	Depth (feet bgs)	Benzene (mg/kg)	Toluene (mg/kg)	Ethylbenzene (mg/kg)	Total Xylenes (mg/kg)	Total BTEX (mg/kg)	TPH C6-C12 (GRO) (mg/kg)	TPH >C12-C28 (DRO) (mg/kg)	TPH >C28-C35 (ORO) (mg/kg)	Total TPH (mg/kg)	Laboratory Chloride (mg/kg)
			NMOCD Delineation Criteria for Impacted Soil (DTW ≤50 Feet bgs)									
			10				50				100	600
AH-1 @ 1 ft	07/21/2023	1.0	<0.00199	<0.00199	<0.00199	<0.00398	<0.00398	<49.6	**119**	<49.6	**119**	**732**
AH-1 @ 2 ft	07/21/2023	2.0	<0.00202	<0.00202	<0.00202	<0.00403	<0.00403	<49.6	<49.6	<49.6	<49.6	**65.9**
AH-1 @ 3 ft	07/21/2023	3.0	<0.00199	<0.00199	<0.00199	<0.00398	<0.00398	<50.4	<50.4	<50.4	<50.4	**59.5**
AH-1 @ 4 ft	07/21/2023	4.0	<0.00200	<0.00200	<0.00200	<0.00401	<0.00401	<50.2	<50.2	<50.2	<50.2	**92.5**
AH-2 @ 1 ft	07/21/2023	1.0	<0.00198	<0.00198	<0.00198	<0.00396	<0.00396	<50.0	<50.0	<50.0	<50.0	**113**
AH-2 @ 2 ft	07/21/2023	2.0	<0.00200	<0.00200	<0.00200	<0.00399	<0.00399	<49.8	<49.8	<49.8	<49.8	**66.0**
AH-2 @ 3 ft	07/21/2023	3.0	<0.00201	<0.00201	<0.00201	<0.00402	<0.00402	<50.3	<50.3	<50.3	<50.3	**53.9**
AH-2 @ 4 ft	07/21/2023	4.0	<0.00199	<0.00199	<0.00199	<0.00398	<0.00398	<49.9	<49.9	<49.9	<49.9	**174**
AH-3 @ 1 ft	07/21/2023	1.0	<0.00202	<0.00202	<0.00202	<0.00404	<0.00404	<50.1	**735**	<50.1	**735**	**2,160**
AH-3 @ 2 ft	07/21/2023	2.0	<0.00198	<0.00198	<0.00198	<0.00396	<0.00396	<49.9	<49.9	<49.9	<49.9	**93.9**
AH-3 @ 3 ft	07/21/2023	3.0	<0.00201	<0.00201	<0.00201	<0.00402	<0.00402	<50.0	<50.0	<50.0	<50.0	**68.2**
AH-3 @ 4 ft	07/21/2023	4.0	<0.00198	<0.00198	<0.00198	<0.00396	<0.00396	<50.1	<50.1	<50.1	<50.1	**232**
AH-4 @ 1 ft	07/21/2023	1.0	<0.00201	<0.00201	<0.00201	<0.00402	<0.00402	<50.2	<50.2	<50.2	<50.2	**80.1**
AH-4 @ 2 ft	07/21/2023	2.0	<0.00202	<0.00202	<0.00202	<0.00404	<0.00404	<49.7	<49.7	<49.7	<49.7	**78.1**
AH-4 @ 3 ft	07/21/2023	3.0	<0.00202	<0.00202	<0.00202	<0.00403	<0.00403	<49.6	<49.6	<49.6	<49.6	**76.5**
AH-4 @ 4 ft	07/21/2023	4.0	<0.00200	<0.00200	<0.00200	<0.00399	<0.00399	<50.3	<50.3	<50.3	<50.3	**97.2**
AH-5 @ 1 ft	07/21/2023	1.0	<0.00201	<0.00201	<0.00201	<0.00402	<0.00402	<50.2	<50.2	<50.2	<50.2	**66.8**
AH-5 @ 2 ft	07/21/2023	2.0	<0.00199	<0.00199	<0.00199	<0.00398	<0.00398	<49.6	<49.6	<49.6	<49.6	**61.6**
AH-7 @ 1 ft	07/21/2023	1.0	<0.00198	<0.00198	<0.00198	<0.00396	<0.00396	<49.8	**699**	<49.8	**699**	**245**
AH-7 @ 2 ft	07/21/2023	2.0	<0.00198	<0.00198	<0.00198	<0.00397	<0.00397	<49.6	<49.6	<49.6	<49.6	**453**
AH-7 @ 3 ft	07/21/2023	3.0	<0.00200	<0.00200	<0.00200	<0.00401	<0.00401	<50.3	**529**	<50.3	**529**	**767**
AH-8 @ 1 ft	07/21/2023	1.0	<0.00199	<0.00199	<0.00199	<0.00398	<0.00398	<49.6	<49.6	<49.6	<49.6	**160**
AH-8 @ 2 ft	07/21/2023	2.0	<0.00200	<0.00200	<0.00200	<0.00401	<0.00401	<50.4	<50.4	<50.4	<50.4	**70.7**
AH-8 @ 2 ft	07/21/2023	2.0	<0.00202	<0.00202	<0.00202	<0.00403	<0.00403	<49.6	<49.6	<49.6	<49.6	**157**
AH-9 @ 2 ft	07/21/2023	2.0	<0.00199	<0.00199	<0.00199	<0.00398	<0.00398	<50.5	<50.5	<50.5	<50.5	**78.3**
AH-10 @ 1 ft	07/21/2023	1.7	<0.00198	<0.00198	<0.00198	<0.00396	<0.00396	<50.4	**61.0**	<50.4	**61.0**	**149**
AH-10 @ 2 ft	07/21/2023	2.0	<0.00201	<0.00201	<0.00201	<0.00402	<0.00402	<50.4	**201**	<50.4	**201**	**347**
AH-12 @ 1 ft	07/25/2023	1.7	<0.00202	<0.00202	<0.00202	<0.00403	<0.00403	<50.0	**51.7**	<50.0	**51.7**	**5690**
AH-13 @ 1 ft	07/25/2023	1.0	<0.00198	<0.00198	<0.00198	<0.00397	<0.00397	<49.6	<49.6	<49.6	<49.6	**844**

Table 2
Summary of Analytical Results in Soil—Auger Holes
Jalapeno 3 RP Release
CDev ID No. 18316411845
GPS 32.372090°, -103.432341°
Lea County, New Mexico

Sample ID	*Sample Date*	*Depth (feet bgs)*	*Benzene (mg/kg)*	*Toluene (mg/kg)*	*Ethylbenzene (mg/kg)*	*Total Xylenes (mg/kg)*	*Total BTEX (mg/kg)*	*TPH C6-C12 (GRO) (mg/kg)*	*TPH >C12-C28 (DRO) (mg/kg)*	*TPH >C28-C35 (ORO) (mg/kg)*	*Total TPH (mg/kg)*	*Laboratory Chloride (mg/kg)*
			NMOCD Delineation Criteria for Impacted Soil (DTW ≤50 Feet bgs)									
			10				*50*				*100*	*600*
AH-13 @ 2 ft	07/25/2023	2.0	<0.00202	<0.00202	<0.00202	<0.00404	<0.00404	<49.6	<49.6	<49.6	<49.6	**450**
AH-14 @ 1 ft	07/25/2023	1.0	<0.00200	<0.00200	<0.00200	<0.00401	<0.00401	<50.2	<50.2	<50.2	<50.2	**298**
AH-14 @ 2 ft	07/25/2023	2.0	<0.00201	<0.00201	<0.00201	<0.00402	<0.00402	<50.4	<50.4	<50.4	<50.4	**214**
AH-14 @ 3 ft	07/25/2023	3.0	<0.00199	<0.00199	<0.00199	<0.00398	<0.00398	<50.4	<50.4	<50.4	<50.4	**57.9**
AH-14 @ 4 ft	07/25/2023	4.0	<0.00198	<0.00198	<0.00198	<0.00396	<0.00396	<50.5	<50.5	<50.5	<50.5	**73.4**
AH-15 @ 1 ft	07/25/2023	1.0	<0.00201	<0.00201	<0.00201	<0.00402	<0.00402	<49.9	<49.9	<49.9	<49.9	**4040**
AH-15 @ 20 in	07/25/2023	1.7	<0.00199	<0.00199	<0.00199	<0.00398	<0.00398	<50.4	**81.6**	<50.4	**81.6**	**1920**
AH-16 @ 1 ft	07/25/2023	1.0	<0.00200	<0.00200	<0.00200	<0.00401	<0.00401	<50.5	387	<50.5	**387**	**909**
AH-16 @ 2 ft	07/25/2023	2.0	<0.00202	<0.00202	<0.00202	<0.00403	<0.00403	<50.5	**170**	<50.5	**170**	**127**
AH-16 @ 3 ft	07/25/2023	3.0	<0.00198	<0.00198	<0.00198	<0.00397	<0.00397	<49.6	**79.5**	<49.6	**79.5**	**188**
AH-16 @ 4 ft	07/25/2023	4.0	<0.00200	<0.00200	<0.00200	<0.00399	<0.00399	<49.8	**81.9**	<49.8	**81.9**	**202**
AH-17 @ 1 ft	07/25/2023	1.0	<0.00200	<0.00200	<0.00200	<0.00401	<0.00401	<49.7	**95.1**	<49.7	**95.1**	**7560**
AH-17 @ 2 ft	07/25/2023	2.0	<0.00200	<0.00200	<0.00200	<0.00400	<0.00400	<50.4	<50.4	<50.4	<50.4	**183**
AH-17 @ 3 ft	07/25/2023	3.0	<0.00199	<0.00199	<0.00199	<0.00398	<0.00398	<50.2	<50.2	<50.2	<50.2	**220**
AH-17 @ 4 ft	07/25/2023	4.0	<0.00200	<0.00200	<0.00200	<0.00399	<0.00399	<50.4	<50.4	<50.4	<50.4	**67.2**
AH-18 @ 1 ft	07/25/2023	1.0	<0.00198	<0.00198	<0.00198	<0.00396	<0.00396	<50.3	**61.7**	<50.3	**61.7**	**2030**
AH-18 @ 2 ft	07/25/2023	2.0	<0.00202	<0.00202	<0.00202	<0.00403	<0.00403	<49.6	<49.6	<49.6	<49.6	**179**
AH-18 @ 3 ft	07/25/2023	3.0	<0.00200	<0.00200	<0.00200	<0.00401	<0.00401	<49.6	**155**	<49.6	**155**	**302**
AH-19 @ 1 ft	07/25/2023	1.0	<0.00200	<0.00200	<0.00200	<0.00399	<0.00399	<50.2	<50.2	<50.2	<50.2	**527**
AH-19 @ 2 ft	07/25/2023	2.0	<0.00200	<0.00200	<0.00200	<0.00401	<0.00401	<50.4	<50.4	<50.4	<50.4	**46.1**
AH-19 @ 3 ft	07/25/2023	3.0	<0.00201	<0.00201	<0.00201	<0.00402	<0.00402	<50.1	<50.1	<50.1	<50.1	**179**
AH-19 @ 4 ft	07/25/2023	4.0	<0.00202	<0.00202	<0.00202	<0.00404	<0.00404	<49.8	<49.8	<49.8	<49.8	**240**

Notes:

1. bgs - below ground surface
2. BTEX - benzene, toluene, ethy-benzene, and total xylenes
3. TPH - total petroleum hydrocarbons
4. GRO - gasoline range organics
5. DRO - diesel range organics
6. ORO - oil range organics
7. NMOCD - New Mexico Oil Conservation Division
8. Bold font indicates analyte detected above the laboratory reporting limits
9. Yellow highlighting and bold indicates analytical results exceeding the NMOCD closure criteria for TPH and chlorides.
10. AH - Sample from Auger Hole

Table 3
Summary of Analytical Results in Soil—Bottom Hole and Wall Samples
Jalapeno 3 RP Release
CDev ID No. 18316411845
GPS 32.372090°, -103.432341°
Lea County, New Mexico

Sample ID	Sample Date	Depth (feet bgs)	Benzene (mg/kg)	Toluene (mg/kg)	Ethylbenzene (mg/kg)	Total Xylenes (mg/kg)	Total BTEX (mg/kg)	TPH C6-C12 (GRO) (mg/kg)	TPH >C12-C28 (DRO) (mg/kg)	TPH >C28-C35 (ORO) (mg/kg)	Total TPH (mg/kg)	Laboratory Chloride (mg/kg)
			NMOCD closure Criteria for Impacted Soil (DTW ≤50 Feet bgs)									
			10				50				100	600
BH-1 @ 2FT	11/17/2023	2.0	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**10.9**
BH-2 @ 2FT	11/17/2023	2.0	<0.00110	<0.00110	<0.00110	<0.00220	<0.00110	<27.5	<27.5	<27.5	<27.5	**70.0**
BH-3 @ 2FT	11/17/2023	2.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**46.5**
BH-4 @ 2FT	11/17/2023	2.0	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**32.1**
BH-5 @ 2FT	11/17/2023	2.0	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**49.0**
BH-6 @ 2FT	11/17/2023	2.0	<0.00108	<0.00108	<0.00108	<0.00215	<0.00108	<26.9	<26.9	<26.9	<26.9	**28.0**
BH-7 @ 2FT	11/17/2023	2.0	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**21.3**
BH-8 @ 2FT	11/17/2023	2.0	<0.00119	<0.00119	<0.00119	<0.00238	<0.00119	<29.8	<29.8	<29.8	<29.8	**57.6**
BH-9 @ 2FT	11/17/2023	2.0	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**44.7**
BH-10 @ 2FT	11/17/2023	2.0	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**164**
BH-11 @ 2FT	11/17/2023	2.0	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**21.0**
BH-12 @ 2FT	11/17/2023	2.0	<0.00111	<0.00111	<0.00111	<0.00222	<0.00111	<27.8	<27.8	<27.8	<27.8	**119**
BH-13 @ 2FT	11/17/2023	2.0	<0.00115	<0.00115	<0.00115	<0.00230	<0.00115	<28.7	<28.7	<28.7	<28.7	**28.2**
BH-14 @ 2FT	11/17/2023	2.0	<0.00123	<0.00123	<0.00123	<0.00247	<0.00123	<30.9	<30.9	<30.9	<30.9	**128**
BH-15 @ 2FT	11/17/2023	2.0	<0.00123	<0.00123	<0.00123	<0.00247	<0.00123	<30.9	<30.9	<30.9	<30.9	**75.5**
BH-16 @ 2FT	11/17/2023	2.0	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**13.1**
BH-17 @ 2FT	11/17/2023	2.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**36.6**
BH-18 @ 2FT	11/17/2023	2.0	<0.00109	<0.00109	<0.00109	<0.00217	<0.00109	<27.2	<27.2	<27.2	<27.2	**31.7**
BH-20 @ 2FT	11/17/2023	2.0	<0.00109	<0.00109	<0.00109	<0.00217	<0.00109	<27.2	<27.2	<27.2	<27.2	**24.8**
BH-21 @ 2FT	11/17/2023	2.0	<0.00109	<0.00109	<0.00109	<0.00217	<0.00109	<27.2	<27.2	<27.2	<27.2	**43.7**
BH-22 @ 2FT	11/17/2023	2.0	<0.00106	<0.00106	<0.00106	**0.00123**	**0.00123**	<26.6	<26.6	<26.6	<26.6	**21.4**
BH-23 @ 2FT	11/17/2023	2.0	<0.00111	<0.00111	**0.00158**	<0.00222	**0.00158**	<27.8	<27.8	<27.8	<27.8	**40.0**
BH-24 @ 2FT	11/17/2023	2.0	<0.00110	<0.00110	<0.00110	<0.00220	<0.00110	<27.5	<27.5	<27.5	<27.5	**118**
BH-25 @ 2FT	11/17/2023	2.0	<0.00115	<0.00115	<0.00115	<0.00230	<0.00115	<28.7	<28.7	<28.7	<28.7	**56.1**
BH-26 @ 2FT	11/20/2023	2.0	<0.00114	<0.00114	<0.00114	<0.00227	<0.00114	<28.4	<28.4	<28.4	<28.4	**79.0**
BH-27 @ 2FT	11/20/2023	2.0	<0.00112	<0.00112	<0.00112	<0.00225	<0.00112	<28.1	<28.1	<28.1	<28.1	**37.2**
BH-28 @ 2FT	11/20/2023	2.0	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**7.32**
BH-29 @ 2FT	11/20/2023	2.0	<0.00108	<0.00108	<0.00108	<0.00215	<0.00108	<26.9	<26.9	<26.9	<26.9	**78.0**
BH-30 @ 2FT	11/20/2023	2.0	<0.00108	<0.00108	<0.00108	<0.00215	<0.00108	<26.9	<26.9	<26.9	<26.9	**18.8**
BH-31 @ 2FT	11/20/2023	2.0	<0.00108	<0.00108	<0.00108	<0.00215	<0.00108	<26.9	<26.9	<26.9	<26.9	**11.1**
BH-32 @ 2FT	11/20/2023	2.0	<0.00110	<0.00110	<0.00110	<0.00220	<0.00110	<27.5	<27.5	<27.5	<27.5	**8.40**
BH-33 @ 2FT	11/20/2023	2.0	<0.00108	<0.00108	<0.00108	<0.00215	<0.00108	<26.9	<26.9	<26.9	<26.9	**46.9**
BH- 37 @ 1FT	11/22/2023	1.0	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**110**
BH-38 @ 1FT	11/22/2023	1.0	<0.00108	<0.00108	<0.00108	<0.00215	<0.00108	<26.9	<26.9	<26.9	<26.9	**38.5**
BH-39 @ 1FT	11/22/2023	1.0	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**7.97**
BH-40 @ 1FT	11/22/2023	1.0	<0.00114	<0.00114	<0.00114	<0.00227	<0.00114	<28.4	<28.4	<28.4	<28.4	**18.3**
BH-41 @ 1FT	11/22/2023	1.0	<0.00111	<0.00111	<0.00111	<0.00222	<0.00111	<27.8	<27.8	<27.8	<27.8	**37.5**
BH-42 @ 1FT	11/22/2023	1.0	<0.00114	<0.00114	<0.00114	<0.00227	<0.00114	<28.4	<28.4	<28.4	<28.4	**219**
BH-43 @ 1FT	11/22/2023	1.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**77.0**

Table 3
Summary of Analytical Results in Soil—Bottom Hole and Wall Samples
Jalapeno 3 RP Release
CDev ID No. 18316411845
GPS 32.372090°, -103.432341°
Lea County, New Mexico

Sample ID	Sample Date	Depth (feet bgs)	Benzene (mg/kg)	Toluene (mg/kg)	Ethylbenzene (mg/kg)	Total Xylenes (mg/kg)	Total BTEX (mg/kg)	TPH C6-C12 (GRO) (mg/kg)	TPH >C12-C28 (DRO) (mg/kg)	TPH >C28-C35 (ORO) (mg/kg)	Total TPH (mg/kg)	Laboratory Chloride (mg/kg)
			NMOCD closure Criteria for Impacted Soil (DTW ≤50 Feet bgs)									
			10				50				100	600
BH-44 @ 1FT	11/22/2023	1.0	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**94.9**
BH-45 @ 1FT	11/22/2023	1.0	<0.00112	<0.00112	<0.00112	<0.00225	<0.00112	<28.1	<28.1	<28.1	<28.1	**603**
BH-45 @ 1.5FT	1/2/2024	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00206	<25.8	<25.8	<25.8	<25.8	**115**
BH-46 @ 1FT	11/22/2023	1.0	<0.00108	<0.00108	<0.00108	<0.00215	<0.00108	<26.9	<26.9	<26.9	<26.9	**72.1**
BH-47 @ 1FT	11/22/2023	1.0	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**38.2**
BH-48 @ 1FT	11/22/2023	1.0	<0.00108	<0.00108	<0.00108	<0.00215	<0.00108	<26.9	<26.9	<26.9	<26.9	**140**
BH-49 @ 1FT	11/22/2023	1.0	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**14.4**
BH-50 @ 1FT	11/22/2023	1.0	<0.00110	<0.00110	<0.00110	<0.00220	<0.00110	<27.5	<27.5	<27.5	<27.5	**7.12**
BH-50 @ 1.5	12/5/2023	1.5	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**248**
BH-51 @ 1.5	12/5/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**390**
BH-52 @ 1.5	12/5/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**181**
BH-53 @ 1.5	12/5/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**423**
BH-54 @ 1.5	12/5/2023	1.5	<0.00108	<0.00108	<0.00108	<0.00215	<0.00108	<26.9	<26.9	<26.9	<26.9	**40.6**
BH-55 @ 1.5	12/5/2023	1.5	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**189**
BH-56 @ 1.5	12/5/2023	1.5	<0.00108	<0.00108	<0.00108	<0.00215	<0.00108	<26.9	<26.9	<26.9	<26.9	**210**
BH-57 @ 1.5	12/5/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**93.1**
BH-58 @ 1.5	12/5/2023	1.5	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**68.2**
BH-59 @ 1.5	12/5/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**205**
BH-60 @ 1.5	12/5/2023	1.5	<0.00108	<0.00108	<0.00108	<0.00215	<0.00108	<26.9	<26.9	<26.9	<26.9	**87.5**
BH-61 @ 1.5	12/5/2023	1.5	<0.00108	<0.00108	<0.00108	<0.00215	<0.00108	<26.9	**36.4**	<26.9	**36.4**	**301**
BH-62 @ 1.5	12/5/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**252**
BH-63 @ 1.5	12/5/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	**30.1**	<26.0	**30.1**	**217**
BH-64 @ 1.5	12/5/2023	1.5	<0.00102	<0.00102	<0.00102	<0.00204	<0.00102	<25.5	<25.5	<25.5	<25.5	**102**
BH-65 @ 1.5	12/5/2023	1.5	<0.00102	<0.00102	<0.00102	<0.00204	<0.00102	<25.5	<25.5	<25.5	<25.5	**171**
BH-66 @ 1.5	12/5/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	**34.6**	<25.8	**34.6**	**207**
BH-67 @ 1.5	12/5/2023	1.5	<0.00108	<0.00108	<0.00108	<0.00215	<0.00108	<26.9	<26.9	<26.9	<26.9	**186**
BH-68 @ 1.5	12/5/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**136**
BH-69 @ 1.5	12/5/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**21.5**
BH-70 @ 1.5	12/5/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**100**
BH-71 @ 1.5	11/27/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**79.0**
BH-72 @ 1.5	11/27/2023	1.5	<0.00102	<0.00102	<0.00102	<0.00204	<0.00102	<25.5	<25.5	<25.5	<25.5	**69.2**
BH-73 @ 1.5	11/27/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**82.8**
BH-74 @ 1.5	11/27/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**129**
BH-75 @ 1.5	11/27/2023	1.5	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**283**
BH-76 @ 1.5	11/27/2023	1.5	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**212**
BH-77 @ 1.5	11/27/2023	1.5	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**193**
BH-78 @ 1.5	11/27/2023	1.5	<0.00110	<0.00110	<0.00110	<0.00220	<0.00110	<27.5	<27.5	<27.5	<27.5	**62.2**
BH-79 @ 1.5	11/27/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**92.3**
BH-80 @ 1.5	11/27/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**287**

Table 3
Summary of Analytical Results in Soil—Bottom Hole and Wall Samples
Jalapeno 3 RP Release
CDev ID No. 18316411845
GPS 32.372090°, -103.432341°
Lea County, New Mexico

Sample ID	Sample Date	Depth (feet bgs)	Benzene (mg/kg)	Toluene (mg/kg)	Ethylbenzene (mg/kg)	Total Xylenes (mg/kg)	Total BTEX (mg/kg)	TPH C6-C12 (GRO) (mg/kg)	TPH >C12-C28 (DRO) (mg/kg)	TPH >C28-C35 (ORO) (mg/kg)	Total TPH (mg/kg)	Laboratory Chloride (mg/kg)
			NMOCD closure Criteria for Impacted Soil (DTW ≤50 Feet bgs)									
			10				50				100	600
BH-81 @ 1.5	11/27/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**140**
BH-82 @ 1.5	11/27/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**213**
BH-83 @ 1.5	11/27/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**237**
BH-84 @ 1.5	11/27/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**74.8**
BH-85 @ 1.5	11/27/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**135**
BH-86 @ 1.5	11/27/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**558**
BH-87 @ 1.5	11/27/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**50.8**
BH-88 @ 1.5	11/27/2023	1.5	<0.00102	<0.00102	<0.00102	<0.00204	<0.00102	<25.5	<25.5	<25.5	<25.5	**306**
BH-89 @ 1.5	11/27/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**76.0**
BH-90 @ 1.5	11/27/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**79.2**
BH-91 @ 1.5	11/27/2023	1.5	<0.00102	<0.00102	<0.00102	<0.00204	<0.00102	<25.5	<25.5	<25.5	<25.5	**42.3**
BH-92 @ 1.5	11/27/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**58.4**
BH-93 @ 1.5	11/27/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**531**
BH-94 @ 1.5	11/27/2023	1.5	<0.00108	<0.00108	<0.00108	<0.00215	<0.00108	<26.9	<26.9	<26.9	<26.9	**41.7**
BH-95 @ 1.5	11/27/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**213**
BH-96 @ 1.5	11/27/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**296**
BH-97 @ 1.5	11/28/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**33.2**
BH-98 @ 1.5	11/28/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**39.4**
BH-99 @ 1.5	11/28/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**105**
BH-100 @ 1.5	11/28/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**107**
BH-101 @ 1.5	11/28/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**140**
BH-102 @ 1.5	11/28/2023	1.5	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**44.9**
BH-103 @ 1.5	11/28/2023	1.5	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**187**
BH-104 @ 1.5	11/28/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**202**
BH-105 @ 1.5	11/28/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**29.2**
BH-106 @ 1.5	11/28/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**65.0**
BH-107 @ 1.5	11/28/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**73.5**
BH-108 @ 1.5	11/28/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**85.7**
BH-109 @ 1.5	11/28/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**35.0**
BH-110 @ 1.5	11/28/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**114**
BH-111 @ 1.5	11/28/2023	1.5	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**108**
BH-112 @ 1.5	11/28/2023	1.5	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**86.7**
BH-113 @ 1.5	11/28/2023	1.5	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**115**
BH-114 @ 1.5	11/28/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**118**
BH-115 @ 1.5	11/28/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**43.0**
BH-116 @ 1.5	11/28/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**14.5**
BH-117 @ 1.5	11/28/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**144**
BH-118 @ 1.5	11/28/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**24.9**
BH-119 @ 1.5	11/28/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**32.7**

Table 3
Summary of Analytical Results in Soil—Bottom Hole and Wall Samples
Jalapeno 3 RP Release
CDev ID No. 18316411845
GPS 32.372090°, -103.432341°
Lea County, New Mexico

Sample ID	Sample Date	Depth (feet bgs)	Benzene (mg/kg)	Toluene (mg/kg)	Ethylbenzene (mg/kg)	Total Xylenes (mg/kg)	Total BTEX (mg/kg)	TPH C6-C12 (GRO) (mg/kg)	TPH >C12-C28 (DRO) (mg/kg)	TPH >C28-C35 (ORO) (mg/kg)	Total TPH (mg/kg)	Laboratory Chloride (mg/kg)
			NMOCD closure Criteria for Impacted Soil (DTW ≤50 Feet bgs)									
			10				50				100	600
BH-120 @ 1.5	11/28/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**285**
BH-121 @ 1.5	11/28/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**147**
BH-122 @ 1.5	11/28/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**62.6**
BH-123 @ 1.5	11/28/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**158**
BH-124 @ 1.5	11/28/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**108**
BH-125 @ 1.5	11/28/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**159**
BH-126 @ 1.5	11/28/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**93.6**
BH-127 @ 1.5	11/28/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**107**
BH-128 @ 1.5	11/28/2023	1.5	<0.00108	<0.00108	<0.00108	<0.00215	<0.00108	<26.9	<26.9	<26.9	<26.9	**27.7**
BH-129 @ 1.5	11/28/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**39.6**
BH-130 @ 1.5	11/28/2023	1.5	<0.00108	<0.00108	<0.00108	<0.00215	<0.00108	<26.9	<26.9	<26.9	<26.9	**60.1**
BH-131 @ 1.5	11/28/2023	1.5	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**146**
BH-132 @ 1.5	11/28/2023	1.5	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**64.5**
BH-133 @ 1.5	11/28/2023	1.5	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**221**
BH-134 @ 1.5	11/28/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**146**
BH-135 @ 1.5	11/28/2023	1.5	<0.00109	<0.00109	<0.00109	<0.00217	<0.00109	<27.2	<27.2	<27.2	<27.2	**57.3**
BH-136 @ 1.5	11/28/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**53.2**
BH-137 @ 1.5	11/28/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**24.3**
BH-138 @ 1.5	11/28/2023	1.5	<0.00102	<0.00102	<0.00102	<0.00204	<0.00102	<25.5	<25.5	<25.5	<25.5	**100**
BH-139 @ 1.5	11/28/2023	1.5	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**110**
BH-140 @ 1.5	11/28/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**80.4**
BH-141 @ 1.5	11/28/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**68.6**
BH-142 @ 1.5	11/28/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**109**
BH-143 @ 1.5	11/28/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**102**
BH-144 @ 1.5	11/28/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**16.5**
BH-145 @ 1.5	11/28/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**22.1**
BH-146 @ 1.5	11/28/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**89.6**
BH-147 @ 1.5	11/28/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**156**
BH-148 @ 1.5	11/28/2023	1.5	<0.00108	<0.00108	<0.00108	<0.00215	<0.00108	<26.9	<26.9	<26.9	<26.9	**52.4**
BH-149 @ 1.5	11/28/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**102**
BH-150 @ 1.5	11/28/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**141**
BH-151 @ 1.5	11/28/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**31.8**
BH-152 @ 1.5	11/29/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**23.7**
BH-153 @ 1.5	11/29/2023	1.5	<0.00108	<0.00108	<0.00108	<0.00215	<0.00108	<26.9	<26.9	<26.9	<26.9	**65.3**
BH-154 @ 1.5	11/29/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**30.9**
BH-155 @ 1.5	11/29/2023	1.5	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**207**
BH-156 @ 1.5	11/29/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**193**
BH-157 @ 1.5	11/29/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**55.3**
BH-158 @ 1.5	11/29/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**87.9**

Table 3
Summary of Analytical Results in Soil—Bottom Hole and Wall Samples
Jalapeno 3 RP Release
CDev ID No. 18316411845
GPS 32.372090°, -103.432341°
Lea County, New Mexico

Sample ID	Sample Date	Depth (feet bgs)	Benzene (mg/kg)	Toluene (mg/kg)	Ethylbenzene (mg/kg)	Total Xylenes (mg/kg)	Total BTEX (mg/kg)	TPH C6-C12 (GRO) (mg/kg)	TPH >C12-C28 (DRO) (mg/kg)	TPH >C28-C35 (ORO) (mg/kg)	Total TPH (mg/kg)	Laboratory Chloride (mg/kg)
			NMOCD closure Criteria for Impacted Soil (DTW ≤50 Feet bgs)									
			10				50				100	600
BH-159 @ 1.5	11/29/2023	1.5	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**47.1**
BH-160 @ 1.5	11/29/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**19.6**
BH-161 @ 1.5	11/29/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**11.7**
BH-162 @ 1.5	11/29/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**56.9**
BH-163 @ 1.5	11/29/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**154**
BH-164 @ 1.5	11/29/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**54.5**
BH-165 @ 1.5	11/29/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**56.8**
BH-166 @ 1.5	11/29/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**47.9**
BH-167 @ 1.5	11/29/2023	1.5	<0.00108	<0.00108	<0.00108	<0.00215	<0.00108	<26.9	<26.9	<26.9	<26.9	**146**
BH-168 @ 1.5	11/29/2023	1.5	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**149**
BH-169 @ 1.5	11/29/2023	1.5	<0.00102	<0.00102	<0.00102	<0.00204	<0.00102	<25.5	<25.5	<25.5	<25.5	**33.1**
BH-170 @ 1.5	11/29/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**23.3**
BH-171 @ 1.5	11/29/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**103**
BH-172 @ 1.5	11/29/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**90.6**
BH-173 @ 1.5	11/29/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**182**
BH-174 @ 1.5	11/29/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**43.6**
BH-175 @ 1.5	11/29/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**22.3**
BH-176 @ 1.5	11/29/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**41.3**
BH-177 @ 1.5	11/29/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**19.1**
BH-178 @ 1.5	11/29/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**34.0**
BH-179 @ 1.5	11/29/2023	1.5	<0.00102	<0.00102	<0.00102	<0.00204	<0.00102	<25.5	<25.5	<25.5	<25.5	**19.5**
BH-180 @ 1.5	11/29/2023	1.5	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**117**
BH-181 @ 1.5	11/29/2023	1.5	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**161**
BH-182 @ 1.5	11/29/2023	1.5	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**78.0**
BH-183 @ 1.5	11/29/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**25.8**
BH-184 @ 1.5	11/29/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**17.1**
BH-185 @ 1.5	11/29/2023	1.5	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**19.4**
BH-186 @ 1.5	11/29/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**30.4**
BH-187 @ 1.5	11/29/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**34.0**
BH-188 @ 1.5	11/29/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**23.5**
BH-189 @ 1.5	11/29/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**38.6**
BH-190 @ 1.5	11/29/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**149**
BH-191 @ 1.5	11/29/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**98.8**
BH-192 @ 1.5	11/29/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	**65.5**	**65.5**	**32.5**
BH-192 @ 1.5	11/30/2023	1.5	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**99.4**
BH-193 @ 1.5	11/30/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**182**
BH-194 @ 1.5	11/30/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**182**
BH-195 @ 1.5	11/30/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**136**
BH-196 @ 1.5	11/30/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**42.4**

Table 3
Summary of Analytical Results in Soil—Bottom Hole and Wall Samples
Jalapeno 3 RP Release
CDev ID No. 18316411845
GPS 32.372090°, -103.432341°
Lea County, New Mexico

Sample ID	Sample Date	Depth (feet bgs)	Benzene (mg/kg)	Toluene (mg/kg)	Ethylbenzene (mg/kg)	Total Xylenes (mg/kg)	Total BTEX (mg/kg)	TPH C6-C12 (GRO) (mg/kg)	TPH >C12-C28 (DRO) (mg/kg)	TPH >C28-C35 (ORO) (mg/kg)	Total TPH (mg/kg)	Laboratory Chloride (mg/kg)
			NMOCD closure Criteria for Impacted Soil (DTW ≤50 Feet bgs)									
			10				50				100	600
BH-197 @ 1.5	11/30/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**20.2**
BH-198 @ 1.5	11/30/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**31.9**
BH-199 @ 1.5	11/30/2023	1.5	<0.00108	<0.00108	<0.00108	<0.00215	<0.00108	<26.9	<26.9	<26.9	<26.9	**25.3**
BH-200 @ 1.5	11/30/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**24.1**
BH-201 @ 1.5	11/30/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**25.7**
BH-202 @ 1.5	11/30/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**72.9**
BH-203 @ 1.5	11/30/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**56.3**
BH-204 @ 1.5	11/30/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**24.0**
BH-205 @ 1.5	11/30/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**99.6**
BH-206 @ 1.5	11/30/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**21.6**
BH-207 @ 1.5	11/30/2023	1.5	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**214**
BH-208 @ 1.5	11/30/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**33.7**
BH-209 @ 1.5	11/30/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**16.8**
BH-210 @ 1.5	11/30/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**186**
BH-211 @ 1.5	11/30/2023	1.5	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**59.8**
BH-212 @ 1.5	11/30/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**82.5**
BH-213 @ 1.5	11/30/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**41.8**
BH-214 @ 1.5	11/30/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**286**
BH-215 @ 1.5	11/30/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**158**
BH-216 @ 1.5	11/30/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**17.1**
BH-217 @ 1.5	11/30/2023	1.5	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**303**
BH-218 @ 1.5	11/30/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**54.1**
BH-219 @ 1.5	11/30/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**240**
BH-220 @ 1.5	11/30/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**27.0**
BH-221 @ 1.5	11/30/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**74.8**
BH-222 @ 1.5	11/30/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**23.4**
BH-223 @ 1.5	11/30/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**70.3**
BH-224 @ 1.5	11/30/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**50.3**
BH-225 @ 1.5	11/30/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**22.7**
BH-226 @ 1.5	11/30/2023	1.5	<0.00119	<0.00119	<0.00119	<0.00238	<0.00119	<29.8	<29.8	<29.8	<29.8	**46.8**
BH-227 @ 1.5	11/30/2023	1.5	<0.00109	<0.00109	<0.00109	<0.00217	<0.00109	<27.2	<27.2	<27.2	<27.2	**46.2**
BH-228 @ 1.5	11/30/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**43.5**
BH-229 @ 1.5	11/30/2023	1.5	<0.00109	<0.00109	<0.00109	<0.00217	<0.00109	<27.2	<27.2	<27.2	<27.2	**42.6**
BH-230 @ 1.5	11/30/2023	1.5	<0.00111	<0.00111	<0.00111	<0.00222	<0.00111	<27.8	<27.8	<27.8	<27.8	**72.9**
BH-231 @ 1.5	11/30/2023	1.5	<0.00108	<0.00108	<0.00108	<0.00215	<0.00108	<26.9	<26.9	<26.9	<26.9	**361**
BH-232 @ 1.5	11/30/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**19.0**
BH-233 @ 1.5	11/30/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**158**
BH-234 @ 1.5	11/30/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**32.7**
BH-235 @ 1.5	11/30/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**33.1**

Table 3
Summary of Analytical Results in Soil—Bottom Hole and Wall Samples
Jalapeno 3 RP Release
CDev ID No. 18316411845
GPS 32.372090°, -103.432341°
Lea County, New Mexico

Sample ID	Sample Date	Depth (feet bgs)	Benzene (mg/kg)	Toluene (mg/kg)	Ethylbenzene (mg/kg)	Total Xylenes (mg/kg)	Total BTEX (mg/kg)	TPH C6-C12 (GRO) (mg/kg)	TPH >C12-C28 (DRO) (mg/kg)	TPH >C28-C35 (ORO) (mg/kg)	Total TPH (mg/kg)	Laboratory Chloride (mg/kg)
			NMOCD closure Criteria for Impacted Soil (DTW ≤50 Feet bgs)									
			10				50				100	600
BH-236 @ 1.5	11/30/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**16.9**
BH-237 @ 1.5	11/30/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**200**
BH-238 @ 1.5	11/30/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**68.9**
BH-239 @ 1.5	1/2/2024	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00211	<26.3	<26.3	<26.3	<26.3	**175**
BH-240 @ 1.5	1/2/2024	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00208	<26.0	<26.0	<26.0	<26.0	**98.1**
BH-241 @ 1.5	1/2/2024	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00206	<25.8	<25.8	<25.8	<25.8	**71.1**
BH-242 @ 1.5	12/4/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**25.6**
BH-243 @ 1.5	12/4/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**30.4**
BH-244 @ 1.5	12/4/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**132**
BH-245 @ 1.5	12/4/2023	1.5	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**77.2**
BH-246 @ 1.5	12/4/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**30.4**
BH-247 @ 1.5	12/4/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**203**
BH-248 @ 1.5	12/4/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**51.4**
BH-249 @ 1.5	12/4/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**198**
BH-250 @ 1.5	12/4/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**48.4**
BH-251 @ 1.5	12/4/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**265**
BH-252 @ 1.5	12/4/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**49.3**
BH-253 @ 1.5	12/4/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**63.1**
BH-254 @ 1.5	12/4/2023	1.5	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**35.9**
BH-255 @ 1.5	12/4/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**53.8**
BH-256 @ 1.5	12/4/2023	1.5	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**36.2**
BH-257 @ 1.5	12/4/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**25.8**
BH-258 @ 1.5	12/4/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**33.2**
BH-259 @ 1.5	12/4/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**46.2**
BH-260 @ 1.5	12/4/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**96.5**
BH-261 @ 1.5	12/4/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**63.3**
BH-262 @ 1.5	12/4/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**150**
BH-263 @ 1.5	12/4/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**126**
BH-264 @ 1.5	12/4/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**104**
BH-265 @ 1.5	12/4/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**22.5**
BH-266 @ 1.5	12/4/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**257**
BH-267 @ 1.5	12/4/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**24.0**
BH-268 @ 1.5	12/4/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**182**
BH-269 @ 1.5	12/4/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**106**
BH-270 @ 1.5	12/4/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**22.1**
BH-271 @ 1.5	12/4/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**321**
BH-272 @ 1.5	12/4/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**27.7**
BH-273 @ 1.5	12/4/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**28.8**
BH-274 @ 1.5	12/4/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**26.5**

Table 3
Summary of Analytical Results in Soil—Bottom Hole and Wall Samples
Jalapeno 3 RP Release
CDev ID No. 18316411845
GPS 32.372090°, -103.432341°
Lea County, New Mexico

Sample ID	Sample Date	Depth (feet bgs)	Benzene (mg/kg)	Toluene (mg/kg)	Ethylbenzene (mg/kg)	Total Xylenes (mg/kg)	Total BTEX (mg/kg)	TPH C6-C12 (GRO) (mg/kg)	TPH >C12-C28 (DRO) (mg/kg)	TPH >C28-C35 (ORO) (mg/kg)	Total TPH (mg/kg)	Laboratory Chloride (mg/kg)
			NMOCD closure Criteria for Impacted Soil (DTW ≤50 Feet bgs)									
			10				50				100	600
BH-275 @ 1.5	12/4/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**98.5**
BH-276 @ 1.5	12/4/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**37.1**
BH-277 @ 1.5	12/4/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**33.3**
BH-278 @ 1.5	12/4/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**30.5**
BH-279 @ 1.5	12/4/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**130**
BH-280 @ 1.5	12/4/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**22.5**
BH-281 @ 1.5	12/4/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**118**
BH-282 @ 1.5	12/4/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**19.7**
BH-283 @ 1.0	12/4/2023	1.0	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**135**
BH-284 @ 1.0	12/4/2023	1.0	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**109**
BH-285 @ 1.0	12/4/2023	1.0	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**29.4**
BH-286 @ 1.0	12/4/2023	1.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**35.6**
BH-287 @ 1.0	12/4/2023	1.0	<0.00102	<0.00102	<0.00102	<0.00204	<0.00102	<25.5	<25.5	<25.5	<25.5	**28.8**
BH-288 @ 1.0	12/4/2023	1.0	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**44.0**
BH-289 @ 1.0	12/4/2023	1.0	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**18.8**
BH-290 @ 1.0	12/4/2023	1.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**29.1**
BH-291 @ 1.0	12/4/2023	1.0	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**19.4**
BH-292 @ 1.0	12/4/2023	1.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**35.5**
BH-293 @ 1.0	12/4/2023	1.0	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**38.1**
BH-294 @ 1.0	12/4/2023	1.0	<0.00102	<0.00102	<0.00102	<0.00204	<0.00102	<25.5	<25.5	<25.5	<25.5	**47.4**
BH-295 @ 1.0	12/4/2023	1.0	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**31.3**
BH-296 @ 1.0	12/4/2023	1.0	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**14.2**
BH-297 @ 1.0	12/4/2023	1.0	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**58.1**
BH-298 @ 1.0	12/4/2023	1.0	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**19.2**
BH-299 @ 1.0	12/4/2023	1.0	<0.00102	<0.00102	<0.00102	<0.00204	<0.00102	<25.5	<25.5	<25.5	<25.5	**16.3**
BH-300 @ 1.0	12/4/2023	1.0	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**20.3**
BH-301 @ 1.0	12/4/2023	1.0	<0.00102	<0.00102	<0.00102	<0.00204	<0.00102	<25.5	<25.5	<25.5	<25.5	**20.3**
BH-302 @ 1.0	12/4/2023	1.0	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**47.4**
BH-303 @ 1.0	12/4/2023	1.0	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**23.2**
BH-304 @ 1.0	12/4/2023	1.0	<0.00102	<0.00102	<0.00102	<0.00204	<0.00102	<25.5	<25.5	<25.5	<25.5	**273**
BH-305 @ 1.0	12/4/2023	1.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**32.3**
BH-306 @ 1.0	12/4/2023	1.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**26.5**
BH-307 @ 1.0	12/4/2023	1.0	<0.00102	<0.00102	<0.00102	<0.00204	<0.00102	<25.5	<25.5	<25.5	<25.5	**285**
BH-308 @ 1.0	12/4/2023	1.0	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**154**
BH-309 @ 1.0	12/4/2023	1.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**31.1**
BH-310 @ 1.0	12/4/2023	1.0	**<0.00105**	**<0.00105**	**<0.00105**	**<0.00211**	**<0.00105**	**<26.3**	**<26.3**	**<26.3**	**<26.3**	**66.4**
BH-311 @ 1FT	12/4/2023	1.0	<0.00102	<0.00102	<0.00102	<0.00204	<0.00102	<25.5	<25.5	<25.5	<25.5	**15.3**
BH-312 @ 1FT	12/4/2023	1.0	<0.00128	<0.00128	<0.00128	<0.00256	<0.00128	<32.1	<32.1	<32.1	<32.1	**24.6**
BH-313 @ 1FT	12/4/2023	1.0	<0.00122	<0.00122	<0.00122	<0.00244	<0.00122	<30.5	<30.5	<30.5	<30.5	**29.9**

Table 3
Summary of Analytical Results in Soil—Bottom Hole and Wall Samples
Jalapeno 3 RP Release
CDev ID No. 18316411845
GPS 32.372090°, -103.432341°
Lea County, New Mexico

Sample ID	Sample Date	Depth (feet bgs)	Benzene (mg/kg)	Toluene (mg/kg)	Ethylbenzene (mg/kg)	Total Xylenes (mg/kg)	Total BTEX (mg/kg)	TPH C6-C12 (GRO) (mg/kg)	TPH >C12-C28 (DRO) (mg/kg)	TPH >C28-C35 (ORO) (mg/kg)	Total TPH (mg/kg)	Laboratory Chloride (mg/kg)
			NMOCD closure Criteria for Impacted Soil (DTW ≤50 Feet bgs)									
			10				50				100	600
BH-314 @ 1FT	12/4/2023	1.0	<0.00102	<0.00102	<0.00102	<0.00204	<0.00102	<25.5	<25.5	<25.5	<25.5	**18.6**
BH-315 @ 1FT	12/4/2023	1.0	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**14.8**
BH-316 @ 1FT	12/4/2023	1.0	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**18.4**
BH-317 @ 1FT	12/4/2023	1.0	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**26.5**
BH-318 @ 1FT	12/4/2023	1.0	<0.00102	<0.00102	<0.00102	<0.00204	<0.00102	<25.5	<25.5	<25.5	<25.5	**20.0**
BH-319 @ 1FT	12/4/2023	1.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**27.6**
BH-320 @ 1FT	12/4/2023	1.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**23.8**
BH-321 @ 1FT	12/4/2023	1.0	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**23.8**
BH-322 @ 1FT	12/4/2023	1.0	<0.00102	<0.00102	<0.00102	<0.00204	<0.00102	<25.5	<25.5	<25.5	<25.5	**25.7**
BH-323 @ 1FT	12/4/2023	1.0	<0.00102	<0.00102	<0.00102	<0.00204	<0.00102	<25.5	<25.5	<25.5	<25.5	**19.2**
BH-324 @ 1FT	12/4/2023	1.0	<0.00102	<0.00102	<0.00102	<0.00204	<0.00102	<25.5	<25.5	<25.5	<25.5	**20.9**
BH-325 @ 1FT	12/4/2023	1.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**26.0**
BH-326 @ 1FT	12/4/2023	1.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**49.4**
BH-327 @ 1FT	12/4/2023	1.0	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**20.3**
BH-328 @ 1FT	12/4/2023	1.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**63.2**
BH-329 @ 1FT	12/4/2023	1.0	<0.00102	<0.00102	<0.00102	<0.00204	<0.00102	<25.5	<25.5	<25.5	<25.5	**28.0**
BH-330 @ 1FT	12/4/2023	1.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**25.6**
BH-331 @ 1FT	12/4/2023	1.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**40.7**
BH-332 @ 1FT	12/4/2023	1.0	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**18.5**
BH-333 @ 1FT	12/4/2023	1.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**38.5**
BH-334 @ 1FT	12/4/2023	1.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**37.8**
BH-335 @ 3FT	12/4/2023	3.0	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**18.9**
BH-336 @ 3FT	12/4/2023	3.0	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**60.8**
BH-337 @ 3FT	12/4/2023	3.0	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**163**
BH-338 @ 3FT	12/4/2023	3.0	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	<1.05
BH-339 @ 3FT	12/4/2023	3.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**58.2**
BH-340 @ 3FT	12/4/2023	3.0	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**52.8**
BH-341 @ 3FT	12/4/2023	3.0	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**35.5**
BH-342 @ 3FT	12/4/2023	3.0	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**91.7**
BH-343 @ 3FT	12/4/2023	3.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**38.4**
BH-344 @ 3FT	12/4/2023	3.0	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**13.6**
BH-345 @ 3FT	12/4/2023	3.0	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**64.9**
BH-346 @ 3FT	12/4/2023	3.0	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**124**
BH-347 @ 3FT	12/4/2023	3.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**11.5**
BH-348 @ 3FT	12/4/2023	3.0	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**8.06**
BH-349 @ 3FT	12/4/2023	3.0	<0.00108	<0.00108	<0.00108	<0.00215	<0.00108	<26.9	<26.9	<26.9	<26.9	**43.3**
BH-350 @ 3FT	12/4/2023	3.0	<0.00108	<0.00108	<0.00108	<0.00215	<0.00108	<26.9	<26.9	<26.9	<26.9	**17.3**
BH-351 @ 3FT	12/4/2023	3.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**45.1**
BH-352 @ 3FT	12/4/2023	3.0	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**16.4**

Table 3
Summary of Analytical Results in Soil—Bottom Hole and Wall Samples
Jalapeno 3 RP Release
CDev ID No. 18316411845
GPS 32.372090°, -103.432341°
Lea County, New Mexico

Sample ID	Sample Date	Depth (feet bgs)	Benzene (mg/kg)	Toluene (mg/kg)	Ethylbenzene (mg/kg)	Total Xylenes (mg/kg)	Total BTEX (mg/kg)	TPH C6-C12 (GRO) (mg/kg)	TPH >C12-C28 (DRO) (mg/kg)	TPH >C28-C35 (ORO) (mg/kg)	Total TPH (mg/kg)	Laboratory Chloride (mg/kg)
			NMOCD closure Criteria for Impacted Soil (DTW ≤50 Feet bgs)									
			10				50				100	600
BH-353 @ 3FT	12/4/2023	3.0	<0.00110	<0.00110	<0.00110	<0.00220	<0.00110	<27.5	<27.5	<27.5	<27.5	**48.8**
BH-354 @ 3FT	12/4/2023	3.0	<0.00102	<0.00102	<0.00102	<0.00204	<0.00102	<25.5	<25.5	<25.5	<25.5	**13.1**
BH-355 @ 8 IN	12/4/2023	0.7	<0.00102	<0.00102	<0.00102	<0.00204	<0.00102	<25.5	<25.5	<25.5	<25.5	**12.4**
BH-356 @ 8 IN	12/4/2023	0.7	<0.00102	<0.00102	<0.00102	<0.00204	<0.00102	<25.5	<25.5	<25.5	<25.5	**12.6**
BH-357 @ 8 IN	12/4/2023	0.7	<0.00102	<0.00102	<0.00102	<0.00204	<0.00102	<25.5	<25.5	<25.5	<25.5	**12.2**
BH-358 @ 8 IN	12/4/2023	0.7	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**246**
BH-359 @ 8 IN	12/4/2023	0.7	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**15.2**
BH-360 @ 8 IN	12/4/2023	0.7	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**13.9**
BH-361 @ 8 IN	12/4/2023	0.7	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**9.28**
BH-362 @ 8 IN	12/4/2023	0.7	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**8.62**
BH-363 @ 8 IN	12/4/2023	0.7	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**7.24**
BH-364 @ 8 IN	12/4/2023	0.7	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**8.99**
BH-365 @ 8 IN	12/4/2023	0.7	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**10.8**
BH-366 @ 8 IN	12/4/2023	0.7	<0.00102	<0.00102	<0.00102	<0.00204	<0.00102	<25.5	<25.5	<25.5	<25.5	**16.0**
BH-367 @ 8 IN	12/4/2023	0.7	<0.00102	<0.00102	<0.00102	<0.00204	<0.00102	<25.5	<25.5	<25.5	<25.5	**13.4**
BH-368 @ 8 IN	12/4/2023	0.7	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**30.6**
BH-369 @ 8 IN	12/4/2023	0.7	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**44.8**
BH-370 @ 8 IN	12/4/2023	0.7	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**41.3**
BH-371 @ 8 IN	12/4/2023	0.7	<0.00102	<0.00102	<0.00102	<0.00204	<0.00102	<25.5	<25.5	<25.5	<25.5	**18.0**
BH-372 @ 8 IN	12/4/2023	0.7	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**47.7**
BH-373 @ 8 IN	12/4/2023	0.7	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**21.4**
BH-374 @ 8 IN	12/4/2023	0.7	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**16.1**
BH-375 @ 8 IN	12/4/2023	0.7	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**46.7**
BH-376 @ 1FT	12/4/2023	1.0	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**11.7**
BH-377 @ 1FT	12/4/2023	1.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**30.4**
BH-378 @ 1FT	12/4/2023	1.0	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**12.7**
BH-379 @ 1FT	12/4/2023	1.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**58.7**
BH-380 @ 1FT	12/4/2023	1.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**56.3**
BH-381 @ 1FT	12/4/2023	1.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**10.2**
BH-382 @ 1FT	12/4/2023	1.0	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**31.9**
BH-383 @ 1FT	12/5/2023	1.0	<0.00103	<0.00103	<0.00103	<0.00206	<0.00206	<25.8	<25.8	<25.8	<25.8	**30.8**
BH-384 @ 1FT	12/5/2023	1.0	<0.00101	<0.00101	<0.00101	<0.00202	<0.00202	<25.3	**41.6**	<25.3	**41.6**	**69.3**
BH-384-B @ 1FT	12/6/2023	1.0	<0.00102	<0.00102	<0.00102	<0.00204	<0.00204	<25.5	<25.5	<25.5	<25.5	**28.3**
BH-385 @ 1FT	12/5/2023	1.0	<0.00102	<0.00102	<0.00102	<0.00204	<0.00204	<25.5	<25.5	<25.5	<25.5	**164**
BH-385-B @ 1FT	12/6/2023	1.0	<0.00103	<0.00103	<0.00103	<0.00206	<0.00206	<25.8	<25.8	<25.8	<25.8	**217**
BH-386 @ 1FT	12/5/2023	1.0	<0.00105	<0.00105	<0.00105	<0.00211	<0.00211	<26.3	<26.3	<26.3	<26.3	**13.3**
BH-387 @ 1FT	12/5/2023	1.0	<0.00110	<0.00110	<0.00110	<0.00220	<0.00220	<27.5	<27.5	<27.5	<27.5	**77.7**
BH-388 @ 3FT	12/6/2023	3.0	<0.00112	<0.00112	<0.00112	<0.00225	<0.00225	<28.1	<28.1	<28.1	<28.1	**25.0**
BH-389 @ 3FT	12/6/2023	3.0	<0.00109	<0.00109	<0.00109	<0.00217	<0.00217	<27.2	<27.2	<27.2	<27.2	**20.3**

Table 3
Summary of Analytical Results in Soil—Bottom Hole and Wall Samples
Jalapeno 3 RP Release
CDev ID No. 18316411845
GPS 32.372090°, -103.432341°
Lea County, New Mexico

Sample ID	Sample Date	Depth (feet bgs)	Benzene (mg/kg)	Toluene (mg/kg)	Ethylbenzene (mg/kg)	Total Xylenes (mg/kg)	Total BTEX (mg/kg)	TPH C6-C12 (GRO) (mg/kg)	TPH >C12-C28 (DRO) (mg/kg)	TPH >C28-C35 (ORO) (mg/kg)	Total TPH (mg/kg)	Laboratory Chloride (mg/kg)
			NMOCD closure Criteria for Impacted Soil (DTW ≤50 Feet bgs)									
			10				50				100	600
BH-390 @ 3FT	12/6/2023	3.0	<0.00109	<0.00109	<0.00109	<0.00217	<0.00217	<27.2	<27.2	<27.2	<27.2	**121**
BH-391 @ 3FT	12/6/2023	3.0	<0.00109	<0.00109	<0.00109	<0.00217	<0.00217	<27.2	<27.2	<27.2	<27.2	**43.0**
BH-393 @ 3FT	12/6/2023	3.0	<0.00105	<0.00105	<0.00105	<0.00211	<0.00211	<26.3	<26.3	<26.3	<26.3	**41.7**
BH-394 @ 3FT	12/6/2023	3.0	<0.00109	<0.00109	<0.00109	<0.00217	<0.00217	<27.2	<27.2	<27.2	<27.2	**22.4**
BH-395 @ 3FT	12/6/2023	3.0	<0.00110	<0.00110	<0.00110	<0.00220	<0.00220	<27.5	<27.5	<27.5	<27.5	**78.6**
BH-396 @ 3FT	12/6/2023	3.0	<0.00111	<0.00111	<0.00111	<0.00222	<0.00222	<27.8	<27.8	<27.8	<27.8	**15.2**
BH-397 @ 3FT	12/6/2023	3.0	<0.00111	<0.00111	<0.00111	<0.00222	<0.00222	<27.8	<27.8	<27.8	<27.8	**13.6**
BH-398 @ 1FT	12/6/2023	1.0	<0.00110	<0.00110	<0.00110	<0.00220	<0.00220	<27.5	<27.5	<27.5	<27.5	**24.1**
BH-399 @ 1FT	12/6/2023	1.0	<0.00111	<0.00111	<0.00111	<0.00222	<0.00222	<27.8	<27.8	<27.8	<27.8	**15.6**
BH-400 @ 1FT	12/6/2023	1.0	<0.00109	<0.00109	<0.00109	<0.00217	<0.00217	<27.2	<27.2	<27.2	<27.2	**21.2**
BH-401 @ 1FT	12/6/2023	1.0	<0.00111	<0.00111	<0.00111	<0.00222	<0.00222	<27.8	<27.8	<27.8	<27.8	**29.6**
BH-402 @ 1FT	12/6/2023	1.0	<0.00110	<0.00110	<0.00110	<0.00220	<0.00110	<27.5	<27.5	<27.5	<27.5	**63.6**
BH-403 @ 3FT	12/6/2023	3.0	<0.00109	<0.00109	<0.00109	<0.00217	<0.00109	<27.2	<27.2	<27.2	<27.2	**65.4**
BH-404 @ 3FT	12/6/2023	3.0	<0.00108	<0.00108	<0.00108	<0.00215	<0.00108	<26.9	<26.9	<26.9	<26.9	**224**
BH-405 @ 1.5	12/6/2023	1.5	<0.00102	<0.00102	<0.00102	<0.00204	<0.00102	<25.5	<25.5	<25.5	<25.5	**68.5**
BH-406 @ 1.5	12/6/2023	1.5	<0.00102	<0.00102	<0.00102	<0.00204	<0.00102	<25.5	<25.5	<25.5	<25.5	**115**
BH-407 @ 1.5	12/6/2023	1.5	<0.00110	<0.00110	<0.00110	<0.00220	<0.00110	<27.5	<27.5	<27.5	<27.5	**22.6**
BH-408 @ 1.5	12/6/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**45.3**
BH-409 @ 1.5	12/6/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**53.9**
BH-410 @ 1.5	12/6/2023	1.5	<0.00110	<0.00110	<0.00110	<0.00220	<0.00110	<27.5	<27.5	<27.5	<27.5	**23.3**
BH-411 @ 1.5	12/6/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**61.8**
BH-412 @ 1.5	12/6/2023	1.5	<0.00102	<0.00102	<0.00102	<0.00204	<0.00102	<25.5	<25.5	<25.5	<25.5	**27.1**
BH-413 @ 1.5	12/6/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**26.4**
BH-414 @ 1.5	12/6/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**8.28**
BH-415 @ 1.5	12/6/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**53.7**
BH-416 @ 3FT	12/6/2023	3.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**54.2**
BH-417 @ 3FT	12/6/2023	3.0	<0.00112	<0.00112	<0.00112	<0.00225	<0.00112	<28.1	<28.1	<28.1	<28.1	**37.6**
BH-418 @ 3FT	12/6/2023	3.0	<0.00112	<0.00112	<0.00112	<0.00225	<0.00112	<28.1	<28.1	<28.1	<28.1	**30.4**
BH-419 @ 3FT	12/6/2023	3.0	<0.00112	<0.00112	<0.00112	<0.00225	<0.00112	<28.1	<28.1	<28.1	<28.1	**29.1**
BH-420 @ 3FT	12/6/2023	3.0	<0.00114	<0.00114	<0.00114	<0.00227	<0.00114	<28.4	<28.4	<28.4	<28.4	**76.7**
BH-421 @ 3FT	12/6/2023	3.0	<0.00114	<0.00114	<0.00114	<0.00227	<0.00114	<28.4	<28.4	<28.4	<28.4	**76.5**
BH-422 @ 3FT	12/6/2023	3.0	<0.00102	<0.00102	<0.00102	<0.00204	<0.00102	<25.5	**116**	**29.1**	**146**	**100**
BH-422 @ 3.6	1/2/2024	3.6	<0.00115	<0.00115	<0.00115	<0.00230	<0.00230	<28.7	<28.7	<28.7	<28.7	**79.5**
BH-423 @ 3FT	12/6/2023	3.0	<0.00102	<0.00102	<0.00102	<0.00204	<0.00102	<25.5	**105**	**26.7**	**132**	**125**
BH-423 @ 3.6	1/2/2024	3.6	<0.00105	<0.00105	<0.00105	<0.00211	<0.00211	<26.3	<26.3	<26.3	<26.3	**81.4**

Table 3
Summary of Analytical Results in Soil—Bottom Hole and Wall Samples
Jalapeno 3 RP Release
CDev ID No. 18316411845
GPS 32.372090°, -103.432341°
Lea County, New Mexico

Sample ID	Sample Date	Depth (feet bgs)	Benzene (mg/kg)	Toluene (mg/kg)	Ethylbenzene (mg/kg)	Total Xylenes (mg/kg)	Total BTEX (mg/kg)	TPH C6-C12 (GRO) (mg/kg)	TPH >C12-C28 (DRO) (mg/kg)	TPH >C28-C35 (ORO) (mg/kg)	Total TPH (mg/kg)	Laboratory Chloride (mg/kg)
			NMOCD closure Criteria for Impacted Soil (DTW ≤50 Feet bgs)									
			10				50				100	600
BH-424 @ 3FT	12/6/2023	3.0	<0.00101	<0.00101	<0.00101	<0.00202	<0.00101	<25.3	**119**	**31.0**	**150**	**127**
BH-424 @ 3.6	1/2/2024	3.6	<0.00111	<0.00111	<0.00111	<0.00222	<0.00222	<27.8	<27.8	<27.8	<27.8	**71.7**
BH-425 @ 3FT	12/6/2023	3.0	<0.00102	<0.00102	<0.00102	<0.00204	<0.00102	<25.5	**102**	**26.6**	**129**	**118**
BH-425 @ 3.6	1/2/2024	3.6	<0.00125	<0.00125	<0.00125	<0.00250	<0.00250	<31.2	<31.2	<31.2	<31.2	**122**
BH-426 @ 1FT	12/6/2023	1.0	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**11.3**
BH-427 @ 1FT	12/6/2023	1.0	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**13.3**
BH-428 @ 2FT	12/6/2023	2.0	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**22.5**
BH-429 @ 2FT	12/6/2023	2.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**10.8**
BH-430 @ 2FT	12/11/2023	2.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00208	<26.0	**30.2**	<26.0	**30.2**	**66.7**
BH-431 @ 2FT	12/11/2023	2.0	<0.00103	<0.00103	<0.00103	<0.00206	<0.00206	<25.8	<25.8	<25.8	<25.8	**109**
BH-432 @ 2FT	12/11/2023	2.0	<0.00105	<0.00105	<0.00105	<0.00211	<0.00211	<26.3	<26.3	<26.3	<26.3	**10.8**
BH-433 @ 1.5FT	12/11/2023	1.5	<0.00114	<0.00114	<0.00114	<0.00227	<0.00227	<28.4	<28.4	<28.4	<28.4	**34.2**
BH-434 @ 1.5FT	12/11/2023	1.5	<0.00114	<0.00114	<0.00114	<0.00227	<0.00227	<28.4	<28.4	<28.4	<28.4	**32.9**
BH-435 @ 1.5FT	12/11/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00208	<26.0	<26.0	<26.0	<26.0	**66.8**
BH-436 @ 1.5FT	12/11/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00208	<26.0	<26.0	<26.0	<26.0	**75.8**
BH-437 @ 1.5FT	12/11/2023	1.5	<0.00109	<0.00109	<0.00109	<0.00217	<0.00217	<27.2	<27.2	<27.2	<27.2	**52.3**
BH-438 @ 1.5FT	12/11/2023	1.5	<0.00108	<0.00108	<0.00108	<0.00215	<0.00215	<26.9	<26.9	<26.9	<26.9	**56.1**
BH-439 @ 1.5FT	12/11/2023	1.5	<0.00108	<0.00108	<0.00108	<0.00215	<0.00215	<26.9	<26.9	<26.9	<26.9	**89.1**
BH-440 @ 1.5FT	12/11/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00211	<26.3	<26.3	<26.3	<26.3	**12.4**
BH-441 @ 1.5FT	12/11/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00211	<26.3	<26.3	<26.3	<26.3	**41.1**
BH-442 @ 1.5FT	12/11/2023	1.5	<0.00110	<0.00110	<0.00110	<0.00220	<0.00220	<27.5	<27.5	<27.5	<27.5	**108**
BH-442 B @ 1.5FT	12/11/2023	1.5	<0.00106	<0.00106	<0.00106	<0.00213	<0.00213	<26.6	<26.6	<26.6	<26.6	**202**
BH-443 @ 1.5FT	12/11/2023	1.5	<0.00105	<0.00105	<0.00105	<0.00211	<0.00211	<26.3	<26.3	<26.3	<26.3	**22.7**
BH-444 @ 2FT	12/11/2023	2.0	<0.00109	<0.00109	<0.00109	<0.00217	<0.00217	<27.2	<27.2	<27.2	<27.2	**41.6**
BH-445 @ 2FT	12/11/2023	2.0	<0.00109	<0.00109	<0.00109	<0.00217	<0.00217	<27.2	<27.2	<27.2	<27.2	**16.0**
BH-446 @ 2FT	12/11/2023	2.0	<0.00108	<0.00108	<0.00108	<0.00215	<0.00215	<26.9	<26.9	<26.9	<26.9	**50.2**
BH-447 @ 2FT	12/11/2023	2.0	<0.00109	<0.00109	<0.00109	<0.00217	<0.00217	<27.2	<27.2	<27.2	<27.2	**20.2**
BH-448 @ 2FT	12/11/2023	2.0	<0.00105	<0.00105	<0.00105	<0.00211	<0.00211	<26.3	<26.3	<26.3	<26.3	**147**
BH-449 @ 2FT	12/11/2023	2.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00208	<26.0	<26.0	<26.0	<26.0	**57.8**
BH-450 @ 1FT	12/11/2023	1.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00208	<26.0	<26.0	<26.0	<26.0	**31.9**
BH-451 @ 1FT	12/11/2023	1.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00208	<26.0	<26.0	<26.0	<26.0	**36.9**
BH-452 @ 1FT	12/11/2023	1.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00208	<26.0	<26.0	<26.0	<26.0	**8.98**
BH-453 @ 1FT	12/11/2023	1.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00208	<26.0	<26.0	<26.0	<26.0	**44.1**
BH-454 @ 1FT	12/11/2023	1.0	<0.00106	<0.00106	<0.00106	<0.00213	<0.00213	<26.6	<26.6	<26.6	<26.6	**70.5**
BH-455 @ 1FT	12/11/2023	1.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00208	<26.0	<26.0	<26.0	<26.0	**44.4**
BH-456 @ 1FT	12/11/2023	1.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00208	<26.0	<26.0	<26.0	<26.0	**51.6**

Table 3
Summary of Analytical Results in Soil—Bottom Hole and Wall Samples
Jalapeno 3 RP Release
CDev ID No. 18316411845
GPS 32.372090°, -103.432341°
Lea County, New Mexico

Sample ID	Sample Date	Depth (feet bgs)	Benzene (mg/kg)	Toluene (mg/kg)	Ethylbenzene (mg/kg)	Total Xylenes (mg/kg)	Total BTEX (mg/kg)	TPH C6-C12 (GRO) (mg/kg)	TPH >C12-C28 (DRO) (mg/kg)	TPH >C28-C35 (ORO) (mg/kg)	Total TPH (mg/kg)	Laboratory Chloride (mg/kg)
			NMOCD closure Criteria for Impacted Soil (DTW ≤50 Feet bgs)									
			10				50				100	600
BH-457 @ 1FT	12/11/2023	1.0	<0.00103	<0.00103	<0.00103	<0.00206	<0.00206	<25.8	<25.8	<25.8	<25.8	**101**
BH-458 @ 1FT	12/11/2023	1.0	<0.00106	<0.00106	<0.00106	<0.00213	<0.00213	<26.6	<26.6	<26.6	<26.6	**102**
BH-459 @ 1FT	12/11/2023	1.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00208	<26.0	<26.0	<26.0	<26.0	**46.3**
BH-460 @ 1FT	12/11/2023	1.0	<0.00106	<0.00106	<0.00106	<0.00213	<0.00213	<26.6	<26.6	<26.6	<26.6	**84.7**
BH-461 @ 1FT	12/11/2023	1.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00208	<26.0	<26.0	<26.0	<26.0	**47.2**
BH-462 @ 1FT	12/11/2023	1.0	<0.00105	<0.00105	<0.00105	<0.00211	<0.00211	<26.3	<26.3	<26.3	<26.3	**464**
BH-463 @ 1FT	12/11/2023	1.0	<0.00105	<0.00105	<0.00105	<0.00211	<0.00211	<26.3	<26.3	<26.3	<26.3	**64.6**
EW @ 1FT	11/20/2023	1.0	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**21.5**
EW-1 @ 10 In.	12/26/2023	0.8	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**28.9**
EW-2 @ 10 In.	12/26/2023	0.8	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**13.3**
EW-3 @ 10 In.	12/26/2023	0.8	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**15.8**
EW-4 @ 10 In.	12/26/2023	0.8	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**25.2**
EW-5 @ 10 In.	12/26/2023	0.8	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**18.2**
EW-6 @ 10 In.	12/26/2023	0.8	<0.00108	<0.00108	<0.00108	<0.00215	<0.00108	<26.9	<26.9	<26.9	<26.9	**65.4**
EW-7 @ 10 In.	12/26/2023	0.8	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**62.0**
EW-8 @ 1 Ft.	12/26/2023	1.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**23.0**
EW-9 @ 8 In.	12/26/2023	0.7	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**21.8**
EW-10 @ 1 Ft.	12/26/2023	1.0	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**40.2**
EW-11 @ 10 In.	12/26/2023	0.8	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**20.6**
EW-12 @ 10 In.	12/26/2023	0.8	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**43.5**
EW-13 @ 10 In.	12/26/2023	0.8	<0.00109	<0.00109	<0.00109	<0.00217	<0.00109	<27.2	<27.2	<27.2	<27.2	**222**
EW-14 @ 8 In.	12/26/2023	0.7	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**30.5**
EW-15 @ 8 In.	12/26/2023	0.7	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**20.0**
EW-16 @ 8 In.	12/26/2023	0.7	<0.00109	<0.00109	<0.00109	<0.00217	<0.00109	<27.2	<27.2	<27.2	<27.2	**133**
EW-17 @ 1.5 Ft.	12/26/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**24.1**
EW-17 @ 1.5 Ft.	12/26/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**30.4**
EW-18 @ 1.5 Ft.	12/26/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**23.5**
NEW-1 @ 8 In.	12/26/2023	0.7	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**24.4**
NEW-1 @ 1.5 Ft.	12/26/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**26.1**
NW-1 @ 1FT	11/17/2023	1.0	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**32.2**
NW-1 @ 1FT	11/20/2023	1.0	<0.00110	<0.00110	<0.00110	<0.00220	<0.00110	<27.5	<27.5	<27.5	<27.5	**39.6**
NW-1 @ 1.5 Ft.	12/26/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**13.5**
NW-2 @ 1 Ft.	12/26/2023	1.0	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**25.6**
NW-3 @ 8 In.	12/26/2023	0.7	<0.00109	<0.00109	<0.00109	<0.00217	<0.00109	<27.2	<27.2	<27.2	<27.2	**123**
NW-4 @ 10 In.	12/26/2023	0.8	<0.00109	<0.00109	<0.00109	<0.00217	<0.00109	<27.2	<27.2	<27.2	<27.2	**85.4**
NW-5 @ 1 Ft.	12/26/2023	1.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**17.4**
NW-6 @ 1 Ft.	12/26/2023	1.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**26.1**
NW-7 @ 10 In.	12/26/2023	0.8	<0.00111	<0.00111	<0.00111	<0.00222	<0.00111	<27.8	<27.8	<27.8	<27.8	**153**
NW-8 @ 1.5 Ft.	12/26/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**25.1**

Table 3
Summary of Analytical Results in Soil—Bottom Hole and Wall Samples
Jalapeno 3 RP Release
CDev ID No. 18316411845
GPS 32.372090°, -103.432341°
Lea County, New Mexico

Sample ID	Sample Date	Depth (feet bgs)	Benzene (mg/kg)	Toluene (mg/kg)	Ethylbenzene (mg/kg)	Total Xylenes (mg/kg)	Total BTEX (mg/kg)	TPH C6-C12 (GRO) (mg/kg)	TPH >C12-C28 (DRO) (mg/kg)	TPH >C28-C35 (ORO) (mg/kg)	Total TPH (mg/kg)	Laboratory Chloride (mg/kg)
			NMOCD closure Criteria for Impacted Soil (DTW ≤50 Feet bgs)									
			10				50				100	600
NW-9 @ 1.5 Ft.	12/26/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**18.7**
NWW-1 @ 8 In.	12/26/2023	0.7	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	**178**	<25.8	**178**	**29.3**
NWW-1-B @ 8 IN.	2/19/2024	0.7	<0.00102	<0.00102	<0.00102	<0.00204	<0.00102	<25.5	**27.6**	<25.5	**27.6**	**31.2**
NWW-2 @ 10 In.	12/26/2023	0.8	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**17.2**
NWW-2 @ 1 Ft.	12/26/2023	1.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**20.0**
SEW-1 @ 1 Ft.	12/26/2023	1.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**17.9**
SEW-2 @ 10 In.	12/26/2023	0.8	<0.00110	<0.00110	<0.00110	<0.00220	<0.00110	<27.5	<27.5	<27.5	<27.5	**211**
SW @ 1FT	11/20/2023	1.0	<0.00108	<0.00108	<0.00108	<0.00215	<0.00108	<26.9	<26.9	<26.9	<26.9	**37.5**
SW-1 @ 10 In.	12/26/2023	0.8	<0.00109	<0.00109	<0.00109	<0.00217	<0.00109	<27.2	<27.2	<27.2	<27.2	**58.2**
SW-1 @ 10 In.	12/26/2023	0.8	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**22.6**
SW-1 @ 1FT	11/17/2023	1.0	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**19.7**
SW-2 @ 1.5 Ft.	12/26/2023	1.5	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**17.5**
SW-3 @ 1 Ft.	12/26/2023	1.0	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**12.6**
SW-4 @ 1 Ft.	12/26/2023	1.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**12.1**
SW-5 @ 1 Ft.	12/26/2023	1.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**22.3**
SW-7 @ 8 In.	12/26/2023	0.7	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**61.7**
SW-7 @ 10 In.	12/26/2023	0.8	<0.00106	<0.00106	<0.00106	<0.00213	<0.00106	<26.6	<26.6	<26.6	<26.6	**67.6**
SW-8 @ 8 In.	12/26/2023	0.7	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**25.6**
SW-9 @ 10 In.	12/26/2023	0.8	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**49.9**
SW-10 @ 10 In.	12/26/2023	0.8	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	**34.4**	**34.4**	**36.6**
SW-11 @ 1.5 Ft.	12/26/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**21.4**
SW-12 @ 1.5 Ft.	12/26/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**137**
SWW-1 @ 10 In.	12/26/2023	0.8	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**23.6**
SWW-2 @ 10 In.	12/26/2023	0.8	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**24.2**
WW-1 @ 10 In.	12/26/2023	0.8	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**16.4**
WW-2 @ 8 In.	12/26/2023	0.7	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**16.4**
WW-3 @ 10 In.	12/26/2023	0.8	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**13.9**
WW-4 @ 10 In.	12/26/2023	0.8	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**19.6**
WW-5 @ 1.5 Ft.	12/26/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**13.8**
WW-6 @ 1 Ft.	12/26/2023	1.0	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**22.3**
WW-7 @ 8 In.	12/26/2023	0.7	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**30.2**
WW-8 @ 10 In.	12/26/2023	0.8	<0.00109	<0.00109	<0.00109	<0.00217	<0.00109	<27.2	<27.2	<27.2	<27.2	**71.9**
WW-9 @ 10 In.	12/26/2023	0.8	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**17.8**
WW-10 @ 10 In.	12/26/2023	0.8	<0.00105	<0.00105	<0.00105	<0.00211	<0.00105	<26.3	<26.3	<26.3	<26.3	**48.2**
WW-11 @ 10 In.	12/26/2023	0.8	<0.00104	<0.00104	<0.00104	<0.00208	<0.00104	<26.0	<26.0	<26.0	<26.0	**23.5**
WW-12 @ 1.5 Ft.	12/26/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**62.3**
WW-13 @ 1.5 Ft.	12/26/2023	1.5	<0.00103	<0.00103	<0.00103	<0.00206	<0.00103	<25.8	<25.8	<25.8	<25.8	**95.6**

Table 3
Summary of Analytical Results in Soil—Bottom Hole and Wall Samples
Jalapeno 3 RP Release
CDev ID No. 18316411845
GPS 32.372090°, -103.432341°
Lea County, New Mexico

Sample ID	*Sample Date*	*Depth (feet bgs)*	*Benzene (mg/kg)*	*Toluene (mg/kg)*	*Ethylbenzene (mg/kg)*	*Total Xylenes (mg/kg)*	*Total BTEX (mg/kg)*	*TPH C6-C12 (GRO) (mg/kg)*	*TPH >C12-C28 (DRO) (mg/kg)*	*TPH >C28-C35 (ORO) (mg/kg)*	*Total TPH (mg/kg)*	*Laboratory Chloride (mg/kg)*
			NMOCD closure Criteria for Impacted Soil (DTW ≤50 Feet bgs)									
			10				*50*				*100*	*600*

Notes:

1. bgs - below ground surface
2. BTEX - benzene, toluene, ethy-benzene, and total xylenes
3. TPH - total petroleum hydrocarbons
4. GRO - gasoline range organics
5. DRO - diesel range organics
6. ORO - oil range organics
7. NMOCD - New Mexico Oil Conservation Division
8. Bold font indicates analyte detected above the laboratory reporting limits
9. Yellow highlighting and bold indicates analytical results exceeding the NMOCD closure criteria for TPH and chlorides
10. BH - Bottom hole sample from floor of excavation
11. Samples names ending in W - Wall Samples

Attachment A
Site Characterization Documentation

OSE POD Location Map

2/20/2024, 11:07:11 AM

Excavation

Excavation

GIS WATERS PODs

Active

Pending

Federal Lands

New Mexico State Trust Lands

Subsurface Estate

Both Estates

NHD Flowlines

Stream River

2.49 in

1:9,028

0 0.07 0.15 0.3 mi

0 0.13 0.25 0.5 km

Esri, HERE, iPC
Esri, HERE, Garmin, iPC
Maxar

Online web user

This is an unofficial map from the OSE's online application.

New Mexico Office of the State Engineer

Point of Diversion Summary

(quarters are 1=NW 2=NE 3=SW 4=SE)
(quarters are smallest to largest) (NAD83 UTM in meters)

Well Tag	POD Number	Q64	Q16	Q4	Sec	Tws	Rng	X	Y
2062C	CP 01684 POD1	2	1	4	23	22S	34E	646932	3583129

Driller License: **Driller Company:**

Driller Name:

Drill Start Date: **Drill Finish Date:** **Plug Date:**

Log File Date: **PCW Rcv Date:** **Source:**

Pump Type: **Pipe Discharge Size:** **Estimated Yield:**

Casing Size: **Depth Well:** 300 feet **Depth Water:**

The data is furnished by the NMOSE/ISC and is accepted by the recipient with the expressed understanding that the OSE/ISC make no warranties, expressed or implied, concerning the accuracy, completeness, reliability, usability, or suitability for any particular purpose of the data.

New Mexico Office of the State Engineer
Point of Diversion Summary

(quarters are 1=NW 2=NE 3=SW 4=SE)
(quarters are smallest to largest) (NAD83 UTM in meters)

Well Tag	POD Number	Q64	Q16	Q4	Sec	Twn	Rng	X	Y
NA	CP 01718 POD1	2	3	3	24	22S	34E	647700	3582811

Driller License: 421 **Driller Company:** GLENN'S WATER WELL SERVICE

Driller Name: CORKY GLENN

Drill Start Date: 05/09/2019 **Drill Finish Date:** 05/13/2019 **Plug Date:**

Log File Date: 06/10/2019 **PCW Rcv Date:** **Source:** Artesian

Pump Type: **Pipe Discharge Size:** **Estimated Yield:** 120 GPM

Casing Size: 8.13 **Depth Well:** 1172 feet **Depth Water:** 855 feet

Water Bearing Stratifications:	Top	Bottom	Description
	800	855	Sandstone/Gravel/Conglomerate
	855	918	Sandstone/Gravel/Conglomerate
	950	1139	Sandstone/Gravel/Conglomerate

Casing Perforations:	Top	Bottom
	752	1172

Meter Number: 20164 **Meter Make:** SEAMETRICS

Meter Serial Number: 03212352 **Meter Multiplier:** 1.0000

Number of Dials: 8 **Meter Type:** Diversion

Unit of Measure: Barrels 42 gal. **Return Flow Percent:**

Usage Multiplier: **Reading Frequency:** Monthly

Meter Readings (in Acre-Feet)

Read Date	Year	Mtr Reading	Flag	Rdr	Comment	Mtr Amount	Online
09/02/2019	2019	15042	A	ad		0	
04/09/2020	2020	15042	A	ad		0	
05/31/2020	2020	15042	A	ad		0	
06/30/2020	2020	15042	A	ad		0	
07/31/2020	2020	15042	A	ad		0	
08/31/2020	2020	15042	A	ad		0	
09/30/2020	2020	15042	A	ad		0	
10/31/2020	2020	15042	A	ad		0	
11/30/2020	2020	15042	A	ad		0	
12/31/2020	2020	15042	A	ad		0	
01/31/2021	2021	15042	A	ad		0	
02/28/2021	2021	20251	A	ad		0.671	
03/31/2021	2021	20251	A	ad		0	
04/30/2021	2021	20536	A	ad		0.037	
05/13/2021	2021	0	A	ad		0	
05/31/2021	2021	0	A	ad		0	
06/30/2021	2021	18656	A	ad		2.405	
07/31/2021	2021	19655	A	ad		0.129	

08/31/2021	2021	53526	A	ad	4.366	
09/30/2021	2021	85398	A	ad	4.108	
10/31/2021	2021	109132	A	ad	3.059	
11/30/2021	2021	129634	A	ad	2.643	
12/26/2021	2021	150430	A	ad	2.680	
01/31/2022	2022	180793	A	ad	3.914	
02/28/2022	2022	180794	A	ad	0	
03/31/2022	2022	196267	A	ad	1.994	
04/30/2022	2022	240915	A	ad	5.755	
06/01/2022	2022	255789	A	ad	1.917	
07/01/2022	2022	288319	A	ad	4.193	
08/01/2022	2022	324972	A	ad	4.724	
11/01/2022	2022	351870	A	WEB	3.467	X
12/01/2022	2022	374916	A	WEB	2.970	X
01/01/2023	2022	380172	A	WEB	0.677	X
02/01/2023	2023	380174	A	WEB	0	X
03/01/2023	2023	416655	A	WEB	4.702	X
04/01/2023	2023	445946	A	WEB	3.775	X
05/01/2023	2023	445947	A	WEB	0	X
06/01/2023	2023	478762	A	WEB	4.230	X
07/01/2023	2023	516581	A	WEB	4.875	X
08/01/2023	2023	520424	A	WEB	0.495	X
09/01/2023	2023	520424	A	WEB	0	X
10/01/2023	2023	520424	A	WEB	0	X
11/01/2023	2023	539925	A	WEB	2.514	X
12/01/2023	2023	574932	A	WEB	4.512	X
01/01/2024	2023	606463	A	WEB	4.064	X
02/01/2024	2024	618160	A	WEB	1.508	X
03/01/2024	2024	642973	A	WEB	3.198	X
04/01/2024	2024	648165	A	WEB	0.669	X
05/01/2024	2024	667012	A	WEB	2.429	X
06/07/2024	2024	692739	A	WEB	3.316	X

x

**YTD Meter Amounts:	Year	Amount
	2019	0
	2020	0
	2021	20.098
	2022	29.611
	2023	29.167
	2024	11.120

x

The data is furnished by the NMOSE/ISC and is accepted by the recipient with the expressed understanding that the OSE/ISC make no warranties, expressed or implied, concerning the accuracy, completeness, reliability, usability, or suitability for any particular purpose of the data.

New Mexico Office of the State Engineer
Point of Diversion Summary

(quarters are 1=NW 2=NE 3=SW 4=SE)
(quarters are smallest to largest) (NAD83 UTM in meters)

Well Tag	POD Number	Q64	Q16	Q4	Sec	Twn	Rng	X	Y
NA	CP 01719 POD1	4	4	3	24	22S	34E	648215	3582680

Driller License: 421 **Driller Company:** GLENN'S WATER WELL SERVICE

Driller Name: GLENN, CLARK A."CORKY", CE

Drill Start Date: 05/20/2019 **Drill Finish Date:** 05/24/2019 **Plug Date:**

Log File Date: 06/10/2019 **PCW Rcv Date:** **Source:** Artesian

Pump Type: **Pipe Discharge Size:** **Estimated Yield:** 100 GPM

Casing Size: 8.00 **Depth Well:** 1173 feet **Depth Water:** 838 feet

Water Bearing Stratifications:

Top	Bottom	Description
826	857	Shale/Mudstone/Siltstone
857	953	Shale/Mudstone/Siltstone
953	1150	Sandstone/Gravel/Conglomerate
1150	1173	Shale/Mudstone/Siltstone

Casing Perforations:

Top	Bottom
753	1173

Meter Number: 20158 **Meter Make:** SEAMETRICS

Meter Serial Number: 10 200 093 **Meter Multiplier:** 1.0000

Number of Dials: 8 **Meter Type:** Diversion

Unit of Measure: Barrels 42 gal. **Return Flow Percent:**

Usage Multiplier: **Reading Frequency:** Monthly

Meter Readings (in Acre-Feet)

Read Date	Year	Mtr Reading	Flag	Rdr	Comment	Mtr Amount	Online
04/30/2020	2020	11980	A	ad		0	
05/31/2020	2020	11980	A	ad		0	
06/30/2020	2020	11980	A	ad		0	
07/31/2020	2020	11980	A	ad		0	
08/31/2020	2020	11980	A	ad		0	
09/30/2020	2020	11980	A	ad		0	
10/31/2020	2020	11980	A	ad		0	
11/30/2020	2020	11980	A	ad		0	
12/31/2020	2020	11980	A	ad		0	
01/31/2021	2021	11980	A	ad		0	
02/20/2021	2021	0	A	ad		0	
02/28/2021	2021	3493	A	ad		0.450	
03/31/2021	2021	3493	A	ad		0	
04/30/2021	2021	6905	A	ad		0.440	
05/31/2021	2021	47818	A	ad		5.273	
06/30/2021	2021	59007	A	ad		1.442	
07/31/2021	2021	78515	A	ad		2.514	

08/31/2021	2021	119887	A	ad	5.333	
09/30/2021	2021	163769	A	ad	5.656	
10/31/2021	2021	195376	A	ad	4.074	
11/30/2021	2021	226335	A	ad	3.990	
12/26/2021	2021	258461	A	ad	4.141	
01/31/2022	2022	299247	A	ad	5.257	
02/28/2022	2022	299273	A	ad	0.003	
03/31/2022	2022	299273	A	ad	0	
04/30/2022	2022	391169	A	ad	11.845	
06/01/2022	2022	395948	A	ad	0.616	
07/01/2022	2022	465704	A	ad	8.991	
08/05/2022	2022	503843	A	ad	4.916	
09/01/2022	2022	534781	A	ad	3.988	
11/01/2022	2022	534782	A	WEB	0	X
12/01/2022	2022	564473	A	WEB	3.827	X
01/01/2023	2022	570659	A	WEB	0.797	X
02/01/2023	2023	570666	A	WEB	0.001	X
03/01/2023	2023	629574	A	WEB	7.593	X
04/01/2023	2023	670661	A	WEB	5.296	X
05/01/2023	2023	670662	A	WEB	0	X
06/01/2023	2023	722663	A	WEB	6.703	X
07/01/2023	2023	780574	A	WEB	7.464	X
08/01/2023	2023	785760	A	WEB	0.668	X
09/01/2023	2023	785760	A	WEB	0	X
10/01/2023	2023	785760	A	WEB	0	X
11/01/2023	2023	813433	A	WEB	3.567	X
12/01/2023	2023	849272	A	WEB	4.619	X
01/01/2024	2023	891289	A	WEB	5.416	X
02/01/2024	2024	897627	A	WEB	0.817	X
03/01/2024	2024	909761	A	WEB	1.564	X
04/01/2024	2024	918893	A	WEB	1.177	X
05/01/2024	2024	958642	A	WEB	5.123	X
06/07/2024	2024	1002904	A	WEB	5.705	X

**YTD Meter Amounts:	Year	Amount
	2020	0
	2021	33.313
	2022	40.240
	2023	41.327
	2024	14.386

The data is furnished by the NMOSE/ISC and is accepted by the recipient with the expressed understanding that the OSE/ISC make no warranties, expressed or implied, concerning the accuracy, completeness, reliability, usability, or suitability for any particular purpose of the data.

USGS science for a changing world

National Water Information System: Mapper

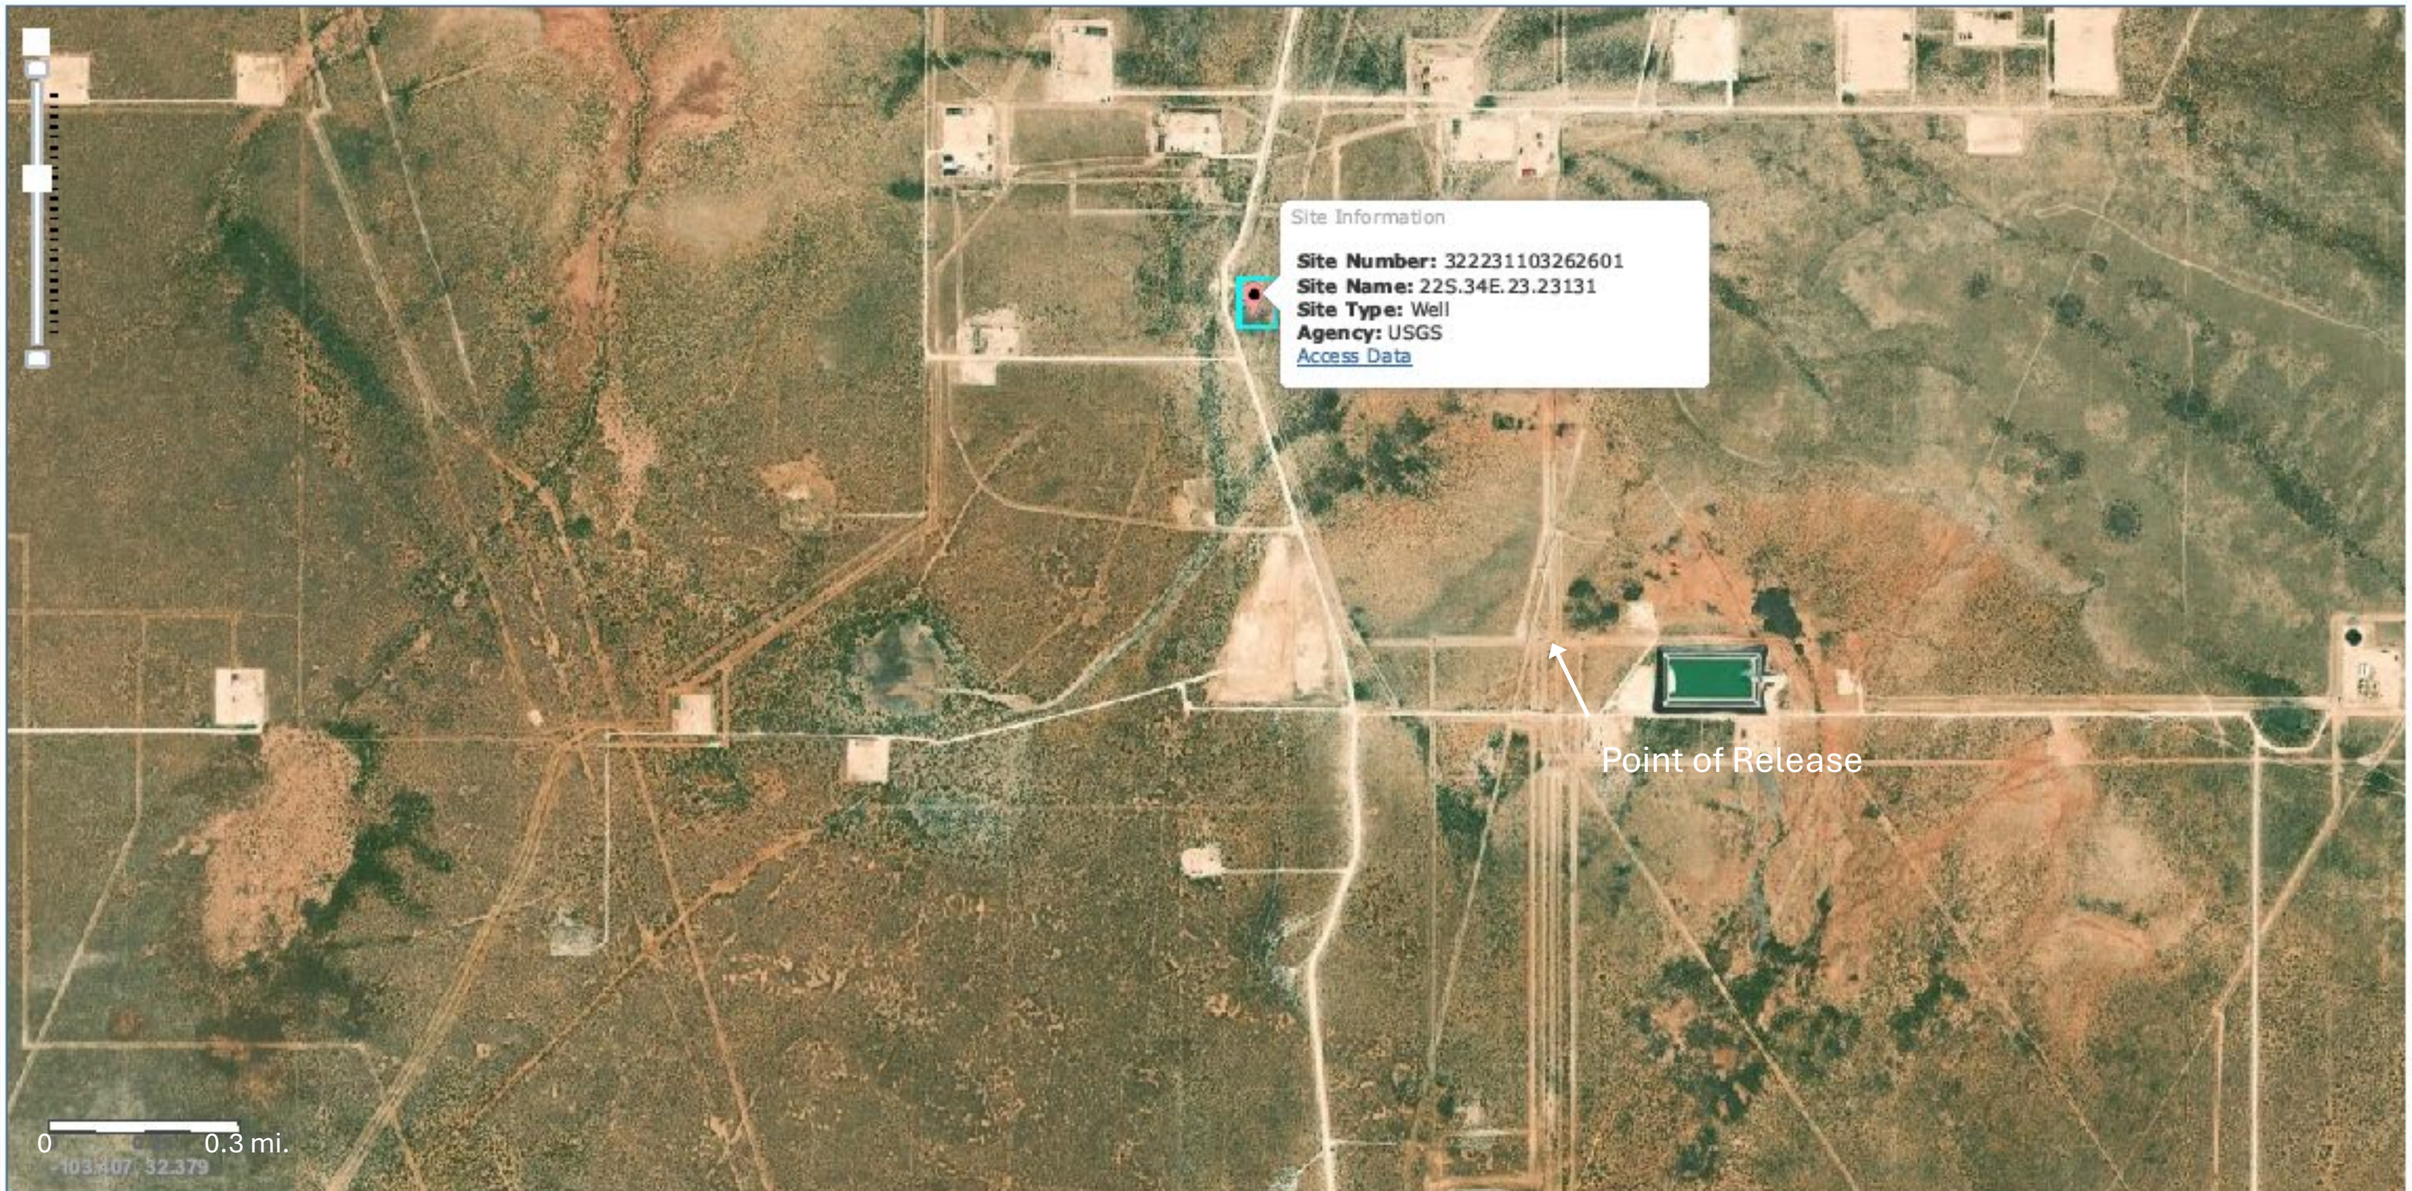

Site Information

Click to hideNews Bulletins

- Explore the *NEW* USGS National Water Dashboard interactive map to access real-time water data from over 13,500 stations nationwide.
- Full News

Groundwater levels for the Nation

Important: Next Generation Monitoring Location Page

Search Results -- 1 sites found

Agency code = usgs
site_no list =
- 322231103262601

Minimum number of levels = 1
Save file of selected sites to local disk for future upload

USGS 322231103262601 22S.34E.23.23131

Lea County, New Mexico
Latitude 32°22'47.6", Longitude 103°26'25.3" NAD83
Land-surface elevation 3,452 feet above NAVD88
The depth of the well is 60 feet below land surface.
This well is completed in the Other aquifers (N9999OTHER) national aquifer.
This well is completed in the Alluvium, Bolson Deposits and Other Surface Deposits (110AVMB) local aquifer.

Output formats

Table of data
Tab-separated data
Graph of data
Reselect period

Date	Time	? Water-level date-time accuracy	? Parameter code	Water level, feet below land surface	Water level, feet above specific vertical datum	Referenced vertical datum	? Status	? Method of measurement	? Measuring agency	? Source measur
1968-06-10		D	62610		3425.15	NGVD29	1	Z		
1968-06-10		D	62611		3426.75	NAVD88	1	Z		
1968-06-10		D	72019	25.25			1	Z		
1971-09-08		D	62610		3423.42	NGVD29	P	Z		
1971-09-08		D	62611		3425.02	NAVD88	P	Z		
1971-09-08		D	72019	26.98			P	Z		
1976-12-16		D	62610		3426.10	NGVD29	1	Z		
1976-12-16		D	62611		3427.70	NAVD88	1	Z		
1976-12-16		D	72019	24.30			1	Z		
1981-03-18		D	62610		3427.03	NGVD29	1	Z		
1981-03-18		D	62611		3428.63	NAVD88	1	Z		
1981-03-18		D	72019	23.37			1	Z		
1986-04-10		D	62610		3427.57	NGVD29	1	Z		
1986-04-10		D	62611		3429.17	NAVD88	1	Z		
1986-04-10		D	72019	22.83			1	Z		
1991-05-03		D	62610		3427.87	NGVD29	1	Z		

Date	Time	? Water-level date-time accuracy	? Parameter code	Water level, feet below land surface	Water level, feet above specific vertical datum	Referenced vertical datum	? Status	? Method of measurement	? Measuring agency	? Source measur
1991-05-03		D	62611		3429.47	NAVD88	1	Z		
1991-05-03		D	72019	22.53			1	Z		
1996-02-21		D	62610		3428.27	NGVD29	1	S		
1996-02-21		D	62611		3429.87	NAVD88	1	S		
1996-02-21		D	72019	22.13			1	S		
2015-12-18	21:30 UTC	m	62610		3433.01	NGVD29	1	S	USGS	
2015-12-18	21:30 UTC	m	62611		3434.61	NAVD88	1	S	USGS	
2015-12-18	21:30 UTC	m	72019	17.39			1	S	USGS	

Explanation

Section	Code	Description
Water-level date-time accuracy	D	Date is accurate to the Day
Water-level date-time accuracy	m	Date is accurate to the Minute
Parameter code	62610	Groundwater level above NGVD 1929, feet
Parameter code	62611	Groundwater level above NAVD 1988, feet
Parameter code	72019	Depth to water level, feet below land surface
Referenced vertical datum	NAVD88	North American Vertical Datum of 1988
Referenced vertical datum	NGVD29	National Geodetic Vertical Datum of 1929
Status	1	Static
Status	P	Pumping
Method of measurement	S	Steel-tape measurement.
Method of measurement	Z	Other.
Measuring agency		Not determined
Measuring agency	USGS	U.S. Geological Survey
Source of measurement		Not determined
Source of measurement	S	Measured by personnel of reporting agency.
Water-level approval status	A	Approved for publication -- Processing and review completed.

Questions or Comments
Automated retrievals
Help
Data Tips
Explanation of terms
Subscribe for system changes
News

Accessibility FOIA Privacy Policies and Notices
U.S. Department of the Interior | U.S. Geological Survey
Title: Groundwater for USA: Water Levels
URL: https://nwis.waterdata.usgs.gov/nwis/gwlevels?

Page Contact Information: USGS Water Data Support Team
Page Last Modified: 2024-06-10 19:53:57 EDT
0.28 0.24 nadww01

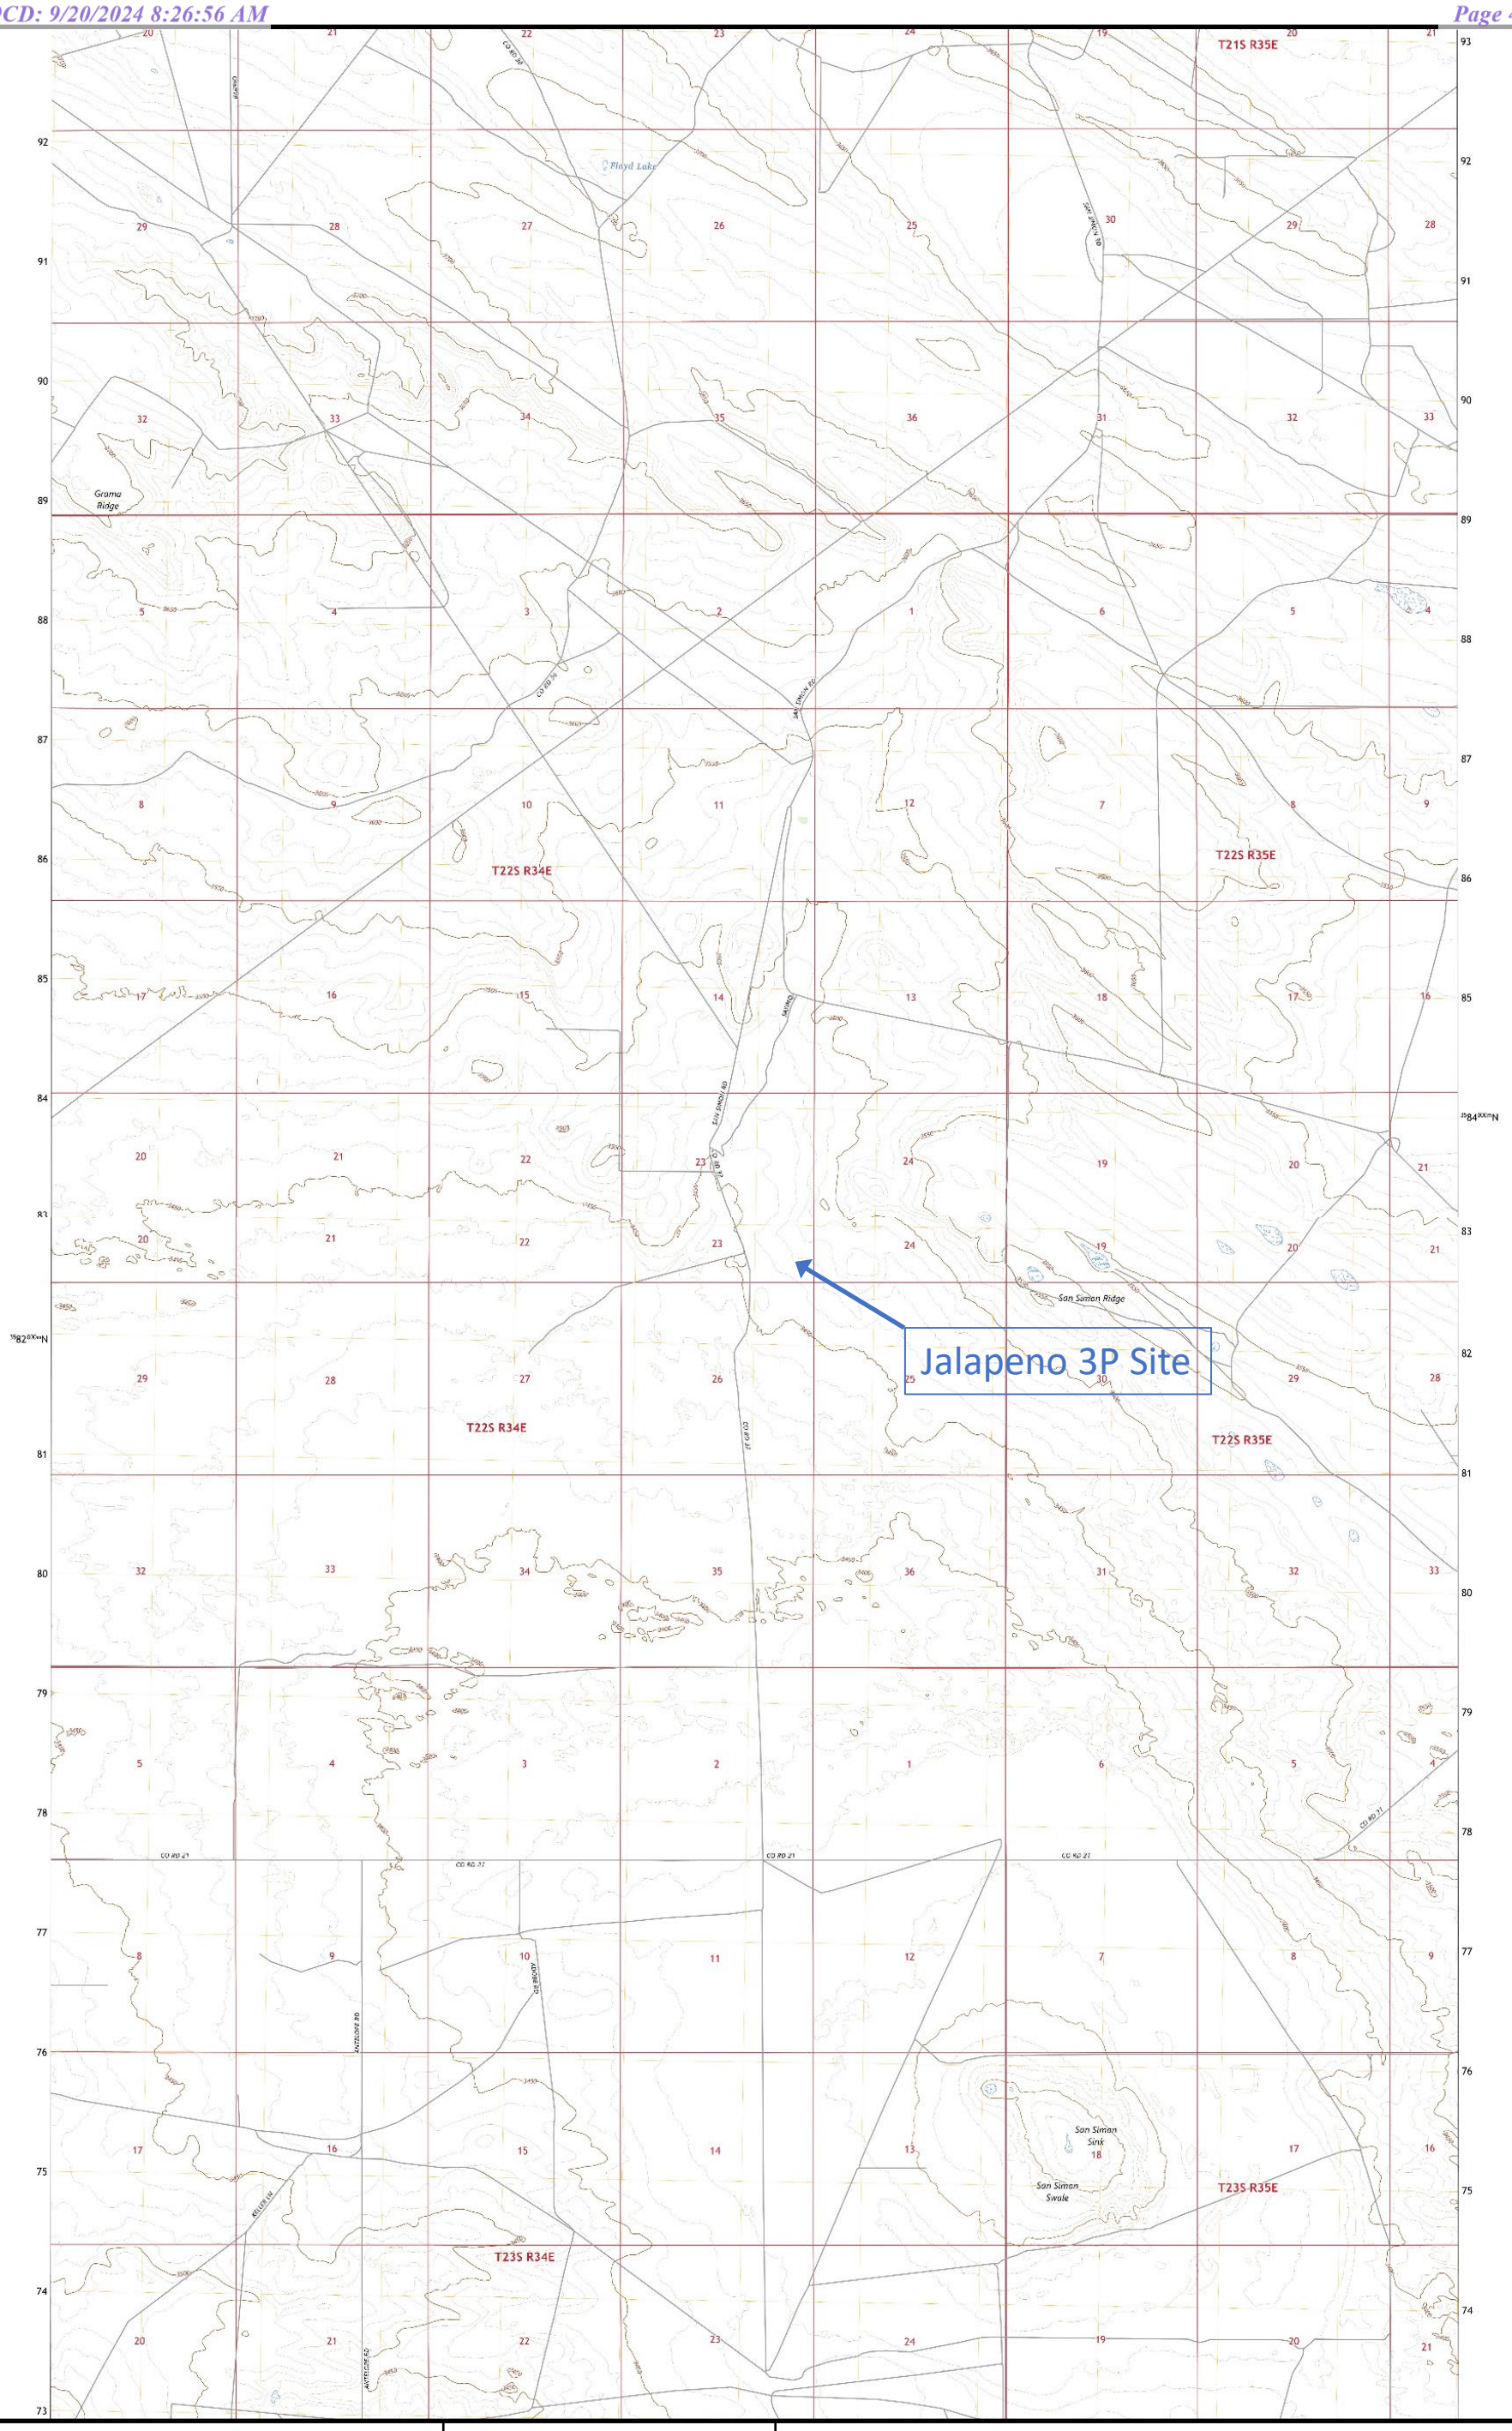

Permian Release ID No. 18316411845	5280 Feet	Map of Watercourses
Photo Sources: USGS San Simon Ranch Quadrangle 7.5' 20230703 USGS San Simon Sink Quadrangle 7.5' 20230703	TELLUS ENVIRONMENTAL	Permian Resources-Jalapeno 3P Release GPS 32.372089 -103.432340 Lea County, New Mexico
Date: 7/25/24		

Jalapeno 3P Release--NMSLO Karst Potential

0 0.2 0.4 0.8 mi

N

New Mexico State Land Office

Disclaimer:
The New Mexico State Land Office assumes no responsibility or liability for, or in connection with the accuracy, reliability or use of the information provided herein with respect to State Land Office data or data from other sources.

Data pertaining to New Mexico State Trust Lands are provisional and subject to revision, and do not constitute an official record of title. Official records may be reviewed at the New Mexico State Land Office in Santa Fe, New Mexico.

Map Created: 7/22/2024

Karst_Potential_NM
Potential
- High
- Medium
- Low
- Critical_Karst_Zone_NM



Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

U.S. Fish and Wildlife Service
National Wetlands Inventory

Figure ??
Jalapeno 3 RP

February 20, 2024

Wetlands

- Estuarine and Marine Deepwater
- Estuarine and Marine Wetland
- Freshwater Emergent Wetland
- Freshwater Forested/Shrub Wetland
- Freshwater Pond
- Lake
- Other
- Riverine

This map is for general reference only. The US Fish and Wildlife Service is not responsible for the accuracy or currentness of the base data shown on this map. All wetlands related data should be used in accordance with the layer metadata found on the Wetlands Mapper web site.

National Wetlands Inventory (NWI)
This page was produced by the NWI mapper

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

National Flood Hazard Layer FIRMette

FEMA

103°26'18"W 32°22'30"N

0 250 500 1,000 1,500 2,000 Feet

1:6,000

103°25'40"W 32°22'N

Basemap Imagery Source: USGS National Map 2023

Legend

SEE FIS REPORT FOR DETAILED LEGEND AND INDEX MAP FOR FIRM PANEL LAYOUT

SPECIAL FLOOD HAZARD AREAS
- Without Base Flood Elevation (BFE) *Zone A, V, A99*
- With BFE or Depth *Zone AE, AO, AH, VE, AR*
- Regulatory Floodway

OTHER AREAS OF FLOOD HAZARD
- 0.2% Annual Chance Flood Hazard, Areas of 1% annual chance flood with average depth less than one foot or with drainage areas of less than one square mile *Zone X*
- Future Conditions 1% Annual Chance Flood Hazard *Zone X*
- Area with Reduced Flood Risk due to Levee. See Notes. *Zone X*
- Area with Flood Risk due to Levee *Zone D*

OTHER AREAS
- NO SCREEN Area of Minimal Flood Hazard *Zone X*
- Effective LOMRs
- Area of Undetermined Flood Hazard *Zone D*

GENERAL STRUCTURES
- Channel, Culvert, or Storm Sewer
- Levee, Dike, or Floodwall

OTHER FEATURES
- 20.2 Cross Sections with 1% Annual Chance
- 17.5 Water Surface Elevation
- Coastal Transect
- 513 Base Flood Elevation Line (BFE)
- Limit of Study
- Jurisdiction Boundary
- Coastal Transect Baseline
- Profile Baseline
- Hydrographic Feature

MAP PANELS
- Digital Data Available
- No Digital Data Available
- Unmapped

N

The pin displayed on the map is an approximate point selected by the user and does not represent an authoritative property location.

This map complies with FEMA's standards for the use of digital flood maps if it is not void as described below. The basemap shown complies with FEMA's basemap accuracy standards

The flood hazard information is derived directly from the authoritative NFHL web services provided by FEMA. This map was exported on 2/20/2024 at 5:55 PM and does not reflect changes or amendments subsequent to this date and time. The NFHL and effective information may change or become superseded by new data over time.

This map image is void if the one or more of the following map elements do not appear: basemap imagery, flood zone labels, legend, scale bar, map creation date, community identifiers, FIRM panel number, and FIRM effective date. Map images for unmapped and unmodernized areas cannot be used for regulatory purposes.

Released to Imaging: 12/18/2024 7:45:13 AM

Attachment B
Photographic Log

Permian Resources-Jalapeno 3 RP
CDEVID: 18316411845
GPS: 32.372090, -103.432341
Lea County, New Mexico

Photo 1. Overhead view of release area. North is toward top of photo.

Photo 2. View of point of release. This is the ruptured Y in Permian Resources line.

Permian Resources-Jalapeno 3 RP
CDEVID: 18316411845
GPS: 32.372090, -103.432341
Lea County, New Mexico

Photo 3. East view of release along northern margin of affected area.

Photo 4. East view along lease road during recovery activities.

Permian Resources-Jalapeno 3 RP
CDEVID: 18316411845
GPS: 32.372090, -103.432341
Lea County, New Mexico

Photo 5. View of contaminated soil being collected during initial response.

Photo 6. View of contaminated soil being collected with backhoe.

Permian Resources-Jalapeno 3 RP
CDEVID: 18316411845
GPS: 32.372090, -103.432341
Lea County, New Mexico

Photo 7. View of contaminated soil being collected.

Photo 8. View of contaminated soil being collected with backhoe.

Permian Resources-Jalapeno 3 RP
CDEVID: 18316411845
GPS: 32.372090, -103.432341
Lea County, New Mexico

Photo 9. View of contaminated soil being collected with excavator.

Photo 10. View of contaminated soil being collected with excavator.

Permian Resources-Jalapeno 3 RP
CDEVID: 18316411845
GPS: 32.372090, -103.432341
Lea County, New Mexico

Photo 11. View of contaminated soil being collected with excavator.

Photo 12. View of contaminated soil being collected.

Permian Resources-Jalapeno 3 RP
CDEVID: 18316411845
GPS: 32.372090, -103.432341
Lea County, New Mexico

Photo 13. View of contaminated soil being collected.

Photo 14. View of excavated area.

Permian Resources-Jalapeno 3 RP
CDEVID: 18316411845
GPS: 32.372090, -103.432341
Lea County, New Mexico

Photo 15. View of flags marking locations for collection of soil samples during excavation activities.

Photo 16. View of stockpile of waste soil.

Permian Resources-Jalapeno 3 RP
CDEVID: 18316411845
GPS: 32.372090, -103.432341
Lea County, New Mexico

Photo 17. View of site during backfilling activities,

Photo 18. View of site during backfilling activities.

Permian Resources-Jalapeno 3 RP
CDEVID: 18316411845
GPS: 32.372090, -103.432341
Lea County, New Mexico

Photo 19. View of site during backfilling activities.

Photo 20. View of site after completion of remediation and backfilling.

Permian Resources-Jalapeno 3 RP
CDEVID: 18316411845
GPS: 32.372090, -103.432341
Lea County, New Mexico

Photo 21. View of remediated area on about July 10, 2024 showing emerging revegetation.

Photo 22. View of remediated area on about July 10, 2024 showing emerging revegetation.

Permian Resources-Jalapeno 3 RP
CDEVID: 18316411845
GPS: 32.372090, -103.432341
Lea County, New Mexico

Photo 23. View of remediated area on about July 10, 2024 showing emerging revegetation.

Photo 24. View of remediated area on about July 10, 2024 showing emerging revegetation.

Permian Resources-Jalapeno 3 RP
CDEVID: 18316411845
GPS: 32.372090, -103.432341
Lea County, New Mexico

Photo 25. View of remediated area on about July 10, 2024 showing emerging revegetation.

Photo 26. View of remediated area on about July 10, 2024 showing emerging revegetation.

Permian Resources-Jalapeno 3 RP
CDEVID: 18316411845
GPS: 32.372090, -103.432341
Lea County, New Mexico

Photo 27. View of remediated area on about July 10, 2024 showing emerging revegetation.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

QUESTIONS

Operator: Permian Resources Operating, LLC 300 N. Marienfeld St Ste 1000 Midland, TX 79701	OGRID: 372165
	Action Number: 383178
	Action Type: [NOTIFY] Notification Of Sampling (C-141N)

QUESTIONS

Prerequisites	
Incident ID (n#)	**nAPP2319523778**
Incident Name	**NAPP2319523778 JALAPENO 3 RP @ 0**
Incident Type	**Produced Water Release**
Incident Status	**Initial C-141 Approved**

Location of Release Source	
Site Name	**JALAPENO 3 RP**
Date Release Discovered	**06/21/2023**
Surface Owner	**Private**

Sampling Event General Information *Please answer all the questions in this group.*	
What is the sampling surface area in square feet	143,975
What is the estimated number of samples that will be gathered	568
Sampling date pursuant to Subparagraph (a) of Paragraph (1) of Subsection D of 19.15.29.12 NMAC	09/18/2024
Time sampling will commence	08:00 AM
Please provide any information necessary for observers to contact samplers	Jamey Fowler 432.557.0934 Samples were collected prior to the electric sampling notification. (11.17.23/12.26.23)
Please provide any information necessary for navigation to sampling site	GPS: 32.372090, -103.432341

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Operator: Permian Resources Operating, LLC 300 N. Marienfeld St Ste 1000 Midland, TX 79701	OGRID: 372165
	Action Number: 383178
	Action Type: [NOTIFY] Notification Of Sampling (C-141N)

CONDITIONS

Created By	Condition	Condition Date
mtaylorpr	Failure to notify the OCD of sampling events including any changes in date/time per the requirements of 19.15.29.12.D.(1).(a) NMAC, may result in the remediation closure samples not being accepted.	9/13/2024

Attachment C
Certified Laboratory Reports

eurofins | Environment Testing

ANALYTICAL REPORT

PREPARED FOR

Attn: Jamey Fowler
Tellus Services
4000 Big Spring St
Suite 109
Midland, Texas 79705

Generated 8/8/2023 11:31:40 AM

JOB DESCRIPTION

Jalapeno
SDG NUMBER Lea Co, NM

JOB NUMBER

880-31305-1

Eurofins Midland
1211 W. Florida Ave
Midland TX 79701

See page two for job notes and contact information.

Released to Imaging: 12/18/2024 7:43:13 AM

my EOL

Eurofins Midland

Job Notes

This report may not be reproduced except in full, and with written approval from the laboratory. The results relate only to the samples tested. For questions please contact the Project Manager at the e-mail address or telephone number listed on this page.

Analytical test results meet all requirements of the associated regulatory program (i.e., NELAC (TNI), DoD, and ISO 17025) unless otherwise noted under the individual analysis.

Authorization



Generated
8/8/2023 11:31:40 AM

Authorized for release by
Jessica Kramer, Project Manager
Jessica.Kramer@et.eurofinsus.com
(432)704-5440

Client: Tellus Services
Project/Site: Jalapeno

Laboratory Job ID: 880-31305-1
SDG: Lea Co, NM

Table of Contents

Cover Page 1
Table of Contents 3
Definitions/Glossary 4
Case Narrative 5
Client Sample Results 8
Surrogate Summary 49
QC Sample Results 53
QC Association Summary 67
Lab Chronicle 79
Certification Summary 95
Method Summary 96
Sample Summary 97
Chain of Custody 98
Receipt Checklists 104

Definitions/Glossary

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Qualifiers

GC VOA

Qualifier	Qualifier Description
*+	LCS and/or LCSD is outside acceptance limits, high biased.
F1	MS and/or MSD recovery exceeds control limits.
S1-	Surrogate recovery exceeds control limits, low biased.
S1+	Surrogate recovery exceeds control limits, high biased.
U	Indicates the analyte was analyzed for but not detected.

GC Semi VOA

Qualifier	Qualifier Description
*1	LCS/LCSD RPD exceeds control limits.
F1	MS and/or MSD recovery exceeds control limits.
S1+	Surrogate recovery exceeds control limits, high biased.
U	Indicates the analyte was analyzed for but not detected.

HPLC/IC

Qualifier	Qualifier Description
F1	MS and/or MSD recovery exceeds control limits.
U	Indicates the analyte was analyzed for but not detected.

Glossary

Abbreviation	These commonly used abbreviations may or may not be present in this report.
¤	Listed under the "D" column to designate that the result is reported on a dry weight basis
%R	Percent Recovery
CFL	Contains Free Liquid
CFU	Colony Forming Unit
CNF	Contains No Free Liquid
DER	Duplicate Error Ratio (normalized absolute difference)
Dil Fac	Dilution Factor
DL	Detection Limit (DoD/DOE)
DL, RA, RE, IN	Indicates a Dilution, Re-analysis, Re-extraction, or additional Initial metals/anion analysis of the sample
DLC	Decision Level Concentration (Radiochemistry)
EDL	Estimated Detection Limit (Dioxin)
LOD	Limit of Detection (DoD/DOE)
LOQ	Limit of Quantitation (DoD/DOE)
MCL	EPA recommended "Maximum Contaminant Level"
MDA	Minimum Detectable Activity (Radiochemistry)
MDC	Minimum Detectable Concentration (Radiochemistry)
MDL	Method Detection Limit
ML	Minimum Level (Dioxin)
MPN	Most Probable Number
MQL	Method Quantitation Limit
NC	Not Calculated
ND	Not Detected at the reporting limit (or MDL or EDL if shown)
NEG	Negative / Absent
POS	Positive / Present
PQL	Practical Quantitation Limit
PRES	Presumptive
QC	Quality Control
RER	Relative Error Ratio (Radiochemistry)
RL	Reporting Limit or Requested Limit (Radiochemistry)
RPD	Relative Percent Difference, a measure of the relative difference between two points
TEF	Toxicity Equivalent Factor (Dioxin)
TEQ	Toxicity Equivalent Quotient (Dioxin)
TNTC	Too Numerous To Count

Case Narrative

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Job ID: 880-31305-1

Laboratory: Eurofins Midland

Narrative

Job Narrative
880-31305-1

Receipt
The samples were received on 7/27/2023 8:00 AM. Unless otherwise noted below, the samples arrived in good condition, and, where required, properly preserved and on ice. The temperature of the cooler at receipt time was 1.2°C

GC VOA
Method 8021B: The surrogate recovery for the blank associated with preparation batch 880-59116 and analytical batch 880-59105 was outside the upper control limits.

Method 8021B: Surrogate recovery for the following sample was outside control limits: (MB 880-59110/5-A). Evidence of matrix interferences is not obvious.

Method 8021B: Surrogate recovery for the following samples were outside control limits: AH-5 @ 2 ft (880-31305-25), AH-2 @ 1 ft (880-31305-30) and AH-4 @ 1 ft (880-31305-41). Evidence of matrix interference is present; therefore, re-extraction and/or re-analysis was not performed.

Method 8021B: The continuing calibration verification (CCV) associated with batch 880-59172 recovered above the upper control limit for Benzene. The samples associated with this CCV were non-detects for the affected analytes; therefore, the data have been reported. The associated sample is impacted: (CCV 880-59172/20).

Method 8021B: The continuing calibration verification (CCV) associated with batch 880-59296 recovered below the lower control limit for Benzene. An acceptable CCV was ran within the 12 hour window, therefore the data has been qualified and reported. The associated sample is impacted: (CCV 880-59296/33).

Method 8021B: The matrix spike / matrix spike duplicate (MS/MSD) recoveries for preparation batch 880-59350 and analytical batch 880-59296 were outside control limits for one or more analytes. See QC Sample Results for detail. Sample matrix interference and/or non-homogeneity are suspected because the associated laboratory control sample (LCS) recovery is within acceptance limits.

Method 8021B: The continuing calibration verification (CCV) associated with batch 880-59296 recovered above the upper control limit for Toluene. The samples associated with this CCV were non-detects for the affected analytes; therefore, the data have been reported. The associated sample is impacted: (CCV 880-59296/64).

Method 8021B: Surrogate recovery for the following sample was outside control limits: (MB 880-59344/5-A). Evidence of matrix interferences is not obvious.

Method 8021B: Surrogate recovery for the following samples were outside control limits: AH-14 @ 4 ft (880-31305-9) and AH-15 @ 1 ft (880-31305-10). Evidence of matrix interference is present; therefore, re-extraction and/or re-analysis was not performed.

Method 8021B: Surrogate recovery for the following sample was outside control limits: (CCV 880-59294/82). Evidence of matrix interferences is not obvious.

Method 8021B: Surrogate recovery for the following sample was outside control limits: AH-17 @ 4 ft (880-31305-17). Evidence of matrix interference is present; therefore, re-extraction and/or re-analysis was not performed.

Method 8021B: The laboratory control sample (LCS) associated with preparation batch 880-59348 and analytical batch 880-59294 was outside acceptance criteria. Re-extraction and/or re-analysis could not be performed; therefore, the data have been reported. The batch matrix spike/matrix spike duplicate (MS/MSD) was within acceptance limits and may be used to evaluate matrix performance.

Method 8021B: The continuing calibration verification (CCV) associated with batch 880-59294 recovered outside the control limit for Toluene, Ethylbenzene, m-Xylene & p-Xylene and o-Xylene. An acceptable CCV was ran within the 12 hour window, therefore the data has

Case Narrative

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Job ID: 880-31305-1 (Continued)

Laboratory: Eurofins Midland (Continued)

been qualified and reported. The associated sample is impacted: (CCV 880-59294/82).

No additional analytical or quality issues were noted, other than those described above or in the Definitions/ Glossary page.

GC Semi VOA

Method 8015MOD_NM: The surrogate recovery for the blank associated with preparation batch 880-59198 and analytical batch 880-59390 was outside the upper control limits.

Method 8015MOD_NM: Surrogate recovery for the following samples were outside control limits: (880-31082-A-26-D MS) and (880-31082-A-26-E MSD). Evidence of matrix interference is present; therefore, re-extraction and/or re-analysis was not performed.

Method 8015MOD_NM: Surrogate recovery for the following samples were outside control limits: AH-14 @ 2 ft (880-31305-2), AH-14 @ 3 ft (880-31305-8), AH-15 @ 1 ft (880-31305-10), AH-16 @ 1 ft (880-31305-11), AH-16 @ 2 ft (880-31305-12) and AH-16 @ 3 ft (880-31305-13). Evidence of matrix interference is present; therefore, re-extraction and/or re-analysis was not performed.

Method 8015MOD_NM: The method blank for preparation batch 880-59198 and analytical batch 880-59390 contained Gasoline Range Organics (GRO)-C6-C10 above the method detection limit. This target analyte concentration was less than the reporting limit (RL); therefore, re-extraction and/or re-analysis of samples was not performed.

Method 8015MOD_NM: The surrogate recovery for the blank associated with preparation batch 880-59215 and analytical batch 880-59413 was outside the upper control limits.

Method 8015MOD_NM: Surrogate recovery for the following samples were outside control limits: AH-17 @ 2 ft (880-31305-15), AH-17 @ 3 ft (880-31305-16), AH-17 @ 4 ft (880-31305-17), AH-18 @ 1 ft (880-31305-18), AH-18 @ 2 ft (880-31305-19), AH-18 @ 3 ft (880-31305-20), AH-19 @ 1 ft (880-31305-21), AH-19 @ 2 ft (880-31305-22), AH-19 @ 3 ft (880-31305-23), AH-19 @ 4 ft (880-31305-24), AH-5 @ 2 ft (880-31305-25), AH-8 @ 2 ft (880-31305-26), AH-3 @ 1 ft (880-31305-27), AH-1 @ 2 ft (880-31305-28), AH-2 @ 4 ft (880-31305-29), AH-2 @ 1 ft (880-31305-30), AH-3 @ 3 ft (880-31305-31), AH-5 @ 1 ft (880-31305-32), AH-4 @ 4 ft (880-31305-33), AH-3 @ 4 ft (880-31305-34), (CCV 880-59413/20), (CCV 880-59413/31), (CCV 880-59413/5), (LCS 880-59215/2-A), (LCSD 880-59215/3-A), (880-31305-A-15-C MS) and (880-31305-A-15-D MSD). Evidence of matrix interferences is not obvious.

Method 8015MOD_NM: The matrix spike / matrix spike duplicate (MS/MSD) recoveries for preparation batch 880-59215 and analytical batch 880-59413 were outside control limits for one or more analytes. See QC Sample Results for detail. Sample matrix interference and/or non-homogeneity are suspected because the associated laboratory control sample (LCS) recovery is within acceptance limits.

Method 8015MOD_NM: The surrogate recovery for the blank associated with preparation batch 880-59216 and analytical batch 880-59411 was outside the upper control limits.

Method 8015MOD_NM: Surrogate recovery for the following samples were outside control limits: AH-2 @ 3 ft (880-31305-35), AH-4 @ 2 ft (880-31305-36), AH-4 @ 3 ft (880-31305-37), AH-1 @ 1 ft (880-31305-38), AH-3 @ 2 ft (880-31305-39), AH-2 @ 2 ft (880-31305-40), AH-4 @ 1 ft (880-31305-41), AH-1 @ 4 ft (880-31305-42), AH-1 @ 3 ft (880-31305-43), AH-7 @ 1 ft (880-31305-44), AH-7 @ 2 ft (880-31305-45), AH-8 @ 2 ft (880-31305-46), AH-10 @ 2 ft (880-31305-47), AH-7 @ 3 ft (880-31305-48), AH-8 @ 1 ft (880-31305-49), AH-10 @ 1 ft (880-31305-50), AH-9 @ 2 ft (880-31305-51), (CCV 880-59411/20), (CCV 880-59411/5), (LCS 880-59216/2-A), (880-31305-A-35-D MS) and (880-31305-A-35-E MSD). Evidence of matrix interferences is not obvious.

Method 8015MOD_NM: The RPD of the laboratory control sample (LCS) and laboratory control sample duplicate (LCSD) for preparation batch 880-59216 and analytical batch 880-59411 recovered outside control limits for the following analytes: Diesel Range Organics (Over C10-C28).

No additional analytical or quality issues were noted, other than those described above or in the Definitions/ Glossary page.

HPLC/IC

Method 300_ORGFM_28D: The matrix spike / matrix spike duplicate (MS/MSD) recoveries and precision for preparation batch 880-58708

Case Narrative

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Job ID: 880-31305-1 (Continued)

Laboratory: Eurofins Midland (Continued)

and analytical batch 880-58858 were outside control limits. Sample matrix interference and/or non-homogeneity are suspected because the associated laboratory control sample / laboratory sample control duplicate (LCS/LCSD) precision was within acceptance limits.

Method 300_ORGFM_28D: The matrix spike / matrix spike duplicate (MS/MSD) recoveries and precision for preparation batch 880-58709 and analytical batch 880-58859 were outside control limits. Sample matrix interference and/or non-homogeneity are suspected because the associated laboratory control sample / laboratory sample control duplicate (LCS/LCSD) precision was within acceptance limits.

No additional analytical or quality issues were noted, other than those described above or in the Definitions/ Glossary page.

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-12 @ 1 ft

Lab Sample ID: 880-31305-1
Matrix: Solid
Date Collected: 07/25/23 08:08
Date Received: 07/27/23 08:00
Sample Depth: 1 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00202	U	0.00202		mg/Kg		08/04/23 13:55	08/05/23 10:19	1
Toluene	<0.00202	U	0.00202		mg/Kg		08/04/23 13:55	08/05/23 10:19	1
Ethylbenzene	<0.00202	U	0.00202		mg/Kg		08/04/23 13:55	08/05/23 10:19	1
m-Xylene & p-Xylene	<0.00403	U *+	0.00403		mg/Kg		08/04/23 13:55	08/05/23 10:19	1
o-Xylene	<0.00202	U	0.00202		mg/Kg		08/04/23 13:55	08/05/23 10:19	1
Xylenes, Total	<0.00403	U *+	0.00403		mg/Kg		08/04/23 13:55	08/05/23 10:19	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*87*		*70 - 130*	*08/04/23 13:55*	*08/05/23 10:19*	*1*
1,4-Difluorobenzene (Surr)	*86*		*70 - 130*	*08/04/23 13:55*	*08/05/23 10:19*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00403	U	0.00403		mg/Kg			08/07/23 18:14	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	**51.7**		50.0		mg/Kg			08/07/23 15:16	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<50.0	U	50.0		mg/Kg		08/03/23 09:49	08/05/23 14:01	1
Diesel Range Organics (Over C10-C28)	**51.7**		50.0		mg/Kg		08/03/23 09:49	08/05/23 14:01	1
OII Range Organics (Over C28-C36)	<50.0	U	50.0		mg/Kg		08/03/23 09:49	08/05/23 14:01	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*114*		*70 - 130*	*08/03/23 09:49*	*08/05/23 14:01*	*1*
o-Terphenyl	*128*		*70 - 130*	*08/03/23 09:49*	*08/05/23 14:01*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	**5690**		49.5		mg/Kg			07/31/23 19:22	10

Client Sample ID: AH-14 @ 2 ft

Lab Sample ID: 880-31305-2
Matrix: Solid
Date Collected: 07/25/23 08:20
Date Received: 07/27/23 08:00
Sample Depth: 2 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00201	U	0.00201		mg/Kg		08/04/23 13:55	08/05/23 10:40	1
Toluene	<0.00201	U	0.00201		mg/Kg		08/04/23 13:55	08/05/23 10:40	1
Ethylbenzene	<0.00201	U	0.00201		mg/Kg		08/04/23 13:55	08/05/23 10:40	1
m-Xylene & p-Xylene	<0.00402	U *+	0.00402		mg/Kg		08/04/23 13:55	08/05/23 10:40	1
o-Xylene	<0.00201	U	0.00201		mg/Kg		08/04/23 13:55	08/05/23 10:40	1
Xylenes, Total	<0.00402	U *+	0.00402		mg/Kg		08/04/23 13:55	08/05/23 10:40	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*78*		*70 - 130*	*08/04/23 13:55*	*08/05/23 10:40*	*1*

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-14 @ 2 ft

Lab Sample ID: 880-31305-2
Matrix: Solid
Date Collected: 07/25/23 08:20
Date Received: 07/27/23 08:00
Sample Depth: 2 ft

Method: SW846 8021B - Volatile Organic Compounds (GC) (Continued)

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1,4-Difluorobenzene (Surr)	*96*		*70 - 130*	*08/04/23 13:55*	*08/05/23 10:40*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00402	U	0.00402		mg/Kg			08/07/23 18:14	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	<50.4	U	50.4		mg/Kg			08/07/23 15:16	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<50.4	U	50.4		mg/Kg		08/03/23 09:49	08/05/23 14:23	1
Diesel Range Organics (Over C10-C28)	<50.4	U	50.4		mg/Kg		08/03/23 09:49	08/05/23 14:23	1
OII Range Organics (Over C28-C36)	<50.4	U	50.4		mg/Kg		08/03/23 09:49	08/05/23 14:23	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*129*		*70 - 130*	*08/03/23 09:49*	*08/05/23 14:23*	*1*
o-Terphenyl	*141*	*S1+*	*70 - 130*	*08/03/23 09:49*	*08/05/23 14:23*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	**214**		5.04		mg/Kg			07/31/23 19:41	1

Client Sample ID: AH-15 @ 20 in

Lab Sample ID: 880-31305-3
Matrix: Solid
Date Collected: 07/25/23 08:53
Date Received: 07/27/23 08:00
Sample Depth: 20 in

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00199	U	0.00199		mg/Kg		08/04/23 13:55	08/05/23 11:01	1
Toluene	<0.00199	U	0.00199		mg/Kg		08/04/23 13:55	08/05/23 11:01	1
Ethylbenzene	<0.00199	U	0.00199		mg/Kg		08/04/23 13:55	08/05/23 11:01	1
m-Xylene & p-Xylene	<0.00398	U *+	0.00398		mg/Kg		08/04/23 13:55	08/05/23 11:01	1
o-Xylene	<0.00199	U	0.00199		mg/Kg		08/04/23 13:55	08/05/23 11:01	1
Xylenes, Total	<0.00398	U *+	0.00398		mg/Kg		08/04/23 13:55	08/05/23 11:01	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*86*		*70 - 130*	*08/04/23 13:55*	*08/05/23 11:01*	*1*
1,4-Difluorobenzene (Surr)	*72*		*70 - 130*	*08/04/23 13:55*	*08/05/23 11:01*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00398	U	0.00398		mg/Kg			08/07/23 18:14	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	**81.6**		50.4		mg/Kg			08/07/23 15:16	1

Eurofins Midland

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-15 @ 20 in

Lab Sample ID: 880-31305-3
Matrix: Solid
Date Collected: 07/25/23 08:53
Date Received: 07/27/23 08:00
Sample Depth: 20 in

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<50.4	U	50.4		mg/Kg		08/03/23 09:49	08/05/23 14:46	1
Diesel Range Organics (Over C10-C28)	**81.6**		50.4		mg/Kg		08/03/23 09:49	08/05/23 14:46	1
OII Range Organics (Over C28-C36)	<50.4	U	50.4		mg/Kg		08/03/23 09:49	08/05/23 14:46	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*123*		*70 - 130*	*08/03/23 09:49*	*08/05/23 14:46*	*1*
o-Terphenyl	*130*		*70 - 130*	*08/03/23 09:49*	*08/05/23 14:46*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	**1920**		25.0		mg/Kg			07/31/23 19:47	5

Client Sample ID: AH-16 @ 4 ft

Lab Sample ID: 880-31305-4
Matrix: Solid
Date Collected: 07/25/23 09:26
Date Received: 07/27/23 08:00
Sample Depth: 4 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00200	U	0.00200		mg/Kg		08/04/23 13:55	08/05/23 11:21	1
Toluene	<0.00200	U	0.00200		mg/Kg		08/04/23 13:55	08/05/23 11:21	1
Ethylbenzene	<0.00200	U	0.00200		mg/Kg		08/04/23 13:55	08/05/23 11:21	1
m-Xylene & p-Xylene	<0.00399	U *+	0.00399		mg/Kg		08/04/23 13:55	08/05/23 11:21	1
o-Xylene	<0.00200	U	0.00200		mg/Kg		08/04/23 13:55	08/05/23 11:21	1
Xylenes, Total	<0.00399	U *+	0.00399		mg/Kg		08/04/23 13:55	08/05/23 11:21	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*86*		*70 - 130*	*08/04/23 13:55*	*08/05/23 11:21*	*1*
1,4-Difluorobenzene (Surr)	*76*		*70 - 130*	*08/04/23 13:55*	*08/05/23 11:21*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00399	U	0.00399		mg/Kg			08/07/23 18:14	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	**81.9**		49.8		mg/Kg			08/07/23 15:16	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<49.8	U	49.8		mg/Kg		08/03/23 09:49	08/05/23 15:08	1
Diesel Range Organics (Over C10-C28)	**81.9**		49.8		mg/Kg		08/03/23 09:49	08/05/23 15:08	1
OII Range Organics (Over C28-C36)	<49.8	U	49.8		mg/Kg		08/03/23 09:49	08/05/23 15:08	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*104*		*70 - 130*	*08/03/23 09:49*	*08/05/23 15:08*	*1*
o-Terphenyl	*115*		*70 - 130*	*08/03/23 09:49*	*08/05/23 15:08*	*1*

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-16 @ 4 ft

Lab Sample ID: 880-31305-4
Matrix: Solid
Date Collected: 07/25/23 09:26
Date Received: 07/27/23 08:00
Sample Depth: 4 ft

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	202		4.98		mg/Kg			07/31/23 19:53	1

Client Sample ID: AH-13 @ 1 ft

Lab Sample ID: 880-31305-5
Matrix: Solid
Date Collected: 07/25/23 07:49
Date Received: 07/27/23 08:00
Sample Depth: 1 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00198	U	0.00198		mg/Kg		08/04/23 13:55	08/05/23 11:42	1
Toluene	<0.00198	U	0.00198		mg/Kg		08/04/23 13:55	08/05/23 11:42	1
Ethylbenzene	<0.00198	U	0.00198		mg/Kg		08/04/23 13:55	08/05/23 11:42	1
m-Xylene & p-Xylene	<0.00397	U *+	0.00397		mg/Kg		08/04/23 13:55	08/05/23 11:42	1
o-Xylene	<0.00198	U	0.00198		mg/Kg		08/04/23 13:55	08/05/23 11:42	1
Xylenes, Total	<0.00397	U *+	0.00397		mg/Kg		08/04/23 13:55	08/05/23 11:42	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*84*		*70 - 130*	*08/04/23 13:55*	*08/05/23 11:42*	*1*
1,4-Difluorobenzene (Surr)	*82*		*70 - 130*	*08/04/23 13:55*	*08/05/23 11:42*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00397	U	0.00397		mg/Kg			08/07/23 18:14	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	<49.6	U	49.6		mg/Kg			08/07/23 15:16	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<49.6	U	49.6		mg/Kg		08/03/23 09:49	08/05/23 15:53	1
Diesel Range Organics (Over C10-C28)	<49.6	U	49.6		mg/Kg		08/03/23 09:49	08/05/23 15:53	1
OII Range Organics (Over C28-C36)	<49.6	U	49.6		mg/Kg		08/03/23 09:49	08/05/23 15:53	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*118*		*70 - 130*	*08/03/23 09:49*	*08/05/23 15:53*	*1*
o-Terphenyl	*128*		*70 - 130*	*08/03/23 09:49*	*08/05/23 15:53*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	844		4.96		mg/Kg			07/31/23 19:59	1

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-13 @ 2 ft

Lab Sample ID: 880-31305-6
Matrix: Solid
Date Collected: 07/25/23 07:55
Date Received: 07/27/23 08:00
Sample Depth: 2 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00202	U	0.00202		mg/Kg		08/04/23 13:55	08/05/23 12:02	1
Toluene	<0.00202	U	0.00202		mg/Kg		08/04/23 13:55	08/05/23 12:02	1
Ethylbenzene	<0.00202	U	0.00202		mg/Kg		08/04/23 13:55	08/05/23 12:02	1
m-Xylene & p-Xylene	<0.00404	U *+	0.00404		mg/Kg		08/04/23 13:55	08/05/23 12:02	1
o-Xylene	<0.00202	U	0.00202		mg/Kg		08/04/23 13:55	08/05/23 12:02	1
Xylenes, Total	<0.00404	U *+	0.00404		mg/Kg		08/04/23 13:55	08/05/23 12:02	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*88*		*70 - 130*	*08/04/23 13:55*	*08/05/23 12:02*	*1*
1,4-Difluorobenzene (Surr)	*77*		*70 - 130*	*08/04/23 13:55*	*08/05/23 12:02*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00404	U	0.00404		mg/Kg			08/07/23 18:14	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	<49.6	U	49.6		mg/Kg			08/07/23 15:16	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<49.6	U	49.6		mg/Kg		08/03/23 09:49	08/05/23 16:15	1
Diesel Range Organics (Over C10-C28)	<49.6	U	49.6		mg/Kg		08/03/23 09:49	08/05/23 16:15	1
OII Range Organics (Over C28-C36)	<49.6	U	49.6		mg/Kg		08/03/23 09:49	08/05/23 16:15	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*111*		*70 - 130*	*08/03/23 09:49*	*08/05/23 16:15*	*1*
o-Terphenyl	*123*		*70 - 130*	*08/03/23 09:49*	*08/05/23 16:15*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	**450**		5.02		mg/Kg			07/31/23 20:05	1

Client Sample ID: AH-14 @ 1 ft

Lab Sample ID: 880-31305-7
Matrix: Solid
Date Collected: 07/25/23 08:13
Date Received: 07/27/23 08:00
Sample Depth: 1 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00200	U	0.00200		mg/Kg		08/04/23 13:55	08/05/23 12:23	1
Toluene	<0.00200	U	0.00200		mg/Kg		08/04/23 13:55	08/05/23 12:23	1
Ethylbenzene	<0.00200	U	0.00200		mg/Kg		08/04/23 13:55	08/05/23 12:23	1
m-Xylene & p-Xylene	<0.00401	U *+	0.00401		mg/Kg		08/04/23 13:55	08/05/23 12:23	1
o-Xylene	<0.00200	U	0.00200		mg/Kg		08/04/23 13:55	08/05/23 12:23	1
Xylenes, Total	<0.00401	U *+	0.00401		mg/Kg		08/04/23 13:55	08/05/23 12:23	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*89*		*70 - 130*	*08/04/23 13:55*	*08/05/23 12:23*	*1*

Eurofins Midland

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-14 @ 1 ft

Lab Sample ID: 880-31305-7
Matrix: Solid
Date Collected: 07/25/23 08:13
Date Received: 07/27/23 08:00
Sample Depth: 1 ft

Method: SW846 8021B - Volatile Organic Compounds (GC) (Continued)

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1,4-Difluorobenzene (Surr)	*80*		*70 - 130*	*08/04/23 13:55*	*08/05/23 12:23*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00401	U	0.00401		mg/Kg			08/07/23 18:14	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	<50.2	U	50.2		mg/Kg			08/07/23 15:16	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<50.2	U	50.2		mg/Kg		08/03/23 09:49	08/05/23 16:38	1
Diesel Range Organics (Over C10-C28)	<50.2	U	50.2		mg/Kg		08/03/23 09:49	08/05/23 16:38	1
OII Range Organics (Over C28-C36)	<50.2	U	50.2		mg/Kg		08/03/23 09:49	08/05/23 16:38	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*85*		*70 - 130*	*08/03/23 09:49*	*08/05/23 16:38*	*1*
o-Terphenyl	*90*		*70 - 130*	*08/03/23 09:49*	*08/05/23 16:38*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	**298**	**F1**	4.97		mg/Kg			07/31/23 20:11	1

Client Sample ID: AH-14 @ 3 ft

Lab Sample ID: 880-31305-8
Matrix: Solid
Date Collected: 07/25/23 08:25
Date Received: 07/27/23 08:00
Sample Depth: 3 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00199	U	0.00199		mg/Kg		08/04/23 13:55	08/05/23 12:43	1
Toluene	<0.00199	U	0.00199		mg/Kg		08/04/23 13:55	08/05/23 12:43	1
Ethylbenzene	<0.00199	U	0.00199		mg/Kg		08/04/23 13:55	08/05/23 12:43	1
m-Xylene & p-Xylene	<0.00398	U *+	0.00398		mg/Kg		08/04/23 13:55	08/05/23 12:43	1
o-Xylene	<0.00199	U	0.00199		mg/Kg		08/04/23 13:55	08/05/23 12:43	1
Xylenes, Total	<0.00398	U *+	0.00398		mg/Kg		08/04/23 13:55	08/05/23 12:43	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*92*		*70 - 130*	*08/04/23 13:55*	*08/05/23 12:43*	*1*
1,4-Difluorobenzene (Surr)	*82*		*70 - 130*	*08/04/23 13:55*	*08/05/23 12:43*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00398	U	0.00398		mg/Kg			08/07/23 18:14	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	<50.4	U	50.4		mg/Kg			08/07/23 15:16	1

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-14 @ 3 ft

Lab Sample ID: 880-31305-8
Matrix: Solid
Date Collected: 07/25/23 08:25
Date Received: 07/27/23 08:00
Sample Depth: 3 ft

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<50.4	U	50.4		mg/Kg		08/03/23 09:49	08/05/23 17:00	1
Diesel Range Organics (Over C10-C28)	<50.4	U	50.4		mg/Kg		08/03/23 09:49	08/05/23 17:00	1
OII Range Organics (Over C28-C36)	<50.4	U	50.4		mg/Kg		08/03/23 09:49	08/05/23 17:00	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*124*		*70 - 130*	*08/03/23 09:49*	*08/05/23 17:00*	*1*
o-Terphenyl	*133*	*S1+*	*70 - 130*	*08/03/23 09:49*	*08/05/23 17:00*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	**57.9**		5.00		mg/Kg			07/31/23 20:30	1

Client Sample ID: AH-14 @ 4 ft

Lab Sample ID: 880-31305-9
Matrix: Solid
Date Collected: 07/25/23 08:32
Date Received: 07/27/23 08:00
Sample Depth: 4 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00198	U	0.00198		mg/Kg		08/04/23 13:55	08/05/23 13:04	1
Toluene	<0.00198	U	0.00198		mg/Kg		08/04/23 13:55	08/05/23 13:04	1
Ethylbenzene	<0.00198	U	0.00198		mg/Kg		08/04/23 13:55	08/05/23 13:04	1
m-Xylene & p-Xylene	<0.00396	U *+	0.00396		mg/Kg		08/04/23 13:55	08/05/23 13:04	1
o-Xylene	<0.00198	U	0.00198		mg/Kg		08/04/23 13:55	08/05/23 13:04	1
Xylenes, Total	<0.00396	U *+	0.00396		mg/Kg		08/04/23 13:55	08/05/23 13:04	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*88*		*70 - 130*	*08/04/23 13:55*	*08/05/23 13:04*	*1*
1,4-Difluorobenzene (Surr)	*63*	*S1-*	*70 - 130*	*08/04/23 13:55*	*08/05/23 13:04*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00396	U	0.00396		mg/Kg			08/07/23 18:14	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	<50.5	U	50.5		mg/Kg			08/07/23 15:16	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<50.5	U	50.5		mg/Kg		08/03/23 09:49	08/05/23 17:22	1
Diesel Range Organics (Over C10-C28)	<50.5	U	50.5		mg/Kg		08/03/23 09:49	08/05/23 17:22	1
OII Range Organics (Over C28-C36)	<50.5	U	50.5		mg/Kg		08/03/23 09:49	08/05/23 17:22	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*109*		*70 - 130*	*08/03/23 09:49*	*08/05/23 17:22*	*1*
o-Terphenyl	*119*		*70 - 130*	*08/03/23 09:49*	*08/05/23 17:22*	*1*

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-14 @ 4 ft

Lab Sample ID: 880-31305-9
Matrix: Solid
Date Collected: 07/25/23 08:32
Date Received: 07/27/23 08:00
Sample Depth: 4 ft

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	73.4		4.99		mg/Kg			07/31/23 20:36	1

Client Sample ID: AH-15 @ 1 ft

Lab Sample ID: 880-31305-10
Matrix: Solid
Date Collected: 07/25/23 08:34
Date Received: 07/27/23 08:00
Sample Depth: 1 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00201	U	0.00201		mg/Kg		08/04/23 13:55	08/05/23 13:24	1
Toluene	<0.00201	U	0.00201		mg/Kg		08/04/23 13:55	08/05/23 13:24	1
Ethylbenzene	<0.00201	U	0.00201		mg/Kg		08/04/23 13:55	08/05/23 13:24	1
m-Xylene & p-Xylene	<0.00402	U *+	0.00402		mg/Kg		08/04/23 13:55	08/05/23 13:24	1
o-Xylene	<0.00201	U	0.00201		mg/Kg		08/04/23 13:55	08/05/23 13:24	1
Xylenes, Total	<0.00402	U *+	0.00402		mg/Kg		08/04/23 13:55	08/05/23 13:24	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*84*		*70 - 130*	*08/04/23 13:55*	*08/05/23 13:24*	*1*
1,4-Difluorobenzene (Surr)	*60*	*S1-*	*70 - 130*	*08/04/23 13:55*	*08/05/23 13:24*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00402	U	0.00402		mg/Kg			08/07/23 18:14	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	<49.9	U	49.9		mg/Kg			08/07/23 15:16	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<49.9	U	49.9		mg/Kg		08/03/23 09:49	08/05/23 17:45	1
Diesel Range Organics (Over C10-C28)	<49.9	U	49.9		mg/Kg		08/03/23 09:49	08/05/23 17:45	1
OII Range Organics (Over C28-C36)	<49.9	U	49.9		mg/Kg		08/03/23 09:49	08/05/23 17:45	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*128*		*70 - 130*	*08/03/23 09:49*	*08/05/23 17:45*	*1*
o-Terphenyl	*136*	*S1+*	*70 - 130*	*08/03/23 09:49*	*08/05/23 17:45*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	4040		25.1		mg/Kg			07/31/23 20:54	5

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-16 @ 1 ft

Lab Sample ID: 880-31305-11
Matrix: Solid
Date Collected: 07/25/23 09:04
Date Received: 07/27/23 08:00
Sample Depth: 1 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00200	U	0.00200		mg/Kg		08/04/23 13:55	08/05/23 14:48	1
Toluene	<0.00200	U	0.00200		mg/Kg		08/04/23 13:55	08/05/23 14:48	1
Ethylbenzene	<0.00200	U	0.00200		mg/Kg		08/04/23 13:55	08/05/23 14:48	1
m-Xylene & p-Xylene	<0.00401	U *+	0.00401		mg/Kg		08/04/23 13:55	08/05/23 14:48	1
o-Xylene	<0.00200	U	0.00200		mg/Kg		08/04/23 13:55	08/05/23 14:48	1
Xylenes, Total	<0.00401	U *+	0.00401		mg/Kg		08/04/23 13:55	08/05/23 14:48	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*96*		*70 - 130*	*08/04/23 13:55*	*08/05/23 14:48*	*1*
1,4-Difluorobenzene (Surr)	*104*		*70 - 130*	*08/04/23 13:55*	*08/05/23 14:48*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00401	U	0.00401		mg/Kg			08/07/23 18:14	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	**387**		50.5		mg/Kg			08/07/23 15:16	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<50.5	U	50.5		mg/Kg		08/03/23 09:49	08/05/23 18:07	1
Diesel Range Organics (Over C10-C28)	**387**		50.5		mg/Kg		08/03/23 09:49	08/05/23 18:07	1
OII Range Organics (Over C28-C36)	<50.5	U	50.5		mg/Kg		08/03/23 09:49	08/05/23 18:07	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*128*		*70 - 130*	*08/03/23 09:49*	*08/05/23 18:07*	*1*
o-Terphenyl	*137*	*S1+*	*70 - 130*	*08/03/23 09:49*	*08/05/23 18:07*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	**909**		5.03		mg/Kg			07/31/23 21:00	1

Client Sample ID: AH-16 @ 2 ft

Lab Sample ID: 880-31305-12
Matrix: Solid
Date Collected: 07/25/23 09:11
Date Received: 07/27/23 08:00
Sample Depth: 2 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00202	U	0.00202		mg/Kg		08/04/23 13:55	08/05/23 16:01	1
Toluene	<0.00202	U	0.00202		mg/Kg		08/04/23 13:55	08/05/23 16:01	1
Ethylbenzene	<0.00202	U	0.00202		mg/Kg		08/04/23 13:55	08/05/23 16:01	1
m-Xylene & p-Xylene	<0.00403	U *+	0.00403		mg/Kg		08/04/23 13:55	08/05/23 16:01	1
o-Xylene	<0.00202	U	0.00202		mg/Kg		08/04/23 13:55	08/05/23 16:01	1
Xylenes, Total	<0.00403	U *+	0.00403		mg/Kg		08/04/23 13:55	08/05/23 16:01	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*89*		*70 - 130*	*08/04/23 13:55*	*08/05/23 16:01*	*1*

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-16 @ 2 ft

Lab Sample ID: 880-31305-12
Matrix: Solid
Date Collected: 07/25/23 09:11
Date Received: 07/27/23 08:00
Sample Depth: 2 ft

Method: SW846 8021B - Volatile Organic Compounds (GC) (Continued)

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1,4-Difluorobenzene (Surr)	*78*		*70 - 130*	*08/04/23 13:55*	*08/05/23 16:01*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00403	U	0.00403		mg/Kg			08/07/23 18:14	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	**170**		50.5		mg/Kg			08/07/23 15:16	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<50.5	U	50.5		mg/Kg		08/03/23 09:49	08/05/23 18:30	1
Diesel Range Organics (Over C10-C28)	**170**		50.5		mg/Kg		08/03/23 09:49	08/05/23 18:30	1
OII Range Organics (Over C28-C36)	<50.5	U	50.5		mg/Kg		08/03/23 09:49	08/05/23 18:30	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*134*	*S1+*	*70 - 130*	*08/03/23 09:49*	*08/05/23 18:30*	*1*
o-Terphenyl	*142*	*S1+*	*70 - 130*	*08/03/23 09:49*	*08/05/23 18:30*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	**127**		5.00		mg/Kg			07/31/23 21:07	1

Client Sample ID: AH-16 @ 3 ft

Lab Sample ID: 880-31305-13
Matrix: Solid
Date Collected: 07/25/23 09:16
Date Received: 07/27/23 08:00
Sample Depth: 3 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00198	U	0.00198		mg/Kg		08/04/23 13:55	08/05/23 16:21	1
Toluene	<0.00198	U	0.00198		mg/Kg		08/04/23 13:55	08/05/23 16:21	1
Ethylbenzene	<0.00198	U	0.00198		mg/Kg		08/04/23 13:55	08/05/23 16:21	1
m-Xylene & p-Xylene	<0.00397	U *+	0.00397		mg/Kg		08/04/23 13:55	08/05/23 16:21	1
o-Xylene	<0.00198	U	0.00198		mg/Kg		08/04/23 13:55	08/05/23 16:21	1
Xylenes, Total	<0.00397	U *+	0.00397		mg/Kg		08/04/23 13:55	08/05/23 16:21	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*75*		*70 - 130*	*08/04/23 13:55*	*08/05/23 16:21*	*1*
1,4-Difluorobenzene (Surr)	*99*		*70 - 130*	*08/04/23 13:55*	*08/05/23 16:21*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00397	U	0.00397		mg/Kg			08/07/23 18:14	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	**79.5**		49.6		mg/Kg			08/07/23 15:16	1

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-16 @ 3 ft

Lab Sample ID: 880-31305-13
Matrix: Solid
Date Collected: 07/25/23 09:16
Date Received: 07/27/23 08:00
Sample Depth: 3 ft

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<49.6	U	49.6		mg/Kg		08/03/23 09:49	08/05/23 18:52	1
Diesel Range Organics (Over C10-C28)	**79.5**		49.6		mg/Kg		08/03/23 09:49	08/05/23 18:52	1
OII Range Organics (Over C28-C36)	<49.6	U	49.6		mg/Kg		08/03/23 09:49	08/05/23 18:52	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*132*	*S1+*	*70 - 130*	*08/03/23 09:49*	*08/05/23 18:52*	*1*
o-Terphenyl	*141*	*S1+*	*70 - 130*	*08/03/23 09:49*	*08/05/23 18:52*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	**188**		5.01		mg/Kg			07/31/23 21:13	1

Client Sample ID: AH-17 @ 1 ft

Lab Sample ID: 880-31305-14
Matrix: Solid
Date Collected: 07/25/23 09:32
Date Received: 07/27/23 08:00
Sample Depth: 1 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00200	U	0.00200		mg/Kg		08/04/23 13:55	08/05/23 16:42	1
Toluene	<0.00200	U	0.00200		mg/Kg		08/04/23 13:55	08/05/23 16:42	1
Ethylbenzene	<0.00200	U	0.00200		mg/Kg		08/04/23 13:55	08/05/23 16:42	1
m-Xylene & p-Xylene	<0.00401	U *+	0.00401		mg/Kg		08/04/23 13:55	08/05/23 16:42	1
o-Xylene	<0.00200	U	0.00200		mg/Kg		08/04/23 13:55	08/05/23 16:42	1
Xylenes, Total	<0.00401	U *+	0.00401		mg/Kg		08/04/23 13:55	08/05/23 16:42	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*87*		*70 - 130*	*08/04/23 13:55*	*08/05/23 16:42*	*1*
1,4-Difluorobenzene (Surr)	*86*		*70 - 130*	*08/04/23 13:55*	*08/05/23 16:42*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00401	U	0.00401		mg/Kg			08/07/23 18:14	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	**95.1**		49.7		mg/Kg			08/07/23 15:16	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<49.7	U	49.7		mg/Kg		08/03/23 09:49	08/05/23 19:15	1
Diesel Range Organics (Over C10-C28)	**95.1**		49.7		mg/Kg		08/03/23 09:49	08/05/23 19:15	1
OII Range Organics (Over C28-C36)	<49.7	U	49.7		mg/Kg		08/03/23 09:49	08/05/23 19:15	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*121*		*70 - 130*	*08/03/23 09:49*	*08/05/23 19:15*	*1*
o-Terphenyl	*128*		*70 - 130*	*08/03/23 09:49*	*08/05/23 19:15*	*1*

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-17 @ 1 ft

Lab Sample ID: 880-31305-14
Matrix: Solid
Date Collected: 07/25/23 09:32
Date Received: 07/27/23 08:00
Sample Depth: 1 ft

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	7560		49.9		mg/Kg			07/31/23 21:19	10

Client Sample ID: AH-17 @ 2 ft

Lab Sample ID: 880-31305-15
Matrix: Solid
Date Collected: 07/25/23 09:37
Date Received: 07/27/23 08:00
Sample Depth: 2 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00200	U	0.00200		mg/Kg		08/04/23 13:55	08/05/23 17:02	1
Toluene	<0.00200	U	0.00200		mg/Kg		08/04/23 13:55	08/05/23 17:02	1
Ethylbenzene	<0.00200	U	0.00200		mg/Kg		08/04/23 13:55	08/05/23 17:02	1
m-Xylene & p-Xylene	<0.00400	U *+	0.00400		mg/Kg		08/04/23 13:55	08/05/23 17:02	1
o-Xylene	<0.00200	U	0.00200		mg/Kg		08/04/23 13:55	08/05/23 17:02	1
Xylenes, Total	<0.00400	U *+	0.00400		mg/Kg		08/04/23 13:55	08/05/23 17:02	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*85*		*70 - 130*	*08/04/23 13:55*	*08/05/23 17:02*	*1*
1,4-Difluorobenzene (Surr)	*81*		*70 - 130*	*08/04/23 13:55*	*08/05/23 17:02*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00400	U	0.00400		mg/Kg			08/07/23 18:14	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	<50.4	U	50.4		mg/Kg			08/08/23 12:09	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<50.4	U	50.4		mg/Kg		08/03/23 09:57	08/07/23 10:24	1
Diesel Range Organics (Over C10-C28)	<50.4	U F1	50.4		mg/Kg		08/03/23 09:57	08/07/23 10:24	1
OII Range Organics (Over C28-C36)	<50.4	U	50.4		mg/Kg		08/03/23 09:57	08/07/23 10:24	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*161*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 10:24*	*1*
o-Terphenyl	*153*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 10:24*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	183		4.99		mg/Kg			07/31/23 21:25	1

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-17 @ 3 ft

Lab Sample ID: 880-31305-16
Matrix: Solid
Date Collected: 07/25/23 09:44
Date Received: 07/27/23 08:00
Sample Depth: 3 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00199	U	0.00199		mg/Kg		08/04/23 13:55	08/05/23 17:23	1
Toluene	<0.00199	U	0.00199		mg/Kg		08/04/23 13:55	08/05/23 17:23	1
Ethylbenzene	<0.00199	U	0.00199		mg/Kg		08/04/23 13:55	08/05/23 17:23	1
m-Xylene & p-Xylene	<0.00398	U *+	0.00398		mg/Kg		08/04/23 13:55	08/05/23 17:23	1
o-Xylene	<0.00199	U	0.00199		mg/Kg		08/04/23 13:55	08/05/23 17:23	1
Xylenes, Total	<0.00398	U *+	0.00398		mg/Kg		08/04/23 13:55	08/05/23 17:23	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*86*		*70 - 130*	*08/04/23 13:55*	*08/05/23 17:23*	*1*
1,4-Difluorobenzene (Surr)	*85*		*70 - 130*	*08/04/23 13:55*	*08/05/23 17:23*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00398	U	0.00398		mg/Kg			08/07/23 18:14	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	<50.2	U	50.2		mg/Kg			08/08/23 12:09	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<50.2	U	50.2		mg/Kg		08/03/23 09:57	08/07/23 11:31	1
Diesel Range Organics (Over C10-C28)	<50.2	U	50.2		mg/Kg		08/03/23 09:57	08/07/23 11:31	1
OII Range Organics (Over C28-C36)	<50.2	U	50.2		mg/Kg		08/03/23 09:57	08/07/23 11:31	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*175*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 11:31*	*1*
o-Terphenyl	*168*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 11:31*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	**220**		4.98		mg/Kg			07/31/23 21:31	1

Client Sample ID: AH-17 @ 4 ft

Lab Sample ID: 880-31305-17
Matrix: Solid
Date Collected: 07/25/23 09:50
Date Received: 07/27/23 08:00
Sample Depth: 4 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00200	U	0.00200		mg/Kg		08/04/23 13:55	08/05/23 17:43	1
Toluene	<0.00200	U	0.00200		mg/Kg		08/04/23 13:55	08/05/23 17:43	1
Ethylbenzene	<0.00200	U	0.00200		mg/Kg		08/04/23 13:55	08/05/23 17:43	1
m-Xylene & p-Xylene	<0.00399	U *+	0.00399		mg/Kg		08/04/23 13:55	08/05/23 17:43	1
o-Xylene	<0.00200	U	0.00200		mg/Kg		08/04/23 13:55	08/05/23 17:43	1
Xylenes, Total	<0.00399	U *+	0.00399		mg/Kg		08/04/23 13:55	08/05/23 17:43	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*86*		*70 - 130*	*08/04/23 13:55*	*08/05/23 17:43*	*1*

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-17 @ 4 ft

Lab Sample ID: 880-31305-17
Matrix: Solid
Date Collected: 07/25/23 09:50
Date Received: 07/27/23 08:00
Sample Depth: 4 ft

Method: SW846 8021B - Volatile Organic Compounds (GC) (Continued)

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1,4-Difluorobenzene (Surr)	*66*	*S1-*	*70 - 130*	*08/04/23 13:55*	*08/05/23 17:43*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00399	U	0.00399		mg/Kg			08/07/23 18:14	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	<50.4	U	50.4		mg/Kg			08/08/23 12:09	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<50.4	U	50.4		mg/Kg		08/03/23 09:57	08/07/23 11:54	1
Diesel Range Organics (Over C10-C28)	<50.4	U	50.4		mg/Kg		08/03/23 09:57	08/07/23 11:54	1
OII Range Organics (Over C28-C36)	<50.4	U	50.4		mg/Kg		08/03/23 09:57	08/07/23 11:54	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*188*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 11:54*	*1*
o-Terphenyl	*174*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 11:54*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	**67.2**		5.04		mg/Kg			07/31/23 22:20	1

Client Sample ID: AH-18 @ 1 ft

Lab Sample ID: 880-31305-18
Matrix: Solid
Date Collected: 07/25/23 09:57
Date Received: 07/27/23 08:00
Sample Depth: 1 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00198	U	0.00198		mg/Kg		08/04/23 13:55	08/05/23 18:04	1
Toluene	<0.00198	U	0.00198		mg/Kg		08/04/23 13:55	08/05/23 18:04	1
Ethylbenzene	<0.00198	U	0.00198		mg/Kg		08/04/23 13:55	08/05/23 18:04	1
m-Xylene & p-Xylene	<0.00396	U *+	0.00396		mg/Kg		08/04/23 13:55	08/05/23 18:04	1
o-Xylene	<0.00198	U	0.00198		mg/Kg		08/04/23 13:55	08/05/23 18:04	1
Xylenes, Total	<0.00396	U *+	0.00396		mg/Kg		08/04/23 13:55	08/05/23 18:04	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*83*		*70 - 130*	*08/04/23 13:55*	*08/05/23 18:04*	*1*
1,4-Difluorobenzene (Surr)	*81*		*70 - 130*	*08/04/23 13:55*	*08/05/23 18:04*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00396	U	0.00396		mg/Kg			08/07/23 18:14	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	**61.7**		50.3		mg/Kg			08/08/23 12:09	1

Eurofins Midland

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-18 @ 1 ft

Lab Sample ID: 880-31305-18
Matrix: Solid
Date Collected: 07/25/23 09:57
Date Received: 07/27/23 08:00
Sample Depth: 1 ft

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<50.3	U	50.3		mg/Kg		08/03/23 09:57	08/07/23 12:16	1
Diesel Range Organics (Over C10-C28)	**61.7**		50.3		mg/Kg		08/03/23 09:57	08/07/23 12:16	1
OII Range Organics (Over C28-C36)	<50.3	U	50.3		mg/Kg		08/03/23 09:57	08/07/23 12:16	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*193*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 12:16*	*1*
o-Terphenyl	*178*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 12:16*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	**2030**		25.1		mg/Kg			07/31/23 22:39	5

Client Sample ID: AH-18 @ 2 ft

Lab Sample ID: 880-31305-19
Matrix: Solid
Date Collected: 07/25/23 10:03
Date Received: 07/27/23 08:00
Sample Depth: 2 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00202	U	0.00202		mg/Kg		08/04/23 13:55	08/05/23 18:24	1
Toluene	<0.00202	U	0.00202		mg/Kg		08/04/23 13:55	08/05/23 18:24	1
Ethylbenzene	<0.00202	U	0.00202		mg/Kg		08/04/23 13:55	08/05/23 18:24	1
m-Xylene & p-Xylene	<0.00403	U *+	0.00403		mg/Kg		08/04/23 13:55	08/05/23 18:24	1
o-Xylene	<0.00202	U	0.00202		mg/Kg		08/04/23 13:55	08/05/23 18:24	1
Xylenes, Total	<0.00403	U *+	0.00403		mg/Kg		08/04/23 13:55	08/05/23 18:24	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*81*		*70 - 130*	*08/04/23 13:55*	*08/05/23 18:24*	*1*
1,4-Difluorobenzene (Surr)	*77*		*70 - 130*	*08/04/23 13:55*	*08/05/23 18:24*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00403	U	0.00403		mg/Kg			08/07/23 18:14	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	<49.6	U	49.6		mg/Kg			08/08/23 12:09	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<49.6	U	49.6		mg/Kg		08/03/23 09:57	08/07/23 12:38	1
Diesel Range Organics (Over C10-C28)	<49.6	U	49.6		mg/Kg		08/03/23 09:57	08/07/23 12:38	1
OII Range Organics (Over C28-C36)	<49.6	U	49.6		mg/Kg		08/03/23 09:57	08/07/23 12:38	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*166*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 12:38*	*1*
o-Terphenyl	*153*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 12:38*	*1*

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-18 @ 2 ft

Lab Sample ID: 880-31305-19
Matrix: Solid
Date Collected: 07/25/23 10:03
Date Received: 07/27/23 08:00
Sample Depth: 2 ft

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	**179**		4.99		mg/Kg			07/31/23 22:45	1

Client Sample ID: AH-18 @ 3 ft

Lab Sample ID: 880-31305-20
Matrix: Solid
Date Collected: 07/25/23 10:08
Date Received: 07/27/23 08:00
Sample Depth: 3 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00200	U	0.00200		mg/Kg		08/04/23 13:55	08/05/23 18:45	1
Toluene	<0.00200	U	0.00200		mg/Kg		08/04/23 13:55	08/05/23 18:45	1
Ethylbenzene	<0.00200	U	0.00200		mg/Kg		08/04/23 13:55	08/05/23 18:45	1
m-Xylene & p-Xylene	<0.00401	U *+	0.00401		mg/Kg		08/04/23 13:55	08/05/23 18:45	1
o-Xylene	<0.00200	U	0.00200		mg/Kg		08/04/23 13:55	08/05/23 18:45	1
Xylenes, Total	<0.00401	U *+	0.00401		mg/Kg		08/04/23 13:55	08/05/23 18:45	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*82*		*70 - 130*	*08/04/23 13:55*	*08/05/23 18:45*	*1*
1,4-Difluorobenzene (Surr)	*78*		*70 - 130*	*08/04/23 13:55*	*08/05/23 18:45*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00401	U	0.00401		mg/Kg			08/07/23 18:14	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	**155**		49.6		mg/Kg			08/08/23 12:09	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<49.6	U	49.6		mg/Kg		08/03/23 09:57	08/07/23 13:01	1
Diesel Range Organics (Over C10-C28)	**155**		49.6		mg/Kg		08/03/23 09:57	08/07/23 13:01	1
OII Range Organics (Over C28-C36)	<49.6	U	49.6		mg/Kg		08/03/23 09:57	08/07/23 13:01	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*181*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 13:01*	*1*
o-Terphenyl	*167*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 13:01*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	**302**		5.05		mg/Kg			07/31/23 22:51	1

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-19 @ 1 ft

Lab Sample ID: 880-31305-21
Matrix: Solid
Date Collected: 07/25/23 10:17
Date Received: 07/27/23 08:00
Sample Depth: 1 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00200	U F1	0.00200		mg/Kg		08/04/23 14:26	08/05/23 10:24	1
Toluene	<0.00200	U	0.00200		mg/Kg		08/04/23 14:26	08/05/23 10:24	1
Ethylbenzene	<0.00200	U F1	0.00200		mg/Kg		08/04/23 14:26	08/05/23 10:24	1
m-Xylene & p-Xylene	<0.00399	U F1	0.00399		mg/Kg		08/04/23 14:26	08/05/23 10:24	1
o-Xylene	<0.00200	U F1	0.00200		mg/Kg		08/04/23 14:26	08/05/23 10:24	1
Xylenes, Total	<0.00399	U F1	0.00399		mg/Kg		08/04/23 14:26	08/05/23 10:24	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*95*		*70 - 130*	*08/04/23 14:26*	*08/05/23 10:24*	*1*
1,4-Difluorobenzene (Surr)	*103*		*70 - 130*	*08/04/23 14:26*	*08/05/23 10:24*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00399	U	0.00399		mg/Kg			08/07/23 16:13	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	<50.2	U	50.2		mg/Kg			08/08/23 12:09	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<50.2	U	50.2		mg/Kg		08/03/23 09:57	08/07/23 13:23	1
Diesel Range Organics (Over C10-C28)	<50.2	U	50.2		mg/Kg		08/03/23 09:57	08/07/23 13:23	1
OII Range Organics (Over C28-C36)	<50.2	U	50.2		mg/Kg		08/03/23 09:57	08/07/23 13:23	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*174*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 13:23*	*1*
o-Terphenyl	*164*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 13:23*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	**527**		5.03		mg/Kg			07/31/23 22:57	1

Client Sample ID: AH-19 @ 2 ft

Lab Sample ID: 880-31305-22
Matrix: Solid
Date Collected: 07/25/23 10:23
Date Received: 07/27/23 08:00
Sample Depth: 2 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00200	U	0.00200		mg/Kg		08/04/23 14:26	08/05/23 10:45	1
Toluene	<0.00200	U	0.00200		mg/Kg		08/04/23 14:26	08/05/23 10:45	1
Ethylbenzene	<0.00200	U	0.00200		mg/Kg		08/04/23 14:26	08/05/23 10:45	1
m-Xylene & p-Xylene	<0.00401	U	0.00401		mg/Kg		08/04/23 14:26	08/05/23 10:45	1
o-Xylene	<0.00200	U	0.00200		mg/Kg		08/04/23 14:26	08/05/23 10:45	1
Xylenes, Total	<0.00401	U	0.00401		mg/Kg		08/04/23 14:26	08/05/23 10:45	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*94*		*70 - 130*	*08/04/23 14:26*	*08/05/23 10:45*	*1*

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-19 @ 2 ft

Lab Sample ID: 880-31305-22
Matrix: Solid
Date Collected: 07/25/23 10:23
Date Received: 07/27/23 08:00
Sample Depth: 2 ft

Method: SW846 8021B - Volatile Organic Compounds (GC) (Continued)

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1,4-Difluorobenzene (Surr)	*110*		*70 - 130*	*08/04/23 14:26*	*08/05/23 10:45*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00401	U	0.00401		mg/Kg			08/07/23 16:13	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	<50.4	U	50.4		mg/Kg			08/08/23 12:09	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<50.4	U	50.4		mg/Kg		08/03/23 09:57	08/07/23 13:45	1
Diesel Range Organics (Over C10-C28)	<50.4	U	50.4		mg/Kg		08/03/23 09:57	08/07/23 13:45	1
OII Range Organics (Over C28-C36)	<50.4	U	50.4		mg/Kg		08/03/23 09:57	08/07/23 13:45	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*163*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 13:45*	*1*
o-Terphenyl	*156*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 13:45*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	**46.1**		5.02		mg/Kg			07/31/23 23:16	1

Client Sample ID: AH-19 @ 3 ft

Lab Sample ID: 880-31305-23
Matrix: Solid
Date Collected: 07/25/23 10:29
Date Received: 07/27/23 08:00
Sample Depth: 3 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00201	U	0.00201		mg/Kg		08/04/23 14:26	08/05/23 11:05	1
Toluene	<0.00201	U	0.00201		mg/Kg		08/04/23 14:26	08/05/23 11:05	1
Ethylbenzene	<0.00201	U	0.00201		mg/Kg		08/04/23 14:26	08/05/23 11:05	1
m-Xylene & p-Xylene	<0.00402	U	0.00402		mg/Kg		08/04/23 14:26	08/05/23 11:05	1
o-Xylene	<0.00201	U	0.00201		mg/Kg		08/04/23 14:26	08/05/23 11:05	1
Xylenes, Total	<0.00402	U	0.00402		mg/Kg		08/04/23 14:26	08/05/23 11:05	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*97*		*70 - 130*	*08/04/23 14:26*	*08/05/23 11:05*	*1*
1,4-Difluorobenzene (Surr)	*112*		*70 - 130*	*08/04/23 14:26*	*08/05/23 11:05*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00402	U	0.00402		mg/Kg			08/07/23 16:13	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	<50.1	U	50.1		mg/Kg			08/08/23 12:09	1

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-19 @ 3 ft

Lab Sample ID: 880-31305-23
Matrix: Solid
Date Collected: 07/25/23 10:29
Date Received: 07/27/23 08:00
Sample Depth: 3 ft

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<50.1	U	50.1		mg/Kg		08/03/23 09:57	08/07/23 14:07	1
Diesel Range Organics (Over C10-C28)	<50.1	U	50.1		mg/Kg		08/03/23 09:57	08/07/23 14:07	1
OII Range Organics (Over C28-C36)	<50.1	U	50.1		mg/Kg		08/03/23 09:57	08/07/23 14:07	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*187*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 14:07*	*1*
o-Terphenyl	*176*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 14:07*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	**179**		5.00		mg/Kg			07/31/23 23:22	1

Client Sample ID: AH-19 @ 4 ft

Lab Sample ID: 880-31305-24
Matrix: Solid
Date Collected: 07/25/23 10:38
Date Received: 07/27/23 08:00
Sample Depth: 4 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00202	U	0.00202		mg/Kg		08/04/23 14:26	08/05/23 11:26	1
Toluene	<0.00202	U	0.00202		mg/Kg		08/04/23 14:26	08/05/23 11:26	1
Ethylbenzene	<0.00202	U	0.00202		mg/Kg		08/04/23 14:26	08/05/23 11:26	1
m-Xylene & p-Xylene	<0.00404	U	0.00404		mg/Kg		08/04/23 14:26	08/05/23 11:26	1
o-Xylene	<0.00202	U	0.00202		mg/Kg		08/04/23 14:26	08/05/23 11:26	1
Xylenes, Total	<0.00404	U	0.00404		mg/Kg		08/04/23 14:26	08/05/23 11:26	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*96*		*70 - 130*	*08/04/23 14:26*	*08/05/23 11:26*	*1*
1,4-Difluorobenzene (Surr)	*112*		*70 - 130*	*08/04/23 14:26*	*08/05/23 11:26*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00404	U	0.00404		mg/Kg			08/07/23 16:13	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	<49.8	U	49.8		mg/Kg			08/08/23 12:09	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<49.8	U	49.8		mg/Kg		08/03/23 09:57	08/07/23 14:29	1
Diesel Range Organics (Over C10-C28)	<49.8	U	49.8		mg/Kg		08/03/23 09:57	08/07/23 14:29	1
OII Range Organics (Over C28-C36)	<49.8	U	49.8		mg/Kg		08/03/23 09:57	08/07/23 14:29	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*162*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 14:29*	*1*
o-Terphenyl	*152*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 14:29*	*1*

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-19 @ 4 ft

Lab Sample ID: 880-31305-24
Matrix: Solid
Date Collected: 07/25/23 10:38
Date Received: 07/27/23 08:00
Sample Depth: 4 ft

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	240		4.98		mg/Kg			07/31/23 23:28	1

Client Sample ID: AH-5 @ 2 ft

Lab Sample ID: 880-31305-25
Matrix: Solid
Date Collected: 07/21/23 09:46
Date Received: 07/27/23 08:00
Sample Depth: 2 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00199	U	0.00199		mg/Kg		08/02/23 11:14	08/03/23 11:52	1
Toluene	<0.00199	U	0.00199		mg/Kg		08/02/23 11:14	08/03/23 11:52	1
Ethylbenzene	<0.00199	U	0.00199		mg/Kg		08/02/23 11:14	08/03/23 11:52	1
m-Xylene & p-Xylene	<0.00398	U	0.00398		mg/Kg		08/02/23 11:14	08/03/23 11:52	1
o-Xylene	<0.00199	U	0.00199		mg/Kg		08/02/23 11:14	08/03/23 11:52	1
Xylenes, Total	<0.00398	U	0.00398		mg/Kg		08/02/23 11:14	08/03/23 11:52	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*86*		*70 - 130*	*08/02/23 11:14*	*08/03/23 11:52*	*1*
1,4-Difluorobenzene (Surr)	*59*	*S1-*	*70 - 130*	*08/02/23 11:14*	*08/03/23 11:52*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00398	U	0.00398		mg/Kg			08/03/23 20:39	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	<49.6	U	49.6		mg/Kg			08/08/23 12:09	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<49.6	U	49.6		mg/Kg		08/03/23 09:57	08/07/23 15:13	1
Diesel Range Organics (Over C10-C28)	<49.6	U	49.6		mg/Kg		08/03/23 09:57	08/07/23 15:13	1
OII Range Organics (Over C28-C36)	<49.6	U	49.6		mg/Kg		08/03/23 09:57	08/07/23 15:13	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*179*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 15:13*	*1*
o-Terphenyl	*168*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 15:13*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	61.6		4.96		mg/Kg			07/31/23 23:34	1

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-8 @ 2 ft

Lab Sample ID: 880-31305-26
Matrix: Solid
Date Collected: 07/21/23 09:57
Date Received: 07/27/23 08:00
Sample Depth: 2 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00200	U	0.00200		mg/Kg		08/02/23 11:14	08/03/23 12:12	1
Toluene	<0.00200	U	0.00200		mg/Kg		08/02/23 11:14	08/03/23 12:12	1
Ethylbenzene	<0.00200	U	0.00200		mg/Kg		08/02/23 11:14	08/03/23 12:12	1
m-Xylene & p-Xylene	<0.00401	U	0.00401		mg/Kg		08/02/23 11:14	08/03/23 12:12	1
o-Xylene	<0.00200	U	0.00200		mg/Kg		08/02/23 11:14	08/03/23 12:12	1
Xylenes, Total	<0.00401	U	0.00401		mg/Kg		08/02/23 11:14	08/03/23 12:12	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*86*		*70 - 130*	*08/02/23 11:14*	*08/03/23 12:12*	*1*
1,4-Difluorobenzene (Surr)	*82*		*70 - 130*	*08/02/23 11:14*	*08/03/23 12:12*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00401	U	0.00401		mg/Kg			08/03/23 20:39	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	<50.4	U	50.4		mg/Kg			08/08/23 12:09	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<50.4	U	50.4		mg/Kg		08/03/23 09:57	08/07/23 15:35	1
Diesel Range Organics (Over C10-C28)	<50.4	U	50.4		mg/Kg		08/03/23 09:57	08/07/23 15:35	1
OII Range Organics (Over C28-C36)	<50.4	U	50.4		mg/Kg		08/03/23 09:57	08/07/23 15:35	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*176*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 15:35*	*1*
o-Terphenyl	*166*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 15:35*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	**70.7**		5.02		mg/Kg			07/31/23 23:40	1

Client Sample ID: AH-3 @ 1 ft

Lab Sample ID: 880-31305-27
Matrix: Solid
Date Collected: 07/21/23 09:15
Date Received: 07/27/23 08:00
Sample Depth: 1 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00202	U	0.00202		mg/Kg		08/02/23 11:14	08/03/23 12:33	1
Toluene	<0.00202	U	0.00202		mg/Kg		08/02/23 11:14	08/03/23 12:33	1
Ethylbenzene	<0.00202	U	0.00202		mg/Kg		08/02/23 11:14	08/03/23 12:33	1
m-Xylene & p-Xylene	<0.00404	U	0.00404		mg/Kg		08/02/23 11:14	08/03/23 12:33	1
o-Xylene	<0.00202	U	0.00202		mg/Kg		08/02/23 11:14	08/03/23 12:33	1
Xylenes, Total	<0.00404	U	0.00404		mg/Kg		08/02/23 11:14	08/03/23 12:33	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*79*		*70 - 130*	*08/02/23 11:14*	*08/03/23 12:33*	*1*

Eurofins Midland

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-3 @ 1 ft

Lab Sample ID: 880-31305-27
Matrix: Solid
Date Collected: 07/21/23 09:15
Date Received: 07/27/23 08:00
Sample Depth: 1 ft

Method: SW846 8021B - Volatile Organic Compounds (GC) (Continued)

Surrogate	%Recovery	Qualifier	Limits	Prepared	Analyzed	Dil Fac
1,4-Difluorobenzene (Surr)	*77*		*70 - 130*	*08/02/23 11:14*	*08/03/23 12:33*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00404	U	0.00404		mg/Kg			08/03/23 20:39	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	**735**		50.1		mg/Kg			08/08/23 12:09	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<50.1	U	50.1		mg/Kg		08/03/23 09:57	08/07/23 15:57	1
Diesel Range Organics (Over C10-C28)	**735**		50.1		mg/Kg		08/03/23 09:57	08/07/23 15:57	1
OII Range Organics (Over C28-C36)	<50.1	U	50.1		mg/Kg		08/03/23 09:57	08/07/23 15:57	1

Surrogate	%Recovery	Qualifier	Limits	Prepared	Analyzed	Dil Fac
1-Chlorooctane	*190*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 15:57*	*1*
o-Terphenyl	*165*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 15:57*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	**2160**	**F1**	25.3		mg/Kg			07/31/23 23:46	5

Client Sample ID: AH-1 @ 2 ft

Lab Sample ID: 880-31305-28
Matrix: Solid
Date Collected: 07/21/23 08:52
Date Received: 07/27/23 08:00
Sample Depth: 2 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00202	U	0.00202		mg/Kg		08/02/23 11:14	08/03/23 12:53	1
Toluene	<0.00202	U	0.00202		mg/Kg		08/02/23 11:14	08/03/23 12:53	1
Ethylbenzene	<0.00202	U	0.00202		mg/Kg		08/02/23 11:14	08/03/23 12:53	1
m-Xylene & p-Xylene	<0.00403	U	0.00403		mg/Kg		08/02/23 11:14	08/03/23 12:53	1
o-Xylene	<0.00202	U	0.00202		mg/Kg		08/02/23 11:14	08/03/23 12:53	1
Xylenes, Total	<0.00403	U	0.00403		mg/Kg		08/02/23 11:14	08/03/23 12:53	1

Surrogate	%Recovery	Qualifier	Limits	Prepared	Analyzed	Dil Fac
4-Bromofluorobenzene (Surr)	*82*		*70 - 130*	*08/02/23 11:14*	*08/03/23 12:53*	*1*
1,4-Difluorobenzene (Surr)	*77*		*70 - 130*	*08/02/23 11:14*	*08/03/23 12:53*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00403	U	0.00403		mg/Kg			08/03/23 20:39	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	<49.6	U	49.6		mg/Kg			08/08/23 12:09	1

Eurofins Midland

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-1 @ 2 ft

Lab Sample ID: 880-31305-28
Matrix: Solid
Date Collected: 07/21/23 08:52
Date Received: 07/27/23 08:00
Sample Depth: 2 ft

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<49.6	U	49.6		mg/Kg		08/03/23 09:57	08/07/23 16:19	1
Diesel Range Organics (Over C10-C28)	<49.6	U	49.6		mg/Kg		08/03/23 09:57	08/07/23 16:19	1
OII Range Organics (Over C28-C36)	<49.6	U	49.6		mg/Kg		08/03/23 09:57	08/07/23 16:19	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*225*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 16:19*	*1*
o-Terphenyl	*217*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 16:19*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	**65.9**		4.99		mg/Kg			08/01/23 00:05	1

Client Sample ID: AH-2 @ 4 ft

Lab Sample ID: 880-31305-29
Matrix: Solid
Date Collected: 07/21/23 09:10
Date Received: 07/27/23 08:00
Sample Depth: 4 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00199	U	0.00199		mg/Kg		08/02/23 11:14	08/03/23 13:14	1
Toluene	<0.00199	U	0.00199		mg/Kg		08/02/23 11:14	08/03/23 13:14	1
Ethylbenzene	<0.00199	U	0.00199		mg/Kg		08/02/23 11:14	08/03/23 13:14	1
m-Xylene & p-Xylene	<0.00398	U	0.00398		mg/Kg		08/02/23 11:14	08/03/23 13:14	1
o-Xylene	<0.00199	U	0.00199		mg/Kg		08/02/23 11:14	08/03/23 13:14	1
Xylenes, Total	<0.00398	U	0.00398		mg/Kg		08/02/23 11:14	08/03/23 13:14	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*89*		*70 - 130*	*08/02/23 11:14*	*08/03/23 13:14*	*1*
1,4-Difluorobenzene (Surr)	*75*		*70 - 130*	*08/02/23 11:14*	*08/03/23 13:14*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00398	U	0.00398		mg/Kg			08/03/23 20:39	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	<49.9	U	49.9		mg/Kg			08/08/23 12:09	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<49.9	U	49.9		mg/Kg		08/03/23 09:57	08/07/23 16:42	1
Diesel Range Organics (Over C10-C28)	<49.9	U	49.9		mg/Kg		08/03/23 09:57	08/07/23 16:42	1
OII Range Organics (Over C28-C36)	<49.9	U	49.9		mg/Kg		08/03/23 09:57	08/07/23 16:42	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*208*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 16:42*	*1*
o-Terphenyl	*198*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 16:42*	*1*

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-2 @ 4 ft

Lab Sample ID: 880-31305-29
Matrix: Solid
Date Collected: 07/21/23 09:10
Date Received: 07/27/23 08:00
Sample Depth: 4 ft

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	174		4.97		mg/Kg			08/01/23 00:11	1

Client Sample ID: AH-2 @ 1 ft

Lab Sample ID: 880-31305-30
Matrix: Solid
Date Collected: 07/21/23 09:02
Date Received: 07/27/23 08:00
Sample Depth: 1 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00198	U	0.00198		mg/Kg		08/02/23 11:14	08/03/23 13:35	1
Toluene	<0.00198	U	0.00198		mg/Kg		08/02/23 11:14	08/03/23 13:35	1
Ethylbenzene	<0.00198	U	0.00198		mg/Kg		08/02/23 11:14	08/03/23 13:35	1
m-Xylene & p-Xylene	<0.00396	U	0.00396		mg/Kg		08/02/23 11:14	08/03/23 13:35	1
o-Xylene	<0.00198	U	0.00198		mg/Kg		08/02/23 11:14	08/03/23 13:35	1
Xylenes, Total	<0.00396	U	0.00396		mg/Kg		08/02/23 11:14	08/03/23 13:35	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*85*		*70 - 130*	*08/02/23 11:14*	*08/03/23 13:35*	*1*
1,4-Difluorobenzene (Surr)	*69*	*S1-*	*70 - 130*	*08/02/23 11:14*	*08/03/23 13:35*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00396	U	0.00396		mg/Kg			08/03/23 20:39	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	<50.0	U	50.0		mg/Kg			08/08/23 12:09	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<50.0	U	50.0		mg/Kg		08/03/23 09:57	08/07/23 17:04	1
Diesel Range Organics (Over C10-C28)	<50.0	U	50.0		mg/Kg		08/03/23 09:57	08/07/23 17:04	1
OII Range Organics (Over C28-C36)	<50.0	U	50.0		mg/Kg		08/03/23 09:57	08/07/23 17:04	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*166*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 17:04*	*1*
o-Terphenyl	*156*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 17:04*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	113		4.97		mg/Kg			08/01/23 00:30	1

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-3 @ 3 ft

Lab Sample ID: 880-31305-31
Matrix: Solid
Date Collected: 07/21/23 09:20
Date Received: 07/27/23 08:00
Sample Depth: 3 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00201	U	0.00201		mg/Kg		08/02/23 11:14	08/03/23 13:55	1
Toluene	<0.00201	U	0.00201		mg/Kg		08/02/23 11:14	08/03/23 13:55	1
Ethylbenzene	<0.00201	U	0.00201		mg/Kg		08/02/23 11:14	08/03/23 13:55	1
m-Xylene & p-Xylene	<0.00402	U	0.00402		mg/Kg		08/02/23 11:14	08/03/23 13:55	1
o-Xylene	<0.00201	U	0.00201		mg/Kg		08/02/23 11:14	08/03/23 13:55	1
Xylenes, Total	<0.00402	U	0.00402		mg/Kg		08/02/23 11:14	08/03/23 13:55	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*84*		*70 - 130*	*08/02/23 11:14*	*08/03/23 13:55*	*1*
1,4-Difluorobenzene (Surr)	*73*		*70 - 130*	*08/02/23 11:14*	*08/03/23 13:55*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00402	U	0.00402		mg/Kg			08/03/23 20:39	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	<50.0	U	50.0		mg/Kg			08/08/23 12:09	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<50.0	U	50.0		mg/Kg		08/03/23 09:57	08/07/23 17:26	1
Diesel Range Organics (Over C10-C28)	<50.0	U	50.0		mg/Kg		08/03/23 09:57	08/07/23 17:26	1
OII Range Organics (Over C28-C36)	<50.0	U	50.0		mg/Kg		08/03/23 09:57	08/07/23 17:26	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*177*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 17:26*	*1*
o-Terphenyl	*161*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 17:26*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	**68.2**		5.04		mg/Kg			08/01/23 00:36	1

Client Sample ID: AH-5 @ 1 ft

Lab Sample ID: 880-31305-32
Matrix: Solid
Date Collected: 07/21/23 09:42
Date Received: 07/27/23 08:00
Sample Depth: 1 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00201	U	0.00201		mg/Kg		08/02/23 11:14	08/03/23 14:16	1
Toluene	<0.00201	U	0.00201		mg/Kg		08/02/23 11:14	08/03/23 14:16	1
Ethylbenzene	<0.00201	U	0.00201		mg/Kg		08/02/23 11:14	08/03/23 14:16	1
m-Xylene & p-Xylene	<0.00402	U	0.00402		mg/Kg		08/02/23 11:14	08/03/23 14:16	1
o-Xylene	<0.00201	U	0.00201		mg/Kg		08/02/23 11:14	08/03/23 14:16	1
Xylenes, Total	<0.00402	U	0.00402		mg/Kg		08/02/23 11:14	08/03/23 14:16	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*83*		*70 - 130*	*08/02/23 11:14*	*08/03/23 14:16*	*1*

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-5 @ 1 ft

Lab Sample ID: 880-31305-32
Matrix: Solid
Date Collected: 07/21/23 09:42
Date Received: 07/27/23 08:00
Sample Depth: 1 ft

Method: SW846 8021B - Volatile Organic Compounds (GC) (Continued)

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1,4-Difluorobenzene (Surr)	*75*		*70 - 130*	*08/02/23 11:14*	*08/03/23 14:16*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00402	U	0.00402		mg/Kg			08/03/23 20:39	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	<50.2	U	50.2		mg/Kg			08/08/23 12:09	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<50.2	U	50.2		mg/Kg		08/03/23 09:57	08/07/23 17:49	1
Diesel Range Organics (Over C10-C28)	<50.2	U	50.2		mg/Kg		08/03/23 09:57	08/07/23 17:49	1
OII Range Organics (Over C28-C36)	<50.2	U	50.2		mg/Kg		08/03/23 09:57	08/07/23 17:49	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*190*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 17:49*	*1*
o-Terphenyl	*177*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 17:49*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	**66.8**		5.00		mg/Kg			08/01/23 00:42	1

Client Sample ID: AH-4 @ 4 ft

Lab Sample ID: 880-31305-33
Matrix: Solid
Date Collected: 07/21/23 09:39
Date Received: 07/27/23 08:00
Sample Depth: 4 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00200	U	0.00200		mg/Kg		08/02/23 11:14	08/03/23 14:36	1
Toluene	<0.00200	U	0.00200		mg/Kg		08/02/23 11:14	08/03/23 14:36	1
Ethylbenzene	<0.00200	U	0.00200		mg/Kg		08/02/23 11:14	08/03/23 14:36	1
m-Xylene & p-Xylene	<0.00399	U	0.00399		mg/Kg		08/02/23 11:14	08/03/23 14:36	1
o-Xylene	<0.00200	U	0.00200		mg/Kg		08/02/23 11:14	08/03/23 14:36	1
Xylenes, Total	<0.00399	U	0.00399		mg/Kg		08/02/23 11:14	08/03/23 14:36	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*78*		*70 - 130*	*08/02/23 11:14*	*08/03/23 14:36*	*1*
1,4-Difluorobenzene (Surr)	*77*		*70 - 130*	*08/02/23 11:14*	*08/03/23 14:36*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00399	U	0.00399		mg/Kg			08/03/23 20:39	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	<50.3	U	50.3		mg/Kg			08/08/23 12:09	1

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-4 @ 4 ft

Lab Sample ID: 880-31305-33
Matrix: Solid
Date Collected: 07/21/23 09:39
Date Received: 07/27/23 08:00
Sample Depth: 4 ft

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<50.3	U	50.3		mg/Kg		08/03/23 09:57	08/07/23 18:11	1
Diesel Range Organics (Over C10-C28)	<50.3	U	50.3		mg/Kg		08/03/23 09:57	08/07/23 18:11	1
Oil Range Organics (Over C28-C36)	<50.3	U	50.3		mg/Kg		08/03/23 09:57	08/07/23 18:11	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*214*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 18:11*	*1*
o-Terphenyl	*202*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 18:11*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	**97.2**		5.00		mg/Kg			08/01/23 00:48	1

Client Sample ID: AH-3 @ 4 ft

Lab Sample ID: 880-31305-34
Matrix: Solid
Date Collected: 07/21/23 09:22
Date Received: 07/27/23 08:00
Sample Depth: 4 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00198	U	0.00198		mg/Kg		08/02/23 11:14	08/03/23 14:57	1
Toluene	<0.00198	U	0.00198		mg/Kg		08/02/23 11:14	08/03/23 14:57	1
Ethylbenzene	<0.00198	U	0.00198		mg/Kg		08/02/23 11:14	08/03/23 14:57	1
m-Xylene & p-Xylene	<0.00396	U	0.00396		mg/Kg		08/02/23 11:14	08/03/23 14:57	1
o-Xylene	<0.00198	U	0.00198		mg/Kg		08/02/23 11:14	08/03/23 14:57	1
Xylenes, Total	<0.00396	U	0.00396		mg/Kg		08/02/23 11:14	08/03/23 14:57	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*85*		*70 - 130*	*08/02/23 11:14*	*08/03/23 14:57*	*1*
1,4-Difluorobenzene (Surr)	*77*		*70 - 130*	*08/02/23 11:14*	*08/03/23 14:57*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00396	U	0.00396		mg/Kg			08/03/23 20:39	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	<50.1	U	50.1		mg/Kg			08/08/23 12:09	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<50.1	U	50.1		mg/Kg		08/03/23 09:57	08/07/23 18:34	1
Diesel Range Organics (Over C10-C28)	<50.1	U	50.1		mg/Kg		08/03/23 09:57	08/07/23 18:34	1
Oil Range Organics (Over C28-C36)	<50.1	U	50.1		mg/Kg		08/03/23 09:57	08/07/23 18:34	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*178*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 18:34*	*1*
o-Terphenyl	*172*	*S1+*	*70 - 130*	*08/03/23 09:57*	*08/07/23 18:34*	*1*

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-3 @ 4 ft

Lab Sample ID: 880-31305-34
Matrix: Solid
Date Collected: 07/21/23 09:22
Date Received: 07/27/23 08:00
Sample Depth: 4 ft

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	232		4.99		mg/Kg			08/01/23 00:54	1

Client Sample ID: AH-2 @ 3 ft

Lab Sample ID: 880-31305-35
Matrix: Solid
Date Collected: 07/21/23 09:08
Date Received: 07/27/23 08:00
Sample Depth: 3 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00201	U	0.00201		mg/Kg		08/02/23 11:14	08/03/23 16:51	1
Toluene	<0.00201	U	0.00201		mg/Kg		08/02/23 11:14	08/03/23 16:51	1
Ethylbenzene	<0.00201	U	0.00201		mg/Kg		08/02/23 11:14	08/03/23 16:51	1
m-Xylene & p-Xylene	<0.00402	U	0.00402		mg/Kg		08/02/23 11:14	08/03/23 16:51	1
o-Xylene	<0.00201	U	0.00201		mg/Kg		08/02/23 11:14	08/03/23 16:51	1
Xylenes, Total	<0.00402	U	0.00402		mg/Kg		08/02/23 11:14	08/03/23 16:51	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*86*		*70 - 130*	*08/02/23 11:14*	*08/03/23 16:51*	*1*
1,4-Difluorobenzene (Surr)	*87*		*70 - 130*	*08/02/23 11:14*	*08/03/23 16:51*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00402	U	0.00402		mg/Kg			08/03/23 20:39	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	<50.3	U	50.3		mg/Kg			08/08/23 12:15	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<50.3	U	50.3		mg/Kg		08/03/23 10:03	08/07/23 10:24	1
Diesel Range Organics (Over C10-C28)	<50.3	U *1	50.3		mg/Kg		08/03/23 10:03	08/07/23 10:24	1
OII Range Organics (Over C28-C36)	<50.3	U	50.3		mg/Kg		08/03/23 10:03	08/07/23 10:24	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*139*	*S1+*	*70 - 130*	*08/03/23 10:03*	*08/07/23 10:24*	*1*
o-Terphenyl	*153*	*S1+*	*70 - 130*	*08/03/23 10:03*	*08/07/23 10:24*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	53.9		5.01		mg/Kg			08/01/23 01:00	1

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-4 @ 2 ft

Lab Sample ID: 880-31305-36
Matrix: Solid
Date Collected: 07/21/23 09:32
Date Received: 07/27/23 08:00
Sample Depth: 2 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00202	U	0.00202		mg/Kg		08/02/23 11:14	08/03/23 17:11	1
Toluene	<0.00202	U	0.00202		mg/Kg		08/02/23 11:14	08/03/23 17:11	1
Ethylbenzene	<0.00202	U	0.00202		mg/Kg		08/02/23 11:14	08/03/23 17:11	1
m-Xylene & p-Xylene	<0.00404	U	0.00404		mg/Kg		08/02/23 11:14	08/03/23 17:11	1
o-Xylene	<0.00202	U	0.00202		mg/Kg		08/02/23 11:14	08/03/23 17:11	1
Xylenes, Total	<0.00404	U	0.00404		mg/Kg		08/02/23 11:14	08/03/23 17:11	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*78*		*70 - 130*	*08/02/23 11:14*	*08/03/23 17:11*	*1*
1,4-Difluorobenzene (Surr)	*81*		*70 - 130*	*08/02/23 11:14*	*08/03/23 17:11*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00404	U	0.00404		mg/Kg			08/03/23 20:39	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	<49.7	U	49.7		mg/Kg			08/08/23 12:15	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<49.7	U	49.7		mg/Kg		08/03/23 10:03	08/07/23 11:31	1
Diesel Range Organics (Over C10-C28)	<49.7	U *1	49.7		mg/Kg		08/03/23 10:03	08/07/23 11:31	1
OII Range Organics (Over C28-C36)	<49.7	U	49.7		mg/Kg		08/03/23 10:03	08/07/23 11:31	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*143*	*S1+*	*70 - 130*	*08/03/23 10:03*	*08/07/23 11:31*	*1*
o-Terphenyl	*155*	*S1+*	*70 - 130*	*08/03/23 10:03*	*08/07/23 11:31*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	**78.1**		4.98		mg/Kg			08/01/23 01:07	1

Client Sample ID: AH-4 @ 3 ft

Lab Sample ID: 880-31305-37
Matrix: Solid
Date Collected: 07/21/23 09:34
Date Received: 07/27/23 08:00
Sample Depth: 3 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00202	U	0.00202		mg/Kg		08/02/23 11:14	08/03/23 17:32	1
Toluene	<0.00202	U	0.00202		mg/Kg		08/02/23 11:14	08/03/23 17:32	1
Ethylbenzene	<0.00202	U	0.00202		mg/Kg		08/02/23 11:14	08/03/23 17:32	1
m-Xylene & p-Xylene	<0.00403	U	0.00403		mg/Kg		08/02/23 11:14	08/03/23 17:32	1
o-Xylene	<0.00202	U	0.00202		mg/Kg		08/02/23 11:14	08/03/23 17:32	1
Xylenes, Total	<0.00403	U	0.00403		mg/Kg		08/02/23 11:14	08/03/23 17:32	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*86*		*70 - 130*	*08/02/23 11:14*	*08/03/23 17:32*	*1*

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-4 @ 3 ft

Lab Sample ID: 880-31305-37
Matrix: Solid
Date Collected: 07/21/23 09:34
Date Received: 07/27/23 08:00
Sample Depth: 3 ft

Method: SW846 8021B - Volatile Organic Compounds (GC) (Continued)

Surrogate	%Recovery	Qualifier	Limits	Prepared	Analyzed	Dil Fac
1,4-Difluorobenzene (Surr)	*81*		*70 - 130*	*08/02/23 11:14*	*08/03/23 17:32*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00403	U	0.00403		mg/Kg			08/03/23 20:39	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	<49.6	U	49.6		mg/Kg			08/08/23 12:15	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<49.6	U	49.6		mg/Kg		08/03/23 10:03	08/07/23 11:54	1
Diesel Range Organics (Over C10-C28)	<49.6	U *1	49.6		mg/Kg		08/03/23 10:03	08/07/23 11:54	1
OII Range Organics (Over C28-C36)	<49.6	U	49.6		mg/Kg		08/03/23 10:03	08/07/23 11:54	1

Surrogate	%Recovery	Qualifier	Limits	Prepared	Analyzed	Dil Fac
1-Chlorooctane	*151*	*S1+*	*70 - 130*	*08/03/23 10:03*	*08/07/23 11:54*	*1*
o-Terphenyl	*161*	*S1+*	*70 - 130*	*08/03/23 10:03*	*08/07/23 11:54*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	**76.5**		4.99		mg/Kg			07/31/23 12:06	1

Client Sample ID: AH-1 @ 1 ft

Lab Sample ID: 880-31305-38
Matrix: Solid
Date Collected: 07/21/23 08:49
Date Received: 07/27/23 08:00
Sample Depth: 1 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00199	U	0.00199		mg/Kg		08/02/23 11:14	08/03/23 17:52	1
Toluene	<0.00199	U	0.00199		mg/Kg		08/02/23 11:14	08/03/23 17:52	1
Ethylbenzene	<0.00199	U	0.00199		mg/Kg		08/02/23 11:14	08/03/23 17:52	1
m-Xylene & p-Xylene	<0.00398	U	0.00398		mg/Kg		08/02/23 11:14	08/03/23 17:52	1
o-Xylene	<0.00199	U	0.00199		mg/Kg		08/02/23 11:14	08/03/23 17:52	1
Xylenes, Total	<0.00398	U	0.00398		mg/Kg		08/02/23 11:14	08/03/23 17:52	1

Surrogate	%Recovery	Qualifier	Limits	Prepared	Analyzed	Dil Fac
4-Bromofluorobenzene (Surr)	*83*		*70 - 130*	*08/02/23 11:14*	*08/03/23 17:52*	*1*
1,4-Difluorobenzene (Surr)	*79*		*70 - 130*	*08/02/23 11:14*	*08/03/23 17:52*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00398	U	0.00398		mg/Kg			08/03/23 20:39	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	**119**		49.6		mg/Kg			08/08/23 12:15	1

Eurofins Midland

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-1 @ 1 ft

Lab Sample ID: 880-31305-38
Matrix: Solid
Date Collected: 07/21/23 08:49
Date Received: 07/27/23 08:00
Sample Depth: 1 ft

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<49.6	U	49.6		mg/Kg		08/03/23 10:03	08/07/23 12:16	1
Diesel Range Organics (Over C10-C28)	**119**	***1**	49.6		mg/Kg		08/03/23 10:03	08/07/23 12:16	1
Oll Range Organics (Over C28-C36)	<49.6	U	49.6		mg/Kg		08/03/23 10:03	08/07/23 12:16	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*123*		*70 - 130*	*08/03/23 10:03*	*08/07/23 12:16*	*1*
o-Terphenyl	*135*	*S1+*	*70 - 130*	*08/03/23 10:03*	*08/07/23 12:16*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	**732**		5.00		mg/Kg			07/31/23 12:25	1

Client Sample ID: AH-3 @ 2 ft

Lab Sample ID: 880-31305-39
Matrix: Solid
Date Collected: 07/21/23 08:17
Date Received: 07/27/23 08:00
Sample Depth: 2 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00198	U	0.00198		mg/Kg		08/02/23 11:14	08/03/23 18:13	1
Toluene	<0.00198	U	0.00198		mg/Kg		08/02/23 11:14	08/03/23 18:13	1
Ethylbenzene	<0.00198	U	0.00198		mg/Kg		08/02/23 11:14	08/03/23 18:13	1
m-Xylene & p-Xylene	<0.00396	U	0.00396		mg/Kg		08/02/23 11:14	08/03/23 18:13	1
o-Xylene	<0.00198	U	0.00198		mg/Kg		08/02/23 11:14	08/03/23 18:13	1
Xylenes, Total	<0.00396	U	0.00396		mg/Kg		08/02/23 11:14	08/03/23 18:13	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*83*		*70 - 130*	*08/02/23 11:14*	*08/03/23 18:13*	*1*
1,4-Difluorobenzene (Surr)	*77*		*70 - 130*	*08/02/23 11:14*	*08/03/23 18:13*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00396	U	0.00396		mg/Kg			08/03/23 20:39	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	<49.9	U	49.9		mg/Kg			08/08/23 12:15	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<49.9	U	49.9		mg/Kg		08/03/23 10:03	08/07/23 12:38	1
Diesel Range Organics (Over C10-C28)	<49.9	U *1	49.9		mg/Kg		08/03/23 10:03	08/07/23 12:38	1
Oll Range Organics (Over C28-C36)	<49.9	U	49.9		mg/Kg		08/03/23 10:03	08/07/23 12:38	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*146*	*S1+*	*70 - 130*	*08/03/23 10:03*	*08/07/23 12:38*	*1*
o-Terphenyl	*160*	*S1+*	*70 - 130*	*08/03/23 10:03*	*08/07/23 12:38*	*1*

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-3 @ 2 ft

Lab Sample ID: 880-31305-39
Matrix: Solid
Date Collected: 07/21/23 08:17
Date Received: 07/27/23 08:00
Sample Depth: 2 ft

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	93.9		4.96		mg/Kg			07/31/23 12:31	1

Client Sample ID: AH-2 @ 2 ft

Lab Sample ID: 880-31305-40
Matrix: Solid
Date Collected: 07/21/23 09:05
Date Received: 07/27/23 08:00
Sample Depth: 2 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00200	U	0.00200		mg/Kg		08/02/23 11:14	08/03/23 18:33	1
Toluene	<0.00200	U	0.00200		mg/Kg		08/02/23 11:14	08/03/23 18:33	1
Ethylbenzene	<0.00200	U	0.00200		mg/Kg		08/02/23 11:14	08/03/23 18:33	1
m-Xylene & p-Xylene	<0.00399	U	0.00399		mg/Kg		08/02/23 11:14	08/03/23 18:33	1
o-Xylene	<0.00200	U	0.00200		mg/Kg		08/02/23 11:14	08/03/23 18:33	1
Xylenes, Total	<0.00399	U	0.00399		mg/Kg		08/02/23 11:14	08/03/23 18:33	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*83*		*70 - 130*	*08/02/23 11:14*	*08/03/23 18:33*	*1*
1,4-Difluorobenzene (Surr)	*83*		*70 - 130*	*08/02/23 11:14*	*08/03/23 18:33*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00399	U	0.00399		mg/Kg			08/03/23 20:39	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	<49.8	U	49.8		mg/Kg			08/08/23 12:15	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<49.8	U	49.8		mg/Kg		08/03/23 10:03	08/07/23 13:01	1
Diesel Range Organics (Over C10-C28)	<49.8	U *1	49.8		mg/Kg		08/03/23 10:03	08/07/23 13:01	1
OII Range Organics (Over C28-C36)	<49.8	U	49.8		mg/Kg		08/03/23 10:03	08/07/23 13:01	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*131*	*S1+*	*70 - 130*	*08/03/23 10:03*	*08/07/23 13:01*	*1*
o-Terphenyl	*146*	*S1+*	*70 - 130*	*08/03/23 10:03*	*08/07/23 13:01*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	66.0		5.01		mg/Kg			07/31/23 12:37	1

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-4 @ 1 ft

Lab Sample ID: 880-31305-41
Matrix: Solid
Date Collected: 07/21/23 09:29
Date Received: 07/27/23 08:00
Sample Depth: 1 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00201	U	0.00201		mg/Kg		08/02/23 11:14	08/03/23 18:54	1
Toluene	<0.00201	U	0.00201		mg/Kg		08/02/23 11:14	08/03/23 18:54	1
Ethylbenzene	<0.00201	U	0.00201		mg/Kg		08/02/23 11:14	08/03/23 18:54	1
m-Xylene & p-Xylene	<0.00402	U	0.00402		mg/Kg		08/02/23 11:14	08/03/23 18:54	1
o-Xylene	<0.00201	U	0.00201		mg/Kg		08/02/23 11:14	08/03/23 18:54	1
Xylenes, Total	<0.00402	U	0.00402		mg/Kg		08/02/23 11:14	08/03/23 18:54	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*86*		*70 - 130*	*08/02/23 11:14*	*08/03/23 18:54*	*1*
1,4-Difluorobenzene (Surr)	*67*	*S1-*	*70 - 130*	*08/02/23 11:14*	*08/03/23 18:54*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00402	U	0.00402		mg/Kg			08/03/23 20:39	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	<50.2	U	50.2		mg/Kg			08/08/23 12:15	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<50.2	U	50.2		mg/Kg		08/03/23 10:03	08/07/23 13:23	1
Diesel Range Organics (Over C10-C28)	<50.2	U *1	50.2		mg/Kg		08/03/23 10:03	08/07/23 13:23	1
OII Range Organics (Over C28-C36)	<50.2	U	50.2		mg/Kg		08/03/23 10:03	08/07/23 13:23	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*173*	*S1+*	*70 - 130*	*08/03/23 10:03*	*08/07/23 13:23*	*1*
o-Terphenyl	*195*	*S1+*	*70 - 130*	*08/03/23 10:03*	*08/07/23 13:23*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	**80.1**		4.99		mg/Kg			07/31/23 12:43	1

Client Sample ID: AH-1 @ 4 ft

Lab Sample ID: 880-31305-42
Matrix: Solid
Date Collected: 07/21/23 08:57
Date Received: 07/27/23 08:00
Sample Depth: 4 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00200	U	0.00200		mg/Kg		08/02/23 11:14	08/03/23 19:14	1
Toluene	<0.00200	U	0.00200		mg/Kg		08/02/23 11:14	08/03/23 19:14	1
Ethylbenzene	<0.00200	U	0.00200		mg/Kg		08/02/23 11:14	08/03/23 19:14	1
m-Xylene & p-Xylene	<0.00401	U	0.00401		mg/Kg		08/02/23 11:14	08/03/23 19:14	1
o-Xylene	<0.00200	U	0.00200		mg/Kg		08/02/23 11:14	08/03/23 19:14	1
Xylenes, Total	<0.00401	U	0.00401		mg/Kg		08/02/23 11:14	08/03/23 19:14	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*83*		*70 - 130*	*08/02/23 11:14*	*08/03/23 19:14*	*1*

Eurofins Midland

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-1 @ 4 ft

Lab Sample ID: 880-31305-42
Matrix: Solid
Date Collected: 07/21/23 08:57
Date Received: 07/27/23 08:00
Sample Depth: 4 ft

Method: SW846 8021B - Volatile Organic Compounds (GC) (Continued)

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1,4-Difluorobenzene (Surr)	*77*		*70 - 130*	*08/02/23 11:14*	*08/03/23 19:14*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00401	U	0.00401		mg/Kg			08/03/23 20:39	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	<50.2	U	50.2		mg/Kg			08/08/23 12:15	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<50.2	U	50.2		mg/Kg		08/03/23 10:03	08/07/23 13:45	1
Diesel Range Organics (Over C10-C28)	<50.2	U *1	50.2		mg/Kg		08/03/23 10:03	08/07/23 13:45	1
OII Range Organics (Over C28-C36)	<50.2	U	50.2		mg/Kg		08/03/23 10:03	08/07/23 13:45	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*135*	*S1+*	*70 - 130*	*08/03/23 10:03*	*08/07/23 13:45*	*1*
o-Terphenyl	*152*	*S1+*	*70 - 130*	*08/03/23 10:03*	*08/07/23 13:45*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	**92.5**		5.05		mg/Kg			07/31/23 13:02	1

Client Sample ID: AH-1 @ 3 ft

Lab Sample ID: 880-31305-43
Matrix: Solid
Date Collected: 07/21/23 08:54
Date Received: 07/27/23 08:00
Sample Depth: 3 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00199	U	0.00199		mg/Kg		08/02/23 11:14	08/03/23 19:35	1
Toluene	<0.00199	U	0.00199		mg/Kg		08/02/23 11:14	08/03/23 19:35	1
Ethylbenzene	<0.00199	U	0.00199		mg/Kg		08/02/23 11:14	08/03/23 19:35	1
m-Xylene & p-Xylene	<0.00398	U	0.00398		mg/Kg		08/02/23 11:14	08/03/23 19:35	1
o-Xylene	<0.00199	U	0.00199		mg/Kg		08/02/23 11:14	08/03/23 19:35	1
Xylenes, Total	<0.00398	U	0.00398		mg/Kg		08/02/23 11:14	08/03/23 19:35	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*84*		*70 - 130*	*08/02/23 11:14*	*08/03/23 19:35*	*1*
1,4-Difluorobenzene (Surr)	*71*		*70 - 130*	*08/02/23 11:14*	*08/03/23 19:35*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00398	U	0.00398		mg/Kg			08/03/23 20:39	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	<50.4	U	50.4		mg/Kg			08/08/23 12:15	1

Eurofins Midland

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-1 @ 3 ft

Lab Sample ID: 880-31305-43
Matrix: Solid
Date Collected: 07/21/23 08:54
Date Received: 07/27/23 08:00
Sample Depth: 3 ft

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<50.4	U	50.4		mg/Kg		08/03/23 10:03	08/07/23 14:07	1
Diesel Range Organics (Over C10-C28)	<50.4	U *1	50.4		mg/Kg		08/03/23 10:03	08/07/23 14:07	1
OII Range Organics (Over C28-C36)	<50.4	U	50.4		mg/Kg		08/03/23 10:03	08/07/23 14:07	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*124*		*70 - 130*	*08/03/23 10:03*	*08/07/23 14:07*	*1*
o-Terphenyl	*139*	*S1+*	*70 - 130*	*08/03/23 10:03*	*08/07/23 14:07*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	**59.5**		5.02		mg/Kg			07/31/23 13:08	1

Client Sample ID: AH-7 @ 1 ft

Lab Sample ID: 880-31305-44
Matrix: Solid
Date Collected: 07/21/23 10:30
Date Received: 07/27/23 08:00
Sample Depth: 1 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00198	U	0.00198		mg/Kg		08/02/23 11:14	08/03/23 19:55	1
Toluene	<0.00198	U	0.00198		mg/Kg		08/02/23 11:14	08/03/23 19:55	1
Ethylbenzene	<0.00198	U	0.00198		mg/Kg		08/02/23 11:14	08/03/23 19:55	1
m-Xylene & p-Xylene	<0.00396	U	0.00396		mg/Kg		08/02/23 11:14	08/03/23 19:55	1
o-Xylene	<0.00198	U	0.00198		mg/Kg		08/02/23 11:14	08/03/23 19:55	1
Xylenes, Total	<0.00396	U	0.00396		mg/Kg		08/02/23 11:14	08/03/23 19:55	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*73*		*70 - 130*	*08/02/23 11:14*	*08/03/23 19:55*	*1*
1,4-Difluorobenzene (Surr)	*94*		*70 - 130*	*08/02/23 11:14*	*08/03/23 19:55*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00396	U	0.00396		mg/Kg			08/03/23 20:39	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	**699**		49.8		mg/Kg			08/08/23 12:15	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<49.8	U	49.8		mg/Kg		08/03/23 10:03	08/07/23 14:29	1
Diesel Range Organics (Over C10-C28)	**699**	***1**	49.8		mg/Kg		08/03/23 10:03	08/07/23 14:29	1
OII Range Organics (Over C28-C36)	<49.8	U	49.8		mg/Kg		08/03/23 10:03	08/07/23 14:29	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*210*	*S1+*	*70 - 130*	*08/03/23 10:03*	*08/07/23 14:29*	*1*
o-Terphenyl	*223*	*S1+*	*70 - 130*	*08/03/23 10:03*	*08/07/23 14:29*	*1*

Eurofins Midland

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-7 @ 1 ft

Lab Sample ID: 880-31305-44
Matrix: Solid
Date Collected: 07/21/23 10:30
Date Received: 07/27/23 08:00
Sample Depth: 1 ft

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	245		4.98		mg/Kg			07/31/23 13:14	1

Client Sample ID: AH-7 @ 2 ft

Lab Sample ID: 880-31305-45
Matrix: Solid
Date Collected: 07/21/23 10:33
Date Received: 07/27/23 08:00
Sample Depth: 2 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00198	U	0.00198		mg/Kg		08/02/23 12:04	08/03/23 01:44	1
Toluene	<0.00198	U	0.00198		mg/Kg		08/02/23 12:04	08/03/23 01:44	1
Ethylbenzene	<0.00198	U	0.00198		mg/Kg		08/02/23 12:04	08/03/23 01:44	1
m-Xylene & p-Xylene	<0.00397	U	0.00397		mg/Kg		08/02/23 12:04	08/03/23 01:44	1
o-Xylene	<0.00198	U	0.00198		mg/Kg		08/02/23 12:04	08/03/23 01:44	1
Xylenes, Total	<0.00397	U	0.00397		mg/Kg		08/02/23 12:04	08/03/23 01:44	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*75*		*70 - 130*	*08/02/23 12:04*	*08/03/23 01:44*	*1*
1,4-Difluorobenzene (Surr)	*104*		*70 - 130*	*08/02/23 12:04*	*08/03/23 01:44*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00397	U	0.00397		mg/Kg			08/03/23 10:18	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	<49.6	U	49.6		mg/Kg			08/08/23 12:15	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<49.6	U	49.6		mg/Kg		08/03/23 10:03	08/07/23 15:13	1
Diesel Range Organics (Over C10-C28)	<49.6	U *1	49.6		mg/Kg		08/03/23 10:03	08/07/23 15:13	1
OII Range Organics (Over C28-C36)	<49.6	U	49.6		mg/Kg		08/03/23 10:03	08/07/23 15:13	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*124*		*70 - 130*	*08/03/23 10:03*	*08/07/23 15:13*	*1*
o-Terphenyl	*142*	*S1+*	*70 - 130*	*08/03/23 10:03*	*08/07/23 15:13*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	453		5.00		mg/Kg			07/31/23 13:20	1

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-8 @ 2 ft

Lab Sample ID: 880-31305-46
Matrix: Solid
Date Collected: 07/21/23 10:50
Date Received: 07/27/23 08:00
Sample Depth: 2 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00202	U	0.00202		mg/Kg		08/02/23 12:04	08/03/23 02:04	1
Toluene	<0.00202	U	0.00202		mg/Kg		08/02/23 12:04	08/03/23 02:04	1
Ethylbenzene	<0.00202	U	0.00202		mg/Kg		08/02/23 12:04	08/03/23 02:04	1
m-Xylene & p-Xylene	<0.00403	U	0.00403		mg/Kg		08/02/23 12:04	08/03/23 02:04	1
o-Xylene	<0.00202	U	0.00202		mg/Kg		08/02/23 12:04	08/03/23 02:04	1
Xylenes, Total	<0.00403	U	0.00403		mg/Kg		08/02/23 12:04	08/03/23 02:04	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*86*		*70 - 130*	*08/02/23 12:04*	*08/03/23 02:04*	*1*
1,4-Difluorobenzene (Surr)	*111*		*70 - 130*	*08/02/23 12:04*	*08/03/23 02:04*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00403	U	0.00403		mg/Kg			08/03/23 10:18	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	<49.6	U	49.6		mg/Kg			08/08/23 12:15	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<49.6	U	49.6		mg/Kg		08/03/23 10:03	08/07/23 15:35	1
Diesel Range Organics (Over C10-C28)	<49.6	U *1	49.6		mg/Kg		08/03/23 10:03	08/07/23 15:35	1
OII Range Organics (Over C28-C36)	<49.6	U	49.6		mg/Kg		08/03/23 10:03	08/07/23 15:35	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*135*	*S1+*	*70 - 130*	*08/03/23 10:03*	*08/07/23 15:35*	*1*
o-Terphenyl	*152*	*S1+*	*70 - 130*	*08/03/23 10:03*	*08/07/23 15:35*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	**157**		5.01		mg/Kg			07/31/23 13:26	1

Client Sample ID: AH-10 @ 2 ft

Lab Sample ID: 880-31305-47
Matrix: Solid
Date Collected: 07/21/23 12:56
Date Received: 07/27/23 08:00
Sample Depth: 2 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00201	U	0.00201		mg/Kg		08/02/23 12:04	08/03/23 02:25	1
Toluene	<0.00201	U	0.00201		mg/Kg		08/02/23 12:04	08/03/23 02:25	1
Ethylbenzene	<0.00201	U	0.00201		mg/Kg		08/02/23 12:04	08/03/23 02:25	1
m-Xylene & p-Xylene	<0.00402	U	0.00402		mg/Kg		08/02/23 12:04	08/03/23 02:25	1
o-Xylene	<0.00201	U	0.00201		mg/Kg		08/02/23 12:04	08/03/23 02:25	1
Xylenes, Total	<0.00402	U	0.00402		mg/Kg		08/02/23 12:04	08/03/23 02:25	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*84*		*70 - 130*	*08/02/23 12:04*	*08/03/23 02:25*	*1*

Eurofins Midland

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-10 @ 2 ft

Lab Sample ID: 880-31305-47
Matrix: Solid
Date Collected: 07/21/23 12:56
Date Received: 07/27/23 08:00
Sample Depth: 2 ft

Method: SW846 8021B - Volatile Organic Compounds (GC) (Continued)

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1,4-Difluorobenzene (Surr)	*98*		*70 - 130*	*08/02/23 12:04*	*08/03/23 02:25*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00402	U	0.00402		mg/Kg			08/03/23 10:18	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	**201**		50.4		mg/Kg			08/08/23 12:15	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<50.4	U	50.4		mg/Kg		08/03/23 10:03	08/07/23 15:57	1
Diesel Range Organics (Over C10-C28)	**201**	***1**	50.4		mg/Kg		08/03/23 10:03	08/07/23 15:57	1
OII Range Organics (Over C28-C36)	<50.4	U	50.4		mg/Kg		08/03/23 10:03	08/07/23 15:57	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*149*	*S1+*	*70 - 130*	*08/03/23 10:03*	*08/07/23 15:57*	*1*
o-Terphenyl	*165*	*S1+*	*70 - 130*	*08/03/23 10:03*	*08/07/23 15:57*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	**347**		5.03		mg/Kg			07/31/23 13:32	1

Client Sample ID: AH-7 @ 3 ft

Lab Sample ID: 880-31305-48
Matrix: Solid
Date Collected: 07/21/23 10:37
Date Received: 07/27/23 08:00
Sample Depth: 3 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00200	U	0.00200		mg/Kg		08/02/23 12:04	08/03/23 02:45	1
Toluene	<0.00200	U	0.00200		mg/Kg		08/02/23 12:04	08/03/23 02:45	1
Ethylbenzene	<0.00200	U	0.00200		mg/Kg		08/02/23 12:04	08/03/23 02:45	1
m-Xylene & p-Xylene	<0.00401	U	0.00401		mg/Kg		08/02/23 12:04	08/03/23 02:45	1
o-Xylene	<0.00200	U	0.00200		mg/Kg		08/02/23 12:04	08/03/23 02:45	1
Xylenes, Total	<0.00401	U	0.00401		mg/Kg		08/02/23 12:04	08/03/23 02:45	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*77*		*70 - 130*	*08/02/23 12:04*	*08/03/23 02:45*	*1*
1,4-Difluorobenzene (Surr)	*101*		*70 - 130*	*08/02/23 12:04*	*08/03/23 02:45*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00401	U	0.00401		mg/Kg			08/03/23 10:18	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	**529**		50.3		mg/Kg			08/08/23 12:15	1

Eurofins Midland

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-7 @ 3 ft

Lab Sample ID: 880-31305-48
Matrix: Solid
Date Collected: 07/21/23 10:37
Date Received: 07/27/23 08:00
Sample Depth: 3 ft

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<50.3	U	50.3		mg/Kg		08/03/23 10:03	08/07/23 16:19	1
Diesel Range Organics (Over C10-C28)	**529**	***1**	50.3		mg/Kg		08/03/23 10:03	08/07/23 16:19	1
Oll Range Organics (Over C28-C36)	<50.3	U	50.3		mg/Kg		08/03/23 10:03	08/07/23 16:19	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*165*	*S1+*	*70 - 130*	*08/03/23 10:03*	*08/07/23 16:19*	*1*
o-Terphenyl	*186*	*S1+*	*70 - 130*	*08/03/23 10:03*	*08/07/23 16:19*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	**767**		4.97		mg/Kg			07/31/23 13:51	1

Client Sample ID: AH-8 @ 1 ft

Lab Sample ID: 880-31305-49
Matrix: Solid
Date Collected: 07/21/23 10:44
Date Received: 07/27/23 08:00
Sample Depth: 1 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00199	U	0.00199		mg/Kg		08/02/23 12:04	08/03/23 03:05	1
Toluene	<0.00199	U	0.00199		mg/Kg		08/02/23 12:04	08/03/23 03:05	1
Ethylbenzene	<0.00199	U	0.00199		mg/Kg		08/02/23 12:04	08/03/23 03:05	1
m-Xylene & p-Xylene	<0.00398	U	0.00398		mg/Kg		08/02/23 12:04	08/03/23 03:05	1
o-Xylene	<0.00199	U	0.00199		mg/Kg		08/02/23 12:04	08/03/23 03:05	1
Xylenes, Total	<0.00398	U	0.00398		mg/Kg		08/02/23 12:04	08/03/23 03:05	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*84*		*70 - 130*	*08/02/23 12:04*	*08/03/23 03:05*	*1*
1,4-Difluorobenzene (Surr)	*103*		*70 - 130*	*08/02/23 12:04*	*08/03/23 03:05*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00398	U	0.00398		mg/Kg			08/03/23 10:18	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	<49.6	U	49.6		mg/Kg			08/08/23 12:15	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<49.6	U	49.6		mg/Kg		08/03/23 10:03	08/07/23 16:42	1
Diesel Range Organics (Over C10-C28)	<49.6	U *1	49.6		mg/Kg		08/03/23 10:03	08/07/23 16:42	1
Oll Range Organics (Over C28-C36)	<49.6	U	49.6		mg/Kg		08/03/23 10:03	08/07/23 16:42	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*158*	*S1+*	*70 - 130*	*08/03/23 10:03*	*08/07/23 16:42*	*1*
o-Terphenyl	*167*	*S1+*	*70 - 130*	*08/03/23 10:03*	*08/07/23 16:42*	*1*

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-8 @ 1 ft

Lab Sample ID: 880-31305-49
Matrix: Solid
Date Collected: 07/21/23 10:44
Date Received: 07/27/23 08:00
Sample Depth: 1 ft

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	**160**		5.00		mg/Kg			07/31/23 13:57	1

Client Sample ID: AH-10 @ 1 ft

Lab Sample ID: 880-31305-50
Matrix: Solid
Date Collected: 07/21/23 12:48
Date Received: 07/27/23 08:00
Sample Depth: 1 ft

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00198	U	0.00198		mg/Kg		08/02/23 12:04	08/03/23 03:26	1
Toluene	<0.00198	U	0.00198		mg/Kg		08/02/23 12:04	08/03/23 03:26	1
Ethylbenzene	<0.00198	U	0.00198		mg/Kg		08/02/23 12:04	08/03/23 03:26	1
m-Xylene & p-Xylene	<0.00396	U	0.00396		mg/Kg		08/02/23 12:04	08/03/23 03:26	1
o-Xylene	<0.00198	U	0.00198		mg/Kg		08/02/23 12:04	08/03/23 03:26	1
Xylenes, Total	<0.00396	U	0.00396		mg/Kg		08/02/23 12:04	08/03/23 03:26	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*90*		*70 - 130*	*08/02/23 12:04*	*08/03/23 03:26*	*1*
1,4-Difluorobenzene (Surr)	*103*		*70 - 130*	*08/02/23 12:04*	*08/03/23 03:26*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00396	U	0.00396		mg/Kg			08/03/23 10:18	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	**61.0**		50.4		mg/Kg			08/08/23 12:15	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<50.4	U	50.4		mg/Kg		08/03/23 10:03	08/07/23 17:04	1
Diesel Range Organics (Over C10-C28)	**61.0**	***1**	50.4		mg/Kg		08/03/23 10:03	08/07/23 17:04	1
OII Range Organics (Over C28-C36)	<50.4	U	50.4		mg/Kg		08/03/23 10:03	08/07/23 17:04	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*142*	*S1+*	*70 - 130*	*08/03/23 10:03*	*08/07/23 17:04*	*1*
o-Terphenyl	*149*	*S1+*	*70 - 130*	*08/03/23 10:03*	*08/07/23 17:04*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	**149**		4.95		mg/Kg			07/31/23 14:14	1

Client Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-9 @ 2 ft

Date Collected: 07/21/23 14:30
Date Received: 07/27/23 08:00
Sample Depth: 2 ft

Lab Sample ID: 880-31305-51

Matrix: Solid

Method: SW846 8021B - Volatile Organic Compounds (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00199	U	0.00199		mg/Kg		08/02/23 12:04	08/03/23 03:46	1
Toluene	<0.00199	U	0.00199		mg/Kg		08/02/23 12:04	08/03/23 03:46	1
Ethylbenzene	<0.00199	U	0.00199		mg/Kg		08/02/23 12:04	08/03/23 03:46	1
m-Xylene & p-Xylene	<0.00398	U	0.00398		mg/Kg		08/02/23 12:04	08/03/23 03:46	1
o-Xylene	<0.00199	U	0.00199		mg/Kg		08/02/23 12:04	08/03/23 03:46	1
Xylenes, Total	<0.00398	U	0.00398		mg/Kg		08/02/23 12:04	08/03/23 03:46	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*91*		*70 - 130*	*08/02/23 12:04*	*08/03/23 03:46*	*1*
1,4-Difluorobenzene (Surr)	*111*		*70 - 130*	*08/02/23 12:04*	*08/03/23 03:46*	*1*

Method: TAL SOP Total BTEX - Total BTEX Calculation

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total BTEX	<0.00398	U	0.00398		mg/Kg			08/03/23 10:18	1

Method: SW846 8015 NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Total TPH	<50.5	U	50.5		mg/Kg			08/08/23 12:15	1

Method: SW846 8015B NM - Diesel Range Organics (DRO) (GC)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<50.5	U	50.5		mg/Kg		08/03/23 10:03	08/07/23 17:26	1
Diesel Range Organics (Over C10-C28)	<50.5	U *1	50.5		mg/Kg		08/03/23 10:03	08/07/23 17:26	1
OII Range Organics (Over C28-C36)	<50.5	U	50.5		mg/Kg		08/03/23 10:03	08/07/23 17:26	1

Surrogate	*%Recovery*	*Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*137*	*S1+*	*70 - 130*	*08/03/23 10:03*	*08/07/23 17:26*	*1*
o-Terphenyl	*154*	*S1+*	*70 - 130*	*08/03/23 10:03*	*08/07/23 17:26*	*1*

Method: EPA 300.0 - Anions, Ion Chromatography - Soluble

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	**78.3**		5.05		mg/Kg			07/31/23 14:19	1

Surrogate Summary

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Method: 8021B - Volatile Organic Compounds (GC)

Matrix: Solid **Prep Type: Total/NA**

		Percent Surrogate Recovery (Acceptance Limits)	
Lab Sample ID	Client Sample ID	BFB1 (70-130)	DFBZ1 (70-130)
880-31305-1	AH-12 @ 1 ft	87	86
880-31305-1 MS	AH-12 @ 1 ft	123	117
880-31305-1 MSD	AH-12 @ 1 ft	119	117
880-31305-2	AH-14 @ 2 ft	78	96
880-31305-3	AH-15 @ 20 in	86	72
880-31305-4	AH-16 @ 4 ft	86	76
880-31305-5	AH-13 @ 1 ft	84	82
880-31305-6	AH-13 @ 2 ft	88	77
880-31305-7	AH-14 @ 1 ft	89	80
880-31305-8	AH-14 @ 3 ft	92	82
880-31305-9	AH-14 @ 4 ft	88	63 S1-
880-31305-10	AH-15 @ 1 ft	84	60 S1-
880-31305-11	AH-16 @ 1 ft	96	104
880-31305-12	AH-16 @ 2 ft	89	78
880-31305-13	AH-16 @ 3 ft	75	99
880-31305-14	AH-17 @ 1 ft	87	86
880-31305-15	AH-17 @ 2 ft	85	81
880-31305-16	AH-17 @ 3 ft	86	85
880-31305-17	AH-17 @ 4 ft	86	66 S1-
880-31305-18	AH-18 @ 1 ft	83	81
880-31305-19	AH-18 @ 2 ft	81	77
880-31305-20	AH-18 @ 3 ft	82	78
880-31305-21	AH-19 @ 1 ft	95	103
880-31305-21 MS	AH-19 @ 1 ft	99	97
880-31305-21 MSD	AH-19 @ 1 ft	99	100
880-31305-22	AH-19 @ 2 ft	94	110
880-31305-23	AH-19 @ 3 ft	97	112
880-31305-24	AH-19 @ 4 ft	96	112
880-31305-25	AH-5 @ 2 ft	86	59 S1-
880-31305-25 MS	AH-5 @ 2 ft	122	120
880-31305-25 MSD	AH-5 @ 2 ft	117	95
880-31305-26	AH-8 @ 2 ft	86	82
880-31305-27	AH-3 @ 1 ft	79	77
880-31305-28	AH-1 @ 2 ft	82	77
880-31305-29	AH-2 @ 4 ft	89	75
880-31305-30	AH-2 @ 1 ft	85	69 S1-
880-31305-31	AH-3 @ 3 ft	84	73
880-31305-32	AH-5 @ 1 ft	83	75
880-31305-33	AH-4 @ 4 ft	78	77
880-31305-34	AH-3 @ 4 ft	85	77
880-31305-35	AH-2 @ 3 ft	86	87
880-31305-36	AH-4 @ 2 ft	78	81
880-31305-37	AH-4 @ 3 ft	86	81
880-31305-38	AH-1 @ 1 ft	83	79
880-31305-39	AH-3 @ 2 ft	83	77
880-31305-40	AH-2 @ 2 ft	83	83
880-31305-41	AH-4 @ 1 ft	86	67 S1-
880-31305-42	AH-1 @ 4 ft	83	77
880-31305-43	AH-1 @ 3 ft	84	71

Surrogate Summary

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Method: 8021B - Volatile Organic Compounds (GC) (Continued)

Matrix: Solid **Prep Type: Total/NA**

Lab Sample ID	Client Sample ID	Percent Surrogate Recovery (Acceptance Limits) BFB1 (70-130)	DFBZ1 (70-130)
880-31305-44	AH-7 @ 1 ft	73	94
880-31305-45	AH-7 @ 2 ft	75	104
880-31305-45 MS	AH-7 @ 2 ft	89	98
880-31305-45 MSD	AH-7 @ 2 ft	96	99
880-31305-46	AH-8 @ 2 ft	86	111
880-31305-47	AH-10 @ 2 ft	84	98
880-31305-48	AH-7 @ 3 ft	77	101
880-31305-49	AH-8 @ 1 ft	84	103
880-31305-50	AH-10 @ 1 ft	90	103
880-31305-51	AH-9 @ 2 ft	91	111
LCS 880-59110/1-A	Lab Control Sample	107	120
LCS 880-59116/1-A	Lab Control Sample	95	96
LCS 880-59348/1-A	Lab Control Sample	113	120
LCS 880-59350/1-A	Lab Control Sample	110	101
LCSD 880-59110/2-A	Lab Control Sample Dup	119	122
LCSD 880-59116/2-A	Lab Control Sample Dup	97	92
LCSD 880-59348/2-A	Lab Control Sample Dup	122	95
LCSD 880-59350/2-A	Lab Control Sample Dup	94	100
MB 880-58890/5-A	Method Blank	98	122
MB 880-59110/5-A	Method Blank	68 S1-	100
MB 880-59116/5-A	Method Blank	109	134 S1+
MB 880-59344/5-A	Method Blank	68 S1-	85
MB 880-59346/5-A	Method Blank	84	88
MB 880-59348/5-A	Method Blank	70	97
MB 880-59350/5-A	Method Blank	85	90

Surrogate Legend

BFB = 4-Bromofluorobenzene (Surr)
DFBZ = 1,4-Difluorobenzene (Surr)

Method: 8015B NM - Diesel Range Organics (DRO) (GC)

Matrix: Solid **Prep Type: Total/NA**

Lab Sample ID	Client Sample ID	Percent Surrogate Recovery (Acceptance Limits) 1CO1 (70-130)	OTPH1 (70-130)
880-31082-A-26-D MS	Matrix Spike	133 S1+	139 S1+
880-31082-A-26-E MSD	Matrix Spike Duplicate	139 S1+	144 S1+
880-31305-1	AH-12 @ 1 ft	114	128
880-31305-2	AH-14 @ 2 ft	129	141 S1+
880-31305-3	AH-15 @ 20 in	123	130
880-31305-4	AH-16 @ 4 ft	104	115
880-31305-5	AH-13 @ 1 ft	118	128
880-31305-6	AH-13 @ 2 ft	111	123
880-31305-7	AH-14 @ 1 ft	85	90
880-31305-8	AH-14 @ 3 ft	124	133 S1+
880-31305-9	AH-14 @ 4 ft	109	119
880-31305-10	AH-15 @ 1 ft	128	136 S1+
880-31305-11	AH-16 @ 1 ft	128	137 S1+
880-31305-12	AH-16 @ 2 ft	134 S1+	142 S1+
880-31305-13	AH-16 @ 3 ft	132 S1+	141 S1+

Surrogate Summary

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Method: 8015B NM - Diesel Range Organics (DRO) (GC) (Continued)

Matrix: Solid

Prep Type: Total/NA

Lab Sample ID	Client Sample ID	Percent Surrogate Recovery (Acceptance Limits) 1CO1 (70-130)	OTPH1 (70-130)
880-31305-14	AH-17 @ 1 ft	121	128
880-31305-15	AH-17 @ 2 ft	161 S1+	153 S1+
880-31305-15 MS	AH-17 @ 2 ft	186 S1+	155 S1+
880-31305-15 MSD	AH-17 @ 2 ft	184 S1+	152 S1+
880-31305-16	AH-17 @ 3 ft	175 S1+	168 S1+
880-31305-17	AH-17 @ 4 ft	188 S1+	174 S1+
880-31305-18	AH-18 @ 1 ft	193 S1+	178 S1+
880-31305-19	AH-18 @ 2 ft	166 S1+	153 S1+
880-31305-20	AH-18 @ 3 ft	181 S1+	167 S1+
880-31305-21	AH-19 @ 1 ft	174 S1+	164 S1+
880-31305-22	AH-19 @ 2 ft	163 S1+	156 S1+
880-31305-23	AH-19 @ 3 ft	187 S1+	176 S1+
880-31305-24	AH-19 @ 4 ft	162 S1+	152 S1+
880-31305-25	AH-5 @ 2 ft	179 S1+	168 S1+
880-31305-26	AH-8 @ 2 ft	176 S1+	166 S1+
880-31305-27	AH-3 @ 1 ft	190 S1+	165 S1+
880-31305-28	AH-1 @ 2 ft	225 S1+	217 S1+
880-31305-29	AH-2 @ 4 ft	208 S1+	198 S1+
880-31305-30	AH-2 @ 1 ft	166 S1+	156 S1+
880-31305-31	AH-3 @ 3 ft	177 S1+	161 S1+
880-31305-32	AH-5 @ 1 ft	190 S1+	177 S1+
880-31305-33	AH-4 @ 4 ft	214 S1+	202 S1+
880-31305-34	AH-3 @ 4 ft	178 S1+	172 S1+
880-31305-35	AH-2 @ 3 ft	139 S1+	153 S1+
880-31305-35 MS	AH-2 @ 3 ft	144 S1+	154 S1+
880-31305-35 MSD	AH-2 @ 3 ft	163 S1+	177 S1+
880-31305-36	AH-4 @ 2 ft	143 S1+	155 S1+
880-31305-37	AH-4 @ 3 ft	151 S1+	161 S1+
880-31305-38	AH-1 @ 1 ft	123	135 S1+
880-31305-39	AH-3 @ 2 ft	146 S1+	160 S1+
880-31305-40	AH-2 @ 2 ft	131 S1+	146 S1+
880-31305-41	AH-4 @ 1 ft	173 S1+	195 S1+
880-31305-42	AH-1 @ 4 ft	135 S1+	152 S1+
880-31305-43	AH-1 @ 3 ft	124	139 S1+
880-31305-44	AH-7 @ 1 ft	210 S1+	223 S1+
880-31305-45	AH-7 @ 2 ft	124	142 S1+
880-31305-46	AH-8 @ 2 ft	135 S1+	152 S1+
880-31305-47	AH-10 @ 2 ft	149 S1+	165 S1+
880-31305-48	AH-7 @ 3 ft	165 S1+	186 S1+
880-31305-49	AH-8 @ 1 ft	158 S1+	167 S1+
880-31305-50	AH-10 @ 1 ft	142 S1+	149 S1+
880-31305-51	AH-9 @ 2 ft	137 S1+	154 S1+
LCS 880-59198/2-A	Lab Control Sample	97	114
LCS 880-59215/2-A	Lab Control Sample	203 S1+	182 S1+
LCS 880-59216/2-A	Lab Control Sample	130	150 S1+
LCSD 880-59198/3-A	Lab Control Sample Dup	102	119
LCSD 880-59215/3-A	Lab Control Sample Dup	209 S1+	186 S1+
LCSD 880-59216/3-A	Lab Control Sample Dup	103	122
MB 880-59198/1-A	Method Blank	128	144 S1+
MB 880-59215/1-A	Method Blank	146 S1+	141 S1+

Surrogate Summary

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Method: 8015B NM - Diesel Range Organics (DRO) (GC) (Continued)

Matrix: Solid

Prep Type: Total/NA

		Percent Surrogate Recovery (Acceptance Limits)									
		1CO1	OTPH1								
Lab Sample ID	Client Sample ID	(70-130)	(70-130)								
MB 880-59216/1-A	Method Blank	137 S1+	158 S1+								

Surrogate Legend

1CO = 1-Chlorooctane

OTPH = o-Terphenyl

QC Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Method: 8021B - Volatile Organic Compounds (GC)

Lab Sample ID: MB 880-58890/5-A
Matrix: Solid
Analysis Batch: 59105

Client Sample ID: Method Blank
Prep Type: Total/NA
Prep Batch: 58890

Analyte	MB Result	MB Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00200	U	0.00200		mg/Kg		07/31/23 15:07	08/02/23 13:37	1
Toluene	<0.00200	U	0.00200		mg/Kg		07/31/23 15:07	08/02/23 13:37	1
Ethylbenzene	<0.00200	U	0.00200		mg/Kg		07/31/23 15:07	08/02/23 13:37	1
m-Xylene & p-Xylene	<0.00400	U	0.00400		mg/Kg		07/31/23 15:07	08/02/23 13:37	1
o-Xylene	<0.00200	U	0.00200		mg/Kg		07/31/23 15:07	08/02/23 13:37	1
Xylenes, Total	<0.00400	U	0.00400		mg/Kg		07/31/23 15:07	08/02/23 13:37	1

Surrogate	*MB %Recovery*	*MB Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*98*		*70 - 130*	*07/31/23 15:07*	*08/02/23 13:37*	*1*
1,4-Difluorobenzene (Surr)	*122*		*70 - 130*	*07/31/23 15:07*	*08/02/23 13:37*	*1*

Lab Sample ID: MB 880-59110/5-A
Matrix: Solid
Analysis Batch: 59172

Client Sample ID: Method Blank
Prep Type: Total/NA
Prep Batch: 59110

Analyte	MB Result	MB Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00200	U	0.00200		mg/Kg		08/02/23 11:14	08/03/23 11:30	1
Toluene	<0.00200	U	0.00200		mg/Kg		08/02/23 11:14	08/03/23 11:30	1
Ethylbenzene	<0.00200	U	0.00200		mg/Kg		08/02/23 11:14	08/03/23 11:30	1
m-Xylene & p-Xylene	<0.00400	U	0.00400		mg/Kg		08/02/23 11:14	08/03/23 11:30	1
o-Xylene	<0.00200	U	0.00200		mg/Kg		08/02/23 11:14	08/03/23 11:30	1
Xylenes, Total	<0.00400	U	0.00400		mg/Kg		08/02/23 11:14	08/03/23 11:30	1

Surrogate	*MB %Recovery*	*MB Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*68*	*S1-*	*70 - 130*	*08/02/23 11:14*	*08/03/23 11:30*	*1*
1,4-Difluorobenzene (Surr)	*100*		*70 - 130*	*08/02/23 11:14*	*08/03/23 11:30*	*1*

Lab Sample ID: LCS 880-59110/1-A
Matrix: Solid
Analysis Batch: 59172

Client Sample ID: Lab Control Sample
Prep Type: Total/NA
Prep Batch: 59110

Analyte	Spike Added	LCS Result	LCS Qualifier	Unit	D	%Rec	%Rec Limits
Benzene	0.100	0.1247		mg/Kg		125	70 - 130
Toluene	0.100	0.1078		mg/Kg		108	70 - 130
Ethylbenzene	0.100	0.1149		mg/Kg		115	70 - 130
m-Xylene & p-Xylene	0.200	0.2438		mg/Kg		122	70 - 130
o-Xylene	0.100	0.1177		mg/Kg		118	70 - 130

Surrogate	*LCS %Recovery*	*LCS Qualifier*	*Limits*
4-Bromofluorobenzene (Surr)	*107*		*70 - 130*
1,4-Difluorobenzene (Surr)	*120*		*70 - 130*

Lab Sample ID: LCSD 880-59110/2-A
Matrix: Solid
Analysis Batch: 59172

Client Sample ID: Lab Control Sample Dup
Prep Type: Total/NA
Prep Batch: 59110

Analyte	Spike Added	LCSD Result	LCSD Qualifier	Unit	D	%Rec	%Rec Limits	RPD	RPD Limit
Benzene	0.100	0.1191		mg/Kg		119	70 - 130	5	35

QC Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Method: 8021B - Volatile Organic Compounds (GC) (Continued)

Lab Sample ID: LCSD 880-59110/2-A — **Client Sample ID: Lab Control Sample Dup**
Matrix: Solid — **Prep Type: Total/NA**
Analysis Batch: 59172 — **Prep Batch: 59110**

Analyte			Spike Added	LCSD Result	LCSD Qualifier	Unit	D	%Rec	%Rec Limits	RPD	RPD Limit
Toluene			0.100	0.1067		mg/Kg		107	70 - 130	1	35
Ethylbenzene			0.100	0.1177		mg/Kg		118	70 - 130	2	35
m-Xylene & p-Xylene			0.200	0.2516		mg/Kg		126	70 - 130	3	35
o-Xylene			0.100	0.1220		mg/Kg		122	70 - 130	4	35

Surrogate	*LCSD %Recovery*	*LCSD Qualifier*	*Limits*
4-Bromofluorobenzene (Surr)	*119*		*70 - 130*
1,4-Difluorobenzene (Surr)	*122*		*70 - 130*

Lab Sample ID: 880-31305-25 MS — **Client Sample ID: AH-5 @ 2 ft**
Matrix: Solid — **Prep Type: Total/NA**
Analysis Batch: 59172 — **Prep Batch: 59110**

Analyte	Sample Result	Sample Qualifier	Spike Added	MS Result	MS Qualifier	Unit	D	%Rec	%Rec Limits
Benzene	<0.00199	U	0.0998	0.1135		mg/Kg		114	70 - 130
Toluene	<0.00199	U	0.0998	0.09286		mg/Kg		93	70 - 130
Ethylbenzene	<0.00199	U	0.0998	0.1003		mg/Kg		101	70 - 130
m-Xylene & p-Xylene	<0.00398	U	0.200	0.2067		mg/Kg		104	70 - 130
o-Xylene	<0.00199	U	0.0998	0.1022		mg/Kg		102	70 - 130

Surrogate	*MS %Recovery*	*MS Qualifier*	*Limits*
4-Bromofluorobenzene (Surr)	*122*		*70 - 130*
1,4-Difluorobenzene (Surr)	*120*		*70 - 130*

Lab Sample ID: 880-31305-25 MSD — **Client Sample ID: AH-5 @ 2 ft**
Matrix: Solid — **Prep Type: Total/NA**
Analysis Batch: 59172 — **Prep Batch: 59110**

Analyte	Sample Result	Sample Qualifier	Spike Added	MSD Result	MSD Qualifier	Unit	D	%Rec	%Rec Limits	RPD	RPD Limit
Benzene	<0.00199	U	0.0996	0.09751		mg/Kg		98	70 - 130	15	35
Toluene	<0.00199	U	0.0996	0.08332		mg/Kg		84	70 - 130	11	35
Ethylbenzene	<0.00199	U	0.0996	0.08602		mg/Kg		86	70 - 130	15	35
m-Xylene & p-Xylene	<0.00398	U	0.199	0.1756		mg/Kg		88	70 - 130	16	35
o-Xylene	<0.00199	U	0.0996	0.08752		mg/Kg		88	70 - 130	16	35

Surrogate	*MSD %Recovery*	*MSD Qualifier*	*Limits*
4-Bromofluorobenzene (Surr)	*117*		*70 - 130*
1,4-Difluorobenzene (Surr)	*95*		*70 - 130*

Lab Sample ID: MB 880-59116/5-A — **Client Sample ID: Method Blank**
Matrix: Solid — **Prep Type: Total/NA**
Analysis Batch: 59105 — **Prep Batch: 59116**

Analyte	MB Result	MB Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00200	U	0.00200		mg/Kg		08/02/23 12:04	08/03/23 01:15	1
Toluene	<0.00200	U	0.00200		mg/Kg		08/02/23 12:04	08/03/23 01:15	1
Ethylbenzene	<0.00200	U	0.00200		mg/Kg		08/02/23 12:04	08/03/23 01:15	1
m-Xylene & p-Xylene	<0.00400	U	0.00400		mg/Kg		08/02/23 12:04	08/03/23 01:15	1

QC Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Method: 8021B - Volatile Organic Compounds (GC) (Continued)

Lab Sample ID: MB 880-59116/5-A
Matrix: Solid
Analysis Batch: 59105

Client Sample ID: Method Blank
Prep Type: Total/NA
Prep Batch: 59116

Analyte	MB Result	MB Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
o-Xylene	<0.00200	U	0.00200		mg/Kg		08/02/23 12:04	08/03/23 01:15	1
Xylenes, Total	<0.00400	U	0.00400		mg/Kg		08/02/23 12:04	08/03/23 01:15	1

Surrogate	*MB %Recovery*	*MB Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
4-Bromofluorobenzene (Surr)	*109*		*70 - 130*	*08/02/23 12:04*	*08/03/23 01:15*	*1*
1,4-Difluorobenzene (Surr)	*134*	*S1+*	*70 - 130*	*08/02/23 12:04*	*08/03/23 01:15*	*1*

Lab Sample ID: LCS 880-59116/1-A
Matrix: Solid
Analysis Batch: 59105

Client Sample ID: Lab Control Sample
Prep Type: Total/NA
Prep Batch: 59116

Analyte			Spike Added	LCS Result	LCS Qualifier	Unit	D	%Rec	%Rec Limits		
Benzene			0.100	0.08113		mg/Kg		81	70 - 130		
Toluene			0.100	0.08208		mg/Kg		82	70 - 130		
Ethylbenzene			0.100	0.07458		mg/Kg		75	70 - 130		
m-Xylene & p-Xylene			0.200	0.1641		mg/Kg		82	70 - 130		
o-Xylene			0.100	0.08055		mg/Kg		81	70 - 130		

Surrogate	*LCS %Recovery*	*LCS Qualifier*	*Limits*
4-Bromofluorobenzene (Surr)	*95*		*70 - 130*
1,4-Difluorobenzene (Surr)	*96*		*70 - 130*

Lab Sample ID: LCSD 880-59116/2-A
Matrix: Solid
Analysis Batch: 59105

Client Sample ID: Lab Control Sample Dup
Prep Type: Total/NA
Prep Batch: 59116

Analyte			Spike Added	LCSD Result	LCSD Qualifier	Unit	D	%Rec	%Rec Limits	RPD	RPD Limit
Benzene			0.100	0.07095		mg/Kg		71	70 - 130	13	35
Toluene			0.100	0.08140		mg/Kg		81	70 - 130	1	35
Ethylbenzene			0.100	0.07289		mg/Kg		73	70 - 130	2	35
m-Xylene & p-Xylene			0.200	0.1662		mg/Kg		83	70 - 130	1	35
o-Xylene			0.100	0.08313		mg/Kg		83	70 - 130	3	35

Surrogate	*LCSD %Recovery*	*LCSD Qualifier*	*Limits*
4-Bromofluorobenzene (Surr)	*97*		*70 - 130*
1,4-Difluorobenzene (Surr)	*92*		*70 - 130*

Lab Sample ID: 880-31305-45 MS
Matrix: Solid
Analysis Batch: 59105

Client Sample ID: AH-7 @ 2 ft
Prep Type: Total/NA
Prep Batch: 59116

Analyte	Sample Result	Sample Qualifier	Spike Added	MS Result	MS Qualifier	Unit	D	%Rec	%Rec Limits		
Benzene	<0.00198	U	0.0996	0.08675		mg/Kg		87	70 - 130		
Toluene	<0.00198	U	0.0996	0.08914		mg/Kg		89	70 - 130		
Ethylbenzene	<0.00198	U	0.0996	0.07349		mg/Kg		74	70 - 130		
m-Xylene & p-Xylene	<0.00397	U	0.199	0.1675		mg/Kg		84	70 - 130		
o-Xylene	<0.00198	U	0.0996	0.08188		mg/Kg		82	70 - 130		

QC Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Method: 8021B - Volatile Organic Compounds (GC) (Continued)

Lab Sample ID: 880-31305-45 MS
Matrix: Solid
Analysis Batch: 59105

Client Sample ID: AH-7 @ 2 ft
Prep Type: Total/NA
Prep Batch: 59116

Surrogate	MS %Recovery	MS Qualifier	Limits
4-Bromofluorobenzene (Surr)	89		70 - 130
1,4-Difluorobenzene (Surr)	98		70 - 130

Lab Sample ID: 880-31305-45 MSD
Matrix: Solid
Analysis Batch: 59105

Client Sample ID: AH-7 @ 2 ft
Prep Type: Total/NA
Prep Batch: 59116

Analyte	Sample Result	Sample Qualifier	Spike Added	MSD Result	MSD Qualifier	Unit	D	%Rec	%Rec Limits	RPD	RPD Limit
Benzene	<0.00198	U	0.0994	0.09095		mg/Kg		91	70 - 130	5	35
Toluene	<0.00198	U	0.0994	0.08960		mg/Kg		90	70 - 130	1	35
Ethylbenzene	<0.00198	U	0.0994	0.07629		mg/Kg		77	70 - 130	4	35
m-Xylene & p-Xylene	<0.00397	U	0.199	0.1735		mg/Kg		87	70 - 130	4	35
o-Xylene	<0.00198	U	0.0994	0.08454		mg/Kg		85	70 - 130	3	35

Surrogate	MSD %Recovery	MSD Qualifier	Limits
4-Bromofluorobenzene (Surr)	96		70 - 130
1,4-Difluorobenzene (Surr)	99		70 - 130

Lab Sample ID: MB 880-59344/5-A
Matrix: Solid
Analysis Batch: 59294

Client Sample ID: Method Blank
Prep Type: Total/NA
Prep Batch: 59344

Analyte	MB Result	MB Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00200	U	0.00200		mg/Kg		08/04/23 12:58	08/04/23 23:23	1
Toluene	<0.00200	U	0.00200		mg/Kg		08/04/23 12:58	08/04/23 23:23	1
Ethylbenzene	<0.00200	U	0.00200		mg/Kg		08/04/23 12:58	08/04/23 23:23	1
m-Xylene & p-Xylene	<0.00400	U	0.00400		mg/Kg		08/04/23 12:58	08/04/23 23:23	1
o-Xylene	<0.00200	U	0.00200		mg/Kg		08/04/23 12:58	08/04/23 23:23	1
Xylenes, Total	<0.00400	U	0.00400		mg/Kg		08/04/23 12:58	08/04/23 23:23	1

Surrogate	MB %Recovery	MB Qualifier	Limits	Prepared	Analyzed	Dil Fac
4-Bromofluorobenzene (Surr)	68	S1-	70 - 130	08/04/23 12:58	08/04/23 23:23	1
1,4-Difluorobenzene (Surr)	85		70 - 130	08/04/23 12:58	08/04/23 23:23	1

Lab Sample ID: MB 880-59346/5-A
Matrix: Solid
Analysis Batch: 59296

Client Sample ID: Method Blank
Prep Type: Total/NA
Prep Batch: 59346

Analyte	MB Result	MB Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00200	U	0.00200		mg/Kg		08/04/23 13:45	08/04/23 23:23	1
Toluene	<0.00200	U	0.00200		mg/Kg		08/04/23 13:45	08/04/23 23:23	1
Ethylbenzene	<0.00200	U	0.00200		mg/Kg		08/04/23 13:45	08/04/23 23:23	1
m-Xylene & p-Xylene	<0.00400	U	0.00400		mg/Kg		08/04/23 13:45	08/04/23 23:23	1
o-Xylene	<0.00200	U	0.00200		mg/Kg		08/04/23 13:45	08/04/23 23:23	1
Xylenes, Total	<0.00400	U	0.00400		mg/Kg		08/04/23 13:45	08/04/23 23:23	1

QC Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Method: 8021B - Volatile Organic Compounds (GC) (Continued)

Lab Sample ID: MB 880-59346/5-A
Matrix: Solid
Analysis Batch: 59296

Client Sample ID: Method Blank
Prep Type: Total/NA
Prep Batch: 59346

Surrogate	MB %Recovery	MB Qualifier	Limits	Prepared	Analyzed	Dil Fac
4-Bromofluorobenzene (Surr)	84		70 - 130	08/04/23 13:45	08/04/23 23:23	1
1,4-Difluorobenzene (Surr)	88		70 - 130	08/04/23 13:45	08/04/23 23:23	1

Lab Sample ID: MB 880-59348/5-A
Matrix: Solid
Analysis Batch: 59294

Client Sample ID: Method Blank
Prep Type: Total/NA
Prep Batch: 59348

Analyte	MB Result	MB Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00200	U	0.00200		mg/Kg		08/04/23 13:55	08/05/23 09:58	1
Toluene	<0.00200	U	0.00200		mg/Kg		08/04/23 13:55	08/05/23 09:58	1
Ethylbenzene	<0.00200	U	0.00200		mg/Kg		08/04/23 13:55	08/05/23 09:58	1
m-Xylene & p-Xylene	<0.00400	U	0.00400		mg/Kg		08/04/23 13:55	08/05/23 09:58	1
o-Xylene	<0.00200	U	0.00200		mg/Kg		08/04/23 13:55	08/05/23 09:58	1
Xylenes, Total	<0.00400	U	0.00400		mg/Kg		08/04/23 13:55	08/05/23 09:58	1

Surrogate	MB %Recovery	MB Qualifier	Limits	Prepared	Analyzed	Dil Fac
4-Bromofluorobenzene (Surr)	70		70 - 130	08/04/23 13:55	08/05/23 09:58	1
1,4-Difluorobenzene (Surr)	97		70 - 130	08/04/23 13:55	08/05/23 09:58	1

Lab Sample ID: LCS 880-59348/1-A
Matrix: Solid
Analysis Batch: 59294

Client Sample ID: Lab Control Sample
Prep Type: Total/NA
Prep Batch: 59348

Analyte			Spike Added	LCS Result	LCS Qualifier	Unit	D	%Rec	%Rec Limits		
Benzene			0.100	0.1261		mg/Kg		126	70 - 130		
Toluene			0.100	0.1195		mg/Kg		120	70 - 130		
Ethylbenzene			0.100	0.1237		mg/Kg		124	70 - 130		
m-Xylene & p-Xylene			0.200	0.2643	*+	mg/Kg		132	70 - 130		
o-Xylene			0.100	0.1281		mg/Kg		128	70 - 130		

Surrogate	LCS %Recovery	LCS Qualifier	Limits
4-Bromofluorobenzene (Surr)	113		70 - 130
1,4-Difluorobenzene (Surr)	120		70 - 130

Lab Sample ID: LCSD 880-59348/2-A
Matrix: Solid
Analysis Batch: 59294

Client Sample ID: Lab Control Sample Dup
Prep Type: Total/NA
Prep Batch: 59348

Analyte			Spike Added	LCSD Result	LCSD Qualifier	Unit	D	%Rec	%Rec Limits	RPD	RPD Limit
Benzene			0.100	0.1187		mg/Kg		119	70 - 130	6	35
Toluene			0.100	0.1069		mg/Kg		107	70 - 130	11	35
Ethylbenzene			0.100	0.1144		mg/Kg		114	70 - 130	8	35
m-Xylene & p-Xylene			0.200	0.2441		mg/Kg		122	70 - 130	8	35
o-Xylene			0.100	0.1193		mg/Kg		119	70 - 130	7	35

Surrogate	LCSD %Recovery	LCSD Qualifier	Limits
4-Bromofluorobenzene (Surr)	122		70 - 130

QC Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Method: 8021B - Volatile Organic Compounds (GC) (Continued)

Lab Sample ID: LCSD 880-59348/2-A
Matrix: Solid
Analysis Batch: 59294

Client Sample ID: Lab Control Sample Dup
Prep Type: Total/NA
Prep Batch: 59348

Surrogate	LCSD %Recovery	LCSD Qualifier	Limits
1,4-Difluorobenzene (Surr)	95		70 - 130

Lab Sample ID: 880-31305-1 MS
Matrix: Solid
Analysis Batch: 59294

Client Sample ID: AH-12 @ 1 ft
Prep Type: Total/NA
Prep Batch: 59348

Analyte	Sample Result	Sample Qualifier	Spike Added	MS Result	MS Qualifier	Unit	D	%Rec	%Rec Limits
Benzene	<0.00202	U	0.0996	0.08059		mg/Kg		81	70 - 130
Toluene	<0.00202	U	0.0996	0.07788		mg/Kg		78	70 - 130
Ethylbenzene	<0.00202	U	0.0996	0.08826		mg/Kg		89	70 - 130
m-Xylene & p-Xylene	<0.00403	U *+	0.199	0.1839		mg/Kg		92	70 - 130
o-Xylene	<0.00202	U	0.0996	0.08572		mg/Kg		86	70 - 130

Surrogate	MS %Recovery	MS Qualifier	Limits
4-Bromofluorobenzene (Surr)	123		70 - 130
1,4-Difluorobenzene (Surr)	117		70 - 130

Lab Sample ID: 880-31305-1 MSD
Matrix: Solid
Analysis Batch: 59294

Client Sample ID: AH-12 @ 1 ft
Prep Type: Total/NA
Prep Batch: 59348

Analyte	Sample Result	Sample Qualifier	Spike Added	MSD Result	MSD Qualifier	Unit	D	%Rec	%Rec Limits	RPD	RPD Limit
Benzene	<0.00202	U	0.0990	0.08232		mg/Kg		83	70 - 130	2	35
Toluene	<0.00202	U	0.0990	0.07752		mg/Kg		78	70 - 130	0	35
Ethylbenzene	<0.00202	U	0.0990	0.08805		mg/Kg		89	70 - 130	0	35
m-Xylene & p-Xylene	<0.00403	U *+	0.198	0.1779		mg/Kg		90	70 - 130	3	35
o-Xylene	<0.00202	U	0.0990	0.08299		mg/Kg		84	70 - 130	3	35

Surrogate	MSD %Recovery	MSD Qualifier	Limits
4-Bromofluorobenzene (Surr)	119		70 - 130
1,4-Difluorobenzene (Surr)	117		70 - 130

Lab Sample ID: MB 880-59350/5-A
Matrix: Solid
Analysis Batch: 59296

Client Sample ID: Method Blank
Prep Type: Total/NA
Prep Batch: 59350

Analyte	MB Result	MB Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<0.00200	U	0.00200		mg/Kg		08/04/23 14:26	08/05/23 10:02	1
Toluene	<0.00200	U	0.00200		mg/Kg		08/04/23 14:26	08/05/23 10:02	1
Ethylbenzene	<0.00200	U	0.00200		mg/Kg		08/04/23 14:26	08/05/23 10:02	1
m-Xylene & p-Xylene	<0.00400	U	0.00400		mg/Kg		08/04/23 14:26	08/05/23 10:02	1
o-Xylene	<0.00200	U	0.00200		mg/Kg		08/04/23 14:26	08/05/23 10:02	1
Xylenes, Total	<0.00400	U	0.00400		mg/Kg		08/04/23 14:26	08/05/23 10:02	1

Surrogate	MB %Recovery	MB Qualifier	Limits	Prepared	Analyzed	Dil Fac
4-Bromofluorobenzene (Surr)	85		70 - 130	08/04/23 14:26	08/05/23 10:02	1
1,4-Difluorobenzene (Surr)	90		70 - 130	08/04/23 14:26	08/05/23 10:02	1

QC Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Method: 8021B - Volatile Organic Compounds (GC) (Continued)

Lab Sample ID: LCS 880-59350/1-A
Matrix: Solid
Analysis Batch: 59296

Client Sample ID: Lab Control Sample
Prep Type: Total/NA
Prep Batch: 59350

Analyte			Spike Added	LCS Result	LCS Qualifier	Unit	D	%Rec	%Rec Limits		
Benzene			0.100	0.1018		mg/Kg		102	70 - 130		
Toluene			0.100	0.1209		mg/Kg		121	70 - 130		
Ethylbenzene			0.100	0.1056		mg/Kg		106	70 - 130		
m-Xylene & p-Xylene			0.200	0.2045		mg/Kg		102	70 - 130		
o-Xylene			0.100	0.1049		mg/Kg		105	70 - 130		

Surrogate	*LCS %Recovery*	*LCS Qualifier*	*Limits*
4-Bromofluorobenzene (Surr)	*110*		*70 - 130*
1,4-Difluorobenzene (Surr)	*101*		*70 - 130*

Lab Sample ID: LCSD 880-59350/2-A
Matrix: Solid
Analysis Batch: 59296

Client Sample ID: Lab Control Sample Dup
Prep Type: Total/NA
Prep Batch: 59350

Analyte			Spike Added	LCSD Result	LCSD Qualifier	Unit	D	%Rec	%Rec Limits	RPD	RPD Limit
Benzene			0.100	0.08796		mg/Kg		88	70 - 130	15	35
Toluene			0.100	0.09858		mg/Kg		99	70 - 130	20	35
Ethylbenzene			0.100	0.08246		mg/Kg		82	70 - 130	25	35
m-Xylene & p-Xylene			0.200	0.1572		mg/Kg		79	70 - 130	26	35
o-Xylene			0.100	0.08079		mg/Kg		81	70 - 130	26	35

Surrogate	*LCSD %Recovery*	*LCSD Qualifier*	*Limits*
4-Bromofluorobenzene (Surr)	*94*		*70 - 130*
1,4-Difluorobenzene (Surr)	*100*		*70 - 130*

Lab Sample ID: 880-31305-21 MS
Matrix: Solid
Analysis Batch: 59296

Client Sample ID: AH-19 @ 1 ft
Prep Type: Total/NA
Prep Batch: 59350

Analyte	Sample Result	Sample Qualifier	Spike Added	MS Result	MS Qualifier	Unit	D	%Rec	%Rec Limits		
Benzene	<0.00200	U F1	0.0996	0.06537	F1	mg/Kg		66	70 - 130		
Toluene	<0.00200	U	0.0996	0.07343		mg/Kg		74	70 - 130		
Ethylbenzene	<0.00200	U F1	0.0996	0.06585	F1	mg/Kg		66	70 - 130		
m-Xylene & p-Xylene	<0.00399	U F1	0.199	0.1248	F1	mg/Kg		63	70 - 130		
o-Xylene	<0.00200	U F1	0.0996	0.06244	F1	mg/Kg		63	70 - 130		

Surrogate	*MS %Recovery*	*MS Qualifier*	*Limits*
4-Bromofluorobenzene (Surr)	*99*		*70 - 130*
1,4-Difluorobenzene (Surr)	*97*		*70 - 130*

Lab Sample ID: 880-31305-21 MSD
Matrix: Solid
Analysis Batch: 59296

Client Sample ID: AH-19 @ 1 ft
Prep Type: Total/NA
Prep Batch: 59350

Analyte	Sample Result	Sample Qualifier	Spike Added	MSD Result	MSD Qualifier	Unit	D	%Rec	%Rec Limits	RPD	RPD Limit
Benzene	<0.00200	U F1	0.101	0.07193		mg/Kg		71	70 - 130	10	35
Toluene	<0.00200	U	0.101	0.07918		mg/Kg		79	70 - 130	8	35
Ethylbenzene	<0.00200	U F1	0.101	0.06939	F1	mg/Kg		69	70 - 130	5	35

QC Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Method: 8021B - Volatile Organic Compounds (GC) (Continued)

Lab Sample ID: 880-31305-21 MSD
Matrix: Solid
Analysis Batch: 59296

Client Sample ID: AH-19 @ 1 ft
Prep Type: Total/NA
Prep Batch: 59350

Analyte	Sample Result	Sample Qualifier	Spike Added	MSD Result	MSD Qualifier	Unit	D	%Rec	%Rec Limits	RPD	RPD Limit
m-Xylene & p-Xylene	<0.00399	U F1	0.202	0.1309	F1	mg/Kg		65	70 - 130	5	35
o-Xylene	<0.00200	U F1	0.101	0.06524	F1	mg/Kg		65	70 - 130	4	35

Surrogate	*MSD %Recovery*	*MSD Qualifier*	*Limits*
4-Bromofluorobenzene (Surr)	*99*		*70 - 130*
1,4-Difluorobenzene (Surr)	*100*		*70 - 130*

Method: 8015B NM - Diesel Range Organics (DRO) (GC)

Lab Sample ID: MB 880-59198/1-A
Matrix: Solid
Analysis Batch: 59390

Client Sample ID: Method Blank
Prep Type: Total/NA
Prep Batch: 59198

Analyte	MB Result	MB Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<50.0	U	50.0		mg/Kg		08/03/23 09:49	08/05/23 08:24	1
Diesel Range Organics (Over C10-C28)	<50.0	U	50.0		mg/Kg		08/03/23 09:49	08/05/23 08:24	1
OII Range Organics (Over C28-C36)	<50.0	U	50.0		mg/Kg		08/03/23 09:49	08/05/23 08:24	1

Surrogate	*MB %Recovery*	*MB Qualifier*	*Limits*	*Prepared*	*Analyzed*	*Dil Fac*
1-Chlorooctane	*128*		*70 - 130*	*08/03/23 09:49*	*08/05/23 08:24*	*1*
o-Terphenyl	*144*	*S1+*	*70 - 130*	*08/03/23 09:49*	*08/05/23 08:24*	*1*

Lab Sample ID: LCS 880-59198/2-A
Matrix: Solid
Analysis Batch: 59390

Client Sample ID: Lab Control Sample
Prep Type: Total/NA
Prep Batch: 59198

Analyte	Spike Added	LCS Result	LCS Qualifier	Unit	D	%Rec	%Rec Limits
Gasoline Range Organics (GRO)-C6-C10	1000	1047		mg/Kg		105	70 - 130
Diesel Range Organics (Over C10-C28)	1000	1052		mg/Kg		105	70 - 130

Surrogate	*LCS %Recovery*	*LCS Qualifier*	*Limits*
1-Chlorooctane	*97*		*70 - 130*
o-Terphenyl	*114*		*70 - 130*

Lab Sample ID: LCSD 880-59198/3-A
Matrix: Solid
Analysis Batch: 59390

Client Sample ID: Lab Control Sample Dup
Prep Type: Total/NA
Prep Batch: 59198

Analyte	Spike Added	LCSD Result	LCSD Qualifier	Unit	D	%Rec	%Rec Limits	RPD	RPD Limit
Gasoline Range Organics (GRO)-C6-C10	1000	1030		mg/Kg		103	70 - 130	2	20
Diesel Range Organics (Over C10-C28)	1000	1107		mg/Kg		111	70 - 130	5	20

QC Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Method: 8015B NM - Diesel Range Organics (DRO) (GC) (Continued)

Lab Sample ID: LCSD 880-59198/3-A
Matrix: Solid
Analysis Batch: 59390

Client Sample ID: Lab Control Sample Dup
Prep Type: Total/NA
Prep Batch: 59198

Surrogate	LCSD %Recovery	LCSD Qualifier	Limits
1-Chlorooctane	102		70 - 130
o-Terphenyl	119		70 - 130

Lab Sample ID: 880-31082-A-26-D MS
Matrix: Solid
Analysis Batch: 59390

Client Sample ID: Matrix Spike
Prep Type: Total/NA
Prep Batch: 59198

Analyte	Sample Result	Sample Qualifier	Spike Added	MS Result	MS Qualifier	Unit	D	%Rec	%Rec Limits		
Gasoline Range Organics (GRO)-C6-C10	<50.3	U	992	1000		mg/Kg		98	70 - 130		
Diesel Range Organics (Over C10-C28)	<50.3	U	992	1060		mg/Kg		102	70 - 130		

Surrogate	MS %Recovery	MS Qualifier	Limits
1-Chlorooctane	133	S1+	70 - 130
o-Terphenyl	139	S1+	70 - 130

Lab Sample ID: 880-31082-A-26-E MSD
Matrix: Solid
Analysis Batch: 59390

Client Sample ID: Matrix Spike Duplicate
Prep Type: Total/NA
Prep Batch: 59198

Analyte	Sample Result	Sample Qualifier	Spike Added	MSD Result	MSD Qualifier	Unit	D	%Rec	%Rec Limits	RPD	RPD Limit
Gasoline Range Organics (GRO)-C6-C10	<50.3	U	992	1048		mg/Kg		103	70 - 130	5	20
Diesel Range Organics (Over C10-C28)	<50.3	U	992	1099		mg/Kg		106	70 - 130	4	20

Surrogate	MSD %Recovery	MSD Qualifier	Limits
1-Chlorooctane	139	S1+	70 - 130
o-Terphenyl	144	S1+	70 - 130

Lab Sample ID: MB 880-59215/1-A
Matrix: Solid
Analysis Batch: 59413

Client Sample ID: Method Blank
Prep Type: Total/NA
Prep Batch: 59215

Analyte	MB Result	MB Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<50.0	U	50.0		mg/Kg		08/03/23 09:57	08/07/23 07:49	1
Diesel Range Organics (Over C10-C28)	<50.0	U	50.0		mg/Kg		08/03/23 09:57	08/07/23 07:49	1
OII Range Organics (Over C28-C36)	<50.0	U	50.0		mg/Kg		08/03/23 09:57	08/07/23 07:49	1

Surrogate	MB %Recovery	MB Qualifier	Limits	Prepared	Analyzed	Dil Fac
1-Chlorooctane	146	S1+	70 - 130	08/03/23 09:57	08/07/23 07:49	1
o-Terphenyl	141	S1+	70 - 130	08/03/23 09:57	08/07/23 07:49	1

QC Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Method: 8015B NM - Diesel Range Organics (DRO) (GC) (Continued)

Lab Sample ID: LCS 880-59215/2-A
Matrix: Solid
Analysis Batch: 59413

Client Sample ID: Lab Control Sample
Prep Type: Total/NA
Prep Batch: 59215

Analyte			Spike Added	LCS Result	LCS Qualifier	Unit	D	%Rec	%Rec Limits		
Gasoline Range Organics (GRO)-C6-C10			1000	1115		mg/Kg		111	70 - 130		
Diesel Range Organics (Over C10-C28)			1000	1110		mg/Kg		111	70 - 130		

Surrogate	*LCS %Recovery*	*LCS Qualifier*	*Limits*
1-Chlorooctane	*203*	*S1+*	*70 - 130*
o-Terphenyl	*182*	*S1+*	*70 - 130*

Lab Sample ID: LCSD 880-59215/3-A
Matrix: Solid
Analysis Batch: 59413

Client Sample ID: Lab Control Sample Dup
Prep Type: Total/NA
Prep Batch: 59215

Analyte			Spike Added	LCSD Result	LCSD Qualifier	Unit	D	%Rec	%Rec Limits	RPD	RPD Limit
Gasoline Range Organics (GRO)-C6-C10			1000	1072		mg/Kg		107	70 - 130	4	20
Diesel Range Organics (Over C10-C28)			1000	1052		mg/Kg		105	70 - 130	5	20

Surrogate	*LCSD %Recovery*	*LCSD Qualifier*	*Limits*
1-Chlorooctane	*209*	*S1+*	*70 - 130*
o-Terphenyl	*186*	*S1+*	*70 - 130*

Lab Sample ID: 880-31305-15 MS
Matrix: Solid
Analysis Batch: 59413

Client Sample ID: AH-17 @ 2 ft
Prep Type: Total/NA
Prep Batch: 59215

Analyte	Sample Result	Sample Qualifier	Spike Added	MS Result	MS Qualifier	Unit	D	%Rec	%Rec Limits		
Gasoline Range Organics (GRO)-C6-C10	<50.4	U	996	1216		mg/Kg		120	70 - 130		
Diesel Range Organics (Over C10-C28)	<50.4	U F1	996	1892	F1	mg/Kg		188	70 - 130		

Surrogate	*MS %Recovery*	*MS Qualifier*	*Limits*
1-Chlorooctane	*186*	*S1+*	*70 - 130*
o-Terphenyl	*155*	*S1+*	*70 - 130*

Lab Sample ID: 880-31305-15 MSD
Matrix: Solid
Analysis Batch: 59413

Client Sample ID: AH-17 @ 2 ft
Prep Type: Total/NA
Prep Batch: 59215

Analyte	Sample Result	Sample Qualifier	Spike Added	MSD Result	MSD Qualifier	Unit	D	%Rec	%Rec Limits	RPD	RPD Limit
Gasoline Range Organics (GRO)-C6-C10	<50.4	U	996	1227		mg/Kg		122	70 - 130	1	20
Diesel Range Organics (Over C10-C28)	<50.4	U F1	996	1853	F1	mg/Kg		184	70 - 130	2	20

Surrogate	*MSD %Recovery*	*MSD Qualifier*	*Limits*
1-Chlorooctane	*184*	*S1+*	*70 - 130*

QC Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Method: 8015B NM - Diesel Range Organics (DRO) (GC) (Continued)

Lab Sample ID: 880-31305-15 MSD
Matrix: Solid
Analysis Batch: 59413

Client Sample ID: AH-17 @ 2 ft
Prep Type: Total/NA
Prep Batch: 59215

Surrogate	MSD %Recovery	MSD Qualifier	Limits
o-Terphenyl	152	S1+	70 - 130

Lab Sample ID: MB 880-59216/1-A
Matrix: Solid
Analysis Batch: 59411

Client Sample ID: Method Blank
Prep Type: Total/NA
Prep Batch: 59216

Analyte	MB Result	MB Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics (GRO)-C6-C10	<50.0	U	50.0		mg/Kg		08/03/23 10:03	08/07/23 07:49	1
Diesel Range Organics (Over C10-C28)	<50.0	U	50.0		mg/Kg		08/03/23 10:03	08/07/23 07:49	1
OII Range Organics (Over C28-C36)	<50.0	U	50.0		mg/Kg		08/03/23 10:03	08/07/23 07:49	1

Surrogate	MB %Recovery	MB Qualifier	Limits	Prepared	Analyzed	Dil Fac
1-Chlorooctane	137	S1+	70 - 130	08/03/23 10:03	08/07/23 07:49	1
o-Terphenyl	158	S1+	70 - 130	08/03/23 10:03	08/07/23 07:49	1

Lab Sample ID: LCS 880-59216/2-A
Matrix: Solid
Analysis Batch: 59411

Client Sample ID: Lab Control Sample
Prep Type: Total/NA
Prep Batch: 59216

Analyte			Spike Added	LCS Result	LCS Qualifier	Unit	D	%Rec	%Rec Limits		
Gasoline Range Organics (GRO)-C6-C10			1000	1053		mg/Kg		105	70 - 130		
Diesel Range Organics (Over C10-C28)			1000	1214		mg/Kg		121	70 - 130		

Surrogate	LCS %Recovery	LCS Qualifier	Limits
1-Chlorooctane	130		70 - 130
o-Terphenyl	150	S1+	70 - 130

Lab Sample ID: LCSD 880-59216/3-A
Matrix: Solid
Analysis Batch: 59411

Client Sample ID: Lab Control Sample Dup
Prep Type: Total/NA
Prep Batch: 59216

Analyte			Spike Added	LCSD Result	LCSD Qualifier	Unit	D	%Rec	%Rec Limits	RPD	RPD Limit
Gasoline Range Organics (GRO)-C6-C10			1000	899.2		mg/Kg		90	70 - 130	16	20
Diesel Range Organics (Over C10-C28)			1000	968.7	*1	mg/Kg		97	70 - 130	22	20

Surrogate	LCSD %Recovery	LCSD Qualifier	Limits
1-Chlorooctane	103		70 - 130
o-Terphenyl	122		70 - 130

QC Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Method: 8015B NM - Diesel Range Organics (DRO) (GC) (Continued)

Lab Sample ID: 880-31305-35 MS
Matrix: Solid
Analysis Batch: 59411

Client Sample ID: AH-2 @ 3 ft
Prep Type: Total/NA
Prep Batch: 59216

Analyte	Sample Result	Sample Qualifier	Spike Added	MS Result	MS Qualifier	Unit	D	%Rec	%Rec Limits
Gasoline Range Organics (GRO)-C6-C10	<50.3	U	1010	952.4		mg/Kg		94	70 - 130
Diesel Range Organics (Over C10-C28)	<50.3	U *1	1010	1074		mg/Kg		102	70 - 130

Surrogate	*MS %Recovery*	*MS Qualifier*	*Limits*
1-Chlorooctane	*144*	*S1+*	*70 - 130*
o-Terphenyl	*154*	*S1+*	*70 - 130*

Lab Sample ID: 880-31305-35 MSD
Matrix: Solid
Analysis Batch: 59411

Client Sample ID: AH-2 @ 3 ft
Prep Type: Total/NA
Prep Batch: 59216

Analyte	Sample Result	Sample Qualifier	Spike Added	MSD Result	MSD Qualifier	Unit	D	%Rec	%Rec Limits	RPD	RPD Limit
Gasoline Range Organics (GRO)-C6-C10	<50.3	U	1010	1091		mg/Kg		108	70 - 130	14	20
Diesel Range Organics (Over C10-C28)	<50.3	U *1	1010	1222		mg/Kg		117	70 - 130	13	20

Surrogate	*MSD %Recovery*	*MSD Qualifier*	*Limits*
1-Chlorooctane	*163*	*S1+*	*70 - 130*
o-Terphenyl	*177*	*S1+*	*70 - 130*

Method: 300.0 - Anions, Ion Chromatography

Lab Sample ID: MB 880-58710/1-A
Matrix: Solid
Analysis Batch: 58855

Client Sample ID: Method Blank
Prep Type: Soluble

Analyte	MB Result	MB Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	<5.00	U	5.00		mg/Kg			07/31/23 11:48	1

Lab Sample ID: LCS 880-58710/2-A
Matrix: Solid
Analysis Batch: 58855

Client Sample ID: Lab Control Sample
Prep Type: Soluble

Analyte	Spike Added	LCS Result	LCS Qualifier	Unit	D	%Rec	%Rec Limits
Chloride	250	227.2		mg/Kg		91	90 - 110

Lab Sample ID: LCSD 880-58710/3-A
Matrix: Solid
Analysis Batch: 58855

Client Sample ID: Lab Control Sample Dup
Prep Type: Soluble

Analyte	Spike Added	LCSD Result	LCSD Qualifier	Unit	D	%Rec	%Rec Limits	RPD	RPD Limit
Chloride	250	229.3		mg/Kg		92	90 - 110	1	20

QC Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Method: 300.0 - Anions, Ion Chromatography (Continued)

Lab Sample ID: 880-31305-37 MS — **Client Sample ID: AH-4 @ 3 ft**
Matrix: Solid — **Prep Type: Soluble**
Analysis Batch: 58855

Analyte	Sample Result	Sample Qualifier	Spike Added	MS Result	MS Qualifier	Unit	D	%Rec	%Rec Limits
Chloride	76.5		250	306.5		mg/Kg		92	90 - 110

Lab Sample ID: 880-31305-37 MSD — **Client Sample ID: AH-4 @ 3 ft**
Matrix: Solid — **Prep Type: Soluble**
Analysis Batch: 58855

Analyte	Sample Result	Sample Qualifier	Spike Added	MSD Result	MSD Qualifier	Unit	D	%Rec	%Rec Limits	RPD	RPD Limit
Chloride	76.5		250	307.9		mg/Kg		93	90 - 110	0	20

Lab Sample ID: 880-31305-47 MS — **Client Sample ID: AH-10 @ 2 ft**
Matrix: Solid — **Prep Type: Soluble**
Analysis Batch: 58855

Analyte	Sample Result	Sample Qualifier	Spike Added	MS Result	MS Qualifier	Unit	D	%Rec	%Rec Limits
Chloride	347		252	602.9		mg/Kg		102	90 - 110

Lab Sample ID: 880-31305-47 MSD — **Client Sample ID: AH-10 @ 2 ft**
Matrix: Solid — **Prep Type: Soluble**
Analysis Batch: 58855

Analyte	Sample Result	Sample Qualifier	Spike Added	MSD Result	MSD Qualifier	Unit	D	%Rec	%Rec Limits	RPD	RPD Limit
Chloride	347		252	602.6		mg/Kg		102	90 - 110	0	20

Lab Sample ID: MB 880-58708/1-A — **Client Sample ID: Method Blank**
Matrix: Solid — **Prep Type: Soluble**
Analysis Batch: 58858

Analyte	MB Result	MB Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	<5.00	U	5.00		mg/Kg			07/31/23 18:27	1

Lab Sample ID: LCS 880-58708/2-A — **Client Sample ID: Lab Control Sample**
Matrix: Solid — **Prep Type: Soluble**
Analysis Batch: 58858

Analyte	Spike Added	LCS Result	LCS Qualifier	Unit	D	%Rec	%Rec Limits
Chloride	250	237.1		mg/Kg		95	90 - 110

Lab Sample ID: LCSD 880-58708/3-A — **Client Sample ID: Lab Control Sample Dup**
Matrix: Solid — **Prep Type: Soluble**
Analysis Batch: 58858

Analyte	Spike Added	LCSD Result	LCSD Qualifier	Unit	D	%Rec	%Rec Limits	RPD	RPD Limit
Chloride	250	236.6		mg/Kg		95	90 - 110	0	20

Lab Sample ID: 880-31305-7 MS — **Client Sample ID: AH-14 @ 1 ft**
Matrix: Solid — **Prep Type: Soluble**
Analysis Batch: 58858

Analyte	Sample Result	Sample Qualifier	Spike Added	MS Result	MS Qualifier	Unit	D	%Rec	%Rec Limits
Chloride	298	F1	249	499.8	F1	mg/Kg		81	90 - 110

QC Sample Results

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Method: 300.0 - Anions, Ion Chromatography

Lab Sample ID: 880-31305-7 MSD
Matrix: Solid
Analysis Batch: 58858

Client Sample ID: AH-14 @ 1 ft
Prep Type: Soluble

Analyte	Sample Result	Sample Qualifier	Spike Added	MSD Result	MSD Qualifier	Unit	D	%Rec	%Rec Limits	RPD	RPD Limit
Chloride	298	F1	249	496.4	F1	mg/Kg		80	90 - 110	1	20

Lab Sample ID: MB 880-58709/1-A
Matrix: Solid
Analysis Batch: 58859

Client Sample ID: Method Blank
Prep Type: Soluble

Analyte	MB Result	MB Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chloride	<5.00	U	5.00		mg/Kg			07/31/23 22:02	1

Lab Sample ID: LCS 880-58709/2-A
Matrix: Solid
Analysis Batch: 58859

Client Sample ID: Lab Control Sample
Prep Type: Soluble

Analyte	Spike Added	LCS Result	LCS Qualifier	Unit	D	%Rec	%Rec Limits
Chloride	250	239.0		mg/Kg		96	90 - 110

Lab Sample ID: LCSD 880-58709/3-A
Matrix: Solid
Analysis Batch: 58859

Client Sample ID: Lab Control Sample Dup
Prep Type: Soluble

Analyte	Spike Added	LCSD Result	LCSD Qualifier	Unit	D	%Rec	%Rec Limits	RPD	RPD Limit
Chloride	250	239.3		mg/Kg		96	90 - 110	0	20

Lab Sample ID: 880-31305-17 MS
Matrix: Solid
Analysis Batch: 58859

Client Sample ID: AH-17 @ 4 ft
Prep Type: Soluble

Analyte	Sample Result	Sample Qualifier	Spike Added	MS Result	MS Qualifier	Unit	D	%Rec	%Rec Limits
Chloride	67.2		252	315.6		mg/Kg		99	90 - 110

Lab Sample ID: 880-31305-17 MSD
Matrix: Solid
Analysis Batch: 58859

Client Sample ID: AH-17 @ 4 ft
Prep Type: Soluble

Analyte	Sample Result	Sample Qualifier	Spike Added	MSD Result	MSD Qualifier	Unit	D	%Rec	%Rec Limits	RPD	RPD Limit
Chloride	67.2		252	313.8		mg/Kg		98	90 - 110	1	20

Lab Sample ID: 880-31305-27 MS
Matrix: Solid
Analysis Batch: 58859

Client Sample ID: AH-3 @ 1 ft
Prep Type: Soluble

Analyte	Sample Result	Sample Qualifier	Spike Added	MS Result	MS Qualifier	Unit	D	%Rec	%Rec Limits
Chloride	2160	F1	1260	3743	F1	mg/Kg		126	90 - 110

Lab Sample ID: 880-31305-27 MSD
Matrix: Solid
Analysis Batch: 58859

Client Sample ID: AH-3 @ 1 ft
Prep Type: Soluble

Analyte	Sample Result	Sample Qualifier	Spike Added	MSD Result	MSD Qualifier	Unit	D	%Rec	%Rec Limits	RPD	RPD Limit
Chloride	2160	F1	1260	3746	F1	mg/Kg		126	90 - 110	0	20

QC Association Summary

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

GC VOA

Prep Batch: 58890

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
MB 880-58890/5-A	Method Blank	Total/NA	Solid	5035	

Analysis Batch: 59105

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
880-31305-45	AH-7 @ 2 ft	Total/NA	Solid	8021B	59116
880-31305-46	AH-8 @ 2 ft	Total/NA	Solid	8021B	59116
880-31305-47	AH-10 @ 2 ft	Total/NA	Solid	8021B	59116
880-31305-48	AH-7 @ 3 ft	Total/NA	Solid	8021B	59116
880-31305-49	AH-8 @ 1 ft	Total/NA	Solid	8021B	59116
880-31305-50	AH-10 @ 1 ft	Total/NA	Solid	8021B	59116
880-31305-51	AH-9 @ 2 ft	Total/NA	Solid	8021B	59116
MB 880-58890/5-A	Method Blank	Total/NA	Solid	8021B	58890
MB 880-59116/5-A	Method Blank	Total/NA	Solid	8021B	59116
LCS 880-59116/1-A	Lab Control Sample	Total/NA	Solid	8021B	59116
LCSD 880-59116/2-A	Lab Control Sample Dup	Total/NA	Solid	8021B	59116
880-31305-45 MS	AH-7 @ 2 ft	Total/NA	Solid	8021B	59116
880-31305-45 MSD	AH-7 @ 2 ft	Total/NA	Solid	8021B	59116

Prep Batch: 59110

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
880-31305-25	AH-5 @ 2 ft	Total/NA	Solid	5035	
880-31305-26	AH-8 @ 2 ft	Total/NA	Solid	5035	
880-31305-27	AH-3 @ 1 ft	Total/NA	Solid	5035	
880-31305-28	AH-1 @ 2 ft	Total/NA	Solid	5035	
880-31305-29	AH-2 @ 4 ft	Total/NA	Solid	5035	
880-31305-30	AH-2 @ 1 ft	Total/NA	Solid	5035	
880-31305-31	AH-3 @ 3 ft	Total/NA	Solid	5035	
880-31305-32	AH-5 @ 1 ft	Total/NA	Solid	5035	
880-31305-33	AH-4 @ 4 ft	Total/NA	Solid	5035	
880-31305-34	AH-3 @ 4 ft	Total/NA	Solid	5035	
880-31305-35	AH-2 @ 3 ft	Total/NA	Solid	5035	
880-31305-36	AH-4 @ 2 ft	Total/NA	Solid	5035	
880-31305-37	AH-4 @ 3 ft	Total/NA	Solid	5035	
880-31305-38	AH-1 @ 1 ft	Total/NA	Solid	5035	
880-31305-39	AH-3 @ 2 ft	Total/NA	Solid	5035	
880-31305-40	AH-2 @ 2 ft	Total/NA	Solid	5035	
880-31305-41	AH-4 @ 1 ft	Total/NA	Solid	5035	
880-31305-42	AH-1 @ 4 ft	Total/NA	Solid	5035	
880-31305-43	AH-1 @ 3 ft	Total/NA	Solid	5035	
880-31305-44	AH-7 @ 1 ft	Total/NA	Solid	5035	
MB 880-59110/5-A	Method Blank	Total/NA	Solid	5035	
LCS 880-59110/1-A	Lab Control Sample	Total/NA	Solid	5035	
LCSD 880-59110/2-A	Lab Control Sample Dup	Total/NA	Solid	5035	
880-31305-25 MS	AH-5 @ 2 ft	Total/NA	Solid	5035	
880-31305-25 MSD	AH-5 @ 2 ft	Total/NA	Solid	5035	

Prep Batch: 59116

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
880-31305-45	AH-7 @ 2 ft	Total/NA	Solid	5035	
880-31305-46	AH-8 @ 2 ft	Total/NA	Solid	5035	
880-31305-47	AH-10 @ 2 ft	Total/NA	Solid	5035	

QC Association Summary

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

GC VOA (Continued)

Prep Batch: 59116 (Continued)

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
880-31305-48	AH-7 @ 3 ft	Total/NA	Solid	5035	
880-31305-49	AH-8 @ 1 ft	Total/NA	Solid	5035	
880-31305-50	AH-10 @ 1 ft	Total/NA	Solid	5035	
880-31305-51	AH-9 @ 2 ft	Total/NA	Solid	5035	
MB 880-59116/5-A	Method Blank	Total/NA	Solid	5035	
LCS 880-59116/1-A	Lab Control Sample	Total/NA	Solid	5035	
LCSD 880-59116/2-A	Lab Control Sample Dup	Total/NA	Solid	5035	
880-31305-45 MS	AH-7 @ 2 ft	Total/NA	Solid	5035	
880-31305-45 MSD	AH-7 @ 2 ft	Total/NA	Solid	5035	

Analysis Batch: 59172

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
880-31305-25	AH-5 @ 2 ft	Total/NA	Solid	8021B	59110
880-31305-26	AH-8 @ 2 ft	Total/NA	Solid	8021B	59110
880-31305-27	AH-3 @ 1 ft	Total/NA	Solid	8021B	59110
880-31305-28	AH-1 @ 2 ft	Total/NA	Solid	8021B	59110
880-31305-29	AH-2 @ 4 ft	Total/NA	Solid	8021B	59110
880-31305-30	AH-2 @ 1 ft	Total/NA	Solid	8021B	59110
880-31305-31	AH-3 @ 3 ft	Total/NA	Solid	8021B	59110
880-31305-32	AH-5 @ 1 ft	Total/NA	Solid	8021B	59110
880-31305-33	AH-4 @ 4 ft	Total/NA	Solid	8021B	59110
880-31305-34	AH-3 @ 4 ft	Total/NA	Solid	8021B	59110
880-31305-35	AH-2 @ 3 ft	Total/NA	Solid	8021B	59110
880-31305-36	AH-4 @ 2 ft	Total/NA	Solid	8021B	59110
880-31305-37	AH-4 @ 3 ft	Total/NA	Solid	8021B	59110
880-31305-38	AH-1 @ 1 ft	Total/NA	Solid	8021B	59110
880-31305-39	AH-3 @ 2 ft	Total/NA	Solid	8021B	59110
880-31305-40	AH-2 @ 2 ft	Total/NA	Solid	8021B	59110
880-31305-41	AH-4 @ 1 ft	Total/NA	Solid	8021B	59110
880-31305-42	AH-1 @ 4 ft	Total/NA	Solid	8021B	59110
880-31305-43	AH-1 @ 3 ft	Total/NA	Solid	8021B	59110
880-31305-44	AH-7 @ 1 ft	Total/NA	Solid	8021B	59110
MB 880-59110/5-A	Method Blank	Total/NA	Solid	8021B	59110
LCS 880-59110/1-A	Lab Control Sample	Total/NA	Solid	8021B	59110
LCSD 880-59110/2-A	Lab Control Sample Dup	Total/NA	Solid	8021B	59110
880-31305-25 MS	AH-5 @ 2 ft	Total/NA	Solid	8021B	59110
880-31305-25 MSD	AH-5 @ 2 ft	Total/NA	Solid	8021B	59110

Analysis Batch: 59238

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
880-31305-1	AH-12 @ 1 ft	Total/NA	Solid	Total BTEX	
880-31305-2	AH-14 @ 2 ft	Total/NA	Solid	Total BTEX	
880-31305-3	AH-15 @ 20 in	Total/NA	Solid	Total BTEX	
880-31305-4	AH-16 @ 4 ft	Total/NA	Solid	Total BTEX	
880-31305-5	AH-13 @ 1 ft	Total/NA	Solid	Total BTEX	
880-31305-6	AH-13 @ 2 ft	Total/NA	Solid	Total BTEX	
880-31305-7	AH-14 @ 1 ft	Total/NA	Solid	Total BTEX	
880-31305-8	AH-14 @ 3 ft	Total/NA	Solid	Total BTEX	
880-31305-9	AH-14 @ 4 ft	Total/NA	Solid	Total BTEX	
880-31305-10	AH-15 @ 1 ft	Total/NA	Solid	Total BTEX	
880-31305-11	AH-16 @ 1 ft	Total/NA	Solid	Total BTEX	

QC Association Summary

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

GC VOA (Continued)

Analysis Batch: 59238 (Continued)

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
880-31305-12	AH-16 @ 2 ft	Total/NA	Solid	Total BTEX	
880-31305-13	AH-16 @ 3 ft	Total/NA	Solid	Total BTEX	
880-31305-14	AH-17 @ 1 ft	Total/NA	Solid	Total BTEX	
880-31305-15	AH-17 @ 2 ft	Total/NA	Solid	Total BTEX	
880-31305-16	AH-17 @ 3 ft	Total/NA	Solid	Total BTEX	
880-31305-17	AH-17 @ 4 ft	Total/NA	Solid	Total BTEX	
880-31305-18	AH-18 @ 1 ft	Total/NA	Solid	Total BTEX	
880-31305-19	AH-18 @ 2 ft	Total/NA	Solid	Total BTEX	
880-31305-20	AH-18 @ 3 ft	Total/NA	Solid	Total BTEX	
880-31305-21	AH-19 @ 1 ft	Total/NA	Solid	Total BTEX	
880-31305-22	AH-19 @ 2 ft	Total/NA	Solid	Total BTEX	
880-31305-23	AH-19 @ 3 ft	Total/NA	Solid	Total BTEX	
880-31305-24	AH-19 @ 4 ft	Total/NA	Solid	Total BTEX	
880-31305-25	AH-5 @ 2 ft	Total/NA	Solid	Total BTEX	
880-31305-26	AH-8 @ 2 ft	Total/NA	Solid	Total BTEX	
880-31305-27	AH-3 @ 1 ft	Total/NA	Solid	Total BTEX	
880-31305-28	AH-1 @ 2 ft	Total/NA	Solid	Total BTEX	
880-31305-29	AH-2 @ 4 ft	Total/NA	Solid	Total BTEX	
880-31305-30	AH-2 @ 1 ft	Total/NA	Solid	Total BTEX	
880-31305-31	AH-3 @ 3 ft	Total/NA	Solid	Total BTEX	
880-31305-32	AH-5 @ 1 ft	Total/NA	Solid	Total BTEX	
880-31305-33	AH-4 @ 4 ft	Total/NA	Solid	Total BTEX	
880-31305-34	AH-3 @ 4 ft	Total/NA	Solid	Total BTEX	
880-31305-35	AH-2 @ 3 ft	Total/NA	Solid	Total BTEX	
880-31305-36	AH-4 @ 2 ft	Total/NA	Solid	Total BTEX	
880-31305-37	AH-4 @ 3 ft	Total/NA	Solid	Total BTEX	
880-31305-38	AH-1 @ 1 ft	Total/NA	Solid	Total BTEX	
880-31305-39	AH-3 @ 2 ft	Total/NA	Solid	Total BTEX	
880-31305-40	AH-2 @ 2 ft	Total/NA	Solid	Total BTEX	
880-31305-41	AH-4 @ 1 ft	Total/NA	Solid	Total BTEX	
880-31305-42	AH-1 @ 4 ft	Total/NA	Solid	Total BTEX	
880-31305-43	AH-1 @ 3 ft	Total/NA	Solid	Total BTEX	
880-31305-44	AH-7 @ 1 ft	Total/NA	Solid	Total BTEX	
880-31305-45	AH-7 @ 2 ft	Total/NA	Solid	Total BTEX	
880-31305-46	AH-8 @ 2 ft	Total/NA	Solid	Total BTEX	
880-31305-47	AH-10 @ 2 ft	Total/NA	Solid	Total BTEX	
880-31305-48	AH-7 @ 3 ft	Total/NA	Solid	Total BTEX	
880-31305-49	AH-8 @ 1 ft	Total/NA	Solid	Total BTEX	
880-31305-50	AH-10 @ 1 ft	Total/NA	Solid	Total BTEX	
880-31305-51	AH-9 @ 2 ft	Total/NA	Solid	Total BTEX	

Analysis Batch: 59294

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
880-31305-1	AH-12 @ 1 ft	Total/NA	Solid	8021B	59348
880-31305-2	AH-14 @ 2 ft	Total/NA	Solid	8021B	59348
880-31305-3	AH-15 @ 20 in	Total/NA	Solid	8021B	59348
880-31305-4	AH-16 @ 4 ft	Total/NA	Solid	8021B	59348
880-31305-5	AH-13 @ 1 ft	Total/NA	Solid	8021B	59348
880-31305-6	AH-13 @ 2 ft	Total/NA	Solid	8021B	59348
880-31305-7	AH-14 @ 1 ft	Total/NA	Solid	8021B	59348
880-31305-8	AH-14 @ 3 ft	Total/NA	Solid	8021B	59348

QC Association Summary

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

GC VOA (Continued)

Analysis Batch: 59294 (Continued)

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
880-31305-9	AH-14 @ 4 ft	Total/NA	Solid	8021B	59348
880-31305-10	AH-15 @ 1 ft	Total/NA	Solid	8021B	59348
880-31305-11	AH-16 @ 1 ft	Total/NA	Solid	8021B	59348
880-31305-12	AH-16 @ 2 ft	Total/NA	Solid	8021B	59348
880-31305-13	AH-16 @ 3 ft	Total/NA	Solid	8021B	59348
880-31305-14	AH-17 @ 1 ft	Total/NA	Solid	8021B	59348
880-31305-15	AH-17 @ 2 ft	Total/NA	Solid	8021B	59348
880-31305-16	AH-17 @ 3 ft	Total/NA	Solid	8021B	59348
880-31305-17	AH-17 @ 4 ft	Total/NA	Solid	8021B	59348
880-31305-18	AH-18 @ 1 ft	Total/NA	Solid	8021B	59348
880-31305-19	AH-18 @ 2 ft	Total/NA	Solid	8021B	59348
880-31305-20	AH-18 @ 3 ft	Total/NA	Solid	8021B	59348
MB 880-59344/5-A	Method Blank	Total/NA	Solid	8021B	59344
MB 880-59348/5-A	Method Blank	Total/NA	Solid	8021B	59348
LCS 880-59348/1-A	Lab Control Sample	Total/NA	Solid	8021B	59348
LCSD 880-59348/2-A	Lab Control Sample Dup	Total/NA	Solid	8021B	59348
880-31305-1 MS	AH-12 @ 1 ft	Total/NA	Solid	8021B	59348
880-31305-1 MSD	AH-12 @ 1 ft	Total/NA	Solid	8021B	59348

Analysis Batch: 59296

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
880-31305-21	AH-19 @ 1 ft	Total/NA	Solid	8021B	59350
880-31305-22	AH-19 @ 2 ft	Total/NA	Solid	8021B	59350
880-31305-23	AH-19 @ 3 ft	Total/NA	Solid	8021B	59350
880-31305-24	AH-19 @ 4 ft	Total/NA	Solid	8021B	59350
MB 880-59346/5-A	Method Blank	Total/NA	Solid	8021B	59346
MB 880-59350/5-A	Method Blank	Total/NA	Solid	8021B	59350
LCS 880-59350/1-A	Lab Control Sample	Total/NA	Solid	8021B	59350
LCSD 880-59350/2-A	Lab Control Sample Dup	Total/NA	Solid	8021B	59350
880-31305-21 MS	AH-19 @ 1 ft	Total/NA	Solid	8021B	59350
880-31305-21 MSD	AH-19 @ 1 ft	Total/NA	Solid	8021B	59350

Prep Batch: 59344

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
MB 880-59344/5-A	Method Blank	Total/NA	Solid	5035	

Prep Batch: 59346

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
MB 880-59346/5-A	Method Blank	Total/NA	Solid	5035	

Prep Batch: 59348

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
880-31305-1	AH-12 @ 1 ft	Total/NA	Solid	5035	
880-31305-2	AH-14 @ 2 ft	Total/NA	Solid	5035	
880-31305-3	AH-15 @ 20 in	Total/NA	Solid	5035	
880-31305-4	AH-16 @ 4 ft	Total/NA	Solid	5035	
880-31305-5	AH-13 @ 1 ft	Total/NA	Solid	5035	
880-31305-6	AH-13 @ 2 ft	Total/NA	Solid	5035	
880-31305-7	AH-14 @ 1 ft	Total/NA	Solid	5035	
880-31305-8	AH-14 @ 3 ft	Total/NA	Solid	5035	
880-31305-9	AH-14 @ 4 ft	Total/NA	Solid	5035	

QC Association Summary

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

GC VOA (Continued)

Prep Batch: 59348 (Continued)

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
880-31305-10	AH-15 @ 1 ft	Total/NA	Solid	5035	
880-31305-11	AH-16 @ 1 ft	Total/NA	Solid	5035	
880-31305-12	AH-16 @ 2 ft	Total/NA	Solid	5035	
880-31305-13	AH-16 @ 3 ft	Total/NA	Solid	5035	
880-31305-14	AH-17 @ 1 ft	Total/NA	Solid	5035	
880-31305-15	AH-17 @ 2 ft	Total/NA	Solid	5035	
880-31305-16	AH-17 @ 3 ft	Total/NA	Solid	5035	
880-31305-17	AH-17 @ 4 ft	Total/NA	Solid	5035	
880-31305-18	AH-18 @ 1 ft	Total/NA	Solid	5035	
880-31305-19	AH-18 @ 2 ft	Total/NA	Solid	5035	
880-31305-20	AH-18 @ 3 ft	Total/NA	Solid	5035	
MB 880-59348/5-A	Method Blank	Total/NA	Solid	5035	
LCS 880-59348/1-A	Lab Control Sample	Total/NA	Solid	5035	
LCSD 880-59348/2-A	Lab Control Sample Dup	Total/NA	Solid	5035	
880-31305-1 MS	AH-12 @ 1 ft	Total/NA	Solid	5035	
880-31305-1 MSD	AH-12 @ 1 ft	Total/NA	Solid	5035	

Prep Batch: 59350

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
880-31305-21	AH-19 @ 1 ft	Total/NA	Solid	5035	
880-31305-22	AH-19 @ 2 ft	Total/NA	Solid	5035	
880-31305-23	AH-19 @ 3 ft	Total/NA	Solid	5035	
880-31305-24	AH-19 @ 4 ft	Total/NA	Solid	5035	
MB 880-59350/5-A	Method Blank	Total/NA	Solid	5035	
LCS 880-59350/1-A	Lab Control Sample	Total/NA	Solid	5035	
LCSD 880-59350/2-A	Lab Control Sample Dup	Total/NA	Solid	5035	
880-31305-21 MS	AH-19 @ 1 ft	Total/NA	Solid	5035	
880-31305-21 MSD	AH-19 @ 1 ft	Total/NA	Solid	5035	

GC Semi VOA

Prep Batch: 59198

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
880-31305-1	AH-12 @ 1 ft	Total/NA	Solid	8015NM Prep	
880-31305-2	AH-14 @ 2 ft	Total/NA	Solid	8015NM Prep	
880-31305-3	AH-15 @ 20 in	Total/NA	Solid	8015NM Prep	
880-31305-4	AH-16 @ 4 ft	Total/NA	Solid	8015NM Prep	
880-31305-5	AH-13 @ 1 ft	Total/NA	Solid	8015NM Prep	
880-31305-6	AH-13 @ 2 ft	Total/NA	Solid	8015NM Prep	
880-31305-7	AH-14 @ 1 ft	Total/NA	Solid	8015NM Prep	
880-31305-8	AH-14 @ 3 ft	Total/NA	Solid	8015NM Prep	
880-31305-9	AH-14 @ 4 ft	Total/NA	Solid	8015NM Prep	
880-31305-10	AH-15 @ 1 ft	Total/NA	Solid	8015NM Prep	
880-31305-11	AH-16 @ 1 ft	Total/NA	Solid	8015NM Prep	
880-31305-12	AH-16 @ 2 ft	Total/NA	Solid	8015NM Prep	
880-31305-13	AH-16 @ 3 ft	Total/NA	Solid	8015NM Prep	
880-31305-14	AH-17 @ 1 ft	Total/NA	Solid	8015NM Prep	
MB 880-59198/1-A	Method Blank	Total/NA	Solid	8015NM Prep	
LCS 880-59198/2-A	Lab Control Sample	Total/NA	Solid	8015NM Prep	
LCSD 880-59198/3-A	Lab Control Sample Dup	Total/NA	Solid	8015NM Prep	
880-31082-A-26-D MS	Matrix Spike	Total/NA	Solid	8015NM Prep	

QC Association Summary

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

GC Semi VOA (Continued)

Prep Batch: 59198 (Continued)

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
880-31082-A-26-E MSD	Matrix Spike Duplicate	Total/NA	Solid	8015NM Prep	

Prep Batch: 59215

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
880-31305-15	AH-17 @ 2 ft	Total/NA	Solid	8015NM Prep	
880-31305-16	AH-17 @ 3 ft	Total/NA	Solid	8015NM Prep	
880-31305-17	AH-17 @ 4 ft	Total/NA	Solid	8015NM Prep	
880-31305-18	AH-18 @ 1 ft	Total/NA	Solid	8015NM Prep	
880-31305-19	AH-18 @ 2 ft	Total/NA	Solid	8015NM Prep	
880-31305-20	AH-18 @ 3 ft	Total/NA	Solid	8015NM Prep	
880-31305-21	AH-19 @ 1 ft	Total/NA	Solid	8015NM Prep	
880-31305-22	AH-19 @ 2 ft	Total/NA	Solid	8015NM Prep	
880-31305-23	AH-19 @ 3 ft	Total/NA	Solid	8015NM Prep	
880-31305-24	AH-19 @ 4 ft	Total/NA	Solid	8015NM Prep	
880-31305-25	AH-5 @ 2 ft	Total/NA	Solid	8015NM Prep	
880-31305-26	AH-8 @ 2 ft	Total/NA	Solid	8015NM Prep	
880-31305-27	AH-3 @ 1 ft	Total/NA	Solid	8015NM Prep	
880-31305-28	AH-1 @ 2 ft	Total/NA	Solid	8015NM Prep	
880-31305-29	AH-2 @ 4 ft	Total/NA	Solid	8015NM Prep	
880-31305-30	AH-2 @ 1 ft	Total/NA	Solid	8015NM Prep	
880-31305-31	AH-3 @ 3 ft	Total/NA	Solid	8015NM Prep	
880-31305-32	AH-5 @ 1 ft	Total/NA	Solid	8015NM Prep	
880-31305-33	AH-4 @ 4 ft	Total/NA	Solid	8015NM Prep	
880-31305-34	AH-3 @ 4 ft	Total/NA	Solid	8015NM Prep	
MB 880-59215/1-A	Method Blank	Total/NA	Solid	8015NM Prep	
LCS 880-59215/2-A	Lab Control Sample	Total/NA	Solid	8015NM Prep	
LCSD 880-59215/3-A	Lab Control Sample Dup	Total/NA	Solid	8015NM Prep	
880-31305-15 MS	AH-17 @ 2 ft	Total/NA	Solid	8015NM Prep	
880-31305-15 MSD	AH-17 @ 2 ft	Total/NA	Solid	8015NM Prep	

Prep Batch: 59216

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
880-31305-35	AH-2 @ 3 ft	Total/NA	Solid	8015NM Prep	
880-31305-36	AH-4 @ 2 ft	Total/NA	Solid	8015NM Prep	
880-31305-37	AH-4 @ 3 ft	Total/NA	Solid	8015NM Prep	
880-31305-38	AH-1 @ 1 ft	Total/NA	Solid	8015NM Prep	
880-31305-39	AH-3 @ 2 ft	Total/NA	Solid	8015NM Prep	
880-31305-40	AH-2 @ 2 ft	Total/NA	Solid	8015NM Prep	
880-31305-41	AH-4 @ 1 ft	Total/NA	Solid	8015NM Prep	
880-31305-42	AH-1 @ 4 ft	Total/NA	Solid	8015NM Prep	
880-31305-43	AH-1 @ 3 ft	Total/NA	Solid	8015NM Prep	
880-31305-44	AH-7 @ 1 ft	Total/NA	Solid	8015NM Prep	
880-31305-45	AH-7 @ 2 ft	Total/NA	Solid	8015NM Prep	
880-31305-46	AH-8 @ 2 ft	Total/NA	Solid	8015NM Prep	
880-31305-47	AH-10 @ 2 ft	Total/NA	Solid	8015NM Prep	
880-31305-48	AH-7 @ 3 ft	Total/NA	Solid	8015NM Prep	
880-31305-49	AH-8 @ 1 ft	Total/NA	Solid	8015NM Prep	
880-31305-50	AH-10 @ 1 ft	Total/NA	Solid	8015NM Prep	
880-31305-51	AH-9 @ 2 ft	Total/NA	Solid	8015NM Prep	
MB 880-59216/1-A	Method Blank	Total/NA	Solid	8015NM Prep	
LCS 880-59216/2-A	Lab Control Sample	Total/NA	Solid	8015NM Prep	

QC Association Summary

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

GC Semi VOA (Continued)

Prep Batch: 59216 (Continued)

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
LCSD 880-59216/3-A	Lab Control Sample Dup	Total/NA	Solid	8015NM Prep	
880-31305-35 MS	AH-2 @ 3 ft	Total/NA	Solid	8015NM Prep	
880-31305-35 MSD	AH-2 @ 3 ft	Total/NA	Solid	8015NM Prep	

Analysis Batch: 59390

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
880-31305-1	AH-12 @ 1 ft	Total/NA	Solid	8015B NM	59198
880-31305-2	AH-14 @ 2 ft	Total/NA	Solid	8015B NM	59198
880-31305-3	AH-15 @ 20 in	Total/NA	Solid	8015B NM	59198
880-31305-4	AH-16 @ 4 ft	Total/NA	Solid	8015B NM	59198
880-31305-5	AH-13 @ 1 ft	Total/NA	Solid	8015B NM	59198
880-31305-6	AH-13 @ 2 ft	Total/NA	Solid	8015B NM	59198
880-31305-7	AH-14 @ 1 ft	Total/NA	Solid	8015B NM	59198
880-31305-8	AH-14 @ 3 ft	Total/NA	Solid	8015B NM	59198
880-31305-9	AH-14 @ 4 ft	Total/NA	Solid	8015B NM	59198
880-31305-10	AH-15 @ 1 ft	Total/NA	Solid	8015B NM	59198
880-31305-11	AH-16 @ 1 ft	Total/NA	Solid	8015B NM	59198
880-31305-12	AH-16 @ 2 ft	Total/NA	Solid	8015B NM	59198
880-31305-13	AH-16 @ 3 ft	Total/NA	Solid	8015B NM	59198
880-31305-14	AH-17 @ 1 ft	Total/NA	Solid	8015B NM	59198
MB 880-59198/1-A	Method Blank	Total/NA	Solid	8015B NM	59198
LCS 880-59198/2-A	Lab Control Sample	Total/NA	Solid	8015B NM	59198
LCSD 880-59198/3-A	Lab Control Sample Dup	Total/NA	Solid	8015B NM	59198
880-31082-A-26-D MS	Matrix Spike	Total/NA	Solid	8015B NM	59198
880-31082-A-26-E MSD	Matrix Spike Duplicate	Total/NA	Solid	8015B NM	59198

Analysis Batch: 59411

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
880-31305-35	AH-2 @ 3 ft	Total/NA	Solid	8015B NM	59216
880-31305-36	AH-4 @ 2 ft	Total/NA	Solid	8015B NM	59216
880-31305-37	AH-4 @ 3 ft	Total/NA	Solid	8015B NM	59216
880-31305-38	AH-1 @ 1 ft	Total/NA	Solid	8015B NM	59216
880-31305-39	AH-3 @ 2 ft	Total/NA	Solid	8015B NM	59216
880-31305-40	AH-2 @ 2 ft	Total/NA	Solid	8015B NM	59216
880-31305-41	AH-4 @ 1 ft	Total/NA	Solid	8015B NM	59216
880-31305-42	AH-1 @ 4 ft	Total/NA	Solid	8015B NM	59216
880-31305-43	AH-1 @ 3 ft	Total/NA	Solid	8015B NM	59216
880-31305-44	AH-7 @ 1 ft	Total/NA	Solid	8015B NM	59216
880-31305-45	AH-7 @ 2 ft	Total/NA	Solid	8015B NM	59216
880-31305-46	AH-8 @ 2 ft	Total/NA	Solid	8015B NM	59216
880-31305-47	AH-10 @ 2 ft	Total/NA	Solid	8015B NM	59216
880-31305-48	AH-7 @ 3 ft	Total/NA	Solid	8015B NM	59216
880-31305-49	AH-8 @ 1 ft	Total/NA	Solid	8015B NM	59216
880-31305-50	AH-10 @ 1 ft	Total/NA	Solid	8015B NM	59216
880-31305-51	AH-9 @ 2 ft	Total/NA	Solid	8015B NM	59216
MB 880-59216/1-A	Method Blank	Total/NA	Solid	8015B NM	59216
LCS 880-59216/2-A	Lab Control Sample	Total/NA	Solid	8015B NM	59216
LCSD 880-59216/3-A	Lab Control Sample Dup	Total/NA	Solid	8015B NM	59216
880-31305-35 MS	AH-2 @ 3 ft	Total/NA	Solid	8015B NM	59216
880-31305-35 MSD	AH-2 @ 3 ft	Total/NA	Solid	8015B NM	59216

QC Association Summary

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

GC Semi VOA

Analysis Batch: 59413

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
880-31305-15	AH-17 @ 2 ft	Total/NA	Solid	8015B NM	59215
880-31305-16	AH-17 @ 3 ft	Total/NA	Solid	8015B NM	59215
880-31305-17	AH-17 @ 4 ft	Total/NA	Solid	8015B NM	59215
880-31305-18	AH-18 @ 1 ft	Total/NA	Solid	8015B NM	59215
880-31305-19	AH-18 @ 2 ft	Total/NA	Solid	8015B NM	59215
880-31305-20	AH-18 @ 3 ft	Total/NA	Solid	8015B NM	59215
880-31305-21	AH-19 @ 1 ft	Total/NA	Solid	8015B NM	59215
880-31305-22	AH-19 @ 2 ft	Total/NA	Solid	8015B NM	59215
880-31305-23	AH-19 @ 3 ft	Total/NA	Solid	8015B NM	59215
880-31305-24	AH-19 @ 4 ft	Total/NA	Solid	8015B NM	59215
880-31305-25	AH-5 @ 2 ft	Total/NA	Solid	8015B NM	59215
880-31305-26	AH-8 @ 2 ft	Total/NA	Solid	8015B NM	59215
880-31305-27	AH-3 @ 1 ft	Total/NA	Solid	8015B NM	59215
880-31305-28	AH-1 @ 2 ft	Total/NA	Solid	8015B NM	59215
880-31305-29	AH-2 @ 4 ft	Total/NA	Solid	8015B NM	59215
880-31305-30	AH-2 @ 1 ft	Total/NA	Solid	8015B NM	59215
880-31305-31	AH-3 @ 3 ft	Total/NA	Solid	8015B NM	59215
880-31305-32	AH-5 @ 1 ft	Total/NA	Solid	8015B NM	59215
880-31305-33	AH-4 @ 4 ft	Total/NA	Solid	8015B NM	59215
880-31305-34	AH-3 @ 4 ft	Total/NA	Solid	8015B NM	59215
MB 880-59215/1-A	Method Blank	Total/NA	Solid	8015B NM	59215
LCS 880-59215/2-A	Lab Control Sample	Total/NA	Solid	8015B NM	59215
LCSD 880-59215/3-A	Lab Control Sample Dup	Total/NA	Solid	8015B NM	59215
880-31305-15 MS	AH-17 @ 2 ft	Total/NA	Solid	8015B NM	59215
880-31305-15 MSD	AH-17 @ 2 ft	Total/NA	Solid	8015B NM	59215

Analysis Batch: 59541

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
880-31305-1	AH-12 @ 1 ft	Total/NA	Solid	8015 NM	
880-31305-2	AH-14 @ 2 ft	Total/NA	Solid	8015 NM	
880-31305-3	AH-15 @ 20 in	Total/NA	Solid	8015 NM	
880-31305-4	AH-16 @ 4 ft	Total/NA	Solid	8015 NM	
880-31305-5	AH-13 @ 1 ft	Total/NA	Solid	8015 NM	
880-31305-6	AH-13 @ 2 ft	Total/NA	Solid	8015 NM	
880-31305-7	AH-14 @ 1 ft	Total/NA	Solid	8015 NM	
880-31305-8	AH-14 @ 3 ft	Total/NA	Solid	8015 NM	
880-31305-9	AH-14 @ 4 ft	Total/NA	Solid	8015 NM	
880-31305-10	AH-15 @ 1 ft	Total/NA	Solid	8015 NM	
880-31305-11	AH-16 @ 1 ft	Total/NA	Solid	8015 NM	
880-31305-12	AH-16 @ 2 ft	Total/NA	Solid	8015 NM	
880-31305-13	AH-16 @ 3 ft	Total/NA	Solid	8015 NM	
880-31305-14	AH-17 @ 1 ft	Total/NA	Solid	8015 NM	
880-31305-15	AH-17 @ 2 ft	Total/NA	Solid	8015 NM	
880-31305-16	AH-17 @ 3 ft	Total/NA	Solid	8015 NM	
880-31305-17	AH-17 @ 4 ft	Total/NA	Solid	8015 NM	
880-31305-18	AH-18 @ 1 ft	Total/NA	Solid	8015 NM	
880-31305-19	AH-18 @ 2 ft	Total/NA	Solid	8015 NM	
880-31305-20	AH-18 @ 3 ft	Total/NA	Solid	8015 NM	
880-31305-21	AH-19 @ 1 ft	Total/NA	Solid	8015 NM	
880-31305-22	AH-19 @ 2 ft	Total/NA	Solid	8015 NM	
880-31305-23	AH-19 @ 3 ft	Total/NA	Solid	8015 NM	

QC Association Summary

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

GC Semi VOA (Continued)

Analysis Batch: 59541 (Continued)

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
880-31305-24	AH-19 @ 4 ft	Total/NA	Solid	8015 NM	
880-31305-25	AH-5 @ 2 ft	Total/NA	Solid	8015 NM	
880-31305-26	AH-8 @ 2 ft	Total/NA	Solid	8015 NM	
880-31305-27	AH-3 @ 1 ft	Total/NA	Solid	8015 NM	
880-31305-28	AH-1 @ 2 ft	Total/NA	Solid	8015 NM	
880-31305-29	AH-2 @ 4 ft	Total/NA	Solid	8015 NM	
880-31305-30	AH-2 @ 1 ft	Total/NA	Solid	8015 NM	
880-31305-31	AH-3 @ 3 ft	Total/NA	Solid	8015 NM	
880-31305-32	AH-5 @ 1 ft	Total/NA	Solid	8015 NM	
880-31305-33	AH-4 @ 4 ft	Total/NA	Solid	8015 NM	
880-31305-34	AH-3 @ 4 ft	Total/NA	Solid	8015 NM	
880-31305-35	AH-2 @ 3 ft	Total/NA	Solid	8015 NM	
880-31305-36	AH-4 @ 2 ft	Total/NA	Solid	8015 NM	
880-31305-37	AH-4 @ 3 ft	Total/NA	Solid	8015 NM	
880-31305-38	AH-1 @ 1 ft	Total/NA	Solid	8015 NM	
880-31305-39	AH-3 @ 2 ft	Total/NA	Solid	8015 NM	
880-31305-40	AH-2 @ 2 ft	Total/NA	Solid	8015 NM	
880-31305-41	AH-4 @ 1 ft	Total/NA	Solid	8015 NM	
880-31305-42	AH-1 @ 4 ft	Total/NA	Solid	8015 NM	
880-31305-43	AH-1 @ 3 ft	Total/NA	Solid	8015 NM	
880-31305-44	AH-7 @ 1 ft	Total/NA	Solid	8015 NM	
880-31305-45	AH-7 @ 2 ft	Total/NA	Solid	8015 NM	
880-31305-46	AH-8 @ 2 ft	Total/NA	Solid	8015 NM	
880-31305-47	AH-10 @ 2 ft	Total/NA	Solid	8015 NM	
880-31305-48	AH-7 @ 3 ft	Total/NA	Solid	8015 NM	
880-31305-49	AH-8 @ 1 ft	Total/NA	Solid	8015 NM	
880-31305-50	AH-10 @ 1 ft	Total/NA	Solid	8015 NM	
880-31305-51	AH-9 @ 2 ft	Total/NA	Solid	8015 NM	

HPLC/IC

Leach Batch: 58708

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
880-31305-1	AH-12 @ 1 ft	Soluble	Solid	DI Leach	
880-31305-2	AH-14 @ 2 ft	Soluble	Solid	DI Leach	
880-31305-3	AH-15 @ 20 in	Soluble	Solid	DI Leach	
880-31305-4	AH-16 @ 4 ft	Soluble	Solid	DI Leach	
880-31305-5	AH-13 @ 1 ft	Soluble	Solid	DI Leach	
880-31305-6	AH-13 @ 2 ft	Soluble	Solid	DI Leach	
880-31305-7	AH-14 @ 1 ft	Soluble	Solid	DI Leach	
880-31305-8	AH-14 @ 3 ft	Soluble	Solid	DI Leach	
880-31305-9	AH-14 @ 4 ft	Soluble	Solid	DI Leach	
880-31305-10	AH-15 @ 1 ft	Soluble	Solid	DI Leach	
880-31305-11	AH-16 @ 1 ft	Soluble	Solid	DI Leach	
880-31305-12	AH-16 @ 2 ft	Soluble	Solid	DI Leach	
880-31305-13	AH-16 @ 3 ft	Soluble	Solid	DI Leach	
880-31305-14	AH-17 @ 1 ft	Soluble	Solid	DI Leach	
880-31305-15	AH-17 @ 2 ft	Soluble	Solid	DI Leach	
880-31305-16	AH-17 @ 3 ft	Soluble	Solid	DI Leach	
MB 880-58708/1-A	Method Blank	Soluble	Solid	DI Leach	
LCS 880-58708/2-A	Lab Control Sample	Soluble	Solid	DI Leach	

QC Association Summary

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

HPLC/IC (Continued)

Leach Batch: 58708 (Continued)

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
LCSD 880-58708/3-A	Lab Control Sample Dup	Soluble	Solid	DI Leach	
880-31305-7 MS	AH-14 @ 1 ft	Soluble	Solid	DI Leach	
880-31305-7 MSD	AH-14 @ 1 ft	Soluble	Solid	DI Leach	

Leach Batch: 58709

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
880-31305-17	AH-17 @ 4 ft	Soluble	Solid	DI Leach	
880-31305-18	AH-18 @ 1 ft	Soluble	Solid	DI Leach	
880-31305-19	AH-18 @ 2 ft	Soluble	Solid	DI Leach	
880-31305-20	AH-18 @ 3 ft	Soluble	Solid	DI Leach	
880-31305-21	AH-19 @ 1 ft	Soluble	Solid	DI Leach	
880-31305-22	AH-19 @ 2 ft	Soluble	Solid	DI Leach	
880-31305-23	AH-19 @ 3 ft	Soluble	Solid	DI Leach	
880-31305-24	AH-19 @ 4 ft	Soluble	Solid	DI Leach	
880-31305-25	AH-5 @ 2 ft	Soluble	Solid	DI Leach	
880-31305-26	AH-8 @ 2 ft	Soluble	Solid	DI Leach	
880-31305-27	AH-3 @ 1 ft	Soluble	Solid	DI Leach	
880-31305-28	AH-1 @ 2 ft	Soluble	Solid	DI Leach	
880-31305-29	AH-2 @ 4 ft	Soluble	Solid	DI Leach	
880-31305-30	AH-2 @ 1 ft	Soluble	Solid	DI Leach	
880-31305-31	AH-3 @ 3 ft	Soluble	Solid	DI Leach	
880-31305-32	AH-5 @ 1 ft	Soluble	Solid	DI Leach	
880-31305-33	AH-4 @ 4 ft	Soluble	Solid	DI Leach	
880-31305-34	AH-3 @ 4 ft	Soluble	Solid	DI Leach	
880-31305-35	AH-2 @ 3 ft	Soluble	Solid	DI Leach	
880-31305-36	AH-4 @ 2 ft	Soluble	Solid	DI Leach	
MB 880-58709/1-A	Method Blank	Soluble	Solid	DI Leach	
LCS 880-58709/2-A	Lab Control Sample	Soluble	Solid	DI Leach	
LCSD 880-58709/3-A	Lab Control Sample Dup	Soluble	Solid	DI Leach	
880-31305-17 MS	AH-17 @ 4 ft	Soluble	Solid	DI Leach	
880-31305-17 MSD	AH-17 @ 4 ft	Soluble	Solid	DI Leach	
880-31305-27 MS	AH-3 @ 1 ft	Soluble	Solid	DI Leach	
880-31305-27 MSD	AH-3 @ 1 ft	Soluble	Solid	DI Leach	

Leach Batch: 58710

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
880-31305-37	AH-4 @ 3 ft	Soluble	Solid	DI Leach	
880-31305-38	AH-1 @ 1 ft	Soluble	Solid	DI Leach	
880-31305-39	AH-3 @ 2 ft	Soluble	Solid	DI Leach	
880-31305-40	AH-2 @ 2 ft	Soluble	Solid	DI Leach	
880-31305-41	AH-4 @ 1 ft	Soluble	Solid	DI Leach	
880-31305-42	AH-1 @ 4 ft	Soluble	Solid	DI Leach	
880-31305-43	AH-1 @ 3 ft	Soluble	Solid	DI Leach	
880-31305-44	AH-7 @ 1 ft	Soluble	Solid	DI Leach	
880-31305-45	AH-7 @ 2 ft	Soluble	Solid	DI Leach	
880-31305-46	AH-8 @ 2 ft	Soluble	Solid	DI Leach	
880-31305-47	AH-10 @ 2 ft	Soluble	Solid	DI Leach	
880-31305-48	AH-7 @ 3 ft	Soluble	Solid	DI Leach	
880-31305-49	AH-8 @ 1 ft	Soluble	Solid	DI Leach	
880-31305-50	AH-10 @ 1 ft	Soluble	Solid	DI Leach	
880-31305-51	AH-9 @ 2 ft	Soluble	Solid	DI Leach	

QC Association Summary

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

HPLC/IC (Continued)

Leach Batch: 58710 (Continued)

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
MB 880-58710/1-A	Method Blank	Soluble	Solid	DI Leach	
LCS 880-58710/2-A	Lab Control Sample	Soluble	Solid	DI Leach	
LCSD 880-58710/3-A	Lab Control Sample Dup	Soluble	Solid	DI Leach	
880-31305-37 MS	AH-4 @ 3 ft	Soluble	Solid	DI Leach	
880-31305-37 MSD	AH-4 @ 3 ft	Soluble	Solid	DI Leach	
880-31305-47 MS	AH-10 @ 2 ft	Soluble	Solid	DI Leach	
880-31305-47 MSD	AH-10 @ 2 ft	Soluble	Solid	DI Leach	

Analysis Batch: 58855

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
880-31305-37	AH-4 @ 3 ft	Soluble	Solid	300.0	58710
880-31305-38	AH-1 @ 1 ft	Soluble	Solid	300.0	58710
880-31305-39	AH-3 @ 2 ft	Soluble	Solid	300.0	58710
880-31305-40	AH-2 @ 2 ft	Soluble	Solid	300.0	58710
880-31305-41	AH-4 @ 1 ft	Soluble	Solid	300.0	58710
880-31305-42	AH-1 @ 4 ft	Soluble	Solid	300.0	58710
880-31305-43	AH-1 @ 3 ft	Soluble	Solid	300.0	58710
880-31305-44	AH-7 @ 1 ft	Soluble	Solid	300.0	58710
880-31305-45	AH-7 @ 2 ft	Soluble	Solid	300.0	58710
880-31305-46	AH-8 @ 2 ft	Soluble	Solid	300.0	58710
880-31305-47	AH-10 @ 2 ft	Soluble	Solid	300.0	58710
880-31305-48	AH-7 @ 3 ft	Soluble	Solid	300.0	58710
880-31305-49	AH-8 @ 1 ft	Soluble	Solid	300.0	58710
880-31305-50	AH-10 @ 1 ft	Soluble	Solid	300.0	58710
880-31305-51	AH-9 @ 2 ft	Soluble	Solid	300.0	58710
MB 880-58710/1-A	Method Blank	Soluble	Solid	300.0	58710
LCS 880-58710/2-A	Lab Control Sample	Soluble	Solid	300.0	58710
LCSD 880-58710/3-A	Lab Control Sample Dup	Soluble	Solid	300.0	58710
880-31305-37 MS	AH-4 @ 3 ft	Soluble	Solid	300.0	58710
880-31305-37 MSD	AH-4 @ 3 ft	Soluble	Solid	300.0	58710
880-31305-47 MS	AH-10 @ 2 ft	Soluble	Solid	300.0	58710
880-31305-47 MSD	AH-10 @ 2 ft	Soluble	Solid	300.0	58710

Analysis Batch: 58858

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
880-31305-1	AH-12 @ 1 ft	Soluble	Solid	300.0	58708
880-31305-2	AH-14 @ 2 ft	Soluble	Solid	300.0	58708
880-31305-3	AH-15 @ 20 in	Soluble	Solid	300.0	58708
880-31305-4	AH-16 @ 4 ft	Soluble	Solid	300.0	58708
880-31305-5	AH-13 @ 1 ft	Soluble	Solid	300.0	58708
880-31305-6	AH-13 @ 2 ft	Soluble	Solid	300.0	58708
880-31305-7	AH-14 @ 1 ft	Soluble	Solid	300.0	58708
880-31305-8	AH-14 @ 3 ft	Soluble	Solid	300.0	58708
880-31305-9	AH-14 @ 4 ft	Soluble	Solid	300.0	58708
880-31305-10	AH-15 @ 1 ft	Soluble	Solid	300.0	58708
880-31305-11	AH-16 @ 1 ft	Soluble	Solid	300.0	58708
880-31305-12	AH-16 @ 2 ft	Soluble	Solid	300.0	58708
880-31305-13	AH-16 @ 3 ft	Soluble	Solid	300.0	58708
880-31305-14	AH-17 @ 1 ft	Soluble	Solid	300.0	58708
880-31305-15	AH-17 @ 2 ft	Soluble	Solid	300.0	58708
880-31305-16	AH-17 @ 3 ft	Soluble	Solid	300.0	58708

QC Association Summary

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

HPLC/IC (Continued)

Analysis Batch: 58858 (Continued)

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
MB 880-58708/1-A	Method Blank	Soluble	Solid	300.0	58708
LCS 880-58708/2-A	Lab Control Sample	Soluble	Solid	300.0	58708
LCSD 880-58708/3-A	Lab Control Sample Dup	Soluble	Solid	300.0	58708
880-31305-7 MS	AH-14 @ 1 ft	Soluble	Solid	300.0	58708
880-31305-7 MSD	AH-14 @ 1 ft	Soluble	Solid	300.0	58708

Analysis Batch: 58859

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
880-31305-17	AH-17 @ 4 ft	Soluble	Solid	300.0	58709
880-31305-18	AH-18 @ 1 ft	Soluble	Solid	300.0	58709
880-31305-19	AH-18 @ 2 ft	Soluble	Solid	300.0	58709
880-31305-20	AH-18 @ 3 ft	Soluble	Solid	300.0	58709
880-31305-21	AH-19 @ 1 ft	Soluble	Solid	300.0	58709
880-31305-22	AH-19 @ 2 ft	Soluble	Solid	300.0	58709
880-31305-23	AH-19 @ 3 ft	Soluble	Solid	300.0	58709
880-31305-24	AH-19 @ 4 ft	Soluble	Solid	300.0	58709
880-31305-25	AH-5 @ 2 ft	Soluble	Solid	300.0	58709
880-31305-26	AH-8 @ 2 ft	Soluble	Solid	300.0	58709
880-31305-27	AH-3 @ 1 ft	Soluble	Solid	300.0	58709
880-31305-28	AH-1 @ 2 ft	Soluble	Solid	300.0	58709
880-31305-29	AH-2 @ 4 ft	Soluble	Solid	300.0	58709
880-31305-30	AH-2 @ 1 ft	Soluble	Solid	300.0	58709
880-31305-31	AH-3 @ 3 ft	Soluble	Solid	300.0	58709
880-31305-32	AH-5 @ 1 ft	Soluble	Solid	300.0	58709
880-31305-33	AH-4 @ 4 ft	Soluble	Solid	300.0	58709
880-31305-34	AH-3 @ 4 ft	Soluble	Solid	300.0	58709
880-31305-35	AH-2 @ 3 ft	Soluble	Solid	300.0	58709
880-31305-36	AH-4 @ 2 ft	Soluble	Solid	300.0	58709
MB 880-58709/1-A	Method Blank	Soluble	Solid	300.0	58709
LCS 880-58709/2-A	Lab Control Sample	Soluble	Solid	300.0	58709
LCSD 880-58709/3-A	Lab Control Sample Dup	Soluble	Solid	300.0	58709
880-31305-17 MS	AH-17 @ 4 ft	Soluble	Solid	300.0	58709
880-31305-17 MSD	AH-17 @ 4 ft	Soluble	Solid	300.0	58709
880-31305-27 MS	AH-3 @ 1 ft	Soluble	Solid	300.0	58709
880-31305-27 MSD	AH-3 @ 1 ft	Soluble	Solid	300.0	58709

Lab Chronicle

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-12 @ 1 ft

Lab Sample ID: 880-31305-1
Date Collected: 07/25/23 08:08
Matrix: Solid
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			4.96 g	5 mL	59348	08/04/23 13:55	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59294	08/05/23 10:19	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/07/23 18:14	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/07/23 15:16	SM	EET MID
Total/NA	Prep	8015NM Prep			10.01 g	10 mL	59198	08/03/23 09:49	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59390	08/05/23 14:01	SM	EET MID
Soluble	Leach	DI Leach			5.05 g	50 mL	58708	07/28/23 11:04	KS	EET MID
Soluble	Analysis	300.0		10			58858	07/31/23 19:22	CH	EET MID

Client Sample ID: AH-14 @ 2 ft

Lab Sample ID: 880-31305-2
Date Collected: 07/25/23 08:20
Matrix: Solid
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			4.97 g	5 mL	59348	08/04/23 13:55	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59294	08/05/23 10:40	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/07/23 18:14	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/07/23 15:16	SM	EET MID
Total/NA	Prep	8015NM Prep			9.93 g	10 mL	59198	08/03/23 09:49	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59390	08/05/23 14:23	SM	EET MID
Soluble	Leach	DI Leach			4.96 g	50 mL	58708	07/28/23 11:04	KS	EET MID
Soluble	Analysis	300.0		1			58858	07/31/23 19:41	CH	EET MID

Client Sample ID: AH-15 @ 20 in

Lab Sample ID: 880-31305-3
Date Collected: 07/25/23 08:53
Matrix: Solid
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			5.02 g	5 mL	59348	08/04/23 13:55	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59294	08/05/23 11:01	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/07/23 18:14	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/07/23 15:16	SM	EET MID
Total/NA	Prep	8015NM Prep			9.92 g	10 mL	59198	08/03/23 09:49	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59390	08/05/23 14:46	SM	EET MID
Soluble	Leach	DI Leach			5.01 g	50 mL	58708	07/28/23 11:04	KS	EET MID
Soluble	Analysis	300.0		5			58858	07/31/23 19:47	CH	EET MID

Client Sample ID: AH-16 @ 4 ft

Lab Sample ID: 880-31305-4
Date Collected: 07/25/23 09:26
Matrix: Solid
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			5.01 g	5 mL	59348	08/04/23 13:55	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59294	08/05/23 11:21	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/07/23 18:14	SM	EET MID

Eurofins Midland

Lab Chronicle

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-16 @ 4 ft

Lab Sample ID: 880-31305-4
Date Collected: 07/25/23 09:26
Matrix: Solid
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Analysis	8015 NM		1			59541	08/07/23 15:16	SM	EET MID
Total/NA	Prep	8015NM Prep			10.04 g	10 mL	59198	08/03/23 09:49	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59390	08/05/23 15:08	SM	EET MID
Soluble	Leach	DI Leach			5.02 g	50 mL	58708	07/28/23 11:04	KS	EET MID
Soluble	Analysis	300.0		1			58858	07/31/23 19:53	CH	EET MID

Client Sample ID: AH-13 @ 1 ft

Lab Sample ID: 880-31305-5
Date Collected: 07/25/23 07:49
Matrix: Solid
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			5.04 g	5 mL	59348	08/04/23 13:55	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59294	08/05/23 11:42	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/07/23 18:14	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/07/23 15:16	SM	EET MID
Total/NA	Prep	8015NM Prep			10.08 g	10 mL	59198	08/03/23 09:49	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59390	08/05/23 15:53	SM	EET MID
Soluble	Leach	DI Leach			5.04 g	50 mL	58708	07/28/23 11:04	KS	EET MID
Soluble	Analysis	300.0		1			58858	07/31/23 19:59	CH	EET MID

Client Sample ID: AH-13 @ 2 ft

Lab Sample ID: 880-31305-6
Date Collected: 07/25/23 07:55
Matrix: Solid
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			4.95 g	5 mL	59348	08/04/23 13:55	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59294	08/05/23 12:02	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/07/23 18:14	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/07/23 15:16	SM	EET MID
Total/NA	Prep	8015NM Prep			10.09 g	10 mL	59198	08/03/23 09:49	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59390	08/05/23 16:15	SM	EET MID
Soluble	Leach	DI Leach			4.98 g	50 mL	58708	07/28/23 11:04	KS	EET MID
Soluble	Analysis	300.0		1			58858	07/31/23 20:05	CH	EET MID

Client Sample ID: AH-14 @ 1 ft

Lab Sample ID: 880-31305-7
Date Collected: 07/25/23 08:13
Matrix: Solid
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			4.99 g	5 mL	59348	08/04/23 13:55	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59294	08/05/23 12:23	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/07/23 18:14	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/07/23 15:16	SM	EET MID
Total/NA	Prep	8015NM Prep			9.97 g	10 mL	59198	08/03/23 09:49	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59390	08/05/23 16:38	SM	EET MID

Lab Chronicle

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-14 @ 1 ft

Lab Sample ID: 880-31305-7
Matrix: Solid
Date Collected: 07/25/23 08:13
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Soluble	Leach	DI Leach			5.03 g	50 mL	58708	07/28/23 11:04	KS	EET MID
Soluble	Analysis	300.0		1			58858	07/31/23 20:11	CH	EET MID

Client Sample ID: AH-14 @ 3 ft

Lab Sample ID: 880-31305-8
Matrix: Solid
Date Collected: 07/25/23 08:25
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			5.03 g	5 mL	59348	08/04/23 13:55	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59294	08/05/23 12:43	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/07/23 18:14	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/07/23 15:16	SM	EET MID
Total/NA	Prep	8015NM Prep			9.93 g	10 mL	59198	08/03/23 09:49	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59390	08/05/23 17:00	SM	EET MID
Soluble	Leach	DI Leach			5 g	50 mL	58708	07/28/23 11:04	KS	EET MID
Soluble	Analysis	300.0		1			58858	07/31/23 20:30	CH	EET MID

Client Sample ID: AH-14 @ 4 ft

Lab Sample ID: 880-31305-9
Matrix: Solid
Date Collected: 07/25/23 08:32
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			5.05 g	5 mL	59348	08/04/23 13:55	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59294	08/05/23 13:04	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/07/23 18:14	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/07/23 15:16	SM	EET MID
Total/NA	Prep	8015NM Prep			9.91 g	10 mL	59198	08/03/23 09:49	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59390	08/05/23 17:22	SM	EET MID
Soluble	Leach	DI Leach			5.01 g	50 mL	58708	07/28/23 11:04	KS	EET MID
Soluble	Analysis	300.0		1			58858	07/31/23 20:36	CH	EET MID

Client Sample ID: AH-15 @ 1 ft

Lab Sample ID: 880-31305-10
Matrix: Solid
Date Collected: 07/25/23 08:34
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			4.97 g	5 mL	59348	08/04/23 13:55	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59294	08/05/23 13:24	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/07/23 18:14	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/07/23 15:16	SM	EET MID
Total/NA	Prep	8015NM Prep			10.02 g	10 mL	59198	08/03/23 09:49	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59390	08/05/23 17:45	SM	EET MID
Soluble	Leach	DI Leach			4.99 g	50 mL	58708	07/28/23 11:04	KS	EET MID
Soluble	Analysis	300.0		5			58858	07/31/23 20:54	CH	EET MID

Lab Chronicle

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-16 @ 1 ft

Lab Sample ID: 880-31305-11
Matrix: Solid
Date Collected: 07/25/23 09:04
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			4.99 g	5 mL	59348	08/04/23 13:55	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59294	08/05/23 14:48	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/07/23 18:14	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/07/23 15:16	SM	EET MID
Total/NA	Prep	8015NM Prep			9.91 g	10 mL	59198	08/03/23 09:49	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59390	08/05/23 18:07	SM	EET MID
Soluble	Leach	DI Leach			4.97 g	50 mL	58708	07/28/23 11:04	KS	EET MID
Soluble	Analysis	300.0		1			58858	07/31/23 21:00	CH	EET MID

Client Sample ID: AH-16 @ 2 ft

Lab Sample ID: 880-31305-12
Matrix: Solid
Date Collected: 07/25/23 09:11
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			4.96 g	5 mL	59348	08/04/23 13:55	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59294	08/05/23 16:01	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/07/23 18:14	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/07/23 15:16	SM	EET MID
Total/NA	Prep	8015NM Prep			9.90 g	10 mL	59198	08/03/23 09:49	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59390	08/05/23 18:30	SM	EET MID
Soluble	Leach	DI Leach			5 g	50 mL	58708	07/28/23 11:04	KS	EET MID
Soluble	Analysis	300.0		1			58858	07/31/23 21:07	CH	EET MID

Client Sample ID: AH-16 @ 3 ft

Lab Sample ID: 880-31305-13
Matrix: Solid
Date Collected: 07/25/23 09:16
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			5.04 g	5 mL	59348	08/04/23 13:55	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59294	08/05/23 16:21	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/07/23 18:14	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/07/23 15:16	SM	EET MID
Total/NA	Prep	8015NM Prep			10.08 g	10 mL	59198	08/03/23 09:49	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59390	08/05/23 18:52	SM	EET MID
Soluble	Leach	DI Leach			4.99 g	50 mL	58708	07/28/23 11:04	KS	EET MID
Soluble	Analysis	300.0		1			58858	07/31/23 21:13	CH	EET MID

Client Sample ID: AH-17 @ 1 ft

Lab Sample ID: 880-31305-14
Matrix: Solid
Date Collected: 07/25/23 09:32
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			4.99 g	5 mL	59348	08/04/23 13:55	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59294	08/05/23 16:42	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/07/23 18:14	SM	EET MID

Eurofins Midland

Lab Chronicle

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-17 @ 1 ft

Lab Sample ID: 880-31305-14
Matrix: Solid
Date Collected: 07/25/23 09:32
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Analysis	8015 NM		1			59541	08/07/23 15:16	SM	EET MID
Total/NA	Prep	8015NM Prep			10.07 g	10 mL	59198	08/03/23 09:49	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59390	08/05/23 19:15	SM	EET MID
Soluble	Leach	DI Leach			5.01 g	50 mL	58708	07/28/23 11:04	KS	EET MID
Soluble	Analysis	300.0		10			58858	07/31/23 21:19	CH	EET MID

Client Sample ID: AH-17 @ 2 ft

Lab Sample ID: 880-31305-15
Matrix: Solid
Date Collected: 07/25/23 09:37
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			5.00 g	5 mL	59348	08/04/23 13:55	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59294	08/05/23 17:02	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/07/23 18:14	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/08/23 12:09	SM	EET MID
Total/NA	Prep	8015NM Prep			9.92 g	10 mL	59215	08/03/23 09:57	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59413	08/07/23 10:24	SM	EET MID
Soluble	Leach	DI Leach			5.01 g	50 mL	58708	07/28/23 11:04	KS	EET MID
Soluble	Analysis	300.0		1			58858	07/31/23 21:25	CH	EET MID

Client Sample ID: AH-17 @ 3 ft

Lab Sample ID: 880-31305-16
Matrix: Solid
Date Collected: 07/25/23 09:44
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			5.02 g	5 mL	59348	08/04/23 13:55	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59294	08/05/23 17:23	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/07/23 18:14	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/08/23 12:09	SM	EET MID
Total/NA	Prep	8015NM Prep			9.96 g	10 mL	59215	08/03/23 09:57	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59413	08/07/23 11:31	SM	EET MID
Soluble	Leach	DI Leach			5.02 g	50 mL	58708	07/28/23 11:04	KS	EET MID
Soluble	Analysis	300.0		1			58858	07/31/23 21:31	CH	EET MID

Client Sample ID: AH-17 @ 4 ft

Lab Sample ID: 880-31305-17
Matrix: Solid
Date Collected: 07/25/23 09:50
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			5.01 g	5 mL	59348	08/04/23 13:55	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59294	08/05/23 17:43	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/07/23 18:14	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/08/23 12:09	SM	EET MID
Total/NA	Prep	8015NM Prep			9.93 g	10 mL	59215	08/03/23 09:57	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59413	08/07/23 11:54	SM	EET MID

Eurofins Midland

Lab Chronicle

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-17 @ 4 ft

Lab Sample ID: 880-31305-17
Matrix: Solid
Date Collected: 07/25/23 09:50
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Soluble	Leach	DI Leach			4.96 g	50 mL	58709	07/28/23 11:06	KS	EET MID
Soluble	Analysis	300.0		1			58859	07/31/23 22:20	CH	EET MID

Client Sample ID: AH-18 @ 1 ft

Lab Sample ID: 880-31305-18
Matrix: Solid
Date Collected: 07/25/23 09:57
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			5.05 g	5 mL	59348	08/04/23 13:55	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59294	08/05/23 18:04	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/07/23 18:14	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/08/23 12:09	SM	EET MID
Total/NA	Prep	8015NM Prep			9.94 g	10 mL	59215	08/03/23 09:57	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59413	08/07/23 12:16	SM	EET MID
Soluble	Leach	DI Leach			4.98 g	50 mL	58709	07/28/23 11:06	KS	EET MID
Soluble	Analysis	300.0		5			58859	07/31/23 22:39	CH	EET MID

Client Sample ID: AH-18 @ 2 ft

Lab Sample ID: 880-31305-19
Matrix: Solid
Date Collected: 07/25/23 10:03
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			4.96 g	5 mL	59348	08/04/23 13:55	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59294	08/05/23 18:24	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/07/23 18:14	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/08/23 12:09	SM	EET MID
Total/NA	Prep	8015NM Prep			10.08 g	10 mL	59215	08/03/23 09:57	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59413	08/07/23 12:38	SM	EET MID
Soluble	Leach	DI Leach			5.01 g	50 mL	58709	07/28/23 11:06	KS	EET MID
Soluble	Analysis	300.0		1			58859	07/31/23 22:45	CH	EET MID

Client Sample ID: AH-18 @ 3 ft

Lab Sample ID: 880-31305-20
Matrix: Solid
Date Collected: 07/25/23 10:08
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			4.99 g	5 mL	59348	08/04/23 13:55	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59294	08/05/23 18:45	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/07/23 18:14	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/08/23 12:09	SM	EET MID
Total/NA	Prep	8015NM Prep			10.09 g	10 mL	59215	08/03/23 09:57	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59413	08/07/23 13:01	SM	EET MID
Soluble	Leach	DI Leach			4.95 g	50 mL	58709	07/28/23 11:06	KS	EET MID
Soluble	Analysis	300.0		1			58859	07/31/23 22:51	CH	EET MID

Lab Chronicle

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-19 @ 1 ft

Lab Sample ID: 880-31305-21
Matrix: Solid
Date Collected: 07/25/23 10:17
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			5.01 g	5 mL	59350	08/04/23 14:26	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59296	08/05/23 10:24	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/07/23 16:13	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/08/23 12:09	SM	EET MID
Total/NA	Prep	8015NM Prep			9.97 g	10 mL	59215	08/03/23 09:57	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59413	08/07/23 13:23	SM	EET MID
Soluble	Leach	DI Leach			4.97 g	50 mL	58709	07/28/23 11:06	KS	EET MID
Soluble	Analysis	300.0		1			58859	07/31/23 22:57	CH	EET MID

Client Sample ID: AH-19 @ 2 ft

Lab Sample ID: 880-31305-22
Matrix: Solid
Date Collected: 07/25/23 10:23
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			4.99 g	5 mL	59350	08/04/23 14:26	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59296	08/05/23 10:45	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/07/23 16:13	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/08/23 12:09	SM	EET MID
Total/NA	Prep	8015NM Prep			9.93 g	10 mL	59215	08/03/23 09:57	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59413	08/07/23 13:45	SM	EET MID
Soluble	Leach	DI Leach			4.98 g	50 mL	58709	07/28/23 11:06	KS	EET MID
Soluble	Analysis	300.0		1			58859	07/31/23 23:16	CH	EET MID

Client Sample ID: AH-19 @ 3 ft

Lab Sample ID: 880-31305-23
Matrix: Solid
Date Collected: 07/25/23 10:29
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			4.97 g	5 mL	59350	08/04/23 14:26	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59296	08/05/23 11:05	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/07/23 16:13	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/08/23 12:09	SM	EET MID
Total/NA	Prep	8015NM Prep			9.98 g	10 mL	59215	08/03/23 09:57	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59413	08/07/23 14:07	SM	EET MID
Soluble	Leach	DI Leach			5 g	50 mL	58709	07/28/23 11:06	KS	EET MID
Soluble	Analysis	300.0		1			58859	07/31/23 23:22	CH	EET MID

Client Sample ID: AH-19 @ 4 ft

Lab Sample ID: 880-31305-24
Matrix: Solid
Date Collected: 07/25/23 10:38
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			4.95 g	5 mL	59350	08/04/23 14:26	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59296	08/05/23 11:26	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/07/23 16:13	SM	EET MID

Lab Chronicle

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-19 @ 4 ft

Lab Sample ID: 880-31305-24
Matrix: Solid
Date Collected: 07/25/23 10:38
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Analysis	8015 NM		1			59541	08/08/23 12:09	SM	EET MID
Total/NA	Prep	8015NM Prep			10.04 g	10 mL	59215	08/03/23 09:57	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59413	08/07/23 14:29	SM	EET MID
Soluble	Leach	DI Leach			5.02 g	50 mL	58709	07/28/23 11:06	KS	EET MID
Soluble	Analysis	300.0		1			58859	07/31/23 23:28	CH	EET MID

Client Sample ID: AH-5 @ 2 ft

Lab Sample ID: 880-31305-25
Matrix: Solid
Date Collected: 07/21/23 09:46
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			5.03 g	5 mL	59110	08/02/23 11:14	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59172	08/03/23 11:52	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/03/23 20:39	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/08/23 12:09	SM	EET MID
Total/NA	Prep	8015NM Prep			10.09 g	10 mL	59215	08/03/23 09:57	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59413	08/07/23 15:13	SM	EET MID
Soluble	Leach	DI Leach			5.04 g	50 mL	58709	07/28/23 11:06	KS	EET MID
Soluble	Analysis	300.0		1			58859	07/31/23 23:34	CH	EET MID

Client Sample ID: AH-8 @ 2 ft

Lab Sample ID: 880-31305-26
Matrix: Solid
Date Collected: 07/21/23 09:57
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			4.99 g	5 mL	59110	08/02/23 11:14	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59172	08/03/23 12:12	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/03/23 20:39	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/08/23 12:09	SM	EET MID
Total/NA	Prep	8015NM Prep			9.92 g	10 mL	59215	08/03/23 09:57	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59413	08/07/23 15:35	SM	EET MID
Soluble	Leach	DI Leach			4.98 g	50 mL	58709	07/28/23 11:06	KS	EET MID
Soluble	Analysis	300.0		1			58859	07/31/23 23:40	CH	EET MID

Client Sample ID: AH-3 @ 1 ft

Lab Sample ID: 880-31305-27
Matrix: Solid
Date Collected: 07/21/23 09:15
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			4.95 g	5 mL	59110	08/02/23 11:14	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59172	08/03/23 12:33	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/03/23 20:39	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/08/23 12:09	SM	EET MID
Total/NA	Prep	8015NM Prep			9.99 g	10 mL	59215	08/03/23 09:57	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59413	08/07/23 15:57	SM	EET MID

Eurofins Midland

Lab Chronicle

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-3 @ 1 ft

Lab Sample ID: 880-31305-27
Date Collected: 07/21/23 09:15
Matrix: Solid
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Soluble	Leach	DI Leach			4.95 g	50 mL	58709	07/28/23 11:06	KS	EET MID
Soluble	Analysis	300.0		5			58859	07/31/23 23:46	CH	EET MID

Client Sample ID: AH-1 @ 2 ft

Lab Sample ID: 880-31305-28
Date Collected: 07/21/23 08:52
Matrix: Solid
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			4.96 g	5 mL	59110	08/02/23 11:14	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59172	08/03/23 12:53	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/03/23 20:39	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/08/23 12:09	SM	EET MID
Total/NA	Prep	8015NM Prep			10.08 g	10 mL	59215	08/03/23 09:57	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59413	08/07/23 16:19	SM	EET MID
Soluble	Leach	DI Leach			5.01 g	50 mL	58709	07/28/23 11:06	KS	EET MID
Soluble	Analysis	300.0		1			58859	08/01/23 00:05	CH	EET MID

Client Sample ID: AH-2 @ 4 ft

Lab Sample ID: 880-31305-29
Date Collected: 07/21/23 09:10
Matrix: Solid
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			5.02 g	5 mL	59110	08/02/23 11:14	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59172	08/03/23 13:14	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/03/23 20:39	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/08/23 12:09	SM	EET MID
Total/NA	Prep	8015NM Prep			10.03 g	10 mL	59215	08/03/23 09:57	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59413	08/07/23 16:42	SM	EET MID
Soluble	Leach	DI Leach			5.03 g	50 mL	58709	07/28/23 11:06	KS	EET MID
Soluble	Analysis	300.0		1			58859	08/01/23 00:11	CH	EET MID

Client Sample ID: AH-2 @ 1 ft

Lab Sample ID: 880-31305-30
Date Collected: 07/21/23 09:02
Matrix: Solid
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			5.05 g	5 mL	59110	08/02/23 11:14	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59172	08/03/23 13:35	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/03/23 20:39	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/08/23 12:09	SM	EET MID
Total/NA	Prep	8015NM Prep			10.00 g	10 mL	59215	08/03/23 09:57	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59413	08/07/23 17:04	SM	EET MID
Soluble	Leach	DI Leach			5.03 g	50 mL	58709	07/28/23 11:06	KS	EET MID
Soluble	Analysis	300.0		1			58859	08/01/23 00:30	CH	EET MID

Lab Chronicle

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-3 @ 3 ft

Lab Sample ID: 880-31305-31
Matrix: Solid
Date Collected: 07/21/23 09:20
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			4.97 g	5 mL	59110	08/02/23 11:14	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59172	08/03/23 13:55	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/03/23 20:39	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/08/23 12:09	SM	EET MID
Total/NA	Prep	8015NM Prep			10.01 g	10 mL	59215	08/03/23 09:57	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59413	08/07/23 17:26	SM	EET MID
Soluble	Leach	DI Leach			4.96 g	50 mL	58709	07/28/23 11:06	KS	EET MID
Soluble	Analysis	300.0		1			58859	08/01/23 00:36	CH	EET MID

Client Sample ID: AH-5 @ 1 ft

Lab Sample ID: 880-31305-32
Matrix: Solid
Date Collected: 07/21/23 09:42
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			4.98 g	5 mL	59110	08/02/23 11:14	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59172	08/03/23 14:16	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/03/23 20:39	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/08/23 12:09	SM	EET MID
Total/NA	Prep	8015NM Prep			9.97 g	10 mL	59215	08/03/23 09:57	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59413	08/07/23 17:49	SM	EET MID
Soluble	Leach	DI Leach			5 g	50 mL	58709	07/28/23 11:06	KS	EET MID
Soluble	Analysis	300.0		1			58859	08/01/23 00:42	CH	EET MID

Client Sample ID: AH-4 @ 4 ft

Lab Sample ID: 880-31305-33
Matrix: Solid
Date Collected: 07/21/23 09:39
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			5.01 g	5 mL	59110	08/02/23 11:14	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59172	08/03/23 14:36	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/03/23 20:39	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/08/23 12:09	SM	EET MID
Total/NA	Prep	8015NM Prep			9.94 g	10 mL	59215	08/03/23 09:57	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59413	08/07/23 18:11	SM	EET MID
Soluble	Leach	DI Leach			5 g	50 mL	58709	07/28/23 11:06	KS	EET MID
Soluble	Analysis	300.0		1			58859	08/01/23 00:48	CH	EET MID

Client Sample ID: AH-3 @ 4 ft

Lab Sample ID: 880-31305-34
Matrix: Solid
Date Collected: 07/21/23 09:22
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			5.05 g	5 mL	59110	08/02/23 11:14	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59172	08/03/23 14:57	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/03/23 20:39	SM	EET MID

Eurofins Midland

Lab Chronicle

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-3 @ 4 ft

Lab Sample ID: 880-31305-34
Date Collected: 07/21/23 09:22
Matrix: Solid
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Analysis	8015 NM		1			59541	08/08/23 12:09	SM	EET MID
Total/NA	Prep	8015NM Prep			9.99 g	10 mL	59215	08/03/23 09:57	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59413	08/07/23 18:34	SM	EET MID
Soluble	Leach	DI Leach			5.01 g	50 mL	58709	07/28/23 11:06	KS	EET MID
Soluble	Analysis	300.0		1			58859	08/01/23 00:54	CH	EET MID

Client Sample ID: AH-2 @ 3 ft

Lab Sample ID: 880-31305-35
Date Collected: 07/21/23 09:08
Matrix: Solid
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			4.98 g	5 mL	59110	08/02/23 11:14	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59172	08/03/23 16:51	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/03/23 20:39	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/08/23 12:15	SM	EET MID
Total/NA	Prep	8015NM Prep			9.94 g	10 mL	59216	08/03/23 10:03	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59411	08/07/23 10:24	SM	EET MID
Soluble	Leach	DI Leach			4.99 g	50 mL	58709	07/28/23 11:06	KS	EET MID
Soluble	Analysis	300.0		1			58859	08/01/23 01:00	CH	EET MID

Client Sample ID: AH-4 @ 2 ft

Lab Sample ID: 880-31305-36
Date Collected: 07/21/23 09:32
Matrix: Solid
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			4.95 g	5 mL	59110	08/02/23 11:14	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59172	08/03/23 17:11	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/03/23 20:39	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/08/23 12:15	SM	EET MID
Total/NA	Prep	8015NM Prep			10.07 g	10 mL	59216	08/03/23 10:03	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59411	08/07/23 11:31	SM	EET MID
Soluble	Leach	DI Leach			5.02 g	50 mL	58709	07/28/23 11:06	KS	EET MID
Soluble	Analysis	300.0		1			58859	08/01/23 01:07	CH	EET MID

Client Sample ID: AH-4 @ 3 ft

Lab Sample ID: 880-31305-37
Date Collected: 07/21/23 09:34
Matrix: Solid
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			4.96 g	5 mL	59110	08/02/23 11:14	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59172	08/03/23 17:32	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/03/23 20:39	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/08/23 12:15	SM	EET MID
Total/NA	Prep	8015NM Prep			10.08 g	10 mL	59216	08/03/23 10:03	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59411	08/07/23 11:54	SM	EET MID

Eurofins Midland

Lab Chronicle

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-4 @ 3 ft

Lab Sample ID: 880-31305-37
Matrix: Solid
Date Collected: 07/21/23 09:34
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Soluble	Leach	DI Leach			5.01 g	50 mL	58710	07/28/23 11:08	KS	EET MID
Soluble	Analysis	300.0		1			58855	07/31/23 12:06	CH	EET MID

Client Sample ID: AH-1 @ 1 ft

Lab Sample ID: 880-31305-38
Matrix: Solid
Date Collected: 07/21/23 08:49
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			5.03 g	5 mL	59110	08/02/23 11:14	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59172	08/03/23 17:52	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/03/23 20:39	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/08/23 12:15	SM	EET MID
Total/NA	Prep	8015NM Prep			10.09 g	10 mL	59216	08/03/23 10:03	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59411	08/07/23 12:16	SM	EET MID
Soluble	Leach	DI Leach			5 g	50 mL	58710	07/28/23 11:08	KS	EET MID
Soluble	Analysis	300.0		1			58855	07/31/23 12:25	CH	EET MID

Client Sample ID: AH-3 @ 2 ft

Lab Sample ID: 880-31305-39
Matrix: Solid
Date Collected: 07/21/23 08:17
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			5.05 g	5 mL	59110	08/02/23 11:14	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59172	08/03/23 18:13	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/03/23 20:39	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/08/23 12:15	SM	EET MID
Total/NA	Prep	8015NM Prep			10.02 g	10 mL	59216	08/03/23 10:03	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59411	08/07/23 12:38	SM	EET MID
Soluble	Leach	DI Leach			5.04 g	50 mL	58710	07/28/23 11:08	KS	EET MID
Soluble	Analysis	300.0		1			58855	07/31/23 12:31	CH	EET MID

Client Sample ID: AH-2 @ 2 ft

Lab Sample ID: 880-31305-40
Matrix: Solid
Date Collected: 07/21/23 09:05
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			5.01 g	5 mL	59110	08/02/23 11:14	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59172	08/03/23 18:33	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/03/23 20:39	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/08/23 12:15	SM	EET MID
Total/NA	Prep	8015NM Prep			10.05 g	10 mL	59216	08/03/23 10:03	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59411	08/07/23 13:01	SM	EET MID
Soluble	Leach	DI Leach			4.99 g	50 mL	58710	07/28/23 11:08	KS	EET MID
Soluble	Analysis	300.0		1			58855	07/31/23 12:37	CH	EET MID

Lab Chronicle

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-4 @ 1 ft

Lab Sample ID: 880-31305-41
Matrix: Solid
Date Collected: 07/21/23 09:29
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			4.98 g	5 mL	59110	08/02/23 11:14	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59172	08/03/23 18:54	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/03/23 20:39	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/08/23 12:15	SM	EET MID
Total/NA	Prep	8015NM Prep			9.96 g	10 mL	59216	08/03/23 10:03	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59411	08/07/23 13:23	SM	EET MID
Soluble	Leach	DI Leach			5.01 g	50 mL	58710	07/28/23 11:08	KS	EET MID
Soluble	Analysis	300.0		1			58855	07/31/23 12:43	CH	EET MID

Client Sample ID: AH-1 @ 4 ft

Lab Sample ID: 880-31305-42
Matrix: Solid
Date Collected: 07/21/23 08:57
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			4.99 g	5 mL	59110	08/02/23 11:14	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59172	08/03/23 19:14	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/03/23 20:39	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/08/23 12:15	SM	EET MID
Total/NA	Prep	8015NM Prep			9.97 g	10 mL	59216	08/03/23 10:03	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59411	08/07/23 13:45	SM	EET MID
Soluble	Leach	DI Leach			4.95 g	50 mL	58710	07/28/23 11:08	KS	EET MID
Soluble	Analysis	300.0		1			58855	07/31/23 13:02	CH	EET MID

Client Sample ID: AH-1 @ 3 ft

Lab Sample ID: 880-31305-43
Matrix: Solid
Date Collected: 07/21/23 08:54
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			5.02 g	5 mL	59110	08/02/23 11:14	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59172	08/03/23 19:35	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/03/23 20:39	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/08/23 12:15	SM	EET MID
Total/NA	Prep	8015NM Prep			9.93 g	10 mL	59216	08/03/23 10:03	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59411	08/07/23 14:07	SM	EET MID
Soluble	Leach	DI Leach			4.98 g	50 mL	58710	07/28/23 11:08	KS	EET MID
Soluble	Analysis	300.0		1			58855	07/31/23 13:08	CH	EET MID

Client Sample ID: AH-7 @ 1 ft

Lab Sample ID: 880-31305-44
Matrix: Solid
Date Collected: 07/21/23 10:30
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			5.05 g	5 mL	59110	08/02/23 11:14	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59172	08/03/23 19:55	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/03/23 20:39	SM	EET MID

Lab Chronicle

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-7 @ 1 ft

Lab Sample ID: 880-31305-44
Date Collected: 07/21/23 10:30
Matrix: Solid
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Analysis	8015 NM		1			59541	08/08/23 12:15	SM	EET MID
Total/NA	Prep	8015NM Prep			10.04 g	10 mL	59216	08/03/23 10:03	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59411	08/07/23 14:29	SM	EET MID
Soluble	Leach	DI Leach			5.02 g	50 mL	58710	07/28/23 11:08	KS	EET MID
Soluble	Analysis	300.0		1			58855	07/31/23 13:14	CH	EET MID

Client Sample ID: AH-7 @ 2 ft

Lab Sample ID: 880-31305-45
Date Collected: 07/21/23 10:33
Matrix: Solid
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			5.04 g	5 mL	59116	08/02/23 12:04	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59105	08/03/23 01:44	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/03/23 10:18	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/08/23 12:15	SM	EET MID
Total/NA	Prep	8015NM Prep			10.08 g	10 mL	59216	08/03/23 10:03	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59411	08/07/23 15:13	SM	EET MID
Soluble	Leach	DI Leach			5 g	50 mL	58710	07/28/23 11:08	KS	EET MID
Soluble	Analysis	300.0		1			58855	07/31/23 13:20	CH	EET MID

Client Sample ID: AH-8 @ 2 ft

Lab Sample ID: 880-31305-46
Date Collected: 07/21/23 10:50
Matrix: Solid
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			4.96 g	5 mL	59116	08/02/23 12:04	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59105	08/03/23 02:04	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/03/23 10:18	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/08/23 12:15	SM	EET MID
Total/NA	Prep	8015NM Prep			10.09 g	10 mL	59216	08/03/23 10:03	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59411	08/07/23 15:35	SM	EET MID
Soluble	Leach	DI Leach			4.99 g	50 mL	58710	07/28/23 11:08	KS	EET MID
Soluble	Analysis	300.0		1			58855	07/31/23 13:26	CH	EET MID

Client Sample ID: AH-10 @ 2 ft

Lab Sample ID: 880-31305-47
Date Collected: 07/21/23 12:56
Matrix: Solid
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			4.98 g	5 mL	59116	08/02/23 12:04	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59105	08/03/23 02:25	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/03/23 10:18	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/08/23 12:15	SM	EET MID
Total/NA	Prep	8015NM Prep			9.93 g	10 mL	59216	08/03/23 10:03	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59411	08/07/23 15:57	SM	EET MID

Eurofins Midland

Lab Chronicle

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-10 @ 2 ft

Lab Sample ID: 880-31305-47
Matrix: Solid
Date Collected: 07/21/23 12:56
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Soluble	Leach	DI Leach			4.97 g	50 mL	58710	07/28/23 11:08	KS	EET MID
Soluble	Analysis	300.0		1			58855	07/31/23 13:32	CH	EET MID

Client Sample ID: AH-7 @ 3 ft

Lab Sample ID: 880-31305-48
Matrix: Solid
Date Collected: 07/21/23 10:37
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			4.99 g	5 mL	59116	08/02/23 12:04	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59105	08/03/23 02:45	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/03/23 10:18	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/08/23 12:15	SM	EET MID
Total/NA	Prep	8015NM Prep			9.95 g	10 mL	59216	08/03/23 10:03	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59411	08/07/23 16:19	SM	EET MID
Soluble	Leach	DI Leach			5.03 g	50 mL	58710	07/28/23 11:08	KS	EET MID
Soluble	Analysis	300.0		1			58855	07/31/23 13:51	CH	EET MID

Client Sample ID: AH-8 @ 1 ft

Lab Sample ID: 880-31305-49
Matrix: Solid
Date Collected: 07/21/23 10:44
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			5.02 g	5 mL	59116	08/02/23 12:04	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59105	08/03/23 03:05	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/03/23 10:18	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/08/23 12:15	SM	EET MID
Total/NA	Prep	8015NM Prep			10.08 g	10 mL	59216	08/03/23 10:03	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59411	08/07/23 16:42	SM	EET MID
Soluble	Leach	DI Leach			5 g	50 mL	58710	07/28/23 11:08	KS	EET MID
Soluble	Analysis	300.0		1			58855	07/31/23 13:57	CH	EET MID

Client Sample ID: AH-10 @ 1 ft

Lab Sample ID: 880-31305-50
Matrix: Solid
Date Collected: 07/21/23 12:48
Date Received: 07/27/23 08:00

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			5.05 g	5 mL	59116	08/02/23 12:04	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59105	08/03/23 03:26	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/03/23 10:18	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/08/23 12:15	SM	EET MID
Total/NA	Prep	8015NM Prep			9.92 g	10 mL	59216	08/03/23 10:03	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59411	08/07/23 17:04	SM	EET MID
Soluble	Leach	DI Leach			5.05 g	50 mL	58710	07/28/23 11:08	KS	EET MID
Soluble	Analysis	300.0		1			58855	07/31/23 14:14	CH	EET MID

Lab Chronicle

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Client Sample ID: AH-9 @ 2 ft
Date Collected: 07/21/23 14:30
Date Received: 07/27/23 08:00

Lab Sample ID: 880-31305-51
Matrix: Solid

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			5.03 g	5 mL	59116	08/02/23 12:04	EL	EET MID
Total/NA	Analysis	8021B		1	5 mL	5 mL	59105	08/03/23 03:46	SM	EET MID
Total/NA	Analysis	Total BTEX		1			59238	08/03/23 10:18	SM	EET MID
Total/NA	Analysis	8015 NM		1			59541	08/08/23 12:15	SM	EET MID
Total/NA	Prep	8015NM Prep			9.91 g	10 mL	59216	08/03/23 10:03	TKC	EET MID
Total/NA	Analysis	8015B NM		1	1 uL	1 uL	59411	08/07/23 17:26	SM	EET MID
Soluble	Leach	DI Leach			4.95 g	50 mL	58710	07/28/23 11:08	KS	EET MID
Soluble	Analysis	300.0		1			58855	07/31/23 14:19	CH	EET MID

Laboratory References:

EET MID = Eurofins Midland, 1211 W. Florida Ave, Midland, TX 79701, TEL (432)704-5440

Accreditation/Certification Summary

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Laboratory: Eurofins Midland

Unless otherwise noted, all analytes for this laboratory were covered under each accreditation/certification below.

Authority	Program	Identification Number	Expiration Date
Texas	NELAP	T104704400-23-26	06-30-24

The following analytes are included in this report, but the laboratory is not certified by the governing authority. This list may include analytes for which the agency does not offer certification.

Analysis Method	Prep Method	Matrix	Analyte
8015 NM		Solid	Total TPH
Total BTEX		Solid	Total BTEX

Method Summary

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Method	Method Description	Protocol	Laboratory
8021B	Volatile Organic Compounds (GC)	SW846	EET MID
Total BTEX	Total BTEX Calculation	TAL SOP	EET MID
8015 NM	Diesel Range Organics (DRO) (GC)	SW846	EET MID
8015B NM	Diesel Range Organics (DRO) (GC)	SW846	EET MID
300.0	Anions, Ion Chromatography	EPA	EET MID
5035	Closed System Purge and Trap	SW846	EET MID
8015NM Prep	Microextraction	SW846	EET MID
DI Leach	Deionized Water Leaching Procedure	ASTM	EET MID

Protocol References:

ASTM = ASTM International

EPA = US Environmental Protection Agency

SW846 = "Test Methods For Evaluating Solid Waste, Physical/Chemical Methods", Third Edition, November 1986 And Its Updates.

TAL SOP = TestAmerica Laboratories, Standard Operating Procedure

Laboratory References:

EET MID = Eurofins Midland, 1211 W. Florida Ave, Midland, TX 79701, TEL (432)704-5440

Sample Summary

Client: Tellus Services
Project/Site: Jalapeno

Job ID: 880-31305-1
SDG: Lea Co, NM

Lab Sample ID	Client Sample ID	Matrix	Collected	Received	Depth
880-31305-1	AH-12 @ 1 ft	Solid	07/25/23 08:08	07/27/23 08:00	1 ft
880-31305-2	AH-14 @ 2 ft	Solid	07/25/23 08:20	07/27/23 08:00	2 ft
880-31305-3	AH-15 @ 20 in	Solid	07/25/23 08:53	07/27/23 08:00	20 in
880-31305-4	AH-16 @ 4 ft	Solid	07/25/23 09:26	07/27/23 08:00	4 ft
880-31305-5	AH-13 @ 1 ft	Solid	07/25/23 07:49	07/27/23 08:00	1 ft
880-31305-6	AH-13 @ 2 ft	Solid	07/25/23 07:55	07/27/23 08:00	2 ft
880-31305-7	AH-14 @ 1 ft	Solid	07/25/23 08:13	07/27/23 08:00	1 ft
880-31305-8	AH-14 @ 3 ft	Solid	07/25/23 08:25	07/27/23 08:00	3 ft
880-31305-9	AH-14 @ 4 ft	Solid	07/25/23 08:32	07/27/23 08:00	4 ft
880-31305-10	AH-15 @ 1 ft	Solid	07/25/23 08:34	07/27/23 08:00	1 ft
880-31305-11	AH-16 @ 1 ft	Solid	07/25/23 09:04	07/27/23 08:00	1 ft
880-31305-12	AH-16 @ 2 ft	Solid	07/25/23 09:11	07/27/23 08:00	2 ft
880-31305-13	AH-16 @ 3 ft	Solid	07/25/23 09:16	07/27/23 08:00	3 ft
880-31305-14	AH-17 @ 1 ft	Solid	07/25/23 09:32	07/27/23 08:00	1 ft
880-31305-15	AH-17 @ 2 ft	Solid	07/25/23 09:37	07/27/23 08:00	2 ft
880-31305-16	AH-17 @ 3 ft	Solid	07/25/23 09:44	07/27/23 08:00	3 ft
880-31305-17	AH-17 @ 4 ft	Solid	07/25/23 09:50	07/27/23 08:00	4 ft
880-31305-18	AH-18 @ 1 ft	Solid	07/25/23 09:57	07/27/23 08:00	1 ft
880-31305-19	AH-18 @ 2 ft	Solid	07/25/23 10:03	07/27/23 08:00	2 ft
880-31305-20	AH-18 @ 3 ft	Solid	07/25/23 10:08	07/27/23 08:00	3 ft
880-31305-21	AH-19 @ 1 ft	Solid	07/25/23 10:17	07/27/23 08:00	1 ft
880-31305-22	AH-19 @ 2 ft	Solid	07/25/23 10:23	07/27/23 08:00	2 ft
880-31305-23	AH-19 @ 3 ft	Solid	07/25/23 10:29	07/27/23 08:00	3 ft
880-31305-24	AH-19 @ 4 ft	Solid	07/25/23 10:38	07/27/23 08:00	4 ft
880-31305-25	AH-5 @ 2 ft	Solid	07/21/23 09:46	07/27/23 08:00	2 ft
880-31305-26	AH-8 @ 2 ft	Solid	07/21/23 09:57	07/27/23 08:00	2 ft
880-31305-27	AH-3 @ 1 ft	Solid	07/21/23 09:15	07/27/23 08:00	1 ft
880-31305-28	AH-1 @ 2 ft	Solid	07/21/23 08:52	07/27/23 08:00	2 ft
880-31305-29	AH-2 @ 4 ft	Solid	07/21/23 09:10	07/27/23 08:00	4 ft
880-31305-30	AH-2 @ 1 ft	Solid	07/21/23 09:02	07/27/23 08:00	1 ft
880-31305-31	AH-3 @ 3 ft	Solid	07/21/23 09:20	07/27/23 08:00	3 ft
880-31305-32	AH-5 @ 1 ft	Solid	07/21/23 09:42	07/27/23 08:00	1 ft
880-31305-33	AH-4 @ 4 ft	Solid	07/21/23 09:39	07/27/23 08:00	4 ft
880-31305-34	AH-3 @ 4 ft	Solid	07/21/23 09:22	07/27/23 08:00	4 ft
880-31305-35	AH-2 @ 3 ft	Solid	07/21/23 09:08	07/27/23 08:00	3 ft
880-31305-36	AH-4 @ 2 ft	Solid	07/21/23 09:32	07/27/23 08:00	2 ft
880-31305-37	AH-4 @ 3 ft	Solid	07/21/23 09:34	07/27/23 08:00	3 ft
880-31305-38	AH-1 @ 1 ft	Solid	07/21/23 08:49	07/27/23 08:00	1 ft
880-31305-39	AH-3 @ 2 ft	Solid	07/21/23 08:17	07/27/23 08:00	2 ft
880-31305-40	AH-2 @ 2 ft	Solid	07/21/23 09:05	07/27/23 08:00	2 ft
880-31305-41	AH-4 @ 1 ft	Solid	07/21/23 09:29	07/27/23 08:00	1 ft
880-31305-42	AH-1 @ 4 ft	Solid	07/21/23 08:57	07/27/23 08:00	4 ft
880-31305-43	AH-1 @ 3 ft	Solid	07/21/23 08:54	07/27/23 08:00	3 ft
880-31305-44	AH-7 @ 1 ft	Solid	07/21/23 10:30	07/27/23 08:00	1 ft
880-31305-45	AH-7 @ 2 ft	Solid	07/21/23 10:33	07/27/23 08:00	2 ft
880-31305-46	AH-8 @ 2 ft	Solid	07/21/23 10:50	07/27/23 08:00	2 ft
880-31305-47	AH-10 @ 2 ft	Solid	07/21/23 12:56	07/27/23 08:00	2 ft
880-31305-48	AH-7 @ 3 ft	Solid	07/21/23 10:37	07/27/23 08:00	3 ft
880-31305-49	AH-8 @ 1 ft	Solid	07/21/23 10:44	07/27/23 08:00	1 ft
880-31305-50	AH-10 @ 1 ft	Solid	07/21/23 12:48	07/27/23 08:00	1 ft
880-31305-51	AH-9 @ 2 ft	Solid	07/21/23 14:30	07/27/23 08:00	2 ft

Page 163 of 1291

eurofins | Environment Testing Xenco

Chain of Custody

Houston, TX (281) 240-4200, Dallas, TX (214) 902-0300
Midland, TX (432) 704-5440, San Antonio, TX (210) 509-3334
EL Paso, TX (915) 585-3443 Lubbock, TX (806) 794-1296
Hobbs, NM (575) 392-7550 Carlsbad, NM (575) 988-3199

Work Order No: 31305

www.xenco.com Page 1 of

Project Manager:	Jamey fowler	Bill to: (if different)	montgomery floyd
Company Name:	Tellus	Company Name:	permian Resources
Address:	4000 N Big Spring	Address:	
City, State ZIP:	midland TX - 79705	City, State ZIP:	
Phone	432-557-0934	Email	Jamey@Tellusservices.com

Work Order Comments

Program. UST/PST ☐ PRP ☐ Brownfields ☐ RRC ☐ Superfund ☐
State of Project:
Reporting Level II ☐ Level III ☐ PST/UST ☐ TRRP ☐ Level IV ☐
Deliverables EDD ☐ ADaPT ☐ Other:

Project Name:	Jalapeno	Turn Around	☒ Routine ☐ Rush
Project Number:		Due Date	
Project Location:	Lea CO, NM	TAT starts the day received by the lab, if received by 4:30pm	
Sampler's Name:	Joe Ballac		
PO #			

SAMPLE RECEIPT			
Temp Blank	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	IR6
Cooler Custody Seals:	Yes No (N/A)	Correction Factor:	-0.3
Sample Custody Seals:	Yes No (N/A)	Temperature Reading:	1.5
Total Containers:		Corrected Temperature:	1.2

Preservative Codes

None NO DI Water H_2O
Cool Cool MeOH Me
HCL HC HNO_3 HN
H_2SO_4 H_2 NaOH Na
H_3PO_4 HP
$NaHSO_4$ NABIS
$Na_2S_2O_3$ $NaSO_3$
Zn Acetate+NaOH Zn
NaOH+Ascorbic Acid SAPC

Sample Identification	Matrix	Date Sampled	Time Sampled	Depth	Grab/ Comp	# of Cont	Pres. Code	Parameters: BTEX	TPH	Chlorides
AH-12@ 1ft	S	7-25-23	8:08	1ft	G	1		X	X	X
AH-14@ 2ft	S	7-25-23	8:20	2ft	G	1				
AH-15@ 20in	S	7-25-23	8:53	20in	G	1				
AH-16@ 4ft	S	7-25-23	9:26	4ft	G	1				
AH-13@ 1ft	S	7-25-23	7:49	1ft	G	1				
AH-13@ 2ft	S	7-25-23	7:55	2ft	G	1				
AH-14@ 1ft	S	7-25-23	8:13	1ft	G	1				
AH-14@ 3ft	S	7-25-23	8:25	3ft	G	1				
AH-14@ 4ft	S	7-25-23	8:32	4ft	G	1				
AH-15@ 1ft	S	7-25-23	8:37	1ft	G	1				

Sample Comments

880-31305 Chain of Custody

Total 200.7 / 6010 200.8 / 6020: 8RCRA 13PPM Texas 11 Al Sb As Ba Be B Cd Ca Cr Co Cu Fe Pb Mg Mn Mo
Circle Method(s) and Metal(s) to be analyzed TCLP / SPLP 6010 8RCRA Sb As Ba Be Cd Cr Co Cu Pb Mn Mo Ni Se Ag Tl U Hg 1631 / 245.1 / 7470 / 7471

Notice: Signature of this document and relinquishment of samples constitutes a valid purchase order from client company to Eurofins Xenco, its affiliates and subcontractors. It assigns standard terms and conditions of service. Eurofins Xenco will be liable only for the cost of samples and shall not assume any responsibility for any losses or expenses incurred by the client if such losses are due to circumstances beyond the control of Eurofins Xenco. A minimum charge of $85.00 will be applied to each project and a charge of $5 for each sample submitted to Eurofins Xenco, but not analyzed. These terms will be enforced unless previously negotiated.

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1			2		
3			4		
5			6		

Revised Date: 08/25/2020 Rev. 2020.2

Received by OCD: 9/20/2024 8:26:56 AM

8/8/2023

Page 98 of 104

Released to Imaging: 12/18/2024 7:45:13 AM

Page 164 of 1291

eurofins | Environment Testing Xenco

Chain of Custody

Houston, TX (281) 240-4200, Dallas, TX (214) 902-0300
Midland, TX (432) 704-5440, San Antonio, TX (210) 509-3334
EL Paso TX (915) 585-3443 Lubbock, TX (806) 794-1296
Hobbs, NM (575) 392 7550, Carlsbad, NM (575) 988-3199

Work Order No: 31305

www.xenco.com Page 2 of

Project Manager	Jamey Fowler	Bill to: (if different)	Montgomery Floyd
Company Name	Tellus services	Company Name	Permian Resources
Address	4000 N Big Spring	Address.	
City, State ZIP	midland TX 79705	City, State ZIP	
Phone	432-557-0934	Email	Jamey@Tellusservices.com

Work Order Comments

Program: UST/PST ☐ PRP ☐ Brownfields ☐ RRC ☐ Superfund ☐
State of Project:
Reporting Level II ☐ Level III ☐ PST/UST ☐ TRRP ☐ Level IV ☐
Deliverables EDD ☐ ADaPT ☐ Other:

Project Name	Jalapeno	Turn Around	
Project Number:		☒ Routine ☐ Rush	
Project Location.	Lea. CO. NM	Due Date:	
Sampler's Name:	Joe Bellac	TAT starts the day received by the lab, if received by 4.30pm	
PO #			

SAMPLE RECEIPT			
Temp Blank.	Yes (No)	Wet Ice	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID	IR8
Cooler Custody Seals:	Yes No (N/A)	Correction Factor:	-0.2
Sample Custody Seals:	Yes No (N/A)	Temperature Reading	1.5
Total Containers.		Corrected Temperature	1.2

Preservative Codes

None NO DI Water H_2O
Cool Cool MeOH Me
HCL. HC HNO_3 HN
H_2SO_4 H_2 NaOH Na
H_3PO_4 HP
$NaHSO_4$ NABIS
$Na_2S_2O_3$ $NaSO_3$
Zn Acetate+NaOH Zn
NaOH+Ascorbic Acid SAPC

Sample Identification	Matrix	Date Sampled	Time Sampled	Depth	Grab/ Comp	# of Cont	Pres. Code	Parameters: B-Tex	TPH	Chlorides	Sample Comments
AH-16@ 1ft	S	7-25-23	9.04	1ft	G	1		X	X	X	
AH-16@ 2ft	S	7-25-23	9:11	2ft	G	1					
AH-16@ 3ft	S	7-25-23	9:16	3ft	G	1					
AH-17@ 1ft	S	7-25-23	9.32	1ft	G	1					
AH-17@ 2ft	S	7-25-23	9:37	2ft	G	1					
AH-17@ 3ft	S	7-25-23	9.44	3ft	G	1					
AH-17@ 4ft	S	7-25-23	9:50	4ft	G	1					
AH-18@ 1ft	S	7-25-23	9:57	1ft	G	1					
AH-18@ 2ft	S	7-25-23	10:03	2ft	G	1					
AH-18@ 3ft	S	7-25-23	10:08	3ft	G	1					

Total 200.7 / 6010 200.8 / 6020: 8RCRA 13PPM Texas 11 Al Sb As Ba Be B Cd Ca Cr Co Cu Fe Pb Mg Mn Mo Ni K Se Ag SiO_2 Na Sr Tl Sn U V Zn
Circle Method(s) and Metal(s) to be analyzed TCLP / SPLP 6010 8RCRA Sb As Ba Be Cd Cr Co Cu Pb Mn Mo Ni Se Ag Tl U Hg 1631 / 245.1 / 7470 / 7471

Notice: Signature of this document and relinquishment of samples constitutes a valid purchase order from client company to Eurofins Xenco, its affiliates and subcontractors. It assigns standard terms and conditions of service. Eurofins Xenco will be liable only for the cost of samples and shall not assume any responsibility for any losses or expenses incurred by the client if such losses are due to circumstances beyond the control of Eurofins Xenco. A minimum charge of $85.00 will be applied to each project and a charge of $5 for each sample submitted to Eurofins Xenco, but not analyzed. These terms will be enforced unless previously negotiated.

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1			2		
3			4		
5			6		

Revised Date: 08/25/2020 Rev. 2020.2

Received by OCD: 9/20/2024 8:26:56 AM
Released to Imaging: 12/18/2024 7:45:13 AM
8/8/2023
Page 99 of 104

Page 165 of 1291

eurofins | Environment Testing Xenco

Chain of Custody

Houston, TX (281) 240-4200 Dallas TX (214) 902-0300
Midland, TX (432) 704-5440, San Antonio, TX (210) 509-3334
EL Paso, TX (915) 585-3443 Lubbock, TX (806) 794-1296
Hobbs, NM (575) 392-7550, Carlsbad, NM (575) 988-3199

Work Order No: 31305

www.xenco.com Page 3 of

Project Manager:	Jamey fowler	Bill to: (if different)	montgamery floyd
Company Name	Tellus services	Company Name:	permian Resources
Address:	4000 N Big spring	Address	
City, State ZIP:	midland TX 79705	City, State ZIP:	
Phone:	432-557-0934 Email	Jamey@Tellus services	

Work Order Comments

Program. UST/PST ☐ PRP ☐ Brownfields ☐ RRC ☐ Superfund ☐
State of Project:
Reporting Level II ☐ Level III ☐ PST/UST ☐ TRRP ☐ Level IV ☐
Deliverables. EDD ☐ ADaPT ☐ Other:

Project Name	Jalapeno	Turn Around	
Project Number:		☒ Routine ☐ Rush	
Project Location	Lea CO, NM	Due Date	
Sampler's Name:	Joe Bellor	TAT starts the day received by the lab, if received by 4:30pm	
PO #			

SAMPLE RECEIPT			
Temp Blank.	Yes No	Wet Ice:	Yes No
Samples Received Intact:	Yes No	Thermometer ID	IR6
Cooler Custody Seals.	Yes No N/A	Correction Factor:	-0.3
Sample Custody Seals.	Yes No N/A	Temperature Reading	1.5
Total Containers.		Corrected Temperature.	1.2

Sample Identification	Matrix	Date Sampled	Time Sampled	Depth	Grab/ Comp	# of Cont	Pres. Code	Parameters: BTEX	TPH	Chlorides
AH-19@ 1Ft	S	7-25-23	10:17	1ft	G	1		X	X	X
AH-19@ 2Ft	S	7-25-23	10:23	2ft	G	1				
AH-19@ 3Ft	S	7-25-23	10:29	3ft	G	1				
AH-19@ 4Ft	S	7-25-23	10:38	4ft	G	1				
AH-5@ 2Ft	S	7-21-23	9:46	2ft	G	1				
AH-8@ 2ft	S	7-21-23	9:57	2ft	G	1				
AH-3@ 1Ft	S	7-21-23	9:15	1ft	G	1				
AH-1@ 2ft	S	7-21-23	8:52	2ft	G	1				
AH-2@ 4Ft	S	7-21-23	9:10	4ft	G	1				
AH-2@ 1ft	S	7-21-23	9:02	1ft	G	1				

Preservative Codes

None NO DI Water H_2O
Cool Cool MeOH Me
HCL HC HNO_3 HN
H_2SO_4 H_2 NaOH Na
H_3PO_4 HP
$NaHSO_4$ NABIS
$Na_2S_2O_3$ NaSO$_3$
Zn Acetate+NaOH Zn
NaOH+Ascorbic Acid SAPC

Sample Comments

Total 200.7 / 6010 200.8 / 6020: 8RCRA 13PPM Texas 11 Al Sb As Ba Be B Cd Ca Cr Co Cu Fe Pb Mg Mn Mo Ni K Se Ag SiO_2 Na Sr Tl Sn U V Zn
Circle Method(s) and Metal(s) to be analyzed TCLP / SPLP 6010 8RCRA Sb As Ba Be Cd Cr Co Cu Pb Mn Mo Ni Se Ag Tl U Hg 1631 / 245.1 / 7470 / 7471

Notice: Signature of this document and relinquishment of samples constitutes a valid purchase order from client company to Eurofins Xenco, its affiliates and subcontractors. It assigns standard terms and conditions of service. Eurofins Xenco will be liable only for the cost of samples and shall not assume any responsibility for any losses or expenses incurred by the client if such losses are due to circumstances beyond the control of Eurofins Xenco. A minimum charge of $85.00 will be applied to each project and a charge of $5 for each sample submitted to Eurofins Xenco, but not analyzed. These terms will be enforced unless previously negotiated.

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1			2		
3		7/28/23	4		
5		900	6		

Revised Date: 08/25/2020 Rev 2020.2

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

8/8/2023

Page 100 of 104

Page 166 of 1291

eurofins | Environment Testing Xenco

Chain of Custody

Houston, TX (281) 240-4200, Dallas, TX (214) 902-0300
Midland, TX (432) 704-5440, San Antonio, TX (210) 509-3334
EL Paso, TX (915) 585-3443 Lubbock, TX (806) 794-1296
Hobbs, NM (575) 392-7550 Carlsbad, NM (575) 988-3199

Work Order No: 31305

www.xenco.com Page 4 of

Project Manager	Jamey Fowler	Bill to (if different)	Montgomery Floyd
Company Name	Tellus services	Company Name	Permian Resources
Address	4000 N Big Spring	Address	
City, State ZIP	Midland TX 79705	City, State ZIP	
Phone	432-557-0934	Email	Jamey@Tellusservices

Work Order Comments

Program: UST/PST ☐ PRP ☐ Brownfields ☐ RRC ☐ Superfund ☐
State of Project:
Reporting Level II ☐ Level III ☐ PST/UST ☐ TRRP ☐ Level IV ☐
Deliverables EDD ☐ ADaPT ☐ Other

Project Name:	Jalapeno	Turn Around	☐ Routine ☐ Rush
Project Number		Due Date	
Project Location	Lea CO, NM	TAT starts the day received by the lab, if received by 4.30pm	
Sampler's Name	Joe Bellor		
PO #			

SAMPLE RECEIPT			
Temp Blank.	Yes (No)	Wet Ice	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID	IR8
Cooler Custody Seals:	Yes No (N/A)	Correction Factor	-0.2
Sample Custody Seals:	Yes No (N/A)	Temperature Reading:	1.5
Total Containers.		Corrected Temperature	1.2

Preservative Codes

None NO; DI Water H_2O; Cool Cool; MeOH Me; HCL HC; HNO_3 HN; H_2SO_4 H_2; NaOH Na; H_3PO_4 HP; $NaHSO_4$ NABIS; $Na_2S_2O_3$ $NaSO_3$; Zn Acetate+NaOH Zn; NaOH+Ascorbic Acid SAPC

Sample Identification	Matrix	Date Sampled	Time Sampled	Depth	Grab/ Comp	# of Cont	Pres. Code	Parameters: BTEX	TPH	Chlorides	Sample Comments
AH-3@3ft	S	7-21-23	9:20	3ft	G	1		X	X	X	
AH-5@1ft	S	7-21-23	9:42	1ft	G	1					
AH-4@4ft	S	7-21-23	9:39	4ft	G	1					
AH-3@4ft	S	7-21-23	9:22	4ft	G	1					
AH-2@3ft	S	7-21-23	9:08	3ft	G	1					
AH-4@2ft	S	7-21-23	9:32	2ft	G	1					
AH-4@3ft	S	7-21-23	9:34	3ft	G	1					
AH-1@1ft	S	7-21-23	8:49	1ft	G	1					
AH-03@2ft	S	7-21-23	9:17	2ft	G	1					
AH-2@2ft	S	7-21-23	9:05	2ft	G	1					

Total 200.7 / 6010 200.8 / 6020: 8RCRA 13PPM Texas 11 Al Sb As Ba Be B Cd Ca Cr Co Cu Fe Pb Mg Mn Mo Ni K Se Ag SiO_2 Na Sr Tl Sn U V Zn

Circle Method(s) and Metal(s) to be analyzed TCLP / SPLP 6010 8RCRA Sb As Ba Be Cd Cr Co Cu Pb Mn Mo Ni Se Ag Tl U Hg 1631 / 245 1 / 7470 / 7471

Notice: Signature of this document and relinquishment of samples constitutes a valid purchase order from client company to Eurofins Xenco, its affiliates and subcontractors. It assigns standard terms and conditions of service. Eurofins Xenco will be liable only for the cost of samples and shall not assume any responsibility for any losses or expenses incurred by the client if such losses are due to circumstances beyond the control of Eurofins Xenco. A minimum charge of $85.00 will be applied to each project and a charge of $5 for each sample submitted to Eurofins Xenco, but not analyzed. These terms will be enforced unless previously negotiated.

Relinquished by (Signature)	Received by (Signature)	Date/Time	Relinquished by (Signature)	Received by (Signature)	Date/Time
1			2		
3			4		
5			6		

7/27/23 0800

Revised Date: 08/25/2020 Rev. 2020.2

Received by OCD: 9/20/2024 8:26:56 AM

8/8/2023

Page 101 of 104

Released to Imaging: 12/18/2024 7:45:13 AM

Page 167 of 1291

eurofins | Environment Testing Xenco

Chain of Custody

Houston, TX (281) 240-4200, Dallas TX (214) 902-0300
Midland, TX (432) 704-5440, San Antonio, TX (210) 509-3334
EL Paso, TX (915) 585-3443 Lubbock, TX (806) 794-1296
Hobbs, NM (575) 392-7550 Carlsbad, NM (575) 988-3199

Work Order No: 31305

www.xenco.com Page 5 of 5

Project Manager:	Jamey fowler	Bill to. (if different)	montgomery floyd
Company Name:	Tellus services	Company Name:	Permian Resources
Address.	4000 N Big spring	Address.	
City, State ZIP:	midland TX 79705	City, State ZIP:	
Phone:	432-557-0434	Email:	Jamey@Tellus services

Work Order Comments

Program: UST/PST ☐ PRP ☐ Brownfields ☐ RRC ☐ Superfund ☐
State of Project:
Reporting Level II ☐ Level III ☐ PST/UST ☐ TRRP ☐ Level IV ☐
Deliverables EDD ☐ ADaPT ☐ Other:

Project Name:	Jalapeno	Turn Around	
Project Number:		☒ Routine ☐ Rush	
Project Location.	Lea CO, NM	Due Date:	
Sampler's Name:	Joe Belloc	TAT starts the day received by the lab, if received by 4:30pm	
PO #			

SAMPLE RECEIPT			
Temp Blank.	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID:	IR2
Cooler Custody Seals:	Yes No (N/A)	Correction Factor:	-0.3
Sample Custody Seals:	Yes No (N/A)	Temperature Reading	1.5
Total Containers.		Corrected Temperature:	1.2

ANALYSIS REQUEST

Preservative Codes

None NO DI Water H_2O
Cool Cool MeOH Me
HCL. HC HNO_3 HN
H_2SO_4 H_2 NaOH Na
H_3PO_4 HP
$NaHSO_4$ NABIS
$Na_2S_2O_3$ $NaSO_3$
Zn Acetate+NaOH Zn
NaOH+Ascorbic Acid SAPC

Sample Identification	Matrix	Date Sampled	Time Sampled	Depth	Grab/ Comp	# of Cont	Pres. Code	Parameters: BTEX	TPH	Chlorides	Sample Comments
AH-4 @ 1ft	S	7-21-23	9:29	1ft	G	1		X	X	X	
AH-1 @ 4ft	S		8:57	4ft		1					
AH-1 @ 3ft	S		8:54	3ft		1					
AH-7 @ 1ft	S		10:30	1ft							
AH-7 @ 2ft	S		10:33	2ft							
AH 8 @ 2ft	S		10:50	2ft							
AH-10 @ 2ft	S		12:56	2ft							
AH-7 @ 3ft	S		10:37	3ft							
AH-8 @ 1ft	S		10:44	1ft							
AH-10 @ 1ft	S		12:48	1ft							

Total 200.7 / 6010 200.8 / 6020: 8RCRA 13PPM Texas 11 Al Sb As Ba Be B Cd Ca Cr Co Cu Fe Pb Mg Mn Mo Ni K Se Ag SiO_2 Na Sr Tl Sn U V Zn
Circle Method(s) and Metal(s) to be analyzed TCLP / SPLP 6010 8RCRA Sb As Ba Be Cd Cr Co Cu Pb Mn Mo Ni Se Ag Tl U Hg 1631 / 245 1 / 7470 / 7471

Notice: Signature of this document and relinquishment of samples constitutes a valid purchase order from client company to Eurofins Xenco, its affiliates and subcontractors. It assigns standard terms and conditions of service. Eurofins Xenco will be liable only for the cost of samples and shall not assume any responsibility for any losses or expenses incurred by the client if such losses are due to circumstances beyond the control of Eurofins Xenco. A minimum charge of $85.00 will be applied to each project and a charge of $5 for each sample submitted to Eurofins Xenco, but not analyzed. These terms will be enforced unless previously negotiated

Relinquished by: (Signature)	Received by: (Signature)	Date/Time	Relinquished by: (Signature)	Received by: (Signature)	Date/Time
1		7/27/23 0800	4		
3			6		
5					

Revised Date: 08/25/2020 Rev 2020.2

Received by OCD: 9/20/2024 8:26:56 AM
Released to Imaging: 12/18/2024 7:45:13 AM
8/8/2023
Page 102 of 104

Page 168 of 1291

eurofins | Environment Testing Xenco

Chain of Custody

Houston, TX (281) 240-4200, Dallas, TX (214) 902-0300
Midland, TX (432) 704-5440, San Antonio, TX (210) 509-3334
EL Paso TX (915) 585-3443 Lubbock, TX (806) 794-1296
Hobbs, NM (575) 392-7550, Carlsbad, NM (575) 988-3199

Work Order No: 31305

www.xenco.com Page 6 of 6

Project Manager	Jamey fowler	Bill to (if different)	montgomery floyd
Company Name	Tellus services	Company Name	permian Resources
Address	4000 N Big Spring	Address	
City, State ZIP	midland TX 79705	City State ZIP	
Phone	432-557-0934	Email	Jamey@Tellusservices

Work Order Comments

Program: UST/PST ☐ PRP ☐ Brownfields ☐ RRC ☐ Superfund ☐
State of Project:
Reporting Level II ☐ Level III ☐ PST/UST ☐ TRRP ☐ Level IV ☐
Deliverables EDD ☐ ADaPT ☐ Other:

Project Name	Jalapeno	Turn Around	☒ Routine ☐ Rush
Project Number		Due Date	
Project Location	Lea CO, NM	TAT starts the day received by the lab, if received by 4:30pm	
Sampler's Name	Joe Bello		
PO #			

SAMPLE RECEIPT			
Temp Blank.	Yes (No)	Wet Ice:	(Yes) No
Samples Received Intact:	(Yes) No	Thermometer ID	IR8
Cooler Custody Seals:	Yes No (N/A)	Correction Factor	-0.3
Sample Custody Seals:	Yes No (N/A)	Temperature Reading	1.5
Total Containers:		Corrected Temperature	1.2

Sample Identification	Matrix	Date Sampled	Time Sampled	Depth	Grab/ Comp	# of Cont	Pres. Code	Parameters: B-tex	TPH	Chlorides
AH-9 @ 2ft	S	7-21-23	2:30	2ft	G	1		X	X	X

ANALYSIS REQUEST

Preservative Codes

None NO — DI Water H_2O
Cool Cool — MeOH Me
HCL HC — HNO_3 HN
H_2SO_4 H_2 — NaOH Na
H_3PO_4 HP
NaHSO$_4$ NABIS
$Na_2S_2O_3$ $NaSO_3$
Zn Acetate+NaOH Zn
NaOH+Ascorbic Acid SAPC

Sample Comments

Total 200.7 / 6010 200.8 / 6020: 8RCRA 13PPM Texas 11 Al Sb As Ba Be B Cd Ca Cr Co Cu Fe Pb Mg Mn Mo Ni K Se Ag SiO_2 Na Sr Tl Sn U V Zn
Circle Method(s) and Metal(s) to be analyzed TCLP / SPLP 6010 8RCRA Sb As Ba Be Cd Cr Co Cu Pb Mn Mo Ni Se Ag Tl U Hg 1631 / 245 1 / 7470 / 7471

Notice: Signature of this document and relinquishment of samples constitutes a valid purchase order from client company to Eurofins Xenco, its affiliates and subcontractors. It assigns standard terms and conditions of service. Eurofins Xenco will be liable only for the cost of samples and shall not assume any responsibility for any losses or expenses incurred by the client if such losses are due to circumstances beyond the control of Eurofins Xenco. A minimum charge of $85.00 will be applied to each project and a charge of $5 for each sample submitted to Eurofins Xenco, but not analyzed. These terms will be enforced unless previously negotiated.

Relinquished by (Signature)	Received by (Signature)	Date/Time	Relinquished by (Signature)	Received by (Signature)	Date/Time
1			2		
3			4		
5		0840	6		

Revised Date: 08/25/2020 Rev. 2020.2

Received by OCD: 9/20/2024 8:26:56 AM
Released to Imaging: 12/18/2024 7:45:13 AM
8/8/2023

Login Sample Receipt Checklist

Client: Tellus Services

Job Number: 880-31305-1
SDG Number: Lea Co, NM

Login Number: 31305
List Number: 1
Creator: Rodriguez, Leticia

List Source: Eurofins Midland

Question	Answer	Comment
The cooler's custody seal, if present, is intact.	N/A	
Sample custody seals, if present, are intact.	N/A	
The cooler or samples do not appear to have been compromised or tampered with.	True	
Samples were received on ice.	True	
Cooler Temperature is acceptable.	True	
Cooler Temperature is recorded.	True	
COC is present.	True	
COC is filled out in ink and legible.	True	
COC is filled out with all pertinent information.	True	
Is the Field Sampler's name present on COC?	True	
There are no discrepancies between the containers received and the COC.	True	
Samples are received within Holding Time (excluding tests with immediate HTs)	True	
Sample containers have legible labels.	True	
Containers are not broken or leaking.	True	
Sample collection date/times are provided.	True	
Appropriate sample containers are used.	True	
Sample bottles are completely filled.	True	
Sample Preservation Verified.	N/A	
There is sufficient vol. for all requested analyses, incl. any requested MS/MSDs	True	
Containers requiring zero headspace have no headspace or bubble is <6mm (1/4").	N/A	

PERMIAN BASIN
ENVIRONMENTAL LAB, LP
1400 Rankin Hwy
Midland, TX 79701

PBELAB

Analytical Report

Prepared for:

Jamey Fowler

Tellus Consulting, LLC

4000 North Big Spring Street Suite 109

Midland, TX 79705

Project: Jalapeno

Project Number: CDEV #11845

Location: Lea Co., NM

Lab Order Number: 3K29007

NELAP ACCREDITED TNI LABORATORY

Current Certification

Report Date: 12/04/23

Tellus Consulting, LLC
4000 North Big Spring Street Suite 109
Midland TX, 79705

Project: Jalapeno
Project Number: CDEV #11845
Project Manager: Jamey Fowler

ANALYTICAL REPORT FOR SAMPLES

Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
BH-1 @ 2FT	3K29007-01	Soil	11/17/23 08:03	11-29-2023 13:30
BH-2 @ 2FT	3K29007-02	Soil	11/17/23 08:06	11-29-2023 13:30
BH-3 @ 2FT	3K29007-03	Soil	11/17/23 08:09	11-29-2023 13:30
BH-4 @ 2FT	3K29007-04	Soil	11/17/23 08:12	11-29-2023 13:30
BH-5 @ 2FT	3K29007-05	Soil	11/17/23 08:15	11-29-2023 13:30
BH-6 @ 2FT	3K29007-06	Soil	11/17/23 08:18	11-29-2023 13:30
BH-7 @ 2FT	3K29007-07	Soil	11/17/23 08:21	11-29-2023 13:30
BH-8 @ 2FT	3K29007-08	Soil	11/17/23 08:24	11-29-2023 13:30
BH-9 @ 2FT	3K29007-09	Soil	11/17/23 08:27	11-29-2023 13:30
BH-10 @ 2FT	3K29007-10	Soil	11/17/23 08:30	11-29-2023 13:30
BH-11 @ 2FT	3K29007-11	Soil	11/17/23 08:33	11-29-2023 13:30
BH-12 @ 2FT	3K29007-12	Soil	11/17/23 08:36	11-29-2023 13:30
BH-13 @ 2FT	3K29007-13	Soil	11/17/23 08:39	11-29-2023 13:30
BH-14 @ 2FT	3K29007-14	Soil	11/17/23 08:42	11-29-2023 13:30
BH-15 @ 2FT	3K29007-15	Soil	11/17/23 08:45	11-29-2023 13:30
BH-16 @ 2FT	3K29007-16	Soil	11/17/23 08:48	11-29-2023 13:30
BH-17 @ 2FT	3K29007-17	Soil	11/17/23 08:51	11-29-2023 13:30
BH-18 @ 2FT	3K29007-18	Soil	11/17/23 08:54	11-29-2023 13:30
BH-20 @ 2FT	3K29007-19	Soil	11/17/23 09:00	11-29-2023 13:30
BH-21 @ 2FT	3K29007-20	Soil	11/17/23 09:03	11-29-2023 13:30
BH-22 @ 2FT	3K29007-21	Soil	11/17/23 09:06	11-29-2023 13:30
BH-23 @ 2FT	3K29007-22	Soil	11/17/23 09:09	11-29-2023 13:30
BH-24 @ 2FT	3K29007-23	Soil	11/17/23 09:12	11-29-2023 13:30
BH-25 @ 2FT	3K29007-24	Soil	11/17/23 09:15	11-29-2023 13:30
NW-1 @ 1FT	3K29007-25	Soil	11/17/23 14:15	11-29-2023 13:30
SW-1 @ 1FT	3K29007-26	Soil	11/17/23 14:27	11-29-2023 13:30

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-1 @ 2FT

3K29007-01 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 14:22	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 14:22	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 14:22	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 14:22	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 14:22	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*114 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 14:22*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.5 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 14:22*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 14:22	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 14:22	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
Surrogate: 1-Chlorooctane		*101 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Surrogate: o-Terphenyl		*114 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	11/29/23 17:00	11/30/23 06:15	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**10.9**	1.05	mg/kg dry	1	P3K3003	11/30/23 12:00	11/30/23 14:42	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-2 @ 2FT

3K29007-02 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00110	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 14:46	EPA 8021B	
Toluene	ND	0.00110	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 14:46	EPA 8021B	
Ethylbenzene	ND	0.00110	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 14:46	EPA 8021B	
Xylene (p/m)	ND	0.00220	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 14:46	EPA 8021B	
Xylene (o)	ND	0.00110	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 14:46	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*97.0 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 14:46*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 14:46*	*EPA 8021B*	
Xylenes (total)	ND	0.00220	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 14:46	EPA 8021B	
Total BTEX	ND	0.00110	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 14:46	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.5	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C12-C28	ND	27.5	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C28-C35	ND	27.5	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
Surrogate: 1-Chlorooctane		*102 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Surrogate: o-Terphenyl		*115 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.5	mg/kg dry	1	[CALC]	11/29/23 17:00	11/30/23 06:15	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**70.0**	1.10	mg/kg dry	1	P3K3003	11/30/23 12:00	11/30/23 15:25	EPA 300.0	
% Moisture	**9.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-3 @ 2FT

3K29007-03 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 15:15	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 15:15	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 15:15	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 15:15	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 15:15	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 15:15*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*93.7 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 15:15*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 15:15	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 15:15	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
Surrogate: 1-Chlorooctane		*104 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Surrogate: o-Terphenyl		*115 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	11/29/23 17:00	11/30/23 06:15	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**46.5**	1.04	mg/kg dry	1	P3K3003	11/30/23 12:00	11/30/23 15:39	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-4 @ 2FT

3K29007-04 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 15:56	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 15:56	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 15:56	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 15:56	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 15:56	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*106 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 15:56*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*88.1 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 15:56*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 15:56	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 15:56	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
Surrogate: 1-Chlorooctane		*95.2 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Surrogate: o-Terphenyl		*108 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	11/29/23 17:00	11/30/23 06:15	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**32.1**	1.05	mg/kg dry	1	P3K3003	11/30/23 12:00	11/30/23 15:53	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-5 @ 2FT

3K29007-05 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 16:21	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 16:21	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 16:21	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 16:21	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 16:21	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.9 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 16:21*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 16:21*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 16:21	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 16:21	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
Surrogate: 1-Chlorooctane		*98.6 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Surrogate: o-Terphenyl		*110 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	11/29/23 17:00	11/30/23 06:15	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**49.0**	1.06	mg/kg dry	1	P3K3003	11/30/23 12:00	11/30/23 16:08	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-6 @ 2FT

3K29007-06 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00108	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 16:45	EPA 8021B	
Toluene	ND	0.00108	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 16:45	EPA 8021B	
Ethylbenzene	ND	0.00108	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 16:45	EPA 8021B	
Xylene (p/m)	ND	0.00215	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 16:45	EPA 8021B	
Xylene (o)	ND	0.00108	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 16:45	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.5 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 16:45*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 16:45*	*EPA 8021B*	
Xylenes (total)	ND	0.00215	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 16:45	EPA 8021B	
Total BTEX	ND	0.00108	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 16:45	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.9	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C12-C28	ND	26.9	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C28-C35	ND	26.9	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
Surrogate: 1-Chlorooctane		*81.9 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Surrogate: o-Terphenyl		*97.7 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.9	mg/kg dry	1	[CALC]	11/29/23 17:00	11/30/23 06:15	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**28.0**	1.08	mg/kg dry	1	P3K3003	11/30/23 12:00	11/30/23 16:22	EPA 300.0	
% Moisture	**7.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-7 @ 2FT

3K29007-07 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 17:09	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 17:09	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 17:09	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 17:09	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 17:09	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.2 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 17:09*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 17:09*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 17:09	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 17:09	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
Surrogate: 1-Chlorooctane		*104 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Surrogate: o-Terphenyl		*122 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	11/29/23 17:00	11/30/23 06:15	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**21.3**	1.05	mg/kg dry	1	P3K3003	11/30/23 12:00	11/30/23 16:36	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-8 @ 2FT

3K29007-08 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00119	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 17:34	EPA 8021B	
Toluene	ND	0.00119	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 17:34	EPA 8021B	
Ethylbenzene	ND	0.00119	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 17:34	EPA 8021B	
Xylene (p/m)	ND	0.00238	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 17:34	EPA 8021B	
Xylene (o)	ND	0.00119	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 17:34	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*95.9 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 17:34*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 17:34*	*EPA 8021B*	
Xylenes (total)	ND	0.00238	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 17:34	EPA 8021B	
Total BTEX	ND	0.00119	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 17:34	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	29.8	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C12-C28	ND	29.8	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C28-C35	ND	29.8	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
Surrogate: 1-Chlorooctane		*97.6 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Surrogate: o-Terphenyl		*113 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	29.8	mg/kg dry	1	[CALC]	11/29/23 17:00	11/30/23 06:15	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**57.6**	1.19	mg/kg dry	1	P3K3003	11/30/23 12:00	11/30/23 16:51	EPA 300.0	
% Moisture	**16.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-9 @ 2FT

3K29007-09 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 17:58	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 17:58	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 17:58	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 17:58	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 17:58	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.0 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 17:58*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 17:58*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 17:58	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 17:58	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
Surrogate: 1-Chlorooctane		*101 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Surrogate: o-Terphenyl		*116 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	11/29/23 17:00	11/30/23 06:15	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**44.7**	1.06	mg/kg dry	1	P3K3003	11/30/23 12:00	11/30/23 17:05	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-10 @ 2FT

3K29007-10 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 18:23	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 18:23	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 18:23	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 18:23	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 18:23	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 18:23*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.9 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 18:23*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 18:23	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 18:23	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
Surrogate: 1-Chlorooctane		*94.7 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Surrogate: o-Terphenyl		*110 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	11/29/23 17:00	11/30/23 06:15	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**164**	1.06	mg/kg dry	1	P3K3003	11/30/23 12:00	11/30/23 17:19	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-11 @ 2FT

3K29007-11 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 19:36	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 19:36	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 19:36	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 19:36	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 19:36	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.0 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 19:36*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 19:36*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 19:36	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 19:36	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
Surrogate: 1-Chlorooctane		*96.8 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Surrogate: o-Terphenyl		*111 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	11/29/23 17:00	11/30/23 06:15	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**21.0**	1.05	mg/kg dry	1	P3K3003	11/30/23 12:00	11/30/23 18:02	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-12 @ 2FT

3K29007-12 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00111	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 20:00	EPA 8021B	
Toluene	ND	0.00111	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 20:00	EPA 8021B	
Ethylbenzene	ND	0.00111	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 20:00	EPA 8021B	
Xylene (p/m)	ND	0.00222	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 20:00	EPA 8021B	
Xylene (o)	ND	0.00111	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 20:00	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*95.7 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 20:00*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 20:00*	*EPA 8021B*	
Xylenes (total)	ND	0.00222	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 20:00	EPA 8021B	
Total BTEX	ND	0.00111	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 20:00	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.8	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C12-C28	ND	27.8	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C28-C35	ND	27.8	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
Surrogate: 1-Chlorooctane		*94.9 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Surrogate: o-Terphenyl		*112 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.8	mg/kg dry	1	[CALC]	11/29/23 17:00	11/30/23 06:15	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**119**	1.11	mg/kg dry	1	P3K3003	11/30/23 12:00	11/30/23 18:45	EPA 300.0	
% Moisture	**10.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-13 @ 2FT

3K29007-13 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00115	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 20:24	EPA 8021B	
Toluene	ND	0.00115	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 20:24	EPA 8021B	
Ethylbenzene	ND	0.00115	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 20:24	EPA 8021B	
Xylene (p/m)	ND	0.00230	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 20:24	EPA 8021B	
Xylene (o)	ND	0.00115	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 20:24	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.4 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 20:24*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 20:24*	*EPA 8021B*	
Xylenes (total)	ND	0.00230	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 20:24	EPA 8021B	
Total BTEX	ND	0.00115	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 20:24	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	28.7	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C12-C28	ND	28.7	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C28-C35	ND	28.7	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
Surrogate: 1-Chlorooctane		*98.1 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Surrogate: o-Terphenyl		*114 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	28.7	mg/kg dry	1	[CALC]	11/29/23 17:00	11/30/23 06:15	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**28.2**	1.15	mg/kg dry	1	P3K3003	11/30/23 12:00	11/30/23 19:00	EPA 300.0	
% Moisture	**14.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-14 @ 2FT

3K29007-14 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00123	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 20:49	EPA 8021B	
Toluene	ND	0.00123	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 20:49	EPA 8021B	
Ethylbenzene	ND	0.00123	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 20:49	EPA 8021B	
Xylene (p/m)	ND	0.00247	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 20:49	EPA 8021B	
Xylene (o)	ND	0.00123	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 20:49	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 20:49*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.8 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 20:49*	*EPA 8021B*	
Xylenes (total)	ND	0.00247	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 20:49	EPA 8021B	
Total BTEX	ND	0.00123	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 20:49	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	30.9	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C12-C28	ND	30.9	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C28-C35	ND	30.9	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
Surrogate: 1-Chlorooctane		*96.6 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Surrogate: o-Terphenyl		*113 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	30.9	mg/kg dry	1	[CALC]	11/29/23 17:00	11/30/23 06:15	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**128**	1.23	mg/kg dry	1	P3K3003	11/30/23 12:00	11/30/23 19:14	EPA 300.0	
% Moisture	**19.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-15 @ 2FT

3K29007-15 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00123	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 21:13	EPA 8021B	
Toluene	ND	0.00123	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 21:13	EPA 8021B	
Ethylbenzene	ND	0.00123	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 21:13	EPA 8021B	
Xylene (p/m)	ND	0.00247	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 21:13	EPA 8021B	
Xylene (o)	ND	0.00123	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 21:13	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.2 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 21:13*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*118 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 21:13*	*EPA 8021B*	
Xylenes (total)	ND	0.00247	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 21:13	EPA 8021B	
Total BTEX	ND	0.00123	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 21:13	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	30.9	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C12-C28	ND	30.9	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C28-C35	ND	30.9	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
Surrogate: 1-Chlorooctane		*101 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Surrogate: o-Terphenyl		*114 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	30.9	mg/kg dry	1	[CALC]	11/29/23 17:00	11/30/23 06:15	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**75.5**	1.23	mg/kg dry	1	P3K3003	11/30/23 12:00	11/30/23 19:29	EPA 300.0	
% Moisture	**19.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-16 @ 2FT

3K29007-16 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 21:37	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 21:37	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 21:37	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 21:37	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 21:37	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 21:37*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.1 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 21:37*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 21:37	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 21:37	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
Surrogate: 1-Chlorooctane		*99.7 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Surrogate: o-Terphenyl		*113 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	11/29/23 17:00	11/30/23 06:15	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**13.1**	1.06	mg/kg dry	1	P3K3003	11/30/23 12:00	11/30/23 19:43	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-17 @ 2FT

3K29007-17 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 22:02	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 22:02	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 22:02	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 22:02	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 22:02	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.4 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 22:02*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 22:02*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 22:02	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 22:02	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
Surrogate: 1-Chlorooctane		*99.0 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Surrogate: o-Terphenyl		*108 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	11/29/23 17:00	11/30/23 06:15	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**36.6**	1.04	mg/kg dry	1	P3K3003	11/30/23 12:00	11/30/23 19:57	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-18 @ 2FT

3K29007-18 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00109	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 22:26	EPA 8021B	
Toluene	ND	0.00109	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 22:26	EPA 8021B	
Ethylbenzene	ND	0.00109	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 22:26	EPA 8021B	
Xylene (p/m)	ND	0.00217	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 22:26	EPA 8021B	
Xylene (o)	ND	0.00109	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 22:26	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 22:26*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.3 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 22:26*	*EPA 8021B*	
Xylenes (total)	ND	0.00217	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 22:26	EPA 8021B	
Total BTEX	ND	0.00109	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 22:26	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.2	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C12-C28	ND	27.2	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C28-C35	ND	27.2	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
Surrogate: 1-Chlorooctane		*102 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Surrogate: o-Terphenyl		*115 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.2	mg/kg dry	1	[CALC]	11/29/23 17:00	11/30/23 06:15	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**31.7**	1.09	mg/kg dry	1	P3K3003	11/30/23 12:00	11/30/23 20:12	EPA 300.0	
% Moisture	**8.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-20 @ 2FT

3K29007-19 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00109	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 22:50	EPA 8021B	
Toluene	ND	0.00109	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 22:50	EPA 8021B	
Ethylbenzene	ND	0.00109	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 22:50	EPA 8021B	
Xylene (p/m)	ND	0.00217	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 22:50	EPA 8021B	
Xylene (o)	ND	0.00109	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 22:50	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 22:50*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.2 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 22:50*	*EPA 8021B*	
Xylenes (total)	ND	0.00217	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 22:50	EPA 8021B	
Total BTEX	ND	0.00109	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 22:50	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.2	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C12-C28	ND	27.2	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C28-C35	ND	27.2	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
Surrogate: 1-Chlorooctane		*116 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Surrogate: o-Terphenyl		*129 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.2	mg/kg dry	1	[CALC]	11/29/23 17:00	11/30/23 06:15	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**24.8**	1.09	mg/kg dry	1	P3K3003	11/30/23 12:00	11/30/23 20:26	EPA 300.0	
% Moisture	**8.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-21 @ 2FT

3K29007-20 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00109	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 23:15	EPA 8021B	
Toluene	ND	0.00109	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 23:15	EPA 8021B	
Ethylbenzene	ND	0.00109	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 23:15	EPA 8021B	
Xylene (p/m)	ND	0.00217	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 23:15	EPA 8021B	
Xylene (o)	ND	0.00109	mg/kg dry	1	P3K2904	11/29/23 16:00	11/30/23 23:15	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.6 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 23:15*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3K2904*	*11/29/23 16:00*	*11/30/23 23:15*	*EPA 8021B*	
Xylenes (total)	ND	0.00217	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 23:15	EPA 8021B	
Total BTEX	ND	0.00109	mg/kg dry	1	[CALC]	11/29/23 16:00	11/30/23 23:15	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.2	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C12-C28	ND	27.2	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
>C28-C35	ND	27.2	mg/kg dry	1	P3K2903	11/29/23 17:00	11/30/23 06:15	TPH 8015M	
Surrogate: 1-Chlorooctane		*116 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	
Surrogate: o-Terphenyl		*132 %*	*70-130*		*P3K2903*	*11/29/23 17:00*	*11/30/23 06:15*	*TPH 8015M*	*S-GC*
Total Petroleum Hydrocarbon C6-C35	ND	27.2	mg/kg dry	1	[CALC]	11/29/23 17:00	11/30/23 06:15	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**43.7**	1.09	mg/kg dry	1	P3K3003	11/30/23 12:00	11/30/23 20:41	EPA 300.0	
% Moisture	**8.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-22 @ 2FT

3K29007-21 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 02:30	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 02:30	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 02:30	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 02:30	EPA 8021B	
Xylene (o)	**0.00123**	0.00106	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 02:30	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*97.0 %*	*80-120*		*P3K2905*	*11/29/23 16:02*	*12/01/23 02:30*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3K2905*	*11/29/23 16:02*	*12/01/23 02:30*	*EPA 8021B*	
Xylenes (total)	**0.00328**	0.00213	mg/kg dry	1	[CALC]	11/29/23 16:02	12/01/23 02:30	EPA 8021B	
Total BTEX	**0.00123**	0.00106	mg/kg dry	1	[CALC]	11/29/23 16:02	12/01/23 02:30	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3K2902	11/29/23 16:04	11/30/23 06:45	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3K2902	11/29/23 16:04	11/30/23 06:45	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3K2902	11/29/23 16:04	11/30/23 06:45	TPH 8015M	
Surrogate: 1-Chlorooctane		*85.4 %*	*70-130*		*P3K2902*	*11/29/23 16:04*	*11/30/23 06:45*	*TPH 8015M*	
Surrogate: o-Terphenyl		*89.4 %*	*70-130*		*P3K2902*	*11/29/23 16:04*	*11/30/23 06:45*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	11/29/23 16:04	11/30/23 06:45	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**21.4**	1.06	mg/kg dry	1	P3K3009	11/30/23 16:25	12/01/23 05:30	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-23 @ 2FT

3K29007-22 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00111	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 02:54	EPA 8021B	
Toluene	ND	0.00111	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 02:54	EPA 8021B	
Ethylbenzene	**0.00158**	0.00111	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 02:54	EPA 8021B	
Xylene (p/m)	ND	0.00222	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 02:54	EPA 8021B	
Xylene (o)	ND	0.00111	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 02:54	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*118 %*	*80-120*		*P3K2905*	*11/29/23 16:02*	*12/01/23 02:54*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.8 %*	*80-120*		*P3K2905*	*11/29/23 16:02*	*12/01/23 02:54*	*EPA 8021B*	
Xylenes (total)	**0.00304**	0.00222	mg/kg dry	1	[CALC]	11/29/23 16:02	12/01/23 02:54	EPA 8021B	
Total BTEX	**0.00158**	0.00111	mg/kg dry	1	[CALC]	11/29/23 16:02	12/01/23 02:54	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.8	mg/kg dry	1	P3K2902	11/29/23 16:04	11/30/23 07:09	TPH 8015M	
>C12-C28	ND	27.8	mg/kg dry	1	P3K2902	11/29/23 16:04	11/30/23 07:09	TPH 8015M	
>C28-C35	ND	27.8	mg/kg dry	1	P3K2902	11/29/23 16:04	11/30/23 07:09	TPH 8015M	
Surrogate: 1-Chlorooctane		*93.7 %*	*70-130*		*P3K2902*	*11/29/23 16:04*	*11/30/23 07:09*	*TPH 8015M*	
Surrogate: o-Terphenyl		*99.8 %*	*70-130*		*P3K2902*	*11/29/23 16:04*	*11/30/23 07:09*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.8	mg/kg dry	1	[CALC]	11/29/23 16:04	11/30/23 07:09	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**40.0**	1.11	mg/kg dry	1	P3K3009	11/30/23 16:25	12/01/23 06:13	EPA 300.0	
% Moisture	**10.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-24 @ 2FT

3K29007-23 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00110	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 03:18	EPA 8021B	
Toluene	ND	0.00110	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 03:18	EPA 8021B	
Ethylbenzene	ND	0.00110	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 03:18	EPA 8021B	
Xylene (p/m)	ND	0.00220	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 03:18	EPA 8021B	
Xylene (o)	ND	0.00110	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 03:18	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*97.1 %*	*80-120*		*P3K2905*	*11/29/23 16:02*	*12/01/23 03:18*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3K2905*	*11/29/23 16:02*	*12/01/23 03:18*	*EPA 8021B*	
Xylenes (total)	**0.00267**	0.00220	mg/kg dry	1	[CALC]	11/29/23 16:02	12/01/23 03:18	EPA 8021B	
Total BTEX	ND	0.00110	mg/kg dry	1	[CALC]	11/29/23 16:02	12/01/23 03:18	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.5	mg/kg dry	1	P3K2902	11/29/23 16:04	11/30/23 07:33	TPH 8015M	
>C12-C28	ND	27.5	mg/kg dry	1	P3K2902	11/29/23 16:04	11/30/23 07:33	TPH 8015M	
>C28-C35	ND	27.5	mg/kg dry	1	P3K2902	11/29/23 16:04	11/30/23 07:33	TPH 8015M	
Surrogate: 1-Chlorooctane		*83.2 %*	*70-130*		*P3K2902*	*11/29/23 16:04*	*11/30/23 07:33*	*TPH 8015M*	
Surrogate: o-Terphenyl		*88.4 %*	*70-130*		*P3K2902*	*11/29/23 16:04*	*11/30/23 07:33*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.5	mg/kg dry	1	[CALC]	11/29/23 16:04	11/30/23 07:33	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**118**	1.10	mg/kg dry	1	P3K3009	11/30/23 16:25	12/01/23 06:28	EPA 300.0	
% Moisture	**9.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-25 @ 2FT

3K29007-24 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00115	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 03:43	EPA 8021B	
Toluene	ND	0.00115	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 03:43	EPA 8021B	
Ethylbenzene	ND	0.00115	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 03:43	EPA 8021B	
Xylene (p/m)	ND	0.00230	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 03:43	EPA 8021B	
Xylene (o)	ND	0.00115	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 03:43	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3K2905*	*11/29/23 16:02*	*12/01/23 03:43*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.8 %*	*80-120*		*P3K2905*	*11/29/23 16:02*	*12/01/23 03:43*	*EPA 8021B*	
Xylenes (total)	ND	0.00230	mg/kg dry	1	[CALC]	11/29/23 16:02	12/01/23 03:43	EPA 8021B	
Total BTEX	ND	0.00115	mg/kg dry	1	[CALC]	11/29/23 16:02	12/01/23 03:43	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	28.7	mg/kg dry	1	P3K2902	11/29/23 16:04	11/30/23 07:57	TPH 8015M	
>C12-C28	ND	28.7	mg/kg dry	1	P3K2902	11/29/23 16:04	11/30/23 07:57	TPH 8015M	
>C28-C35	ND	28.7	mg/kg dry	1	P3K2902	11/29/23 16:04	11/30/23 07:57	TPH 8015M	
Surrogate: 1-Chlorooctane		*88.5 %*	*70-130*		*P3K2902*	*11/29/23 16:04*	*11/30/23 07:57*	*TPH 8015M*	
Surrogate: o-Terphenyl		*93.8 %*	*70-130*		*P3K2902*	*11/29/23 16:04*	*11/30/23 07:57*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	28.7	mg/kg dry	1	[CALC]	11/29/23 16:04	11/30/23 07:57	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**56.1**	1.15	mg/kg dry	1	P3K3009	11/30/23 16:25	12/01/23 06:42	EPA 300.0	
% Moisture	**13.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

NW-1 @ 1FT

3K29007-25 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 04:07	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 04:07	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 04:07	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 04:07	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 04:07	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3K2905*	*11/29/23 16:02*	*12/01/23 04:07*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*97.2 %*	*80-120*		*P3K2905*	*11/29/23 16:02*	*12/01/23 04:07*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	11/29/23 16:02	12/01/23 04:07	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	11/29/23 16:02	12/01/23 04:07	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3K2902	11/29/23 16:04	11/30/23 08:22	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3K2902	11/29/23 16:04	11/30/23 08:22	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3K2902	11/29/23 16:04	11/30/23 08:22	TPH 8015M	
Surrogate: 1-Chlorooctane		*84.1 %*	*70-130*		*P3K2902*	*11/29/23 16:04*	*11/30/23 08:22*	*TPH 8015M*	
Surrogate: o-Terphenyl		*89.7 %*	*70-130*		*P3K2902*	*11/29/23 16:04*	*11/30/23 08:22*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	11/29/23 16:04	11/30/23 08:22	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**32.2**	1.06	mg/kg dry	1	P3K3009	11/30/23 16:25	12/01/23 06:56	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

SW-1 @ 1FT

3K29007-26 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 04:31	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 04:31	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 04:31	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 04:31	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 04:31	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3K2905*	*11/29/23 16:02*	*12/01/23 04:31*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.5 %*	*80-120*		*P3K2905*	*11/29/23 16:02*	*12/01/23 04:31*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	11/29/23 16:02	12/01/23 04:31	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	11/29/23 16:02	12/01/23 04:31	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3K2902	11/29/23 16:04	11/30/23 08:46	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3K2902	11/29/23 16:04	11/30/23 08:46	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3K2902	11/29/23 16:04	11/30/23 08:46	TPH 8015M	
Surrogate: 1-Chlorooctane		*90.7 %*	*70-130*		*P3K2902*	*11/29/23 16:04*	*11/30/23 08:46*	*TPH 8015M*	
Surrogate: o-Terphenyl		*96.2 %*	*70-130*		*P3K2902*	*11/29/23 16:04*	*11/30/23 08:46*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	11/29/23 16:04	11/30/23 08:46	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**19.7**	1.06	mg/kg dry	1	P3K3009	11/30/23 16:25	12/01/23 07:11	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3K2904 - * DEFAULT PREP *** **										
Blank (P3K2904-BLK1)				Prepared: 11/29/23 Analyzed: 11/30/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 1,4-Difluorobenzene	*0.116*		"	*0.120*		*96.5*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.138*		"	*0.120*		*115*	*80-120*			
LCS (P3K2904-BS1)				Prepared: 11/29/23 Analyzed: 11/30/23						
Benzene	0.116	0.00100	mg/kg	0.100		116	80-120			
Toluene	0.108	0.00100	"	0.100		108	80-120			
Ethylbenzene	0.115	0.00100	"	0.100		115	80-120			
Xylene (p/m)	0.228	0.00200	"	0.200		114	80-120			
Xylene (o)	0.105	0.00100	"	0.100		105	80-120			
Surrogate: 1,4-Difluorobenzene	*0.117*		"	*0.120*		*97.4*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.132*		"	*0.120*		*110*	*80-120*			
LCS Dup (P3K2904-BSD1)				Prepared: 11/29/23 Analyzed: 11/30/23						
Benzene	0.110	0.00100	mg/kg	0.100		110	80-120	5.22	20	
Toluene	0.102	0.00100	"	0.100		102	80-120	5.77	20	
Ethylbenzene	0.109	0.00100	"	0.100		109	80-120	5.95	20	
Xylene (p/m)	0.215	0.00200	"	0.200		107	80-120	6.01	20	
Xylene (o)	0.0981	0.00100	"	0.100		98.1	80-120	6.93	20	
Surrogate: 1,4-Difluorobenzene	*0.117*		"	*0.120*		*97.4*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.131*		"	*0.120*		*109*	*80-120*			
Calibration Check (P3K2904-CCV1)				Prepared: 11/29/23 Analyzed: 11/30/23						
Benzene	0.118	0.00100	mg/kg	0.100		118	80-120			
Toluene	0.111	0.00100	"	0.100		111	80-120			
Ethylbenzene	0.113	0.00100	"	0.100		113	80-120			
Xylene (p/m)	0.233	0.00200	"	0.200		117	80-120			
Xylene (o)	0.108	0.00100	"	0.100		108	80-120			
Surrogate: 4-Bromofluorobenzene	*0.131*		"	*0.120*		*109*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.117*		"	*0.120*		*97.5*	*75-125*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3K2904 - * DEFAULT PREP *** **										
Calibration Check (P3K2904-CCV2)				Prepared: 11/29/23 Analyzed: 11/30/23						
Benzene	0.119	0.00100	mg/kg	0.100		119	80-120			
Toluene	0.114	0.00100	"	0.100		114	80-120			
Ethylbenzene	0.114	0.00100	"	0.100		114	80-120			
Xylene (p/m)	0.233	0.00200	"	0.200		117	80-120			
Xylene (o)	0.110	0.00100	"	0.100		110	80-120			
Surrogate: 1,4-Difluorobenzene	*0.116*		"	*0.120*		*96.9*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.134*		"	*0.120*		*112*	*75-125*			
Matrix Spike (P3K2904-MS1)		**Source: 3K29007-20**		Prepared: 11/29/23 Analyzed: 11/30/23						
Benzene	0.107	0.00109	mg/kg dry	0.109	ND	98.2	80-120			
Toluene	0.0957	0.00109	"	0.109	ND	88.1	80-120			
Ethylbenzene	0.0997	0.00109	"	0.109	ND	91.7	80-120			
Xylene (p/m)	0.198	0.00217	"	0.217	ND	91.2	80-120			
Xylene (o)	0.0892	0.00109	"	0.109	ND	82.1	80-120			
Surrogate: 1,4-Difluorobenzene	*0.127*		"	*0.130*		*97.1*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.148*		"	*0.130*		*114*	*80-120*			
Matrix Spike Dup (P3K2904-MSD1)		**Source: 3K29007-20**		Prepared: 11/29/23 Analyzed: 12/01/23						
Benzene	0.107	0.00109	mg/kg dry	0.109	ND	98.9	80-120	0.711	20	
Toluene	0.0955	0.00109	"	0.109	ND	87.9	80-120	0.227	20	
Ethylbenzene	0.100	0.00109	"	0.109	ND	92.0	80-120	0.261	20	
Xylene (p/m)	0.197	0.00217	"	0.217	ND	90.6	80-120	0.644	20	
Xylene (o)	0.0873	0.00109	"	0.109	ND	80.3	80-120	2.14	20	
Surrogate: 1,4-Difluorobenzene	*0.127*		"	*0.130*		*97.3*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.147*		"	*0.130*		*113*	*80-120*			
Batch P3K2905 - * DEFAULT PREP *** **										
Blank (P3K2905-BLK1)				Prepared: 11/29/23 Analyzed: 12/01/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	0.00195	0.00100	"							B-13
Xylene (p/m)	0.00237	0.00200	"							B-13
Xylene (o)	0.00107	0.00100	"							B-13
Surrogate: 4-Bromofluorobenzene	*0.138*		"	*0.120*		*115*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.116*		"	*0.120*		*96.5*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3K2905 - * DEFAULT PREP *** **										
LCS (P3K2905-BS1)				Prepared: 11/29/23 Analyzed: 12/01/23						
Benzene	0.112	0.00100	mg/kg	0.100		112	80-120			
Toluene	0.103	0.00100	"	0.100		103	80-120			
Ethylbenzene	0.109	0.00100	"	0.100		109	80-120			
Xylene (p/m)	0.212	0.00200	"	0.200		106	80-120			
Xylene (o)	0.0964	0.00100	"	0.100		96.4	80-120			
Surrogate: 1,4-Difluorobenzene	*0.117*		"	*0.120*		*97.3*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.133*		"	*0.120*		*111*	*80-120*			
LCS Dup (P3K2905-BSD1)				Prepared: 11/29/23 Analyzed: 12/01/23						
Benzene	0.109	0.00100	mg/kg	0.100		109	80-120	2.23	20	
Toluene	0.100	0.00100	"	0.100		100	80-120	2.44	20	
Ethylbenzene	0.106	0.00100	"	0.100		106	80-120	2.41	20	
Xylene (p/m)	0.209	0.00200	"	0.200		105	80-120	1.04	20	
Xylene (o)	0.0949	0.00100	"	0.100		94.9	80-120	1.50	20	
Surrogate: 4-Bromofluorobenzene	*0.135*		"	*0.120*		*112*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.117*		"	*0.120*		*97.6*	*80-120*			
Calibration Check (P3K2905-CCV1)				Prepared: 11/29/23 Analyzed: 12/01/23						
Benzene	0.119	0.00100	mg/kg	0.100		119	80-120			
Toluene	0.110	0.00100	"	0.100		110	80-120			
Ethylbenzene	0.111	0.00100	"	0.100		111	80-120			
Xylene (p/m)	0.226	0.00200	"	0.200		113	80-120			
Xylene (o)	0.105	0.00100	"	0.100		105	80-120			
Surrogate: 1,4-Difluorobenzene	*0.117*		"	*0.120*		*97.9*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.135*		"	*0.120*		*113*	*75-125*			
Calibration Check (P3K2905-CCV2)				Prepared: 11/29/23 Analyzed: 12/01/23						
Benzene	0.109	0.00100	mg/kg	0.100		109	80-120			
Toluene	0.0958	0.00100	"	0.100		95.8	80-120			
Ethylbenzene	0.0961	0.00100	"	0.100		96.1	80-120			
Xylene (p/m)	0.198	0.00200	"	0.200		99.2	80-120			
Xylene (o)	0.0931	0.00100	"	0.100		93.1	80-120			
Surrogate: 4-Bromofluorobenzene	*0.132*		"	*0.120*		*110*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.119*		"	*0.120*		*98.9*	*75-125*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3K2905 - * DEFAULT PREP *** **										
Matrix Spike (P3K2905-MS1)	**Source: 3K29008-05**			Prepared: 11/29/23 Analyzed: 12/01/23						
Benzene	0.0977	0.00108	mg/kg dry	0.108	ND	90.9	80-120			
Toluene	0.0826	0.00108	"	0.108	ND	76.8	80-120			QM-05
Ethylbenzene	0.0860	0.00108	"	0.108	ND	80.0	80-120			
Xylene (p/m)	0.169	0.00215	"	0.215	ND	78.4	80-120			QM-05
Xylene (o)	0.0766	0.00108	"	0.108	ND	71.2	80-120			QM-05
Surrogate: 4-Bromofluorobenzene	*0.146*		"	*0.129*		*113*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.127*		"	*0.129*		*98.4*	*80-120*			
Matrix Spike Dup (P3K2905-MSD1)	**Source: 3K29008-05**			Prepared: 11/29/23 Analyzed: 12/01/23						
Benzene	0.0969	0.00108	mg/kg dry	0.108	ND	90.1	80-120	0.884	20	
Toluene	0.0819	0.00108	"	0.108	ND	76.2	80-120	0.745	20	QM-05
Ethylbenzene	0.0863	0.00108	"	0.108	ND	80.2	80-120	0.337	20	
Xylene (p/m)	0.170	0.00215	"	0.215	ND	79.1	80-120	0.902	20	QM-05
Xylene (o)	0.0756	0.00108	"	0.108	ND	70.3	80-120	1.30	20	QM-05
Surrogate: 4-Bromofluorobenzene	*0.143*		"	*0.129*		*111*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.126*		"	*0.129*		*97.5*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3K2902 - TX 1005										
Blank (P3K2902-BLK1)				Prepared & Analyzed: 11/29/23						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*95.1*		*"*	*100*		*95.1*	*70-130*			
Surrogate: o-Terphenyl	*50.9*		*"*	*50.0*		*102*	*70-130*			
LCS (P3K2902-BS1)				Prepared & Analyzed: 11/29/23						
C6-C12	796	25.0	mg/kg	1000		79.6	75-125			
>C12-C28	761	25.0	"	1000		76.1	75-125			
Surrogate: 1-Chlorooctane	*108*		*"*	*100*		*108*	*70-130*			
Surrogate: o-Terphenyl	*47.4*		*"*	*50.0*		*94.7*	*70-130*			
LCS Dup (P3K2902-BSD1)				Prepared & Analyzed: 11/29/23						
C6-C12	879	25.0	mg/kg	1000		87.9	75-125	9.90	20	
>C12-C28	855	25.0	"	1000		85.5	75-125	11.7	20	
Surrogate: 1-Chlorooctane	*123*		*"*	*100*		*123*	*70-130*			
Surrogate: o-Terphenyl	*53.5*		*"*	*50.0*		*107*	*70-130*			
Calibration Check (P3K2902-CCV1)				Prepared & Analyzed: 11/29/23						
C6-C12	430	25.0	mg/kg	500		86.1	85-115			
>C12-C28	443	25.0	"	500		88.5	85-115			
Surrogate: 1-Chlorooctane	*98.0*		*"*	*100*		*98.0*	*70-130*			
Surrogate: o-Terphenyl	*47.6*		*"*	*50.0*		*95.3*	*70-130*			
Calibration Check (P3K2902-CCV2)				Prepared: 11/29/23 Analyzed: 11/30/23						
C6-C12	456	25.0	mg/kg	500		91.2	85-115			
>C12-C28	441	25.0	"	500		88.2	85-115			
Surrogate: 1-Chlorooctane	*103*		*"*	*100*		*103*	*70-130*			
Surrogate: o-Terphenyl	*48.8*		*"*	*50.0*		*97.6*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3K2902 - TX 1005										
Calibration Check (P3K2902-CCV3)				Prepared: 11/29/23 Analyzed: 11/30/23						
C6-C12	463	25.0	mg/kg	500		92.6	85-115			
>C12-C28	462	25.0	"	500		92.4	85-115			
Surrogate: 1-Chlorooctane	*97.5*		*"*	*100*		*97.5*	*70-130*			
Surrogate: o-Terphenyl	*48.2*		*"*	*50.0*		*96.5*	*70-130*			
Duplicate (P3K2902-DUP1)		**Source: 3K29007-26**		Prepared: 11/29/23 Analyzed: 11/30/23						
C6-C12	ND	26.6	mg/kg dry		10.1				20	
>C12-C28	12.3	26.6	"		12.0			1.92	20	
Surrogate: 1-Chlorooctane	*93.5*		*"*	*106*		*87.9*	*70-130*			
Surrogate: o-Terphenyl	*49.3*		*"*	*53.2*		*92.7*	*70-130*			
Batch P3K2903 - TX 1005										
Blank (P3K2903-BLK1)				Prepared: 11/29/23 Analyzed: 11/30/23						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*103*		*"*	*100*		*103*	*70-130*			
Surrogate: o-Terphenyl	*64.7*		*"*	*50.0*		*129*	*70-130*			
LCS (P3K2903-BS1)				Prepared: 11/29/23 Analyzed: 11/30/23						
C6-C12	924	25.0	mg/kg	1000		92.4	75-125			
>C12-C28	888	25.0	"	1000		88.8	75-125			
Surrogate: 1-Chlorooctane	*105*		*"*	*100*		*105*	*70-130*			
Surrogate: o-Terphenyl	*59.9*		*"*	*50.0*		*120*	*70-130*			
LCS Dup (P3K2903-BSD1)				Prepared: 11/29/23 Analyzed: 11/30/23						
C6-C12	922	25.0	mg/kg	1000		92.2	75-125	0.204	20	
>C12-C28	871	25.0	"	1000		87.1	75-125	1.97	20	
Surrogate: 1-Chlorooctane	*109*		*"*	*100*		*109*	*70-130*			
Surrogate: o-Terphenyl	*58.8*		*"*	*50.0*		*118*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3K2903 - TX 1005										
Calibration Check (P3K2903-CCV1)				Prepared: 11/29/23 Analyzed: 11/30/23						
C6-C12	568	25.0	mg/kg	500		114	85-115			
>C12-C28	562	25.0	"	500		112	85-115			
Surrogate: 1-Chlorooctane	*118*		*"*	*100*		*118*	*70-130*			
Surrogate: o-Terphenyl	*68.4*		*"*	*50.0*		*137*	*70-130*			*S-GC*
Calibration Check (P3K2903-CCV2)				Prepared: 11/29/23 Analyzed: 11/30/23						
C6-C12	438	25.0	mg/kg	500		87.7	85-115			
>C12-C28	482	25.0	"	500		96.4	85-115			
Surrogate: 1-Chlorooctane	*107*		*"*	*100*		*107*	*70-130*			
Surrogate: o-Terphenyl	*61.3*		*"*	*50.0*		*123*	*70-130*			
Duplicate (P3K2903-DUP1)		**Source: 3K29007-20**		Prepared: 11/29/23 Analyzed: 11/30/23						
C6-C12	21.1	27.2	mg/kg dry		21.4			1.28	20	
>C12-C28	ND	27.2	"		ND				20	
Surrogate: 1-Chlorooctane	*127*		*"*	*109*		*117*	*70-130*			
Surrogate: o-Terphenyl	*73.2*		*"*	*54.3*		*135*	*70-130*			*S-GC*

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3K3001 - * DEFAULT PREP *** **										
Blank (P3K3001-BLK1)				Prepared & Analyzed: 11/30/23						
% Moisture	ND	0.1	%							
Blank (P3K3001-BLK2)				Prepared & Analyzed: 11/30/23						
% Moisture	ND	0.1	%							
Blank (P3K3001-BLK3)				Prepared & Analyzed: 11/30/23						
% Moisture	ND	0.1	%							
Blank (P3K3001-BLK4)				Prepared & Analyzed: 11/30/23						
% Moisture	ND	0.1	%							
Duplicate (P3K3001-DUP1)	**Source: 3K28016-01**			Prepared & Analyzed: 11/30/23						
% Moisture	1.0	0.1	%		2.0			66.7	20	R3
Duplicate (P3K3001-DUP2)	**Source: 3K29003-04**			Prepared & Analyzed: 11/30/23						
% Moisture	4.0	0.1	%		5.0			22.2	20	R3
Duplicate (P3K3001-DUP3)	**Source: 3K29007-04**			Prepared & Analyzed: 11/30/23						
% Moisture	5.0	0.1	%		5.0			0.00	20	
Duplicate (P3K3001-DUP4)	**Source: 3K29007-14**			Prepared & Analyzed: 11/30/23						
% Moisture	19.0	0.1	%		19.0			0.00	20	
Duplicate (P3K3001-DUP5)	**Source: 3K29008-03**			Prepared & Analyzed: 11/30/23						
% Moisture	9.0	0.1	%		9.0			0.00	20	
Duplicate (P3K3001-DUP6)	**Source: 3K29009-02**			Prepared & Analyzed: 11/30/23						
% Moisture	7.0	0.1	%		7.0			0.00	20	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3K3003 - * DEFAULT PREP *** **										
Blank (P3K3003-BLK1)				Prepared & Analyzed: 11/30/23						
Chloride	ND	1.00	mg/kg							
LCS (P3K3003-BS1)				Prepared & Analyzed: 11/30/23						
Chloride	16.8		mg/kg	16.0		105	90-110			
LCS Dup (P3K3003-BSD1)				Prepared & Analyzed: 11/30/23						
Chloride	15.3		mg/kg	16.0		95.9	90-110	8.90	10	
Calibration Check (P3K3003-CCV1)				Prepared & Analyzed: 11/30/23						
Chloride	18.0		mg/kg	18.0		99.8	90-110			
Calibration Check (P3K3003-CCV2)				Prepared & Analyzed: 11/30/23						
Chloride	17.4		mg/kg	18.0		96.7	90-110			
Matrix Spike (P3K3003-MS1)		**Source: 3K29007-01**		Prepared & Analyzed: 11/30/23						
Chloride	90.9		mg/kg	100	0.208	90.7	80-120			
Matrix Spike (P3K3003-MS2)		**Source: 3K29007-11**		Prepared & Analyzed: 11/30/23						
Chloride	87.1		mg/kg	100	0.398	86.7	80-120			
Matrix Spike Dup (P3K3003-MSD1)		**Source: 3K29007-01**		Prepared & Analyzed: 11/30/23						
Chloride	85.8		mg/kg	100	0.208	85.6	80-120	5.84	20	
Matrix Spike Dup (P3K3003-MSD2)		**Source: 3K29007-11**		Prepared & Analyzed: 11/30/23						
Chloride	84.5		mg/kg	100	0.398	84.1	80-120	3.06	20	
Batch P3K3009 - * DEFAULT PREP *** **										
Blank (P3K3009-BLK1)				Prepared: 11/30/23 Analyzed: 12/01/23						
Chloride	ND	1.00	mg/kg							

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3K3009 - * DEFAULT PREP *** **										
LCS (P3K3009-BS1)				Prepared: 11/30/23 Analyzed: 12/01/23						
Chloride	16.5		mg/kg	16.0		103	90-110			
LCS Dup (P3K3009-BSD1)				Prepared: 11/30/23 Analyzed: 12/01/23						
Chloride	15.4		mg/kg	16.0		96.2	90-110	6.81	10	
Calibration Check (P3K3009-CCV1)				Prepared: 11/30/23 Analyzed: 12/01/23						
Chloride	18.0		mg/kg	20.0		90.0	90-110			
Calibration Check (P3K3009-CCV2)				Prepared: 11/30/23 Analyzed: 12/01/23						
Chloride	17.2		mg/kg	16.0		107	90-110			
Matrix Spike (P3K3009-MS1)		**Source: 3K29007-21**		Prepared: 11/30/23 Analyzed: 12/01/23						
Chloride	87.1		mg/kg	100	0.403	86.7	80-120			
Matrix Spike (P3K3009-MS2)		**Source: 3K29009-06**		Prepared: 11/30/23 Analyzed: 12/01/23						
Chloride	90.5		mg/kg	100	3.85	86.7	80-120			
Matrix Spike Dup (P3K3009-MSD1)		**Source: 3K29007-21**		Prepared: 11/30/23 Analyzed: 12/01/23						
Chloride	79.8		mg/kg	100	0.403	79.4	80-120	8.70	20	QM-05
Matrix Spike Dup (P3K3009-MSD2)		**Source: 3K29009-06**		Prepared: 11/30/23 Analyzed: 12/01/23						
Chloride	84.3		mg/kg	100	3.85	80.4	80-120	7.18	20	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Notes and Definitions

S-GC	Surrogate recovery outside of control limits. The data was accepted based on valid recovery of the remaining surrogate.
ROI	Received on Ice
R3	The RPD exceeded the acceptance limit due to sample matrix effects.
QM-05	The spike recovery was outside acceptance limits for the MS and/or MSD due to matrix interference. The LCS and/or LCSD were within acceptance limits showing that the laboratory is in control and the data is acceptable.
BULK	Samples received in Bulk soil containers may be biased low in the nC6-C12 TPH Range
B-13	A common laboratory contaminant was above the RL in the blank
DET	Analyte DETECTED
ND	Analyte NOT DETECTED at or above the reporting limit
NR	Not Reported
dry	Sample results reported on a dry weight basis
RPD	Relative Percent Difference
LCS	Laboratory Control Spike
MS	Matrix Spike
Dup	Duplicate

Report Approved By: Brent Barron Date: 12/4/2023

Brent Barron, Laboratory Director/Technical Director

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

This material is intended only for the use of the individual (s) or entity to whom it is addressed, and may contain information that is privileged and confidential.

If you have received this material in error, please notify us immediately at 432-686-7235.

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey Fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: Midland TX 79705
Telephone No: 432-557-0934 **Fax No:**
Sampler Signature: Jose Bellor

Project Name: Jalapeño
Project #: CDEV # 11845
Project Loc: Lea CO, NM
PO #:
Report Format: ☒ Standard ☐ TRRP ☐ NPDES
e-mail: Jamey@Tellusservices.com

(lab use only) **ORDER #:** 3K29007

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total # of Containers	Preservation & # of Containers: Ice	HNO_3	HCl	H_2SO_4	NaOH	$Na_2S_2O_3$	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge GW=Groundwater S=Soil/Solid NP=Non-Potable Specify Other	Analyze For: TCLP: TPH: TX 1005	TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA 8021	TPH - EPA-8015	Chlorides EPA-300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
1	BH-1@ 2ft	2ft	2ft	11-17-23	8:03		1	X								S					X	X	X		Y
2	BH-2@ 2ft	2ft	2ft	11-17-23	8:06		1	X								S									
3	BH-3@ 2ft	2ft	2ft	11-17-23	8:09		1	X								S									
4	BH-4@ 2ft	2ft	2ft	11-17-23	8:12		1	X								S									
5	BH-5@ 2ft	2ft	2ft	11-17-23	8:15		1	X								S									
6	BH-6@ 2ft	2ft	2ft	11-17-23	8:18		1	X								S									
7	BH-7@ 2ft	2ft	2ft	11-17-23	8:21		1	X								S									
8	BH-8@ 2ft	2ft	2ft	11-17-23	8:24		1	X								S									
9	BH-9@ 2ft	2ft	2ft	11-17-23	8:27		1	X								S									
10	BH-10@ 2ft	2ft	2ft	11-17-23	8:30		1	X								S									

Special Instructions: Report in C6-C12, >C12-C28 and >C28-C35 fractions as well as total TPH

Relinquished by:	Date	Time	Received by:	Date	Time
	11/29	1300			
Relinquished by:	Date	Time	Received by:	Date	Time
	11/29	1330			
Relinquished by:	Date	Time	Received by PBEL:	Date	Time
			Lara MC	11/29/23	13:30

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N
by Sampler/Client Rep. ?	Y	N

by Courier? UPS DHL FedEx Lone Star

Temperature Upon Receipt:
Received: 3.5 °C Thermometer: CF3
Adjusted: °C Factor:

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

Page 211 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey Fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: Midland TX 79705
Telephone No: 432-557-0934
Fax No: _____
Sampler Signature: Jose Belloc
e-mail: Jamey@Tellusservices.com

Project Name: Jalapeño
Project #: EDEV # 11845
Project Loc: Lea CO, NM
PO #: _____
Report Format: ☒ Standard ☐ TRRP ☐ NPDES

(lab use only)
ORDER #: 3K29007

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total # of Containers	Preservation & # of Containers: Ice	HNO3	HCl	H2SO4	NaOH	Na2S2O3	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge GW=Groundwater S=Soil/Solid NP=Non-Potable Specify Other	Analyze For: TCLP: TPH: TX 1005	TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	TOTAL:	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
11	BH-11@ 2ft	2ft	2ft	11-17-23	8:33		1	X								S						
12	BH-12@ 2ft	2ft	2ft	11-17-23	8:36		1	X								S						
13	BH-13@ 2ft	2ft	2ft	11-17-23	8:39		1	X								S						
14	BH-14@ 2ft	2ft	2ft	11-17-23	8:42		1									S						
15	BH-15@ 2ft	2ft	2ft	11-17-23	8:45		1									S						
16	BH-16@ 2ft	2ft	2ft	11-17-23	8:48		1									S						
17	BH-17@ 2ft	2ft	2ft	11-17-23	8:51		1									S						
18	BH-18@ 2ft	2ft	2ft	11-17-23	8:54		1									S						
19	BH-20@ 2ft	2ft	2ft	11-17-23	9:00		1									S						
20	BH-21@ 2ft	2ft	2ft	11-17-23	9:03		1									S						

Special Instructions: Report TPH-in-C6-C12, C12-C28 and >C28-C35 fractions as well as total TPH

Relinquished by:	Date	Time	Received by:	Date	Time
	11/29	1300			
Relinquished by:	Date	Time	Received by:	Date	Time
	11/29	1330			
Relinquished by:	Date	Time	Received by PBEL:	Date	Time
				11/29/23	13:30

Laboratory Comments:
Sample Containers Intact? Y N
VOCs Free of Headspace? Y N
Labels on container(s) Y N
Custody seals on container(s) Y N
Custody seals on cooler(s) Y N
Sample Hand Delivered Y N
by Sampler/Client Rep. ? Y N
by Courier? UPS DHL FedEx Lone Star
Temperature Upon Receipt:
Received: 3.5 °C Thermometer: CF3
Adjusted: °C Factor:

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

Page 212 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934 **Fax No:** _____
Sampler Signature: Jose Belloc
Project Name: Jalapeño
Project #: LOEV# 11845
Project Loc: Lea CO, NM
PO #: _____
Report Format: ☒ Standard ☐ TRRP ☐ NPDES
e-mail: Jamey@Tellusservices.com

(lab use only) ORDER #:

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total # of Containers	Preservation & # of Containers: Ice	HNO3	HCl	H2SO4	NaOH	Na2S2O3	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge GW=Groundwater S=Soil/Solid NP=Non-Potable Specify Other	Analyze For: TCLP: TPH: TX 1005	TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX-EPA 8021	TPH-EPA 8015	Chlorides EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
21	BH-22@ 2ft	2ft	2ft	11-17-23	9:06		1	X								S				X	X	X		
22	BH-23@ 2ft	2ft	2ft	11-17-23	9:09		1	X								S								
23	BH-24@ 2ft	2ft	2ft	11-17-23	9:12		1	X								S								
24	BH-25@ 2ft	2ft	2ft	11-17-23	9:15		1	X								S								
25	NW-1 @ 1ft	1ft	1ft	11-17-23	2:15		1	X								S								
26	SW1 @ 1ft	1ft	1ft	11-17-23	2:27		1	X								S								

Special Instructions: Report TPH-in- C6-C12, 7 C12-C28 and 7 C28-C35 fractions as well as Total TPH

Relinquished by:	Date	Time	Received by:	Date	Time
	11/29	1300			
Relinquished by:	Date	Time	Received by:	Date	Time
	11/29	1330			
Relinquished by:	Date	Time	Received by PBEL:	Date	Time
				11/29/23	13:30

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N
by Sampler/Client Rep. ?	Y	N

by Courier? UPS DHL FedEx Lone Star

Temperature Upon Receipt:
Received: 3.5 °C Thermometer: CF0
Adjusted: 3.5 °C Factor: 1.3

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21 Page 1 of 1

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

PERMIAN BASIN
ENVIRONMENTAL LAB, LP
1400 Rankin Hwy
Midland, TX 79701

PBELAB

Analytical Report

Prepared for:

Jamey Fowler

Tellus Consulting, LLC

4000 North Big Spring Street Suite 109

Midland, TX 79705

Project: Jalapeno

Project Number: CDEV #11845

Location: Lea County, NM

Lab Order Number: 3K29008

NELAP ACCREDITED TNI LABORATORY

Current Certification

Report Date: 12/05/23

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

ANALYTICAL REPORT FOR SAMPLES

Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
BH-31 @ 2FT	3K29008-01	Soil	11/20/23 09:10	11-29-2023 13:30
BH-30 @ 2FT	3K29008-02	Soil	11/20/23 09:08	11-29-2023 13:30
BH-32 @ 2FT	3K29008-03	Soil	11/20/23 09:11	11-29-2023 13:30
BH-29 @ 2FT	3K29008-04	Soil	11/20/23 09:06	11-29-2023 13:30
BH-33 @ 2FT	3K29008-05	Soil	11/20/23 09:12	11-29-2023 13:30
BH-28 @ 2FT	3K29008-06	Soil	11/20/23 09:04	11-29-2023 13:30
BH-27 @ 2FT	3K29008-07	Soil	11/20/23 09:02	11-29-2023 13:30
BH-26 @ 2FT	3K29008-08	Soil	11/20/23 09:00	11-29-2023 13:30
SW @ 1FT	3K29008-09	Soil	11/20/23 09:16	11-29-2023 13:30
EW @ 1FT	3K29008-10	Soil	11/20/23 09:14	11-29-2023 13:30
NW-1 @ 1FT	3K29008-11	Soil	11/20/23 09:18	11-29-2023 13:30

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-31 @ 2FT

3K29008-01 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00108	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 09:23	EPA 8021B	
Toluene	ND	0.00108	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 09:23	EPA 8021B	
Ethylbenzene	ND	0.00108	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 09:23	EPA 8021B	
Xylene (p/m)	ND	0.00215	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 09:23	EPA 8021B	
Xylene (o)	ND	0.00108	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 09:23	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3K2905*	*11/29/23 16:02*	*12/01/23 09:23*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*97.0 %*	*80-120*		*P3K2905*	*11/29/23 16:02*	*12/01/23 09:23*	*EPA 8021B*	
Xylenes (total)	ND	0.00215	mg/kg dry	1	[CALC]	11/29/23 16:02	12/01/23 09:23	EPA 8021B	
Total BTEX	ND	0.00108	mg/kg dry	1	[CALC]	11/29/23 16:02	12/01/23 09:23	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.9	mg/kg dry	1	P3K3004	11/30/23 14:44	12/01/23 18:38	TPH 8015M	
>C12-C28	ND	26.9	mg/kg dry	1	P3K3004	11/30/23 14:44	12/01/23 18:38	TPH 8015M	
>C28-C35	ND	26.9	mg/kg dry	1	P3K3004	11/30/23 14:44	12/01/23 18:38	TPH 8015M	
Surrogate: 1-Chlorooctane		*104 %*	*70-130*		*P3K3004*	*11/30/23 14:44*	*12/01/23 18:38*	*TPH 8015M*	
Surrogate: o-Terphenyl		*109 %*	*70-130*		*P3K3004*	*11/30/23 14:44*	*12/01/23 18:38*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.9	mg/kg dry	1	[CALC]	11/30/23 14:44	12/01/23 18:38	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**11.1**	1.08	mg/kg dry	1	P3K3008	11/30/23 16:20	12/02/23 20:52	EPA 300.0	
% Moisture	**7.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-30 @ 2FT

3K29008-02 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00108	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 09:48	EPA 8021B	
Toluene	ND	0.00108	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 09:48	EPA 8021B	
Ethylbenzene	ND	0.00108	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 09:48	EPA 8021B	
Xylene (p/m)	ND	0.00215	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 09:48	EPA 8021B	
Xylene (o)	ND	0.00108	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 09:48	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3K2905*	*11/29/23 16:02*	*12/01/23 09:48*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.5 %*	*80-120*		*P3K2905*	*11/29/23 16:02*	*12/01/23 09:48*	*EPA 8021B*	
Xylenes (total)	ND	0.00215	mg/kg dry	1	[CALC]	11/29/23 16:02	12/01/23 09:48	EPA 8021B	
Total BTEX	ND	0.00108	mg/kg dry	1	[CALC]	11/29/23 16:02	12/01/23 09:48	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.9	mg/kg dry	1	P3K3004	11/30/23 14:44	12/01/23 19:49	TPH 8015M	
>C12-C28	ND	26.9	mg/kg dry	1	P3K3004	11/30/23 14:44	12/01/23 19:49	TPH 8015M	
>C28-C35	ND	26.9	mg/kg dry	1	P3K3004	11/30/23 14:44	12/01/23 19:49	TPH 8015M	
Surrogate: 1-Chlorooctane		*97.4 %*	*70-130*		*P3K3004*	*11/30/23 14:44*	*12/01/23 19:49*	*TPH 8015M*	
Surrogate: o-Terphenyl		*105 %*	*70-130*		*P3K3004*	*11/30/23 14:44*	*12/01/23 19:49*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.9	mg/kg dry	1	[CALC]	11/30/23 14:44	12/01/23 19:49	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**18.8**	1.08	mg/kg dry	1	P3K3008	11/30/23 16:20	12/02/23 21:06	EPA 300.0	
% Moisture	**7.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-32 @ 2FT

3K29008-03 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00110	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 10:12	EPA 8021B	
Toluene	ND	0.00110	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 10:12	EPA 8021B	
Ethylbenzene	ND	0.00110	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 10:12	EPA 8021B	
Xylene (p/m)	ND	0.00220	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 10:12	EPA 8021B	
Xylene (o)	ND	0.00110	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 10:12	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*114 %*	*80-120*		*P3K2905*	*11/29/23 16:02*	*12/01/23 10:12*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.6 %*	*80-120*		*P3K2905*	*11/29/23 16:02*	*12/01/23 10:12*	*EPA 8021B*	
Xylenes (total)	ND	0.00220	mg/kg dry	1	[CALC]	11/29/23 16:02	12/01/23 10:12	EPA 8021B	
Total BTEX	ND	0.00110	mg/kg dry	1	[CALC]	11/29/23 16:02	12/01/23 10:12	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.5	mg/kg dry	1	P3K3004	11/30/23 14:44	12/01/23 20:13	TPH 8015M	
>C12-C28	ND	27.5	mg/kg dry	1	P3K3004	11/30/23 14:44	12/01/23 20:13	TPH 8015M	
>C28-C35	ND	27.5	mg/kg dry	1	P3K3004	11/30/23 14:44	12/01/23 20:13	TPH 8015M	
Surrogate: 1-Chlorooctane		*93.5 %*	*70-130*		*P3K3004*	*11/30/23 14:44*	*12/01/23 20:13*	*TPH 8015M*	
Surrogate: o-Terphenyl		*100 %*	*70-130*		*P3K3004*	*11/30/23 14:44*	*12/01/23 20:13*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.5	mg/kg dry	1	[CALC]	11/30/23 14:44	12/01/23 20:13	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**8.40**	1.10	mg/kg dry	1	P3K3008	11/30/23 16:20	12/02/23 21:49	EPA 300.0	
% Moisture	**9.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-29 @ 2FT

3K29008-04 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00108	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 10:36	EPA 8021B	
Toluene	ND	0.00108	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 10:36	EPA 8021B	
Ethylbenzene	ND	0.00108	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 10:36	EPA 8021B	
Xylene (p/m)	ND	0.00215	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 10:36	EPA 8021B	
Xylene (o)	ND	0.00108	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 10:36	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.7 %*	*80-120*		*P3K2905*	*11/29/23 16:02*	*12/01/23 10:36*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3K2905*	*11/29/23 16:02*	*12/01/23 10:36*	*EPA 8021B*	
Xylenes (total)	ND	0.00215	mg/kg dry	1	[CALC]	11/29/23 16:02	12/01/23 10:36	EPA 8021B	
Total BTEX	ND	0.00108	mg/kg dry	1	[CALC]	11/29/23 16:02	12/01/23 10:36	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.9	mg/kg dry	1	P3K3004	11/30/23 14:44	12/01/23 20:37	TPH 8015M	
>C12-C28	ND	26.9	mg/kg dry	1	P3K3004	11/30/23 14:44	12/01/23 20:37	TPH 8015M	
>C28-C35	ND	26.9	mg/kg dry	1	P3K3004	11/30/23 14:44	12/01/23 20:37	TPH 8015M	
Surrogate: 1-Chlorooctane		*87.3 %*	*70-130*		*P3K3004*	*11/30/23 14:44*	*12/01/23 20:37*	*TPH 8015M*	
Surrogate: o-Terphenyl		*92.1 %*	*70-130*		*P3K3004*	*11/30/23 14:44*	*12/01/23 20:37*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.9	mg/kg dry	1	[CALC]	11/30/23 14:44	12/01/23 20:37	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**78.0**	1.08	mg/kg dry	1	P3K3008	11/30/23 16:20	12/02/23 22:32	EPA 300.0	
% Moisture	**7.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-33 @ 2FT

3K29008-05 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00108	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 11:01	EPA 8021B	
Toluene	ND	0.00108	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 11:01	EPA 8021B	
Ethylbenzene	ND	0.00108	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 11:01	EPA 8021B	
Xylene (p/m)	ND	0.00215	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 11:01	EPA 8021B	
Xylene (o)	ND	0.00108	mg/kg dry	1	P3K2905	11/29/23 16:02	12/01/23 11:01	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.4 %*	*80-120*		*P3K2905*	*11/29/23 16:02*	*12/01/23 11:01*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*114 %*	*80-120*		*P3K2905*	*11/29/23 16:02*	*12/01/23 11:01*	*EPA 8021B*	
Xylenes (total)	ND	0.00215	mg/kg dry	1	[CALC]	11/29/23 16:02	12/01/23 11:01	EPA 8021B	
Total BTEX	ND	0.00108	mg/kg dry	1	[CALC]	11/29/23 16:02	12/01/23 11:01	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.9	mg/kg dry	1	P3K3004	11/30/23 14:44	12/01/23 21:01	TPH 8015M	
>C12-C28	ND	26.9	mg/kg dry	1	P3K3004	11/30/23 14:44	12/01/23 21:01	TPH 8015M	
>C28-C35	ND	26.9	mg/kg dry	1	P3K3004	11/30/23 14:44	12/01/23 21:01	TPH 8015M	
Surrogate: 1-Chlorooctane		*108 %*	*70-130*		*P3K3004*	*11/30/23 14:44*	*12/01/23 21:01*	*TPH 8015M*	
Surrogate: o-Terphenyl		*114 %*	*70-130*		*P3K3004*	*11/30/23 14:44*	*12/01/23 21:01*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.9	mg/kg dry	1	[CALC]	11/30/23 14:44	12/01/23 21:01	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**46.9**	1.08	mg/kg dry	1	P3K3008	11/30/23 16:20	12/02/23 22:47	EPA 300.0	
% Moisture	**7.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-28 @ 2FT

3K29008-06 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 12:31	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 12:31	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 12:31	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 12:31	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 12:31	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*97.0 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 12:31*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 12:31*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 12:31	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 12:31	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3K3004	11/30/23 14:44	12/01/23 21:25	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3K3004	11/30/23 14:44	12/01/23 21:25	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3K3004	11/30/23 14:44	12/01/23 21:25	TPH 8015M	
Surrogate: 1-Chlorooctane		*90.5 %*	*70-130*		*P3K3004*	*11/30/23 14:44*	*12/01/23 21:25*	*TPH 8015M*	
Surrogate: o-Terphenyl		*96.7 %*	*70-130*		*P3K3004*	*11/30/23 14:44*	*12/01/23 21:25*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	11/30/23 14:44	12/01/23 21:25	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**7.32**	1.06	mg/kg dry	1	P3K3008	11/30/23 16:20	12/02/23 23:01	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-27 @ 2FT

3K29008-07 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00112	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 12:56	EPA 8021B	
Toluene	ND	0.00112	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 12:56	EPA 8021B	
Ethylbenzene	ND	0.00112	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 12:56	EPA 8021B	
Xylene (p/m)	ND	0.00225	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 12:56	EPA 8021B	
Xylene (o)	ND	0.00112	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 12:56	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.3 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 12:56*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 12:56*	*EPA 8021B*	
Xylenes (total)	ND	0.00225	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 12:56	EPA 8021B	
Total BTEX	ND	0.00112	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 12:56	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	28.1	mg/kg dry	1	P3K3004	11/30/23 14:44	12/01/23 21:49	TPH 8015M	
>C12-C28	ND	28.1	mg/kg dry	1	P3K3004	11/30/23 14:44	12/01/23 21:49	TPH 8015M	
>C28-C35	ND	28.1	mg/kg dry	1	P3K3004	11/30/23 14:44	12/01/23 21:49	TPH 8015M	
Surrogate: 1-Chlorooctane		*104 %*	*70-130*		*P3K3004*	*11/30/23 14:44*	*12/01/23 21:49*	*TPH 8015M*	
Surrogate: o-Terphenyl		*110 %*	*70-130*		*P3K3004*	*11/30/23 14:44*	*12/01/23 21:49*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	28.1	mg/kg dry	1	[CALC]	11/30/23 14:44	12/01/23 21:49	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**37.2**	1.12	mg/kg dry	1	P3K3008	11/30/23 16:20	12/02/23 23:16	EPA 300.0	
% Moisture	**11.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-26 @ 2FT

3K29008-08 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00114	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 13:20	EPA 8021B	
Toluene	ND	0.00114	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 13:20	EPA 8021B	
Ethylbenzene	ND	0.00114	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 13:20	EPA 8021B	
Xylene (p/m)	ND	0.00227	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 13:20	EPA 8021B	
Xylene (o)	ND	0.00114	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 13:20	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.3 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 13:20*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 13:20*	*EPA 8021B*	
Xylenes (total)	ND	0.00227	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 13:20	EPA 8021B	
Total BTEX	ND	0.00114	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 13:20	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	28.4	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
>C12-C28	ND	28.4	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
>C28-C35	ND	28.4	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*123 %*	*70-130*		*P3K3005*	*11/30/23 14:52*	*11/30/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*137 %*	*70-130*		*P3K3005*	*11/30/23 14:52*	*11/30/23 17:00*	*TPH 8015M*	*S-GC*
Total Petroleum Hydrocarbon C6-C35	ND	28.4	mg/kg dry	1	[CALC]	11/30/23 14:52	11/30/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**79.0**	1.14	mg/kg dry	1	P3K3008	11/30/23 16:20	12/02/23 23:30	EPA 300.0	
% Moisture	**12.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

SW @ 1FT

3K29008-09 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00108	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 13:44	EPA 8021B	
Toluene	ND	0.00108	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 13:44	EPA 8021B	
Ethylbenzene	ND	0.00108	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 13:44	EPA 8021B	
Xylene (p/m)	ND	0.00215	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 13:44	EPA 8021B	
Xylene (o)	ND	0.00108	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 13:44	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*114 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 13:44*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.1 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 13:44*	*EPA 8021B*	
Xylenes (total)	ND	0.00215	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 13:44	EPA 8021B	
Total BTEX	ND	0.00108	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 13:44	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.9	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
>C12-C28	ND	26.9	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
>C28-C35	ND	26.9	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*112 %*	*70-130*		*P3K3005*	*11/30/23 14:52*	*11/30/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*123 %*	*70-130*		*P3K3005*	*11/30/23 14:52*	*11/30/23 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.9	mg/kg dry	1	[CALC]	11/30/23 14:52	11/30/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**37.5**	1.08	mg/kg dry	1	P3K3008	11/30/23 16:20	12/02/23 23:44	EPA 300.0	
% Moisture	**7.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

EW @ 1FT

3K29008-10 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 14:09	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 14:09	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 14:09	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 14:09	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 14:09	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*94.8 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 14:09*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*113 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 14:09*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 14:09	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 14:09	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*129 %*	*70-130*		*P3K3005*	*11/30/23 14:52*	*11/30/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*142 %*	*70-130*		*P3K3005*	*11/30/23 14:52*	*11/30/23 17:00*	*TPH 8015M*	*S-GC*
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	11/30/23 14:52	11/30/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**21.5**	1.05	mg/kg dry	1	P3K3008	11/30/23 16:20	12/02/23 23:59	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

NW-1 @ 1FT

3K29008-11 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00110	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 14:33	EPA 8021B	
Toluene	ND	0.00110	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 14:33	EPA 8021B	
Ethylbenzene	ND	0.00110	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 14:33	EPA 8021B	
Xylene (p/m)	ND	0.00220	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 14:33	EPA 8021B	
Xylene (o)	ND	0.00110	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 14:33	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*94.7 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 14:33*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*112 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 14:33*	*EPA 8021B*	
Xylenes (total)	ND	0.00220	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 14:33	EPA 8021B	
Total BTEX	ND	0.00110	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 14:33	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.5	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
>C12-C28	ND	27.5	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
>C28-C35	ND	27.5	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*111 %*	*70-130*		*P3K3005*	*11/30/23 14:52*	*11/30/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*121 %*	*70-130*		*P3K3005*	*11/30/23 14:52*	*11/30/23 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.5	mg/kg dry	1	[CALC]	11/30/23 14:52	11/30/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**39.6**	1.10	mg/kg dry	1	P3K3008	11/30/23 16:20	12/03/23 00:13	EPA 300.0	
% Moisture	**9.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3K2905 - * DEFAULT PREP *** **										
Blank (P3K2905-BLK1)				Prepared: 11/29/23 Analyzed: 12/01/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	0.00195	0.00100	"							B-13
Xylene (p/m)	0.00237	0.00200	"							B-13
Xylene (o)	0.00107	0.00100	"							B-13
Surrogate: 1,4-Difluorobenzene	*0.116*		"	*0.120*		*96.5*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.138*		"	*0.120*		*115*	*80-120*			
LCS (P3K2905-BS1)				Prepared: 11/29/23 Analyzed: 12/01/23						
Benzene	0.112	0.00100	mg/kg	0.100		112	80-120			
Toluene	0.103	0.00100	"	0.100		103	80-120			
Ethylbenzene	0.109	0.00100	"	0.100		109	80-120			
Xylene (p/m)	0.212	0.00200	"	0.200		106	80-120			
Xylene (o)	0.0964	0.00100	"	0.100		96.4	80-120			
Surrogate: 1,4-Difluorobenzene	*0.117*		"	*0.120*		*97.3*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.133*		"	*0.120*		*111*	*80-120*			
LCS Dup (P3K2905-BSD1)				Prepared: 11/29/23 Analyzed: 12/01/23						
Benzene	0.109	0.00100	mg/kg	0.100		109	80-120	2.23	20	
Toluene	0.100	0.00100	"	0.100		100	80-120	2.44	20	
Ethylbenzene	0.106	0.00100	"	0.100		106	80-120	2.41	20	
Xylene (p/m)	0.209	0.00200	"	0.200		105	80-120	1.04	20	
Xylene (o)	0.0949	0.00100	"	0.100		94.9	80-120	1.50	20	
Surrogate: 4-Bromofluorobenzene	*0.135*		"	*0.120*		*112*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.117*		"	*0.120*		*97.6*	*80-120*			
Calibration Check (P3K2905-CCV1)				Prepared: 11/29/23 Analyzed: 12/01/23						
Benzene	0.119	0.00100	mg/kg	0.100		119	80-120			
Toluene	0.110	0.00100	"	0.100		110	80-120			
Ethylbenzene	0.111	0.00100	"	0.100		111	80-120			
Xylene (p/m)	0.226	0.00200	"	0.200		113	80-120			
Xylene (o)	0.105	0.00100	"	0.100		105	80-120			
Surrogate: 1,4-Difluorobenzene	*0.117*		"	*0.120*		*97.9*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.135*		"	*0.120*		*113*	*75-125*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3K2905 - * DEFAULT PREP *** **										
Calibration Check (P3K2905-CCV2)				Prepared: 11/29/23 Analyzed: 12/01/23						
Benzene	0.109	0.00100	mg/kg	0.100		109	80-120			
Toluene	0.0958	0.00100	"	0.100		95.8	80-120			
Ethylbenzene	0.0961	0.00100	"	0.100		96.1	80-120			
Xylene (p/m)	0.198	0.00200	"	0.200		99.2	80-120			
Xylene (o)	0.0931	0.00100	"	0.100		93.1	80-120			
Surrogate: 4-Bromofluorobenzene	*0.132*		"	*0.120*		*110*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.119*		"	*0.120*		*98.9*	*75-125*			
Matrix Spike (P3K2905-MS1)		**Source: 3K29008-05**		Prepared: 11/29/23 Analyzed: 12/01/23						
Benzene	0.0977	0.00108	mg/kg dry	0.108	ND	90.9	80-120			
Toluene	0.0826	0.00108	"	0.108	ND	76.8	80-120			QM-05
Ethylbenzene	0.0860	0.00108	"	0.108	ND	80.0	80-120			
Xylene (p/m)	0.169	0.00215	"	0.215	ND	78.4	80-120			QM-05
Xylene (o)	0.0766	0.00108	"	0.108	ND	71.2	80-120			QM-05
Surrogate: 4-Bromofluorobenzene	*0.146*		"	*0.129*		*113*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.127*		"	*0.129*		*98.4*	*80-120*			
Matrix Spike Dup (P3K2905-MSD1)		**Source: 3K29008-05**		Prepared: 11/29/23 Analyzed: 12/01/23						
Benzene	0.0969	0.00108	mg/kg dry	0.108	ND	90.1	80-120	0.884	20	
Toluene	0.0819	0.00108	"	0.108	ND	76.2	80-120	0.745	20	QM-05
Ethylbenzene	0.0863	0.00108	"	0.108	ND	80.2	80-120	0.337	20	
Xylene (p/m)	0.170	0.00215	"	0.215	ND	79.1	80-120	0.902	20	QM-05
Xylene (o)	0.0756	0.00108	"	0.108	ND	70.3	80-120	1.30	20	QM-05
Surrogate: 4-Bromofluorobenzene	*0.143*		"	*0.129*		*111*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.126*		"	*0.129*		*97.5*	*80-120*			
Batch P3L0311 - * DEFAULT PREP *** **										
Blank (P3L0311-BLK1)				Prepared: 12/03/23 Analyzed: 12/04/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 1,4-Difluorobenzene	*0.115*		"	*0.120*		*95.7*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.141*		"	*0.120*		*118*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0311 - * DEFAULT PREP *** **										
LCS (P3L0311-BS1)				Prepared: 12/03/23 Analyzed: 12/04/23						
Benzene	0.113	0.00100	mg/kg	0.100		113	80-120			
Toluene	0.101	0.00100	"	0.100		101	80-120			
Ethylbenzene	0.108	0.00100	"	0.100		108	80-120			
Xylene (p/m)	0.212	0.00200	"	0.200		106	80-120			
Xylene (o)	0.0968	0.00100	"	0.100		96.8	80-120			
Surrogate: 4-Bromofluorobenzene	*0.134*		*"*	*0.120*		*112*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.119*		*"*	*0.120*		*99.0*	*80-120*			
LCS Dup (P3L0311-BSD1)				Prepared: 12/03/23 Analyzed: 12/04/23						
Benzene	0.113	0.00100	mg/kg	0.100		113	80-120	0.416	20	
Toluene	0.101	0.00100	"	0.100		101	80-120	0.00	20	
Ethylbenzene	0.108	0.00100	"	0.100		108	80-120	0.306	20	
Xylene (p/m)	0.212	0.00200	"	0.200		106	80-120	0.245	20	
Xylene (o)	0.0969	0.00100	"	0.100		96.9	80-120	0.124	20	
Surrogate: 1,4-Difluorobenzene	*0.119*		*"*	*0.120*		*98.8*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.133*		*"*	*0.120*		*111*	*80-120*			
Calibration Blank (P3L0311-CCB1)				Prepared: 12/03/23 Analyzed: 12/04/23						
Benzene	0.200		ug/kg							
Toluene	0.180		"							
Ethylbenzene	0.120		"							
Xylene (p/m)	0.260		"							
Xylene (o)	0.130		"							
Surrogate: 1,4-Difluorobenzene	*0.116*		*"*	*0.120*		*96.5*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.140*		*"*	*0.120*		*117*	*80-120*			
Calibration Blank (P3L0311-CCB2)				Prepared: 12/03/23 Analyzed: 12/04/23						
Benzene	0.190		ug/kg							
Toluene	0.260		"							
Ethylbenzene	0.220		"							
Xylene (p/m)	0.240		"							
Xylene (o)	0.180		"							
Surrogate: 1,4-Difluorobenzene	*0.116*		*"*	*0.120*		*96.4*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.141*		*"*	*0.120*		*117*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0311 - * DEFAULT PREP *** **										
Calibration Check (P3L0311-CCV1)				Prepared: 12/03/23 Analyzed: 12/04/23						
Benzene	0.119	0.00100	mg/kg	0.100		119	80-120			
Toluene	0.108	0.00100	"	0.100		108	80-120			
Ethylbenzene	0.110	0.00100	"	0.100		110	80-120			
Xylene (p/m)	0.226	0.00200	"	0.200		113	80-120			
Xylene (o)	0.106	0.00100	"	0.100		106	80-120			
Surrogate: 1,4-Difluorobenzene	*0.119*		"	*0.120*		*99.3*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.133*		"	*0.120*		*111*	*75-125*			
Calibration Check (P3L0311-CCV2)				Prepared: 12/03/23 Analyzed: 12/04/23						
Benzene	0.116	0.00100	mg/kg	0.100		116	80-120			
Toluene	0.105	0.00100	"	0.100		105	80-120			
Ethylbenzene	0.106	0.00100	"	0.100		106	80-120			
Xylene (p/m)	0.215	0.00200	"	0.200		108	80-120			
Xylene (o)	0.101	0.00100	"	0.100		101	80-120			
Surrogate: 1,4-Difluorobenzene	*0.118*		"	*0.120*		*98.6*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.132*		"	*0.120*		*110*	*75-125*			
Calibration Check (P3L0311-CCV3)				Prepared: 12/03/23 Analyzed: 12/04/23						
Benzene	0.112	0.00100	mg/kg	0.100		112	80-120			
Toluene	0.0997	0.00100	"	0.100		99.7	80-120			
Ethylbenzene	0.101	0.00100	"	0.100		101	80-120			
Xylene (p/m)	0.205	0.00200	"	0.200		102	80-120			
Xylene (o)	0.0958	0.00100	"	0.100		95.8	80-120			
Surrogate: 1,4-Difluorobenzene	*0.117*		"	*0.120*		*97.6*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.132*		"	*0.120*		*110*	*75-125*			
Matrix Spike (P3L0311-MS1)		**Source: 3L01002-09**		Prepared: 12/03/23 Analyzed: 12/04/23						
Benzene	0.0822	0.00104	mg/kg dry	0.104		78.9	80-120			QM-05
Toluene	0.0618	0.00104	"	0.104		59.3	80-120			QM-05
Ethylbenzene	0.0575	0.00104	"	0.104		55.2	80-120			QM-05
Xylene (p/m)	0.113	0.00208	"	0.208		54.2	80-120			QM-05
Xylene (o)	0.0517	0.00104	"	0.104		49.7	80-120			QM-05
Surrogate: 1,4-Difluorobenzene	*0.122*		"	*0.125*		*97.5*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.136*		"	*0.125*		*109*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0311 - * DEFAULT PREP *** **										
Matrix Spike Dup (P3L0311-MSD1)	**Source: 3L01002-09**			Prepared: 12/03/23 Analyzed: 12/04/23						
Benzene	0.0639	0.00104	mg/kg dry	0.104		61.4	80-120	25.0	20	QM-05
Toluene	0.0468	0.00104	"	0.104		44.9	80-120	27.7	20	QM-05
Ethylbenzene	0.0410	0.00104	"	0.104		39.4	80-120	33.5	20	QM-05
Xylene (p/m)	0.0814	0.00208	"	0.208		39.1	80-120	32.5	20	QM-05
Xylene (o)	0.0374	0.00104	"	0.104		35.9	80-120	32.1	20	QM-05
Surrogate: 1,4-Difluorobenzene	*0.122*		*"*	*0.125*		*97.8*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.137*		*"*	*0.125*		*109*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3K3004 - TX 1005										
Blank (P3K3004-BLK1)				Prepared: 11/30/23 Analyzed: 12/01/23						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*32.8*		"	*40.0*		*82.1*	*70-130*			
Surrogate: o-Terphenyl	*17.9*		"	*20.0*		*89.6*	*70-130*			
LCS (P3K3004-BS1)				Prepared: 11/30/23 Analyzed: 12/01/23						
C6-C12	409	25.0	mg/kg	400		102	75-125			
>C12-C28	389	25.0	"	400		97.3	75-125			
Surrogate: 1-Chlorooctane	*42.4*		"	*40.0*		*106*	*70-130*			
Surrogate: o-Terphenyl	*16.2*		"	*20.0*		*81.0*	*70-130*			
LCS Dup (P3K3004-BSD1)				Prepared: 11/30/23 Analyzed: 12/01/23						
C6-C12	673	25.0	mg/kg	650		104	75-125	1.27	20	
>C12-C28	652	25.0	"	650		100	75-125	2.99	20	
Surrogate: 1-Chlorooctane	*103*		"	*100*		*103*	*70-130*			
Surrogate: o-Terphenyl	*44.9*		"	*50.0*		*89.9*	*70-130*			
Calibration Check (P3K3004-CCV1)				Prepared: 11/30/23 Analyzed: 12/01/23						
C6-C12	125	25.0	mg/kg	120		104	85-115			
>C12-C28	128	25.0	"	120		107	85-115			
Surrogate: 1-Chlorooctane	*56.9*		"	*50.0*		*114*	*70-130*			
Surrogate: o-Terphenyl	*28.8*		"	*25.0*		*115*	*70-130*			
Calibration Check (P3K3004-CCV2)				Prepared: 11/30/23 Analyzed: 12/01/23						
C6-C12	129	25.0	mg/kg	130		99.4	85-115			
>C12-C28	144	25.0	"	130		111	85-115			
Surrogate: 1-Chlorooctane	*58.3*		"	*50.0*		*117*	*70-130*			
Surrogate: o-Terphenyl	*29.9*		"	*25.0*		*120*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3K3004 - TX 1005										
Calibration Check (P3K3004-CCV3)				Prepared: 11/30/23 Analyzed: 12/01/23						
C6-C12	122	25.0	mg/kg	130		93.7	85-115			
>C12-C28	141	25.0	"	130		108	85-115			
Surrogate: 1-Chlorooctane	*55.0*		*"*	*50.0*		*110*	*70-130*			
Surrogate: o-Terphenyl	*28.3*		*"*	*25.0*		*113*	*70-130*			
Duplicate (P3K3004-DUP1)		**Source: 3K29008-07**		Prepared: 11/30/23 Analyzed: 12/01/23						
C6-C12	ND	28.1	mg/kg dry		ND				20	
>C12-C28	ND	28.1	"		ND				20	
Surrogate: 1-Chlorooctane	*110*		*"*	*112*		*97.5*	*70-130*			
Surrogate: o-Terphenyl	*59.3*		*"*	*56.2*		*106*	*70-130*			
Batch P3K3005 - TX 1005										
Blank (P3K3005-BLK1)				Prepared & Analyzed: 11/30/23						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*37.9*		*"*	*50.0*		*75.8*	*70-130*			
Surrogate: o-Terphenyl	*21.4*		*"*	*25.0*		*85.4*	*70-130*			
LCS (P3K3005-BS1)				Prepared & Analyzed: 11/30/23						
C6-C12	414	25.0	mg/kg	500		82.8	75-125			
>C12-C28	422	25.0	"	500		84.4	75-125			
Surrogate: 1-Chlorooctane	*51.9*		*"*	*50.0*		*104*	*70-130*			
Surrogate: o-Terphenyl	*19.8*		*"*	*25.0*		*79.4*	*70-130*			
LCS Dup (P3K3005-BSD1)				Prepared & Analyzed: 11/30/23						
C6-C12	696	25.0	mg/kg	700		99.4	75-125	18.3	20	
>C12-C28	729	25.0	"	700		104	75-125	21.0	20	QR-02
Surrogate: 1-Chlorooctane	*129*		*"*	*100*		*129*	*70-130*			
Surrogate: o-Terphenyl	*56.5*		*"*	*50.0*		*113*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3K3005 - TX 1005										
Calibration Check (P3K3005-CCV1)				Prepared & Analyzed: 11/30/23						
C6-C12	117	25.0	mg/kg	115		101	85-115			
>C12-C28	121	25.0	"	115		105	85-115			
Surrogate: 1-Chlorooctane	*59.1*		"	*50.0*		*118*	*70-130*			
Surrogate: o-Terphenyl	*31.4*		"	*25.0*		*126*	*70-130*			
Calibration Check (P3K3005-CCV2)				Prepared & Analyzed: 11/30/23						
C6-C12	113	25.0	mg/kg	115		98.5	85-115			
>C12-C28	125	25.0	"	115		109	85-115			
Surrogate: 1-Chlorooctane	*60.6*		"	*50.0*		*121*	*70-130*			
Surrogate: o-Terphenyl	*32.5*		"	*25.0*		*130*	*70-130*			
Calibration Check (P3K3005-CCV3)				Prepared & Analyzed: 11/30/23						
C6-C12	121	25.0	mg/kg	130		93.3	85-115			
>C12-C28	135	25.0	"	130		104	85-115			
Surrogate: 1-Chlorooctane	*63.5*		"	*50.0*		*127*	*70-130*			
Surrogate: o-Terphenyl	*34.3*		"	*25.0*		*137*	*70-130*			*S-GC*
Duplicate (P3K3005-DUP1)		**Source: 3K29009-14**		Prepared & Analyzed: 11/30/23						
C6-C12	19.5	27.5	mg/kg dry		19.2			1.99	20	
>C12-C28	ND	27.5	"		ND				20	
Surrogate: 1-Chlorooctane	*123*		"	*110*		*112*	*70-130*			
Surrogate: o-Terphenyl	*69.3*		"	*54.9*		*126*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3K3001 - * DEFAULT PREP *** **										
Blank (P3K3001-BLK1)				Prepared & Analyzed: 11/30/23						
% Moisture	ND	0.1	%							
Blank (P3K3001-BLK2)				Prepared & Analyzed: 11/30/23						
% Moisture	ND	0.1	%							
Blank (P3K3001-BLK3)				Prepared & Analyzed: 11/30/23						
% Moisture	ND	0.1	%							
Blank (P3K3001-BLK4)				Prepared & Analyzed: 11/30/23						
% Moisture	ND	0.1	%							
Duplicate (P3K3001-DUP1)	**Source: 3K28016-01**			Prepared & Analyzed: 11/30/23						
% Moisture	1.0	0.1	%		2.0			66.7	20	R3
Duplicate (P3K3001-DUP2)	**Source: 3K29003-04**			Prepared & Analyzed: 11/30/23						
% Moisture	4.0	0.1	%		5.0			22.2	20	R3
Duplicate (P3K3001-DUP3)	**Source: 3K29007-04**			Prepared & Analyzed: 11/30/23						
% Moisture	5.0	0.1	%		5.0			0.00	20	
Duplicate (P3K3001-DUP4)	**Source: 3K29007-14**			Prepared & Analyzed: 11/30/23						
% Moisture	19.0	0.1	%		19.0			0.00	20	
Duplicate (P3K3001-DUP5)	**Source: 3K29008-03**			Prepared & Analyzed: 11/30/23						
% Moisture	9.0	0.1	%		9.0			0.00	20	
Duplicate (P3K3001-DUP6)	**Source: 3K29009-02**			Prepared & Analyzed: 11/30/23						
% Moisture	7.0	0.1	%		7.0			0.00	20	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3K3008 - * DEFAULT PREP *** **										
Blank (P3K3008-BLK1)				Prepared: 11/30/23 Analyzed: 12/02/23						
Chloride	ND	1.00	mg/kg							
LCS (P3K3008-BS1)				Prepared: 11/30/23 Analyzed: 12/02/23						
Chloride	15.7		mg/kg	16.0		97.8	90-110			
LCS Dup (P3K3008-BSD1)				Prepared: 11/30/23 Analyzed: 12/03/23						
Chloride	16.7		mg/kg	16.0		105	90-110	6.67	10	
Calibration Check (P3K3008-CCV1)				Prepared: 11/30/23 Analyzed: 12/02/23						
Chloride	16.3		mg/kg	16.0		102	90-110			
Calibration Check (P3K3008-CCV2)				Prepared: 11/30/23 Analyzed: 12/02/23						
Chloride	16.1		mg/kg	16.0		101	90-110			
Matrix Spike (P3K3008-MS1)		**Source: 3K29006-02**		Prepared: 11/30/23 Analyzed: 12/02/23						
Chloride	106		mg/kg	100	19.0	86.8	80-120			
Matrix Spike (P3K3008-MS2)		**Source: 3K29008-03**		Prepared: 11/30/23 Analyzed: 12/02/23						
Chloride	86.7		mg/kg	100	0.153	86.6	80-120			
Matrix Spike Dup (P3K3008-MSD1)		**Source: 3K29006-02**		Prepared: 11/30/23 Analyzed: 12/02/23						
Chloride	95.8		mg/kg	100	19.0	76.8	80-120	9.90	20	QM-05
Matrix Spike Dup (P3K3008-MSD2)		**Source: 3K29008-03**		Prepared: 11/30/23 Analyzed: 12/02/23						
Chloride	71.0		mg/kg	100	0.153	70.8	80-120	20.0	20	QM-05

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Notes and Definitions

S-GC	Surrogate recovery outside of control limits. The data was accepted based on valid recovery of the remaining surrogate.
ROI	Received on Ice
R3	The RPD exceeded the acceptance limit due to sample matrix effects.
QR-02	The RPD result exceeded the QC control limits; however, both percent recoveries were acceptable. Sample results for the QC batch were accepted based on percent recoveries and completeness of QC data.
QM-05	The spike recovery was outside acceptance limits for the MS and/or MSD due to matrix interference. The LCS and/or LCSD were within acceptance limits showing that the laboratory is in control and the data is acceptable.
BULK	Samples received in Bulk soil containers may be biased low in the nC6-C12 TPH Range
B-13	A common laboratory contaminant was above the RL in the blank
DET	Analyte DETECTED
ND	Analyte NOT DETECTED at or above the reporting limit
NR	Not Reported
dry	Sample results reported on a dry weight basis
RPD	Relative Percent Difference
LCS	Laboratory Control Spike
MS	Matrix Spike
Dup	Duplicate

Report Approved By: Brent Barron Date: 12/5/2023

Brent Barron, Laboratory Director/Technical Director

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

This material is intended only for the use of the individual (s) or entity to whom it is addressed, and may contain information that is privileged and confidential.

If you have received this material in error, please notify us immediately at 432-686-7235.

Page 238 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST L: CH: W:

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-[redacted]557-0934 **Fax No:**
Sampler Signature: Jose Bellor
Project Name: Jalapeño
Project #: CDEV#11845
Project Loc: Lea, co, NM
PO #:
Report Format: ☒ Standard ☐ TRRP ☐ NPDES
e-mail: Jamey@TellusServices.com

(lab use only) **ORDER #:** 3K29008

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total #. of Containers	Preservation & # of Containers: Ice	HNO3	HCl	H2SO4	NaOH	Na2S2O3	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge / GW = Groundwater S=Soil/Solid / NP=Non-Potable Specify Other	Analyze For: TPH: TX 1005 TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX-EPA-8021	TPH-EPA-8015	Chlorides EPA-300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
1	BH-31 @ 2ft	2ft	2ft	11-20-23	9:10		1	X								S				X	X	X		X
2	BH-30@ 2ft	2ft	2ft	11-20-23	9:08		1	X								S								
3	BH-32@ 2ft	2ft	2ft	11-20-23	9:11		1	X								S								
4	BH-29@ 2ft	2ft	2ft	11-2023	9:06		1	X								S								
5	BH-33 @ 2ft	2ft	2ft	11-20-23	9:12		1	X								S								
6	BH-28 @ 2ft	2ft	2ft	11-20-23	9:04		1	X								S								
7	BH-27 @ 2ft	2ft	2ft	11-20-23	9:02		1	X								S								
8	BH-26 @ 2ft	2ft	2ft	11-20-23	9:00		1	X								S								
9	SW-@1ft	1ft	1ft	11-20-23	9:16		1	X								S								
10	EW-@1ft	1ft	1ft	11-20-23	9:14		1	X								S								

Special Instructions: Report TPH-in-C6-C12, >C12-C28 and >C28-C35 fractions aswell as Total TPH

Relinquished by:	Date	Time	Received by:	Date	Time
	11/29	1300			
	11/29	1330			
			Received by PBEL	11/29/23	13:30

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N
by Sampler/Client Rep. ?	Y	N

by Courier? UPS DHL FedEx Lone Star

Temperature Upon Receipt: CF0 L3
Received: 3.5 °C Thermometer:
Adjusted: °C Factor:

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

Page 239 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934 **Fax No:**
Sampler Signature: Jose Bellor **e-mail:** Jamey@Tellus services.com

Project Name: Jalapeño
Project #: CDEV #11845
Project Loc: Lea CO, NM
PO #:
Report Format: ☐ Standard ☐ TRRP ☐ NPDES

(lab use only)
ORDER #: 3K29008

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total # of Containers	Preservation & # of Containers: Ice	HNO_3	HCl	H_2SO_4	NaOH	$Na_2S_2O_3$	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge GW = Groundwater S=Soil/Solid NP=Non-Potable Specify Other	Analyze For: TCLP: TPH: TX 1005 TX 1006	Anions (Cl, SO4, Alkalinity)	TOTAL: BTEX 8021B/5030 or BTEX 8260	BTEX-EPA 8021	TPH-EPA-8015	Chlorides EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
11	NW-1@1ft	1ft	1ft	11-2023	9:18		1	X								S				X	X	X		X

Special Instructions: Report TPH-in-C6-C12,7 : C12-C28 and > C28-C35 Fractions as well as Total TPH

Relinquished by:	Date	Time	Received by:	Date	Time
	11/29	1200			
Relinquished by:	Date	Time	Received by:	Date	Time
	11/29	1330			
Relinquished by:	Date	Time	Received by PBEL:	Date	Time
				11/29/23	13:30

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N
by Sampler/Client Rep. ?		
by Courier? UPS DHL FedEx Lone Star		

Temperature Upon Receipt:
Received: 3.5 °C Thermometer: CF03
Adjusted: °C Factor:

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

PERMIAN BASIN
ENVIRONMENTAL LAB, LP
1400 Rankin Hwy
Midland, TX 79701

PBELAB

Analytical Report

Prepared for:

Jamey Fowler

Tellus Consulting, LLC

4000 North Big Spring Street Suite 109

Midland, TX 79705

Project: Jalapeno

Project Number: CDEV #11845

Location: LEA COUNTY, NM

Lab Order Number: 3K29009

NELAP ACCREDITED TNI LABORATORY

Current Certification

Report Date: 12/06/23

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

ANALYTICAL REPORT FOR SAMPLES

Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
BH-37 @ 1FT	3K29009-01	Soil	11/22/23 10:00	11-29-2023 13:30
BH-38 @ 1FT	3K29009-02	Soil	11/22/23 10:02	11-29-2023 13:30
BH-39 @ 1FT	3K29009-03	Soil	11/22/23 10:04	11-29-2023 13:30
BH-40 @ 1FT	3K29009-04	Soil	11/22/23 10:06	11-29-2023 13:30
BH-41 @ 1FT	3K29009-05	Soil	11/22/23 10:08	11-29-2023 13:30
BH-42 @ 1FT	3K29009-06	Soil	11/22/23 10:10	11-29-2023 13:30
BH-43 @ 1FT	3K29009-07	Soil	11/22/23 10:12	11-29-2023 13:30
BH-44 @ 1FT	3K29009-08	Soil	11/22/23 10:14	11-29-2023 13:30
BH-45 @ 1FT	3K29009-09	Soil	11/22/23 10:16	11-29-2023 13:30
BH-46 @ 1FT	3K29009-10	Soil	11/22/23 10:18	11-29-2023 13:30
BH-47 @ 1FT	3K29009-11	Soil	11/22/23 10:23	11-29-2023 13:30
BH-48 @ 1FT	3K29009-12	Soil	11/22/23 10:22	11-29-2023 13:30
BH-49 @ 1FT	3K29009-13	Soil	11/22/23 10:24	11-29-2023 13:30
BH-50 @ 1FT	3K29009-14	Soil	11/22/23 10:26	11-29-2023 13:30

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-37 @ 1FT

3K29009-01 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 13:25	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 13:25	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 13:25	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 13:25	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 13:25	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*120 %*	*80-120*		*P3L0504*	*12/05/23 08:58*	*12/05/23 13:25*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.5 %*	*80-120*		*P3L0504*	*12/05/23 08:58*	*12/05/23 13:25*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/05/23 08:58	12/05/23 13:25	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/05/23 08:58	12/05/23 13:25	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*123 %*	*70-130*		*P3K3005*	*11/30/23 14:52*	*11/30/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*136 %*	*70-130*		*P3K3005*	*11/30/23 14:52*	*11/30/23 17:00*	*TPH 8015M*	*S-GC*
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	11/30/23 14:52	11/30/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**110**	1.05	mg/kg dry	1	P3K3008	11/30/23 16:20	12/03/23 00:27	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-38 @ 1FT

3K29009-02 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00108	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 13:50	EPA 8021B	
Toluene	ND	0.00108	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 13:50	EPA 8021B	
Ethylbenzene	ND	0.00108	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 13:50	EPA 8021B	
Xylene (p/m)	ND	0.00215	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 13:50	EPA 8021B	
Xylene (o)	ND	0.00108	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 13:50	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0504*	*12/05/23 08:58*	*12/05/23 13:50*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.2 %*	*80-120*		*P3L0504*	*12/05/23 08:58*	*12/05/23 13:50*	*EPA 8021B*	
Xylenes (total)	ND	0.00215	mg/kg dry	1	[CALC]	12/05/23 08:58	12/05/23 13:50	EPA 8021B	
Total BTEX	ND	0.00108	mg/kg dry	1	[CALC]	12/05/23 08:58	12/05/23 13:50	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.9	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
>C12-C28	ND	26.9	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
>C28-C35	ND	26.9	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*129 %*	*70-130*		*P3K3005*	*11/30/23 14:52*	*11/30/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*142 %*	*70-130*		*P3K3005*	*11/30/23 14:52*	*11/30/23 17:00*	*TPH 8015M*	*S-GC*
Total Petroleum Hydrocarbon C6-C35	ND	26.9	mg/kg dry	1	[CALC]	11/30/23 14:52	11/30/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**38.5**	1.08	mg/kg dry	1	P3K3009	11/30/23 16:25	12/01/23 07:25	EPA 300.0	
% Moisture	**7.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-39 @ 1FT

3K29009-03 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 14:14	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 14:14	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 14:14	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 14:14	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 14:14	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0504*	*12/05/23 08:58*	*12/05/23 14:14*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.3 %*	*80-120*		*P3L0504*	*12/05/23 08:58*	*12/05/23 14:14*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/05/23 08:58	12/05/23 14:14	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	12/05/23 08:58	12/05/23 14:14	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*118 %*	*70-130*		*P3K3005*	*11/30/23 14:52*	*11/30/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*130 %*	*70-130*		*P3K3005*	*11/30/23 14:52*	*11/30/23 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	11/30/23 14:52	11/30/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**7.97**	1.06	mg/kg dry	1	P3K3009	11/30/23 16:25	12/01/23 07:39	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-40 @ 1FT

3K29009-04 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00114	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 14:39	EPA 8021B	
Toluene	ND	0.00114	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 14:39	EPA 8021B	
Ethylbenzene	ND	0.00114	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 14:39	EPA 8021B	
Xylene (p/m)	ND	0.00227	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 14:39	EPA 8021B	
Xylene (o)	ND	0.00114	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 14:39	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.3 %*	*80-120*		*P3L0504*	*12/05/23 08:58*	*12/05/23 14:39*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*118 %*	*80-120*		*P3L0504*	*12/05/23 08:58*	*12/05/23 14:39*	*EPA 8021B*	
Xylenes (total)	ND	0.00227	mg/kg dry	1	[CALC]	12/05/23 08:58	12/05/23 14:39	EPA 8021B	
Total BTEX	ND	0.00114	mg/kg dry	1	[CALC]	12/05/23 08:58	12/05/23 14:39	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	28.4	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
>C12-C28	ND	28.4	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
>C28-C35	ND	28.4	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*111 %*	*70-130*		*P3K3005*	*11/30/23 14:52*	*11/30/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*126 %*	*70-130*		*P3K3005*	*11/30/23 14:52*	*11/30/23 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	28.4	mg/kg dry	1	[CALC]	11/30/23 14:52	11/30/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**18.3**	1.14	mg/kg dry	1	P3K3009	11/30/23 16:25	12/01/23 07:54	EPA 300.0	
% Moisture	**12.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-41 @ 1FT

3K29009-05 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00111	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 15:03	EPA 8021B	
Toluene	ND	0.00111	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 15:03	EPA 8021B	
Ethylbenzene	ND	0.00111	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 15:03	EPA 8021B	
Xylene (p/m)	ND	0.00222	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 15:03	EPA 8021B	
Xylene (o)	ND	0.00111	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 15:03	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0504*	*12/05/23 08:58*	*12/05/23 15:03*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.9 %*	*80-120*		*P3L0504*	*12/05/23 08:58*	*12/05/23 15:03*	*EPA 8021B*	
Xylenes (total)	ND	0.00222	mg/kg dry	1	[CALC]	12/05/23 08:58	12/05/23 15:03	EPA 8021B	
Total BTEX	ND	0.00111	mg/kg dry	1	[CALC]	12/05/23 08:58	12/05/23 15:03	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.8	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
>C12-C28	ND	27.8	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
>C28-C35	ND	27.8	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*108 %*	*70-130*		*P3K3005*	*11/30/23 14:52*	*11/30/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*125 %*	*70-130*		*P3K3005*	*11/30/23 14:52*	*11/30/23 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.8	mg/kg dry	1	[CALC]	11/30/23 14:52	11/30/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**37.5**	1.11	mg/kg dry	1	P3K3009	11/30/23 16:25	12/01/23 08:08	EPA 300.0	
% Moisture	**10.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-42 @ 1FT

3K29009-06 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00114	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 15:28	EPA 8021B	
Toluene	ND	0.00114	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 15:28	EPA 8021B	
Ethylbenzene	ND	0.00114	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 15:28	EPA 8021B	
Xylene (p/m)	ND	0.00227	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 15:28	EPA 8021B	
Xylene (o)	ND	0.00114	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 15:28	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0504*	*12/05/23 08:58*	*12/05/23 15:28*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.4 %*	*80-120*		*P3L0504*	*12/05/23 08:58*	*12/05/23 15:28*	*EPA 8021B*	
Xylenes (total)	ND	0.00227	mg/kg dry	1	[CALC]	12/05/23 08:58	12/05/23 15:28	EPA 8021B	
Total BTEX	ND	0.00114	mg/kg dry	1	[CALC]	12/05/23 08:58	12/05/23 15:28	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	28.4	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
>C12-C28	ND	28.4	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
>C28-C35	ND	28.4	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*112 %*	*70-130*		*P3K3005*	*11/30/23 14:52*	*11/30/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*123 %*	*70-130*		*P3K3005*	*11/30/23 14:52*	*11/30/23 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	28.4	mg/kg dry	1	[CALC]	11/30/23 14:52	11/30/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**219**	1.14	mg/kg dry	1	P3K3009	11/30/23 16:25	12/01/23 08:51	EPA 300.0	
% Moisture	**12.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-43 @ 1FT

3K29009-07 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 15:52	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 15:52	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 15:52	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 15:52	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 15:52	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.2 %*	*80-120*		*P3L0504*	*12/05/23 08:58*	*12/05/23 15:52*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0504*	*12/05/23 08:58*	*12/05/23 15:52*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/05/23 08:58	12/05/23 15:52	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/05/23 08:58	12/05/23 15:52	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*119 %*	*70-130*		*P3K3005*	*11/30/23 14:52*	*11/30/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*129 %*	*70-130*		*P3K3005*	*11/30/23 14:52*	*11/30/23 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	11/30/23 14:52	11/30/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**77.0**	1.04	mg/kg dry	1	P3K3009	11/30/23 16:25	12/01/23 09:34	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-44 @ 1FT

3K29009-08 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 16:16	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 16:16	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 16:16	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 16:16	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 16:16	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.0 %*	*80-120*		*P3L0504*	*12/05/23 08:58*	*12/05/23 16:16*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0504*	*12/05/23 08:58*	*12/05/23 16:16*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/05/23 08:58	12/05/23 16:16	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	12/05/23 08:58	12/05/23 16:16	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*93.1 %*	*70-130*		*P3K3005*	*11/30/23 14:52*	*11/30/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*102 %*	*70-130*		*P3K3005*	*11/30/23 14:52*	*11/30/23 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	11/30/23 14:52	11/30/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**94.9**	1.06	mg/kg dry	1	P3L0107	12/01/23 15:22	12/03/23 01:53	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-45 @ 1FT

3K29009-09 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00112	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 17:30	EPA 8021B	
Toluene	ND	0.00112	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 17:30	EPA 8021B	
Ethylbenzene	ND	0.00112	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 17:30	EPA 8021B	
Xylene (p/m)	ND	0.00225	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 17:30	EPA 8021B	
Xylene (o)	ND	0.00112	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 17:30	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0504*	*12/05/23 08:58*	*12/05/23 17:30*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.2 %*	*80-120*		*P3L0504*	*12/05/23 08:58*	*12/05/23 17:30*	*EPA 8021B*	
Xylenes (total)	ND	0.00225	mg/kg dry	1	[CALC]	12/05/23 08:58	12/05/23 17:30	EPA 8021B	
Total BTEX	ND	0.00112	mg/kg dry	1	[CALC]	12/05/23 08:58	12/05/23 17:30	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	28.1	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
>C12-C28	ND	28.1	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
>C28-C35	ND	28.1	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*127 %*	*70-130*		*P3K3005*	*11/30/23 14:52*	*11/30/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*141 %*	*70-130*		*P3K3005*	*11/30/23 14:52*	*11/30/23 17:00*	*TPH 8015M*	*S-GC*
Total Petroleum Hydrocarbon C6-C35	ND	28.1	mg/kg dry	1	[CALC]	11/30/23 14:52	11/30/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**603**	1.12	mg/kg dry	1	P3L0107	12/01/23 15:22	12/03/23 02:37	EPA 300.0	
% Moisture	**11.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-46 @ 1FT

3K29009-10 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00108	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 17:54	EPA 8021B	
Toluene	ND	0.00108	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 17:54	EPA 8021B	
Ethylbenzene	ND	0.00108	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 17:54	EPA 8021B	
Xylene (p/m)	ND	0.00215	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 17:54	EPA 8021B	
Xylene (o)	ND	0.00108	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 17:54	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0504*	*12/05/23 08:58*	*12/05/23 17:54*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.7 %*	*80-120*		*P3L0504*	*12/05/23 08:58*	*12/05/23 17:54*	*EPA 8021B*	
Xylenes (total)	ND	0.00215	mg/kg dry	1	[CALC]	12/05/23 08:58	12/05/23 17:54	EPA 8021B	
Total BTEX	ND	0.00108	mg/kg dry	1	[CALC]	12/05/23 08:58	12/05/23 17:54	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.9	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
>C12-C28	ND	26.9	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
>C28-C35	ND	26.9	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*121 %*	*70-130*		*P3K3005*	*11/30/23 14:52*	*11/30/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*133 %*	*70-130*		*P3K3005*	*11/30/23 14:52*	*11/30/23 17:00*	*TPH 8015M*	*S-GC*
Total Petroleum Hydrocarbon C6-C35	ND	26.9	mg/kg dry	1	[CALC]	11/30/23 14:52	11/30/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**72.1**	1.08	mg/kg dry	1	P3L0107	12/01/23 15:22	12/03/23 02:51	EPA 300.0	
% Moisture	**7.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-47 @ 1FT

3K29009-11 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 18:19	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 18:19	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 18:19	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 18:19	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 18:19	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.5 %*	*80-120*		*P3L0504*	*12/05/23 08:58*	*12/05/23 18:19*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*114 %*	*80-120*		*P3L0504*	*12/05/23 08:58*	*12/05/23 18:19*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/05/23 08:58	12/05/23 18:19	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	12/05/23 08:58	12/05/23 18:19	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*127 %*	*70-130*		*P3K3005*	*11/30/23 14:52*	*11/30/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*141 %*	*70-130*		*P3K3005*	*11/30/23 14:52*	*11/30/23 17:00*	*TPH 8015M*	*S-GC*
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	11/30/23 14:52	11/30/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**38.2**	1.06	mg/kg dry	1	P3L0107	12/01/23 15:22	12/03/23 03:05	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-48 @ 1FT

3K29009-12 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00108	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 18:43	EPA 8021B	
Toluene	ND	0.00108	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 18:43	EPA 8021B	
Ethylbenzene	ND	0.00108	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 18:43	EPA 8021B	
Xylene (p/m)	ND	0.00215	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 18:43	EPA 8021B	
Xylene (o)	ND	0.00108	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 18:43	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0504*	*12/05/23 08:58*	*12/05/23 18:43*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*97.1 %*	*80-120*		*P3L0504*	*12/05/23 08:58*	*12/05/23 18:43*	*EPA 8021B*	
Xylenes (total)	ND	0.00215	mg/kg dry	1	[CALC]	12/05/23 08:58	12/05/23 18:43	EPA 8021B	
Total BTEX	ND	0.00108	mg/kg dry	1	[CALC]	12/05/23 08:58	12/05/23 18:43	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.9	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
>C12-C28	ND	26.9	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
>C28-C35	ND	26.9	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*118 %*	*70-130*		*P3K3005*	*11/30/23 14:52*	*11/30/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*132 %*	*70-130*		*P3K3005*	*11/30/23 14:52*	*11/30/23 17:00*	*TPH 8015M*	*S-GC*
Total Petroleum Hydrocarbon C6-C35	ND	26.9	mg/kg dry	1	[CALC]	11/30/23 14:52	11/30/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**140**	1.08	mg/kg dry	1	P3L0107	12/01/23 15:22	12/03/23 03:19	EPA 300.0	
% Moisture	**7.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-49 @ 1FT

3K29009-13 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L0505	12/05/23 09:08	12/06/23 00:23	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L0505	12/05/23 09:08	12/06/23 00:23	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L0505	12/05/23 09:08	12/06/23 00:23	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L0505	12/05/23 09:08	12/06/23 00:23	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L0505	12/05/23 09:08	12/06/23 00:23	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.5 %*	*80-120*		*P3L0505*	*12/05/23 09:08*	*12/06/23 00:23*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0505*	*12/05/23 09:08*	*12/06/23 00:23*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/05/23 09:08	12/06/23 00:23	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	12/05/23 09:08	12/06/23 00:23	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*118 %*	*70-130*		*P3K3005*	*11/30/23 14:52*	*11/30/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*131 %*	*70-130*		*P3K3005*	*11/30/23 14:52*	*11/30/23 17:00*	*TPH 8015M*	*S-GC*
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	11/30/23 14:52	11/30/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**14.4**	1.06	mg/kg dry	1	P3L0107	12/01/23 15:22	12/03/23 03:34	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-50 @ 1FT

3K29009-14 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00110	mg/kg dry	1	P3L0505	12/05/23 09:08	12/06/23 00:48	EPA 8021B	
Toluene	ND	0.00110	mg/kg dry	1	P3L0505	12/05/23 09:08	12/06/23 00:48	EPA 8021B	
Ethylbenzene	ND	0.00110	mg/kg dry	1	P3L0505	12/05/23 09:08	12/06/23 00:48	EPA 8021B	
Xylene (p/m)	ND	0.00220	mg/kg dry	1	P3L0505	12/05/23 09:08	12/06/23 00:48	EPA 8021B	
Xylene (o)	ND	0.00110	mg/kg dry	1	P3L0505	12/05/23 09:08	12/06/23 00:48	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.8 %*	*80-120*		*P3L0505*	*12/05/23 09:08*	*12/06/23 00:48*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0505*	*12/05/23 09:08*	*12/06/23 00:48*	*EPA 8021B*	
Xylenes (total)	ND	0.00220	mg/kg dry	1	[CALC]	12/05/23 09:08	12/06/23 00:48	EPA 8021B	
Total BTEX	ND	0.00110	mg/kg dry	1	[CALC]	12/05/23 09:08	12/06/23 00:48	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.5	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
>C12-C28	ND	27.5	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
>C28-C35	ND	27.5	mg/kg dry	1	P3K3005	11/30/23 14:52	11/30/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*113 %*	*70-130*		*P3K3005*	*11/30/23 14:52*	*11/30/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*129 %*	*70-130*		*P3K3005*	*11/30/23 14:52*	*11/30/23 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.5	mg/kg dry	1	[CALC]	11/30/23 14:52	11/30/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**7.12**	1.10	mg/kg dry	1	P3L0107	12/01/23 15:22	12/03/23 03:48	EPA 300.0	
% Moisture	**9.0**	0.1	%	1	P3K3001	11/30/23 10:39	11/30/23 10:46	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0504 - * DEFAULT PREP *** **										
Blank (P3L0504-BLK1)				Prepared & Analyzed: 12/05/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*95.2*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.138*		"	*0.120*		*115*	*80-120*			
LCS (P3L0504-BS1)				Prepared & Analyzed: 12/05/23						
Benzene	0.105	0.00100	mg/kg	0.100		105	80-120			
Toluene	0.0984	0.00100	"	0.100		98.4	80-120			
Ethylbenzene	0.108	0.00100	"	0.100		108	80-120			
Xylene (p/m)	0.210	0.00200	"	0.200		105	80-120			
Xylene (o)	0.0964	0.00100	"	0.100		96.4	80-120			
Surrogate: 1,4-Difluorobenzene	*0.117*		"	*0.120*		*97.4*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.130*		"	*0.120*		*109*	*80-120*			
LCS Dup (P3L0504-BSD1)				Prepared & Analyzed: 12/05/23						
Benzene	0.107	0.00100	mg/kg	0.100		107	80-120	2.08	20	
Toluene	0.101	0.00100	"	0.100		101	80-120	2.32	20	
Ethylbenzene	0.111	0.00100	"	0.100		111	80-120	2.59	20	
Xylene (p/m)	0.216	0.00200	"	0.200		108	80-120	2.84	20	
Xylene (o)	0.0987	0.00100	"	0.100		98.7	80-120	2.34	20	
Surrogate: 1,4-Difluorobenzene	*0.117*		"	*0.120*		*97.9*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.131*		"	*0.120*		*109*	*80-120*			
Calibration Blank (P3L0504-CCB1)				Prepared & Analyzed: 12/05/23						
Benzene	0.150		ug/kg							
Toluene	0.290		"							
Ethylbenzene	0.110		"							
Xylene (p/m)	0.160		"							
Xylene (o)	0.0900		"							
Surrogate: 4-Bromofluorobenzene	*0.135*		"	*0.120*		*112*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.115*		"	*0.120*		*96.1*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0504 - * DEFAULT PREP *** **										
Calibration Blank (P3L0504-CCB2)				Prepared & Analyzed: 12/05/23						
Benzene	0.180		ug/kg							
Toluene	0.220		"							
Ethylbenzene	0.210		"							
Xylene (p/m)	0.180		"							
Xylene (o)	0.180		"							
Surrogate: 1,4-Difluorobenzene	*0.114*		*"*	*0.120*		*95.1*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.136*		*"*	*0.120*		*114*	*80-120*			
Calibration Blank (P3L0504-CCB3)				Prepared & Analyzed: 12/05/23						
Benzene	0.130		ug/kg							
Toluene	0.210		"							
Ethylbenzene	0.130		"							
Xylene (p/m)	0.220		"							
Xylene (o)	0.200		"							
Surrogate: 4-Bromofluorobenzene	*0.137*		*"*	*0.120*		*115*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.115*		*"*	*0.120*		*96.2*	*80-120*			
Calibration Check (P3L0504-CCV1)				Prepared & Analyzed: 12/05/23						
Benzene	0.104	0.00100	mg/kg	0.100		104	80-120			
Toluene	0.0958	0.00100	"	0.100		95.8	80-120			
Ethylbenzene	0.0983	0.00100	"	0.100		98.3	80-120			
Xylene (p/m)	0.204	0.00200	"	0.200		102	80-120			
Xylene (o)	0.0930	0.00100	"	0.100		93.0	80-120			
Surrogate: 1,4-Difluorobenzene	*0.117*		*"*	*0.120*		*97.8*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.129*		*"*	*0.120*		*107*	*75-125*			
Calibration Check (P3L0504-CCV2)				Prepared & Analyzed: 12/05/23						
Benzene	0.110	0.00100	mg/kg	0.100		110	80-120			
Toluene	0.103	0.00100	"	0.100		103	80-120			
Ethylbenzene	0.105	0.00100	"	0.100		105	80-120			
Xylene (p/m)	0.214	0.00200	"	0.200		107	80-120			
Xylene (o)	0.101	0.00100	"	0.100		101	80-120			
Surrogate: 1,4-Difluorobenzene	*0.116*		*"*	*0.120*		*96.5*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.131*		*"*	*0.120*		*109*	*75-125*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0504 - * DEFAULT PREP *** **										
Calibration Check (P3L0504-CCV3)				Prepared & Analyzed: 12/05/23						
Benzene	0.115	0.00100	mg/kg	0.100		115	80-120			
Toluene	0.108	0.00100	"	0.100		108	80-120			
Ethylbenzene	0.110	0.00100	"	0.100		110	80-120			
Xylene (p/m)	0.218	0.00200	"	0.200		109	80-120			
Xylene (o)	0.109	0.00100	"	0.100		109	80-120			
Surrogate: 1,4-Difluorobenzene	*0.118*		"	*0.120*		*98.0*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.137*		"	*0.120*		*114*	*75-125*			
Matrix Spike (P3L0504-MS1)		**Source: 3L04006-01**		Prepared & Analyzed: 12/05/23						
Benzene	0.0540	0.00111	mg/kg dry	0.111	0.00807	41.4	80-120			QM-05
Toluene	0.0393	0.00111	"	0.111	0.0519	NR	80-120			QM-05
Ethylbenzene	0.0689	0.00111	"	0.111	0.0256	39.0	80-120			QM-05
Xylene (p/m)	0.122	0.00222	"	0.222	0.111	5.17	80-120			QM-05
Xylene (o)	0.0686	0.00111	"	0.111	0.0335	31.6	80-120			QM-05
Surrogate: 1,4-Difluorobenzene	*0.134*		"	*0.133*		*101*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.150*		"	*0.133*		*112*	*80-120*			
Matrix Spike Dup (P3L0504-MSD1)		**Source: 3L04006-01**		Prepared & Analyzed: 12/05/23						
Benzene	0.0677	0.00111	mg/kg dry	0.111	0.00807	53.7	80-120	25.9	20	QM-05
Toluene	0.0430	0.00111	"	0.111	0.0519	NR	80-120	NR	20	QM-05
Ethylbenzene	0.0779	0.00111	"	0.111	0.0256	47.0	80-120	18.7	20	QM-05
Xylene (p/m)	0.128	0.00222	"	0.222	0.111	7.51	80-120	36.9	20	QM-05
Xylene (o)	0.0803	0.00111	"	0.111	0.0335	42.2	80-120	28.5	20	QM-05
Surrogate: 1,4-Difluorobenzene	*0.134*		"	*0.133*		*101*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.151*		"	*0.133*		*113*	*80-120*			
Batch P3L0505 - * DEFAULT PREP *** **										
Blank (P3L0505-BLK1)				Prepared & Analyzed: 12/05/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 4-Bromofluorobenzene	*0.138*		"	*0.120*		*115*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.115*		"	*0.120*		*96.2*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0505 - * DEFAULT PREP *** **										
LCS (P3L0505-BS1)				Prepared & Analyzed: 12/05/23						
Benzene	0.108	0.00100	mg/kg	0.100		108	80-120			
Toluene	0.0997	0.00100	"	0.100		99.7	80-120			
Ethylbenzene	0.107	0.00100	"	0.100		107	80-120			
Xylene (p/m)	0.206	0.00200	"	0.200		103	80-120			
Xylene (o)	0.0954	0.00100	"	0.100		95.4	80-120			
Surrogate: 4-Bromofluorobenzene	*0.131*		*"*	*0.120*		*109*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.117*		*"*	*0.120*		*97.5*	*80-120*			
LCS Dup (P3L0505-BSD1)				Prepared & Analyzed: 12/05/23						
Benzene	0.106	0.00100	mg/kg	0.100		106	80-120	1.94	20	
Toluene	0.0977	0.00100	"	0.100		97.7	80-120	1.97	20	
Ethylbenzene	0.106	0.00100	"	0.100		106	80-120	1.10	20	
Xylene (p/m)	0.206	0.00200	"	0.200		103	80-120	0.325	20	
Xylene (o)	0.0942	0.00100	"	0.100		94.2	80-120	1.22	20	
Surrogate: 4-Bromofluorobenzene	*0.131*		*"*	*0.120*		*109*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.117*		*"*	*0.120*		*97.4*	*80-120*			
Calibration Blank (P3L0505-CCB1)				Prepared & Analyzed: 12/05/23						
Benzene	0.130		ug/kg							
Toluene	0.210		"							
Ethylbenzene	0.130		"							
Xylene (p/m)	0.220		"							
Xylene (o)	0.200		"							
Surrogate: 1,4-Difluorobenzene	*0.115*		*"*	*0.120*		*96.2*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.137*		*"*	*0.120*		*115*	*80-120*			
Calibration Blank (P3L0505-CCB2)				Prepared: 12/05/23 Analyzed: 12/06/23						
Benzene	0.110		ug/kg							
Toluene	0.220		"							
Ethylbenzene	0.120		"							
Xylene (p/m)	0.180		"							
Xylene (o)	0.0700		"							
Surrogate: 4-Bromofluorobenzene	*0.138*		*"*	*0.120*		*115*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.116*		*"*	*0.120*		*96.6*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0505 - * DEFAULT PREP *** **										
Calibration Check (P3L0505-CCV1)				Prepared & Analyzed: 12/05/23						
Benzene	0.115	0.00100	mg/kg	0.100		115	80-120			
Toluene	0.108	0.00100	"	0.100		108	80-120			
Ethylbenzene	0.110	0.00100	"	0.100		110	80-120			
Xylene (p/m)	0.218	0.00200	"	0.200		109	80-120			
Xylene (o)	0.109	0.00100	"	0.100		109	80-120			
Surrogate: 1,4-Difluorobenzene	*0.118*		"	*0.120*		*98.0*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.137*		"	*0.120*		*114*	*75-125*			
Calibration Check (P3L0505-CCV2)				Prepared: 12/05/23 Analyzed: 12/06/23						
Benzene	0.117	0.00100	mg/kg	0.100		117	80-120			
Toluene	0.106	0.00100	"	0.100		106	80-120			
Ethylbenzene	0.107	0.00100	"	0.100		107	80-120			
Xylene (p/m)	0.217	0.00200	"	0.200		108	80-120			
Xylene (o)	0.100	0.00100	"	0.100		100	80-120			
Surrogate: 4-Bromofluorobenzene	*0.131*		"	*0.120*		*109*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.119*		"	*0.120*		*98.8*	*75-125*			
Calibration Check (P3L0505-CCV3)				Prepared: 12/05/23 Analyzed: 12/06/23						
Benzene	0.115	0.00100	mg/kg	0.100		115	80-120			
Toluene	0.106	0.00100	"	0.100		106	80-120			
Ethylbenzene	0.107	0.00100	"	0.100		107	80-120			
Xylene (p/m)	0.216	0.00200	"	0.200		108	80-120			
Xylene (o)	0.102	0.00100	"	0.100		102	80-120			
Surrogate: 1,4-Difluorobenzene	*0.117*		"	*0.120*		*97.5*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.134*		"	*0.120*		*111*	*75-125*			
Matrix Spike (P3L0505-MS1)		**Source: 3K29009-13**		Prepared: 12/05/23 Analyzed: 12/06/23						
Benzene	0.0892	0.00106	mg/kg dry	0.106	ND	83.9	80-120			
Toluene	0.0745	0.00106	"	0.106	ND	70.0	80-120			QM-05
Ethylbenzene	0.0772	0.00106	"	0.106	ND	72.6	80-120			QM-05
Xylene (p/m)	0.154	0.00213	"	0.213	ND	72.4	80-120			QM-05
Xylene (o)	0.0687	0.00106	"	0.106	ND	64.6	80-120			QM-05
Surrogate: 1,4-Difluorobenzene	*0.125*		"	*0.128*		*97.7*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.142*		"	*0.128*		*111*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0505 - * DEFAULT PREP *** **										
Matrix Spike Dup (P3L0505-MSD1)	**Source: 3K29009-13**			Prepared: 12/05/23 Analyzed: 12/06/23						
Benzene	0.0944	0.00106	mg/kg dry	0.106	ND	88.8	80-120	5.65	20	
Toluene	0.0798	0.00106	"	0.106	ND	75.0	80-120	6.96	20	QM-05
Ethylbenzene	0.0826	0.00106	"	0.106	ND	77.6	80-120	6.70	20	QM-05
Xylene (p/m)	0.164	0.00213	"	0.213	ND	77.2	80-120	6.47	20	QM-05
Xylene (o)	0.0726	0.00106	"	0.106	ND	68.3	80-120	5.54	20	QM-05
Surrogate: 4-Bromofluorobenzene	*0.141*		*"*	*0.128*		*111*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.124*		*"*	*0.128*		*97.4*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3K3005 - TX 1005										
Blank (P3K3005-BLK1)				Prepared & Analyzed: 11/30/23						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*37.9*		*"*	*50.0*		*75.8*	*70-130*			
Surrogate: o-Terphenyl	*21.4*		*"*	*25.0*		*85.4*	*70-130*			
LCS (P3K3005-BS1)				Prepared & Analyzed: 11/30/23						
C6-C12	414	25.0	mg/kg	500		82.8	75-125			
>C12-C28	422	25.0	"	500		84.4	75-125			
Surrogate: 1-Chlorooctane	*51.9*		*"*	*50.0*		*104*	*70-130*			
Surrogate: o-Terphenyl	*19.8*		*"*	*25.0*		*79.4*	*70-130*			
LCS Dup (P3K3005-BSD1)				Prepared & Analyzed: 11/30/23						
C6-C12	696	25.0	mg/kg	700		99.4	75-125	18.3	20	
>C12-C28	729	25.0	"	700		104	75-125	21.0	20	QR-02
Surrogate: 1-Chlorooctane	*129*		*"*	*100*		*129*	*70-130*			
Surrogate: o-Terphenyl	*56.5*		*"*	*50.0*		*113*	*70-130*			
Calibration Check (P3K3005-CCV1)				Prepared & Analyzed: 11/30/23						
C6-C12	117	25.0	mg/kg	115		101	85-115			
>C12-C28	121	25.0	"	115		105	85-115			
Surrogate: 1-Chlorooctane	*59.1*		*"*	*50.0*		*118*	*70-130*			
Surrogate: o-Terphenyl	*31.4*		*"*	*25.0*		*126*	*70-130*			
Calibration Check (P3K3005-CCV2)				Prepared & Analyzed: 11/30/23						
C6-C12	113	25.0	mg/kg	115		98.5	85-115			
>C12-C28	125	25.0	"	115		109	85-115			
Surrogate: 1-Chlorooctane	*60.6*		*"*	*50.0*		*121*	*70-130*			
Surrogate: o-Terphenyl	*32.5*		*"*	*25.0*		*130*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3K3005 - TX 1005										
Calibration Check (P3K3005-CCV3)				Prepared & Analyzed: 11/30/23						
C6-C12	121	25.0	mg/kg	130		93.3	85-115			
>C12-C28	135	25.0	"	130		104	85-115			
Surrogate: 1-Chlorooctane	*63.5*		*"*	*50.0*		*127*	*70-130*			
Surrogate: o-Terphenyl	*34.3*		*"*	*25.0*		*137*	*70-130*			*S-GC*
Duplicate (P3K3005-DUP1)		**Source: 3K29009-14**		Prepared & Analyzed: 11/30/23						
C6-C12	19.5	27.5	mg/kg dry		19.2			1.99	20	
>C12-C28	ND	27.5	"		ND				20	
Surrogate: 1-Chlorooctane	*123*		*"*	*110*		*112*	*70-130*			
Surrogate: o-Terphenyl	*69.3*		*"*	*54.9*		*126*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3K3001 - * DEFAULT PREP *** **										
Blank (P3K3001-BLK1)				Prepared & Analyzed: 11/30/23						
% Moisture	ND	0.1	%							
Blank (P3K3001-BLK2)				Prepared & Analyzed: 11/30/23						
% Moisture	ND	0.1	%							
Blank (P3K3001-BLK3)				Prepared & Analyzed: 11/30/23						
% Moisture	ND	0.1	%							
Blank (P3K3001-BLK4)				Prepared & Analyzed: 11/30/23						
% Moisture	ND	0.1	%							
Duplicate (P3K3001-DUP1)	**Source: 3K28016-01**			Prepared & Analyzed: 11/30/23						
% Moisture	1.0	0.1	%		2.0			66.7	20	R3
Duplicate (P3K3001-DUP2)	**Source: 3K29003-04**			Prepared & Analyzed: 11/30/23						
% Moisture	4.0	0.1	%		5.0			22.2	20	R3
Duplicate (P3K3001-DUP3)	**Source: 3K29007-04**			Prepared & Analyzed: 11/30/23						
% Moisture	5.0	0.1	%		5.0			0.00	20	
Duplicate (P3K3001-DUP4)	**Source: 3K29007-14**			Prepared & Analyzed: 11/30/23						
% Moisture	19.0	0.1	%		19.0			0.00	20	
Duplicate (P3K3001-DUP5)	**Source: 3K29008-03**			Prepared & Analyzed: 11/30/23						
% Moisture	9.0	0.1	%		9.0			0.00	20	
Duplicate (P3K3001-DUP6)	**Source: 3K29009-02**			Prepared & Analyzed: 11/30/23						
% Moisture	7.0	0.1	%		7.0			0.00	20	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3K3008 - * DEFAULT PREP *** **										
Blank (P3K3008-BLK1)				Prepared: 11/30/23 Analyzed: 12/02/23						
Chloride	ND	1.00	mg/kg							
LCS (P3K3008-BS1)				Prepared: 11/30/23 Analyzed: 12/02/23						
Chloride	15.7		mg/kg	16.0		97.8	90-110			
LCS Dup (P3K3008-BSD1)				Prepared: 11/30/23 Analyzed: 12/03/23						
Chloride	16.7		mg/kg	16.0		105	90-110	6.67	10	
Calibration Check (P3K3008-CCV1)				Prepared: 11/30/23 Analyzed: 12/02/23						
Chloride	16.3		mg/kg	16.0		102	90-110			
Calibration Check (P3K3008-CCV2)				Prepared: 11/30/23 Analyzed: 12/02/23						
Chloride	16.1		mg/kg	16.0		101	90-110			
Matrix Spike (P3K3008-MS1)		**Source: 3K29006-02**		Prepared: 11/30/23 Analyzed: 12/02/23						
Chloride	106		mg/kg	100	19.0	86.8	80-120			
Matrix Spike (P3K3008-MS2)		**Source: 3K29008-03**		Prepared: 11/30/23 Analyzed: 12/02/23						
Chloride	86.7		mg/kg	100	0.153	86.6	80-120			
Matrix Spike Dup (P3K3008-MSD1)		**Source: 3K29006-02**		Prepared: 11/30/23 Analyzed: 12/02/23						
Chloride	95.8		mg/kg	100	19.0	76.8	80-120	9.90	20	QM-05
Matrix Spike Dup (P3K3008-MSD2)		**Source: 3K29008-03**		Prepared: 11/30/23 Analyzed: 12/02/23						
Chloride	71.0		mg/kg	100	0.153	70.8	80-120	20.0	20	QM-05
Batch P3K3009 - * DEFAULT PREP *** **										
Blank (P3K3009-BLK1)				Prepared: 11/30/23 Analyzed: 12/01/23						
Chloride	ND	1.00	mg/kg							

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3K3009 - * DEFAULT PREP *** **										
LCS (P3K3009-BS1)				Prepared: 11/30/23 Analyzed: 12/01/23						
Chloride	16.5		mg/kg	16.0		103	90-110			
LCS Dup (P3K3009-BSD1)				Prepared: 11/30/23 Analyzed: 12/01/23						
Chloride	15.4		mg/kg	16.0		96.2	90-110	6.81	10	
Calibration Check (P3K3009-CCV1)				Prepared: 11/30/23 Analyzed: 12/01/23						
Chloride	18.0		mg/kg	20.0		90.0	90-110			
Calibration Check (P3K3009-CCV2)				Prepared: 11/30/23 Analyzed: 12/01/23						
Chloride	17.2		mg/kg	16.0		107	90-110			
Matrix Spike (P3K3009-MS1)		**Source: 3K29007-21**		Prepared: 11/30/23 Analyzed: 12/01/23						
Chloride	87.1		mg/kg	100	0.403	86.7	80-120			
Matrix Spike (P3K3009-MS2)		**Source: 3K29009-06**		Prepared: 11/30/23 Analyzed: 12/01/23						
Chloride	90.5		mg/kg	100	3.85	86.7	80-120			
Matrix Spike Dup (P3K3009-MSD1)		**Source: 3K29007-21**		Prepared: 11/30/23 Analyzed: 12/01/23						
Chloride	79.8		mg/kg	100	0.403	79.4	80-120	8.70	20	QM-05
Matrix Spike Dup (P3K3009-MSD2)		**Source: 3K29009-06**		Prepared: 11/30/23 Analyzed: 12/01/23						
Chloride	84.3		mg/kg	100	3.85	80.4	80-120	7.18	20	
Batch P3L0107 - * DEFAULT PREP *** **										
Blank (P3L0107-BLK1)				Prepared: 12/01/23 Analyzed: 12/03/23						
Chloride	ND	1.00	mg/kg							

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0107 - * DEFAULT PREP *** **										
LCS (P3L0107-BS1)				Prepared: 12/01/23 Analyzed: 12/03/23						
Chloride	15.4		mg/kg	16.0		96.2	90-110			
Calibration Check (P3L0107-CCV1)				Prepared: 12/01/23 Analyzed: 12/03/23						
Chloride	16.2		mg/kg	16.0		101	90-110			
Calibration Check (P3L0107-CCV2)				Prepared: 12/01/23 Analyzed: 12/03/23						
Chloride	16.6		mg/kg	16.0		104	90-110			
Matrix Spike (P3L0107-MS1)		**Source: 3K29009-08**		Prepared: 12/01/23 Analyzed: 12/03/23						
Chloride	83.8		mg/kg	100	1.78	82.0	80-120			
Matrix Spike (P3L0107-MS2)		**Source: 3K30009-01**		Prepared: 12/01/23 Analyzed: 12/03/23						
Chloride	92.4		mg/kg	100	11.9	80.6	80-120			
Matrix Spike Dup (P3L0107-MSD1)		**Source: 3K29009-08**		Prepared: 12/01/23 Analyzed: 12/03/23						
Chloride	71.3		mg/kg	100	1.78	69.5	80-120	16.1	20	QM-05
Matrix Spike Dup (P3L0107-MSD2)		**Source: 3K30009-01**		Prepared: 12/01/23 Analyzed: 12/03/23						
Chloride	88.7		mg/kg	100	11.9	76.9	80-120	4.10	20	QM-05

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Notes and Definitions

S-GC	Surrogate recovery outside of control limits. The data was accepted based on valid recovery of the remaining surrogate.
ROI	Received on Ice
R3	The RPD exceeded the acceptance limit due to sample matrix effects.
QR-02	The RPD result exceeded the QC control limits; however, both percent recoveries were acceptable. Sample results for the QC batch were accepted based on percent recoveries and completeness of QC data.
QM-05	The spike recovery was outside acceptance limits for the MS and/or MSD due to matrix interference. The LCS and/or LCSD were within acceptance limits showing that the laboratory is in control and the data is acceptable.
BULK	Samples received in Bulk soil containers may be biased low in the nC6-C12 TPH Range
DET	Analyte DETECTED
ND	Analyte NOT DETECTED at or above the reporting limit
NR	Not Reported
dry	Sample results reported on a dry weight basis
RPD	Relative Percent Difference
LCS	Laboratory Control Spike
MS	Matrix Spike
Dup	Duplicate

Report Approved By: Brent Barron Date: 12/6/2023

Brent Barron, Laboratory Director/Technical Director

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

This material is intended only for the use of the individual (s) or entity to whom it is addressed, and may contain information that is privileged and confidential.

If you have received this material in error, please notify us immediately at 432-686-7235.

Page 270 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Janey Fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: Midland TX 79705
Telephone No: 432-557-0934 **Fax No:** _____
Sampler Signature: Jose Bellos
Project Name: Jalapeño
Project #: LDEV # 11845
Project Loc: Lea Co, NM
PO #: _____
Report Format: ☒ Standard ☐ TRRP ☐ NPDES
e-mail: Janey@Tellusservices.com

(lab use only) ORDER #: 3K29009

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total # of Containers	Preservation & # of Containers: Ice	HNO_3	HCl	H_2SO_4	NaOH	$Na_2S_2O_3$	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge / GW=Groundwater S=Soil/Solid / NP=Non-Potable Specify Other	Analyze For: TCLP: TPH: TX 1005 TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX (method EPA 8021)	TPH - EPA - 8015	Chlorides EPA-300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
1	BH-37@1ft	1ft	1ft	11-22-23	10:00		1	X								S				X	X	X		X
2	BH-38@1ft	1ft	1ft	11-22-23	10:02		1	X								S				X	X	X		X
3	BH-39@1ft	1ft	1ft	11-22-23	10:04		1	X								S				X	X	X		X
4	BH-40@1ft	1ft	1ft	11-22-23	10:06		1	X								S				X	X	X		X
5	BH-41@1ft	1ft	1ft	11-22-23	10:08		1	X								S				X	X	X		X
6	BH-42@1ft	1ft	1ft	11-22-23	10:10		1	X								S				X	X	X		X
7	BH-43@1ft	1ft	1ft	11-22-23	10:12		1	X								S				X	X	X		X
8	BH-44@1ft	1ft	1ft	11-22-23	10:14		1	X								S				X	X	X		X
9	BH-45@1ft	1ft	1ft	11-22-23	16:16		1	X								S				X	X	X		X
10	BH-46@1ft	1ft	1ft	11-22-23	16:18		1	X								S				X	X	X		X

Special Instructions: Report TPH - inC6-C12, 7C12-C28, and 7C28-C35 fractions as well as Total TPH

Relinquished by:	Date	Time	Received by:	Date	Time
	11/29	1300			
Relinquished by:	Date	Time	Received by:	Date	Time
	11/29	1330			
Relinquished by:	Date	Time	Received by PBEL:	Date	Time
				11/29/23	13:30

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N
by Sampler/Client Rep. ?	Y	N

by Courier? UPS DHL FedEx Lone Star

Temperature Upon Receipt:
Received: 3.5 °C Thermometer: CF3
Adjusted: °C Factor:

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

Page 271 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST L: CH: W:

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey Fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX - 79705
Telephone No: 432-557-0934
Fax No:
Sampler Signature: Jose Bellor
e-mail: Jamey@Tellusservices.com

Project Name: Jalapeño
Project #: LOGV # 11845
Project Loc: Lea, CO, NM
PO #:
Report Format: ☐ Standard ☐ TRRP ☐ NPDES

(lab use only) ORDER #: 3K29009

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total # of Containers	Preservation & # of Containers: Ice	HNO_3	HCl	H_2SO_4	NaOH	$Na_2S_2O_3$	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge / GW = Groundwater S=Soil/Solid / NP=Non-Potable Specify Other	Analyze For: TPH: TX 1005 TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX - EPA 8021	TPH - EPA - 8015	Chlorides - EPA - 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
11	BH-47@ 1ft	1ft	1ft	11-22-23	10:23		1	X								S				X	X	X		Y
12	BH-48@ 1ft	1ft	1ft	11-22-23	10:22		1	X								S				X	X	X		Y
13	BH-49@ 1ft	1ft	1ft	11-22-23	10:24		1	X								S				X	X	X		Y
14	BH-50 1ft	1ft	1ft	11-22-23	10:26		1	X								S				X	X	X		Y
																								X
																								Y
																								Y
																								Y
																								Y
																								X

Special Instructions: Report TPH - in - C6 - C12, 7 C12 - C28 and 7 C28 - C35 fractions as well as total TPH

Relinquished by:	Date	Time	Received by:	Date	Time
	11/29	1300			
Relinquished by:	Date	Time	Received by:	Date	Time
	11/29	1330			
Relinquished by:	Date	Time	Received by PBEL:	Date	Time
				11/29/23	13:30

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N
by Sampler/Client Rep. ?	Y	N

by Courier? UPS DHL FedEx Lone Star

Temperature Upon Receipt:
Received: 3.5 °C Thermometer: CF 0.3
Adjusted: °C Factor:

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21 Page 2 of 2

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

PERMIAN BASIN
ENVIRONMENTAL LAB, LP
1400 Rankin Hwy
Midland, TX 79701

PBELAB

Analytical Report

Prepared for:

Jamey Fowler

Tellus Consulting, LLC

4000 North Big Spring Street Suite 109

Midland, TX 79705

Project: Jalapeno

Project Number: CDEV #11845

Location: Lea County, NM

Lab Order Number: 3L01001

NELAP ACCREDITED TNI LABORATORY

Current Certification

Report Date: 12/18/23

Tellus Consulting, LLC
4000 North Big Spring Street Suite 109
Midland TX, 79705

Project: Jalapeno
Project Number: CDEV #11845
Project Manager: Jamey Fowler

ANALYTICAL REPORT FOR SAMPLES

Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
BH-189 @ 1.5	3L01001-01	Soil	11/29/23 10:58	11-30-2023 16:34
BH-190 @ 1.5	3L01001-02	Soil	11/29/23 11:03	11-30-2023 16:34
BH-191 @ 1.5	3L01001-03	Soil	11/29/23 11:09	11-30-2023 16:34
BH-192 @ 1.5	3L01001-04	Soil	11/29/23 11:10	11-30-2023 16:34
BH-179 @ 1.5	3L01001-05	Soil	11/29/23 09:58	11-30-2023 16:34
BH-180 @ 1.5	3L01001-06	Soil	11/29/23 10:21	11-30-2023 16:34
BH-181 @ 1.5	3L01001-07	Soil	11/29/23 10:25	11-30-2023 16:34
BH-182 @ 1.5	3L01001-08	Soil	11/29/23 10:27	11-30-2023 16:34
BH-183 @ 1.5	3L01001-09	Soil	11/29/23 10:31	11-30-2023 16:34
BH-184 @ 1.5	3L01001-10	Soil	11/29/23 10:42	11-30-2023 16:34
BH-185 @ 1.5	3L01001-11	Soil	11/29/23 10:43	11-30-2023 16:34
BH-186 @ 1.5	3L01001-12	Soil	11/29/23 10:48	11-30-2023 16:34
BH-187 @ 1.5	3L01001-13	Soil	11/29/23 10:51	11-30-2023 16:34
BH-188 @ 1.5	3L01001-14	Soil	11/29/23 10:55	11-30-2023 16:34
BH-161 @ 1.5	3L01001-15	Soil	11/29/23 08:54	11-30-2023 16:34
BH-162 @ 1.5	3L01001-16	Soil	11/29/23 08:57	11-30-2023 16:34
BH-163 @ 1.5	3L01001-17	Soil	11/29/23 08:59	11-30-2023 16:34
BH-164 @ 1.5	3L01001-18	Soil	11/29/23 09:02	11-30-2023 16:34
BH-165 @ 1.5	3L01001-19	Soil	11/29/23 09:07	11-30-2023 16:34
BH-166 @ 1.5	3L01001-20	Soil	11/29/23 09:11	11-30-2023 16:34
BH-167 @ 1.5	3L01001-21	Soil	11/29/23 09:14	11-30-2023 16:34
BH-168 @ 1.5	3L01001-22	Soil	11/29/23 09:17	11-30-2023 16:34
BH-169 @ 1.5	3L01001-23	Soil	11/29/23 09:21	11-30-2023 16:34
BH-170 @ 1.5	3L01001-24	Soil	11/29/23 09:23	11-30-2023 16:34
BH-171 @ 1.5	3L01001-25	Soil	11/29/23 09:27	11-30-2023 16:34
BH-172 @ 1.5	3L01001-26	Soil	11/29/23 09:39	11-30-2023 16:34
BH-173 @ 1.5	3L01001-27	Soil	11/29/23 09:41	11-30-2023 16:34
BH-174 @ 1.5	3L01001-28	Soil	11/29/23 09:44	11-30-2023 16:34
BH-175 @ 1.5	3L01001-29	Soil	11/29/23 09:45	11-30-2023 16:34
BH-176 @ 1.5	3L01001-30	Soil	11/29/23 09:48	11-30-2023 16:34
BH-177 @ 1.5	3L01001-31	Soil	11/29/23 09:51	11-30-2023 16:34
BH-178 @ 1.5	3L01001-32	Soil	11/29/23 09:55	11-30-2023 16:34
BH-151 @ 1.5	3L01001-33	Soil	11/28/23 11:33	11-30-2023 16:34
BH-152 @ 1.5	3L01001-34	Soil	11/29/23 08:28	11-30-2023 16:34

Tellus Consulting, LLC
4000 North Big Spring Street Suite 109
Midland TX, 79705

Project: Jalapeno
Project Number: CDEV #11845
Project Manager: Jamey Fowler

ANALYTICAL REPORT FOR SAMPLES

Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
BH-153 @ 1.5	3L01001-35	Soil	11/29/23 08:32	11-30-2023 16:34
BH-154 @ 1.5	3L01001-36	Soil	11/29/23 08:33	11-30-2023 16:34
BH-155 @ 1.5	3L01001-37	Soil	11/29/23 08:35	11-30-2023 16:34
BH-156 @ 1.5	3L01001-38	Soil	11/29/23 08:36	11-30-2023 16:34
BH-157 @ 1.5	3L01001-39	Soil	11/29/23 08:40	11-30-2023 16:34
BH-158 @ 1.5	3L01001-40	Soil	11/29/23 08:48	11-30-2023 16:34
BH-159 @ 1.5	3L01001-41	Soil	11/29/23 08:50	11-30-2023 16:34
BH-160 @ 1.5	3L01001-42	Soil	11/29/23 08:51	11-30-2023 16:34
BH-141 @ 1.5	3L01001-43	Soil	11/28/23 11:03	11-30-2023 16:34
BH-142 @ 1.5	3L01001-44	Soil	11/28/23 11:04	11-30-2023 16:34
BH-143 @ 1.5	3L01001-45	Soil	11/28/23 11:06	11-30-2023 16:34
BH-144 @ 1.5	3L01001-46	Soil	11/28/23 11:08	11-30-2023 16:34
BH-145 @ 1.5	3L01001-47	Soil	11/28/23 11:13	11-30-2023 16:34
BH-146 @ 1.5	3L01001-48	Soil	11/28/23 11:17	11-30-2023 16:34
BH-147 @ 1.5	3L01001-49	Soil	11/28/23 11:20	11-30-2023 16:34
BH-148 @ 1.5	3L01001-50	Soil	11/28/23 11:22	11-30-2023 16:34
BH-149 @ 1.5	3L01001-51	Soil	11/28/23 11:27	11-30-2023 16:34
BH-150 @ 1.5	3L01001-52	Soil	11/28/23 11:31	11-30-2023 16:34
BH-131 @ 1.5	3L01001-53	Soil	11/28/23 10:23	11-30-2023 16:34
BH-132 @ 1.5	3L01001-54	Soil	11/28/23 10:27	11-30-2023 16:34
BH-133 @ 1.5	3L01001-55	Soil	11/28/23 10:30	11-30-2023 16:34
BH-134 @ 1.5	3L01001-56	Soil	11/28/23 10:33	11-30-2023 16:34
BH-135 @ 1.5	3L01001-57	Soil	11/28/23 10:37	11-30-2023 16:34
BH-136 @ 1.5	3L01001-58	Soil	11/28/23 10:38	11-30-2023 16:34
BH-137 @ 1.5	3L01001-59	Soil	11/28/23 10:45	11-30-2023 16:34
BH-138 @ 1.5	3L01001-60	Soil	11/28/23 10:50	11-30-2023 16:34
BH-139 @ 1.5	3L01001-61	Soil	11/28/23 10:53	11-30-2023 16:34
BH-140 @ 1.5	3L01001-62	Soil	11/28/23 10:56	11-30-2023 16:34
BH-121 @ 1.5	3L01001-63	Soil	11/28/23 09:50	11-30-2023 16:34
BH-122 @ 1.5	3L01001-64	Soil	11/28/23 09:52	11-30-2023 16:34
BH-123 @ 1.5	3L01001-65	Soil	11/28/23 09:53	11-30-2023 16:34
BH-124 @ 1.5	3L01001-66	Soil	11/28/23 09:55	11-30-2023 16:34
BH-125 @ 1.5	3L01001-67	Soil	11/28/23 09:58	11-30-2023 16:34
BH-126 @ 1.5	3L01001-68	Soil	11/28/23 10:04	11-30-2023 16:34

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

ANALYTICAL REPORT FOR SAMPLES

Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
BH-127 @ 1.5	3L01001-69	Soil	11/28/23 10:07	11-30-2023 16:34
BH-128 @ 1.5	3L01001-70	Soil	11/28/23 10:09	11-30-2023 16:34
BH-129 @ 1.5	3L01001-71	Soil	11/28/23 10:13	11-30-2023 16:34
BH-130 @ 1.5	3L01001-72	Soil	11/28/23 10:17	11-30-2023 16:34
BH-120 @ 1.5	3L01001-73	Soil	11/28/23 09:45	11-30-2023 16:34
BH-119 @ 1.5	3L01001-74	Soil	11/28/23 09:43	11-30-2023 16:34
BH-118 @ 1.5	3L01001-75	Soil	11/28/23 09:41	11-30-2023 16:34
BH-117 @ 1.5	3L01001-76	Soil	11/28/23 09:38	11-30-2023 16:34
BH-116 @ 1.5	3L01001-77	Soil	11/28/23 09:34	11-30-2023 16:34
BH-115 @ 1.5	3L01001-78	Soil	11/28/23 09:31	11-30-2023 16:34
BH-114 @ 1.5	3L01001-79	Soil	11/28/23 09:28	11-30-2023 16:34
BH-113 @ 1.5	3L01001-80	Soil	11/28/23 09:25	11-30-2023 16:34
BH-112 @ 1.5	3L01001-81	Soil	11/28/23 09:23	11-30-2023 16:34
BH-111 @ 1.5	3L01001-82	Soil	11/28/23 09:20	11-30-2023 16:34
BH-110 @ 1.5	3L01001-83	Soil	11/28/23 09:17	11-30-2023 16:34
BH-109 @ 1.5	3L01001-84	Soil	11/28/23 09:14	11-30-2023 16:34
BH-108 @ 1.5	3L01001-85	Soil	11/28/23 09:11	11-30-2023 16:34
BH-107 @ 1.5	3L01001-86	Soil	11/28/23 09:07	11-30-2023 16:34
BH-106 @ 1.5	3L01001-87	Soil	11/28/23 08:59	11-30-2023 16:34
BH-105 @ 1.5	3L01001-88	Soil	11/28/23 08:56	11-30-2023 16:34
BH-104 @ 1.5	3L01001-89	Soil	11/28/23 08:54	11-30-2023 16:34
BH-103 @ 1.5	3L01001-90	Soil	11/28/23 08:51	11-30-2023 16:34
BH-102 @ 1.5	3L01001-91	Soil	11/28/23 08:47	11-30-2023 16:34
BH-101 @ 1.5	3L01001-92	Soil	11/28/23 08:44	11-30-2023 16:34

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-189 @ 1.5

3L01001-01 (Soil)

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
Permian Basin Environmental Lab, L.P.									
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L0505	12/05/23 09:08	12/06/23 07:41	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L0505	12/05/23 09:08	12/06/23 07:41	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L0505	12/05/23 09:08	12/06/23 07:41	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L0505	12/05/23 09:08	12/06/23 07:41	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L0505	12/05/23 09:08	12/06/23 07:41	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*119 %*	*80-120*		*P3L0505*	*12/05/23 09:08*	*12/06/23 07:41*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*97.1 %*	*80-120*		*P3L0505*	*12/05/23 09:08*	*12/06/23 07:41*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/05/23 09:08	12/06/23 07:41	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/05/23 09:08	12/06/23 07:41	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0303	12/03/23 14:18	12/03/23 22:29	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0303	12/03/23 14:18	12/03/23 22:29	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0303	12/03/23 14:18	12/03/23 22:29	TPH 8015M	
Surrogate: 1-Chlorooctane		*89.2 %*	*70-130*		*P3L0303*	*12/03/23 14:18*	*12/03/23 22:29*	*TPH 8015M*	
Surrogate: o-Terphenyl		*96.2 %*	*70-130*		*P3L0303*	*12/03/23 14:18*	*12/03/23 22:29*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/03/23 14:18	12/03/23 22:29	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**38.6**	1.05	mg/kg dry	1	P3L0108	12/01/23 15:28	12/03/23 18:37	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-190 @ 1.5

3L01001-02 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L0505	12/05/23 09:08	12/06/23 08:06	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L0505	12/05/23 09:08	12/06/23 08:06	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L0505	12/05/23 09:08	12/06/23 08:06	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L0505	12/05/23 09:08	12/06/23 08:06	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L0505	12/05/23 09:08	12/06/23 08:06	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*97.4 %*	*80-120*		*P3L0505*	*12/05/23 09:08*	*12/06/23 08:06*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0505*	*12/05/23 09:08*	*12/06/23 08:06*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/05/23 09:08	12/06/23 08:06	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/05/23 09:08	12/06/23 08:06	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0303	12/03/23 14:18	12/03/23 22:53	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0303	12/03/23 14:18	12/03/23 22:53	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0303	12/03/23 14:18	12/03/23 22:53	TPH 8015M	
Surrogate: 1-Chlorooctane		*95.0 %*	*70-130*		*P3L0303*	*12/03/23 14:18*	*12/03/23 22:53*	*TPH 8015M*	
Surrogate: o-Terphenyl		*101 %*	*70-130*		*P3L0303*	*12/03/23 14:18*	*12/03/23 22:53*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/03/23 14:18	12/03/23 22:53	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**149**	1.05	mg/kg dry	1	P3L0108	12/01/23 15:28	12/03/23 18:51	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-191 @ 1.5

3L01001-03 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L0505	12/05/23 09:08	12/06/23 08:30	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L0505	12/05/23 09:08	12/06/23 08:30	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L0505	12/05/23 09:08	12/06/23 08:30	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L0505	12/05/23 09:08	12/06/23 08:30	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L0505	12/05/23 09:08	12/06/23 08:30	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0505*	*12/05/23 09:08*	*12/06/23 08:30*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*98.1 %*	*80-120*		*P3L0505*	*12/05/23 09:08*	*12/06/23 08:30*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/05/23 09:08	12/06/23 08:30	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/05/23 09:08	12/06/23 08:30	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 02:05	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 02:05	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 02:05	TPH 8015M	
Surrogate: 1-Chlorooctane		*86.7 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 02:05*	*TPH 8015M*	
Surrogate: o-Terphenyl		*93.0 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 02:05*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/03/23 11:14	12/04/23 02:05	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**98.8**	1.03	mg/kg dry	1	P3L0108	12/01/23 15:28	12/03/23 19:06	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-192 @ 1.5

3L01001-04 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L0505	12/05/23 09:08	12/06/23 08:54	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L0505	12/05/23 09:08	12/06/23 08:54	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L0505	12/05/23 09:08	12/06/23 08:54	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L0505	12/05/23 09:08	12/06/23 08:54	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L0505	12/05/23 09:08	12/06/23 08:54	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*118 %*	*80-120*		*P3L0505*	*12/05/23 09:08*	*12/06/23 08:54*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*97.0 %*	*80-120*		*P3L0505*	*12/05/23 09:08*	*12/06/23 08:54*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/05/23 09:08	12/06/23 08:54	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/05/23 09:08	12/06/23 08:54	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 02:29	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 02:29	TPH 8015M	
>C28-C35	**65.5**	26.3	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 02:29	TPH 8015M	
Surrogate: 1-Chlorooctane		*91.0 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 02:29*	*TPH 8015M*	
Surrogate: o-Terphenyl		*104 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 02:29*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	**65.5**	26.3	mg/kg dry	1	[CALC]	12/03/23 11:14	12/04/23 02:29	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**32.5**	1.05	mg/kg dry	1	P3L0108	12/01/23 15:28	12/03/23 19:20	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-179 @ 1.5

3L01001-05 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00102	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 13:12	EPA 8021B	
Toluene	ND	0.00102	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 13:12	EPA 8021B	
Ethylbenzene	ND	0.00102	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 13:12	EPA 8021B	
Xylene (p/m)	ND	0.00204	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 13:12	EPA 8021B	
Xylene (o)	ND	0.00102	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 13:12	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*95.9 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 13:12*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 13:12*	*EPA 8021B*	
Xylenes (total)	ND	0.00204	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 13:12	EPA 8021B	
Total BTEX	ND	0.00102	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 13:12	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.5	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 02:53	TPH 8015M	
>C12-C28	ND	25.5	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 02:53	TPH 8015M	
>C28-C35	ND	25.5	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 02:53	TPH 8015M	
Surrogate: 1-Chlorooctane		*90.5 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 02:53*	*TPH 8015M*	
Surrogate: o-Terphenyl		*94.3 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 02:53*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.5	mg/kg dry	1	[CALC]	12/03/23 11:14	12/04/23 02:53	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**19.5**	1.02	mg/kg dry	1	P3L0108	12/01/23 15:28	12/03/23 19:34	EPA 300.0	
% Moisture	**2.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-180 @ 1.5

3L01001-06 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 13:37	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 13:37	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 13:37	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 13:37	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 13:37	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.1 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 13:37*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*114 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 13:37*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 13:37	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 13:37	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 03:17	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 03:17	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 03:17	TPH 8015M	
Surrogate: 1-Chlorooctane		*93.4 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 03:17*	*TPH 8015M*	
Surrogate: o-Terphenyl		*97.9 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 03:17*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	12/03/23 11:14	12/04/23 03:17	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**117**	1.06	mg/kg dry	1	P3L0108	12/01/23 15:28	12/03/23 20:17	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-181 @ 1.5

3L01001-07 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 14:01	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 14:01	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 14:01	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 14:01	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 14:01	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*114 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 14:01*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.8 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 14:01*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 14:01	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 14:01	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 03:40	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 03:40	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 03:40	TPH 8015M	
Surrogate: 1-Chlorooctane		*92.3 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 03:40*	*TPH 8015M*	
Surrogate: o-Terphenyl		*97.7 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 03:40*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	12/03/23 11:14	12/04/23 03:40	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**161**	1.06	mg/kg dry	1	P3L0108	12/01/23 15:28	12/03/23 21:01	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-182 @ 1.5

3L01001-08 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 14:26	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 14:26	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 14:26	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 14:26	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 14:26	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 14:26*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.8 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 14:26*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 14:26	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 14:26	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 04:04	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 04:04	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 04:04	TPH 8015M	
Surrogate: 1-Chlorooctane		*88.4 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 04:04*	*TPH 8015M*	
Surrogate: o-Terphenyl		*95.0 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 04:04*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	12/03/23 11:14	12/04/23 04:04	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**78.0**	1.06	mg/kg dry	1	P3L0108	12/01/23 15:28	12/03/23 21:15	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-183 @ 1.5

3L01001-09 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 14:50	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 14:50	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 14:50	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 14:50	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 14:50	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*114 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 14:50*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.5 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 14:50*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 14:50	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 14:50	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 04:28	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 04:28	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 04:28	TPH 8015M	
Surrogate: 1-Chlorooctane		*88.1 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 04:28*	*TPH 8015M*	
Surrogate: o-Terphenyl		*94.3 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 04:28*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/03/23 11:14	12/04/23 04:28	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**25.8**	1.04	mg/kg dry	1	P3L0108	12/01/23 15:28	12/03/23 21:29	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-184 @ 1.5

3L01001-10 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 15:15	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 15:15	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 15:15	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 15:15	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 15:15	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 15:15*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.8 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 15:15*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 15:15	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 15:15	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 04:52	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 04:52	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 04:52	TPH 8015M	
Surrogate: 1-Chlorooctane		*92.8 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 04:52*	*TPH 8015M*	
Surrogate: o-Terphenyl		*99.8 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 04:52*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/03/23 11:14	12/04/23 04:52	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**17.1**	1.04	mg/kg dry	1	P3L0108	12/01/23 15:28	12/03/23 21:44	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-185 @ 1.5

3L01001-11 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 15:39	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 15:39	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 15:39	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 15:39	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 15:39	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*95.8 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 15:39*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*114 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 15:39*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 15:39	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 15:39	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 05:15	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 05:15	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 05:15	TPH 8015M	
Surrogate: 1-Chlorooctane		*91.2 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 05:15*	*TPH 8015M*	
Surrogate: o-Terphenyl		*96.7 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 05:15*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	12/03/23 11:14	12/04/23 05:15	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**19.4**	1.06	mg/kg dry	1	P3L0108	12/01/23 15:28	12/03/23 21:59	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-186 @ 1.5

3L01001-12 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 16:04	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 16:04	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 16:04	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 16:04	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 16:04	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*95.7 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 16:04*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 16:04*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 16:04	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 16:04	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 05:39	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 05:39	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 05:39	TPH 8015M	
Surrogate: 1-Chlorooctane		*91.3 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 05:39*	*TPH 8015M*	
Surrogate: o-Terphenyl		*97.2 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 05:39*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/03/23 11:14	12/04/23 05:39	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**30.4**	1.05	mg/kg dry	1	P3L0108	12/01/23 15:28	12/03/23 22:13	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-187 @ 1.5

3L01001-13 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 16:28	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 16:28	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 16:28	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 16:28	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 16:28	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*95.7 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 16:28*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 16:28*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 16:28	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 16:28	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 06:50	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 06:50	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 06:50	TPH 8015M	
Surrogate: 1-Chlorooctane		*87.8 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 06:50*	*TPH 8015M*	
Surrogate: o-Terphenyl		*94.8 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 06:50*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/03/23 11:14	12/04/23 06:50	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**34.0**	1.05	mg/kg dry	1	P3L0108	12/01/23 15:28	12/03/23 22:28	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-188 @ 1.5

3L01001-14 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 16:53	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 16:53	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 16:53	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 16:53	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 16:53	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*95.5 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 16:53*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 16:53*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 16:53	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 16:53	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 07:13	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 07:13	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 07:13	TPH 8015M	
Surrogate: 1-Chlorooctane		*91.4 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 07:13*	*TPH 8015M*	
Surrogate: o-Terphenyl		*97.2 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 07:13*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/03/23 11:14	12/04/23 07:13	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**23.5**	1.03	mg/kg dry	1	P3L0108	12/01/23 15:28	12/03/23 22:42	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-161 @ 1.5

3L01001-15 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 18:06	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 18:06	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 18:06	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 18:06	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 18:06	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*95.7 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 18:06*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 18:06*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 18:06	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 18:06	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 07:37	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 07:37	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 07:37	TPH 8015M	
Surrogate: 1-Chlorooctane		*93.0 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 07:37*	*TPH 8015M*	
Surrogate: o-Terphenyl		*99.2 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 07:37*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/03/23 11:14	12/04/23 07:37	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**11.7**	1.04	mg/kg dry	1	P3L0108	12/01/23 15:28	12/03/23 22:56	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-162 @ 1.5

3L01001-16 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 18:30	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 18:30	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 18:30	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 18:30	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 18:30	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.3 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 18:30*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 18:30*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 18:30	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 18:30	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 08:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 08:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 08:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*90.8 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 08:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*95.8 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 08:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/03/23 11:14	12/04/23 08:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**56.9**	1.04	mg/kg dry	1	P3L0308	12/03/23 09:48	12/04/23 00:22	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-163 @ 1.5

3L01001-17 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 18:55	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 18:55	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 18:55	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 18:55	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 18:55	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.2 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 18:55*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 18:55*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 18:55	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 18:55	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 08:24	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 08:24	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 08:24	TPH 8015M	
Surrogate: 1-Chlorooctane		*89.3 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 08:24*	*TPH 8015M*	
Surrogate: o-Terphenyl		*94.2 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 08:24*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/03/23 11:14	12/04/23 08:24	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**154**	1.04	mg/kg dry	1	P3L0308	12/03/23 09:48	12/04/23 01:06	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-164 @ 1.5

3L01001-18 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 19:19	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 19:19	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 19:19	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 19:19	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 19:19	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.3 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 19:19*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 19:19*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 19:19	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 19:19	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 08:47	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 08:47	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 08:47	TPH 8015M	
Surrogate: 1-Chlorooctane		*85.6 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 08:47*	*TPH 8015M*	
Surrogate: o-Terphenyl		*90.3 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 08:47*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/03/23 11:14	12/04/23 08:47	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**54.5**	1.04	mg/kg dry	1	P3L0308	12/03/23 09:48	12/04/23 01:20	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-165 @ 1.5

3L01001-19 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 19:43	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 19:43	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 19:43	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 19:43	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 19:43	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 19:43*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.2 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 19:43*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 19:43	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 19:43	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 09:11	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 09:11	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 09:11	TPH 8015M	
Surrogate: 1-Chlorooctane		*86.9 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 09:11*	*TPH 8015M*	
Surrogate: o-Terphenyl		*93.9 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 09:11*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/03/23 11:14	12/04/23 09:11	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**56.8**	1.05	mg/kg dry	1	P3L0308	12/03/23 09:48	12/04/23 01:35	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-166 @ 1.5

3L01001-20 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 20:08	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 20:08	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 20:08	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 20:08	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 20:08	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.4 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 20:08*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 20:08*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 20:08	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 20:08	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 09:35	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 09:35	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 09:35	TPH 8015M	
Surrogate: 1-Chlorooctane		*86.3 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 09:35*	*TPH 8015M*	
Surrogate: o-Terphenyl		*92.8 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 09:35*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/03/23 11:14	12/04/23 09:35	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**47.9**	1.04	mg/kg dry	1	P3L0308	12/03/23 09:48	12/04/23 01:49	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-167 @ 1.5

3L01001-21 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00108	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 20:32	EPA 8021B	
Toluene	ND	0.00108	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 20:32	EPA 8021B	
Ethylbenzene	ND	0.00108	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 20:32	EPA 8021B	
Xylene (p/m)	ND	0.00215	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 20:32	EPA 8021B	
Xylene (o)	ND	0.00108	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 20:32	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.3 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 20:32*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 20:32*	*EPA 8021B*	
Xylenes (total)	ND	0.00215	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 20:32	EPA 8021B	
Total BTEX	ND	0.00108	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 20:32	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.9	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 09:59	TPH 8015M	
>C12-C28	ND	26.9	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 09:59	TPH 8015M	
>C28-C35	ND	26.9	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 09:59	TPH 8015M	
Surrogate: 1-Chlorooctane		*85.4 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 09:59*	*TPH 8015M*	
Surrogate: o-Terphenyl		*92.0 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 09:59*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.9	mg/kg dry	1	[CALC]	12/03/23 11:14	12/04/23 09:59	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**146**	1.08	mg/kg dry	1	P3L0308	12/03/23 09:48	12/04/23 02:03	EPA 300.0	
% Moisture	**7.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-168 @ 1.5

3L01001-22 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 20:56	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 20:56	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 20:56	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 20:56	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 20:56	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.2 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 20:56*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 20:56*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 20:56	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 20:56	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 10:23	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 10:23	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3L0304	12/03/23 11:14	12/04/23 10:23	TPH 8015M	
Surrogate: 1-Chlorooctane		*91.0 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 10:23*	*TPH 8015M*	
Surrogate: o-Terphenyl		*98.2 %*	*70-130*		*P3L0304*	*12/03/23 11:14*	*12/04/23 10:23*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	12/03/23 11:14	12/04/23 10:23	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**149**	1.06	mg/kg dry	1	P3L0308	12/03/23 09:48	12/04/23 02:17	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-169 @ 1.5

3L01001-23 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00102	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 21:21	EPA 8021B	
Toluene	ND	0.00102	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 21:21	EPA 8021B	
Ethylbenzene	ND	0.00102	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 21:21	EPA 8021B	
Xylene (p/m)	ND	0.00204	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 21:21	EPA 8021B	
Xylene (o)	ND	0.00102	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 21:21	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*114 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 21:21*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.8 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 21:21*	*EPA 8021B*	
Xylenes (total)	ND	0.00204	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 21:21	EPA 8021B	
Total BTEX	ND	0.00102	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 21:21	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.5	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	25.5	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	25.5	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*100 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*113 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.5	mg/kg dry	1	[CALC]	12/03/23 14:13	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**33.1**	1.02	mg/kg dry	1	P3L0308	12/03/23 09:48	12/04/23 02:32	EPA 300.0	
% Moisture	**2.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-170 @ 1.5

3L01001-24 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 21:45	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 21:45	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 21:45	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 21:45	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0602	12/06/23 09:18	12/06/23 21:45	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.6 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 21:45*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0602*	*12/06/23 09:18*	*12/06/23 21:45*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 21:45	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/06/23 09:18	12/06/23 21:45	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*107 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*119 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/03/23 14:13	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**23.3**	1.04	mg/kg dry	1	P3L0308	12/03/23 09:48	12/04/23 02:46	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-171 @ 1.5

3L01001-25 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 01:00	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 01:00	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 01:00	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 01:00	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 01:00	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*95.8 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 01:00*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 01:00*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 01:00	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 01:00	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*96.5 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*109 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/03/23 14:13	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**103**	1.04	mg/kg dry	1	P3L0308	12/03/23 09:48	12/04/23 03:00	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-172 @ 1.5

3L01001-26 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 01:24	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 01:24	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 01:24	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 01:24	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 01:24	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 01:24*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.9 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 01:24*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 01:24	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 01:24	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*94.8 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*104 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/03/23 14:13	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**90.6**	1.04	mg/kg dry	1	P3L0308	12/03/23 09:48	12/04/23 03:43	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-173 @ 1.5

3L01001-27 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 01:49	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 01:49	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 01:49	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 01:49	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 01:49	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 01:49*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.3 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 01:49*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 01:49	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 01:49	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*103 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*112 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/03/23 14:13	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**182**	1.05	mg/kg dry	1	P3L0308	12/03/23 09:48	12/04/23 04:28	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-174 @ 1.5

3L01001-28 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 02:13	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 02:13	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 02:13	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 02:13	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 02:13	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 02:13*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.2 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 02:13*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 02:13	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 02:13	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*103 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*116 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/03/23 14:13	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**43.6**	1.05	mg/kg dry	1	P3L0308	12/03/23 09:48	12/04/23 04:42	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-175 @ 1.5

3L01001-29 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 02:38	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 02:38	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 02:38	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 02:38	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 02:38	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*95.8 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 02:38*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 02:38*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 02:38	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 02:38	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*82.1 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*85.6 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/03/23 14:13	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**22.3**	1.03	mg/kg dry	1	P3L0308	12/03/23 09:48	12/04/23 04:56	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-176 @ 1.5

3L01001-30 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 03:02	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 03:02	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 03:02	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 03:02	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 03:02	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 03:02*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.0 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 03:02*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 03:02	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 03:02	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*107 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*118 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/03/23 14:13	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**41.3**	1.05	mg/kg dry	1	P3L0308	12/03/23 09:48	12/04/23 05:11	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-177 @ 1.5

3L01001-31 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 03:26	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 03:26	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 03:26	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 03:26	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 03:26	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 03:26*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.8 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 03:26*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 03:26	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 03:26	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*104 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*117 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/03/23 14:13	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**19.1**	1.04	mg/kg dry	1	P3L0308	12/03/23 09:48	12/04/23 05:25	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-178 @ 1.5

3L01001-32 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 03:51	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 03:51	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 03:51	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 03:51	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 03:51	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 03:51*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.1 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 03:51*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 03:51	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 03:51	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*99.7 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*112 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/03/23 14:13	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**34.0**	1.04	mg/kg dry	1	P3L0308	12/03/23 09:48	12/04/23 05:39	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-151 @ 1.5

3L01001-33 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 04:15	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 04:15	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 04:15	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 04:15	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 04:15	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 04:15*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.0 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 04:15*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 04:15	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 04:15	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*87.0 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*94.1 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/03/23 14:13	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**31.8**	1.04	mg/kg dry	1	P3L0308	12/03/23 09:48	12/04/23 07:59	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-152 @ 1.5

3L01001-34 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 04:39	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 04:39	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 04:39	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 04:39	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 04:39	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*95.5 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 04:39*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 04:39*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 04:39	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 04:39	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*96.9 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*110 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/03/23 14:13	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**23.7**	1.04	mg/kg dry	1	P3L0308	12/03/23 09:48	12/04/23 08:14	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-153 @ 1.5

3L01001-35 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00108	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 05:52	EPA 8021B	
Toluene	ND	0.00108	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 05:52	EPA 8021B	
Ethylbenzene	ND	0.00108	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 05:52	EPA 8021B	
Xylene (p/m)	ND	0.00215	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 05:52	EPA 8021B	
Xylene (o)	ND	0.00108	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 05:52	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 05:52*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.0 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 05:52*	*EPA 8021B*	
Xylenes (total)	ND	0.00215	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 05:52	EPA 8021B	
Total BTEX	ND	0.00108	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 05:52	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.9	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	26.9	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	26.9	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*96.0 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*106 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.9	mg/kg dry	1	[CALC]	12/03/23 14:13	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**65.3**	1.08	mg/kg dry	1	P3L0308	12/03/23 09:48	12/04/23 08:28	EPA 300.0	
% Moisture	**7.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-154 @ 1.5

3L01001-36 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 06:17	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 06:17	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 06:17	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 06:17	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 06:17	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.0 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 06:17*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 06:17*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 06:17	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 06:17	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*96.4 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*108 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/03/23 14:13	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**30.9**	1.05	mg/kg dry	1	P3L0404	12/04/23 13:42	12/04/23 18:24	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-155 @ 1.5

3L01001-37 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 06:41	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 06:41	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 06:41	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 06:41	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 06:41	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.1 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 06:41*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 06:41*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 06:41	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 06:41	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*94.2 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*107 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	12/03/23 14:13	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**207**	1.06	mg/kg dry	1	P3L0404	12/04/23 13:42	12/04/23 19:07	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-156 @ 1.5

3L01001-38 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 07:05	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 07:05	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 07:05	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 07:05	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 07:05	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.2 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 07:05*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 07:05*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 07:05	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 07:05	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*95.3 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*109 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/03/23 14:13	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**193**	1.05	mg/kg dry	1	P3L0404	12/04/23 13:42	12/04/23 19:22	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-157 @ 1.5

3L01001-39 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 07:30	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 07:30	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 07:30	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 07:30	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 07:30	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*95.9 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 07:30*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 07:30*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 07:30	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 07:30	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*99.6 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*117 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/03/23 14:13	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**55.3**	1.05	mg/kg dry	1	P3L0404	12/04/23 13:42	12/04/23 19:36	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-158 @ 1.5

3L01001-40 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 07:54	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 07:54	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 07:54	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 07:54	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 07:54	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*95.8 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 07:54*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 07:54*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 07:54	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 07:54	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*88.8 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*104 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/03/23 14:13	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**87.9**	1.05	mg/kg dry	1	P3L0404	12/04/23 13:42	12/04/23 19:50	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-159 @ 1.5

3L01001-41 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 08:19	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 08:19	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 08:19	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 08:19	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 08:19	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.1 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 08:19*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 08:19*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 08:19	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 08:19	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*90.9 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*104 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	12/03/23 14:13	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**47.1**	1.06	mg/kg dry	1	P3L0404	12/04/23 13:42	12/04/23 20:05	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-160 @ 1.5

3L01001-42 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 08:43	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 08:43	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 08:43	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 08:43	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 08:43	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 08:43*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.9 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 08:43*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 08:43	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 08:43	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0305	12/03/23 14:13	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*74.7 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*88.4 %*	*70-130*		*P3L0305*	*12/03/23 14:13*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/03/23 14:13	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**19.6**	1.03	mg/kg dry	1	P3L0404	12/04/23 13:42	12/04/23 20:19	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-141 @ 1.5

3L01001-43 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 09:07	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 09:07	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 09:07	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 09:07	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 09:07	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.0 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 09:07*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 09:07*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 09:07	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 09:07	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*94.0 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*107 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/03/23 14:21	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**68.6**	1.03	mg/kg dry	1	P3L0404	12/04/23 13:42	12/04/23 20:33	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-142 @ 1.5

3L01001-44 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 09:32	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 09:32	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 09:32	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 09:32	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0603	12/06/23 09:22	12/07/23 09:32	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*95.7 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 09:32*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0603*	*12/06/23 09:22*	*12/07/23 09:32*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 09:32	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/06/23 09:22	12/07/23 09:32	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*99.1 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*110 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/03/23 14:21	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**109**	1.04	mg/kg dry	1	P3L0404	12/04/23 13:42	12/04/23 20:48	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-143 @ 1.5

3L01001-45 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 13:53	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 13:53	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 13:53	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 13:53	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 13:53	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0702*	*12/07/23 09:43*	*12/07/23 13:53*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.7 %*	*80-120*		*P3L0702*	*12/07/23 09:43*	*12/07/23 13:53*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/07/23 09:43	12/07/23 13:53	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/07/23 09:43	12/07/23 13:53	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*90.5 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*109 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/03/23 14:21	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**102**	1.03	mg/kg dry	1	P3L0404	12/04/23 13:42	12/04/23 21:02	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-144 @ 1.5

3L01001-46 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 14:18	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 14:18	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 14:18	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 14:18	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 14:18	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0702*	*12/07/23 09:43*	*12/07/23 14:18*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.8 %*	*80-120*		*P3L0702*	*12/07/23 09:43*	*12/07/23 14:18*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/07/23 09:43	12/07/23 14:18	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/07/23 09:43	12/07/23 14:18	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*94.6 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*110 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/03/23 14:21	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**16.5**	1.05	mg/kg dry	1	P3L0404	12/04/23 13:42	12/04/23 21:45	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-145 @ 1.5

3L01001-47 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 14:42	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 14:42	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 14:42	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 14:42	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 14:42	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*95.4 %*	*80-120*		*P3L0702*	*12/07/23 09:43*	*12/07/23 14:42*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0702*	*12/07/23 09:43*	*12/07/23 14:42*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/07/23 09:43	12/07/23 14:42	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/07/23 09:43	12/07/23 14:42	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*93.4 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*108 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/03/23 14:21	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**22.1**	1.04	mg/kg dry	1	P3L0404	12/04/23 13:42	12/04/23 22:28	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-146 @ 1.5

3L01001-48 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 15:06	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 15:06	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 15:06	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 15:06	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 15:06	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0702*	*12/07/23 09:43*	*12/07/23 15:06*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.4 %*	*80-120*		*P3L0702*	*12/07/23 09:43*	*12/07/23 15:06*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/07/23 09:43	12/07/23 15:06	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/07/23 09:43	12/07/23 15:06	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*91.0 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*104 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/03/23 14:21	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**89.6**	1.03	mg/kg dry	1	P3L0404	12/04/23 13:42	12/04/23 22:42	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-147 @ 1.5

3L01001-49 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 15:31	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 15:31	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 15:31	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 15:31	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 15:31	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0702*	*12/07/23 09:43*	*12/07/23 15:31*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.5 %*	*80-120*		*P3L0702*	*12/07/23 09:43*	*12/07/23 15:31*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/07/23 09:43	12/07/23 15:31	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/07/23 09:43	12/07/23 15:31	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*93.6 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*107 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/03/23 14:21	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**156**	1.04	mg/kg dry	1	P3L0404	12/04/23 13:42	12/04/23 22:58	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-148 @ 1.5

3L01001-50 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00108	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 15:55	EPA 8021B	
Toluene	ND	0.00108	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 15:55	EPA 8021B	
Ethylbenzene	ND	0.00108	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 15:55	EPA 8021B	
Xylene (p/m)	ND	0.00215	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 15:55	EPA 8021B	
Xylene (o)	ND	0.00108	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 15:55	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.0 %*	*80-120*		*P3L0702*	*12/07/23 09:43*	*12/07/23 15:55*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0702*	*12/07/23 09:43*	*12/07/23 15:55*	*EPA 8021B*	
Xylenes (total)	ND	0.00215	mg/kg dry	1	[CALC]	12/07/23 09:43	12/07/23 15:55	EPA 8021B	
Total BTEX	ND	0.00108	mg/kg dry	1	[CALC]	12/07/23 09:43	12/07/23 15:55	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.9	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	26.9	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	26.9	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*97.2 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*113 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.9	mg/kg dry	1	[CALC]	12/03/23 14:21	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**52.4**	1.08	mg/kg dry	1	P3L0404	12/04/23 13:42	12/04/23 23:13	EPA 300.0	
% Moisture	**7.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-149 @ 1.5

3L01001-51 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 16:20	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 16:20	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 16:20	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 16:20	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 16:20	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*95.5 %*	*80-120*		*P3L0702*	*12/07/23 09:43*	*12/07/23 16:20*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0702*	*12/07/23 09:43*	*12/07/23 16:20*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/07/23 09:43	12/07/23 16:20	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/07/23 09:43	12/07/23 16:20	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*96.4 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*113 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/03/23 14:21	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**102**	1.04	mg/kg dry	1	P3L0404	12/04/23 13:42	12/04/23 23:27	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-150 @ 1.5

3L01001-52 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 16:44	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 16:44	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 16:44	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 16:44	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 16:44	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0702*	*12/07/23 09:43*	*12/07/23 16:44*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.8 %*	*80-120*		*P3L0702*	*12/07/23 09:43*	*12/07/23 16:44*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/07/23 09:43	12/07/23 16:44	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/07/23 09:43	12/07/23 16:44	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*89.0 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*101 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/03/23 14:21	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**141**	1.03	mg/kg dry	1	P3L0404	12/04/23 13:42	12/04/23 23:41	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-131 @ 1.5

3L01001-53 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 17:09	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 17:09	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 17:09	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 17:09	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 17:09	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0702*	*12/07/23 09:43*	*12/07/23 17:09*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.0 %*	*80-120*		*P3L0702*	*12/07/23 09:43*	*12/07/23 17:09*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/07/23 09:43	12/07/23 17:09	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	12/07/23 09:43	12/07/23 17:09	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*97.2 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*108 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	12/03/23 14:21	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**146**	1.06	mg/kg dry	1	P3L0404	12/04/23 13:42	12/04/23 23:56	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-132 @ 1.5

3L01001-54 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 18:23	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 18:23	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 18:23	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 18:23	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 18:23	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.2 %*	*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 18:23*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 18:23*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 18:23	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 18:23	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*98.8 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*116 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	12/03/23 14:21	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**64.5**	1.06	mg/kg dry	1	P3L0404	12/04/23 13:42	12/05/23 00:10	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-133 @ 1.5

3L01001-55 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 18:46	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 18:46	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 18:46	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 18:46	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 18:46	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0702*	*12/07/23 09:43*	*12/07/23 18:46*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.7 %*	*80-120*		*P3L0702*	*12/07/23 09:43*	*12/07/23 18:46*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/07/23 09:43	12/07/23 18:46	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	12/07/23 09:43	12/07/23 18:46	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*101 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*111 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	12/03/23 14:21	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**221**	1.06	mg/kg dry	1	P3L0404	12/04/23 13:42	12/05/23 00:25	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-134 @ 1.5

3L01001-56 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 19:11	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 19:11	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 19:11	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 19:11	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 19:11	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*118 %*	*80-120*		*P3L0702*	*12/07/23 09:43*	*12/07/23 19:11*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.4 %*	*80-120*		*P3L0702*	*12/07/23 09:43*	*12/07/23 19:11*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/07/23 09:43	12/07/23 19:11	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/07/23 09:43	12/07/23 19:11	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*94.2 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*106 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/03/23 14:21	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**146**	1.05	mg/kg dry	1	P3L0413	12/04/23 15:03	12/05/23 14:58	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-135 @ 1.5

3L01001-57 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00109	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 19:35	EPA 8021B	
Toluene	ND	0.00109	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 19:35	EPA 8021B	
Ethylbenzene	ND	0.00109	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 19:35	EPA 8021B	
Xylene (p/m)	ND	0.00217	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 19:35	EPA 8021B	
Xylene (o)	ND	0.00109	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 19:35	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.1 %*	*80-120*		*P3L0702*	*12/07/23 09:43*	*12/07/23 19:35*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0702*	*12/07/23 09:43*	*12/07/23 19:35*	*EPA 8021B*	
Xylenes (total)	ND	0.00217	mg/kg dry	1	[CALC]	12/07/23 09:43	12/07/23 19:35	EPA 8021B	
Total BTEX	ND	0.00109	mg/kg dry	1	[CALC]	12/07/23 09:43	12/07/23 19:35	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.2	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	27.2	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	27.2	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*103 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*116 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.2	mg/kg dry	1	[CALC]	12/03/23 14:21	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**57.3**	1.09	mg/kg dry	1	P3L0413	12/04/23 15:03	12/05/23 15:12	EPA 300.0	
% Moisture	**8.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-136 @ 1.5

3L01001-58 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 19:59	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 19:59	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 19:59	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 19:59	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 19:59	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.4 %*	*80-120*		*P3L0702*	*12/07/23 09:43*	*12/07/23 19:59*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0702*	*12/07/23 09:43*	*12/07/23 19:59*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/07/23 09:43	12/07/23 19:59	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/07/23 09:43	12/07/23 19:59	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*91.4 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*104 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/03/23 14:21	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**53.2**	1.04	mg/kg dry	1	P3L0413	12/04/23 15:03	12/05/23 15:55	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-137 @ 1.5

3L01001-59 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 20:24	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 20:24	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 20:24	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 20:24	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 20:24	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.2 %*	*80-120*		*P3L0702*	*12/07/23 09:43*	*12/07/23 20:24*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*118 %*	*80-120*		*P3L0702*	*12/07/23 09:43*	*12/07/23 20:24*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/07/23 09:43	12/07/23 20:24	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/07/23 09:43	12/07/23 20:24	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*86.7 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*104 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/03/23 14:21	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**24.3**	1.03	mg/kg dry	1	P3L0413	12/04/23 15:03	12/05/23 16:40	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-138 @ 1.5

3L01001-60 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00102	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 20:48	EPA 8021B	
Toluene	ND	0.00102	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 20:48	EPA 8021B	
Ethylbenzene	ND	0.00102	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 20:48	EPA 8021B	
Xylene (p/m)	ND	0.00204	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 20:48	EPA 8021B	
Xylene (o)	ND	0.00102	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 20:48	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.0 %*	*80-120*		*P3L0702*	*12/07/23 09:43*	*12/07/23 20:48*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0702*	*12/07/23 09:43*	*12/07/23 20:48*	*EPA 8021B*	
Xylenes (total)	ND	0.00204	mg/kg dry	1	[CALC]	12/07/23 09:43	12/07/23 20:48	EPA 8021B	
Total BTEX	ND	0.00102	mg/kg dry	1	[CALC]	12/07/23 09:43	12/07/23 20:48	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.5	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	25.5	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	25.5	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*78.4 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*90.7 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.5	mg/kg dry	1	[CALC]	12/03/23 14:21	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**100**	1.02	mg/kg dry	1	P3L0413	12/04/23 15:03	12/05/23 16:54	EPA 300.0	
% Moisture	**2.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-139 @ 1.5

3L01001-61 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 21:12	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 21:12	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 21:12	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 21:12	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 21:12	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0702*	*12/07/23 09:43*	*12/07/23 21:12*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.9 %*	*80-120*		*P3L0702*	*12/07/23 09:43*	*12/07/23 21:12*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/07/23 09:43	12/07/23 21:12	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	12/07/23 09:43	12/07/23 21:12	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*85.0 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*99.3 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	12/03/23 14:21	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**110**	1.06	mg/kg dry	1	P3L0413	12/04/23 15:03	12/05/23 17:09	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-140 @ 1.5

3L01001-62 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 21:37	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 21:37	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 21:37	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 21:37	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 21:37	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0702*	*12/07/23 09:43*	*12/07/23 21:37*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.4 %*	*80-120*		*P3L0702*	*12/07/23 09:43*	*12/07/23 21:37*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/07/23 09:43	12/07/23 21:37	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/07/23 09:43	12/07/23 21:37	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0306	12/03/23 14:21	12/04/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*85.2 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*96.8 %*	*70-130*		*P3L0306*	*12/03/23 14:21*	*12/04/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/03/23 14:21	12/04/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**80.4**	1.04	mg/kg dry	1	P3L0413	12/04/23 15:03	12/05/23 17:23	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-121 @ 1.5

3L01001-63 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 22:01	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 22:01	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 22:01	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 22:01	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 22:01	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*95.4 %*		*80-120*		*P3L0702*	*12/07/23 09:43*	*12/07/23 22:01*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*116 %*		*80-120*		*P3L0702*	*12/07/23 09:43*	*12/07/23 22:01*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/07/23 09:43	12/07/23 22:01	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/07/23 09:43	12/07/23 22:01	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0405	12/04/23 14:24	12/05/23 01:35	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0405	12/04/23 14:24	12/05/23 01:35	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0405	12/04/23 14:24	12/05/23 01:35	TPH 8015M	
Surrogate: 1-Chlorooctane	*93.2 %*		*70-130*		*P3L0405*	*12/04/23 14:24*	*12/05/23 01:35*	*TPH 8015M*	
Surrogate: o-Terphenyl	*103 %*		*70-130*		*P3L0405*	*12/04/23 14:24*	*12/05/23 01:35*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/04/23 14:24	12/05/23 01:35	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**147**	1.05	mg/kg dry	1	P3L0413	12/04/23 15:03	12/05/23 17:37	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-122 @ 1.5

3L01001-64 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 22:25	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 22:25	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 22:25	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 22:25	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L0702	12/07/23 09:43	12/07/23 22:25	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0702*	*12/07/23 09:43*	*12/07/23 22:25*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.8 %*	*80-120*		*P3L0702*	*12/07/23 09:43*	*12/07/23 22:25*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/07/23 09:43	12/07/23 22:25	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/07/23 09:43	12/07/23 22:25	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0405	12/04/23 14:24	12/05/23 01:59	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0405	12/04/23 14:24	12/05/23 01:59	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0405	12/04/23 14:24	12/05/23 01:59	TPH 8015M	
Surrogate: 1-Chlorooctane		*81.2 %*	*70-130*		*P3L0405*	*12/04/23 14:24*	*12/05/23 01:59*	*TPH 8015M*	
Surrogate: o-Terphenyl		*89.7 %*	*70-130*		*P3L0405*	*12/04/23 14:24*	*12/05/23 01:59*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/04/23 14:24	12/05/23 01:59	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**62.6**	1.03	mg/kg dry	1	P3L0413	12/04/23 15:03	12/05/23 17:52	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-123 @ 1.5

3L01001-65 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 01:40	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 01:40	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 01:40	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 01:40	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 01:40	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 01:40*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.4 %*	*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 01:40*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 01:40	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 01:40	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0405	12/04/23 14:24	12/05/23 02:22	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0405	12/04/23 14:24	12/05/23 02:22	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0405	12/04/23 14:24	12/05/23 02:22	TPH 8015M	
Surrogate: 1-Chlorooctane		*86.1 %*	*70-130*		*P3L0405*	*12/04/23 14:24*	*12/05/23 02:22*	*TPH 8015M*	
Surrogate: o-Terphenyl		*95.8 %*	*70-130*		*P3L0405*	*12/04/23 14:24*	*12/05/23 02:22*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/04/23 14:24	12/05/23 02:22	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**158**	1.04	mg/kg dry	1	P3L0413	12/04/23 15:03	12/05/23 18:06	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-124 @ 1.5

3L01001-66 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 02:05	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 02:05	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 02:05	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 02:05	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 02:05	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 02:05*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.4 %*	*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 02:05*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 02:05	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 02:05	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0405	12/04/23 14:24	12/05/23 02:46	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0405	12/04/23 14:24	12/05/23 02:46	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0405	12/04/23 14:24	12/05/23 02:46	TPH 8015M	
Surrogate: 1-Chlorooctane		*67.7 %*	*70-130*		*P3L0405*	*12/04/23 14:24*	*12/05/23 02:46*	*TPH 8015M*	*S-GC*
Surrogate: o-Terphenyl		*74.5 %*	*70-130*		*P3L0405*	*12/04/23 14:24*	*12/05/23 02:46*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/04/23 14:24	12/05/23 02:46	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**108**	1.03	mg/kg dry	1	P3L0413	12/04/23 15:03	12/05/23 18:20	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-125 @ 1.5

3L01001-67 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 02:29	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 02:29	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 02:29	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 02:29	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 02:29	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*95.0 %*	*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 02:29*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 02:29*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 02:29	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 02:29	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0405	12/04/23 14:24	12/05/23 03:10	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0405	12/04/23 14:24	12/05/23 03:10	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0405	12/04/23 14:24	12/05/23 03:10	TPH 8015M	
Surrogate: 1-Chlorooctane		*89.1 %*	*70-130*		*P3L0405*	*12/04/23 14:24*	*12/05/23 03:10*	*TPH 8015M*	
Surrogate: o-Terphenyl		*98.6 %*	*70-130*		*P3L0405*	*12/04/23 14:24*	*12/05/23 03:10*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/04/23 14:24	12/05/23 03:10	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**159**	1.04	mg/kg dry	1	P3L0413	12/04/23 15:03	12/05/23 18:35	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-126 @ 1.5

3L01001-68 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 02:53	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 02:53	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 02:53	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 02:53	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 02:53	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 02:53*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.5 %*	*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 02:53*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 02:53	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 02:53	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0405	12/04/23 14:24	12/05/23 03:33	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0405	12/04/23 14:24	12/05/23 03:33	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0405	12/04/23 14:24	12/05/23 03:33	TPH 8015M	
Surrogate: 1-Chlorooctane		*87.6 %*	*70-130*		*P3L0405*	*12/04/23 14:24*	*12/05/23 03:33*	*TPH 8015M*	
Surrogate: o-Terphenyl		*96.1 %*	*70-130*		*P3L0405*	*12/04/23 14:24*	*12/05/23 03:33*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/04/23 14:24	12/05/23 03:33	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**93.6**	1.04	mg/kg dry	1	P3L0506	12/05/23 09:23	12/07/23 15:20	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-127 @ 1.5

3L01001-69 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 03:18	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 03:18	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 03:18	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 03:18	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 03:18	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 03:18*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.3 %*	*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 03:18*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 03:18	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 03:18	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0405	12/04/23 14:24	12/05/23 03:57	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0405	12/04/23 14:24	12/05/23 03:57	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0405	12/04/23 14:24	12/05/23 03:57	TPH 8015M	
Surrogate: 1-Chlorooctane		*88.2 %*	*70-130*		*P3L0405*	*12/04/23 14:24*	*12/05/23 03:57*	*TPH 8015M*	
Surrogate: o-Terphenyl		*97.2 %*	*70-130*		*P3L0405*	*12/04/23 14:24*	*12/05/23 03:57*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/04/23 14:24	12/05/23 03:57	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**107**	1.03	mg/kg dry	1	P3L0506	12/05/23 09:23	12/07/23 16:03	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-128 @ 1.5

3L01001-70 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00108	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 03:42	EPA 8021B	
Toluene	ND	0.00108	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 03:42	EPA 8021B	
Ethylbenzene	ND	0.00108	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 03:42	EPA 8021B	
Xylene (p/m)	ND	0.00215	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 03:42	EPA 8021B	
Xylene (o)	ND	0.00108	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 03:42	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 03:42*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.6 %*	*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 03:42*	*EPA 8021B*	
Xylenes (total)	ND	0.00215	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 03:42	EPA 8021B	
Total BTEX	ND	0.00108	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 03:42	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.9	mg/kg dry	1	P3L0405	12/04/23 14:24	12/05/23 04:21	TPH 8015M	
>C12-C28	ND	26.9	mg/kg dry	1	P3L0405	12/04/23 14:24	12/05/23 04:21	TPH 8015M	
>C28-C35	ND	26.9	mg/kg dry	1	P3L0405	12/04/23 14:24	12/05/23 04:21	TPH 8015M	
Surrogate: 1-Chlorooctane		*83.3 %*	*70-130*		*P3L0405*	*12/04/23 14:24*	*12/05/23 04:21*	*TPH 8015M*	
Surrogate: o-Terphenyl		*92.5 %*	*70-130*		*P3L0405*	*12/04/23 14:24*	*12/05/23 04:21*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.9	mg/kg dry	1	[CALC]	12/04/23 14:24	12/05/23 04:21	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**27.7**	1.08	mg/kg dry	1	P3L0506	12/05/23 09:23	12/07/23 16:17	EPA 300.0	
% Moisture	**7.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-129 @ 1.5

3L01001-71 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 04:07	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 04:07	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 04:07	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 04:07	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 04:07	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 04:07*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.7 %*	*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 04:07*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 04:07	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 04:07	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0405	12/04/23 14:24	12/05/23 04:44	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0405	12/04/23 14:24	12/05/23 04:44	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0405	12/04/23 14:24	12/05/23 04:44	TPH 8015M	
Surrogate: 1-Chlorooctane		*84.6 %*	*70-130*		*P3L0405*	*12/04/23 14:24*	*12/05/23 04:44*	*TPH 8015M*	
Surrogate: o-Terphenyl		*93.7 %*	*70-130*		*P3L0405*	*12/04/23 14:24*	*12/05/23 04:44*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/04/23 14:24	12/05/23 04:44	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**39.6**	1.05	mg/kg dry	1	P3L0506	12/05/23 09:23	12/07/23 16:32	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-130 @ 1.5

3L01001-72 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00108	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 04:31	EPA 8021B	
Toluene	ND	0.00108	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 04:31	EPA 8021B	
Ethylbenzene	ND	0.00108	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 04:31	EPA 8021B	
Xylene (p/m)	ND	0.00215	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 04:31	EPA 8021B	
Xylene (o)	ND	0.00108	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 04:31	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 04:31*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.4 %*	*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 04:31*	*EPA 8021B*	
Xylenes (total)	ND	0.00215	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 04:31	EPA 8021B	
Total BTEX	ND	0.00108	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 04:31	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.9	mg/kg dry	1	P3L0405	12/04/23 14:24	12/05/23 05:07	TPH 8015M	
>C12-C28	ND	26.9	mg/kg dry	1	P3L0405	12/04/23 14:24	12/05/23 05:07	TPH 8015M	
>C28-C35	ND	26.9	mg/kg dry	1	P3L0405	12/04/23 14:24	12/05/23 05:07	TPH 8015M	
Surrogate: 1-Chlorooctane		*79.3 %*	*70-130*		*P3L0405*	*12/04/23 14:24*	*12/05/23 05:07*	*TPH 8015M*	
Surrogate: o-Terphenyl		*88.7 %*	*70-130*		*P3L0405*	*12/04/23 14:24*	*12/05/23 05:07*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.9	mg/kg dry	1	[CALC]	12/04/23 14:24	12/05/23 05:07	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**60.1**	1.08	mg/kg dry	1	P3L0506	12/05/23 09:23	12/07/23 16:46	EPA 300.0	
% Moisture	**7.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-120 @ 1.5

3L01001-73 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 01:10	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 01:10	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 01:10	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 01:10	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 01:10	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*97.1 %*	*80-120*		*P3L0310*	*12/03/23 16:38*	*12/04/23 01:10*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*119 %*	*80-120*		*P3L0310*	*12/03/23 16:38*	*12/04/23 01:10*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/03/23 16:38	12/04/23 01:10	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/03/23 16:38	12/04/23 01:10	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 08:38	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 08:38	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 08:38	TPH 8015M	
Surrogate: 1-Chlorooctane		*76.5 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 08:38*	*TPH 8015M*	
Surrogate: o-Terphenyl		*85.5 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 08:38*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/04/23 14:25	12/05/23 08:38	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**285**	1.04	mg/kg dry	1	P3L0506	12/05/23 09:23	12/07/23 17:00	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-119 @ 1.5

3L01001-74 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 01:34	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 01:34	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 01:34	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 01:34	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 01:34	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*97.1 %*	*80-120*		*P3L0310*	*12/03/23 16:38*	*12/04/23 01:34*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0310*	*12/03/23 16:38*	*12/04/23 01:34*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/03/23 16:38	12/04/23 01:34	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/03/23 16:38	12/04/23 01:34	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 09:02	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 09:02	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 09:02	TPH 8015M	
Surrogate: 1-Chlorooctane		*88.7 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 09:02*	*TPH 8015M*	
Surrogate: o-Terphenyl		*97.8 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 09:02*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/04/23 14:25	12/05/23 09:02	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**32.7**	1.04	mg/kg dry	1	P3L0506	12/05/23 09:23	12/07/23 17:15	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-118 @ 1.5

3L01001-75 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 01:58	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 01:58	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 01:58	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 01:58	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 01:58	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0310*	*12/03/23 16:38*	*12/04/23 01:58*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.9 %*	*80-120*		*P3L0310*	*12/03/23 16:38*	*12/04/23 01:58*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/03/23 16:38	12/04/23 01:58	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/03/23 16:38	12/04/23 01:58	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 09:26	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 09:26	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 09:26	TPH 8015M	
Surrogate: 1-Chlorooctane		*80.6 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 09:26*	*TPH 8015M*	
Surrogate: o-Terphenyl		*90.5 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 09:26*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/04/23 14:25	12/05/23 09:26	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**24.9**	1.03	mg/kg dry	1	P3L0506	12/05/23 09:23	12/07/23 17:30	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-117 @ 1.5

3L01001-76 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 02:23	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 02:23	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 02:23	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 02:23	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 02:23	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.3 %*	*80-120*		*P3L0310*	*12/03/23 16:38*	*12/04/23 02:23*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0310*	*12/03/23 16:38*	*12/04/23 02:23*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/03/23 16:38	12/04/23 02:23	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/03/23 16:38	12/04/23 02:23	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 09:50	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 09:50	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 09:50	TPH 8015M	
Surrogate: 1-Chlorooctane		*76.9 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 09:50*	*TPH 8015M*	
Surrogate: o-Terphenyl		*86.0 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 09:50*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/04/23 14:25	12/05/23 09:50	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**144**	1.03	mg/kg dry	1	P3L0506	12/05/23 09:23	12/07/23 17:44	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-116 @ 1.5

3L01001-77 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 02:47	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 02:47	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 02:47	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 02:47	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 02:47	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*97.2 %*	*80-120*		*P3L0310*	*12/03/23 16:38*	*12/04/23 02:47*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*118 %*	*80-120*		*P3L0310*	*12/03/23 16:38*	*12/04/23 02:47*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/03/23 16:38	12/04/23 02:47	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/03/23 16:38	12/04/23 02:47	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 10:14	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 10:14	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 10:14	TPH 8015M	
Surrogate: 1-Chlorooctane		*86.0 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 10:14*	*TPH 8015M*	
Surrogate: o-Terphenyl		*98.0 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 10:14*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/04/23 14:25	12/05/23 10:14	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**14.5**	1.04	mg/kg dry	1	P3L0506	12/05/23 09:23	12/07/23 17:58	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-115 @ 1.5

3L01001-78 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 03:11	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 03:11	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 03:11	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 03:11	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 03:11	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*119 %*	*80-120*		*P3L0310*	*12/03/23 16:38*	*12/04/23 03:11*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*97.3 %*	*80-120*		*P3L0310*	*12/03/23 16:38*	*12/04/23 03:11*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/03/23 16:38	12/04/23 03:11	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/03/23 16:38	12/04/23 03:11	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 10:37	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 10:37	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 10:37	TPH 8015M	
Surrogate: 1-Chlorooctane		*77.8 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 10:37*	*TPH 8015M*	
Surrogate: o-Terphenyl		*87.9 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 10:37*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/04/23 14:25	12/05/23 10:37	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**43.0**	1.03	mg/kg dry	1	P3L0506	12/05/23 09:23	12/07/23 18:41	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-114 @ 1.5

3L01001-79 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 03:36	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 03:36	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 03:36	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 03:36	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 03:36	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*97.1 %*	*80-120*		*P3L0310*	*12/03/23 16:38*	*12/04/23 03:36*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0310*	*12/03/23 16:38*	*12/04/23 03:36*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/03/23 16:38	12/04/23 03:36	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/03/23 16:38	12/04/23 03:36	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 11:01	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 11:01	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 11:01	TPH 8015M	
Surrogate: 1-Chlorooctane		*85.4 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 11:01*	*TPH 8015M*	
Surrogate: o-Terphenyl		*95.7 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 11:01*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/04/23 14:25	12/05/23 11:01	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**118**	1.04	mg/kg dry	1	P3L0506	12/05/23 09:23	12/07/23 19:25	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-113 @ 1.5

3L01001-80 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 04:00	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 04:00	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 04:00	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 04:00	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 04:00	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0310*	*12/03/23 16:38*	*12/04/23 04:00*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*97.5 %*	*80-120*		*P3L0310*	*12/03/23 16:38*	*12/04/23 04:00*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/03/23 16:38	12/04/23 04:00	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	12/03/23 16:38	12/04/23 04:00	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 11:25	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 11:25	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 11:25	TPH 8015M	
Surrogate: 1-Chlorooctane		*82.9 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 11:25*	*TPH 8015M*	
Surrogate: o-Terphenyl		*93.4 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 11:25*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	12/04/23 14:25	12/05/23 11:25	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**115**	1.06	mg/kg dry	1	P3L0506	12/05/23 09:23	12/07/23 19:39	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-112 @ 1.5

3L01001-81 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 04:24	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 04:24	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 04:24	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 04:24	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L0310	12/03/23 16:38	12/04/23 04:24	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*97.3 %*	*80-120*		*P3L0310*	*12/03/23 16:38*	*12/04/23 04:24*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0310*	*12/03/23 16:38*	*12/04/23 04:24*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/03/23 16:38	12/04/23 04:24	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	12/03/23 16:38	12/04/23 04:24	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 11:49	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 11:49	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 11:49	TPH 8015M	
Surrogate: 1-Chlorooctane		*93.5 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 11:49*	*TPH 8015M*	
Surrogate: o-Terphenyl		*105 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 11:49*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	12/04/23 14:25	12/05/23 11:49	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**86.7**	1.06	mg/kg dry	1	P3L0506	12/05/23 09:23	12/07/23 19:53	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-111 @ 1.5

3L01001-82 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 07:39	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 07:39	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 07:39	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 07:39	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 07:39	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 07:39*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*97.5 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 07:39*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 07:39	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 07:39	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 12:12	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 12:12	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 12:12	TPH 8015M	
Surrogate: 1-Chlorooctane		*86.1 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 12:12*	*TPH 8015M*	
Surrogate: o-Terphenyl		*97.3 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 12:12*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	12/04/23 14:25	12/05/23 12:12	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**108**	1.06	mg/kg dry	1	P3L0506	12/05/23 09:23	12/07/23 20:08	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-110 @ 1.5

3L01001-83 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 08:03	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 08:03	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 08:03	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 08:03	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 08:03	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 08:03*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*97.3 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 08:03*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 08:03	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 08:03	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 13:24	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 13:24	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 13:24	TPH 8015M	
Surrogate: 1-Chlorooctane		*83.0 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 13:24*	*TPH 8015M*	
Surrogate: o-Terphenyl		*94.4 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 13:24*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/04/23 14:25	12/05/23 13:24	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**114**	1.04	mg/kg dry	1	P3L0506	12/05/23 09:23	12/07/23 20:22	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-109 @ 1.5

3L01001-84 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 08:27	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 08:27	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 08:27	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 08:27	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 08:27	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 08:27*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*97.7 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 08:27*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 08:27	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 08:27	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 13:48	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 13:48	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 13:48	TPH 8015M	
Surrogate: 1-Chlorooctane		*71.6 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 13:48*	*TPH 8015M*	
Surrogate: o-Terphenyl		*77.2 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 13:48*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/04/23 14:25	12/05/23 13:48	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**35.0**	1.04	mg/kg dry	1	P3L0506	12/05/23 09:23	12/07/23 20:37	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-108 @ 1.5

3L01001-85 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 08:52	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 08:52	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 08:52	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 08:52	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 08:52	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 08:52*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.9 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 08:52*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 08:52	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 08:52	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 14:12	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 14:12	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 14:12	TPH 8015M	
Surrogate: 1-Chlorooctane		*104 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 14:12*	*TPH 8015M*	
Surrogate: o-Terphenyl		*117 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 14:12*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/04/23 14:25	12/05/23 14:12	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**85.7**	1.05	mg/kg dry	1	P3L0506	12/05/23 09:23	12/07/23 20:51	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-107 @ 1.5

3L01001-86 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 09:16	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 09:16	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 09:16	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 09:16	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 09:16	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.9 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 09:16*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 09:16*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 09:16	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 09:16	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 14:36	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 14:36	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 14:36	TPH 8015M	
Surrogate: 1-Chlorooctane		*87.1 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 14:36*	*TPH 8015M*	
Surrogate: o-Terphenyl		*97.7 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 14:36*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/04/23 14:25	12/05/23 14:36	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**73.5**	1.05	mg/kg dry	1	P3L0506	12/05/23 09:23	12/07/23 21:05	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-106 @ 1.5

3L01001-87 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 09:40	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 09:40	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 09:40	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 09:40	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 09:40	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*97.0 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 09:40*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 09:40*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 09:40	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 09:40	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 15:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 15:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 15:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*86.0 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 15:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*94.6 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 15:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/04/23 14:25	12/05/23 15:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**65.0**	1.04	mg/kg dry	1	P3L0506	12/05/23 09:23	12/07/23 21:20	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-105 @ 1.5

3L01001-88 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 10:05	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 10:05	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 10:05	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 10:05	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 10:05	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.9 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 10:05*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*118 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 10:05*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 10:05	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 10:05	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 15:24	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 15:24	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 15:24	TPH 8015M	
Surrogate: 1-Chlorooctane		*81.9 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 15:24*	*TPH 8015M*	
Surrogate: o-Terphenyl		*92.7 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 15:24*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/04/23 14:25	12/05/23 15:24	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**29.2**	1.04	mg/kg dry	1	P3L0508	12/05/23 12:53	12/05/23 21:13	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-104 @ 1.5

3L01001-89 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 10:29	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 10:29	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 10:29	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 10:29	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 10:29	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 10:29*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.8 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 10:29*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 10:29	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 10:29	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 15:48	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 15:48	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 15:48	TPH 8015M	
Surrogate: 1-Chlorooctane		*79.8 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 15:48*	*TPH 8015M*	
Surrogate: o-Terphenyl		*91.1 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 15:48*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/04/23 14:25	12/05/23 15:48	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**202**	1.04	mg/kg dry	1	P3L0508	12/05/23 12:53	12/05/23 21:57	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-103 @ 1.5

3L01001-90 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 10:54	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 10:54	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 10:54	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 10:54	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 10:54	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 10:54*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.7 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 10:54*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 10:54	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 10:54	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 16:12	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 16:12	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 16:12	TPH 8015M	
Surrogate: 1-Chlorooctane		*87.3 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 16:12*	*TPH 8015M*	
Surrogate: o-Terphenyl		*98.9 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 16:12*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	12/04/23 14:25	12/05/23 16:12	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**187**	1.06	mg/kg dry	1	P3L0508	12/05/23 12:53	12/05/23 22:11	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-102 @ 1.5

3L01001-91 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 11:18	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 11:18	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 11:18	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 11:18	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 11:18	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*97.4 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 11:18*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 11:18*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 11:18	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 11:18	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 16:36	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 16:36	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 16:36	TPH 8015M	
Surrogate: 1-Chlorooctane		*89.6 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 16:36*	*TPH 8015M*	
Surrogate: o-Terphenyl		*101 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 16:36*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	12/04/23 14:25	12/05/23 16:36	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**44.9**	1.06	mg/kg dry	1	P3L0508	12/05/23 12:53	12/05/23 22:26	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-101 @ 1.5

3L01001-92 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 19:07	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 19:07	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 19:07	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 19:07	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 19:07	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*97.5 %*	*80-120*		*P3L0504*	*12/05/23 08:58*	*12/05/23 19:07*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*114 %*	*80-120*		*P3L0504*	*12/05/23 08:58*	*12/05/23 19:07*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/05/23 08:58	12/05/23 19:07	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/05/23 08:58	12/05/23 19:07	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 17:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 17:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0406	12/04/23 14:25	12/05/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*78.3 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*87.0 %*	*70-130*		*P3L0406*	*12/04/23 14:25*	*12/05/23 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/04/23 14:25	12/05/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**140**	1.04	mg/kg dry	1	P3L0508	12/05/23 12:53	12/05/23 22:40	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0310 - * DEFAULT PREP *** **										
Blank (P3L0310-BLK1)				Prepared & Analyzed: 12/03/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 4-Bromofluorobenzene	*0.142*		*"*	*0.120*		*118*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.117*		*"*	*0.120*		*97.1*	*80-120*			
LCS (P3L0310-BS1)				Prepared & Analyzed: 12/03/23						
Benzene	0.113	0.00100	mg/kg	0.100		113	80-120			
Toluene	0.104	0.00100	"	0.100		104	80-120			
Ethylbenzene	0.112	0.00100	"	0.100		112	80-120			
Xylene (p/m)	0.221	0.00200	"	0.200		111	80-120			
Xylene (o)	0.100	0.00100	"	0.100		100	80-120			
Surrogate: 1,4-Difluorobenzene	*0.119*		*"*	*0.120*		*99.3*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.135*		*"*	*0.120*		*112*	*80-120*			
LCS Dup (P3L0310-BSD1)				Prepared & Analyzed: 12/03/23						
Benzene	0.115	0.00100	mg/kg	0.100		115	80-120	2.18	20	
Toluene	0.107	0.00100	"	0.100		107	80-120	2.85	20	
Ethylbenzene	0.115	0.00100	"	0.100		115	80-120	2.82	20	
Xylene (p/m)	0.226	0.00200	"	0.200		113	80-120	1.88	20	
Xylene (o)	0.103	0.00100	"	0.100		103	80-120	2.41	20	
Surrogate: 4-Bromofluorobenzene	*0.132*		*"*	*0.120*		*110*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.119*		*"*	*0.120*		*99.0*	*80-120*			
Calibration Blank (P3L0310-CCB1)				Prepared & Analyzed: 12/03/23						
Benzene	0.160		ug/kg							
Toluene	0.210		"							
Ethylbenzene	0.170		"							
Xylene (p/m)	0.230		"							
Xylene (o)	0.130		"							
Surrogate: 4-Bromofluorobenzene	*0.141*		*"*	*0.120*		*117*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.118*		*"*	*0.120*		*98.2*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0310 - * DEFAULT PREP *** **										
Calibration Blank (P3L0310-CCB2)				Prepared: 12/03/23 Analyzed: 12/04/23						
Benzene	0.170		ug/kg							
Toluene	0.190		"							
Ethylbenzene	0.190		"							
Xylene (p/m)	0.290		"							
Xylene (o)	0.170		"							
Surrogate: 4-Bromofluorobenzene	*0.141*		*"*	*0.120*		*118*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.116*		*"*	*0.120*		*96.5*	*80-120*			
Calibration Check (P3L0310-CCV1)				Prepared & Analyzed: 12/03/23						
Benzene	0.112	0.00100	mg/kg	0.100		112	80-120			
Toluene	0.102	0.00100	"	0.100		102	80-120			
Ethylbenzene	0.104	0.00100	"	0.100		104	80-120			
Xylene (p/m)	0.217	0.00200	"	0.200		109	80-120			
Xylene (o)	0.0997	0.00100	"	0.100		99.7	80-120			
Surrogate: 4-Bromofluorobenzene	*0.132*		*"*	*0.120*		*110*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.120*		*"*	*0.120*		*100*	*75-125*			
Calibration Check (P3L0310-CCV2)				Prepared & Analyzed: 12/03/23						
Benzene	0.119	0.00100	mg/kg	0.100		119	80-120			
Toluene	0.112	0.00100	"	0.100		112	80-120			
Ethylbenzene	0.114	0.00100	"	0.100		114	80-120			
Xylene (p/m)	0.233	0.00200	"	0.200		116	80-120			
Xylene (o)	0.109	0.00100	"	0.100		109	80-120			
Surrogate: 4-Bromofluorobenzene	*0.133*		*"*	*0.120*		*111*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.118*		*"*	*0.120*		*98.1*	*75-125*			
Calibration Check (P3L0310-CCV3)				Prepared: 12/03/23 Analyzed: 12/04/23						
Benzene	0.119	0.00100	mg/kg	0.100		119	80-120			
Toluene	0.108	0.00100	"	0.100		108	80-120			
Ethylbenzene	0.110	0.00100	"	0.100		110	80-120			
Xylene (p/m)	0.226	0.00200	"	0.200		113	80-120			
Xylene (o)	0.106	0.00100	"	0.100		106	80-120			
Surrogate: 1,4-Difluorobenzene	*0.119*		*"*	*0.120*		*99.3*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.133*		*"*	*0.120*		*111*	*75-125*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0310 - * DEFAULT PREP *** **										
Matrix Spike (P3L0310-MS1)	**Source: 3L01001-80**			Prepared: 12/03/23 Analyzed: 12/04/23						
Benzene	0.0828	0.00106	mg/kg dry	0.106	ND	77.9	80-120			QM-05
Toluene	0.0613	0.00106	"	0.106	ND	57.6	80-120			QM-05
Ethylbenzene	0.0564	0.00106	"	0.106	ND	53.0	80-120			QM-05
Xylene (p/m)	0.114	0.00213	"	0.213	ND	53.5	80-120			QM-05
Xylene (o)	0.0509	0.00106	"	0.106	ND	47.8	80-120			QM-05
Surrogate: 1,4-Difluorobenzene	*0.126*		*"*	*0.128*		*98.9*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.142*		*"*	*0.128*		*111*	*80-120*			
Matrix Spike Dup (P3L0310-MSD1)	**Source: 3L01001-80**			Prepared: 12/03/23 Analyzed: 12/04/23						
Benzene	0.101	0.00106	mg/kg dry	0.106	ND	94.9	80-120	19.8	20	
Toluene	0.0828	0.00106	"	0.106	ND	77.9	80-120	29.8	20	QM-05
Ethylbenzene	0.0845	0.00106	"	0.106	ND	79.4	80-120	40.0	20	QM-05
Xylene (p/m)	0.168	0.00213	"	0.213	ND	78.9	80-120	38.3	20	QM-05
Xylene (o)	0.0750	0.00106	"	0.106	ND	70.5	80-120	38.3	20	QM-05
Surrogate: 1,4-Difluorobenzene	*0.127*		*"*	*0.128*		*99.2*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.141*		*"*	*0.128*		*111*	*80-120*			
Batch P3L0311 - * DEFAULT PREP *** **										
Blank (P3L0311-BLK1)				Prepared: 12/03/23 Analyzed: 12/04/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 4-Bromofluorobenzene	*0.141*		*"*	*0.120*		*118*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.115*		*"*	*0.120*		*95.7*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0311 - * DEFAULT PREP *** **										
LCS (P3L0311-BS1)				Prepared: 12/03/23 Analyzed: 12/04/23						
Benzene	0.113	0.00100	mg/kg	0.100		113	80-120			
Toluene	0.101	0.00100	"	0.100		101	80-120			
Ethylbenzene	0.108	0.00100	"	0.100		108	80-120			
Xylene (p/m)	0.212	0.00200	"	0.200		106	80-120			
Xylene (o)	0.0968	0.00100	"	0.100		96.8	80-120			
Surrogate: 1,4-Difluorobenzene	*0.119*		*"*	*0.120*		*99.0*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.134*		*"*	*0.120*		*112*	*80-120*			
LCS Dup (P3L0311-BSD1)				Prepared: 12/03/23 Analyzed: 12/04/23						
Benzene	0.113	0.00100	mg/kg	0.100		113	80-120	0.416	20	
Toluene	0.101	0.00100	"	0.100		101	80-120	0.00	20	
Ethylbenzene	0.108	0.00100	"	0.100		108	80-120	0.306	20	
Xylene (p/m)	0.212	0.00200	"	0.200		106	80-120	0.245	20	
Xylene (o)	0.0969	0.00100	"	0.100		96.9	80-120	0.124	20	
Surrogate: 1,4-Difluorobenzene	*0.119*		*"*	*0.120*		*98.8*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.133*		*"*	*0.120*		*111*	*80-120*			
Calibration Blank (P3L0311-CCB1)				Prepared: 12/03/23 Analyzed: 12/04/23						
Benzene	0.200		ug/kg							
Toluene	0.180		"							
Ethylbenzene	0.120		"							
Xylene (p/m)	0.260		"							
Xylene (o)	0.130		"							
Surrogate: 1,4-Difluorobenzene	*0.116*		*"*	*0.120*		*96.5*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.140*		*"*	*0.120*		*117*	*80-120*			
Calibration Blank (P3L0311-CCB2)				Prepared: 12/03/23 Analyzed: 12/04/23						
Benzene	0.190		ug/kg							
Toluene	0.260		"							
Ethylbenzene	0.220		"							
Xylene (p/m)	0.240		"							
Xylene (o)	0.180		"							
Surrogate: 4-Bromofluorobenzene	*0.141*		*"*	*0.120*		*117*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.116*		*"*	*0.120*		*96.4*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0311 - * DEFAULT PREP *** **										
Calibration Check (P3L0311-CCV1)				Prepared: 12/03/23 Analyzed: 12/04/23						
Benzene	0.119	0.00100	mg/kg	0.100		119	80-120			
Toluene	0.108	0.00100	"	0.100		108	80-120			
Ethylbenzene	0.110	0.00100	"	0.100		110	80-120			
Xylene (p/m)	0.226	0.00200	"	0.200		113	80-120			
Xylene (o)	0.106	0.00100	"	0.100		106	80-120			
Surrogate: 4-Bromofluorobenzene	*0.133*		"	*0.120*		*111*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.119*		"	*0.120*		*99.3*	*75-125*			
Calibration Check (P3L0311-CCV2)				Prepared: 12/03/23 Analyzed: 12/04/23						
Benzene	0.116	0.00100	mg/kg	0.100		116	80-120			
Toluene	0.105	0.00100	"	0.100		105	80-120			
Ethylbenzene	0.106	0.00100	"	0.100		106	80-120			
Xylene (p/m)	0.215	0.00200	"	0.200		108	80-120			
Xylene (o)	0.101	0.00100	"	0.100		101	80-120			
Surrogate: 1,4-Difluorobenzene	*0.118*		"	*0.120*		*98.6*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.132*		"	*0.120*		*110*	*75-125*			
Calibration Check (P3L0311-CCV3)				Prepared: 12/03/23 Analyzed: 12/04/23						
Benzene	0.112	0.00100	mg/kg	0.100		112	80-120			
Toluene	0.0997	0.00100	"	0.100		99.7	80-120			
Ethylbenzene	0.101	0.00100	"	0.100		101	80-120			
Xylene (p/m)	0.205	0.00200	"	0.200		102	80-120			
Xylene (o)	0.0958	0.00100	"	0.100		95.8	80-120			
Surrogate: 1,4-Difluorobenzene	*0.117*		"	*0.120*		*97.6*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.132*		"	*0.120*		*110*	*75-125*			
Matrix Spike (P3L0311-MS1)		**Source: 3L01002-09**		Prepared: 12/03/23 Analyzed: 12/04/23						
Benzene	0.0822	0.00104	mg/kg dry	0.104		78.9	80-120			QM-05
Toluene	0.0618	0.00104	"	0.104		59.3	80-120			QM-05
Ethylbenzene	0.0575	0.00104	"	0.104		55.2	80-120			QM-05
Xylene (p/m)	0.113	0.00208	"	0.208		54.2	80-120			QM-05
Xylene (o)	0.0517	0.00104	"	0.104		49.7	80-120			QM-05
Surrogate: 4-Bromofluorobenzene	*0.136*		"	*0.125*		*109*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.122*		"	*0.125*		*97.5*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0311 - * DEFAULT PREP *** **										
Matrix Spike Dup (P3L0311-MSD1)	**Source: 3L01002-09**			Prepared: 12/03/23 Analyzed: 12/04/23						
Benzene	0.0639	0.00104	mg/kg dry	0.104		61.4	80-120	25.0	20	QM-05
Toluene	0.0468	0.00104	"	0.104		44.9	80-120	27.7	20	QM-05
Ethylbenzene	0.0410	0.00104	"	0.104		39.4	80-120	33.5	20	QM-05
Xylene (p/m)	0.0814	0.00208	"	0.208		39.1	80-120	32.5	20	QM-05
Xylene (o)	0.0374	0.00104	"	0.104		35.9	80-120	32.1	20	QM-05
Surrogate: 4-Bromofluorobenzene	*0.137*		*"*	*0.125*		*109*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.122*		*"*	*0.125*		*97.8*	*80-120*			
Batch P3L0504 - * DEFAULT PREP *** **										
Blank (P3L0504-BLK1)				Prepared & Analyzed: 12/05/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 4-Bromofluorobenzene	*0.138*		*"*	*0.120*		*115*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.114*		*"*	*0.120*		*95.2*	*80-120*			
LCS (P3L0504-BS1)				Prepared & Analyzed: 12/05/23						
Benzene	0.105	0.00100	mg/kg	0.100		105	80-120			
Toluene	0.0984	0.00100	"	0.100		98.4	80-120			
Ethylbenzene	0.108	0.00100	"	0.100		108	80-120			
Xylene (p/m)	0.210	0.00200	"	0.200		105	80-120			
Xylene (o)	0.0964	0.00100	"	0.100		96.4	80-120			
Surrogate: 4-Bromofluorobenzene	*0.130*		*"*	*0.120*		*109*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.117*		*"*	*0.120*		*97.4*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0504 - * DEFAULT PREP *** **										
LCS Dup (P3L0504-BSD1)				Prepared & Analyzed: 12/05/23						
Benzene	0.107	0.00100	mg/kg	0.100		107	80-120	2.08	20	
Toluene	0.101	0.00100	"	0.100		101	80-120	2.32	20	
Ethylbenzene	0.111	0.00100	"	0.100		111	80-120	2.59	20	
Xylene (p/m)	0.216	0.00200	"	0.200		108	80-120	2.84	20	
Xylene (o)	0.0987	0.00100	"	0.100		98.7	80-120	2.34	20	
Surrogate: 1,4-Difluorobenzene	*0.117*		*"*	*0.120*		*97.9*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.131*		*"*	*0.120*		*109*	*80-120*			
Calibration Blank (P3L0504-CCB1)				Prepared & Analyzed: 12/05/23						
Benzene	0.150		ug/kg							
Toluene	0.290		"							
Ethylbenzene	0.110		"							
Xylene (p/m)	0.160		"							
Xylene (o)	0.0900		"							
Surrogate: 1,4-Difluorobenzene	*0.115*		*"*	*0.120*		*96.1*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.135*		*"*	*0.120*		*112*	*80-120*			
Calibration Blank (P3L0504-CCB2)				Prepared & Analyzed: 12/05/23						
Benzene	0.180		ug/kg							
Toluene	0.220		"							
Ethylbenzene	0.210		"							
Xylene (p/m)	0.180		"							
Xylene (o)	0.180		"							
Surrogate: 1,4-Difluorobenzene	*0.114*		*"*	*0.120*		*95.1*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.136*		*"*	*0.120*		*114*	*80-120*			
Calibration Blank (P3L0504-CCB3)				Prepared & Analyzed: 12/05/23						
Benzene	0.130		ug/kg							
Toluene	0.210		"							
Ethylbenzene	0.130		"							
Xylene (p/m)	0.220		"							
Xylene (o)	0.200		"							
Surrogate: 1,4-Difluorobenzene	*0.115*		*"*	*0.120*		*96.2*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.137*		*"*	*0.120*		*115*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0504 - * DEFAULT PREP *** **										
Calibration Check (P3L0504-CCV1)				Prepared & Analyzed: 12/05/23						
Benzene	0.104	0.00100	mg/kg	0.100		104	80-120			
Toluene	0.0958	0.00100	"	0.100		95.8	80-120			
Ethylbenzene	0.0983	0.00100	"	0.100		98.3	80-120			
Xylene (p/m)	0.204	0.00200	"	0.200		102	80-120			
Xylene (o)	0.0930	0.00100	"	0.100		93.0	80-120			
Surrogate: 1,4-Difluorobenzene	*0.117*		*"*	*0.120*		*97.8*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.129*		*"*	*0.120*		*107*	*75-125*			
Calibration Check (P3L0504-CCV2)				Prepared & Analyzed: 12/05/23						
Benzene	0.110	0.00100	mg/kg	0.100		110	80-120			
Toluene	0.103	0.00100	"	0.100		103	80-120			
Ethylbenzene	0.105	0.00100	"	0.100		105	80-120			
Xylene (p/m)	0.214	0.00200	"	0.200		107	80-120			
Xylene (o)	0.101	0.00100	"	0.100		101	80-120			
Surrogate: 1,4-Difluorobenzene	*0.116*		*"*	*0.120*		*96.5*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.131*		*"*	*0.120*		*109*	*75-125*			
Calibration Check (P3L0504-CCV3)				Prepared & Analyzed: 12/05/23						
Benzene	0.115	0.00100	mg/kg	0.100		115	80-120			
Toluene	0.108	0.00100	"	0.100		108	80-120			
Ethylbenzene	0.110	0.00100	"	0.100		110	80-120			
Xylene (p/m)	0.218	0.00200	"	0.200		109	80-120			
Xylene (o)	0.109	0.00100	"	0.100		109	80-120			
Surrogate: 4-Bromofluorobenzene	*0.137*		*"*	*0.120*		*114*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.118*		*"*	*0.120*		*98.0*	*75-125*			
Matrix Spike (P3L0504-MS1)	**Source: 3L04006-01**			Prepared & Analyzed: 12/05/23						
Benzene	0.0540	0.00111	mg/kg dry	0.111	0.00807	41.4	80-120			QM-05
Toluene	0.0393	0.00111	"	0.111	0.0519	NR	80-120			QM-05
Ethylbenzene	0.0689	0.00111	"	0.111	0.0256	39.0	80-120			QM-05
Xylene (p/m)	0.122	0.00222	"	0.222	0.111	5.17	80-120			QM-05
Xylene (o)	0.0686	0.00111	"	0.111	0.0335	31.6	80-120			QM-05
Surrogate: 4-Bromofluorobenzene	*0.150*		*"*	*0.133*		*112*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.134*		*"*	*0.133*		*101*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0504 - * DEFAULT PREP *** **										
Matrix Spike Dup (P3L0504-MSD1)	**Source: 3L04006-01**			Prepared & Analyzed: 12/05/23						
Benzene	0.0677	0.00111	mg/kg dry	0.111	0.00807	53.7	80-120	25.9	20	QM-05
Toluene	0.0430	0.00111	"	0.111	0.0519	NR	80-120	NR	20	QM-05
Ethylbenzene	0.0779	0.00111	"	0.111	0.0256	47.0	80-120	18.7	20	QM-05
Xylene (p/m)	0.128	0.00222	"	0.222	0.111	7.51	80-120	36.9	20	QM-05
Xylene (o)	0.0803	0.00111	"	0.111	0.0335	42.2	80-120	28.5	20	QM-05
Surrogate: 4-Bromofluorobenzene	*0.151*		*"*	*0.133*		*113*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.134*		*"*	*0.133*		*101*	*80-120*			
Batch P3L0505 - * DEFAULT PREP *** **										
Blank (P3L0505-BLK1)				Prepared & Analyzed: 12/05/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 4-Bromofluorobenzene	*0.138*		*"*	*0.120*		*115*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.115*		*"*	*0.120*		*96.2*	*80-120*			
LCS (P3L0505-BS1)				Prepared & Analyzed: 12/05/23						
Benzene	0.108	0.00100	mg/kg	0.100		108	80-120			
Toluene	0.0997	0.00100	"	0.100		99.7	80-120			
Ethylbenzene	0.107	0.00100	"	0.100		107	80-120			
Xylene (p/m)	0.206	0.00200	"	0.200		103	80-120			
Xylene (o)	0.0954	0.00100	"	0.100		95.4	80-120			
Surrogate: 1,4-Difluorobenzene	*0.117*		*"*	*0.120*		*97.5*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.131*		*"*	*0.120*		*109*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0505 - * DEFAULT PREP *** **										
LCS Dup (P3L0505-BSD1)				Prepared & Analyzed: 12/05/23						
Benzene	0.106	0.00100	mg/kg	0.100		106	80-120	1.94	20	
Toluene	0.0977	0.00100	"	0.100		97.7	80-120	1.97	20	
Ethylbenzene	0.106	0.00100	"	0.100		106	80-120	1.10	20	
Xylene (p/m)	0.206	0.00200	"	0.200		103	80-120	0.325	20	
Xylene (o)	0.0942	0.00100	"	0.100		94.2	80-120	1.22	20	
Surrogate: 1,4-Difluorobenzene	*0.117*		*"*	*0.120*		*97.4*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.131*		*"*	*0.120*		*109*	*80-120*			
Calibration Blank (P3L0505-CCB1)				Prepared & Analyzed: 12/05/23						
Benzene	0.130		ug/kg							
Toluene	0.210		"							
Ethylbenzene	0.130		"							
Xylene (p/m)	0.220		"							
Xylene (o)	0.200		"							
Surrogate: 1,4-Difluorobenzene	*0.115*		*"*	*0.120*		*96.2*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.137*		*"*	*0.120*		*115*	*80-120*			
Calibration Blank (P3L0505-CCB2)				Prepared: 12/05/23 Analyzed: 12/06/23						
Benzene	0.110		ug/kg							
Toluene	0.220		"							
Ethylbenzene	0.120		"							
Xylene (p/m)	0.180		"							
Xylene (o)	0.0700		"							
Surrogate: 4-Bromofluorobenzene	*0.138*		*"*	*0.120*		*115*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.116*		*"*	*0.120*		*96.6*	*80-120*			
Calibration Check (P3L0505-CCV1)				Prepared & Analyzed: 12/05/23						
Benzene	0.115	0.00100	mg/kg	0.100		115	80-120			
Toluene	0.108	0.00100	"	0.100		108	80-120			
Ethylbenzene	0.110	0.00100	"	0.100		110	80-120			
Xylene (p/m)	0.218	0.00200	"	0.200		109	80-120			
Xylene (o)	0.109	0.00100	"	0.100		109	80-120			
Surrogate: 4-Bromofluorobenzene	*0.137*		*"*	*0.120*		*114*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.118*		*"*	*0.120*		*98.0*	*75-125*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0505 - * DEFAULT PREP *** **										
Calibration Check (P3L0505-CCV2)				Prepared: 12/05/23 Analyzed: 12/06/23						
Benzene	0.117	0.00100	mg/kg	0.100		117	80-120			
Toluene	0.106	0.00100	"	0.100		106	80-120			
Ethylbenzene	0.107	0.00100	"	0.100		107	80-120			
Xylene (p/m)	0.217	0.00200	"	0.200		108	80-120			
Xylene (o)	0.100	0.00100	"	0.100		100	80-120			
Surrogate: 4-Bromofluorobenzene	*0.131*		"	*0.120*		*109*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.119*		"	*0.120*		*98.8*	*75-125*			
Calibration Check (P3L0505-CCV3)				Prepared: 12/05/23 Analyzed: 12/06/23						
Benzene	0.115	0.00100	mg/kg	0.100		115	80-120			
Toluene	0.106	0.00100	"	0.100		106	80-120			
Ethylbenzene	0.107	0.00100	"	0.100		107	80-120			
Xylene (p/m)	0.216	0.00200	"	0.200		108	80-120			
Xylene (o)	0.102	0.00100	"	0.100		102	80-120			
Surrogate: 4-Bromofluorobenzene	*0.134*		"	*0.120*		*111*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.117*		"	*0.120*		*97.5*	*75-125*			
Matrix Spike (P3L0505-MS1)		**Source: 3K29009-13**		Prepared: 12/05/23 Analyzed: 12/06/23						
Benzene	0.0892	0.00106	mg/kg dry	0.106	ND	83.9	80-120			
Toluene	0.0745	0.00106	"	0.106	ND	70.0	80-120			QM-05
Ethylbenzene	0.0772	0.00106	"	0.106	ND	72.6	80-120			QM-05
Xylene (p/m)	0.154	0.00213	"	0.213	ND	72.4	80-120			QM-05
Xylene (o)	0.0687	0.00106	"	0.106	ND	64.6	80-120			QM-05
Surrogate: 1,4-Difluorobenzene	*0.125*		"	*0.128*		*97.7*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.142*		"	*0.128*		*111*	*80-120*			
Matrix Spike Dup (P3L0505-MSD1)		**Source: 3K29009-13**		Prepared: 12/05/23 Analyzed: 12/06/23						
Benzene	0.0944	0.00106	mg/kg dry	0.106	ND	88.8	80-120	5.65	20	
Toluene	0.0798	0.00106	"	0.106	ND	75.0	80-120	6.96	20	QM-05
Ethylbenzene	0.0826	0.00106	"	0.106	ND	77.6	80-120	6.70	20	QM-05
Xylene (p/m)	0.164	0.00213	"	0.213	ND	77.2	80-120	6.47	20	QM-05
Xylene (o)	0.0726	0.00106	"	0.106	ND	68.3	80-120	5.54	20	QM-05
Surrogate: 1,4-Difluorobenzene	*0.124*		"	*0.128*		*97.4*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.141*		"	*0.128*		*111*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0602 - * DEFAULT PREP *** **										
Blank (P3L0602-BLK1)				Prepared & Analyzed: 12/06/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*95.1*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.137*		"	*0.120*		*114*	*80-120*			
LCS (P3L0602-BS1)				Prepared & Analyzed: 12/06/23						
Benzene	0.104	0.00100	mg/kg	0.100		104	80-120			
Toluene	0.0988	0.00100	"	0.100		98.8	80-120			
Ethylbenzene	0.109	0.00100	"	0.100		109	80-120			
Xylene (p/m)	0.214	0.00200	"	0.200		107	80-120			
Xylene (o)	0.0977	0.00100	"	0.100		97.7	80-120			
Surrogate: 4-Bromofluorobenzene	*0.132*		"	*0.120*		*110*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.116*		"	*0.120*		*96.8*	*80-120*			
LCS Dup (P3L0602-BSD1)				Prepared & Analyzed: 12/06/23						
Benzene	0.103	0.00100	mg/kg	0.100		103	80-120	0.703	20	
Toluene	0.0981	0.00100	"	0.100		98.1	80-120	0.721	20	
Ethylbenzene	0.108	0.00100	"	0.100		108	80-120	0.854	20	
Xylene (p/m)	0.212	0.00200	"	0.200		106	80-120	0.956	20	
Xylene (o)	0.0957	0.00100	"	0.100		95.7	80-120	2.04	20	
Surrogate: 4-Bromofluorobenzene	*0.133*		"	*0.120*		*111*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.116*		"	*0.120*		*96.8*	*80-120*			
Calibration Blank (P3L0602-CCB1)				Prepared & Analyzed: 12/06/23						
Benzene	0.170		ug/kg							
Toluene	0.320		"							
Ethylbenzene	0.240		"							
Xylene (p/m)	0.210		"							
Xylene (o)	0.140		"							
Surrogate: 4-Bromofluorobenzene	*0.138*		"	*0.120*		*115*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.115*		"	*0.120*		*96.2*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0602 - * DEFAULT PREP *** **										
Calibration Blank (P3L0602-CCB2)				Prepared & Analyzed: 12/06/23						
Benzene	0.170		ug/kg							
Toluene	0.300		"							
Ethylbenzene	0.150		"							
Xylene (p/m)	0.190		"							
Xylene (o)	0.150		"							
Surrogate: 4-Bromofluorobenzene	*0.137*		*"*	*0.120*		*115*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.115*		*"*	*0.120*		*95.5*	*80-120*			
Calibration Blank (P3L0602-CCB3)				Prepared & Analyzed: 12/06/23						
Benzene	0.120		ug/kg							
Toluene	0.270		"							
Ethylbenzene	0.180		"							
Xylene (p/m)	0.170		"							
Xylene (o)	0.120		"							
Surrogate: 4-Bromofluorobenzene	*0.137*		*"*	*0.120*		*114*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.115*		*"*	*0.120*		*95.5*	*80-120*			
Calibration Check (P3L0602-CCV1)				Prepared & Analyzed: 12/06/23						
Benzene	0.101	0.00100	mg/kg	0.100		101	80-120			
Toluene	0.0939	0.00100	"	0.100		93.9	80-120			
Ethylbenzene	0.0970	0.00100	"	0.100		97.0	80-120			
Xylene (p/m)	0.202	0.00200	"	0.200		101	80-120			
Xylene (o)	0.0916	0.00100	"	0.100		91.6	80-120			
Surrogate: 1,4-Difluorobenzene	*0.117*		*"*	*0.120*		*97.5*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.134*		*"*	*0.120*		*111*	*75-125*			
Calibration Check (P3L0602-CCV2)				Prepared & Analyzed: 12/06/23						
Benzene	0.110	0.00100	mg/kg	0.100		110	80-120			
Toluene	0.105	0.00100	"	0.100		105	80-120			
Ethylbenzene	0.107	0.00100	"	0.100		107	80-120			
Xylene (p/m)	0.217	0.00200	"	0.200		109	80-120			
Xylene (o)	0.102	0.00100	"	0.100		102	80-120			
Surrogate: 1,4-Difluorobenzene	*0.116*		*"*	*0.120*		*96.4*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.134*		*"*	*0.120*		*111*	*75-125*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0602 - * DEFAULT PREP *** **										
Calibration Check (P3L0602-CCV3)				Prepared & Analyzed: 12/06/23						
Benzene	0.111	0.00100	mg/kg	0.100		111	80-120			
Toluene	0.104	0.00100	"	0.100		104	80-120			
Ethylbenzene	0.105	0.00100	"	0.100		105	80-120			
Xylene (p/m)	0.215	0.00200	"	0.200		107	80-120			
Xylene (o)	0.101	0.00100	"	0.100		101	80-120			
Surrogate: 1,4-Difluorobenzene	*0.116*		"	*0.120*		*96.8*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.133*		"	*0.120*		*111*	*75-125*			
Matrix Spike (P3L0602-MS1)		**Source: 3L01001-05**		Prepared & Analyzed: 12/06/23						
Benzene	0.0777	0.00102	mg/kg dry	0.102	ND	76.1	80-120			QM-05
Toluene	0.0668	0.00102	"	0.102	ND	65.4	80-120			QM-05
Ethylbenzene	0.0695	0.00102	"	0.102	ND	68.2	80-120			QM-05
Xylene (p/m)	0.139	0.00204	"	0.204	ND	68.0	80-120			QM-05
Xylene (o)	0.0613	0.00102	"	0.102	ND	60.1	80-120			QM-05
Surrogate: 1,4-Difluorobenzene	*0.118*		"	*0.122*		*96.3*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.134*		"	*0.122*		*110*	*80-120*			
Matrix Spike Dup (P3L0602-MSD1)		**Source: 3L01001-05**		Prepared & Analyzed: 12/06/23						
Benzene	0.0850	0.00102	mg/kg dry	0.102	ND	83.3	80-120	8.99	20	
Toluene	0.0738	0.00102	"	0.102	ND	72.3	80-120	10.0	20	QM-05
Ethylbenzene	0.0765	0.00102	"	0.102	ND	75.0	80-120	9.54	20	QM-05
Xylene (p/m)	0.151	0.00204	"	0.204	ND	74.0	80-120	8.55	20	QM-05
Xylene (o)	0.0671	0.00102	"	0.102	ND	65.7	80-120	8.98	20	QM-05
Surrogate: 4-Bromofluorobenzene	*0.134*		"	*0.122*		*110*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.118*		"	*0.122*		*96.6*	*80-120*			
Batch P3L0603 - * DEFAULT PREP *** **										
Blank (P3L0603-BLK1)				Prepared: 12/06/23 Analyzed: 12/07/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*95.4*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.139*		"	*0.120*		*116*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0603 - * DEFAULT PREP *** **										
LCS (P3L0603-BS1)				Prepared & Analyzed: 12/06/23						
Benzene	0.102	0.00100	mg/kg	0.100		102	80-120			
Toluene	0.0959	0.00100	"	0.100		95.9	80-120			
Ethylbenzene	0.104	0.00100	"	0.100		104	80-120			
Xylene (p/m)	0.202	0.00200	"	0.200		101	80-120			
Xylene (o)	0.0936	0.00100	"	0.100		93.6	80-120			
Surrogate: 4-Bromofluorobenzene	*0.132*		*"*	*0.120*		*110*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.115*		*"*	*0.120*		*95.9*	*80-120*			
LCS Dup (P3L0603-BSD1)				Prepared: 12/06/23 Analyzed: 12/07/23						
Benzene	0.101	0.00100	mg/kg	0.100		101	80-120	1.63	20	
Toluene	0.0943	0.00100	"	0.100		94.3	80-120	1.62	20	
Ethylbenzene	0.102	0.00100	"	0.100		102	80-120	1.89	20	
Xylene (p/m)	0.197	0.00200	"	0.200		98.7	80-120	2.53	20	
Xylene (o)	0.0905	0.00100	"	0.100		90.5	80-120	3.42	20	
Surrogate: 4-Bromofluorobenzene	*0.133*		*"*	*0.120*		*111*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.115*		*"*	*0.120*		*96.2*	*80-120*			
Calibration Blank (P3L0603-CCB1)				Prepared & Analyzed: 12/06/23						
Benzene	0.120		ug/kg							
Toluene	0.270		"							
Ethylbenzene	0.180		"							
Xylene (p/m)	0.170		"							
Xylene (o)	0.120		"							
Surrogate: 1,4-Difluorobenzene	*0.115*		*"*	*0.120*		*95.5*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.137*		*"*	*0.120*		*114*	*80-120*			
Calibration Blank (P3L0603-CCB2)				Prepared: 12/06/23 Analyzed: 12/07/23						
Benzene	0.160		ug/kg							
Toluene	0.260		"							
Ethylbenzene	0.110		"							
Xylene (p/m)	0.190		"							
Xylene (o)	0.100		"							
Surrogate: 1,4-Difluorobenzene	*0.114*		*"*	*0.120*		*95.3*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.137*		*"*	*0.120*		*114*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0603 - * DEFAULT PREP *** **										
Calibration Check (P3L0603-CCV1)				Prepared & Analyzed: 12/06/23						
Benzene	0.111	0.00100	mg/kg	0.100		111	80-120			
Toluene	0.104	0.00100	"	0.100		104	80-120			
Ethylbenzene	0.105	0.00100	"	0.100		105	80-120			
Xylene (p/m)	0.215	0.00200	"	0.200		107	80-120			
Xylene (o)	0.101	0.00100	"	0.100		101	80-120			
Surrogate: 1,4-Difluorobenzene	*0.116*		*"*	*0.120*		*96.8*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.133*		*"*	*0.120*		*111*	*75-125*			
Calibration Check (P3L0603-CCV2)				Prepared: 12/06/23 Analyzed: 12/07/23						
Benzene	0.113	0.00100	mg/kg	0.100		113	80-120			
Toluene	0.104	0.00100	"	0.100		104	80-120			
Ethylbenzene	0.105	0.00100	"	0.100		105	80-120			
Xylene (p/m)	0.212	0.00200	"	0.200		106	80-120			
Xylene (o)	0.0998	0.00100	"	0.100		99.8	80-120			
Surrogate: 4-Bromofluorobenzene	*0.133*		*"*	*0.120*		*111*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.116*		*"*	*0.120*		*96.9*	*75-125*			
Calibration Check (P3L0603-CCV3)				Prepared: 12/06/23 Analyzed: 12/07/23						
Benzene	0.111	0.00100	mg/kg	0.100		111	80-120			
Toluene	0.103	0.00100	"	0.100		103	80-120			
Ethylbenzene	0.104	0.00100	"	0.100		104	80-120			
Xylene (p/m)	0.210	0.00200	"	0.200		105	80-120			
Xylene (o)	0.0990	0.00100	"	0.100		99.0	80-120			
Surrogate: 4-Bromofluorobenzene	*0.133*		*"*	*0.120*		*111*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.115*		*"*	*0.120*		*96.1*	*75-125*			
Matrix Spike (P3L0603-MS1)		**Source: 3L01001-25**		Prepared: 12/06/23 Analyzed: 12/07/23						
Benzene	0.0848	0.00104	mg/kg dry	0.104	ND	81.4	80-120			
Toluene	0.0698	0.00104	"	0.104	ND	67.0	80-120			QM-05
Ethylbenzene	0.0678	0.00104	"	0.104	ND	65.1	80-120			QM-05
Xylene (p/m)	0.134	0.00208	"	0.208	ND	64.2	80-120			QM-05
Xylene (o)	0.0584	0.00104	"	0.104	ND	56.0	80-120			QM-05
Surrogate: 4-Bromofluorobenzene	*0.138*		*"*	*0.125*		*110*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.120*		*"*	*0.125*		*96.1*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0603 - * DEFAULT PREP *** **										
Matrix Spike Dup (P3L0603-MSD1)	**Source: 3L01001-25**			Prepared: 12/06/23 Analyzed: 12/07/23						
Benzene	0.0910	0.00104	mg/kg dry	0.104	ND	87.4	80-120	7.10	20	
Toluene	0.0796	0.00104	"	0.104	ND	76.4	80-120	13.1	20	
Ethylbenzene	0.0815	0.00104	"	0.104	ND	78.3	80-120	18.4	20	
Xylene (p/m)	0.159	0.00208	"	0.208	ND	76.5	80-120	17.5	20	
Xylene (o)	0.0703	0.00104	"	0.104	ND	67.5	80-120	18.6	20	
Surrogate: 4-Bromofluorobenzene	*0.138*		*"*	*0.125*		*111*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.120*		*"*	*0.125*		*96.2*	*80-120*			
Batch P3L0702 - * DEFAULT PREP *** **										
Blank (P3L0702-BLK1)				Prepared & Analyzed: 12/07/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 4-Bromofluorobenzene	*0.139*		*"*	*0.120*		*116*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.114*		*"*	*0.120*		*94.7*	*80-120*			
LCS (P3L0702-BS1)				Prepared & Analyzed: 12/07/23						
Benzene	0.100	0.00100	mg/kg	0.100		100	80-120			
Toluene	0.0970	0.00100	"	0.100		97.0	80-120			
Ethylbenzene	0.107	0.00100	"	0.100		107	80-120			
Xylene (p/m)	0.208	0.00200	"	0.200		104	80-120			
Xylene (o)	0.0960	0.00100	"	0.100		96.0	80-120			
Surrogate: 1,4-Difluorobenzene	*0.115*		*"*	*0.120*		*95.7*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.133*		*"*	*0.120*		*111*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0702 - * DEFAULT PREP *** **										
LCS Dup (P3L0702-BSD1)				Prepared & Analyzed: 12/07/23						
Benzene	0.100	0.00100	mg/kg	0.100		100	80-120	0.0598	20	
Toluene	0.0964	0.00100	"	0.100		96.4	80-120	0.683	20	
Ethylbenzene	0.107	0.00100	"	0.100		107	80-120	0.505	20	
Xylene (p/m)	0.208	0.00200	"	0.200		104	80-120	0.245	20	
Xylene (o)	0.0953	0.00100	"	0.100		95.3	80-120	0.732	20	
Surrogate: 4-Bromofluorobenzene	*0.133*		"	*0.120*		*111*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.115*		"	*0.120*		*95.6*	*80-120*			
Calibration Blank (P3L0702-CCB1)				Prepared & Analyzed: 12/07/23						
Benzene	0.260		ug/kg							
Toluene	0.410		"							
Ethylbenzene	0.190		"							
Xylene (p/m)	0.190		"							
Xylene (o)	0.200		"							
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*95.1*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.138*		"	*0.120*		*115*	*80-120*			
Calibration Blank (P3L0702-CCB2)				Prepared & Analyzed: 12/07/23						
Benzene	0.120		ug/kg							
Toluene	0.320		"							
Ethylbenzene	0.180		"							
Xylene (p/m)	0.110		"							
Xylene (o)	0.100		"							
Surrogate: 4-Bromofluorobenzene	*0.138*		"	*0.120*		*115*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.115*		"	*0.120*		*96.0*	*80-120*			
Calibration Blank (P3L0702-CCB3)				Prepared: 12/07/23 Analyzed: 12/08/23						
Benzene	0.150		ug/kg							
Toluene	0.350		"							
Ethylbenzene	0.230		"							
Xylene (p/m)	0.230		"							
Xylene (o)	0.240		"							
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*95.2*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.138*		"	*0.120*		*115*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0702 - * DEFAULT PREP *** **										
Calibration Check (P3L0702-CCV1)				Prepared & Analyzed: 12/07/23						
Benzene	0.0984	0.00100	mg/kg	0.100		98.4	80-120			
Toluene	0.0937	0.00100	"	0.100		93.7	80-120			
Ethylbenzene	0.0970	0.00100	"	0.100		97.0	80-120			
Xylene (p/m)	0.202	0.00200	"	0.200		101	80-120			
Xylene (o)	0.0914	0.00100	"	0.100		91.4	80-120			
Surrogate: 1,4-Difluorobenzene	*0.115*		"	*0.120*		*96.2*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.132*		"	*0.120*		*110*	*75-125*			
Calibration Check (P3L0702-CCV2)				Prepared & Analyzed: 12/07/23						
Benzene	0.113	0.00100	mg/kg	0.100		113	80-120			
Toluene	0.107	0.00100	"	0.100		107	80-120			
Ethylbenzene	0.109	0.00100	"	0.100		109	80-120			
Xylene (p/m)	0.223	0.00200	"	0.200		111	80-120			
Xylene (o)	0.103	0.00100	"	0.100		103	80-120			
Surrogate: 1,4-Difluorobenzene	*0.117*		"	*0.120*		*97.3*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.132*		"	*0.120*		*110*	*75-125*			
Calibration Check (P3L0702-CCV3)				Prepared & Analyzed: 12/07/23						
Benzene	0.111	0.00100	mg/kg	0.100		111	80-120			
Toluene	0.106	0.00100	"	0.100		106	80-120			
Ethylbenzene	0.108	0.00100	"	0.100		108	80-120			
Xylene (p/m)	0.218	0.00200	"	0.200		109	80-120			
Xylene (o)	0.102	0.00100	"	0.100		102	80-120			
Surrogate: 1,4-Difluorobenzene	*0.116*		"	*0.120*		*96.6*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.133*		"	*0.120*		*111*	*75-125*			
Matrix Spike (P3L0702-MS1)	**Source: 3L01001-45**			Prepared & Analyzed: 12/07/23						
Benzene	0.0761	0.00103	mg/kg dry	0.103	ND	73.9	80-120			QM-05
Toluene	0.0669	0.00103	"	0.103	ND	64.9	80-120			QM-05
Ethylbenzene	0.0706	0.00103	"	0.103	ND	68.4	80-120			QM-05
Xylene (p/m)	0.141	0.00206	"	0.206	ND	68.3	80-120			QM-05
Xylene (o)	0.0622	0.00103	"	0.103	ND	60.3	80-120			QM-05
Surrogate: 1,4-Difluorobenzene	*0.118*		"	*0.124*		*95.4*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.136*		"	*0.124*		*110*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0702 - * DEFAULT PREP *** **										
Matrix Spike Dup (P3L0702-MSD1)	**Source: 3L01001-45**			Prepared & Analyzed: 12/07/23						
Benzene	0.0855	0.00103	mg/kg dry	0.103	ND	83.0	80-120	11.6	20	
Toluene	0.0768	0.00103	"	0.103	ND	74.5	80-120	13.7	20	
Ethylbenzene	0.0808	0.00103	"	0.103	ND	78.4	80-120	13.5	20	
Xylene (p/m)	0.159	0.00206	"	0.206	ND	77.3	80-120	12.4	20	
Xylene (o)	0.0706	0.00103	"	0.103	ND	68.4	80-120	12.7	20	
Surrogate: 1,4-Difluorobenzene	*0.119*		*"*	*0.124*		*96.2*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.137*		*"*	*0.124*		*111*	*80-120*			
Batch P3L0703 - * DEFAULT PREP *** **										
Blank (P3L0703-BLK1)				Prepared: 12/07/23 Analyzed: 12/08/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 1,4-Difluorobenzene	*0.114*		*"*	*0.120*		*94.8*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.137*		*"*	*0.120*		*114*	*80-120*			
LCS (P3L0703-BS1)				Prepared: 12/07/23 Analyzed: 12/08/23						
Benzene	0.0997	0.00100	mg/kg	0.100		99.7	80-120			
Toluene	0.0948	0.00100	"	0.100		94.8	80-120			
Ethylbenzene	0.103	0.00100	"	0.100		103	80-120			
Xylene (p/m)	0.199	0.00200	"	0.200		99.6	80-120			
Xylene (o)	0.0908	0.00100	"	0.100		90.8	80-120			
Surrogate: 1,4-Difluorobenzene	*0.115*		*"*	*0.120*		*96.0*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.133*		*"*	*0.120*		*110*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0703 - * DEFAULT PREP *** **										
LCS Dup (P3L0703-BSD1)				Prepared: 12/07/23 Analyzed: 12/08/23						
Benzene	0.0886	0.00100	mg/kg	0.100		88.6	80-120	11.8	20	
Toluene	0.0824	0.00100	"	0.100		82.4	80-120	14.0	20	
Ethylbenzene	0.0894	0.00100	"	0.100		89.4	80-120	14.1	20	
Xylene (p/m)	0.175	0.00200	"	0.200		87.3	80-120	13.1	20	
Xylene (o)	0.0800	0.00100	"	0.100		80.0	80-120	12.6	20	
Surrogate: 4-Bromofluorobenzene	*0.134*		"	*0.120*		*111*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.115*		"	*0.120*		*95.9*	*80-120*			
Calibration Blank (P3L0703-CCB1)				Prepared: 12/07/23 Analyzed: 12/08/23						
Benzene	0.150		ug/kg							
Toluene	0.350		"							
Ethylbenzene	0.230		"							
Xylene (p/m)	0.230		"							
Xylene (o)	0.240		"							
Surrogate: 4-Bromofluorobenzene	*0.138*		"	*0.120*		*115*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*95.2*	*80-120*			
Calibration Blank (P3L0703-CCB2)				Prepared: 12/07/23 Analyzed: 12/08/23						
Benzene	0.110		ug/kg							
Toluene	0.290		"							
Ethylbenzene	0.140		"							
Xylene (p/m)	0.200		"							
Xylene (o)	0.110		"							
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*95.3*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.138*		"	*0.120*		*115*	*80-120*			
Calibration Check (P3L0703-CCV1)				Prepared & Analyzed: 12/07/23						
Benzene	0.111	0.00100	mg/kg	0.100		111	80-120			
Toluene	0.106	0.00100	"	0.100		106	80-120			
Ethylbenzene	0.108	0.00100	"	0.100		108	80-120			
Xylene (p/m)	0.218	0.00200	"	0.200		109	80-120			
Xylene (o)	0.102	0.00100	"	0.100		102	80-120			
Surrogate: 4-Bromofluorobenzene	*0.133*		"	*0.120*		*111*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.116*		"	*0.120*		*96.6*	*75-125*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0703 - * DEFAULT PREP *** **										
Calibration Check (P3L0703-CCV2)				Prepared: 12/07/23 Analyzed: 12/08/23						
Benzene	0.112	0.00100	mg/kg	0.100		112	80-120			
Toluene	0.107	0.00100	"	0.100		107	80-120			
Ethylbenzene	0.108	0.00100	"	0.100		108	80-120			
Xylene (p/m)	0.218	0.00200	"	0.200		109	80-120			
Xylene (o)	0.103	0.00100	"	0.100		103	80-120			
Surrogate: 4-Bromofluorobenzene	*0.134*		"	*0.120*		*112*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.115*		"	*0.120*		*95.8*	*75-125*			
Calibration Check (P3L0703-CCV3)				Prepared: 12/07/23 Analyzed: 12/08/23						
Benzene	0.109	0.00100	mg/kg	0.100		109	80-120			
Toluene	0.104	0.00100	"	0.100		104	80-120			
Ethylbenzene	0.104	0.00100	"	0.100		104	80-120			
Xylene (p/m)	0.208	0.00200	"	0.200		104	80-120			
Xylene (o)	0.0988	0.00100	"	0.100		98.8	80-120			
Surrogate: 1,4-Difluorobenzene	*0.115*		"	*0.120*		*95.9*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.133*		"	*0.120*		*110*	*75-125*			
Matrix Spike (P3L0703-MS1)		**Source: 3L01001-65**		Prepared: 12/07/23 Analyzed: 12/08/23						
Benzene	0.0567	0.00104	mg/kg dry	0.104	ND	54.4	80-120			QM-05
Toluene	0.0400	0.00104	"	0.104	ND	38.4	80-120			QM-05
Ethylbenzene	0.0296	0.00104	"	0.104	ND	28.4	80-120			QM-05
Xylene (p/m)	0.0569	0.00208	"	0.208	ND	27.3	80-120			QM-05
Xylene (o)	0.0265	0.00104	"	0.104	ND	25.4	80-120			QM-05
Surrogate: 1,4-Difluorobenzene	*0.120*		"	*0.125*		*95.6*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.137*		"	*0.125*		*110*	*80-120*			
Matrix Spike Dup (P3L0703-MSD1)		**Source: 3L01001-65**		Prepared: 12/07/23 Analyzed: 12/08/23						
Benzene	0.0749	0.00104	mg/kg dry	0.104	ND	71.9	80-120	27.7	20	QM-05
Toluene	0.0632	0.00104	"	0.104	ND	60.7	80-120	45.1	20	QM-05
Ethylbenzene	0.0608	0.00104	"	0.104	ND	58.4	80-120	69.1	20	QM-05
Xylene (p/m)	0.119	0.00208	"	0.208	ND	57.2	80-120	70.7	20	QM-05
Xylene (o)	0.0520	0.00104	"	0.104	ND	49.9	80-120	64.9	20	QM-05
Surrogate: 4-Bromofluorobenzene	*0.137*		"	*0.125*		*110*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.119*		"	*0.125*		*95.4*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0804 - * DEFAULT PREP *** **										
Blank (P3L0804-BLK1)				Prepared & Analyzed: 12/08/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 4-Bromofluorobenzene	*0.138*		"	*0.120*		*115*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.113*		"	*0.120*		*94.6*	*80-120*			
LCS (P3L0804-BS1)				Prepared & Analyzed: 12/08/23						
Benzene	0.0962	0.00100	mg/kg	0.100		96.2	80-120			
Toluene	0.0967	0.00100	"	0.100		96.7	80-120			
Ethylbenzene	0.110	0.00100	"	0.100		110	80-120			
Xylene (p/m)	0.212	0.00200	"	0.200		106	80-120			
Xylene (o)	0.0983	0.00100	"	0.100		98.3	80-120			
Surrogate: 4-Bromofluorobenzene	*0.133*		"	*0.120*		*111*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*95.3*	*80-120*			
LCS Dup (P3L0804-BSD1)				Prepared & Analyzed: 12/08/23						
Benzene	0.0973	0.00100	mg/kg	0.100		97.3	80-120	1.10	20	
Toluene	0.0974	0.00100	"	0.100		97.4	80-120	0.773	20	
Ethylbenzene	0.110	0.00100	"	0.100		110	80-120	0.363	20	
Xylene (p/m)	0.213	0.00200	"	0.200		106	80-120	0.429	20	
Xylene (o)	0.0973	0.00100	"	0.100		97.3	80-120	0.961	20	
Surrogate: 4-Bromofluorobenzene	*0.134*		"	*0.120*		*111*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*95.1*	*80-120*			
Calibration Blank (P3L0804-CCB1)				Prepared & Analyzed: 12/08/23						
Benzene	0.150		ug/kg							
Toluene	0.300		"							
Ethylbenzene	0.110		"							
Xylene (p/m)	0.220		"							
Xylene (o)	0.210		"							
Surrogate: 1,4-Difluorobenzene	*0.113*		"	*0.120*		*93.9*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.137*		"	*0.120*		*114*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0804 - * DEFAULT PREP *** **										
Calibration Blank (P3L0804-CCB2)				Prepared & Analyzed: 12/08/23						
Benzene	0.100		ug/kg							
Toluene	0.250		"							
Ethylbenzene	0.120		"							
Xylene (p/m)	0.140		"							
Xylene (o)	0.140		"							
Surrogate: 4-Bromofluorobenzene	*0.138*		*"*	*0.120*		*115*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.115*		*"*	*0.120*		*95.8*	*80-120*			
Calibration Blank (P3L0804-CCB3)				Prepared: 12/08/23 Analyzed: 12/09/23						
Benzene	0.120		ug/kg							
Toluene	0.310		"							
Ethylbenzene	0.0800		"							
Xylene (p/m)	0.160		"							
Xylene (o)	0.240		"							
Surrogate: 4-Bromofluorobenzene	*0.138*		*"*	*0.120*		*115*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.115*		*"*	*0.120*		*95.6*	*80-120*			
Calibration Check (P3L0804-CCV1)				Prepared & Analyzed: 12/08/23						
Benzene	0.0967	0.00100	mg/kg	0.100		96.7	80-120			
Toluene	0.0938	0.00100	"	0.100		93.8	80-120			
Ethylbenzene	0.0974	0.00100	"	0.100		97.4	80-120			
Xylene (p/m)	0.199	0.00200	"	0.200		99.3	80-120			
Xylene (o)	0.0922	0.00100	"	0.100		92.2	80-120			
Surrogate: 4-Bromofluorobenzene	*0.133*		*"*	*0.120*		*111*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.113*		*"*	*0.120*		*94.4*	*75-125*			
Calibration Check (P3L0804-CCV2)				Prepared & Analyzed: 12/08/23						
Benzene	0.109	0.00100	mg/kg	0.100		109	80-120			
Toluene	0.102	0.00100	"	0.100		102	80-120			
Ethylbenzene	0.105	0.00100	"	0.100		105	80-120			
Xylene (p/m)	0.216	0.00200	"	0.200		108	80-120			
Xylene (o)	0.101	0.00100	"	0.100		101	80-120			
Surrogate: 1,4-Difluorobenzene	*0.117*		*"*	*0.120*		*97.8*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.132*		*"*	*0.120*		*110*	*75-125*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0804 - * DEFAULT PREP *** **										
Calibration Check (P3L0804-CCV3)				Prepared: 12/08/23 Analyzed: 12/09/23						
Benzene	0.113	0.00100	mg/kg	0.100		113	80-120			
Toluene	0.107	0.00100	"	0.100		107	80-120			
Ethylbenzene	0.110	0.00100	"	0.100		110	80-120			
Xylene (p/m)	0.223	0.00200	"	0.200		111	80-120			
Xylene (o)	0.105	0.00100	"	0.100		105	80-120			
Surrogate: 1,4-Difluorobenzene	*0.117*		"	*0.120*		*97.4*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.132*		"	*0.120*		*110*	*75-125*			
Matrix Spike (P3L0804-MS1)		**Source: 3L01002-22**		Prepared & Analyzed: 12/08/23						
Benzene	0.0874	0.00104	mg/kg dry	0.104	ND	83.9	80-120			
Toluene	0.0880	0.00104	"	0.104	ND	84.4	80-120			
Ethylbenzene	0.0832	0.00104	"	0.104	ND	79.9	80-120			QM-05
Xylene (p/m)	0.163	0.00208	"	0.208	ND	78.5	80-120			QM-05
Xylene (o)	0.0724	0.00104	"	0.104	ND	69.5	80-120			QM-05
Surrogate: 1,4-Difluorobenzene	*0.121*		"	*0.125*		*96.5*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.138*		"	*0.125*		*111*	*80-120*			
Matrix Spike Dup (P3L0804-MSD1)		**Source: 3L01002-22**		Prepared: 12/08/23 Analyzed: 12/09/23						
Benzene	0.0839	0.00104	mg/kg dry	0.104	ND	80.5	80-120	4.16	20	
Toluene	0.0827	0.00104	"	0.104	ND	79.4	80-120	6.15	20	QM-05
Ethylbenzene	0.0800	0.00104	"	0.104	ND	76.8	80-120	3.92	20	QM-05
Xylene (p/m)	0.157	0.00208	"	0.208	ND	75.3	80-120	4.08	20	QM-05
Xylene (o)	0.0693	0.00104	"	0.104	ND	66.6	80-120	4.26	20	QM-05
Surrogate: 4-Bromofluorobenzene	*0.138*		"	*0.125*		*111*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.121*		"	*0.125*		*96.8*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0303 - TX 1005										
Blank (P3L0303-BLK1)				Prepared & Analyzed: 12/03/23						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*124*		*"*	*100*		*124*	*70-130*			
Surrogate: o-Terphenyl	*70.4*		*"*	*50.0*		*141*	*70-130*			*S-GC*
LCS (P3L0303-BS1)				Prepared & Analyzed: 12/03/23						
C6-C12	1070	25.0	mg/kg	1000		107	75-125			
>C12-C28	1050	25.0	"	1000		105	75-125			
Surrogate: 1-Chlorooctane	*128*		*"*	*100*		*128*	*70-130*			
Surrogate: o-Terphenyl	*64.4*		*"*	*50.0*		*129*	*70-130*			
LCS Dup (P3L0303-BSD1)				Prepared & Analyzed: 12/03/23						
C6-C12	1100	25.0	mg/kg	1000		110	75-125	2.20	20	
>C12-C28	1090	25.0	"	1000		109	75-125	3.26	20	
Surrogate: 1-Chlorooctane	*125*		*"*	*100*		*125*	*70-130*			
Surrogate: o-Terphenyl	*65.7*		*"*	*50.0*		*131*	*70-130*			*S-GC*
Calibration Check (P3L0303-CCV1)				Prepared & Analyzed: 12/03/23						
C6-C12	473	25.0	mg/kg	500		94.7	85-115			
>C12-C28	503	25.0	"	500		101	85-115			
Surrogate: 1-Chlorooctane	*116*		*"*	*100*		*116*	*70-130*			
Surrogate: o-Terphenyl	*58.1*		*"*	*50.0*		*116*	*70-130*			
Calibration Check (P3L0303-CCV2)				Prepared & Analyzed: 12/03/23						
C6-C12	455	25.0	mg/kg	500		90.9	85-115			
>C12-C28	482	25.0	"	500		96.4	85-115			
Surrogate: 1-Chlorooctane	*111*		*"*	*100*		*111*	*70-130*			
Surrogate: o-Terphenyl	*53.4*		*"*	*50.0*		*107*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0303 - TX 1005										
Duplicate (P3L0303-DUP1)	**Source: 3L01001-02**			Prepared & Analyzed: 12/03/23						
C6-C12	ND	26.3	mg/kg dry		ND				20	
>C12-C28	ND	26.3	"		ND				20	
Surrogate: 1-Chlorooctane	*85.0*		*"*	*105*		*80.8*	*70-130*			
Surrogate: o-Terphenyl	*46.0*		*"*	*52.6*		*87.4*	*70-130*			
Batch P3L0304 - TX 1005										
Blank (P3L0304-BLK1)				Prepared: 12/03/23 Analyzed: 12/04/23						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*109*		*"*	*100*		*109*	*70-130*			
Surrogate: o-Terphenyl	*59.1*		*"*	*50.0*		*118*	*70-130*			
LCS (P3L0304-BS1)				Prepared: 12/03/23 Analyzed: 12/04/23						
C6-C12	1070	25.0	mg/kg	1000		107	75-125			
>C12-C28	1040	25.0	"	1000		104	75-125			
Surrogate: 1-Chlorooctane	*128*		*"*	*100*		*128*	*70-130*			
Surrogate: o-Terphenyl	*64.2*		*"*	*50.0*		*128*	*70-130*			
LCS Dup (P3L0304-BSD1)				Prepared: 12/03/23 Analyzed: 12/04/23						
C6-C12	903	25.0	mg/kg	1000		90.3	75-125	16.7	20	
>C12-C28	885	25.0	"	1000		88.5	75-125	16.6	20	
Surrogate: 1-Chlorooctane	*130*		*"*	*100*		*130*	*70-130*			
Surrogate: o-Terphenyl	*60.5*		*"*	*50.0*		*121*	*70-130*			
Calibration Check (P3L0304-CCV1)				Prepared & Analyzed: 12/03/23						
C6-C12	456	25.0	mg/kg	500		91.1	85-115			
>C12-C28	491	25.0	"	500		98.3	85-115			
Surrogate: 1-Chlorooctane	*112*		*"*	*100*		*112*	*70-130*			
Surrogate: o-Terphenyl	*53.9*		*"*	*50.0*		*108*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0304 - TX 1005										
Calibration Check (P3L0304-CCV2)				Prepared: 12/03/23 Analyzed: 12/04/23						
C6-C12	467	25.0	mg/kg	500		93.4	85-115			
>C12-C28	505	25.0	"	500		101	85-115			
Surrogate: 1-Chlorooctane	*115*		*"*	*100*		*115*	*70-130*			
Surrogate: o-Terphenyl	*55.5*		*"*	*50.0*		*111*	*70-130*			
Calibration Check (P3L0304-CCV3)				Prepared: 12/03/23 Analyzed: 12/04/23						
C6-C12	484	25.0	mg/kg	500		96.9	85-115			
>C12-C28	525	25.0	"	500		105	85-115			
Surrogate: 1-Chlorooctane	*117*		*"*	*100*		*117*	*70-130*			
Surrogate: o-Terphenyl	*56.6*		*"*	*50.0*		*113*	*70-130*			
Duplicate (P3L0304-DUP1)	**Source: 3L01001-22**			Prepared: 12/03/23 Analyzed: 12/04/23						
C6-C12	ND	26.6	mg/kg dry		ND				20	
>C12-C28	ND	26.6	"		ND				20	
Surrogate: 1-Chlorooctane	*95.5*		*"*	*106*		*89.8*	*70-130*			
Surrogate: o-Terphenyl	*51.9*		*"*	*53.2*		*97.5*	*70-130*			
Batch P3L0305 - TX 1005										
Blank (P3L0305-BLK1)				Prepared: 12/03/23 Analyzed: 12/04/23						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*131*		*"*	*140*		*93.2*	*70-130*			
Surrogate: o-Terphenyl	*74.4*		*"*	*70.0*		*106*	*70-130*			
LCS (P3L0305-BS1)				Prepared: 12/03/23 Analyzed: 12/04/23						
C6-C12	934	25.0	mg/kg	1000		93.4	75-125			
>C12-C28	940	25.0	"	1000		94.0	75-125			
Surrogate: 1-Chlorooctane	*128*		*"*	*100*		*128*	*70-130*			
Surrogate: o-Terphenyl	*70.6*		*"*	*50.0*		*141*	*70-130*			*S-GC*

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0305 - TX 1005										
LCS Dup (P3L0305-BSD1)				Prepared: 12/03/23 Analyzed: 12/04/23						
C6-C12	979	25.0	mg/kg	1000		97.9	75-125	4.64	20	
>C12-C28	962	25.0	"	1000		96.2	75-125	2.33	20	
Surrogate: 1-Chlorooctane	*128*		*"*	*100*		*128*	*70-130*			
Surrogate: o-Terphenyl	*72.0*		*"*	*50.0*		*144*	*70-130*			*S-GC*
Calibration Check (P3L0305-CCV1)				Prepared: 12/03/23 Analyzed: 12/04/23						
C6-C12	483	25.0	mg/kg	500		96.5	85-115			
>C12-C28	519	25.0	"	500		104	85-115			
Surrogate: 1-Chlorooctane	*123*		*"*	*100*		*123*	*70-130*			
Surrogate: o-Terphenyl	*67.8*		*"*	*50.0*		*136*	*70-130*			*S-GC*
Calibration Check (P3L0305-CCV2)				Prepared: 12/03/23 Analyzed: 12/04/23						
C6-C12	428	25.0	mg/kg	500		85.5	85-115			
>C12-C28	480	25.0	"	500		96.0	85-115			
Surrogate: 1-Chlorooctane	*123*		*"*	*100*		*123*	*70-130*			
Surrogate: o-Terphenyl	*62.9*		*"*	*50.0*		*126*	*70-130*			
Duplicate (P3L0305-DUP1)		**Source: 3L01001-42**		Prepared: 12/03/23 Analyzed: 12/04/23						
C6-C12	15.8	25.8	mg/kg dry		21.5			30.8	20	
>C12-C28	ND	25.8	"		ND				20	
Surrogate: 1-Chlorooctane	*83.6*		*"*	*103*		*81.1*	*70-130*			
Surrogate: o-Terphenyl	*48.1*		*"*	*51.5*		*93.4*	*70-130*			
Batch P3L0306 - TX 1005										
Blank (P3L0306-BLK1)				Prepared: 12/03/23 Analyzed: 12/04/23						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*102*		*"*	*100*		*102*	*70-130*			
Surrogate: o-Terphenyl	*57.7*		*"*	*50.0*		*115*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0306 - TX 1005										
LCS (P3L0306-BS1)				Prepared: 12/03/23 Analyzed: 12/04/23						
C6-C12	945	25.0	mg/kg	1000		94.5	75-125			
>C12-C28	986	25.0	"	1000		98.6	75-125			
Surrogate: 1-Chlorooctane	*105*		*"*	*100*		*105*	*70-130*			
Surrogate: o-Terphenyl	*57.0*		*"*	*50.0*		*114*	*70-130*			
LCS Dup (P3L0306-BSD1)				Prepared: 12/03/23 Analyzed: 12/04/23						
C6-C12	898	25.0	mg/kg	1000		89.8	75-125	5.11	20	
>C12-C28	972	25.0	"	1000		97.2	75-125	1.41	20	
Surrogate: 1-Chlorooctane	*130*		*"*	*100*		*130*	*70-130*			
Surrogate: o-Terphenyl	*52.1*		*"*	*50.0*		*104*	*70-130*			
Calibration Check (P3L0306-CCV1)				Prepared: 12/03/23 Analyzed: 12/04/23						
C6-C12	464	25.0	mg/kg	500		92.7	85-115			
>C12-C28	514	25.0	"	500		103	85-115			
Surrogate: 1-Chlorooctane	*124*		*"*	*100*		*124*	*70-130*			
Surrogate: o-Terphenyl	*70.9*		*"*	*50.0*		*142*	*70-130*			*S-GC*
Calibration Check (P3L0306-CCV2)				Prepared: 12/03/23 Analyzed: 12/04/23						
C6-C12	495	25.0	mg/kg	500		99.0	85-115			
>C12-C28	541	25.0	"	500		108	85-115			
Surrogate: 1-Chlorooctane	*127*		*"*	*100*		*127*	*70-130*			
Surrogate: o-Terphenyl	*72.9*		*"*	*50.0*		*146*	*70-130*			*S-GC*
Calibration Check (P3L0306-CCV3)				Prepared: 12/03/23 Analyzed: 12/04/23						
C6-C12	467	25.0	mg/kg	500		93.4	85-115			
>C12-C28	525	25.0	"	500		105	85-115			
Surrogate: 1-Chlorooctane	*124*		*"*	*100*		*124*	*70-130*			
Surrogate: o-Terphenyl	*70.3*		*"*	*50.0*		*141*	*70-130*			*S-GC*

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0306 - TX 1005										
Duplicate (P3L0306-DUP1)	**Source: 3L01001-62**			Prepared: 12/03/23 Analyzed: 12/04/23						
C6-C12	22.8	26.0	mg/kg dry		16.4			32.5	20	
>C12-C28	ND	26.0	"		ND				20	
Surrogate: 1-Chlorooctane	*87.2*		*"*	*104*		*83.7*	*70-130*			
Surrogate: o-Terphenyl	*49.7*		*"*	*52.1*		*95.3*	*70-130*			
Batch P3L0405 - TX 1005										
Blank (P3L0405-BLK1)				Prepared & Analyzed: 12/04/23						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*94.9*		*"*	*100*		*94.9*	*70-130*			
Surrogate: o-Terphenyl	*53.3*		*"*	*50.0*		*107*	*70-130*			
LCS (P3L0405-BS1)				Prepared & Analyzed: 12/04/23						
C6-C12	796	25.0	mg/kg	1000		79.6	75-125			
>C12-C28	780	25.0	"	1000		78.0	75-125			
Surrogate: 1-Chlorooctane	*107*		*"*	*100*		*107*	*70-130*			
Surrogate: o-Terphenyl	*47.6*		*"*	*50.0*		*95.2*	*70-130*			
LCS Dup (P3L0405-BSD1)				Prepared & Analyzed: 12/04/23						
C6-C12	896	25.0	mg/kg	1000		89.6	75-125	11.8	20	
>C12-C28	849	25.0	"	1000		84.9	75-125	8.46	20	
Surrogate: 1-Chlorooctane	*95.2*		*"*	*100*		*95.2*	*70-130*			
Surrogate: o-Terphenyl	*49.2*		*"*	*50.0*		*98.4*	*70-130*			
Calibration Check (P3L0405-CCV1)				Prepared & Analyzed: 12/04/23						
C6-C12	474	25.0	mg/kg	500		94.7	85-115			
>C12-C28	508	25.0	"	500		102	85-115			
Surrogate: 1-Chlorooctane	*102*		*"*	*100*		*102*	*70-130*			
Surrogate: o-Terphenyl	*50.5*		*"*	*50.0*		*101*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0405 - TX 1005										
Calibration Check (P3L0405-CCV2)				Prepared: 12/04/23 Analyzed: 12/05/23						
C6-C12	457	25.0	mg/kg	500		91.3	85-115			
>C12-C28	454	25.0	"	500		90.9	85-115			
Surrogate: 1-Chlorooctane	*98.3*		*"*	*100*		*98.3*	*70-130*			
Surrogate: o-Terphenyl	*48.6*		*"*	*50.0*		*97.1*	*70-130*			
Matrix Spike (P3L0405-MS1)		**Source: 3L01001-72**		Prepared: 12/04/23 Analyzed: 12/05/23						
C6-C12	938	26.9	mg/kg dry	1080	22.3	85.2	75-125			
>C12-C28	888	26.9	"	1080	ND	82.6	75-125			
Surrogate: 1-Chlorooctane	*110*		*"*	*108*		*102*	*70-130*			
Surrogate: o-Terphenyl	*44.6*		*"*	*53.8*		*82.9*	*70-130*			
Matrix Spike Dup (P3L0405-MSD1)		**Source: 3L01001-72**		Prepared: 12/04/23 Analyzed: 12/05/23						
C6-C12	920	26.9	mg/kg dry	1080	22.3	83.5	75-125	2.02	20	
>C12-C28	880	26.9	"	1080	ND	81.8	75-125	0.985	20	
Surrogate: 1-Chlorooctane	*113*		*"*	*108*		*105*	*70-130*			
Surrogate: o-Terphenyl	*52.1*		*"*	*53.8*		*96.8*	*70-130*			
Batch P3L0406 - TX 1005										
Blank (P3L0406-BLK1)				Prepared: 12/04/23 Analyzed: 12/05/23						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*98.3*		*"*	*100*		*98.3*	*70-130*			
Surrogate: o-Terphenyl	*54.9*		*"*	*50.0*		*110*	*70-130*			
LCS (P3L0406-BS1)				Prepared: 12/04/23 Analyzed: 12/05/23						
C6-C12	911	25.0	mg/kg	1000		91.1	75-125			
>C12-C28	857	25.0	"	1000		85.7	75-125			
Surrogate: 1-Chlorooctane	*94.6*		*"*	*100*		*94.6*	*70-130*			
Surrogate: o-Terphenyl	*52.4*		*"*	*50.0*		*105*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0406 - TX 1005										
LCS Dup (P3L0406-BSD1)				Prepared: 12/04/23 Analyzed: 12/05/23						
C6-C12	928	25.0	mg/kg	1000		92.8	75-125	1.82	20	
>C12-C28	867	25.0	"	1000		86.7	75-125	1.15	20	
Surrogate: 1-Chlorooctane	*100*		*"*	*100*		*100*	*70-130*			
Surrogate: o-Terphenyl	*56.0*		*"*	*50.0*		*112*	*70-130*			
Calibration Check (P3L0406-CCV1)				Prepared: 12/04/23 Analyzed: 12/05/23						
C6-C12	524	25.0	mg/kg	500		105	85-115			
>C12-C28	550	25.0	"	500		110	85-115			
Surrogate: 1-Chlorooctane	*110*		*"*	*100*		*110*	*70-130*			
Surrogate: o-Terphenyl	*53.2*		*"*	*50.0*		*106*	*70-130*			
Calibration Check (P3L0406-CCV2)				Prepared: 12/04/23 Analyzed: 12/05/23						
C6-C12	518	25.0	mg/kg	500		104	85-115			
>C12-C28	555	25.0	"	500		111	85-115			
Surrogate: 1-Chlorooctane	*112*		*"*	*100*		*112*	*70-130*			
Surrogate: o-Terphenyl	*55.9*		*"*	*50.0*		*112*	*70-130*			
Matrix Spike (P3L0406-MS1)		**Source: 3L01001-92**		Prepared: 12/04/23 Analyzed: 12/05/23						
C6-C12	933	26.0	mg/kg dry	1040	20.7	87.6	75-125			
>C12-C28	862	26.0	"	1040	ND	82.8	75-125			
Surrogate: 1-Chlorooctane	*97.3*		*"*	*104*		*93.4*	*70-130*			
Surrogate: o-Terphenyl	*46.8*		*"*	*52.1*		*89.9*	*70-130*			
Matrix Spike Dup (P3L0406-MSD1)		**Source: 3L01001-92**		Prepared: 12/04/23 Analyzed: 12/05/23						
C6-C12	887	26.0	mg/kg dry	1040	20.7	83.2	75-125	5.13	20	
>C12-C28	836	26.0	"	1040	ND	80.3	75-125	3.06	20	
Surrogate: 1-Chlorooctane	*106*		*"*	*104*		*102*	*70-130*			
Surrogate: o-Terphenyl	*45.2*		*"*	*52.1*		*86.8*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0108 - * DEFAULT PREP *** **										
Blank (P3L0108-BLK1)				Prepared: 12/01/23 Analyzed: 12/03/23						
Chloride	ND	1.00	mg/kg							
LCS (P3L0108-BS1)				Prepared: 12/01/23 Analyzed: 12/03/23						
Chloride	14.8		mg/kg	14.0		105	90-110			
LCS Dup (P3L0108-BSD1)				Prepared: 12/01/23 Analyzed: 12/03/23						
Chloride	14.9		mg/kg	14.0		107	90-110	1.07	10	
Calibration Check (P3L0108-CCV1)				Prepared: 12/01/23 Analyzed: 12/03/23						
Chloride	15.0		mg/kg	14.0		107	90-110			
Calibration Check (P3L0108-CCV2)				Prepared: 12/01/23 Analyzed: 12/03/23						
Chloride	18.1		mg/kg	20.0		90.6	90-110			
Matrix Spike (P3L0108-MS1)		**Source: 3K30009-11**		Prepared: 12/01/23 Analyzed: 12/03/23						
Chloride	99.7		mg/kg	100	7.77	91.9	80-120			
Matrix Spike (P3L0108-MS2)		**Source: 3L01001-06**		Prepared: 12/01/23 Analyzed: 12/03/23						
Chloride	96.5		mg/kg	100	2.21	94.3	80-120			
Matrix Spike Dup (P3L0108-MSD1)		**Source: 3K30009-11**		Prepared: 12/01/23 Analyzed: 12/03/23						
Chloride	102		mg/kg	100	7.77	93.8	80-120	1.85	20	
Matrix Spike Dup (P3L0108-MSD2)		**Source: 3L01001-06**		Prepared: 12/01/23 Analyzed: 12/03/23						
Chloride	91.4		mg/kg	100	2.21	89.2	80-120	5.39	20	
Batch P3L0307 - * DEFAULT PREP *** **										
Blank (P3L0307-BLK1)				Prepared & Analyzed: 12/03/23						
% Moisture	ND	0.1	%							

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0307 - * DEFAULT PREP *** **										
Blank (P3L0307-BLK2)				Prepared & Analyzed: 12/03/23						
% Moisture	ND	0.1	%							
Blank (P3L0307-BLK3)				Prepared & Analyzed: 12/03/23						
% Moisture	ND	0.1	%							
Blank (P3L0307-BLK4)				Prepared & Analyzed: 12/03/23						
% Moisture	ND	0.1	%							
Blank (P3L0307-BLK5)				Prepared & Analyzed: 12/03/23						
% Moisture	ND	0.1	%							
Duplicate (P3L0307-DUP1)	**Source: 3L01001-10**			Prepared & Analyzed: 12/03/23						
% Moisture	4.0	0.1	%		4.0			0.00	20	
Duplicate (P3L0307-DUP2)	**Source: 3L01001-20**			Prepared & Analyzed: 12/03/23						
% Moisture	4.0	0.1	%		4.0			0.00	20	
Duplicate (P3L0307-DUP3)	**Source: 3L01001-35**			Prepared & Analyzed: 12/03/23						
% Moisture	7.0	0.1	%		7.0			0.00	20	
Duplicate (P3L0307-DUP4)	**Source: 3L01001-45**			Prepared & Analyzed: 12/03/23						
% Moisture	3.0	0.1	%		3.0			0.00	20	
Duplicate (P3L0307-DUP5)	**Source: 3L01001-60**			Prepared & Analyzed: 12/03/23						
% Moisture	2.0	0.1	%		2.0			0.00	20	
Duplicate (P3L0307-DUP6)	**Source: 3L01001-70**			Prepared & Analyzed: 12/03/23						
% Moisture	7.0	0.1	%		7.0			0.00	20	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0307 - * DEFAULT PREP *** **										
Duplicate (P3L0307-DUP7)		**Source: 3L01001-85**		Prepared & Analyzed: 12/03/23						
% Moisture	5.0	0.1	%		5.0			0.00	20	
Duplicate (P3L0307-DUP8)		**Source: 3L01002-03**		Prepared & Analyzed: 12/03/23						
% Moisture	3.0	0.1	%		3.0			0.00	20	
Duplicate (P3L0307-DUP9)		**Source: 3L01002-18**		Prepared & Analyzed: 12/03/23						
% Moisture	5.0	0.1	%		5.0			0.00	20	
Duplicate (P3L0307-DUPA)		**Source: 3L01002-28**		Prepared & Analyzed: 12/03/23						
% Moisture	4.0	0.1	%		4.0			0.00	20	
Batch P3L0308 - * DEFAULT PREP *** **										
LCS (P3L0308-BS1)				Prepared & Analyzed: 12/03/23						
Chloride	16.3		mg/kg	16.0		102	90-110			
LCS Dup (P3L0308-BSD1)				Prepared & Analyzed: 12/03/23						
Chloride	15.9		mg/kg	16.0		99.3	90-110	2.77	10	
Calibration Check (P3L0308-CCV1)				Prepared & Analyzed: 12/03/23						
Chloride	17.8		mg/kg	18.0		99.2	90-110			
Calibration Check (P3L0308-CCV2)				Prepared: 12/03/23 Analyzed: 12/04/23						
Chloride	20.3		mg/kg	20.0		102	90-110			
Matrix Spike (P3L0308-MS1)		**Source: 3L01001-16**		Prepared: 12/03/23 Analyzed: 12/04/23						
Chloride	94.2		mg/kg	100	1.09	93.2	80-120			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0308 - * DEFAULT PREP *** **										
Matrix Spike (P3L0308-MS2)	**Source: 3L01001-26**			Prepared: 12/03/23 Analyzed: 12/04/23						
Chloride	96.3		mg/kg	100	1.74	94.6	80-120			
Matrix Spike Dup (P3L0308-MSD1)	**Source: 3L01001-16**			Prepared: 12/03/23 Analyzed: 12/04/23						
Chloride	108		mg/kg	100	1.09	107	80-120	13.8	20	
Matrix Spike Dup (P3L0308-MSD2)	**Source: 3L01001-26**			Prepared: 12/03/23 Analyzed: 12/04/23						
Chloride	108		mg/kg	100	1.74	106	80-120	11.5	20	
Batch P3L0404 - * DEFAULT PREP *** **										
LCS (P3L0404-BS1)				Prepared & Analyzed: 12/04/23						
Chloride	19.5		mg/kg	20.0		97.4	90-110			
LCS Dup (P3L0404-BSD1)				Prepared: 12/04/23 Analyzed: 12/05/23						
Chloride	20.1		mg/kg	20.0		100	90-110	2.92	10	
Calibration Check (P3L0404-CCV1)				Prepared & Analyzed: 12/04/23						
Chloride	20.0		mg/kg	20.0		100	90-110			
Calibration Check (P3L0404-CCV2)				Prepared: 12/04/23 Analyzed: 12/05/23						
Chloride	20.2		mg/kg	20.0		101	90-110			
Matrix Spike (P3L0404-MS1)	**Source: 3L01001-36**			Prepared & Analyzed: 12/04/23						
Chloride	104		mg/kg	100	0.586	104	80-120			
Matrix Spike (P3L0404-MS2)	**Source: 3L01001-46**			Prepared & Analyzed: 12/04/23						
Chloride	115		mg/kg	100	0.314	114	80-120			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0404 - * DEFAULT PREP *** **										
Matrix Spike Dup (P3L0404-MSD1)	**Source: 3L01001-36**			Prepared & Analyzed: 12/04/23						
Chloride	93.7		mg/kg	100	0.586	93.1	80-120	10.8	20	
Matrix Spike Dup (P3L0404-MSD2)	**Source: 3L01001-46**			Prepared & Analyzed: 12/04/23						
Chloride	103		mg/kg	100	0.314	103	80-120	10.9	20	
Batch P3L0413 - * DEFAULT PREP *** **										
LCS (P3L0413-BS1)				Prepared: 12/04/23 Analyzed: 12/05/23						
Chloride	21.7		mg/kg	20.0		109	90-110			
LCS Dup (P3L0413-BSD1)				Prepared: 12/04/23 Analyzed: 12/05/23						
Chloride	19.4		mg/kg	20.0		97.1	90-110	11.2	10	
Calibration Check (P3L0413-CCV1)				Prepared: 12/04/23 Analyzed: 12/05/23						
Chloride	18.7		mg/kg	18.0		104	90-110			
Calibration Check (P3L0413-CCV2)				Prepared: 12/04/23 Analyzed: 12/05/23						
Chloride	23.2		mg/kg	24.0		96.6	90-110			
Matrix Spike (P3L0413-MS1)	**Source: 3L01009-27**			Prepared: 12/04/23 Analyzed: 12/05/23						
Chloride	159		mg/kg	100	45.2	114	80-120			
Matrix Spike (P3L0413-MS2)	**Source: 3L01001-58**			Prepared: 12/04/23 Analyzed: 12/05/23						
Chloride	122		mg/kg	100	1.02	121	80-120			QM-05
Matrix Spike Dup (P3L0413-MSD1)	**Source: 3L01009-27**			Prepared: 12/04/23 Analyzed: 12/05/23						
Chloride	156		mg/kg	100	45.2	110	80-120	1.97	20	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0413 - * DEFAULT PREP *** **										
Matrix Spike Dup (P3L0413-MSD2)	**Source: 3L01001-58**			Prepared: 12/04/23 Analyzed: 12/05/23						
Chloride	111		mg/kg	100	1.02	110	80-120	8.85	20	
Batch P3L0506 - * DEFAULT PREP *** **										
Blank (P3L0506-BLK1)				Prepared: 12/05/23 Analyzed: 12/08/23						
Chloride	ND	1.00	mg/kg							
LCS (P3L0506-BS1)				Prepared: 12/05/23 Analyzed: 12/07/23						
Chloride	19.4		mg/kg	20.0		97.0	90-110			
LCS Dup (P3L0506-BSD1)				Prepared: 12/05/23 Analyzed: 12/07/23						
Chloride	19.8		mg/kg	20.0		99.0	90-110	1.99	10	
Calibration Check (P3L0506-CCV1)				Prepared: 12/05/23 Analyzed: 12/07/23						
Chloride	20.0		mg/kg	20.0		100	90-110			
Calibration Check (P3L0506-CCV2)				Prepared: 12/05/23 Analyzed: 12/07/23						
Chloride	19.9		mg/kg	20.0		99.5	90-110			
Matrix Spike (P3L0506-MS1)	**Source: 3L01001-68**			Prepared: 12/05/23 Analyzed: 12/07/23						
Chloride	102		mg/kg	100	1.80	101	80-120			
Matrix Spike (P3L0506-MS2)	**Source: 3L01001-78**			Prepared: 12/05/23 Analyzed: 12/07/23						
Chloride	111		mg/kg	100	0.833	110	80-120			
Matrix Spike Dup (P3L0506-MSD1)	**Source: 3L01001-68**			Prepared: 12/05/23 Analyzed: 12/07/23						
Chloride	107		mg/kg	100	1.80	105	80-120	3.95	20	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0506 - * DEFAULT PREP *** **										
Matrix Spike Dup (P3L0506-MSD2)	**Source: 3L01001-78**			Prepared: 12/05/23 Analyzed: 12/07/23						
Chloride	108		mg/kg	100	0.833	107	80-120	2.50	20	
Batch P3L0508 - * DEFAULT PREP *** **										
Blank (P3L0508-BLK1)				Prepared: 12/05/23 Analyzed: 12/06/23						
Chloride	ND	1.00	mg/kg							
LCS (P3L0508-BS1)				Prepared & Analyzed: 12/05/23						
Chloride	18.7		mg/kg	20.0		93.4	90-110			
Calibration Check (P3L0508-CCV1)				Prepared & Analyzed: 12/05/23						
Chloride	19.1		mg/kg	20.0		95.5	90-110			
Calibration Check (P3L0508-CCV2)				Prepared: 12/05/23 Analyzed: 12/06/23						
Chloride	20.9		mg/kg	20.0		104	90-110			
Matrix Spike (P3L0508-MS1)	**Source: 3L01001-88**			Prepared & Analyzed: 12/05/23						
Chloride	114		mg/kg	100	0.561	113	80-120			
Matrix Spike Dup (P3L0508-MSD1)	**Source: 3L01001-88**			Prepared & Analyzed: 12/05/23						
Chloride	104		mg/kg	100	0.561	104	80-120	8.87	20	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Notes and Definitions

S-GC	Surrogate recovery outside of control limits. The data was accepted based on valid recovery of the remaining surrogate.
ROI	Received on Ice
QM-05	The spike recovery was outside acceptance limits for the MS and/or MSD due to matrix interference. The LCS and/or LCSD were within acceptance limits showing that the laboratory is in control and the data is acceptable.
BULK	Samples received in Bulk soil containers may be biased low in the nC6-C12 TPH Range
DET	Analyte DETECTED
ND	Analyte NOT DETECTED at or above the reporting limit
NR	Not Reported
dry	Sample results reported on a dry weight basis
RPD	Relative Percent Difference
LCS	Laboratory Control Spike
MS	Matrix Spike
Dup	Duplicate

Report Approved By: Brent Barron Date: 12/18/2023

Brent Barron, Laboratory Director/Technical Director

This material is intended only for the use of the individual (s) or entity to whom it is addressed, and may contain information that is privileged and confidential.

If you have received this material in error, please notify us immediately at 432-686-7235.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Page 410 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey Fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: Midland TX 79705
Telephone No: 432-557-0934 **Fax No:** _____
Sampler Signature: Jose Bellos **e-mail:** Jamey@Tellusservices.com

Project Name: Jalapeño
Project #: COEV # 11845
Project Loc: Lea CO, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES

(lab use only) **ORDER #:** 3L01001

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total # of Containers	Preservation & # of Containers: Ice	HNO3	HCl	H2SO4	NaOH	Na2S2O3	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge GW=Groundwater S=Soil/Solid NP=Non-Potable Specify Other	Analyze For: TPH: TX 1005 TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA-8021	TRH - EPA 8015	Chloride-EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
1	BH-189 @ 1.5	1.5	1.5	11-29-23	10:58		1	X								S				X	X	X		
2	BH-190 @ 1.5	1.5	1.5	11-29-23	11:03		1	X								S				X	X	X		
3	BH-191 @ 1.5	1.5	1.5	11-29-23	11:09		1	X								S				X	X	X		
4	BH-192 @ 1.5	1.5	1.5	11-29-23	11:10		1	X								S				X	X	X		

Special Instructions: Report TPH-in-C6-C12 / C12-C28 / C28-C35 fractions as well as total TPH same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL: Jana Mc	11/30/23	16:34

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N
by Sampler/Client Rep. ?	Y	N

by Courier? UPS DHL FedEx Lone Star

Temperature Upon Receipt: CF 0.3
Received: 10.0 °C Thermometer:
Adjusted: °C Factor:

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

Page 411 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey Fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: Midland TX 79705
Telephone No: 432-557-0934 **Fax No:** _____
Sampler Signature: Jose Bellpc

Project Name: Jalapeño
Project #: CDEV-#11845
Project Loc: Lea CO, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES
e-mail: Jamey@Tellusservices.com

(lab use only) **ORDER #:** 3L01001

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total # of Containers	Preservation & # of Containers: Ice	HNO3	HCl	H2SO4	NaOH	Na2S2O3	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge GW = Groundwater S=Soil/Solid NP=Non-Potable Specify Other	Analyze For: TCLP: TPH: TX 1005	TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX-EPA 8021	TPH-EPA-8015	Chlorides-EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
5	BH-179@1.5	1.5	1.5	11-29-23	9:58		1	X								S				X	X	X		
6	BH-180@1.5	1.5	1.5	11-29-23	10:21		1	X								S				X	X	X		
7	BH-181@1.5	1.5	1.5	11-29-23	10:25		1	X								S				X	X	X		
8	BH-182@1.5	1.5	1.5	11-29-23	10:27		1	X								S				X	X	X		
9	BH-183@1.5	1.5	1.5	11-29-23	10:31		1	X								S				X	X	X		
10	BH-184@1.5	1.5	1.5	11-29-23	10:42		1	X								S				X	X	X		
11	BH-185@1.5	1.5	1.5	11-29-23	10:43		1	X								S				X	X	X		
12	BH-186@1.5	1.5	1.5	11-29-23	10:48		1	X								S				X	X	X		
13	BH-187@1.5	1.5	1.5	11-29-23	10:51		1	X								S				X	X	X		
14	BH-188@1.5	1.5	1.5	11-29-23	10:55		1	X								S				X	X	X		

Special Instructions: Report TPH in - C6-C12 > C12-C28 > C28-C35 fractions as well as Total TPH

Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL:	Date	Time
				11/30/23	16:34

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N
by Sampler/Client Rep. ?	Y	N

by Courier? UPS DHL FedEx Lone Star

Temperature Upon Receipt:
Received: 10.0 °C Thermometer: CF
Adjusted: °C Factor: 1.3

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

Page 412 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey Fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: Midland TX 79705
Telephone No: 432-557-0934 **Fax No:** _____
Sampler Signature: Jose Bellor
e-mail: Jamey@Tellusservices.com

Project Name: Jalapeño
Project #: CDEU-11845
Project Loc: LEA, CO, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES

(lab use only)
ORDER #: 3L01001

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total # of Containers	Preservation & # of Containers: Ice	HNO3	HCl	H2SO4	NaOH	Na2S2O3	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge GW = Groundwater S=Soil/Solid NP=Non-Potable Specify Other	Analyze For: TCLP: TPH: TX 1005	TOTAL: TPH: TX 1005	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX-8021	TPH-8015	Chlorides-EPA300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
15	BH-161@ 1.5	1.5	1.5	11-29-23	8:54		1									S					X	X	X		
16	BH-162@ 1.5				8:57																				
17	BH-163@ 1.5				8:59																				
18	BH-164@ 1.5				9:02																				
19	BH-165@ 1.5				9:07																				
20	BH-166@ 1.5				9:11																				
21	BH-167@ 1.5				9:14																				
22	BH-168@ 1.5				9:17																				

Special Instructions:

Relinquished by:	Date	Time	Received by:	Date	Time
Jose Bellor					
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL:	Date	Time
			Jan Mc	11/30/23	16:34

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N
by Sampler/Client Rep. ?	Y	N

by Courier? UPS DHL FedEx Lone Star

Temperature Upon Receipt:
Received: 10.0 °C Thermometer: CF0
Adjusted: 10.0 °C Factor: 1.3

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21 Page 3 of 13

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey Fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: Midland TX 79705
Telephone No: 432 557-0934 **Fax No:** _____
Sampler Signature: Jose Belloc
e-mail: Jamey@Tellusservices.com

Project Name: Jalapeño
Project #: CDEV #11845
Project Loc: Eddy CO, NM
PO #: _____
Report Format: ☒ Standard ☐ TRRP ☐ NPDES

(lab use only) **ORDER #:** 3L01001

Analyze For: TCLP: / TOTAL:

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total # of Containers	Preservation & # of Containers: Ice	HNO3	HCl	H2SO4	NaOH	Na2S2O3	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge GW = Groundwater S=Soil/Solid NP=Non-Potable Specify Other	TPH: TX 1005 TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX - EPA 8021	TPH - EPA 8015	Chlorides EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
23	BH-169@1.5	1.5	1.5	11-29-23	9:21		1	X								S				X	X	X		
24	BH-170@1.5	1.5	1.5	11-29-23	9:23		1	X								S				X	X	X		
25	BH-171@1.5	1.5	1.5	11-29-23	9:27		1	X								S				X	X	X		
26	BH-172@1.5	1.5	1.5	11-29-23	9:39		1	X								S				X	X	X		
27	BH-173@1.5	1.5	1.5	11-29-23	9:41		1	X								S				X	X	X		
28	BH-174@1.5	1.5	1.5	11-29-23	9:44		1	X								S				X	X	X		
29	BH-175@1.5	1.5	1.5	11-29-23	9:45		1	X								S				X	X	X		
30	BH-176@1.5	1.5	1.5	11-29-23	9:48		1	X								S				X	X	X		
31	BH-177@1.5	1.5	1.5	11-29-23	9:51		1	X								S				X	X	X		
32	BH-178@1.5	1.5	1.5	11-29-23	9:55		1	X								S				X	X	X		

Special Instructions: Report TPH - in - C6-C12, > C12-C28 > C28-C35 fractions as well as total TPH

	Date	Time		Date	Time
Relinquished by:			Received by:		
Relinquished by:			Received by:		
Relinquished by:			Received by PBEL:	11/30/23	16:34

Laboratory Comments:
Sample Containers Intact? Y N
VOCs Free of Headspace? Y N
Labels on container(s) Y N
Custody seals on container(s) Y N
Custody seals on cooler(s) Y N
Sample Hand Delivered Y N
by Sampler/Client Rep. ?
by Courier? UPS DHL FedEx Lone Star
Temperature Upon Receipt:
Received: 10.0 °C Thermometer: CF0
Adjusted: °C Factor: 1.0

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey Fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934 **Fax No:** _____
Sampler Signature: Jose Bello
Project Name: Jalapeño
Project #: CDEV-11845
Project Loc: Lea Co, NM
PO #: _____
Report Format: ☒ Standard ☐ TRRP ☐ NPDES
e-mail: Jamey@Tellusservices.com

(lab use only) ORDER #: 3L01001

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total # of Containers	Preservation & # of Containers: Ice	HNO3	HCl	H2SO4	NaOH	Na2S2O3	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge GW=Groundwater S=Soil/Solid NP=Non-Potable Specify Other	Analyze For: TCLP: TPH: TX 1005	TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX 8021	TPH TX 1005	Chlorides 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
33	BH-151@1.5	1.5	1.5	11-28-23	11:33		1	Y								S				X	X	Y		
34	BH-152@1.5			11-29-23	8:29		1	Y																
35	BH-153@1.5				8:32																			
36	BH-154@1.5				8:33																			
37	BH-155@1.5				8:35																			
38	BH-156@1.5				8:36																			
39	BH-157@1.5				8:40																			
40	BH-158@1.5				8:48																			
41	BH-159@1.5				8:50																			
42	BH-160@1.5				8:51		1	Y																

Special Instructions:

Relinquished by:	Date	Time	Received by:	Date	Time
Jose Bello					
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL: Sara Mc	11/30/23	16:32

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N
by Sampler/Client Rep. ?	Y	N

by Courier? UPS DHL FedEx Lone Star

Temperature Upon Receipt:
Received: 10.0 °C Thermometor: CF3
Adjusted: °C Factor: L3

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21 Page 4 of 5 13

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

Page 415 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey Fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: Midland TX 79705
Telephone No: 432 557-0934 **Fax No:** _____
Sampler Signature: JoseBello **e-mail:** Jamey@Tellusservices.com

Project Name: Jalapeño
Project #: COEV #11845
Project Loc: Lea CO, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES

(lab use only) **ORDER #:** 3L01001

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total #. of Containers	Preservation & # of Containers: Ice	HNO3	HCl	H2SO4	NaOH	Na2S2O3	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge GW = Groundwater S=Soil/Solid NP=Non-Potable Specify Other	Analyze For: TCLP: TPH: TX 1005	TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX 8021B/5030	TPH 8015	Chlorides 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
43	BH-141@1.5	1.5	1.5	11-28-23	11:03		X	Y								S				X	Y	Y		
44	BH-142@1.5				11:04																			
45	BH-143@1.5				11:06																			
46	BH-144@1.5				11:08																			
47	BH-145@1.5				11:13																			
48	BH-146@1.5				11:17																			
49	BH-147@1.5				11:20																			
50	BH-148@1.5				11:22																			
51	BH-149@1.5				11:27																			
52	BH-150@1.5				11:31																			

Special Instructions:

Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL: Sara Mc	11/30/23	16:34

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N

by Sampler/Client Rep. ? by Courier? UPS DHL FedEx Lone Star

Temperature Upon Receipt: Received: 10.0 °C Adjusted: °C Thermometer: CF0 Factor: L3

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

Page 416 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST L: CH: W:

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey Fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: Midland TX 79705
Telephone No: 432-557-0934
Fax No:
Sampler Signature: Jose Bellac
e-mail: Jamey@Tellusservices.com

Project Name: Jalapeño
Project #: CDEV # 11845
Project Loc: LEA, CO, NM
PO #:
Report Format: ☐ Standard ☐ TRRP ☐ NPDES

(lab use only) ORDER #: 3L01001

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total # of Containers	Preservation & # of Containers: Ice	HNO3	HCl	H2SO4	NaOH	Na2S2O3	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge / GW=Groundwater S=Soil/Solid / NP=Non-Potable Specify Other	Analyze For: TCLP: TPH: TX 1005	TX 1006	Anions (Cl, SO4, Alkalinity)	TOTAL: BTEX 8021B/5030 or BTEX 8260	BTEX-EPA 8021	TPH-Extended 8015	Chlorides EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
83	BH-131@1.5	1.5	1.5	11-28-23	10:23	X	X	X								S				X	X	X			
84	BH-132@1.5				10:27																				
85	BH-133@1.5				10:30																				
86	BH-134@1.5				10:33																				
87	BH-135@1.5				10:37																				
88	BH-136@1.5				10:38																				
89	BH-137@1.5				10:45																				
90	BH-138@1.5				10:50																				
91	BH-139@1.5				10:53																				
92	BH-140@1.3	↓	↓	↓	10:56	↓	↓	↓								↓				↓	↓	↓			

Special Instructions:

Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL: Lara Mc	11/30/23	16:34

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N
by Sampler/Client Rep. ?	Y	N

by Courier? UPS DHL FedEx Lone Star

Temperature Upon Receipt: CF 0
Received: 10.0 °C Thermometor:
Adjusted: °C Factor: 1.3

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21 Page 7 of 13

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

Page 417 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey Fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934
Fax No:
Sampler Signature: Jose Belloc
e-mail: Jamey@Tellusservices.com

Project Name: Jalapeño
Project #: COEV #11845
Project Loc: Lea Co, NM
PO #:
Report Format: ☐ Standard ☐ TRRP ☐ NPDES

(lab use only) ORDER #: 3L01001

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total #. of Containers	Preservation & # of Containers: Ice	HNO3	HCl	H2SO4	NaOH	Na2S2O3	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge GW=Groundwater S=Soil/Solid NP=Non-Potable Specify Other	Analyze For: TCLP: TPH: TX 1005 TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA 8021	TPH EPA 8015	Chloride EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
03	BH-121 @ 1.5	1.5	1.5	11-28-23	9:50		1	X								S				X	X	X		X
04	BH-122 @ 1.5	1.5	1.5	11-28-23	9:52		1	X								S								
05	BH-123 @ 1.5	1.5	1.5	11-28-23	9:53											S								
06	BH-124 @ 1.5	1.5	1.5	11-28-23	9:55											S								
07	BH-125 @ 1.5	1.5	1.5	11-28-23	9:58											S								
08	BH-126 @ 1.5	1.5	1.5	11-28-23	10:04											S								
09	BH-127 @ 1.5	1.5	1.5	11-28-23	10:07											S								
10	BH-128 @ 1.5	1.5	1.5	11-28-23	10:09											S								
11	BH-129 @ 1.5	1.5	1.5	11-28-23	10:13											S								
12	BH-130 @ 1.5	1.5	1.5	11-28-23	10:17											S								

Special Instructions:

Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL:	Date	Time
				11/30/23	16:31

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N
by Sampler/Client Rep. ?	Y	N

by Courier? UPS DHL FedEx Lone Star

Temperature Upon Receipt: CF0
Received: 10.0 °C Thermometer: 13
Adjusted: °C Factor:

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

Page 418 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey Fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: Midland TX 79705
Telephone No: 432-557-0934 **Fax No:** _____
Sampler Signature: Jose Bellog
e-mail: Jamey@Tellusservices.com

Project Name: Jalapeño
Project #: CDEV #11845
Project Loc: Lea Co, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES

(lab use only) **ORDER #:** 3L01001

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total # of Containers	Preservation & # of Containers: Ice	HNO_3	HCl	H_2SO_4	NaOH	$Na_2S_2O_3$	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge GW = Groundwater S=Soil/Solid NP=Non-Potable Specify Other	Analyze For: TCLP: TPH: TX 1005 TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	8021	TX1005/8015	Chloride-4500	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
73	BH-120@1.5	1.5	1.5	11-28-23	9:45		1	1								5				X	X	X		
74	BH-119@1.5				9:43																			
75	BH-118@1.5				9:41																			
76	BH-117@1.5				9:38																			
77	BH-116@1.5				9:34																			
78	BH-115@1.5				9:31																			
79	BH-114@1.5				9:28																			
80	BH-113@1.5				9:25																			
81	BH-112@1.5				9:23																			
82	BH-111@1.5				9:20																			

Special Instructions:

Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL:	Date	Time
				11/30/23	16:34

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N
by Sampler/Client Rep. ?	Y	N

by Courier? UPS DHL FedEx Lone Star

Temperature Upon Receipt: CF0 L3
Received: 10.0 °C Thermometer:
Adjusted: °C Factor:

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21 Page 4 of 13

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

Page 419 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST L: CH: W:

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey Fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934
Fax No:
Sampler Signature: Jose Belloc
e-mail: Jamey@Tellusservices.com

Project Name: Jalapeño
Project #: CDEV #11845
Project Loc: Lea CO, NM
PO #:
Report Format: ☐ Standard ☐ TRRP ☐ NPDES

(lab use only) ORDER #: 3L01001

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total #. of Containers	Preservation & # of Containers: Ice	HNO3	HCl	H2SO4	NaOH	Na2S2O3	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge	GW = Groundwater S=Soil/Solid	NP=Non-Potable Specify Other	Analyze For: TPH: TX 1005 TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX 8021	TPH TX1005	Chlorides EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
83	BH-110@ 1.5	1.5	1.5	11-28-23	9:17		1	X								S						X	Y	Y		
84	BH-109@ 1.5	1.5	1.5	11-28-23	9:14		1	Y																		
85	BH-108@ 1.5				9:11																					
86	BH-107@ 1.5				9:07																					
87	BH-106@ 1.5				8:59																					
88	BH-105@ 1.5				8:56																					
89	BH-104@ 1.5				8:54																					
90	BH-103@ 1.5				8:51																					
91	BH-102@ 1.5				8:47																					
92	BH-101@ 1.5				8:44																					

Special Instructions:

Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL:	11/30/23	1637

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N
by Sampler/Client Rep. ?		
by Courier? UPS DHL FedEx Lone Star		

Temperature Upon Receipt:
Received: 10.0 °C Thermometer: CF0
Adjusted: °C Factor: L3

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

PERMIAN BASIN
ENVIRONMENTAL LAB, LP
1400 Rankin Hwy
Midland, TX 79701

PBELAB

Analytical Report

Prepared for:

Jamey Fowler

Tellus Consulting, LLC

4000 North Big Spring Street Suite 109

Midland, TX 79705

Project: Jalapeno

Project Number: CDEV #11845

Location: Lea County, NM

Lab Order Number: 3L01002

NELAP ACCREDITED TNI LABORATORY

Current Certification

Report Date: 12/18/23

Tellus Consulting, LLC
4000 North Big Spring Street Suite 109
Midland TX, 79705

Project: Jalapeno
Project Number: CDEV #11845
Project Manager: Jamey Fowler

ANALYTICAL REPORT FOR SAMPLES

Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
BH-100 @ 1.5	3L01002-01	Soil	11/28/23 08:39	11-30-2023 16:34
BH-99 @ 1.5	3L01002-02	Soil	11/28/23 08:39	11-30-2023 16:34
BH-98 @ 1.5	3L01002-03	Soil	11/28/23 08:33	11-30-2023 16:34
BH-97 @ 1.5	3L01002-04	Soil	11/28/23 08:27	11-30-2023 16:34
BH-96 @ 1.5	3L01002-05	Soil	11/27/23 10:15	11-30-2023 16:34
BH-95 @ 1.5	3L01002-06	Soil	11/27/23 10:12	11-30-2023 16:34
BH-94 @ 1.5	3L01002-07	Soil	11/27/23 10:11	11-30-2023 16:34
BH-93 @ 1.5	3L01002-08	Soil	11/27/23 10:08	11-30-2023 16:34
BH-92 @ 1.5	3L01002-09	Soil	11/27/23 10:05	11-30-2023 16:34
BH-91 @ 1.5	3L01002-10	Soil	11/27/23 10:03	11-30-2023 16:34
BH-90 @ 1.5	3L01002-11	Soil	11/27/23 09:58	11-30-2023 16:34
BH-89 @ 1.5	3L01002-12	Soil	11/27/23 09:54	11-30-2023 16:34
BH-88 @ 1.5	3L01002-13	Soil	11/27/23 09:51	11-30-2023 16:34
BH-87 @ 1.5	3L01002-14	Soil	11/27/23 09:48	11-30-2023 16:34
BH-86 @ 1.5	3L01002-15	Soil	11/27/23 09:45	11-30-2023 16:34
BH-85 @ 1.5	3L01002-16	Soil	11/27/23 09:43	11-30-2023 16:34
BH-84 @ 1.5	3L01002-17	Soil	11/27/23 09:42	11-30-2023 16:34
BH-83 @ 1.5	3L01002-18	Soil	11/27/23 09:41	11-30-2023 16:34
BH-82 @ 1.5	3L01002-19	Soil	11/27/23 09:37	11-30-2023 16:34
BH-81 @ 1.5	3L01002-20	Soil	11/27/23 09:32	11-30-2023 16:34
BH-80 @ 1.5	3L01002-21	Soil	11/27/23 09:29	11-30-2023 16:34
BH-79 @ 1.5	3L01002-22	Soil	11/27/23 09:27	11-30-2023 16:34
BH-78 @ 1.5	3L01002-23	Soil	11/27/23 09:24	11-30-2023 16:34
BH-77 @ 1.5	3L01002-24	Soil	11/27/23 09:23	11-30-2023 16:34
BH-76 @ 1.5	3L01002-25	Soil	11/27/23 09:21	11-30-2023 16:34
BH-75 @ 1.5	3L01002-26	Soil	11/27/23 09:18	11-30-2023 16:34
BH-74 @ 1.5	3L01002-27	Soil	11/27/23 09:17	11-30-2023 16:34
BH-73 @ 1.5	3L01002-28	Soil	11/27/23 09:16	11-30-2023 16:34
BH-72 @ 1.5	3L01002-29	Soil	11/27/23 09:14	11-30-2023 16:34
BH-71 @ 1.5	3L01002-30	Soil	11/27/23 09:11	11-30-2023 16:34

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-100 @ 1.5

3L01002-01 (Soil)

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
Permian Basin Environmental Lab, L.P.									
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 19:31	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 19:31	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 19:31	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 19:31	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 19:31	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0504*	*12/05/23 08:58*	*12/05/23 19:31*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.7 %*	*80-120*		*P3L0504*	*12/05/23 08:58*	*12/05/23 19:31*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/05/23 08:58	12/05/23 19:31	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/05/23 08:58	12/05/23 19:31	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*87.7 %*	*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*93.4 %*	*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/04/23 14:27	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**107**	1.03	mg/kg dry	1	P3L0508	12/05/23 12:53	12/05/23 22:54	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-99 @ 1.5

3L01002-02 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 19:56	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 19:56	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 19:56	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 19:56	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 19:56	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.8 %*	*80-120*		*P3L0504*	*12/05/23 08:58*	*12/05/23 19:56*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0504*	*12/05/23 08:58*	*12/05/23 19:56*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/05/23 08:58	12/05/23 19:56	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/05/23 08:58	12/05/23 19:56	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*85.3 %*	*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*93.8 %*	*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/04/23 14:27	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**105**	1.04	mg/kg dry	1	P3L0508	12/05/23 12:53	12/05/23 23:09	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-98 @ 1.5

3L01002-03 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 20:20	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 20:20	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 20:20	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 20:20	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 20:20	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0504*	*12/05/23 08:58*	*12/05/23 20:20*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.6 %*	*80-120*		*P3L0504*	*12/05/23 08:58*	*12/05/23 20:20*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/05/23 08:58	12/05/23 20:20	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/05/23 08:58	12/05/23 20:20	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*84.6 %*	*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*92.4 %*	*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/04/23 14:27	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**39.4**	1.03	mg/kg dry	1	P3L0508	12/05/23 12:53	12/05/23 23:23	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-97 @ 1.5

3L01002-04 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 20:44	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 20:44	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 20:44	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 20:44	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 20:44	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0504*	*12/05/23 08:58*	*12/05/23 20:44*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.0 %*	*80-120*		*P3L0504*	*12/05/23 08:58*	*12/05/23 20:44*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/05/23 08:58	12/05/23 20:44	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/05/23 08:58	12/05/23 20:44	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*86.7 %*	*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*93.5 %*	*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/04/23 14:27	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**33.2**	1.04	mg/kg dry	1	P3L0508	12/05/23 12:53	12/05/23 23:39	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-96 @ 1.5

3L01002-05 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 21:09	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 21:09	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 21:09	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 21:09	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0504	12/05/23 08:58	12/05/23 21:09	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.7 %*	*80-120*		*P3L0504*	*12/05/23 08:58*	*12/05/23 21:09*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0504*	*12/05/23 08:58*	*12/05/23 21:09*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/05/23 08:58	12/05/23 21:09	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/05/23 08:58	12/05/23 21:09	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*84.6 %*	*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*92.2 %*	*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/04/23 14:27	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**296**	1.04	mg/kg dry	1	P3L0508	12/05/23 12:53	12/05/23 23:53	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-95 @ 1.5

3L01002-06 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 14:58	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 14:58	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 14:58	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 14:58	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 14:58	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*111 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 14:58*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.4 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 14:58*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 14:58	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 14:58	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*79.1 %*	*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*88.1 %*	*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/04/23 14:27	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**213**	1.03	mg/kg dry	1	P3L0508	12/05/23 12:53	12/06/23 00:36	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-94 @ 1.5

3L01002-07 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00108	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 15:22	EPA 8021B	
Toluene	ND	0.00108	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 15:22	EPA 8021B	
Ethylbenzene	ND	0.00108	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 15:22	EPA 8021B	
Xylene (p/m)	ND	0.00215	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 15:22	EPA 8021B	
Xylene (o)	ND	0.00108	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 15:22	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*112 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 15:22*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.8 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 15:22*	*EPA 8021B*	
Xylenes (total)	ND	0.00215	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 15:22	EPA 8021B	
Total BTEX	ND	0.00108	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 15:22	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.9	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	26.9	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	26.9	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*76.8 %*	*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*86.3 %*	*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.9	mg/kg dry	1	[CALC]	12/04/23 14:27	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**41.7**	1.08	mg/kg dry	1	P3L0508	12/05/23 12:53	12/06/23 01:19	EPA 300.0	
% Moisture	**7.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-93 @ 1.5

3L01002-08 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 15:47	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 15:47	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 15:47	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 15:47	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 15:47	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.2 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 15:47*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*112 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 15:47*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 15:47	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 15:47	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*95.5 %*	*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*108 %*	*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/04/23 14:27	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**531**	1.03	mg/kg dry	1	P3L0508	12/05/23 12:53	12/06/23 01:34	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-92 @ 1.5

3L01002-09 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 16:11	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 16:11	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 16:11	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 16:11	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0311	12/03/23 16:43	12/04/23 16:11	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*113 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 16:11*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.7 %*	*80-120*		*P3L0311*	*12/03/23 16:43*	*12/04/23 16:11*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 16:11	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/03/23 16:43	12/04/23 16:11	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*84.7 %*	*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*92.0 %*	*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/04/23 14:27	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**58.4**	1.04	mg/kg dry	1	P3L0508	12/05/23 12:53	12/06/23 01:48	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-91 @ 1.5

3L01002-10 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00102	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 04:55	EPA 8021B	
Toluene	ND	0.00102	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 04:55	EPA 8021B	
Ethylbenzene	ND	0.00102	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 04:55	EPA 8021B	
Xylene (p/m)	ND	0.00204	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 04:55	EPA 8021B	
Xylene (o)	ND	0.00102	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 04:55	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*95.4 %*	*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 04:55*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 04:55*	*EPA 8021B*	
Xylenes (total)	ND	0.00204	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 04:55	EPA 8021B	
Total BTEX	ND	0.00102	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 04:55	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.5	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	25.5	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	25.5	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*77.2 %*	*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*85.3 %*	*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.5	mg/kg dry	1	[CALC]	12/04/23 14:27	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**42.3**	1.02	mg/kg dry	1	P3L0508	12/05/23 12:53	12/06/23 02:02	EPA 300.0	
% Moisture	**2.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-90 @ 1.5

3L01002-11 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 05:20	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 05:20	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 05:20	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 05:20	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 05:20	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 05:20*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.2 %*	*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 05:20*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 05:20	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 05:20	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*88.8 %*	*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*106 %*	*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/04/23 14:27	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**79.2**	1.05	mg/kg dry	1	P3L0508	12/05/23 12:53	12/06/23 02:17	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-89 @ 1.5

3L01002-12 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 06:33	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 06:33	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 06:33	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 06:33	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 06:33	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*95.8 %*	*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 06:33*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 06:33*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 06:33	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 06:33	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*73.4 %*	*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*82.6 %*	*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/04/23 14:27	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**76.0**	1.03	mg/kg dry	1	P3L0508	12/05/23 12:53	12/06/23 02:31	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-88 @ 1.5

3L01002-13 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00102	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 06:57	EPA 8021B	
Toluene	ND	0.00102	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 06:57	EPA 8021B	
Ethylbenzene	ND	0.00102	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 06:57	EPA 8021B	
Xylene (p/m)	ND	0.00204	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 06:57	EPA 8021B	
Xylene (o)	ND	0.00102	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 06:57	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 06:57*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.7 %*	*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 06:57*	*EPA 8021B*	
Xylenes (total)	ND	0.00204	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 06:57	EPA 8021B	
Total BTEX	ND	0.00102	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 06:57	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.5	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	25.5	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	25.5	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*81.4 %*	*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*94.2 %*	*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.5	mg/kg dry	1	[CALC]	12/04/23 14:27	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**306**	1.02	mg/kg dry	1	P3L0509	12/05/23 12:56	12/06/23 10:28	EPA 300.0	
% Moisture	**2.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-87 @ 1.5

3L01002-14 (Soil)

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
Permian Basin Environmental Lab, L.P.									
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 07:22	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 07:22	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 07:22	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 07:22	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 07:22	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*95.3 %*		*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 07:22*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*115 %*		*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 07:22*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 07:22	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 07:22	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*73.2 %*		*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*84.8 %*		*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/04/23 14:27	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**50.8**	1.05	mg/kg dry	1	P3L0509	12/05/23 12:56	12/06/23 10:42	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-86 @ 1.5

3L01002-15 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 07:46	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 07:46	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 07:46	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 07:46	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 07:46	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*95.8 %*	*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 07:46*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 07:46*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 07:46	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 07:46	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*85.3 %*	*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*94.7 %*	*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/04/23 14:27	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**558**	1.04	mg/kg dry	1	P3L0704	12/07/23 11:11	12/08/23 09:08	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-85 @ 1.5

3L01002-16 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 08:10	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 08:10	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 08:10	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 08:10	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 08:10	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*95.2 %*	*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 08:10*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 08:10*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 08:10	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 08:10	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*71.0 %*	*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*78.9 %*	*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/04/23 14:27	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**135**	1.04	mg/kg dry	1	P3L0704	12/07/23 11:11	12/08/23 12:04	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-84 @ 1.5

3L01002-17 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 08:35	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 08:35	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 08:35	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 08:35	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 08:35	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 08:35*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.5 %*	*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 08:35*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 08:35	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 08:35	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*85.9 %*	*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*98.2 %*	*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/04/23 14:27	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**74.8**	1.03	mg/kg dry	1	P3L0704	12/07/23 11:11	12/08/23 12:19	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-83 @ 1.5

3L01002-18 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 08:59	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 08:59	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 08:59	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 08:59	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 08:59	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*114 %*	*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 08:59*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*94.5 %*	*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 08:59*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 08:59	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 08:59	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*71.0 %*	*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*74.8 %*	*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/04/23 14:27	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**237**	1.05	mg/kg dry	1	P3L0704	12/07/23 11:11	12/08/23 12:34	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-82 @ 1.5

3L01002-19 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 09:24	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 09:24	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 09:24	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 09:24	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 09:24	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*95.2 %*	*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 09:24*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 09:24*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 09:24	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 09:24	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*77.9 %*	*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*86.1 %*	*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/04/23 14:27	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**213**	1.04	mg/kg dry	1	P3L0704	12/07/23 11:11	12/08/23 12:49	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-81 @ 1.5

3L01002-20 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 09:48	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 09:48	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 09:48	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 09:48	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 09:48	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*94.9 %*		*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 09:48*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*114 %*		*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 09:48*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 09:48	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 09:48	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0407	12/04/23 14:27	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*93.0 %*		*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*103 %*		*70-130*		*P3L0407*	*12/04/23 14:27*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/04/23 14:27	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**140**	1.04	mg/kg dry	1	P3L0704	12/07/23 11:11	12/08/23 13:03	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-80 @ 1.5

3L01002-21 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 10:12	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 10:12	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 10:12	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 10:12	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L0703	12/07/23 09:47	12/08/23 10:12	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 10:12*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*94.8 %*	*80-120*		*P3L0703*	*12/07/23 09:47*	*12/08/23 10:12*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 10:12	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/07/23 09:47	12/08/23 10:12	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 13:21	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 13:21	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 13:21	TPH 8015M	
Surrogate: 1-Chlorooctane		*68.9 %*	*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 13:21*	*TPH 8015M*	*S-GC*
Surrogate: o-Terphenyl		*76.8 %*	*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 13:21*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/04/23 14:29	12/07/23 13:21	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**287**	1.05	mg/kg dry	1	P3L0704	12/07/23 11:11	12/08/23 13:17	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-79 @ 1.5

3L01002-22 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 14:43	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 14:43	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 14:43	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 14:43	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 14:43	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*114 %*	*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 14:43*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.1 %*	*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 14:43*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 14:43	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 14:43	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 13:45	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 13:45	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 13:45	TPH 8015M	
Surrogate: 1-Chlorooctane		*75.7 %*	*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 13:45*	*TPH 8015M*	
Surrogate: o-Terphenyl		*82.9 %*	*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 13:45*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/04/23 14:29	12/07/23 13:45	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**92.3**	1.04	mg/kg dry	1	P3L0704	12/07/23 11:11	12/08/23 13:32	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-78 @ 1.5

3L01002-23 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00110	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 15:08	EPA 8021B	
Toluene	ND	0.00110	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 15:08	EPA 8021B	
Ethylbenzene	ND	0.00110	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 15:08	EPA 8021B	
Xylene (p/m)	ND	0.00220	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 15:08	EPA 8021B	
Xylene (o)	ND	0.00110	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 15:08	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*114 %*	*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 15:08*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*93.9 %*	*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 15:08*	*EPA 8021B*	
Xylenes (total)	ND	0.00220	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 15:08	EPA 8021B	
Total BTEX	ND	0.00110	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 15:08	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.5	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 14:09	TPH 8015M	
>C12-C28	ND	27.5	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 14:09	TPH 8015M	
>C28-C35	ND	27.5	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 14:09	TPH 8015M	
Surrogate: 1-Chlorooctane		*81.2 %*	*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 14:09*	*TPH 8015M*	
Surrogate: o-Terphenyl		*89.5 %*	*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 14:09*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.5	mg/kg dry	1	[CALC]	12/04/23 14:29	12/07/23 14:09	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**62.2**	1.10	mg/kg dry	1	P3L0704	12/07/23 11:11	12/08/23 13:46	EPA 300.0	
% Moisture	**9.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-77 @ 1.5

3L01002-24 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 15:32	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 15:32	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 15:32	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 15:32	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 15:32	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*94.9 %*	*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 15:32*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*114 %*	*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 15:32*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 15:32	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 15:32	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 14:34	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 14:34	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 14:34	TPH 8015M	
Surrogate: 1-Chlorooctane		*80.9 %*	*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 14:34*	*TPH 8015M*	
Surrogate: o-Terphenyl		*89.4 %*	*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 14:34*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	12/04/23 14:29	12/07/23 14:34	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**193**	1.06	mg/kg dry	1	P3L0704	12/07/23 11:11	12/08/23 14:01	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-76 @ 1.5

3L01002-25 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 15:57	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 15:57	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 15:57	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 15:57	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 15:57	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*94.9 %*	*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 15:57*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 15:57*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 15:57	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 15:57	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 14:58	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 14:58	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 14:58	TPH 8015M	
Surrogate: 1-Chlorooctane		*86.6 %*	*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 14:58*	*TPH 8015M*	
Surrogate: o-Terphenyl		*96.7 %*	*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 14:58*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	12/04/23 14:29	12/07/23 14:58	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**212**	1.06	mg/kg dry	1	P3L0704	12/07/23 11:11	12/08/23 14:45	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-75 @ 1.5

3L01002-26 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 16:21	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 16:21	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 16:21	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 16:21	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 16:21	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*113 %*	*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 16:21*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*94.5 %*	*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 16:21*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 16:21	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 16:21	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 15:22	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 15:22	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 15:22	TPH 8015M	
Surrogate: 1-Chlorooctane		*71.7 %*	*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 15:22*	*TPH 8015M*	
Surrogate: o-Terphenyl		*79.1 %*	*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 15:22*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	12/04/23 14:29	12/07/23 15:22	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**283**	1.06	mg/kg dry	1	P3L0704	12/07/23 11:11	12/08/23 15:28	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-74 @ 1.5

3L01002-27 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 16:46	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 16:46	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 16:46	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 16:46	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 16:46	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*95.2 %*	*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 16:46*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 16:46*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 16:46	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 16:46	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 15:46	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 15:46	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 15:46	TPH 8015M	
Surrogate: 1-Chlorooctane		*86.1 %*	*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 15:46*	*TPH 8015M*	
Surrogate: o-Terphenyl		*95.1 %*	*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 15:46*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/04/23 14:29	12/07/23 15:46	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**129**	1.04	mg/kg dry	1	P3L0704	12/07/23 11:11	12/08/23 16:26	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-73 @ 1.5

3L01002-28 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 17:10	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 17:10	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 17:10	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 17:10	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 17:10	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*114 %*	*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 17:10*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.4 %*	*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 17:10*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 17:10	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 17:10	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 16:10	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 16:10	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 16:10	TPH 8015M	
Surrogate: 1-Chlorooctane		*80.3 %*	*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 16:10*	*TPH 8015M*	
Surrogate: o-Terphenyl		*88.1 %*	*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 16:10*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/04/23 14:29	12/07/23 16:10	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**82.8**	1.04	mg/kg dry	1	P3L0704	12/07/23 11:11	12/08/23 16:40	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-72 @ 1.5

3L01002-29 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00102	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 17:34	EPA 8021B	
Toluene	ND	0.00102	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 17:34	EPA 8021B	
Ethylbenzene	ND	0.00102	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 17:34	EPA 8021B	
Xylene (p/m)	ND	0.00204	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 17:34	EPA 8021B	
Xylene (o)	ND	0.00102	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 17:34	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 17:34*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.1 %*	*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 17:34*	*EPA 8021B*	
Xylenes (total)	ND	0.00204	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 17:34	EPA 8021B	
Total BTEX	ND	0.00102	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 17:34	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.5	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 16:34	TPH 8015M	
>C12-C28	ND	25.5	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 16:34	TPH 8015M	
>C28-C35	ND	25.5	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 16:34	TPH 8015M	
Surrogate: 1-Chlorooctane		*75.2 %*	*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 16:34*	*TPH 8015M*	
Surrogate: o-Terphenyl		*83.5 %*	*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 16:34*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.5	mg/kg dry	1	[CALC]	12/04/23 14:29	12/07/23 16:34	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**69.2**	1.02	mg/kg dry	1	P3L0704	12/07/23 11:11	12/08/23 16:56	EPA 300.0	
% Moisture	**2.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-71 @ 1.5

3L01002-30 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 17:59	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 17:59	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 17:59	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 17:59	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 17:59	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*95.9 %*	*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 17:59*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 17:59*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 17:59	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 17:59	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 16:58	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 16:58	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 16:58	TPH 8015M	
Surrogate: 1-Chlorooctane		*68.8 %*	*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 16:58*	*TPH 8015M*	*S-GC*
Surrogate: o-Terphenyl		*77.3 %*	*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 16:58*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/04/23 14:29	12/07/23 16:58	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**79.0**	1.04	mg/kg dry	1	P3L0704	12/07/23 11:11	12/08/23 17:10	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0307	12/03/23 13:42	12/03/23 13:51	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0311 - * DEFAULT PREP *** **										
Blank (P3L0311-BLK1)				Prepared: 12/03/23 Analyzed: 12/04/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 4-Bromofluorobenzene	*0.141*		"	*0.120*		*118*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.115*		"	*0.120*		*95.7*	*80-120*			
LCS (P3L0311-BS1)				Prepared: 12/03/23 Analyzed: 12/04/23						
Benzene	0.113	0.00100	mg/kg	0.100		113	80-120			
Toluene	0.101	0.00100	"	0.100		101	80-120			
Ethylbenzene	0.108	0.00100	"	0.100		108	80-120			
Xylene (p/m)	0.212	0.00200	"	0.200		106	80-120			
Xylene (o)	0.0968	0.00100	"	0.100		96.8	80-120			
Surrogate: 4-Bromofluorobenzene	*0.134*		"	*0.120*		*112*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.119*		"	*0.120*		*99.0*	*80-120*			
LCS Dup (P3L0311-BSD1)				Prepared: 12/03/23 Analyzed: 12/04/23						
Benzene	0.113	0.00100	mg/kg	0.100		113	80-120	0.416	20	
Toluene	0.101	0.00100	"	0.100		101	80-120	0.00	20	
Ethylbenzene	0.108	0.00100	"	0.100		108	80-120	0.306	20	
Xylene (p/m)	0.212	0.00200	"	0.200		106	80-120	0.245	20	
Xylene (o)	0.0969	0.00100	"	0.100		96.9	80-120	0.124	20	
Surrogate: 4-Bromofluorobenzene	*0.133*		"	*0.120*		*111*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.119*		"	*0.120*		*98.8*	*80-120*			
Calibration Blank (P3L0311-CCB1)				Prepared: 12/03/23 Analyzed: 12/04/23						
Benzene	0.200		ug/kg							
Toluene	0.180		"							
Ethylbenzene	0.120		"							
Xylene (p/m)	0.260		"							
Xylene (o)	0.130		"							
Surrogate: 1,4-Difluorobenzene	*0.116*		"	*0.120*		*96.5*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.140*		"	*0.120*		*117*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0311 - * DEFAULT PREP *** **										
Calibration Blank (P3L0311-CCB2)				Prepared: 12/03/23 Analyzed: 12/04/23						
Benzene	0.190		ug/kg							
Toluene	0.260		"							
Ethylbenzene	0.220		"							
Xylene (p/m)	0.240		"							
Xylene (o)	0.180		"							
Surrogate: 1,4-Difluorobenzene	*0.116*		*"*	*0.120*		*96.4*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.141*		*"*	*0.120*		*117*	*80-120*			
Calibration Check (P3L0311-CCV1)				Prepared: 12/03/23 Analyzed: 12/04/23						
Benzene	0.119	0.00100	mg/kg	0.100		119	80-120			
Toluene	0.108	0.00100	"	0.100		108	80-120			
Ethylbenzene	0.110	0.00100	"	0.100		110	80-120			
Xylene (p/m)	0.226	0.00200	"	0.200		113	80-120			
Xylene (o)	0.106	0.00100	"	0.100		106	80-120			
Surrogate: 4-Bromofluorobenzene	*0.133*		*"*	*0.120*		*111*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.119*		*"*	*0.120*		*99.3*	*75-125*			
Calibration Check (P3L0311-CCV2)				Prepared: 12/03/23 Analyzed: 12/04/23						
Benzene	0.116	0.00100	mg/kg	0.100		116	80-120			
Toluene	0.105	0.00100	"	0.100		105	80-120			
Ethylbenzene	0.106	0.00100	"	0.100		106	80-120			
Xylene (p/m)	0.215	0.00200	"	0.200		108	80-120			
Xylene (o)	0.101	0.00100	"	0.100		101	80-120			
Surrogate: 1,4-Difluorobenzene	*0.118*		*"*	*0.120*		*98.6*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.132*		*"*	*0.120*		*110*	*75-125*			
Calibration Check (P3L0311-CCV3)				Prepared: 12/03/23 Analyzed: 12/04/23						
Benzene	0.112	0.00100	mg/kg	0.100		112	80-120			
Toluene	0.0997	0.00100	"	0.100		99.7	80-120			
Ethylbenzene	0.101	0.00100	"	0.100		101	80-120			
Xylene (p/m)	0.205	0.00200	"	0.200		102	80-120			
Xylene (o)	0.0958	0.00100	"	0.100		95.8	80-120			
Surrogate: 1,4-Difluorobenzene	*0.117*		*"*	*0.120*		*97.6*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.132*		*"*	*0.120*		*110*	*75-125*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0311 - * DEFAULT PREP *** **										
Matrix Spike (P3L0311-MS1)	**Source: 3L01002-09**			Prepared: 12/03/23 Analyzed: 12/04/23						
Benzene	0.0822	0.00104	mg/kg dry	0.104	ND	78.9	80-120			QM-05
Toluene	0.0618	0.00104	"	0.104	ND	59.3	80-120			QM-05
Ethylbenzene	0.0575	0.00104	"	0.104	ND	55.2	80-120			QM-05
Xylene (p/m)	0.113	0.00208	"	0.208	ND	54.2	80-120			QM-05
Xylene (o)	0.0517	0.00104	"	0.104	ND	49.7	80-120			QM-05
Surrogate: 1,4-Difluorobenzene	*0.122*		*"*	*0.125*		*97.5*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.136*		*"*	*0.125*		*109*	*80-120*			
Matrix Spike Dup (P3L0311-MSD1)	**Source: 3L01002-09**			Prepared: 12/03/23 Analyzed: 12/04/23						
Benzene	0.0639	0.00104	mg/kg dry	0.104	ND	61.4	80-120	25.0	20	QM-05
Toluene	0.0468	0.00104	"	0.104	ND	44.9	80-120	27.7	20	QM-05
Ethylbenzene	0.0410	0.00104	"	0.104	ND	39.4	80-120	33.5	20	QM-05
Xylene (p/m)	0.0814	0.00208	"	0.208	ND	39.1	80-120	32.5	20	QM-05
Xylene (o)	0.0374	0.00104	"	0.104	ND	35.9	80-120	32.1	20	QM-05
Surrogate: 1,4-Difluorobenzene	*0.122*		*"*	*0.125*		*97.8*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.137*		*"*	*0.125*		*109*	*80-120*			
Batch P3L0504 - * DEFAULT PREP *** **										
Blank (P3L0504-BLK1)				Prepared & Analyzed: 12/05/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 1,4-Difluorobenzene	*0.114*		*"*	*0.120*		*95.2*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.138*		*"*	*0.120*		*115*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0504 - * DEFAULT PREP *** **										
LCS (P3L0504-BS1)				Prepared & Analyzed: 12/05/23						
Benzene	0.105	0.00100	mg/kg	0.100		105	80-120			
Toluene	0.0984	0.00100	"	0.100		98.4	80-120			
Ethylbenzene	0.108	0.00100	"	0.100		108	80-120			
Xylene (p/m)	0.210	0.00200	"	0.200		105	80-120			
Xylene (o)	0.0964	0.00100	"	0.100		96.4	80-120			
Surrogate: 1,4-Difluorobenzene	*0.117*		*"*	*0.120*		*97.4*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.130*		*"*	*0.120*		*109*	*80-120*			
LCS Dup (P3L0504-BSD1)				Prepared & Analyzed: 12/05/23						
Benzene	0.107	0.00100	mg/kg	0.100		107	80-120	2.08	20	
Toluene	0.101	0.00100	"	0.100		101	80-120	2.32	20	
Ethylbenzene	0.111	0.00100	"	0.100		111	80-120	2.59	20	
Xylene (p/m)	0.216	0.00200	"	0.200		108	80-120	2.84	20	
Xylene (o)	0.0987	0.00100	"	0.100		98.7	80-120	2.34	20	
Surrogate: 1,4-Difluorobenzene	*0.117*		*"*	*0.120*		*97.9*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.131*		*"*	*0.120*		*109*	*80-120*			
Calibration Blank (P3L0504-CCB1)				Prepared & Analyzed: 12/05/23						
Benzene	0.150		ug/kg							
Toluene	0.290		"							
Ethylbenzene	0.110		"							
Xylene (p/m)	0.160		"							
Xylene (o)	0.0900		"							
Surrogate: 4-Bromofluorobenzene	*0.135*		*"*	*0.120*		*112*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.115*		*"*	*0.120*		*96.1*	*80-120*			
Calibration Blank (P3L0504-CCB2)				Prepared & Analyzed: 12/05/23						
Benzene	0.180		ug/kg							
Toluene	0.220		"							
Ethylbenzene	0.210		"							
Xylene (p/m)	0.180		"							
Xylene (o)	0.180		"							
Surrogate: 4-Bromofluorobenzene	*0.136*		*"*	*0.120*		*114*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.114*		*"*	*0.120*		*95.1*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0504 - * DEFAULT PREP *** **										
Calibration Blank (P3L0504-CCB3)				Prepared & Analyzed: 12/05/23						
Benzene	0.130		ug/kg							
Toluene	0.210		"							
Ethylbenzene	0.130		"							
Xylene (p/m)	0.220		"							
Xylene (o)	0.200		"							
Surrogate: 4-Bromofluorobenzene	*0.137*		*"*	*0.120*		*115*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.115*		*"*	*0.120*		*96.2*	*80-120*			
Calibration Check (P3L0504-CCV1)				Prepared & Analyzed: 12/05/23						
Benzene	0.104	0.00100	mg/kg	0.100		104	80-120			
Toluene	0.0958	0.00100	"	0.100		95.8	80-120			
Ethylbenzene	0.0983	0.00100	"	0.100		98.3	80-120			
Xylene (p/m)	0.204	0.00200	"	0.200		102	80-120			
Xylene (o)	0.0930	0.00100	"	0.100		93.0	80-120			
Surrogate: 1,4-Difluorobenzene	*0.117*		*"*	*0.120*		*97.8*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.129*		*"*	*0.120*		*107*	*75-125*			
Calibration Check (P3L0504-CCV2)				Prepared & Analyzed: 12/05/23						
Benzene	0.110	0.00100	mg/kg	0.100		110	80-120			
Toluene	0.103	0.00100	"	0.100		103	80-120			
Ethylbenzene	0.105	0.00100	"	0.100		105	80-120			
Xylene (p/m)	0.214	0.00200	"	0.200		107	80-120			
Xylene (o)	0.101	0.00100	"	0.100		101	80-120			
Surrogate: 4-Bromofluorobenzene	*0.131*		*"*	*0.120*		*109*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.116*		*"*	*0.120*		*96.5*	*75-125*			
Calibration Check (P3L0504-CCV3)				Prepared & Analyzed: 12/05/23						
Benzene	0.115	0.00100	mg/kg	0.100		115	80-120			
Toluene	0.108	0.00100	"	0.100		108	80-120			
Ethylbenzene	0.110	0.00100	"	0.100		110	80-120			
Xylene (p/m)	0.218	0.00200	"	0.200		109	80-120			
Xylene (o)	0.109	0.00100	"	0.100		109	80-120			
Surrogate: 4-Bromofluorobenzene	*0.137*		*"*	*0.120*		*114*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.118*		*"*	*0.120*		*98.0*	*75-125*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0504 - * DEFAULT PREP *** **										
Matrix Spike (P3L0504-MS1)	**Source: 3L04006-01**			Prepared & Analyzed: 12/05/23						
Benzene	0.0540	0.00111	mg/kg dry	0.111	0.00807	41.4	80-120			QM-05
Toluene	0.0393	0.00111	"	0.111	0.0519	NR	80-120			QM-05
Ethylbenzene	0.0689	0.00111	"	0.111	0.0256	39.0	80-120			QM-05
Xylene (p/m)	0.122	0.00222	"	0.222	0.111	5.17	80-120			QM-05
Xylene (o)	0.0686	0.00111	"	0.111	0.0335	31.6	80-120			QM-05
Surrogate: 4-Bromofluorobenzene	*0.150*		*"*	*0.133*		*112*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.134*		*"*	*0.133*		*101*	*80-120*			
Matrix Spike Dup (P3L0504-MSD1)	**Source: 3L04006-01**			Prepared & Analyzed: 12/05/23						
Benzene	0.0677	0.00111	mg/kg dry	0.111	0.00807	53.7	80-120	25.9	20	QM-05
Toluene	0.0430	0.00111	"	0.111	0.0519	NR	80-120	NR	20	QM-05
Ethylbenzene	0.0779	0.00111	"	0.111	0.0256	47.0	80-120	18.7	20	QM-05
Xylene (p/m)	0.128	0.00222	"	0.222	0.111	7.51	80-120	36.9	20	QM-05
Xylene (o)	0.0803	0.00111	"	0.111	0.0335	42.2	80-120	28.5	20	QM-05
Surrogate: 4-Bromofluorobenzene	*0.151*		*"*	*0.133*		*113*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.134*		*"*	*0.133*		*101*	*80-120*			
Batch P3L0703 - * DEFAULT PREP *** **										
Blank (P3L0703-BLK1)				Prepared: 12/07/23 Analyzed: 12/08/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 4-Bromofluorobenzene	*0.137*		*"*	*0.120*		*114*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.114*		*"*	*0.120*		*94.8*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0703 - * DEFAULT PREP *** **										
LCS (P3L0703-BS1)				Prepared: 12/07/23 Analyzed: 12/08/23						
Benzene	0.0997	0.00100	mg/kg	0.100		99.7	80-120			
Toluene	0.0948	0.00100	"	0.100		94.8	80-120			
Ethylbenzene	0.103	0.00100	"	0.100		103	80-120			
Xylene (p/m)	0.199	0.00200	"	0.200		99.6	80-120			
Xylene (o)	0.0908	0.00100	"	0.100		90.8	80-120			
Surrogate: 4-Bromofluorobenzene	*0.133*		"	*0.120*		*110*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.115*		"	*0.120*		*96.0*	*80-120*			
LCS Dup (P3L0703-BSD1)				Prepared: 12/07/23 Analyzed: 12/08/23						
Benzene	0.0886	0.00100	mg/kg	0.100		88.6	80-120	11.8	20	
Toluene	0.0824	0.00100	"	0.100		82.4	80-120	14.0	20	
Ethylbenzene	0.0894	0.00100	"	0.100		89.4	80-120	14.1	20	
Xylene (p/m)	0.175	0.00200	"	0.200		87.3	80-120	13.1	20	
Xylene (o)	0.0800	0.00100	"	0.100		80.0	80-120	12.6	20	
Surrogate: 4-Bromofluorobenzene	*0.134*		"	*0.120*		*111*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.115*		"	*0.120*		*95.9*	*80-120*			
Calibration Blank (P3L0703-CCB1)				Prepared: 12/07/23 Analyzed: 12/08/23						
Benzene	0.150		ug/kg							
Toluene	0.350		"							
Ethylbenzene	0.230		"							
Xylene (p/m)	0.230		"							
Xylene (o)	0.240		"							
Surrogate: 4-Bromofluorobenzene	*0.138*		"	*0.120*		*115*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*95.2*	*80-120*			
Calibration Blank (P3L0703-CCB2)				Prepared: 12/07/23 Analyzed: 12/08/23						
Benzene	0.110		ug/kg							
Toluene	0.290		"							
Ethylbenzene	0.140		"							
Xylene (p/m)	0.200		"							
Xylene (o)	0.110		"							
Surrogate: 4-Bromofluorobenzene	*0.138*		"	*0.120*		*115*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*95.3*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0703 - * DEFAULT PREP *** **										
Calibration Check (P3L0703-CCV1)				Prepared & Analyzed: 12/07/23						
Benzene	0.111	0.00100	mg/kg	0.100		111	80-120			
Toluene	0.106	0.00100	"	0.100		106	80-120			
Ethylbenzene	0.108	0.00100	"	0.100		108	80-120			
Xylene (p/m)	0.218	0.00200	"	0.200		109	80-120			
Xylene (o)	0.102	0.00100	"	0.100		102	80-120			
Surrogate: 4-Bromofluorobenzene	*0.133*		*"*	*0.120*		*111*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.116*		*"*	*0.120*		*96.6*	*75-125*			
Calibration Check (P3L0703-CCV2)				Prepared: 12/07/23 Analyzed: 12/08/23						
Benzene	0.112	0.00100	mg/kg	0.100		112	80-120			
Toluene	0.107	0.00100	"	0.100		107	80-120			
Ethylbenzene	0.108	0.00100	"	0.100		108	80-120			
Xylene (p/m)	0.218	0.00200	"	0.200		109	80-120			
Xylene (o)	0.103	0.00100	"	0.100		103	80-120			
Surrogate: 1,4-Difluorobenzene	*0.115*		*"*	*0.120*		*95.8*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.134*		*"*	*0.120*		*112*	*75-125*			
Calibration Check (P3L0703-CCV3)				Prepared: 12/07/23 Analyzed: 12/08/23						
Benzene	0.109	0.00100	mg/kg	0.100		109	80-120			
Toluene	0.104	0.00100	"	0.100		104	80-120			
Ethylbenzene	0.104	0.00100	"	0.100		104	80-120			
Xylene (p/m)	0.208	0.00200	"	0.200		104	80-120			
Xylene (o)	0.0988	0.00100	"	0.100		98.8	80-120			
Surrogate: 4-Bromofluorobenzene	*0.133*		*"*	*0.120*		*110*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.115*		*"*	*0.120*		*95.9*	*75-125*			
Matrix Spike (P3L0703-MS1)		**Source: 3L01001-65**		Prepared: 12/07/23 Analyzed: 12/08/23						
Benzene	0.0567	0.00104	mg/kg dry	0.104	ND	54.4	80-120			QM-05
Toluene	0.0400	0.00104	"	0.104	ND	38.4	80-120			QM-05
Ethylbenzene	0.0296	0.00104	"	0.104	ND	28.4	80-120			QM-05
Xylene (p/m)	0.0569	0.00208	"	0.208	ND	27.3	80-120			QM-05
Xylene (o)	0.0265	0.00104	"	0.104	ND	25.4	80-120			QM-05
Surrogate: 1,4-Difluorobenzene	*0.120*		*"*	*0.125*		*95.6*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.137*		*"*	*0.125*		*110*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0703 - * DEFAULT PREP *** **										
Matrix Spike Dup (P3L0703-MSD1)	**Source: 3L01001-65**			Prepared: 12/07/23 Analyzed: 12/08/23						
Benzene	0.0749	0.00104	mg/kg dry	0.104	ND	71.9	80-120	27.7	20	QM-05
Toluene	0.0632	0.00104	"	0.104	ND	60.7	80-120	45.1	20	QM-05
Ethylbenzene	0.0608	0.00104	"	0.104	ND	58.4	80-120	69.1	20	QM-05
Xylene (p/m)	0.119	0.00208	"	0.208	ND	57.2	80-120	70.7	20	QM-05
Xylene (o)	0.0520	0.00104	"	0.104	ND	49.9	80-120	64.9	20	QM-05
Surrogate: 4-Bromofluorobenzene	*0.137*		*"*	*0.125*		*110*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.119*		*"*	*0.125*		*95.4*	*80-120*			
Batch P3L0804 - * DEFAULT PREP *** **										
Blank (P3L0804-BLK1)				Prepared & Analyzed: 12/08/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 1,4-Difluorobenzene	*0.113*		*"*	*0.120*		*94.6*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.138*		*"*	*0.120*		*115*	*80-120*			
LCS (P3L0804-BS1)				Prepared & Analyzed: 12/08/23						
Benzene	0.0962	0.00100	mg/kg	0.100		96.2	80-120			
Toluene	0.0967	0.00100	"	0.100		96.7	80-120			
Ethylbenzene	0.110	0.00100	"	0.100		110	80-120			
Xylene (p/m)	0.212	0.00200	"	0.200		106	80-120			
Xylene (o)	0.0983	0.00100	"	0.100		98.3	80-120			
Surrogate: 4-Bromofluorobenzene	*0.133*		*"*	*0.120*		*111*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.114*		*"*	*0.120*		*95.3*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0804 - * DEFAULT PREP *** **										
LCS Dup (P3L0804-BSD1)				Prepared & Analyzed: 12/08/23						
Benzene	0.0973	0.00100	mg/kg	0.100		97.3	80-120	1.10	20	
Toluene	0.0974	0.00100	"	0.100		97.4	80-120	0.773	20	
Ethylbenzene	0.110	0.00100	"	0.100		110	80-120	0.363	20	
Xylene (p/m)	0.213	0.00200	"	0.200		106	80-120	0.429	20	
Xylene (o)	0.0973	0.00100	"	0.100		97.3	80-120	0.961	20	
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*95.1*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.134*		"	*0.120*		*111*	*80-120*			
Calibration Blank (P3L0804-CCB1)				Prepared & Analyzed: 12/08/23						
Benzene	0.150		ug/kg							
Toluene	0.300		"							
Ethylbenzene	0.110		"							
Xylene (p/m)	0.220		"							
Xylene (o)	0.210		"							
Surrogate: 4-Bromofluorobenzene	*0.137*		"	*0.120*		*114*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.113*		"	*0.120*		*93.9*	*80-120*			
Calibration Blank (P3L0804-CCB2)				Prepared & Analyzed: 12/08/23						
Benzene	0.100		ug/kg							
Toluene	0.250		"							
Ethylbenzene	0.120		"							
Xylene (p/m)	0.140		"							
Xylene (o)	0.140		"							
Surrogate: 1,4-Difluorobenzene	*0.115*		"	*0.120*		*95.8*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.138*		"	*0.120*		*115*	*80-120*			
Calibration Blank (P3L0804-CCB3)				Prepared: 12/08/23 Analyzed: 12/09/23						
Benzene	0.120		ug/kg							
Toluene	0.310		"							
Ethylbenzene	0.0800		"							
Xylene (p/m)	0.160		"							
Xylene (o)	0.240		"							
Surrogate: 4-Bromofluorobenzene	*0.138*		"	*0.120*		*115*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.115*		"	*0.120*		*95.6*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0804 - * DEFAULT PREP *** **										
Calibration Check (P3L0804-CCV1)				Prepared & Analyzed: 12/08/23						
Benzene	0.0967	0.00100	mg/kg	0.100		96.7	80-120			
Toluene	0.0938	0.00100	"	0.100		93.8	80-120			
Ethylbenzene	0.0974	0.00100	"	0.100		97.4	80-120			
Xylene (p/m)	0.199	0.00200	"	0.200		99.3	80-120			
Xylene (o)	0.0922	0.00100	"	0.100		92.2	80-120			
Surrogate: 1,4-Difluorobenzene	*0.113*		"	*0.120*		*94.4*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.133*		"	*0.120*		*111*	*75-125*			
Calibration Check (P3L0804-CCV2)				Prepared & Analyzed: 12/08/23						
Benzene	0.109	0.00100	mg/kg	0.100		109	80-120			
Toluene	0.102	0.00100	"	0.100		102	80-120			
Ethylbenzene	0.105	0.00100	"	0.100		105	80-120			
Xylene (p/m)	0.216	0.00200	"	0.200		108	80-120			
Xylene (o)	0.101	0.00100	"	0.100		101	80-120			
Surrogate: 4-Bromofluorobenzene	*0.132*		"	*0.120*		*110*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.117*		"	*0.120*		*97.8*	*75-125*			
Calibration Check (P3L0804-CCV3)				Prepared: 12/08/23 Analyzed: 12/09/23						
Benzene	0.113	0.00100	mg/kg	0.100		113	80-120			
Toluene	0.107	0.00100	"	0.100		107	80-120			
Ethylbenzene	0.110	0.00100	"	0.100		110	80-120			
Xylene (p/m)	0.223	0.00200	"	0.200		111	80-120			
Xylene (o)	0.105	0.00100	"	0.100		105	80-120			
Surrogate: 1,4-Difluorobenzene	*0.117*		"	*0.120*		*97.4*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.132*		"	*0.120*		*110*	*75-125*			
Matrix Spike (P3L0804-MS1)		**Source: 3L01002-22**		Prepared & Analyzed: 12/08/23						
Benzene	0.0874	0.00104	mg/kg dry	0.104	ND	83.9	80-120			
Toluene	0.0880	0.00104	"	0.104	ND	84.4	80-120			
Ethylbenzene	0.0832	0.00104	"	0.104	ND	79.9	80-120			QM-05
Xylene (p/m)	0.163	0.00208	"	0.208	ND	78.5	80-120			QM-05
Xylene (o)	0.0724	0.00104	"	0.104	ND	69.5	80-120			QM-05
Surrogate: 4-Bromofluorobenzene	*0.138*		"	*0.125*		*111*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.121*		"	*0.125*		*96.5*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0804 - * DEFAULT PREP *** **										
Matrix Spike Dup (P3L0804-MSD1)	**Source: 3L01002-22**			Prepared: 12/08/23 Analyzed: 12/09/23						
Benzene	0.0839	0.00104	mg/kg dry	0.104	ND	80.5	80-120	4.16	20	
Toluene	0.0827	0.00104	"	0.104	ND	79.4	80-120	6.15	20	QM-05
Ethylbenzene	0.0800	0.00104	"	0.104	ND	76.8	80-120	3.92	20	QM-05
Xylene (p/m)	0.157	0.00208	"	0.208	ND	75.3	80-120	4.08	20	QM-05
Xylene (o)	0.0693	0.00104	"	0.104	ND	66.6	80-120	4.26	20	QM-05
Surrogate: 4-Bromofluorobenzene	*0.138*		*"*	*0.125*		*111*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.121*		*"*	*0.125*		*96.8*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0407 - TX 1005										
Blank (P3L0407-BLK1)				Prepared: 12/04/23 Analyzed: 12/05/23						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*140*		*"*	*140*		*99.9*	*70-130*			
Surrogate: o-Terphenyl	*77.2*		*"*	*70.0*		*110*	*70-130*			
LCS (P3L0407-BS1)				Prepared: 12/04/23 Analyzed: 12/05/23						
C6-C12	1080	25.0	mg/kg	1000		108	75-125			
>C12-C28	795	25.0	"	1000		79.5	75-125			
Surrogate: 1-Chlorooctane	*178*		*"*	*140*		*127*	*70-130*			
Surrogate: o-Terphenyl	*77.4*		*"*	*70.0*		*111*	*70-130*			
LCS Dup (P3L0407-BSD1)				Prepared: 12/04/23 Analyzed: 12/05/23						
C6-C12	1010	25.0	mg/kg	900		112	75-125	3.15	20	
>C12-C28	739	25.0	"	900		82.1	75-125	3.21	20	
Surrogate: 1-Chlorooctane	*162*		*"*	*140*		*116*	*70-130*			
Surrogate: o-Terphenyl	*68.7*		*"*	*70.0*		*98.2*	*70-130*			
Calibration Check (P3L0407-CCV1)				Prepared: 12/04/23 Analyzed: 12/05/23						
C6-C12	538	25.0	mg/kg	500		108	85-115			
>C12-C28	447	25.0	"	500		89.5	85-115			
Surrogate: 1-Chlorooctane	*145*		*"*	*140*		*104*	*70-130*			
Surrogate: o-Terphenyl	*70.4*		*"*	*70.0*		*101*	*70-130*			
Matrix Spike (P3L0407-MS1)	**Source: 3L01002-20**			Prepared: 12/04/23 Analyzed: 12/05/23						
C6-C12	955	26.0	mg/kg dry	1040	12.5	90.5	75-125			
>C12-C28	943	26.0	"	1040	ND	90.5	75-125			
Surrogate: 1-Chlorooctane	*128*		*"*	*146*		*88.0*	*70-130*			
Surrogate: o-Terphenyl	*64.2*		*"*	*72.9*		*88.1*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0407 - TX 1005										
Matrix Spike Dup (P3L0407-MSD1)	**Source: 3L01002-20**			Prepared: 12/04/23 Analyzed: 12/05/23						
C6-C12	939	26.0	mg/kg dry	1040	12.5	88.9	75-125	1.73	20	
>C12-C28	957	26.0	"	1040	ND	91.9	75-125	1.51	20	
Surrogate: 1-Chlorooctane	*121*		*"*	*146*		*82.8*	*70-130*			
Surrogate: o-Terphenyl	*62.4*		*"*	*72.9*		*85.5*	*70-130*			
Batch P3L0408 - TX 1005										
Blank (P3L0408-BLK1)				Prepared: 12/04/23 Analyzed: 12/07/23						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*95.6*		*"*	*100*		*95.6*	*70-130*			
Surrogate: o-Terphenyl	*54.0*		*"*	*50.0*		*108*	*70-130*			
LCS (P3L0408-BS1)				Prepared: 12/04/23 Analyzed: 12/07/23						
C6-C12	910	25.0	mg/kg	1000		91.0	75-125			
>C12-C28	835	25.0	"	1000		83.5	75-125			
Surrogate: 1-Chlorooctane	*122*		*"*	*100*		*122*	*70-130*			
Surrogate: o-Terphenyl	*58.9*		*"*	*50.0*		*118*	*70-130*			
LCS Dup (P3L0408-BSD1)				Prepared: 12/04/23 Analyzed: 12/07/23						
C6-C12	848	25.0	mg/kg	1000		84.8	75-125	6.97	20	
>C12-C28	791	25.0	"	1000		79.1	75-125	5.46	20	
Surrogate: 1-Chlorooctane	*106*		*"*	*100*		*106*	*70-130*			
Surrogate: o-Terphenyl	*50.1*		*"*	*50.0*		*100*	*70-130*			
Calibration Check (P3L0408-CCV1)				Prepared: 12/04/23 Analyzed: 12/07/23						
C6-C12	485	25.0	mg/kg	500		97.1	85-115			
>C12-C28	518	25.0	"	500		104	85-115			
Surrogate: 1-Chlorooctane	*106*		*"*	*100*		*106*	*70-130*			
Surrogate: o-Terphenyl	*52.8*		*"*	*50.0*		*106*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0408 - TX 1005										
Calibration Check (P3L0408-CCV2)				Prepared: 12/04/23 Analyzed: 12/07/23						
C6-C12	459	25.0	mg/kg	500		91.8	85-115			
>C12-C28	494	25.0	"	500		98.7	85-115			
Surrogate: 1-Chlorooctane	*101*		*"*	*100*		*101*	*70-130*			
Surrogate: o-Terphenyl	*50.3*		*"*	*50.0*		*101*	*70-130*			
Calibration Check (P3L0408-CCV3)				Prepared: 12/04/23 Analyzed: 12/07/23						
C6-C12	429	25.0	mg/kg	500		85.7	85-115			
>C12-C28	467	25.0	"	500		93.4	85-115			
Surrogate: 1-Chlorooctane	*93.4*		*"*	*100*		*93.4*	*70-130*			
Surrogate: o-Terphenyl	*47.0*		*"*	*50.0*		*94.1*	*70-130*			
Matrix Spike (P3L0408-MS1)	**Source: 3L01003-10**			Prepared: 12/04/23 Analyzed: 12/07/23						
C6-C12	812	26.0	mg/kg dry	1040	20.9	76.0	75-125			
>C12-C28	784	26.0	"	1040	ND	75.2	75-125			
Surrogate: 1-Chlorooctane	*107*		*"*	*104*		*103*	*70-130*			
Surrogate: o-Terphenyl	*47.1*		*"*	*52.1*		*90.3*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0307 - * DEFAULT PREP *** **										
Blank (P3L0307-BLK1)				Prepared & Analyzed: 12/03/23						
% Moisture	ND	0.1	%							
Blank (P3L0307-BLK2)				Prepared & Analyzed: 12/03/23						
% Moisture	ND	0.1	%							
Blank (P3L0307-BLK3)				Prepared & Analyzed: 12/03/23						
% Moisture	ND	0.1	%							
Blank (P3L0307-BLK4)				Prepared & Analyzed: 12/03/23						
% Moisture	ND	0.1	%							
Blank (P3L0307-BLK5)				Prepared & Analyzed: 12/03/23						
% Moisture	ND	0.1	%							
Duplicate (P3L0307-DUP1)	**Source: 3L01001-10**			Prepared & Analyzed: 12/03/23						
% Moisture	4.0	0.1	%		4.0			0.00	20	
Duplicate (P3L0307-DUP2)	**Source: 3L01001-20**			Prepared & Analyzed: 12/03/23						
% Moisture	4.0	0.1	%		4.0			0.00	20	
Duplicate (P3L0307-DUP3)	**Source: 3L01001-35**			Prepared & Analyzed: 12/03/23						
% Moisture	7.0	0.1	%		7.0			0.00	20	
Duplicate (P3L0307-DUP4)	**Source: 3L01001-45**			Prepared & Analyzed: 12/03/23						
% Moisture	3.0	0.1	%		3.0			0.00	20	
Duplicate (P3L0307-DUP5)	**Source: 3L01001-60**			Prepared & Analyzed: 12/03/23						
% Moisture	2.0	0.1	%		2.0			0.00	20	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0307 - * DEFAULT PREP *** **										
Duplicate (P3L0307-DUP6)		**Source: 3L01001-70**		Prepared & Analyzed: 12/03/23						
% Moisture	7.0	0.1	%		7.0			0.00	20	
Duplicate (P3L0307-DUP7)		**Source: 3L01001-85**		Prepared & Analyzed: 12/03/23						
% Moisture	5.0	0.1	%		5.0			0.00	20	
Duplicate (P3L0307-DUP8)		**Source: 3L01002-03**		Prepared & Analyzed: 12/03/23						
% Moisture	3.0	0.1	%		3.0			0.00	20	
Duplicate (P3L0307-DUP9)		**Source: 3L01002-18**		Prepared & Analyzed: 12/03/23						
% Moisture	5.0	0.1	%		5.0			0.00	20	
Duplicate (P3L0307-DUPA)		**Source: 3L01002-28**		Prepared & Analyzed: 12/03/23						
% Moisture	4.0	0.1	%		4.0			0.00	20	
Batch P3L0508 - * DEFAULT PREP *** **										
Blank (P3L0508-BLK1)				Prepared: 12/05/23 Analyzed: 12/06/23						
Chloride	ND	1.00	mg/kg							
LCS (P3L0508-BS1)				Prepared & Analyzed: 12/05/23						
Chloride	18.7		mg/kg	20.0		93.4	90-110			
Calibration Check (P3L0508-CCV1)				Prepared & Analyzed: 12/05/23						
Chloride	19.1		mg/kg	20.0		95.5	90-110			
Calibration Check (P3L0508-CCV2)				Prepared: 12/05/23 Analyzed: 12/06/23						
Chloride	20.9		mg/kg	20.0		104	90-110			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0508 - * DEFAULT PREP *** **										
Matrix Spike (P3L0508-MS1)	**Source: 3L01001-88**			Prepared & Analyzed: 12/05/23						
Chloride	114		mg/kg	100	0.561	113	80-120			
Matrix Spike Dup (P3L0508-MSD1)	**Source: 3L01001-88**			Prepared & Analyzed: 12/05/23						
Chloride	104		mg/kg	100	0.561	104	80-120	8.87	20	
Batch P3L0509 - * DEFAULT PREP *** **										
Blank (P3L0509-BLK1)				Prepared: 12/05/23 Analyzed: 12/06/23						
Chloride	ND	1.00	mg/kg							
LCS (P3L0509-BS1)				Prepared: 12/05/23 Analyzed: 12/06/23						
Chloride	21.1		mg/kg	20.0		105	90-110			
LCS Dup (P3L0509-BSD1)				Prepared: 12/05/23 Analyzed: 12/06/23						
Chloride	24.6		mg/kg	20.0		123	90-110	15.6	10	
Calibration Check (P3L0509-CCV1)				Prepared: 12/05/23 Analyzed: 12/06/23						
Chloride	24.7		mg/kg	24.0		103	90-110			
Calibration Check (P3L0509-CCV2)				Prepared: 12/05/23 Analyzed: 12/06/23						
Chloride	24.8		mg/kg	24.0		103	90-110			
Matrix Spike (P3L0509-MS1)	**Source: 3L05005-01**			Prepared: 12/05/23 Analyzed: 12/06/23						
Chloride	108		mg/kg	100	1.27	107	80-120			
Matrix Spike (P3L0509-MS2)	**Source: 3L05007-03**			Prepared: 12/05/23 Analyzed: 12/06/23						
Chloride	129		mg/kg	100	18.3	111	80-120			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0509 - * DEFAULT PREP *** **										
Matrix Spike Dup (P3L0509-MSD1)	**Source: 3L05005-01**			Prepared: 12/05/23 Analyzed: 12/06/23						
Chloride	106		mg/kg	100	1.27	105	80-120	1.61	20	
Matrix Spike Dup (P3L0509-MSD2)	**Source: 3L05007-03**			Prepared: 12/05/23 Analyzed: 12/06/23						
Chloride	109		mg/kg	100	18.3	91.0	80-120	16.8	20	
Batch P3L0704 - * DEFAULT PREP *** **										
LCS (P3L0704-BS1)				Prepared: 12/07/23 Analyzed: 12/08/23						
Chloride	19.7		mg/kg	20.0		98.7	90-110			
LCS Dup (P3L0704-BSD1)				Prepared: 12/07/23 Analyzed: 12/08/23						
Chloride	20.5		mg/kg	20.0		103	90-110	4.03	10	
Calibration Check (P3L0704-CCV1)				Prepared: 12/07/23 Analyzed: 12/08/23						
Chloride	20.6		mg/kg	20.0		103	90-110			
Calibration Check (P3L0704-CCV2)				Prepared: 12/07/23 Analyzed: 12/08/23						
Chloride	20.3		mg/kg	20.0		101	90-110			
Matrix Spike (P3L0704-MS1)	**Source: 3L01002-15**			Prepared: 12/07/23 Analyzed: 12/08/23						
Chloride	117		mg/kg	100	10.7	106	80-120			
Matrix Spike (P3L0704-MS2)	**Source: 3L01002-25**			Prepared: 12/07/23 Analyzed: 12/08/23						
Chloride	109		mg/kg	100	3.98	105	80-120			
Matrix Spike Dup (P3L0704-MSD1)	**Source: 3L01002-15**			Prepared: 12/07/23 Analyzed: 12/08/23						
Chloride	116		mg/kg	100	10.7	105	80-120	0.488	20	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0704 - * DEFAULT PREP *** **										
Matrix Spike Dup (P3L0704-MSD2)	**Source: 3L01002-25**			Prepared: 12/07/23 Analyzed: 12/08/23						
Chloride	109		mg/kg	100	3.98	105	80-120	0.498	20	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Notes and Definitions

S-GC	Surrogate recovery outside of control limits. The data was accepted based on valid recovery of the remaining surrogate.
ROI	Received on Ice
QM-05	The spike recovery was outside acceptance limits for the MS and/or MSD due to matrix interference. The LCS and/or LCSD were within acceptance limits showing that the laboratory is in control and the data is acceptable.
BULK	Samples received in Bulk soil containers may be biased low in the nC6-C12 TPH Range
DET	Analyte DETECTED
ND	Analyte NOT DETECTED at or above the reporting limit
NR	Not Reported
dry	Sample results reported on a dry weight basis
RPD	Relative Percent Difference
LCS	Laboratory Control Spike
MS	Matrix Spike
Dup	Duplicate

Report Approved By: Brent Barron Date: 12/18/2023

Brent Barron, Laboratory Director/Technical Director

This material is intended only for the use of the individual (s) or entity to whom it is addressed, and may contain information that is privileged and confidential.

If you have received this material in error, please notify us immediately at 432-686-7235.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Page 474 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey Fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland Tx 79705
Telephone No: 432-557-0934 **Fax No:**
Sampler Signature: Jose Bellor

Project Name: Jalapeño
Project #: CDEV #11845
Project Loc: Lea Co, NM
PO #:
Report Format: [X] Standard [ ] TRRP [ ] NPDES
e-mail: Jamey@Tellusservices.com

(lab use only) ORDER #: 3L01002

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total #. of Containers	Preservation & # of Containers: Ice	HNO3	HCl	H2SO4	NaOH	Na2S2O3	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge	GW = Groundwater S=Soil/Solid	NP=Non-Potable Specify Other	Analyze For: TCLP: TPH: TX 1005 TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	STEX/TPH BOX	TPH/TEX BOX	Chloride: EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
1	BH-100@1.5	1.5	1.5	11-28-23	8:39		1	X								S						X	X	X		
2	BH-99@1.5	1.5	1.5	11-28-23	8:37		1	X								S										
3	BH-98@1.5	1.5	1.5	11-28-23	8:33		1	X								S										
4	BH-97@1.5	1.5	1.5	11-28-23	8:27		1	X								S										
5	BH-96@1.5	1.5	1.5	11-27-23	10:15		1	X								S										
6	BH-95@1.5				10:12		1	X								S										
7	BH-94@1.5				10:11		1	X								S										
8	BH-93@1.5				10:08		1	X								S										
9	BH-92@1.5				10:05		1	X								S										
10	BH-91@1.5				10:03		1	X								S										

Special Instructions:

Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL:	Date	Time
			Sara Mc	11/30/23	16:34

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N
by Sampler/Client Rep. ?		

by Courier? UPS DHL FedEx Lone Star

Temperature Upon Receipt: CF Q
Received: 10.0 °C Thermometer: L3
Adjusted: °C Factor:

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21

11 13

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

Page 475 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey Fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: Midland TX 79705
Telephone No: 432-557-0934 **Fax No:** _____
Sampler Signature: Jose Belloc

Project Name: Jalapeño
Project #: COEU #1845
Project Loc: Lea CO, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES
e-mail: Jamey@Tellusservices.com

(lab use only) **ORDER #:** 3L01002

(lab use only) SAMP #	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total #. of Containers	Preservation & # of Containers: Ice	HNO_3	HCl	H_2SO_4	NaOH	$Na_2S_2O_3$	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge	GW = Groundwater S=Soil/Solid	NP=Non-Potable Specify Other	Analyze For: TPH: TX 1005 TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX 8021	TPH TX1005 TX1006	Chlorides 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
11	106	BH 90 @ 1.5	1.5	1.5	11-27-23	9:58		1								S						X	X	X		
12	107	BH 89 @ 1.5				9:54																				
13	108	BH 88 @ 1.5				9:51																				
14	109	BH 87 @ 1.5				9:48																				
15	110	BH 86 @ 1.5				9:45																				
16	111	BH 85 @ 1.5				9:43																				
17	112	BH 84 @ 1.5				9:42																				
18	113	BH 83 @ 1.5				9:41																				
19	114	BH 82 @ 1.5				9:37																				
20	115	BH 81 @ 1.5				9:32																				

Special Instructions:

Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL:	Date	Time
			Sara Mc	11/30/23	16:34

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N

by Sampler/Client Rep. ? by Courier? UPS DHL FedEx Lone Star

Temperature Upon Receipt: CF0
Received: 10.0 °C Thermometer: L3
Adjusted: °C Factor:

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21

Page 1 of 2

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

Page 476 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST L: CH: W:

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey Fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: Midland TX 79705
Telephone No: 432 557-0934 Fax No:
Sampler Signature: Jose Bellor
Project Name: Jalapeño
Project #: COEN-#11845
Project Loc: LEA CO, NM
PO #:
Report Format: ☐ Standard ☐ TRRP ☐ NPDES
e-mail: Jamey@Tellusservices.com

(lab use only) ORDER #: 3L01002

	KEY (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total #. of Containers	Preservation & # of Containers: Ice	HNO_3	HCl	H_2SO_4	NaOH	$Na_2S_2O_3$	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge	GW = Groundwater S=Soil/Solid	NP=Non-Potable Specify Other	Analyze For: TPH: TX 1005 TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX 8021	TPH TX 1005	Chlorides EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
21	113	BH-80@1.5	1.5	1.5	11-27-23	9:29		1									S						X	X	X		
22	114	BH-79@1.5				9:27																					
23	115	BH-78@1.5				9:24																					
24	116	BH-77@1.5				9:23																					
25	117	BH-76@1.5				9:21																					
26	118	BH-75@1.5				9:19																					
7	119	BH-74@1.5				9:17																					
8	120	BH-73@1.5				9:16																					
9	121	BH-72@1.5				9:14																					
0	122	BH-71@1.5				9:11																					

Special Instructions:

Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL:	Date	Time
				11/30/23	16:34

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N

by Sampler/Client Rep. ? by Courier? UPS DHL FedEx Lone Star

Temperature Upon Receipt: Received: 10.0 °C Adjusted: °C Thermometer: CF3 Factor: 1.3

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21

Received by OCD: 9/20/2024 8:39:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

PERMIAN BASIN
ENVIRONMENTAL LAB, LP
1400 Rankin Hwy
Midland, TX 79701

PBELAB

Analytical Report

Prepared for:

Jamey Fowler

Tellus Consulting, LLC

4000 North Big Spring Street Suite 109

Midland, TX 79705

Project: Jalapeno

Project Number: CDEV #11845

Location: Lea County, NM

Lab Order Number: 3L01003

NELAP ACCREDITED TNI LABORATORY

Current Certification

Report Date: 12/18/23

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

ANALYTICAL REPORT FOR SAMPLES

Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
BH-192 @ 1.5	3L01003-01	Soil	11/30/23 11:12	11-30-2023 16:34
BH-193 @ 1.5	3L01003-02	Soil	11/30/23 08:15	11-30-2023 16:34
BH-194 @ 1.5	3L01003-03	Soil	11/30/23 08:17	11-30-2023 16:34
BH-195 @ 1.5	3L01003-04	Soil	11/30/23 08:21	11-30-2023 16:34
BH-196 @ 1.5	3L01003-05	Soil	11/30/23 08:24	11-30-2023 16:34
BH-197 @ 1.5	3L01003-06	Soil	11/30/23 08:25	11-30-2023 16:34
BH-198 @ 1.5	3L01003-07	Soil	11/30/23 08:28	11-30-2023 16:34
BH-199 @ 1.5	3L01003-08	Soil	11/30/23 08:29	11-30-2023 16:34
BH-200 @ 1.5	3L01003-09	Soil	11/30/23 08:32	11-30-2023 16:34
BH-201 @ 1.5	3L01003-10	Soil	11/30/23 08:34	11-30-2023 16:34
BH-202 @ 1.5	3L01003-11	Soil	11/30/23 08:35	11-30-2023 16:34
BH-203 @ 1.5	3L01003-12	Soil	11/30/23 08:37	11-30-2023 16:34
BH-204 @ 1.5	3L01003-13	Soil	11/30/23 08:40	11-30-2023 16:34
BH-205 @ 1.5	3L01003-14	Soil	11/30/23 08:42	11-30-2023 16:34
BH-206 @ 1.5	3L01003-15	Soil	11/30/23 08:45	11-30-2023 16:34
BH-207 @ 1.5	3L01003-16	Soil	11/30/23 08:47	11-30-2023 16:34
BH-208 @ 1.5	3L01003-17	Soil	11/30/23 08:50	11-30-2023 16:34
BH-209 @ 1.5	3L01003-18	Soil	11/30/23 08:51	11-30-2023 16:34
BH-210 @ 1.5	3L01003-19	Soil	11/30/23 08:53	11-30-2023 16:34
BH-211 @ 1.5	3L01003-20	Soil	11/30/23 08:55	11-30-2023 16:34
BH-216 @ 1.5	3L01003-21	Soil	11/30/23 09:07	11-30-2023 16:34
BH-217 @ 1.5	3L01003-22	Soil	11/30/23 09:10	11-30-2023 16:34
BH-218 @ 1.5	3L01003-23	Soil	11/30/23 09:12	11-30-2023 16:34
BH-219 @ 1.5	3L01003-24	Soil	11/30/23 09:15	11-30-2023 16:34
BH-220 @ 1.5	3L01003-25	Soil	11/30/23 09:18	11-30-2023 16:34
BH-221 @ 1.5	3L01003-26	Soil	11/30/23 09:20	11-30-2023 16:34
BH-222 @ 1.5	3L01003-27	Soil	11/30/23 09:22	11-30-2023 16:34
BH-223 @ 1.5	3L01003-28	Soil	11/30/23 09:23	11-30-2023 16:34
BH-224 @ 1.5	3L01003-29	Soil	11/30/23 09:24	11-30-2023 16:34
BH-225 @ 1.5	3L01003-30	Soil	11/30/23 09:26	11-30-2023 16:34
BH-226 @ 1.5	3L01003-31	Soil	11/30/23 09:27	11-30-2023 16:34
BH-227 @ 1.5	3L01003-32	Soil	11/30/23 09:30	11-30-2023 16:34
BH-228 @ 1.5	3L01003-33	Soil	11/30/23 09:32	11-30-2023 16:34
BH-229 @ 1.5	3L01003-34	Soil	11/30/23 09:33	11-30-2023 16:34

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

ANALYTICAL REPORT FOR SAMPLES

Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
BH-230 @ 1.5	3L01003-35	Soil	11/30/23 09:35	11-30-2023 16:34
BH-231 @ 1.5	3L01003-36	Soil	11/30/23 09:36	11-30-2023 16:34
BH-232 @ 1.5	3L01003-37	Soil	11/30/23 09:38	11-30-2023 16:34
BH-233 @ 1.5	3L01003-38	Soil	11/30/23 09:40	11-30-2023 16:34
BH-234 @ 1.5	3L01003-39	Soil	11/30/23 09:41	11-30-2023 16:34
BH-235 @ 1.5	3L01003-40	Soil	11/30/23 09:44	11-30-2023 16:34
BH-236 @ 1.5	3L01003-41	Soil	11/30/23 09:47	11-30-2023 16:34
BH-237 @ 1.5	3L01003-42	Soil	11/30/23 09:50	11-30-2023 16:34
BH-238 @ 1.5	3L01003-43	Soil	11/30/23 09:52	11-30-2023 16:34
BH-212 @ 1.5	3L01003-44	Soil	11/30/23 08:56	11-30-2023 16:34
BH-213 @ 1.5	3L01003-45	Soil	11/30/23 08:58	11-30-2023 16:34
BH-214 @ 1.5	3L01003-46	Soil	11/30/23 09:02	11-30-2023 16:34
BH-215 @ 1.5	3L01003-47	Soil	11/30/23 09:05	11-30-2023 16:34

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-192 @ 1.5

3L01003-01 (Soil)

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
Permian Basin Environmental Lab, L.P.									
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 14:26	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 14:26	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 14:26	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 14:26	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 14:26	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*113 %*	*80-120*		*P3L1106*	*12/11/23 09:12*	*12/11/23 14:26*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*92.8 %*	*80-120*		*P3L1106*	*12/11/23 09:12*	*12/11/23 14:26*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/11/23 09:12	12/11/23 14:26	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	12/11/23 09:12	12/11/23 14:26	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 18:10	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 18:10	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 18:10	TPH 8015M	
Surrogate: 1-Chlorooctane		*89.1 %*	*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 18:10*	*TPH 8015M*	
Surrogate: o-Terphenyl		*101 %*	*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 18:10*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	12/04/23 14:29	12/07/23 18:10	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**99.4**	1.06	mg/kg dry	1	P3L0704	12/07/23 11:11	12/08/23 17:25	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-193 @ 1.5

3L01003-02 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 19:36	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 19:36	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 19:36	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 19:36	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 19:36	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.2 %*	*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 19:36*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 19:36*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 19:36	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 19:36	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 18:34	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 18:34	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 18:34	TPH 8015M	
Surrogate: 1-Chlorooctane		*84.7 %*	*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 18:34*	*TPH 8015M*	
Surrogate: o-Terphenyl		*95.1 %*	*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 18:34*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/04/23 14:29	12/07/23 18:34	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**182**	1.03	mg/kg dry	1	P3L0705	12/07/23 11:15	12/11/23 16:59	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-194 @ 1.5

3L01003-03 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 20:00	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 20:00	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 20:00	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 20:00	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 20:00	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*118 %*	*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 20:00*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.5 %*	*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 20:00*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 20:00	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 20:00	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 18:58	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 18:58	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 18:58	TPH 8015M	
Surrogate: 1-Chlorooctane		*98.3 %*	*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 18:58*	*TPH 8015M*	
Surrogate: o-Terphenyl		*110 %*	*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 18:58*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/04/23 14:29	12/07/23 18:58	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**182**	1.03	mg/kg dry	1	P3L0705	12/07/23 11:15	12/11/23 17:43	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-195 @ 1.5

3L01003-04 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 20:25	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 20:25	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 20:25	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 20:25	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 20:25	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*95.8 %*	*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 20:25*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 20:25*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 20:25	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 20:25	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 19:22	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 19:22	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 19:22	TPH 8015M	
Surrogate: 1-Chlorooctane		*91.4 %*	*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 19:22*	*TPH 8015M*	
Surrogate: o-Terphenyl		*102 %*	*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 19:22*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/04/23 14:29	12/07/23 19:22	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**136**	1.05	mg/kg dry	1	P3L0705	12/07/23 11:15	12/11/23 17:57	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-196 @ 1.5

3L01003-05 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 20:49	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 20:49	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 20:49	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 20:49	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 20:49	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 20:49*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.9 %*	*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 20:49*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 20:49	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 20:49	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 19:46	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 19:46	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 19:46	TPH 8015M	
Surrogate: 1-Chlorooctane		*93.6 %*	*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 19:46*	*TPH 8015M*	
Surrogate: o-Terphenyl		*105 %*	*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 19:46*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/04/23 14:29	12/07/23 19:46	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**42.4**	1.04	mg/kg dry	1	P3L0705	12/07/23 11:15	12/11/23 18:12	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-197 @ 1.5

3L01003-06 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 21:13	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 21:13	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 21:13	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 21:13	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 21:13	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 21:13*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.0 %*	*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 21:13*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 21:13	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 21:13	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 20:10	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 20:10	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 20:10	TPH 8015M	
Surrogate: 1-Chlorooctane		*96.3 %*	*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 20:10*	*TPH 8015M*	
Surrogate: o-Terphenyl		*107 %*	*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 20:10*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/04/23 14:29	12/07/23 20:10	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**20.2**	1.04	mg/kg dry	1	P3L0705	12/07/23 11:15	12/11/23 18:26	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-198 @ 1.5

3L01003-07 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 21:38	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 21:38	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 21:38	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 21:38	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 21:38	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*95.9 %*		*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 21:38*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*116 %*		*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 21:38*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 21:38	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 21:38	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 20:33	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 20:33	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 20:33	TPH 8015M	
Surrogate: 1-Chlorooctane	*93.9 %*		*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 20:33*	*TPH 8015M*	
Surrogate: o-Terphenyl	*105 %*		*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 20:33*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/04/23 14:29	12/07/23 20:33	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**31.9**	1.05	mg/kg dry	1	P3L0705	12/07/23 11:15	12/11/23 18:41	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-199 @ 1.5

3L01003-08 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00108	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 22:02	EPA 8021B	
Toluene	ND	0.00108	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 22:02	EPA 8021B	
Ethylbenzene	ND	0.00108	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 22:02	EPA 8021B	
Xylene (p/m)	ND	0.00215	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 22:02	EPA 8021B	
Xylene (o)	ND	0.00108	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 22:02	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 22:02*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.3 %*	*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 22:02*	*EPA 8021B*	
Xylenes (total)	ND	0.00215	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 22:02	EPA 8021B	
Total BTEX	ND	0.00108	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 22:02	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.9	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 20:57	TPH 8015M	
>C12-C28	ND	26.9	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 20:57	TPH 8015M	
>C28-C35	ND	26.9	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 20:57	TPH 8015M	
Surrogate: 1-Chlorooctane		*94.6 %*	*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 20:57*	*TPH 8015M*	
Surrogate: o-Terphenyl		*106 %*	*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 20:57*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.9	mg/kg dry	1	[CALC]	12/04/23 14:29	12/07/23 20:57	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**25.3**	1.08	mg/kg dry	1	P3L0705	12/07/23 11:15	12/11/23 18:55	EPA 300.0	
% Moisture	**7.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-200 @ 1.5

3L01003-09 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 22:26	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 22:26	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 22:26	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 22:26	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 22:26	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 22:26*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.8 %*	*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 22:26*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 22:26	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 22:26	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 21:21	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 21:21	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 21:21	TPH 8015M	
Surrogate: 1-Chlorooctane		*89.4 %*	*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 21:21*	*TPH 8015M*	
Surrogate: o-Terphenyl		*99.0 %*	*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 21:21*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/04/23 14:29	12/07/23 21:21	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**24.1**	1.05	mg/kg dry	1	P3L0705	12/07/23 11:15	12/11/23 19:09	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-201 @ 1.5

3L01003-10 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 22:51	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 22:51	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 22:51	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 22:51	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 22:51	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.0 %*	*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 22:51*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 22:51*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 22:51	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 22:51	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 21:45	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 21:45	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0408	12/04/23 14:29	12/07/23 21:45	TPH 8015M	
Surrogate: 1-Chlorooctane		*99.3 %*	*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 21:45*	*TPH 8015M*	
Surrogate: o-Terphenyl		*109 %*	*70-130*		*P3L0408*	*12/04/23 14:29*	*12/07/23 21:45*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/04/23 14:29	12/07/23 21:45	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**25.7**	1.04	mg/kg dry	1	P3L0705	12/07/23 11:15	12/11/23 19:25	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-202 @ 1.5

3L01003-11 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 23:15	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 23:15	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 23:15	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 23:15	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L0804	12/08/23 09:32	12/08/23 23:15	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 23:15*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.0 %*	*80-120*		*P3L0804*	*12/08/23 09:32*	*12/08/23 23:15*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 23:15	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/08/23 09:32	12/08/23 23:15	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*90.5 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*94.6 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/04/23 14:31	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**72.9**	1.05	mg/kg dry	1	P3L0705	12/07/23 11:15	12/11/23 19:39	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-203 @ 1.5

3L01003-12 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 02:30	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 02:30	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 02:30	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 02:30	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 02:30	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0805*	*12/08/23 09:36*	*12/09/23 02:30*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.7 %*	*80-120*		*P3L0805*	*12/08/23 09:36*	*12/09/23 02:30*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/08/23 09:36	12/09/23 02:30	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/08/23 09:36	12/09/23 02:30	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*102 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*104 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/04/23 14:31	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**56.3**	1.05	mg/kg dry	1	P3L0705	12/07/23 11:15	12/11/23 20:24	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-204 @ 1.5

3L01003-13 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 02:54	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 02:54	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 02:54	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 02:54	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 02:54	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*95.9 %*	*80-120*		*P3L0805*	*12/08/23 09:36*	*12/09/23 02:54*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0805*	*12/08/23 09:36*	*12/09/23 02:54*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/08/23 09:36	12/09/23 02:54	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/08/23 09:36	12/09/23 02:54	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*87.4 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*93.2 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/04/23 14:31	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**24.0**	1.04	mg/kg dry	1	P3L0705	12/07/23 11:15	12/11/23 21:08	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-205 @ 1.5

3L01003-14 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 03:19	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 03:19	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 03:19	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 03:19	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 03:19	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*95.8 %*	*80-120*		*P3L0805*	*12/08/23 09:36*	*12/09/23 03:19*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0805*	*12/08/23 09:36*	*12/09/23 03:19*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/08/23 09:36	12/09/23 03:19	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/08/23 09:36	12/09/23 03:19	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*99.7 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*106 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/04/23 14:31	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**99.6**	1.05	mg/kg dry	1	P3L0705	12/07/23 11:15	12/11/23 21:22	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-206 @ 1.5

3L01003-15 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 03:43	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 03:43	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 03:43	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 03:43	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 03:43	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0805*	*12/08/23 09:36*	*12/09/23 03:43*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.8 %*	*80-120*		*P3L0805*	*12/08/23 09:36*	*12/09/23 03:43*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/08/23 09:36	12/09/23 03:43	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/08/23 09:36	12/09/23 03:43	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*90.5 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*95.3 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/04/23 14:31	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**21.6**	1.05	mg/kg dry	1	P3L0705	12/07/23 11:15	12/11/23 21:37	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-207 @ 1.5

3L01003-16 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 04:08	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 04:08	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 04:08	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 04:08	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 04:08	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*95.8 %*	*80-120*		*P3L0805*	*12/08/23 09:36*	*12/09/23 04:08*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0805*	*12/08/23 09:36*	*12/09/23 04:08*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/08/23 09:36	12/09/23 04:08	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	12/08/23 09:36	12/09/23 04:08	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*96.5 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*102 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	12/04/23 14:31	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**214**	1.06	mg/kg dry	1	P3L0705	12/07/23 11:15	12/11/23 21:52	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-208 @ 1.5

3L01003-17 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 04:32	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 04:32	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 04:32	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 04:32	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 04:32	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0805*	*12/08/23 09:36*	*12/09/23 04:32*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.4 %*	*80-120*		*P3L0805*	*12/08/23 09:36*	*12/09/23 04:32*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/08/23 09:36	12/09/23 04:32	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/08/23 09:36	12/09/23 04:32	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*91.3 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*96.4 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/04/23 14:31	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**33.7**	1.03	mg/kg dry	1	P3L0705	12/07/23 11:15	12/11/23 22:07	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-209 @ 1.5

3L01003-18 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 04:56	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 04:56	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 04:56	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 04:56	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 04:56	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.1 %*	*80-120*		*P3L0805*	*12/08/23 09:36*	*12/09/23 04:56*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0805*	*12/08/23 09:36*	*12/09/23 04:56*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/08/23 09:36	12/09/23 04:56	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/08/23 09:36	12/09/23 04:56	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*94.4 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*96.6 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/04/23 14:31	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**16.8**	1.05	mg/kg dry	1	P3L0705	12/07/23 11:15	12/11/23 22:22	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-210 @ 1.5

3L01003-19 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 05:21	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 05:21	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 05:21	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 05:21	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 05:21	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0805*	*12/08/23 09:36*	*12/09/23 05:21*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.9 %*	*80-120*		*P3L0805*	*12/08/23 09:36*	*12/09/23 05:21*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/08/23 09:36	12/09/23 05:21	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/08/23 09:36	12/09/23 05:21	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*87.3 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*93.7 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/04/23 14:31	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**186**	1.04	mg/kg dry	1	P3L0705	12/07/23 11:15	12/11/23 22:36	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-211 @ 1.5

3L01003-20 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 05:45	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 05:45	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 05:45	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 05:45	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 05:45	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0805*	*12/08/23 09:36*	*12/09/23 05:45*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.0 %*	*80-120*		*P3L0805*	*12/08/23 09:36*	*12/09/23 05:45*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/08/23 09:36	12/09/23 05:45	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	12/08/23 09:36	12/09/23 05:45	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*96.4 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*104 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	12/04/23 14:31	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**59.8**	1.06	mg/kg dry	1	P3L0705	12/07/23 11:15	12/11/23 22:51	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-216 @ 1.5

3L01003-21 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 06:10	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 06:10	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 06:10	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 06:10	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 06:10	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0805*	*12/08/23 09:36*	*12/09/23 06:10*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.1 %*	*80-120*		*P3L0805*	*12/08/23 09:36*	*12/09/23 06:10*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/08/23 09:36	12/09/23 06:10	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/08/23 09:36	12/09/23 06:10	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*85.7 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*96.6 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/04/23 14:31	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**17.1**	1.04	mg/kg dry	1	P3L0705	12/07/23 11:15	12/11/23 23:05	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-217 @ 1.5

3L01003-22 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 07:23	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 07:23	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 07:23	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 07:23	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 07:23	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.7 %*	*80-120*		*P3L0805*	*12/08/23 09:36*	*12/09/23 07:23*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0805*	*12/08/23 09:36*	*12/09/23 07:23*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/08/23 09:36	12/09/23 07:23	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	12/08/23 09:36	12/09/23 07:23	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*93.1 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*106 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	12/04/23 14:31	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**303**	1.06	mg/kg dry	1	P3L0706	12/07/23 16:26	12/12/23 11:48	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-218 @ 1.5

3L01003-23 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 07:47	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 07:47	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 07:47	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 07:47	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 07:47	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0805*	*12/08/23 09:36*	*12/09/23 07:47*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.4 %*	*80-120*		*P3L0805*	*12/08/23 09:36*	*12/09/23 07:47*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/08/23 09:36	12/09/23 07:47	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/08/23 09:36	12/09/23 07:47	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*92.0 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*103 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/04/23 14:31	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**54.1**	1.03	mg/kg dry	1	P3L0706	12/07/23 16:26	12/12/23 12:33	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-219 @ 1.5

3L01003-24 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 08:11	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 08:11	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 08:11	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 08:11	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 08:11	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.1 %*	*80-120*		*P3L0805*	*12/08/23 09:36*	*12/09/23 08:11*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*118 %*	*80-120*		*P3L0805*	*12/08/23 09:36*	*12/09/23 08:11*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/08/23 09:36	12/09/23 08:11	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/08/23 09:36	12/09/23 08:11	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*95.3 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*104 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/04/23 14:31	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**240**	1.05	mg/kg dry	1	P3L0706	12/07/23 16:26	12/12/23 12:48	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-220 @ 1.5

3L01003-25 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 08:36	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 08:36	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 08:36	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 08:36	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 08:36	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.3 %*	*80-120*		*P3L0805*	*12/08/23 09:36*	*12/09/23 08:36*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0805*	*12/08/23 09:36*	*12/09/23 08:36*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/08/23 09:36	12/09/23 08:36	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/08/23 09:36	12/09/23 08:36	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*81.4 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*89.0 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/04/23 14:31	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**27.0**	1.04	mg/kg dry	1	P3L0706	12/07/23 16:26	12/12/23 13:03	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-221 @ 1.5

3L01003-26 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 09:00	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 09:00	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 09:00	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 09:00	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 09:00	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0805*	*12/08/23 09:36*	*12/09/23 09:00*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.4 %*	*80-120*		*P3L0805*	*12/08/23 09:36*	*12/09/23 09:00*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/08/23 09:36	12/09/23 09:00	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/08/23 09:36	12/09/23 09:00	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*95.1 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*109 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/04/23 14:31	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**74.8**	1.05	mg/kg dry	1	P3L0706	12/07/23 16:26	12/12/23 13:18	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-222 @ 1.5

3L01003-27 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 09:24	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 09:24	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 09:24	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 09:24	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 09:24	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0805*	*12/08/23 09:36*	*12/09/23 09:24*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.5 %*	*80-120*		*P3L0805*	*12/08/23 09:36*	*12/09/23 09:24*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/08/23 09:36	12/09/23 09:24	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/08/23 09:36	12/09/23 09:24	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*91.4 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*103 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/04/23 14:31	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**23.4**	1.04	mg/kg dry	1	P3L0706	12/07/23 16:26	12/12/23 13:33	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-223 @ 1.5

3L01003-28 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 09:49	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 09:49	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 09:49	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 09:49	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 09:49	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.3 %*	*80-120*		*P3L0805*	*12/08/23 09:36*	*12/09/23 09:49*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0805*	*12/08/23 09:36*	*12/09/23 09:49*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/08/23 09:36	12/09/23 09:49	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/08/23 09:36	12/09/23 09:49	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*95.6 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*110 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/04/23 14:31	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**70.3**	1.04	mg/kg dry	1	P3L0706	12/07/23 16:26	12/12/23 13:48	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-224 @ 1.5

3L01003-29 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 10:13	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 10:13	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 10:13	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 10:13	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 10:13	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.4 %*	*80-120*		*P3L0805*	*12/08/23 09:36*	*12/09/23 10:13*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L0805*	*12/08/23 09:36*	*12/09/23 10:13*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/08/23 09:36	12/09/23 10:13	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/08/23 09:36	12/09/23 10:13	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*94.0 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*97.8 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/04/23 14:31	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**50.3**	1.05	mg/kg dry	1	P3L0706	12/07/23 16:26	12/12/23 14:03	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-225 @ 1.5

3L01003-30 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 10:37	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 10:37	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 10:37	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 10:37	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L0805	12/08/23 09:36	12/09/23 10:37	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L0805*	*12/08/23 09:36*	*12/09/23 10:37*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.1 %*	*80-120*		*P3L0805*	*12/08/23 09:36*	*12/09/23 10:37*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/08/23 09:36	12/09/23 10:37	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/08/23 09:36	12/09/23 10:37	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0409	12/04/23 14:31	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*96.1 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*106 %*	*70-130*		*P3L0409*	*12/04/23 14:31*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/04/23 14:31	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**22.7**	1.05	mg/kg dry	1	P3L0706	12/07/23 16:26	12/12/23 14:18	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-226 @ 1.5

3L01003-31 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00119	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 03:17	EPA 8021B	
Toluene	ND	0.00119	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 03:17	EPA 8021B	
Ethylbenzene	ND	0.00119	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 03:17	EPA 8021B	
Xylene (p/m)	ND	0.00238	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 03:17	EPA 8021B	
Xylene (o)	ND	0.00119	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 03:17	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L1303*	*12/13/23 09:44*	*12/14/23 03:17*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*93.1 %*	*80-120*		*P3L1303*	*12/13/23 09:44*	*12/14/23 03:17*	*EPA 8021B*	
Xylenes (total)	ND	0.00238	mg/kg dry	1	[CALC]	12/13/23 09:44	12/14/23 03:17	EPA 8021B	
Total BTEX	ND	0.00119	mg/kg dry	1	[CALC]	12/13/23 09:44	12/14/23 03:17	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	29.8	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	29.8	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	29.8	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*80.0 %*	*70-130*		*P3L0410*	*12/04/23 14:32*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*90.2 %*	*70-130*		*P3L0410*	*12/04/23 14:32*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	29.8	mg/kg dry	1	[CALC]	12/04/23 14:32	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**46.8**	1.19	mg/kg dry	1	P3L0706	12/07/23 16:26	12/12/23 14:32	EPA 300.0	
% Moisture	**16.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-227 @ 1.5

3L01003-32 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00109	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 14:50	EPA 8021B	
Toluene	ND	0.00109	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 14:50	EPA 8021B	
Ethylbenzene	ND	0.00109	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 14:50	EPA 8021B	
Xylene (p/m)	ND	0.00217	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 14:50	EPA 8021B	
Xylene (o)	ND	0.00109	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 14:50	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*92.9 %*	*80-120*		*P3L1106*	*12/11/23 09:12*	*12/11/23 14:50*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*114 %*	*80-120*		*P3L1106*	*12/11/23 09:12*	*12/11/23 14:50*	*EPA 8021B*	
Xylenes (total)	ND	0.00217	mg/kg dry	1	[CALC]	12/11/23 09:12	12/11/23 14:50	EPA 8021B	
Total BTEX	ND	0.00109	mg/kg dry	1	[CALC]	12/11/23 09:12	12/11/23 14:50	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.2	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	27.2	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	27.2	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*77.8 %*	*70-130*		*P3L0410*	*12/04/23 14:32*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*87.0 %*	*70-130*		*P3L0410*	*12/04/23 14:32*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.2	mg/kg dry	1	[CALC]	12/04/23 14:32	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**46.2**	1.09	mg/kg dry	1	P3L0706	12/07/23 16:26	12/12/23 15:39	EPA 300.0	
% Moisture	**8.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-228 @ 1.5

3L01003-33 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 15:15	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 15:15	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 15:15	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 15:15	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 15:15	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*92.8 %*	*80-120*		*P3L1106*	*12/11/23 09:12*	*12/11/23 15:15*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*114 %*	*80-120*		*P3L1106*	*12/11/23 09:12*	*12/11/23 15:15*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/11/23 09:12	12/11/23 15:15	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/11/23 09:12	12/11/23 15:15	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*80.9 %*	*70-130*		*P3L0410*	*12/04/23 14:32*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*88.0 %*	*70-130*		*P3L0410*	*12/04/23 14:32*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/04/23 14:32	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**43.5**	1.05	mg/kg dry	1	P3L0706	12/07/23 16:26	12/12/23 16:24	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-229 @ 1.5

3L01003-34 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00109	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 15:39	EPA 8021B	
Toluene	ND	0.00109	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 15:39	EPA 8021B	
Ethylbenzene	ND	0.00109	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 15:39	EPA 8021B	
Xylene (p/m)	ND	0.00217	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 15:39	EPA 8021B	
Xylene (o)	ND	0.00109	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 15:39	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*114 %*	*80-120*		*P3L1106*	*12/11/23 09:12*	*12/11/23 15:39*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*93.1 %*	*80-120*		*P3L1106*	*12/11/23 09:12*	*12/11/23 15:39*	*EPA 8021B*	
Xylenes (total)	ND	0.00217	mg/kg dry	1	[CALC]	12/11/23 09:12	12/11/23 15:39	EPA 8021B	
Total BTEX	ND	0.00109	mg/kg dry	1	[CALC]	12/11/23 09:12	12/11/23 15:39	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.2	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	27.2	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	27.2	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*101 %*	*70-130*		*P3L0410*	*12/04/23 14:32*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*111 %*	*70-130*		*P3L0410*	*12/04/23 14:32*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.2	mg/kg dry	1	[CALC]	12/04/23 14:32	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**42.6**	1.09	mg/kg dry	1	P3L0706	12/07/23 16:26	12/12/23 16:39	EPA 300.0	
% Moisture	**8.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-230 @ 1.5

3L01003-35 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00111	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 16:04	EPA 8021B	
Toluene	ND	0.00111	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 16:04	EPA 8021B	
Ethylbenzene	ND	0.00111	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 16:04	EPA 8021B	
Xylene (p/m)	ND	0.00222	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 16:04	EPA 8021B	
Xylene (o)	ND	0.00111	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 16:04	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*93.5 %*	*80-120*		*P3L1106*	*12/11/23 09:12*	*12/11/23 16:04*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*113 %*	*80-120*		*P3L1106*	*12/11/23 09:12*	*12/11/23 16:04*	*EPA 8021B*	
Xylenes (total)	ND	0.00222	mg/kg dry	1	[CALC]	12/11/23 09:12	12/11/23 16:04	EPA 8021B	
Total BTEX	ND	0.00111	mg/kg dry	1	[CALC]	12/11/23 09:12	12/11/23 16:04	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.8	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	27.8	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	27.8	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*101 %*	*70-130*		*P3L0410*	*12/04/23 14:32*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*112 %*	*70-130*		*P3L0410*	*12/04/23 14:32*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.8	mg/kg dry	1	[CALC]	12/04/23 14:32	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**72.9**	1.11	mg/kg dry	1	P3L0706	12/07/23 16:26	12/12/23 16:54	EPA 300.0	
% Moisture	**10.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-231 @ 1.5

3L01003-36 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00108	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 16:28	EPA 8021B	
Toluene	ND	0.00108	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 16:28	EPA 8021B	
Ethylbenzene	ND	0.00108	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 16:28	EPA 8021B	
Xylene (p/m)	ND	0.00215	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 16:28	EPA 8021B	
Xylene (o)	ND	0.00108	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 16:28	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*93.4 %*	*80-120*		*P3L1106*	*12/11/23 09:12*	*12/11/23 16:28*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*113 %*	*80-120*		*P3L1106*	*12/11/23 09:12*	*12/11/23 16:28*	*EPA 8021B*	
Xylenes (total)	ND	0.00215	mg/kg dry	1	[CALC]	12/11/23 09:12	12/11/23 16:28	EPA 8021B	
Total BTEX	ND	0.00108	mg/kg dry	1	[CALC]	12/11/23 09:12	12/11/23 16:28	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.9	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	26.9	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	26.9	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*84.3 %*	*70-130*		*P3L0410*	*12/04/23 14:32*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*94.5 %*	*70-130*		*P3L0410*	*12/04/23 14:32*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.9	mg/kg dry	1	[CALC]	12/04/23 14:32	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**361**	1.08	mg/kg dry	1	P3L0706	12/07/23 16:26	12/12/23 17:09	EPA 300.0	
% Moisture	**7.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-232 @ 1.5

3L01003-37 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 16:52	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 16:52	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 16:52	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 16:52	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 16:52	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*113 %*	*80-120*		*P3L1106*	*12/11/23 09:12*	*12/11/23 16:52*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*93.3 %*	*80-120*		*P3L1106*	*12/11/23 09:12*	*12/11/23 16:52*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/11/23 09:12	12/11/23 16:52	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/11/23 09:12	12/11/23 16:52	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*95.0 %*	*70-130*		*P3L0410*	*12/04/23 14:32*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*105 %*	*70-130*		*P3L0410*	*12/04/23 14:32*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/04/23 14:32	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**19.0**	1.03	mg/kg dry	1	P3L0706	12/07/23 16:26	12/12/23 17:23	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-233 @ 1.5

3L01003-38 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 17:17	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 17:17	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 17:17	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 17:17	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 17:17	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*114 %*	*80-120*		*P3L1106*	*12/11/23 09:12*	*12/11/23 17:17*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*93.9 %*	*80-120*		*P3L1106*	*12/11/23 09:12*	*12/11/23 17:17*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/11/23 09:12	12/11/23 17:17	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/11/23 09:12	12/11/23 17:17	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*86.9 %*	*70-130*		*P3L0410*	*12/04/23 14:32*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*93.3 %*	*70-130*		*P3L0410*	*12/04/23 14:32*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/04/23 14:32	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**158**	1.03	mg/kg dry	1	P3L0706	12/07/23 16:26	12/12/23 17:37	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-234 @ 1.5

3L01003-39 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 17:41	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 17:41	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 17:41	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 17:41	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 17:41	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*93.8 %*	*80-120*		*P3L1106*	*12/11/23 09:12*	*12/11/23 17:41*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*114 %*	*80-120*		*P3L1106*	*12/11/23 09:12*	*12/11/23 17:41*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/11/23 09:12	12/11/23 17:41	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/11/23 09:12	12/11/23 17:41	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*97.4 %*	*70-130*		*P3L0410*	*12/04/23 14:32*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*106 %*	*70-130*		*P3L0410*	*12/04/23 14:32*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/04/23 14:32	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**32.7**	1.03	mg/kg dry	1	P3L0706	12/07/23 16:26	12/12/23 17:53	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-235 @ 1.5

3L01003-40 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 18:06	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 18:06	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 18:06	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 18:06	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 18:06	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*94.1 %*	*80-120*		*P3L1106*	*12/11/23 09:12*	*12/11/23 18:06*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L1106*	*12/11/23 09:12*	*12/11/23 18:06*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/11/23 09:12	12/11/23 18:06	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/11/23 09:12	12/11/23 18:06	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*95.2 %*	*70-130*		*P3L0410*	*12/04/23 14:32*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*99.7 %*	*70-130*		*P3L0410*	*12/04/23 14:32*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/04/23 14:32	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**33.1**	1.05	mg/kg dry	1	P3L0706	12/07/23 16:26	12/12/23 18:07	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-236 @ 1.5

3L01003-41 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 19:18	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 19:18	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 19:18	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 19:18	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 19:18	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*94.6 %*	*80-120*		*P3L1106*	*12/11/23 09:12*	*12/11/23 19:18*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L1106*	*12/11/23 09:12*	*12/11/23 19:18*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/11/23 09:12	12/11/23 19:18	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/11/23 09:12	12/11/23 19:18	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*99.1 %*	*70-130*		*P3L0410*	*12/04/23 14:32*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*104 %*	*70-130*		*P3L0410*	*12/04/23 14:32*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/04/23 14:32	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**16.9**	1.04	mg/kg dry	1	P3L0706	12/07/23 16:26	12/12/23 18:22	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-237 @ 1.5

3L01003-42 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 19:43	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 19:43	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 19:43	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 19:43	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 19:43	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*115 %*	*80-120*		*P3L1106*	*12/11/23 09:12*	*12/11/23 19:43*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*93.8 %*	*80-120*		*P3L1106*	*12/11/23 09:12*	*12/11/23 19:43*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/11/23 09:12	12/11/23 19:43	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/11/23 09:12	12/11/23 19:43	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*87.5 %*	*70-130*		*P3L0410*	*12/04/23 14:32*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*85.8 %*	*70-130*		*P3L0410*	*12/04/23 14:32*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/04/23 14:32	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**200**	1.05	mg/kg dry	1	P3L0707	12/07/23 16:29	12/08/23 18:51	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-238 @ 1.5

3L01003-43 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 20:07	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 20:07	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 20:07	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 20:07	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 20:07	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*94.5 %*	*80-120*		*P3L1106*	*12/11/23 09:12*	*12/11/23 20:07*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L1106*	*12/11/23 09:12*	*12/11/23 20:07*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/11/23 09:12	12/11/23 20:07	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/11/23 09:12	12/11/23 20:07	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*85.0 %*	*70-130*		*P3L0410*	*12/04/23 14:32*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*90.7 %*	*70-130*		*P3L0410*	*12/04/23 14:32*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/04/23 14:32	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**68.9**	1.04	mg/kg dry	1	P3L0707	12/07/23 16:29	12/08/23 19:34	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-212 @ 1.5

3L01003-44 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 20:31	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 20:31	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 20:31	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 20:31	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 20:31	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L1106*	*12/11/23 09:12*	*12/11/23 20:31*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*94.8 %*	*80-120*		*P3L1106*	*12/11/23 09:12*	*12/11/23 20:31*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/11/23 09:12	12/11/23 20:31	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/11/23 09:12	12/11/23 20:31	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*96.1 %*	*70-130*		*P3L0410*	*12/04/23 14:32*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*101 %*	*70-130*		*P3L0410*	*12/04/23 14:32*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/04/23 14:32	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**82.5**	1.03	mg/kg dry	1	P3L0812	12/08/23 16:03	12/14/23 14:25	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-213 @ 1.5

3L01003-45 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 20:55	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 20:55	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 20:55	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 20:55	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 20:55	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*94.5 %*	*80-120*		*P3L1106*	*12/11/23 09:12*	*12/11/23 20:55*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L1106*	*12/11/23 09:12*	*12/11/23 20:55*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/11/23 09:12	12/11/23 20:55	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/11/23 09:12	12/11/23 20:55	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*92.1 %*	*70-130*		*P3L0410*	*12/04/23 14:32*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*99.2 %*	*70-130*		*P3L0410*	*12/04/23 14:32*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/04/23 14:32	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**41.8**	1.03	mg/kg dry	1	P3L0811	12/08/23 15:55	12/13/23 16:51	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-214 @ 1.5

3L01003-46 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 21:20	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 21:20	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 21:20	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 21:20	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 21:20	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L1106*	*12/11/23 09:12*	*12/11/23 21:20*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*94.8 %*	*80-120*		*P3L1106*	*12/11/23 09:12*	*12/11/23 21:20*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/11/23 09:12	12/11/23 21:20	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/11/23 09:12	12/11/23 21:20	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*91.8 %*	*70-130*		*P3L0410*	*12/04/23 14:32*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*97.2 %*	*70-130*		*P3L0410*	*12/04/23 14:32*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/04/23 14:32	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**286**	1.05	mg/kg dry	1	P3L0811	12/08/23 15:55	12/13/23 17:36	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-215 @ 1.5

3L01003-47 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 21:44	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 21:44	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 21:44	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 21:44	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1106	12/11/23 09:12	12/11/23 21:44	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L1106*	*12/11/23 09:12*	*12/11/23 21:44*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*95.0 %*	*80-120*		*P3L1106*	*12/11/23 09:12*	*12/11/23 21:44*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/11/23 09:12	12/11/23 21:44	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/11/23 09:12	12/11/23 21:44	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0410	12/04/23 14:32	12/05/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*81.4 %*	*70-130*		*P3L0410*	*12/04/23 14:32*	*12/05/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*87.3 %*	*70-130*		*P3L0410*	*12/04/23 14:32*	*12/05/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/04/23 14:32	12/05/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**158**	1.04	mg/kg dry	1	P3L0812	12/08/23 16:03	12/14/23 13:20	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0402	12/04/23 11:01	12/04/23 11:08	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0804 - * DEFAULT PREP *** **										
Blank (P3L0804-BLK1)				Prepared & Analyzed: 12/08/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 4-Bromofluorobenzene	*0.138*		"	*0.120*		*115*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.113*		"	*0.120*		*94.6*	*80-120*			
LCS (P3L0804-BS1)				Prepared & Analyzed: 12/08/23						
Benzene	0.0962	0.00100	mg/kg	0.100		96.2	80-120			
Toluene	0.0967	0.00100	"	0.100		96.7	80-120			
Ethylbenzene	0.110	0.00100	"	0.100		110	80-120			
Xylene (p/m)	0.212	0.00200	"	0.200		106	80-120			
Xylene (o)	0.0983	0.00100	"	0.100		98.3	80-120			
Surrogate: 4-Bromofluorobenzene	*0.133*		"	*0.120*		*111*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*95.3*	*80-120*			
LCS Dup (P3L0804-BSD1)				Prepared & Analyzed: 12/08/23						
Benzene	0.0973	0.00100	mg/kg	0.100		97.3	80-120	1.10	20	
Toluene	0.0974	0.00100	"	0.100		97.4	80-120	0.773	20	
Ethylbenzene	0.110	0.00100	"	0.100		110	80-120	0.363	20	
Xylene (p/m)	0.213	0.00200	"	0.200		106	80-120	0.429	20	
Xylene (o)	0.0973	0.00100	"	0.100		97.3	80-120	0.961	20	
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*95.1*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.134*		"	*0.120*		*111*	*80-120*			
Calibration Blank (P3L0804-CCB1)				Prepared & Analyzed: 12/08/23						
Benzene	0.150		ug/kg							
Toluene	0.300		"							
Ethylbenzene	0.110		"							
Xylene (p/m)	0.220		"							
Xylene (o)	0.210		"							
Surrogate: 1,4-Difluorobenzene	*0.113*		"	*0.120*		*93.9*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.137*		"	*0.120*		*114*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0804 - * DEFAULT PREP *** **										
Calibration Blank (P3L0804-CCB2)				Prepared & Analyzed: 12/08/23						
Benzene	0.100		ug/kg							
Toluene	0.250		"							
Ethylbenzene	0.120		"							
Xylene (p/m)	0.140		"							
Xylene (o)	0.140		"							
Surrogate: 1,4-Difluorobenzene	*0.115*		*"*	*0.120*		*95.8*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.138*		*"*	*0.120*		*115*	*80-120*			
Calibration Blank (P3L0804-CCB3)				Prepared: 12/08/23 Analyzed: 12/09/23						
Benzene	0.120		ug/kg							
Toluene	0.310		"							
Ethylbenzene	0.0800		"							
Xylene (p/m)	0.160		"							
Xylene (o)	0.240		"							
Surrogate: 1,4-Difluorobenzene	*0.115*		*"*	*0.120*		*95.6*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.138*		*"*	*0.120*		*115*	*80-120*			
Calibration Check (P3L0804-CCV1)				Prepared & Analyzed: 12/08/23						
Benzene	0.0967	0.00100	mg/kg	0.100		96.7	80-120			
Toluene	0.0938	0.00100	"	0.100		93.8	80-120			
Ethylbenzene	0.0974	0.00100	"	0.100		97.4	80-120			
Xylene (p/m)	0.199	0.00200	"	0.200		99.3	80-120			
Xylene (o)	0.0922	0.00100	"	0.100		92.2	80-120			
Surrogate: 4-Bromofluorobenzene	*0.133*		*"*	*0.120*		*111*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.113*		*"*	*0.120*		*94.4*	*75-125*			
Calibration Check (P3L0804-CCV2)				Prepared & Analyzed: 12/08/23						
Benzene	0.109	0.00100	mg/kg	0.100		109	80-120			
Toluene	0.102	0.00100	"	0.100		102	80-120			
Ethylbenzene	0.105	0.00100	"	0.100		105	80-120			
Xylene (p/m)	0.216	0.00200	"	0.200		108	80-120			
Xylene (o)	0.101	0.00100	"	0.100		101	80-120			
Surrogate: 4-Bromofluorobenzene	*0.132*		*"*	*0.120*		*110*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.117*		*"*	*0.120*		*97.8*	*75-125*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0804 - * DEFAULT PREP *** **										
Calibration Check (P3L0804-CCV3)				Prepared: 12/08/23 Analyzed: 12/09/23						
Benzene	0.113	0.00100	mg/kg	0.100		113	80-120			
Toluene	0.107	0.00100	"	0.100		107	80-120			
Ethylbenzene	0.110	0.00100	"	0.100		110	80-120			
Xylene (p/m)	0.223	0.00200	"	0.200		111	80-120			
Xylene (o)	0.105	0.00100	"	0.100		105	80-120			
Surrogate: 1,4-Difluorobenzene	*0.117*		"	*0.120*		*97.4*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.132*		"	*0.120*		*110*	*75-125*			
Matrix Spike (P3L0804-MS1)		**Source: 3L01002-22**		Prepared & Analyzed: 12/08/23						
Benzene	0.0874	0.00104	mg/kg dry	0.104	ND	83.9	80-120			
Toluene	0.0880	0.00104	"	0.104	ND	84.4	80-120			
Ethylbenzene	0.0832	0.00104	"	0.104	ND	79.9	80-120			QM-05
Xylene (p/m)	0.163	0.00208	"	0.208	ND	78.5	80-120			QM-05
Xylene (o)	0.0724	0.00104	"	0.104	ND	69.5	80-120			QM-05
Surrogate: 4-Bromofluorobenzene	*0.138*		"	*0.125*		*111*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.121*		"	*0.125*		*96.5*	*80-120*			
Matrix Spike Dup (P3L0804-MSD1)		**Source: 3L01002-22**		Prepared: 12/08/23 Analyzed: 12/09/23						
Benzene	0.0839	0.00104	mg/kg dry	0.104	ND	80.5	80-120	4.16	20	
Toluene	0.0827	0.00104	"	0.104	ND	79.4	80-120	6.15	20	QM-05
Ethylbenzene	0.0800	0.00104	"	0.104	ND	76.8	80-120	3.92	20	QM-05
Xylene (p/m)	0.157	0.00208	"	0.208	ND	75.3	80-120	4.08	20	QM-05
Xylene (o)	0.0693	0.00104	"	0.104	ND	66.6	80-120	4.26	20	QM-05
Surrogate: 1,4-Difluorobenzene	*0.121*		"	*0.125*		*96.8*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.138*		"	*0.125*		*111*	*80-120*			
Batch P3L0805 - * DEFAULT PREP *** **										
Blank (P3L0805-BLK1)				Prepared: 12/08/23 Analyzed: 12/09/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 4-Bromofluorobenzene	*0.141*		"	*0.120*		*117*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*95.2*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0805 - * DEFAULT PREP *** **										
LCS (P3L0805-BS1)				Prepared: 12/08/23 Analyzed: 12/09/23						
Benzene	0.0967	0.00100	mg/kg	0.100		96.7	80-120			
Toluene	0.0924	0.00100	"	0.100		92.4	80-120			
Ethylbenzene	0.103	0.00100	"	0.100		103	80-120			
Xylene (p/m)	0.199	0.00200	"	0.200		99.5	80-120			
Xylene (o)	0.0918	0.00100	"	0.100		91.8	80-120			
Surrogate: 4-Bromofluorobenzene	*0.132*		*"*	*0.120*		*110*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.117*		*"*	*0.120*		*97.6*	*80-120*			
LCS Dup (P3L0805-BSD1)				Prepared: 12/08/23 Analyzed: 12/09/23						
Benzene	0.0881	0.00100	mg/kg	0.100		88.1	80-120	9.24	20	
Toluene	0.0828	0.00100	"	0.100		82.8	80-120	11.0	20	
Ethylbenzene	0.0915	0.00100	"	0.100		91.5	80-120	11.4	20	
Xylene (p/m)	0.178	0.00200	"	0.200		89.0	80-120	11.1	20	
Xylene (o)	0.0828	0.00100	"	0.100		82.8	80-120	10.4	20	
Surrogate: 1,4-Difluorobenzene	*0.117*		*"*	*0.120*		*97.4*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.131*		*"*	*0.120*		*109*	*80-120*			
Calibration Blank (P3L0805-CCB1)				Prepared: 12/08/23 Analyzed: 12/09/23						
Benzene	0.120		ug/kg							
Toluene	0.310		"							
Ethylbenzene	0.0800		"							
Xylene (p/m)	0.160		"							
Xylene (o)	0.240		"							
Surrogate: 1,4-Difluorobenzene	*0.115*		*"*	*0.120*		*95.6*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.138*		*"*	*0.120*		*115*	*80-120*			
Calibration Blank (P3L0805-CCB2)				Prepared: 12/08/23 Analyzed: 12/09/23						
Benzene	0.110		ug/kg							
Toluene	0.330		"							
Ethylbenzene	0.110		"							
Xylene (p/m)	0.180		"							
Xylene (o)	0.160		"							
Surrogate: 1,4-Difluorobenzene	*0.115*		*"*	*0.120*		*95.6*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.139*		*"*	*0.120*		*116*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0805 - * DEFAULT PREP *** **										
Calibration Check (P3L0805-CCV1)				Prepared: 12/08/23 Analyzed: 12/09/23						
Benzene	0.113	0.00100	mg/kg	0.100		113	80-120			
Toluene	0.107	0.00100	"	0.100		107	80-120			
Ethylbenzene	0.110	0.00100	"	0.100		110	80-120			
Xylene (p/m)	0.223	0.00200	"	0.200		111	80-120			
Xylene (o)	0.105	0.00100	"	0.100		105	80-120			
Surrogate: 1,4-Difluorobenzene	*0.117*		"	*0.120*		*97.4*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.132*		"	*0.120*		*110*	*75-125*			
Calibration Check (P3L0805-CCV2)				Prepared: 12/08/23 Analyzed: 12/09/23						
Benzene	0.111	0.00100	mg/kg	0.100		111	80-120			
Toluene	0.104	0.00100	"	0.100		104	80-120			
Ethylbenzene	0.106	0.00100	"	0.100		106	80-120			
Xylene (p/m)	0.215	0.00200	"	0.200		108	80-120			
Xylene (o)	0.102	0.00100	"	0.100		102	80-120			
Surrogate: 1,4-Difluorobenzene	*0.119*		"	*0.120*		*98.9*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.135*		"	*0.120*		*112*	*75-125*			
Calibration Check (P3L0805-CCV3)				Prepared: 12/08/23 Analyzed: 12/09/23						
Benzene	0.110	0.00100	mg/kg	0.100		110	80-120			
Toluene	0.103	0.00100	"	0.100		103	80-120			
Ethylbenzene	0.104	0.00100	"	0.100		104	80-120			
Xylene (p/m)	0.211	0.00200	"	0.200		105	80-120			
Xylene (o)	0.101	0.00100	"	0.100		101	80-120			
Surrogate: 4-Bromofluorobenzene	*0.134*		"	*0.120*		*112*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.117*		"	*0.120*		*97.4*	*75-125*			
Matrix Spike (P3L0805-MS1)		**Source: 3L01003-12**		Prepared: 12/08/23 Analyzed: 12/09/23						
Benzene	0.0787	0.00105	mg/kg dry	0.105	ND	74.8	80-120			QM-05
Toluene	0.0713	0.00105	"	0.105	ND	67.7	80-120			QM-05
Ethylbenzene	0.0739	0.00105	"	0.105	ND	70.2	80-120			QM-05
Xylene (p/m)	0.145	0.00211	"	0.211	ND	68.8	80-120			QM-05
Xylene (o)	0.0684	0.00105	"	0.105	ND	64.9	80-120			QM-05
Surrogate: 4-Bromofluorobenzene	*0.140*		"	*0.126*		*110*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.121*		"	*0.126*		*95.9*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0805 - * DEFAULT PREP *** **										
Matrix Spike Dup (P3L0805-MSD1)	**Source: 3L01003-12**			Prepared: 12/08/23 Analyzed: 12/09/23						
Benzene	0.0834	0.00105	mg/kg dry	0.105	ND	79.2	80-120	5.75	20	QM-05
Toluene	0.0750	0.00105	"	0.105	ND	71.2	80-120	5.08	20	QM-05
Ethylbenzene	0.0771	0.00105	"	0.105	ND	73.3	80-120	4.32	20	QM-05
Xylene (p/m)	0.152	0.00211	"	0.211	ND	72.3	80-120	4.94	20	QM-05
Xylene (o)	0.0681	0.00105	"	0.105	ND	64.7	80-120	0.355	20	QM-05
Surrogate: 4-Bromofluorobenzene	*0.138*		*"*	*0.126*		*109*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.123*		*"*	*0.126*		*97.1*	*80-120*			
Batch P3L1106 - * DEFAULT PREP *** **										
Blank (P3L1106-BLK1)				Prepared & Analyzed: 12/11/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 1,4-Difluorobenzene	*0.111*		*"*	*0.120*		*92.6*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.138*		*"*	*0.120*		*115*	*80-120*			
LCS (P3L1106-BS1)				Prepared & Analyzed: 12/11/23						
Benzene	0.0811	0.00100	mg/kg	0.100		81.1	80-120			
Toluene	0.0806	0.00100	"	0.100		80.6	80-120			
Ethylbenzene	0.0965	0.00100	"	0.100		96.5	80-120			
Xylene (p/m)	0.189	0.00200	"	0.200		94.4	80-120			
Xylene (o)	0.0876	0.00100	"	0.100		87.6	80-120			
Surrogate: 4-Bromofluorobenzene	*0.132*		*"*	*0.120*		*110*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.115*		*"*	*0.120*		*96.0*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1106 - * DEFAULT PREP *** **										
LCS Dup (P3L1106-BSD1)				Prepared & Analyzed: 12/11/23						
Benzene	0.0812	0.00100	mg/kg	0.100		81.2	80-120	0.148	20	
Toluene	0.0888	0.00100	"	0.100		88.8	80-120	9.61	20	
Ethylbenzene	0.108	0.00100	"	0.100		108	80-120	11.7	20	
Xylene (p/m)	0.211	0.00200	"	0.200		106	80-120	11.3	20	
Xylene (o)	0.101	0.00100	"	0.100		101	80-120	14.4	20	
Surrogate: 4-Bromofluorobenzene	*0.134*		"	*0.120*		*111*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*95.4*	*80-120*			
Calibration Blank (P3L1106-CCB1)				Prepared & Analyzed: 12/11/23						
Benzene	0.110		ug/kg							
Toluene	0.280		"							
Ethylbenzene	0.180		"							
Xylene (p/m)	0.170		"							
Xylene (o)	0.130		"							
Surrogate: 4-Bromofluorobenzene	*0.135*		"	*0.120*		*113*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.111*		"	*0.120*		*92.3*	*80-120*			
Calibration Blank (P3L1106-CCB2)				Prepared & Analyzed: 12/11/23						
Benzene	0.0900		ug/kg							
Toluene	0.240		"							
Ethylbenzene	0.140		"							
Xylene (p/m)	0.210		"							
Xylene (o)	0.150		"							
Surrogate: 1,4-Difluorobenzene	*0.113*		"	*0.120*		*93.9*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.137*		"	*0.120*		*114*	*80-120*			
Calibration Blank (P3L1106-CCB3)				Prepared: 12/11/23 Analyzed: 12/12/23						
Benzene	0.100		ug/kg							
Toluene	0.220		"							
Ethylbenzene	0.130		"							
Xylene (p/m)	0.160		"							
Xylene (o)	0.00		"							
Surrogate: 4-Bromofluorobenzene	*0.142*		"	*0.120*		*118*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*94.7*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1106 - * DEFAULT PREP *** **										
Calibration Check (P3L1106-CCV1)				Prepared & Analyzed: 12/11/23						
Benzene	0.0934	0.00100	mg/kg	0.100		93.4	80-120			
Toluene	0.0936	0.00100	"	0.100		93.6	80-120			
Ethylbenzene	0.102	0.00100	"	0.100		102	80-120			
Xylene (p/m)	0.211	0.00200	"	0.200		106	80-120			
Xylene (o)	0.0986	0.00100	"	0.100		98.6	80-120			
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*94.9*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.130*		"	*0.120*		*108*	*75-125*			
Calibration Check (P3L1106-CCV2)				Prepared & Analyzed: 12/11/23						
Benzene	0.105	0.00100	mg/kg	0.100		105	80-120			
Toluene	0.103	0.00100	"	0.100		103	80-120			
Ethylbenzene	0.111	0.00100	"	0.100		111	80-120			
Xylene (p/m)	0.227	0.00200	"	0.200		113	80-120			
Xylene (o)	0.107	0.00100	"	0.100		107	80-120			
Surrogate: 4-Bromofluorobenzene	*0.129*		"	*0.120*		*107*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.117*		"	*0.120*		*97.6*	*75-125*			
Calibration Check (P3L1106-CCV3)				Prepared: 12/11/23 Analyzed: 12/12/23						
Benzene	0.106	0.00100	mg/kg	0.100		106	80-120			
Toluene	0.102	0.00100	"	0.100		102	80-120			
Ethylbenzene	0.109	0.00100	"	0.100		109	80-120			
Xylene (p/m)	0.223	0.00200	"	0.200		111	80-120			
Xylene (o)	0.105	0.00100	"	0.100		105	80-120			
Surrogate: 1,4-Difluorobenzene	*0.118*		"	*0.120*		*98.3*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.131*		"	*0.120*		*109*	*75-125*			
Matrix Spike (P3L1106-MS1)	**Source: 3L01003-01**			Prepared & Analyzed: 12/11/23						
Benzene	0.0813	0.00106	mg/kg dry	0.106	ND	76.4	80-120			QM-05
Toluene	0.0704	0.00106	"	0.106	ND	66.1	80-120			QM-05
Ethylbenzene	0.0705	0.00106	"	0.106	ND	66.3	80-120			QM-05
Xylene (p/m)	0.139	0.00213	"	0.213	ND	65.4	80-120			QM-05
Xylene (o)	0.0616	0.00106	"	0.106	ND	57.9	80-120			QM-05
Surrogate: 1,4-Difluorobenzene	*0.125*		"	*0.128*		*98.1*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.139*		"	*0.128*		*109*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1106 - * DEFAULT PREP *** **										
Matrix Spike Dup (P3L1106-MSD1)	**Source: 3L01003-01**			Prepared & Analyzed: 12/11/23						
Benzene	0.0871	0.00106	mg/kg dry	0.106	ND	81.9	80-120	6.89	20	
Toluene	0.0750	0.00106	"	0.106	ND	70.5	80-120	6.43	20	QM-05
Ethylbenzene	0.0733	0.00106	"	0.106	ND	68.9	80-120	3.86	20	QM-05
Xylene (p/m)	0.145	0.00213	"	0.213	ND	68.2	80-120	4.15	20	QM-05
Xylene (o)	0.0639	0.00106	"	0.106	ND	60.1	80-120	3.69	20	QM-05
Surrogate: 4-Bromofluorobenzene	*0.138*		*"*	*0.128*		*108*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.124*		*"*	*0.128*		*97.3*	*80-120*			
Batch P3L1303 - * DEFAULT PREP *** **										
Blank (P3L1303-BLK1)				Prepared: 12/13/23 Analyzed: 12/14/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 1,4-Difluorobenzene	*0.111*		*"*	*0.120*		*92.6*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.137*		*"*	*0.120*		*114*	*80-120*			
LCS (P3L1303-BS1)				Prepared: 12/13/23 Analyzed: 12/14/23						
Benzene	0.0899	0.00100	mg/kg	0.100		89.9	80-120			
Toluene	0.0873	0.00100	"	0.100		87.3	80-120			
Ethylbenzene	0.0970	0.00100	"	0.100		97.0	80-120			
Xylene (p/m)	0.189	0.00200	"	0.200		94.4	80-120			
Xylene (o)	0.0862	0.00100	"	0.100		86.2	80-120			
Surrogate: 4-Bromofluorobenzene	*0.132*		*"*	*0.120*		*110*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.112*		*"*	*0.120*		*93.3*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1303 - * DEFAULT PREP *** **										
LCS Dup (P3L1303-BSD1)				Prepared: 12/13/23 Analyzed: 12/14/23						
Benzene	0.0988	0.00100	mg/kg	0.100		98.8	80-120	9.42	20	
Toluene	0.0974	0.00100	"	0.100		97.4	80-120	10.9	20	
Ethylbenzene	0.108	0.00100	"	0.100		108	80-120	10.5	20	
Xylene (p/m)	0.208	0.00200	"	0.200		104	80-120	9.49	20	
Xylene (o)	0.0958	0.00100	"	0.100		95.8	80-120	10.6	20	
Surrogate: 1,4-Difluorobenzene	*0.113*		"	*0.120*		*93.8*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.133*		"	*0.120*		*111*	*80-120*			
Calibration Blank (P3L1303-CCB1)				Prepared: 12/13/23 Analyzed: 12/14/23						
Benzene	0.110		ug/kg							
Toluene	0.170		"							
Ethylbenzene	0.0800		"							
Xylene (p/m)	0.140		"							
Xylene (o)	0.150		"							
Surrogate: 4-Bromofluorobenzene	*0.136*		"	*0.120*		*113*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.111*		"	*0.120*		*92.6*	*80-120*			
Calibration Blank (P3L1303-CCB2)				Prepared: 12/13/23 Analyzed: 12/14/23						
Benzene	0.130		ug/kg							
Toluene	0.210		"							
Ethylbenzene	0.130		"							
Xylene (p/m)	0.160		"							
Xylene (o)	0.0900		"							
Surrogate: 4-Bromofluorobenzene	*0.138*		"	*0.120*		*115*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.111*		"	*0.120*		*92.8*	*80-120*			
Calibration Check (P3L1303-CCV1)				Prepared: 12/13/23 Analyzed: 12/14/23						
Benzene	0.106	0.00100	mg/kg	0.100		106	80-120			
Toluene	0.0935	0.00100	"	0.100		93.5	80-120			
Ethylbenzene	0.0945	0.00100	"	0.100		94.5	80-120			
Xylene (p/m)	0.193	0.00200	"	0.200		96.4	80-120			
Xylene (o)	0.0887	0.00100	"	0.100		88.7	80-120			
Surrogate: 1,4-Difluorobenzene	*0.113*		"	*0.120*		*93.8*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.131*		"	*0.120*		*109*	*75-125*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1303 - * DEFAULT PREP *** **										
Calibration Check (P3L1303-CCV2)				Prepared: 12/13/23 Analyzed: 12/14/23						
Benzene	0.117	0.00100	mg/kg	0.100		117	80-120			
Toluene	0.104	0.00100	"	0.100		104	80-120			
Ethylbenzene	0.104	0.00100	"	0.100		104	80-120			
Xylene (p/m)	0.209	0.00200	"	0.200		105	80-120			
Xylene (o)	0.0980	0.00100	"	0.100		98.0	80-120			
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*94.9*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.134*		"	*0.120*		*111*	*75-125*			
Calibration Check (P3L1303-CCV3)				Prepared: 12/13/23 Analyzed: 12/14/23						
Benzene	0.101	0.00100	mg/kg	0.100		101	80-120			
Toluene	0.0854	0.00100	"	0.100		85.4	80-120			
Ethylbenzene	0.0846	0.00100	"	0.100		84.6	80-120			
Xylene (p/m)	0.165	0.00200	"	0.200		82.5	80-120			
Xylene (o)	0.0802	0.00100	"	0.100		80.2	80-120			
Surrogate: 4-Bromofluorobenzene	*0.108*		"	*0.120*		*90.3*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.106*		"	*0.120*		*88.3*	*75-125*			
Matrix Spike (P3L1303-MS1)		**Source: 3L07001-51**		Prepared: 12/13/23 Analyzed: 12/14/23						
Benzene	0.0680	0.00105	mg/kg dry	0.105	ND	64.6	80-120			QM-05
Toluene	0.0573	0.00105	"	0.105	ND	54.5	80-120			QM-05
Ethylbenzene	0.0648	0.00105	"	0.105	ND	61.6	80-120			QM-05
Xylene (p/m)	0.123	0.00211	"	0.211	ND	58.5	80-120			QM-05
Xylene (o)	0.0708	0.00105	"	0.105	ND	67.3	80-120			QM-05
Surrogate: 4-Bromofluorobenzene	*0.147*		"	*0.126*		*116*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.118*		"	*0.126*		*93.4*	*80-120*			
Matrix Spike Dup (P3L1303-MSD1)		**Source: 3L07001-51**		Prepared: 12/13/23 Analyzed: 12/14/23						
Benzene	0.0740	0.00105	mg/kg dry	0.105	ND	70.3	80-120	8.48	20	QM-05
Toluene	0.0627	0.00105	"	0.105	ND	59.6	80-120	8.99	20	QM-05
Ethylbenzene	0.0706	0.00105	"	0.105	ND	67.0	80-120	8.47	20	QM-05
Xylene (p/m)	0.135	0.00211	"	0.211	ND	64.1	80-120	9.13	20	QM-05
Xylene (o)	0.0611	0.00105	"	0.105	ND	58.0	80-120	14.8	20	QM-05
Surrogate: 4-Bromofluorobenzene	*0.140*		"	*0.126*		*111*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.118*		"	*0.126*		*93.3*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0408 - TX 1005										
Blank (P3L0408-BLK1)				Prepared: 12/04/23 Analyzed: 12/07/23						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*95.6*		*"*	*100*		*95.6*	*70-130*			
Surrogate: o-Terphenyl	*54.0*		*"*	*50.0*		*108*	*70-130*			
LCS (P3L0408-BS1)				Prepared: 12/04/23 Analyzed: 12/07/23						
C6-C12	910	25.0	mg/kg	1000		91.0	75-125			
>C12-C28	835	25.0	"	1000		83.5	75-125			
Surrogate: 1-Chlorooctane	*122*		*"*	*100*		*122*	*70-130*			
Surrogate: o-Terphenyl	*58.9*		*"*	*50.0*		*118*	*70-130*			
LCS Dup (P3L0408-BSD1)				Prepared: 12/04/23 Analyzed: 12/07/23						
C6-C12	848	25.0	mg/kg	1000		84.8	75-125	6.97	20	
>C12-C28	791	25.0	"	1000		79.1	75-125	5.46	20	
Surrogate: 1-Chlorooctane	*106*		*"*	*100*		*106*	*70-130*			
Surrogate: o-Terphenyl	*50.1*		*"*	*50.0*		*100*	*70-130*			
Calibration Check (P3L0408-CCV1)				Prepared: 12/04/23 Analyzed: 12/07/23						
C6-C12	485	25.0	mg/kg	500		97.1	85-115			
>C12-C28	518	25.0	"	500		104	85-115			
Surrogate: 1-Chlorooctane	*106*		*"*	*100*		*106*	*70-130*			
Surrogate: o-Terphenyl	*52.8*		*"*	*50.0*		*106*	*70-130*			
Calibration Check (P3L0408-CCV2)				Prepared: 12/04/23 Analyzed: 12/07/23						
C6-C12	459	25.0	mg/kg	500		91.8	85-115			
>C12-C28	494	25.0	"	500		98.7	85-115			
Surrogate: 1-Chlorooctane	*101*		*"*	*100*		*101*	*70-130*			
Surrogate: o-Terphenyl	*50.3*		*"*	*50.0*		*101*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0408 - TX 1005										
Calibration Check (P3L0408-CCV3)				Prepared: 12/04/23 Analyzed: 12/07/23						
C6-C12	429	25.0	mg/kg	500		85.7	85-115			
>C12-C28	467	25.0	"	500		93.4	85-115			
Surrogate: 1-Chlorooctane	*93.4*		*"*	*100*		*93.4*	*70-130*			
Surrogate: o-Terphenyl	*47.0*		*"*	*50.0*		*94.1*	*70-130*			
Matrix Spike (P3L0408-MS1)	**Source: 3L01003-10**			Prepared: 12/04/23 Analyzed: 12/07/23						
C6-C12	812	26.0	mg/kg dry	1040	20.9	76.0	75-125			
>C12-C28	784	26.0	"	1040	ND	75.2	75-125			
Surrogate: 1-Chlorooctane	*107*		*"*	*104*		*103*	*70-130*			
Surrogate: o-Terphenyl	*47.1*		*"*	*52.1*		*90.3*	*70-130*			
Batch P3L0409 - TX 1005										
Blank (P3L0409-BLK1)				Prepared: 12/04/23 Analyzed: 12/05/23						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*100*		*"*	*100*		*100*	*70-130*			
Surrogate: o-Terphenyl	*52.9*		*"*	*50.0*		*106*	*70-130*			
LCS (P3L0409-BS1)				Prepared: 12/04/23 Analyzed: 12/05/23						
C6-C12	809	25.0	mg/kg	1000		80.9	75-125			
>C12-C28	825	25.0	"	1000		82.5	75-125			
Surrogate: 1-Chlorooctane	*116*		*"*	*100*		*116*	*70-130*			
Surrogate: o-Terphenyl	*48.2*		*"*	*50.0*		*96.5*	*70-130*			
LCS Dup (P3L0409-BSD1)				Prepared: 12/04/23 Analyzed: 12/05/23						
C6-C12	804	25.0	mg/kg	1000		80.4	75-125	0.717	20	
>C12-C28	829	25.0	"	1000		82.9	75-125	0.498	20	
Surrogate: 1-Chlorooctane	*111*		*"*	*100*		*111*	*70-130*			
Surrogate: o-Terphenyl	*45.8*		*"*	*50.0*		*91.5*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0409 - TX 1005										
Calibration Check (P3L0409-CCV1)				Prepared: 12/04/23 Analyzed: 12/05/23						
C6-C12	462	25.0	mg/kg	500		92.4	85-115			
>C12-C28	504	25.0	"	500		101	85-115			
Surrogate: 1-Chlorooctane	*107*		*"*	*100*		*107*	*70-130*			
Surrogate: o-Terphenyl	*51.7*		*"*	*50.0*		*103*	*70-130*			
Calibration Check (P3L0409-CCV2)				Prepared: 12/04/23 Analyzed: 12/05/23						
C6-C12	469	25.0	mg/kg	500		93.9	85-115			
>C12-C28	523	25.0	"	500		105	85-115			
Surrogate: 1-Chlorooctane	*106*		*"*	*100*		*106*	*70-130*			
Surrogate: o-Terphenyl	*52.6*		*"*	*50.0*		*105*	*70-130*			
Matrix Spike (P3L0409-MS1)		**Source: 3L01003-30**		Prepared: 12/04/23 Analyzed: 12/05/23						
C6-C12	864	26.3	mg/kg dry	1050	12.8	80.8	75-125			
>C12-C28	885	26.3	"	1050	ND	84.1	75-125			
Surrogate: 1-Chlorooctane	*123*		*"*	*105*		*117*	*70-130*			
Surrogate: o-Terphenyl	*54.2*		*"*	*52.6*		*103*	*70-130*			
Matrix Spike Dup (P3L0409-MSD1)		**Source: 3L01003-30**		Prepared: 12/04/23 Analyzed: 12/05/23						
C6-C12	867	26.3	mg/kg dry	1050	12.8	81.2	75-125	0.427	20	
>C12-C28	826	26.3	"	1050	ND	78.5	75-125	6.88	20	
Surrogate: 1-Chlorooctane	*124*		*"*	*105*		*118*	*70-130*			
Surrogate: o-Terphenyl	*47.6*		*"*	*52.6*		*90.4*	*70-130*			
Batch P3L0410 - TX 1005										
Blank (P3L0410-BLK1)				Prepared: 12/04/23 Analyzed: 12/05/23						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*131*		*"*	*140*		*93.8*	*70-130*			
Surrogate: o-Terphenyl	*73.7*		*"*	*70.0*		*105*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0410 - TX 1005										
LCS (P3L0410-BS1)				Prepared: 12/04/23 Analyzed: 12/05/23						
C6-C12	1010	25.0	mg/kg	1000		101	75-125			
>C12-C28	808	25.0	"	1000		80.8	75-125			
Surrogate: 1-Chlorooctane	*177*		"	*140*		*127*	*70-130*			
Surrogate: o-Terphenyl	*78.0*		"	*70.0*		*111*	*70-130*			
LCS Dup (P3L0410-BSD1)				Prepared: 12/04/23 Analyzed: 12/05/23						
C6-C12	1040	25.0	mg/kg	1000		104	75-125	2.27	20	
>C12-C28	799	25.0	"	1000		79.9	75-125	1.07	20	
Surrogate: 1-Chlorooctane	*163*		"	*140*		*117*	*70-130*			
Surrogate: o-Terphenyl	*69.5*		"	*70.0*		*99.3*	*70-130*			
Calibration Check (P3L0410-CCV1)				Prepared: 12/04/23 Analyzed: 12/05/23						
C6-C12	534	25.0	mg/kg	500		107	85-115			
>C12-C28	469	25.0	"	500		93.7	85-115			
Surrogate: 1-Chlorooctane	*155*		"	*140*		*111*	*70-130*			
Surrogate: o-Terphenyl	*76.8*		"	*70.0*		*110*	*70-130*			
Calibration Check (P3L0410-CCV2)				Prepared: 12/04/23 Analyzed: 12/05/23						
C6-C12	572	25.0	mg/kg	500		114	85-115			
>C12-C28	450	25.0	"	500		89.9	85-115			
Surrogate: 1-Chlorooctane	*147*		"	*140*		*105*	*70-130*			
Surrogate: o-Terphenyl	*70.9*		"	*70.0*		*101*	*70-130*			
Matrix Spike (P3L0410-MS1)		**Source: 3L01003-47**		Prepared: 12/04/23 Analyzed: 12/05/23						
C6-C12	1200	26.0	mg/kg dry	1040	17.1	114	75-125			
>C12-C28	684	26.0	"	1040	ND	65.7	75-125			QM-05
Surrogate: 1-Chlorooctane	*113*		"	*146*		*77.3*	*70-130*			
Surrogate: o-Terphenyl	*57.9*		"	*72.9*		*79.3*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0410 - TX 1005										
Matrix Spike Dup (P3L0410-MSD1)	**Source: 3L01003-47**			Prepared: 12/04/23 Analyzed: 12/05/23						
C6-C12	1240	26.0	mg/kg dry	1040	17.1	117	75-125	3.05	20	
>C12-C28	743	26.0	"	1040	ND	71.3	75-125	8.23	20	QM-05
Surrogate: 1-Chlorooctane	*134*		*"*	*146*		*92.0*	*70-130*			
Surrogate: o-Terphenyl	*54.5*		*"*	*72.9*		*74.7*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0402 - * DEFAULT PREP *** **										
Blank (P3L0402-BLK1)				Prepared & Analyzed: 12/04/23						
% Moisture	ND	0.1	%							
Blank (P3L0402-BLK2)				Prepared & Analyzed: 12/04/23						
% Moisture	ND	0.1	%							
Blank (P3L0402-BLK3)				Prepared & Analyzed: 12/04/23						
% Moisture	ND	0.1	%							
Blank (P3L0402-BLK4)				Prepared & Analyzed: 12/04/23						
% Moisture	ND	0.1	%							
Duplicate (P3L0402-DUP1)	**Source: 3L01003-10**			Prepared & Analyzed: 12/04/23						
% Moisture	4.0	0.1	%		4.0			0.00	20	
Duplicate (P3L0402-DUP2)	**Source: 3L01003-20**			Prepared & Analyzed: 12/04/23						
% Moisture	6.0	0.1	%		6.0			0.00	20	
Duplicate (P3L0402-DUP3)	**Source: 3L01003-35**			Prepared & Analyzed: 12/04/23						
% Moisture	10.0	0.1	%		10.0			0.00	20	
Duplicate (P3L0402-DUP4)	**Source: 3L01003-45**			Prepared & Analyzed: 12/04/23						
% Moisture	3.0	0.1	%		3.0			0.00	20	
Duplicate (P3L0402-DUP5)	**Source: 3L01009-03**			Prepared & Analyzed: 12/04/23						
% Moisture	9.0	0.1	%		8.0			11.8	20	
Duplicate (P3L0402-DUP6)	**Source: 3L01009-13**			Prepared & Analyzed: 12/04/23						
% Moisture	13.0	0.1	%		13.0			0.00	20	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0402 - * DEFAULT PREP *** **										
Duplicate (P3L0402-DUP7)		**Source: 3L01009-28**		Prepared & Analyzed: 12/04/23						
% Moisture	14.0	0.1	%		14.0			0.00	20	
Batch P3L0704 - * DEFAULT PREP *** **										
LCS (P3L0704-BS1)				Prepared: 12/07/23 Analyzed: 12/08/23						
Chloride	19.7		mg/kg	20.0		98.7	90-110			
LCS Dup (P3L0704-BSD1)				Prepared: 12/07/23 Analyzed: 12/08/23						
Chloride	20.5		mg/kg	20.0		103	90-110	4.03	10	
Calibration Check (P3L0704-CCV1)				Prepared: 12/07/23 Analyzed: 12/08/23						
Chloride	20.6		mg/kg	20.0		103	90-110			
Calibration Check (P3L0704-CCV2)				Prepared: 12/07/23 Analyzed: 12/08/23						
Chloride	20.3		mg/kg	20.0		101	90-110			
Matrix Spike (P3L0704-MS1)		**Source: 3L01002-15**		Prepared: 12/07/23 Analyzed: 12/08/23						
Chloride	117		mg/kg	100	10.7	106	80-120			
Matrix Spike (P3L0704-MS2)		**Source: 3L01002-25**		Prepared: 12/07/23 Analyzed: 12/08/23						
Chloride	109		mg/kg	100	3.98	105	80-120			
Matrix Spike Dup (P3L0704-MSD1)		**Source: 3L01002-15**		Prepared: 12/07/23 Analyzed: 12/08/23						
Chloride	116		mg/kg	100	10.7	105	80-120	0.488	20	
Matrix Spike Dup (P3L0704-MSD2)		**Source: 3L01002-25**		Prepared: 12/07/23 Analyzed: 12/08/23						
Chloride	109		mg/kg	100	3.98	105	80-120	0.498	20	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0705 - * DEFAULT PREP *** **										
Blank (P3L0705-BLK1)				Prepared: 12/07/23 Analyzed: 12/11/23						
Chloride	ND	1.00	mg/kg							
LCS (P3L0705-BS1)				Prepared: 12/07/23 Analyzed: 12/12/23						
Chloride	19.9		mg/kg	20.0		99.5	90-110			
LCS Dup (P3L0705-BSD1)				Prepared: 12/07/23 Analyzed: 12/11/23						
Chloride	19.7		mg/kg	20.0		98.3	90-110	1.20	10	
Calibration Check (P3L0705-CCV1)				Prepared: 12/07/23 Analyzed: 12/11/23						
Chloride	20.3		mg/kg	20.0		102	90-110			
Calibration Check (P3L0705-CCV2)				Prepared: 12/07/23 Analyzed: 12/11/23						
Chloride	20.7		mg/kg	20.0		103	90-110			
Matrix Spike (P3L0705-MS1)		**Source: 3L01003-02**		Prepared: 12/07/23 Analyzed: 12/11/23						
Chloride	111		mg/kg	10000	3.54	1.07	80-120			QM-05
Matrix Spike (P3L0705-MS2)		**Source: 3L01003-12**		Prepared: 12/07/23 Analyzed: 12/11/23						
Chloride	112		mg/kg	10000	1.07	1.10	80-120			QM-05
Matrix Spike Dup (P3L0705-MSD1)		**Source: 3L01003-02**		Prepared: 12/07/23 Analyzed: 12/11/23						
Chloride	110		mg/kg	10000	3.54	1.06	80-120	0.962	20	QM-05
Matrix Spike Dup (P3L0705-MSD2)		**Source: 3L01003-12**		Prepared: 12/07/23 Analyzed: 12/11/23						
Chloride	111		mg/kg	10000	1.07	1.10	80-120	0.727	20	QM-05
Batch P3L0706 - * DEFAULT PREP *** **										
Blank (P3L0706-BLK1)				Prepared: 12/07/23 Analyzed: 12/12/23						
Chloride	ND	1.00	mg/kg							

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0706 - * DEFAULT PREP *** **										
LCS (P3L0706-BS1)				Prepared: 12/07/23 Analyzed: 12/12/23						
Chloride	20.7		mg/kg	20.0		104	90-110			
LCS Dup (P3L0706-BSD1)				Prepared: 12/07/23 Analyzed: 12/12/23						
Chloride	20.6		mg/kg	20.0		103	90-110	0.751	10	
Calibration Check (P3L0706-CCV1)				Prepared: 12/07/23 Analyzed: 12/12/23						
Chloride	20.9		mg/kg	20.0		104	90-110			
Calibration Check (P3L0706-CCV2)				Prepared: 12/07/23 Analyzed: 12/12/23						
Chloride	22.1		mg/kg	20.0		110	90-110			
Matrix Spike (P3L0706-MS1)		**Source: 3L01003-22**		Prepared: 12/07/23 Analyzed: 12/12/23						
Chloride	115		mg/kg	100	5.69	109	80-120			
Matrix Spike (P3L0706-MS2)		**Source: 3L01003-33**		Prepared: 12/07/23 Analyzed: 12/12/23						
Chloride	113		mg/kg	100	0.826	112	80-120			
Matrix Spike Dup (P3L0706-MSD1)		**Source: 3L01003-22**		Prepared: 12/07/23 Analyzed: 12/12/23						
Chloride	114		mg/kg	100	5.69	108	80-120	0.672	20	
Matrix Spike Dup (P3L0706-MSD2)		**Source: 3L01003-33**		Prepared: 12/07/23 Analyzed: 12/12/23						
Chloride	113		mg/kg	100	0.826	112	80-120	0.453	20	
Batch P3L0707 - * DEFAULT PREP *** **										
Blank (P3L0707-BLK1)				Prepared: 12/07/23 Analyzed: 12/08/23						
Chloride	ND	1.00	mg/kg							

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0707 - * DEFAULT PREP *** **										
LCS (P3L0707-BS1)				Prepared: 12/07/23 Analyzed: 12/08/23						
Chloride	20.4		mg/kg	20.0		102	90-110			
LCS Dup (P3L0707-BSD1)				Prepared: 12/07/23 Analyzed: 12/08/23						
Chloride	20.3		mg/kg	20.0		101	90-110	0.776	10	
Calibration Check (P3L0707-CCV1)				Prepared: 12/07/23 Analyzed: 12/08/23						
Chloride	21.2		mg/kg	20.0		106	90-110			
Calibration Check (P3L0707-CCV2)				Prepared: 12/07/23 Analyzed: 12/08/23						
Chloride	21.5		mg/kg	20.0		108	90-110			
Matrix Spike (P3L0707-MS1)		**Source: 3L01003-42**		Prepared: 12/07/23 Analyzed: 12/08/23						
Chloride	105		mg/kg	100	3.81	101	80-120			
Matrix Spike (P3L0707-MS2)		**Source: 3L01007-15**		Prepared: 12/07/23 Analyzed: 12/08/23						
Chloride	127		mg/kg	100	21.5	105	80-120			
Matrix Spike Dup (P3L0707-MSD1)		**Source: 3L01003-42**		Prepared: 12/07/23 Analyzed: 12/08/23						
Chloride	104		mg/kg	100	3.81	101	80-120	0.353	20	
Matrix Spike Dup (P3L0707-MSD2)		**Source: 3L01007-15**		Prepared: 12/07/23 Analyzed: 12/08/23						
Chloride	126		mg/kg	100	21.5	105	80-120	0.648	20	
Batch P3L0811 - * DEFAULT PREP *** **										
Blank (P3L0811-BLK1)				Prepared: 12/08/23 Analyzed: 12/13/23						
Chloride	ND	1.00	mg/kg							

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0811 - * DEFAULT PREP *** **										
LCS (P3L0811-BS1)				Prepared: 12/08/23 Analyzed: 12/13/23						
Chloride	20.6		mg/kg	20.0		103	90-110			
LCS Dup (P3L0811-BSD1)				Prepared: 12/08/23 Analyzed: 12/13/23						
Chloride	20.2		mg/kg	20.0		101	90-110	2.02	10	
Calibration Check (P3L0811-CCV1)				Prepared: 12/08/23 Analyzed: 12/13/23						
Chloride	21.0		mg/kg	20.0		105	90-110			
Calibration Check (P3L0811-CCV2)				Prepared: 12/08/23 Analyzed: 12/15/23						
Chloride	20.5		mg/kg	20.0		102	90-110			
Matrix Spike (P3L0811-MS1)		**Source: 3L01003-45**		Prepared: 12/08/23 Analyzed: 12/13/23						
Chloride	112		mg/kg	100	0.811	111	80-120			
Matrix Spike (P3L0811-MS2)		**Source: 3L05015-01**		Prepared: 12/08/23 Analyzed: 12/13/23						
Chloride	126		mg/kg	100	9.77	116	80-120			
Matrix Spike Dup (P3L0811-MSD1)		**Source: 3L01003-45**		Prepared: 12/08/23 Analyzed: 12/13/23						
Chloride	113		mg/kg	100	0.811	112	80-120	0.951	20	
Matrix Spike Dup (P3L0811-MSD2)		**Source: 3L05015-01**		Prepared: 12/08/23 Analyzed: 12/13/23						
Chloride	128		mg/kg	100	9.77	118	80-120	1.47	20	
Batch P3L0812 - * DEFAULT PREP *** **										
Blank (P3L0812-BLK1)				Prepared: 12/08/23 Analyzed: 12/14/23						
Chloride	ND	1.00	mg/kg							

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0812 - * DEFAULT PREP *** **										
LCS (P3L0812-BS1)				Prepared: 12/08/23 Analyzed: 12/15/23						
Chloride	20.7		mg/kg	20.0		104	90-110			
LCS Dup (P3L0812-BSD1)				Prepared: 12/08/23 Analyzed: 12/15/23						
Chloride	20.8		mg/kg	20.0		104	90-110	0.284	10	
Calibration Check (P3L0812-CCV1)				Prepared: 12/08/23 Analyzed: 12/15/23						
Chloride	20.4		mg/kg	20.0		102	90-110			
Matrix Spike (P3L0812-MS1)		**Source: 3L01003-47**		Prepared: 12/08/23 Analyzed: 12/14/23						
Chloride	124		mg/kg	100	3.03	121	80-120			QM-05
Matrix Spike (P3L0812-MS2)		**Source: 3L07001-09**		Prepared: 12/08/23 Analyzed: 12/14/23						
Chloride	114		mg/kg	100	1.28	113	80-120			
Matrix Spike Dup (P3L0812-MSD1)		**Source: 3L01003-47**		Prepared: 12/08/23 Analyzed: 12/14/23						
Chloride	123		mg/kg	100	3.03	120	80-120	0.505	20	
Matrix Spike Dup (P3L0812-MSD2)		**Source: 3L07001-09**		Prepared: 12/08/23 Analyzed: 12/14/23						
Chloride	113		mg/kg	100	1.28	111	80-120	1.47	20	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Notes and Definitions

QM-05	The spike recovery was outside acceptance limits for the MS and/or MSD due to matrix interference. The LCS and/or LCSD were within acceptance limits showing that the laboratory is in control and the data is acceptable.
BULK	Samples received in Bulk soil containers may be biased low in the nC6-C12 TPH Range
DET	Analyte DETECTED
ND	Analyte NOT DETECTED at or above the reporting limit
NR	Not Reported
dry	Sample results reported on a dry weight basis
RPD	Relative Percent Difference
LCS	Laboratory Control Spike
MS	Matrix Spike
Dup	Duplicate

Report Approved By: Brent Barron Date: 12/18/2023

Brent Barron, Laboratory Director/Technical Director

This material is intended only for the use of the individual (s) or entity to whom it is addressed, and may contain information that is privileged and confidential.

If you have received this material in error, please notify us immediately at 432-686-7235.

Page 551 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934 **Fax No:** _____
Sampler Signature: Jose Belloc

Project Name: Jalapeño
Project #: COEV # 11845
Project Loc: Lea, CO, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES
e-mail: Jamey@Tellusservices

(lab use only)
ORDER #: 3L01003

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total # of Containers	Preservation & # of Containers: Ice	HNO_3	HCl	H_2SO_4	NaOH	$Na_2S_2O_3$	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge	GW = Groundwater S=Soil/Solid	NP=Non-Potable Specify Other	Analyze For: TCLP: / TOTAL: TPH: TX 1005 TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA - 8021	TPH - EPA - 8015	Chlorides EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
1	BH-192@1.5	1.5	1.5	11-30-23	11:12		1																			
2	BH-193@1.5			11-30-23	8:15																					
3	BH-194@1.5				8:17																					
4	BH-195@1.5				8:21																					
5	BH-196@1.5				8:24																					
6	BH-197@1.5				8:25																					
7	BH-198@1.5				8:28																					
8	BH-199@1.5				8:29																					
9	BH-200@1.5				8:32																					
10	BH-201@1.5				8:34																					

Special Instructions: Report TPH-in-C6-C12 & C12-C28 & C28-C35 fractions aswell as total TPH
same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
Jose Belloc					
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by:	Date	Time
			Received by PBEL: Dana Mc	11/30/23	16:34

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N
by Sampler/Client Rep. ?	Y	N

by Courier? UPS DHL FedEx Lone Star

Temperature Upon Receipt:
Received: 10.0 °C Thermometor: CF0 13
Adjusted: °C Factor:

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 8-21-21 Page ↓ of ↓

Received by OCD: 9/20/2024 8:26:56 AM
Released to Imaging: 12/18/2024 7:45:13 AM

Page 552 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Janey Fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934 **Fax No:** _____
Sampler Signature: Jose Belloc **e-mail:** Janey@Tellusservices

Project Name: Jalapeño
Project #: COEV # 1184[illegible]5
Project Loc: Lea, CO, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES

(lab use only) **ORDER #:** 3L01003

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total # of Containers	Preservation & # of Containers: Ice	HNO_3	HCl	H_2SO_4	NaOH	$Na_2S_2O_3$	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge	GW = Groundwater S=Soil/Solid	NP=Non-Potable Specify Other	Analyze For: TCLP: TPH: TX 1005	TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA - 8021	TPH- EPA - 8015	Chlorides EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
11	BH-202 @1.5	1.5	1.5	11-30-23	8:35		1									S						X	X	X		
12	BH-203 @1.5			11-30-23	8:37																					
13	BH-204 @ 1.5				8:40																					
14	BH-205 @ 1.5				8:42																					
15	BH-206 @ 1.5				8:45																					
16	BH-207 @ 1.5				8:47																					
17	BH-208 @ 1.5				8:50																					
18	BH-209 @ 1.5				8:51																					
19	BH-210 @ 1.5				8:53																					
20	BH-211 @ 1.5				8:55																					

Special Instructions: Report TPH-in-C6-C12 & C12-C28 & C28-C35 fractions aswell as total TPH
same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
Jose Belloc					
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL:	11/30/23	16:34

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N
by Sampler/Client Rep. ?	Y	N

by Courier? UPS DHL FedEx Lone Star

Temperature Upon Receipt:
Received: 10.0 °C Thermometor: CF-13
Adjusted: °C Factor:

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21 Page 1 of 1

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

Page 553 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934 **Fax No:** _____
Sampler Signature: Jose Belloc
e-mail: Jamey@Tellusservices

Project Name: Jalapeño
Project #: COEU # 11845
Project Loc: Lea, CO, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES

(lab use only)
ORDER #: 3L01003

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total #. of Containers	Preservation & # of Containers: Ice	HNO_3	HCl	H_2SO_4	NaOH	$Na_2S_2O_3$	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge	GW = Groundwater S=Soil/Solid	NP=Non-Potable Specify Other	Analyze For: TCLP: TPH: TX 1005 TX 1006	TOTAL: Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA - 8021	TPH- EPA - 8015	Chlorides EPA-300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
21	BH-216 @ 1.5	1.5	1.5	11-30-23	9:07		1									S						X	X	X		
22	BH-217 @ 1.5				9:10																					
23	BH-218 @ 1.5				9:12																					
24	BH-219 @ 1.5				9:15																					
25	BH-220 @ 1.5				9:18																					
26	BH-221 @ 1.5				9:20																					
27	BH-222 @ 1.5				9:22																					
28	BH-223 @ 1.5				9:23																					
29	BH-224 @ 1.5				9:24																					
30	BH-225 @ 1.5				9:26																					

Special Instructions: Report TPH - in - C6 - C12 & C12 - C28 & C28 - C35 fractions aswell as total TPH
same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
Jose Belloc					
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL: Jana Mc	11/30/23	16:3

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N
by Sampler/Client Rep. ?	Y	N

by Courier? UPS DHL FedEx Lone Star

Temperature Upon Receipt:
Received: 10.0 °C Thermometer: CF
Adjusted: °C Factor: 1.3

Received by OCD: 9/20/2024 8:26:56 AM
Released to Imaging: 12/18/2024 7:45:13 AM

Page 554 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey Fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934 **Fax No:** _____
Sampler Signature: Jose Belloc

Project Name: Jalapeño
Project #: CDEV # 11845
Project Loc: Lea, CO, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES
e-mail: Jamey@Tellusservices

(lab use only)
ORDER #: 3L01003

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total #. of Containers	Preservation & # of Containers: Ice	HNO_3	HCl	H_2SO_4	NaOH	$Na_2S_2O_3$	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge	GW = Groundwater S=Soil/Solid	NP=Non-Potable Specify Other	Analyze For: TCLP: TPH: TX 1005	TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX 8021	TPH- EPA - 8015	Chlorides EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
31	BH-226@1.5	1.5	1.5	11-30-23	9:27		1									S							X	X	X		
32	BH-227@1.5				9:30																						
33	BH-228@1.5				9:32																						
34	BH-229@1.5				9:33																						
35	BH-230@1.5				9:35																						
36	BH-231@1.5				9:36																						
37	BH-232@1.5				9:38																						
38	BH 233@1.5				9:40																						
39	BH 234@1.5				9:41																						
40	BH-235@1.5				9:44																						

Special Instructions: Report TPH-in-C6-C12 / C12-C28 / C28-C35 fractions aswell as total TPH
same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
Jose Belloc					
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL: Dana MC	11/30/23	16:34

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N
by Sampler/Client Rep. ?	Y	N

by Courier? UPS DHL FedEx Lone Star

Temperature Upon Receipt:
Received: 10.0 °C Thermometer: CF3
Adjusted: °C Factor:

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21 Page 1 of 2

Received by OCD: 9/20/2024 8:26:56 AM
Released to Imaging: 12/18/2024 7:45:13 AM

Page 555 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Janey Fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: Midland TX 79705
Telephone No: 432-557-0934 **Fax No:** _____
Sampler Signature: Jose Belloc

Project Name: Jalapeño
Project #: COEV # 1184[illegible]5
Project Loc: Lea, CO, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES
e-mail: Janey@Tellusservices

(lab use only)
ORDER #: 3L01003

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total #. of Containers	Preservation & # of Containers: Ice	HNO_3	HCl	H_2SO_4	NaOH	$Na_2S_2O_3$	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge GW = Groundwater S=Soil/Solid NP=Non-Potable Specify Other	Analyze For: TCLP: TPH: TX 1005 TX 1006	TOTAL: Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA - 8021	TPH - EPA - 8015	Chlorides EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
41	BH-236@1.5	1.5	1.5	11-30-23	9:47		1									S								
42	BH-237@1.5	1.5	1.5	11-30-23	9:50		1									S								
43	BH-238@1.5	1.5	1.5	11-30-23	9:52		1									S								
44	BH-212@1.5	1.5	1.5	11-30-23	8:56		1									S								
45	BH-213@1.5	1.5	1.5	11-30-23	8:58		1									S								
46	BH-214@1.5	1.5	1.5	11-30-23	9:02		1									S								
47	BH-215@1.5	1.5	1.5	11-30-23	9:05		1									S								

Special Instructions: Report TPH - in - C6 - C12 & C12 - C28 & C28 - C35 fractions as well as total TPH
same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
Jose Belloc					
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL: Lara MC	11/30/23	16:34

Laboratory Comments:
Sample Containers Intact? Y N
VOCs Free of Headspace? Y N
Labels on container(s) Y N
Custody seals on container(s) Y N
Custody seals on cooler(s) Y N
Sample Hand Delivered Y N
by Sampler/Client Rep. ? Y N
by Courier? UPS DHL FedEx Lone Star
Temperature Upon Receipt:
Received: 10.0 °C Thermometor: CF0
Adjusted: °C Factor: 1.3

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21 Page 1 of 1

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

PERMIAN BASIN
ENVIRONMENTAL LAB, LP
1400 Rankin Hwy
Midland, TX 79701

PBELAB

Analytical Report Rev. 1

Prepared for:

Jamey Fowler

Tellus Consulting, LLC

4000 North Big Spring Street Suite 109

Midland, TX 79705

Project: Jalapeno

Project Number: CDEV #11845

Location: Lea County, NM

Lab Order Number: 3L07001

NELAP ACCREDITED TNI LABORATORY

Current Certification

Report Date: 02/02/24

Tellus Consulting, LLC
4000 North Big Spring Street Suite 109
Midland TX, 79705

Project: Jalapeno
Project Number: CDEV #11845
Project Manager: Jamey Fowler

ANALYTICAL REPORT FOR SAMPLES

Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
BH-50 @ 1.5	3L07001-01	Soil	12/05/23 14:23	12-07-2023 08:46
BH-51 @ 1.5	3L07001-02	Soil	12/05/23 14:25	12-07-2023 08:46
BH-52 @ 1.5	3L07001-03	Soil	12/05/23 14:27	12-07-2023 08:46
BH-53 @ 1.5	3L07001-04	Soil	12/05/23 14:28	12-07-2023 08:46
BH-54 @ 1.5	3L07001-05	Soil	12/05/23 14:30	12-07-2023 08:46
BH-55 @ 1.5	3L07001-06	Soil	12/05/23 14:32	12-07-2023 08:46
BH-56 @ 1.5	3L07001-07	Soil	12/05/23 14:34	12-07-2023 08:46
BH-57 @ 1.5	3L07001-08	Soil	12/05/23 14:35	12-07-2023 08:46
BH-58 @ 1.5	3L07001-09	Soil	12/05/23 14:38	12-07-2023 08:46
BH-59 @ 1.5	3L07001-10	Soil	12/05/23 14:38	12-07-2023 08:46
BH-60 @ 1.5	3L07001-11	Soil	12/05/23 14:41	12-07-2023 08:46
BH-61 @ 1.5	3L07001-12	Soil	12/05/23 14:43	12-07-2023 08:46
BH-62 @ 1.5	3L07001-13	Soil	12/05/23 14:45	12-07-2023 08:46
BH-63 @ 1.5	3L07001-14	Soil	12/05/23 14:47	12-07-2023 08:46
BH-64 @ 1.5	3L07001-15	Soil	12/05/23 14:50	12-07-2023 08:46
BH-65 @ 1.5	3L07001-16	Soil	12/05/23 14:53	12-07-2023 08:46
BH-66 @ 1.5	3L07001-17	Soil	12/05/23 14:54	12-07-2023 08:46
BH-67 @ 1.5	3L07001-18	Soil	12/05/23 14:56	12-07-2023 08:46
BH-68 @ 1.5	3L07001-19	Soil	12/05/23 15:01	12-07-2023 08:46
BH-69 @ 1.5	3L07001-20	Soil	12/05/23 15:03	12-07-2023 08:46
BH-70 @ 1.5	3L07001-21	Soil	12/05/23 15:07	12-07-2023 08:46
BH-242 @ 1.5	3L07001-22	Soil	12/04/23 07:55	12-07-2023 08:46
BH-243 @ 1.5	3L07001-23	Soil	12/04/23 08:03	12-07-2023 08:46
BH-244 @ 1.5	3L07001-24	Soil	12/04/23 08:07	12-07-2023 08:46
BH-245 @ 1.5	3L07001-25	Soil	12/04/23 08:09	12-07-2023 08:46
BH-246 @ 1.5	3L07001-26	Soil	12/04/23 08:10	12-07-2023 08:46
BH-247 @ 1.5	3L07001-27	Soil	12/04/23 08:12	12-07-2023 08:46
BH-248 @ 1.5	3L07001-28	Soil	12/04/23 08:15	12-07-2023 08:46
BH-249 @ 1.5	3L07001-29	Soil	12/04/23 08:16	12-07-2023 08:46
BH-250 @ 1.5	3L07001-30	Soil	12/04/23 08:20	12-07-2023 08:46
BH-251 @ 1.5	3L07001-31	Soil	12/04/23 08:22	12-07-2023 08:46
BH-252 @ 1.5	3L07001-32	Soil	12/04/23 08:24	12-07-2023 08:46
BH-253 @ 1.5	3L07001-33	Soil	12/04/23 08:28	12-07-2023 08:46
BH-254 @ 1.5	3L07001-34	Soil	12/04/23 08:30	12-07-2023 08:46

Tellus Consulting, LLC
4000 North Big Spring Street Suite 109
Midland TX, 79705

Project: Jalapeno
Project Number: CDEV #11845
Project Manager: Jamey Fowler

ANALYTICAL REPORT FOR SAMPLES

Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
BH-255 @ 1.5	3L07001-35	Soil	12/04/23 08:41	12-07-2023 08:46
BH-256 @ 1.5	3L07001-36	Soil	12/04/23 08:44	12-07-2023 08:46
BH-257 @ 1.5	3L07001-37	Soil	12/04/23 08:45	12-07-2023 08:46
BH-258 @ 1.5	3L07001-38	Soil	12/04/23 08:47	12-07-2023 08:46
BH-259 @ 1.5	3L07001-39	Soil	12/04/23 08:49	12-07-2023 08:46
BH-260 @ 1.5	3L07001-40	Soil	12/04/23 08:52	12-07-2023 08:46
BH-261 @ 1.5	3L07001-41	Soil	12/04/23 08:53	12-07-2023 08:46
BH-262 @ 1.5	3L07001-42	Soil	12/04/23 08:55	12-07-2023 08:46
BH-263 @ 1.5	3L07001-43	Soil	12/04/23 08:56	12-07-2023 08:46
BH-288 @ 1.0	3L07001-44	Soil	12/04/23 09:43	12-07-2023 08:46
BH-289 @ 1.0	3L07001-45	Soil	12/04/23 09:44	12-07-2023 08:46
BH-290 @ 1.0	3L07001-46	Soil	12/04/23 09:47	12-07-2023 08:46
BH-291 @ 1.0	3L07001-47	Soil	12/04/23 09:50	12-07-2023 08:46
BH-292 @ 1.0	3L07001-48	Soil	12/04/23 09:51	12-07-2023 08:46
BH-293 @ 1.0	3L07001-49	Soil	12/04/23 09:59	12-07-2023 08:46
BH-294 @ 1.0	3L07001-50	Soil	12/04/23 10:03	12-07-2023 08:46
BH-295 @ 1.0	3L07001-51	Soil	12/04/23 10:04	12-07-2023 08:46
BH-264 @ 1.5	3L07001-52	Soil	12/04/23 08:59	12-07-2023 08:46
BH-265 @ 1.5	3L07001-53	Soil	12/04/23 09:03	12-07-2023 08:46
BH-266 @ 1.5	3L07001-54	Soil	12/04/23 09:05	12-07-2023 08:46
BH-267 @ 1.5	3L07001-55	Soil	12/04/23 09:07	12-07-2023 08:46
BH-268 @ 1.5	3L07001-56	Soil	12/04/23 09:08	12-07-2023 08:46
BH-269 @ 1.5	3L07001-57	Soil	12/04/23 09:10	12-07-2023 08:46
BH-270 @ 1.5	3L07001-58	Soil	12/04/23 09:11	12-07-2023 08:46
BH-271 @ 1.5	3L07001-59	Soil	12/04/23 09:13	12-07-2023 08:46
BH-272 @ 1.5	3L07001-60	Soil	12/04/23 09:15	12-07-2023 08:46
BH-273 @ 1.5	3L07001-61	Soil	12/04/23 09:17	12-07-2023 08:46
BH-274 @ 1.5	3L07001-62	Soil	12/04/23 09:18	12-07-2023 08:46
BH-275 @ 1.5	3L07001-63	Soil	12/04/23 09:19	12-07-2023 08:46
BH-276 @ 1.5	3L07001-64	Soil	12/04/23 09:21	12-07-2023 08:46
BH-277 @ 1.5	3L07001-65	Soil	12/04/23 09:23	12-07-2023 08:46
BH-278 @ 1.5	3L07001-66	Soil	12/04/23 09:24	12-07-2023 08:46
BH-279 @ 1.5	3L07001-67	Soil	12/04/23 09:25	12-07-2023 08:46
BH-280 @ 1.5	3L07001-68	Soil	12/04/23 09:30	12-07-2023 08:46

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

ANALYTICAL REPORT FOR SAMPLES

Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
BH-281 @ 1.5	3L07001-69	Soil	12/04/23 09:31	12-07-2023 08:46
BH-282 @ 1.5	3L07001-70	Soil	12/04/23 09:32	12-07-2023 08:46
BH-283 @ 1.0	3L07001-71	Soil	12/04/23 09:33	12-07-2023 08:46
BH-284 @ 1.0	3L07001-72	Soil	12/04/23 09:34	12-07-2023 08:46
BH-285 @ 1.0	3L07001-73	Soil	12/04/23 09:35	12-07-2023 08:46
BH-286 @ 1.0	3L07001-74	Soil	12/04/23 09:37	12-07-2023 08:46
BH-287 @ 1.0	3L07001-75	Soil	12/04/23 09:38	12-07-2023 08:46
BH-296 @ 1.0	3L07001-76	Soil	12/04/23 10:06	12-07-2023 08:46
BH-297 @ 1.0	3L07001-77	Soil	12/04/23 10:07	12-07-2023 08:46
BH-298 @ 1.0	3L07001-78	Soil	12/04/23 10:08	12-07-2023 08:46
BH-299 @ 1.0	3L07001-79	Soil	12/04/23 10:15	12-07-2023 08:46
BH-300 @ 1.0	3L07001-80	Soil	12/04/23 10:17	12-07-2023 08:46
BH-301 @ 1.0	3L07001-81	Soil	12/04/23 10:21	12-07-2023 08:46
BH-302 @ 1.0	3L07001-82	Soil	12/04/23 10:22	12-07-2023 08:46
BH-303 @ 1.0	3L07001-83	Soil	12/04/23 10:23	12-07-2023 08:46
BH-304 @ 1.0	3L07001-84	Soil	12/04/23 10:24	12-07-2023 08:46
BH-305 @ 1.0	3L07001-85	Soil	12/04/23 10:25	12-07-2023 08:46
BH-306 @ 1.0	3L07001-86	Soil	12/04/23 10:27	12-07-2023 08:46
BH-307 @ 1.0	3L07001-87	Soil	12/04/23 10:28	12-07-2023 08:46
BH-308 @ 1.0	3L07001-88	Soil	12/04/23 10:31	12-07-2023 08:46
BH-309 @ 1.0	3L07001-89	Soil	12/04/23 10:42	12-07-2023 08:46
BH-310 @ 1.0	3L07001-90	Soil	12/04/23 10:45	12-07-2023 08:46

This revised report reflects the correction of the sample ID 3L07001-90 To BH-310 @ 1.0

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-50 @ 1.5

3L07001-01 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 04:36	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 04:36	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 04:36	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 04:36	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 04:36	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*118 %*		*80-120*		*P3L1107*	*12/11/23 09:16*	*12/12/23 04:36*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*95.5 %*		*80-120*		*P3L1107*	*12/11/23 09:16*	*12/12/23 04:36*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/11/23 09:16	12/12/23 04:36	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	12/11/23 09:16	12/12/23 04:36	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*87.4 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*93.7 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	12/08/23 13:46	12/08/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**248**	1.06	mg/kg dry	1	P3L0812	12/08/23 16:03	12/14/23 14:39	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-51 @ 1.5

3L07001-02 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 05:00	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 05:00	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 05:00	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 05:00	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 05:00	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*117 %*		*80-120*		*P3L1107*	*12/11/23 09:16*	*12/12/23 05:00*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*95.9 %*		*80-120*		*P3L1107*	*12/11/23 09:16*	*12/12/23 05:00*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/11/23 09:16	12/12/23 05:00	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/11/23 09:16	12/12/23 05:00	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*84.8 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*88.0 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/08/23 13:46	12/08/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**390**	1.04	mg/kg dry	1	P3L0812	12/08/23 16:03	12/14/23 14:54	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-52 @ 1.5

3L07001-03 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 05:24	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 05:24	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 05:24	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 05:24	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 05:24	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*118 %*		*80-120*		*P3L1107*	*12/11/23 09:16*	*12/12/23 05:24*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*95.3 %*		*80-120*		*P3L1107*	*12/11/23 09:16*	*12/12/23 05:24*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/11/23 09:16	12/12/23 05:24	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/11/23 09:16	12/12/23 05:24	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*84.1 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*87.8 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/08/23 13:46	12/08/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**181**	1.05	mg/kg dry	1	P3L0812	12/08/23 16:03	12/14/23 15:08	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-53 @ 1.5

3L07001-04 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 05:49	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 05:49	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 05:49	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 05:49	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 05:49	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*118 %*		*80-120*		*P3L1107*	*12/11/23 09:16*	*12/12/23 05:49*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*95.6 %*		*80-120*		*P3L1107*	*12/11/23 09:16*	*12/12/23 05:49*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/11/23 09:16	12/12/23 05:49	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/11/23 09:16	12/12/23 05:49	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*83.6 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*88.6 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/08/23 13:46	12/08/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**423**	1.05	mg/kg dry	1	P3L0812	12/08/23 16:03	12/14/23 15:22	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-54 @ 1.5

3L07001-05 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00108	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 07:01	EPA 8021B	
Toluene	ND	0.00108	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 07:01	EPA 8021B	
Ethylbenzene	ND	0.00108	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 07:01	EPA 8021B	
Xylene (p/m)	ND	0.00215	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 07:01	EPA 8021B	
Xylene (o)	ND	0.00108	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 07:01	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*118 %*		*80-120*		*P3L1107*	*12/11/23 09:16*	*12/12/23 07:01*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*94.9 %*		*80-120*		*P3L1107*	*12/11/23 09:16*	*12/12/23 07:01*	*EPA 8021B*	
Xylenes (total)	ND	0.00215	mg/kg dry	1	[CALC]	12/11/23 09:16	12/12/23 07:01	EPA 8021B	
Total BTEX	ND	0.00108	mg/kg dry	1	[CALC]	12/11/23 09:16	12/12/23 07:01	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.9	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C12-C28	ND	26.9	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C28-C35	ND	26.9	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*84.7 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*89.2 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.9	mg/kg dry	1	[CALC]	12/08/23 13:46	12/08/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**40.6**	1.08	mg/kg dry	1	P3L0812	12/08/23 16:03	12/14/23 15:37	EPA 300.0	
% Moisture	**7.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-55 @ 1.5

3L07001-06 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 07:26	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 07:26	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 07:26	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 07:26	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 07:26	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*95.7 %*		*80-120*		*P3L1107*	*12/11/23 09:16*	*12/12/23 07:26*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*119 %*		*80-120*		*P3L1107*	*12/11/23 09:16*	*12/12/23 07:26*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/11/23 09:16	12/12/23 07:26	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	12/11/23 09:16	12/12/23 07:26	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*82.5 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*85.3 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	12/08/23 13:46	12/08/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**189**	1.06	mg/kg dry	1	P3L0812	12/08/23 16:03	12/14/23 15:51	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-56 @ 1.5

3L07001-07 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00108	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 07:50	EPA 8021B	
Toluene	ND	0.00108	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 07:50	EPA 8021B	
Ethylbenzene	ND	0.00108	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 07:50	EPA 8021B	
Xylene (p/m)	ND	0.00215	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 07:50	EPA 8021B	
Xylene (o)	ND	0.00108	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 07:50	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*95.7 %*		*80-120*		*P3L1107*	*12/11/23 09:16*	*12/12/23 07:50*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*118 %*		*80-120*		*P3L1107*	*12/11/23 09:16*	*12/12/23 07:50*	*EPA 8021B*	
Xylenes (total)	ND	0.00215	mg/kg dry	1	[CALC]	12/11/23 09:16	12/12/23 07:50	EPA 8021B	
Total BTEX	ND	0.00108	mg/kg dry	1	[CALC]	12/11/23 09:16	12/12/23 07:50	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.9	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C12-C28	ND	26.9	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C28-C35	ND	26.9	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*86.0 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*91.7 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.9	mg/kg dry	1	[CALC]	12/08/23 13:46	12/08/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**210**	1.08	mg/kg dry	1	P3L0812	12/08/23 16:03	12/14/23 16:05	EPA 300.0	
% Moisture	**7.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-57 @ 1.5

3L07001-08 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 08:14	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 08:14	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 08:14	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 08:14	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 08:14	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*96.0 %*		*80-120*		*P3L1107*	*12/11/23 09:16*	*12/12/23 08:14*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*118 %*		*80-120*		*P3L1107*	*12/11/23 09:16*	*12/12/23 08:14*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/11/23 09:16	12/12/23 08:14	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/11/23 09:16	12/12/23 08:14	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*86.0 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*96.6 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/08/23 13:46	12/08/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**93.1**	1.03	mg/kg dry	1	P3L0812	12/08/23 16:03	12/14/23 16:20	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-58 @ 1.5

3L07001-09 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 08:38	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 08:38	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 08:38	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 08:38	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 08:38	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*118 %*		*80-120*		*P3L1107*	*12/11/23 09:16*	*12/12/23 08:38*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*95.6 %*		*80-120*		*P3L1107*	*12/11/23 09:16*	*12/12/23 08:38*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/11/23 09:16	12/12/23 08:38	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	12/11/23 09:16	12/12/23 08:38	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*83.3 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*87.6 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	12/08/23 13:46	12/08/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**68.2**	1.06	mg/kg dry	1	P3L0812	12/08/23 16:03	12/14/23 17:03	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-59 @ 1.5

3L07001-10 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 09:03	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 09:03	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 09:03	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 09:03	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 09:03	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*119 %*		*80-120*		*P3L1107*	*12/11/23 09:16*	*12/12/23 09:03*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*96.3 %*		*80-120*		*P3L1107*	*12/11/23 09:16*	*12/12/23 09:03*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/11/23 09:16	12/12/23 09:03	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/11/23 09:16	12/12/23 09:03	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*89.5 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*101 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/08/23 13:46	12/08/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**205**	1.05	mg/kg dry	1	P3L0812	12/08/23 16:03	12/14/23 17:46	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-60 @ 1.5

3L07001-11 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00108	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 09:27	EPA 8021B	
Toluene	ND	0.00108	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 09:27	EPA 8021B	
Ethylbenzene	ND	0.00108	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 09:27	EPA 8021B	
Xylene (p/m)	ND	0.00215	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 09:27	EPA 8021B	
Xylene (o)	ND	0.00108	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 09:27	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*95.4 %*		*80-120*		*P3L1107*	*12/11/23 09:16*	*12/12/23 09:27*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*118 %*		*80-120*		*P3L1107*	*12/11/23 09:16*	*12/12/23 09:27*	*EPA 8021B*	
Xylenes (total)	ND	0.00215	mg/kg dry	1	[CALC]	12/11/23 09:16	12/12/23 09:27	EPA 8021B	
Total BTEX	ND	0.00108	mg/kg dry	1	[CALC]	12/11/23 09:16	12/12/23 09:27	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.9	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C12-C28	ND	26.9	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C28-C35	ND	26.9	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*86.4 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*97.1 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.9	mg/kg dry	1	[CALC]	12/08/23 13:46	12/08/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**87.5**	1.08	mg/kg dry	1	P3L0812	12/08/23 16:03	12/14/23 18:01	EPA 300.0	
% Moisture	**7.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-61 @ 1.5

3L07001-12 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00108	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 09:51	EPA 8021B	
Toluene	ND	0.00108	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 09:51	EPA 8021B	
Ethylbenzene	ND	0.00108	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 09:51	EPA 8021B	
Xylene (p/m)	ND	0.00215	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 09:51	EPA 8021B	
Xylene (o)	ND	0.00108	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 09:51	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*94.9 %*		*80-120*		*P3L1107*	*12/11/23 09:16*	*12/12/23 09:51*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*117 %*		*80-120*		*P3L1107*	*12/11/23 09:16*	*12/12/23 09:51*	*EPA 8021B*	
Xylenes (total)	ND	0.00215	mg/kg dry	1	[CALC]	12/11/23 09:16	12/12/23 09:51	EPA 8021B	
Total BTEX	ND	0.00108	mg/kg dry	1	[CALC]	12/11/23 09:16	12/12/23 09:51	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.9	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C12-C28	**36.4**	26.9	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C28-C35	ND	26.9	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*80.6 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*90.4 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	**36.4**	26.9	mg/kg dry	1	[CALC]	12/08/23 13:46	12/08/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**301**	1.08	mg/kg dry	1	P3L0812	12/08/23 16:03	12/14/23 18:16	EPA 300.0	
% Moisture	**7.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-62 @ 1.5

3L07001-13 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 10:16	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 10:16	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 10:16	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 10:16	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 10:16	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*95.0 %*		*80-120*		*P3L1107*	*12/11/23 09:16*	*12/12/23 10:16*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*117 %*		*80-120*		*P3L1107*	*12/11/23 09:16*	*12/12/23 10:16*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/11/23 09:16	12/12/23 10:16	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/11/23 09:16	12/12/23 10:16	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*81.2 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*89.2 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/08/23 13:46	12/08/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**252**	1.04	mg/kg dry	1	P3L0812	12/08/23 16:03	12/14/23 18:30	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-63 @ 1.5

3L07001-14 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 10:40	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 10:40	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 10:40	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 10:40	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1107	12/11/23 09:16	12/12/23 10:40	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*95.4 %*		*80-120*		*P3L1107*	*12/11/23 09:16*	*12/12/23 10:40*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*118 %*		*80-120*		*P3L1107*	*12/11/23 09:16*	*12/12/23 10:40*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/11/23 09:16	12/12/23 10:40	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/11/23 09:16	12/12/23 10:40	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C12-C28	**30.1**	26.0	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*78.2 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*89.9 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	**30.1**	26.0	mg/kg dry	1	[CALC]	12/08/23 13:46	12/08/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**217**	1.04	mg/kg dry	1	P3L0812	12/08/23 16:03	12/14/23 18:44	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-64 @ 1.5

3L07001-15 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00102	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 15:08	EPA 8021B	
Toluene	ND	0.00102	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 15:08	EPA 8021B	
Ethylbenzene	ND	0.00102	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 15:08	EPA 8021B	
Xylene (p/m)	ND	0.00204	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 15:08	EPA 8021B	
Xylene (o)	ND	0.00102	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 15:08	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*93.5 %*		*80-120*		*P3L1210*	*12/12/23 09:02*	*12/12/23 15:08*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*115 %*		*80-120*		*P3L1210*	*12/12/23 09:02*	*12/12/23 15:08*	*EPA 8021B*	
Xylenes (total)	ND	0.00204	mg/kg dry	1	[CALC]	12/12/23 09:02	12/12/23 15:08	EPA 8021B	
Total BTEX	ND	0.00102	mg/kg dry	1	[CALC]	12/12/23 09:02	12/12/23 15:08	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.5	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C12-C28	ND	25.5	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C28-C35	ND	25.5	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*81.0 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*89.6 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.5	mg/kg dry	1	[CALC]	12/08/23 13:46	12/08/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**102**	1.02	mg/kg dry	1	P3L0812	12/08/23 16:03	12/14/23 18:58	EPA 300.0	
% Moisture	**2.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-65 @ 1.5

3L07001-16 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00102	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 15:32	EPA 8021B	
Toluene	ND	0.00102	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 15:32	EPA 8021B	
Ethylbenzene	ND	0.00102	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 15:32	EPA 8021B	
Xylene (p/m)	ND	0.00204	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 15:32	EPA 8021B	
Xylene (o)	ND	0.00102	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 15:32	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*93.4 %*		*80-120*		*P3L1210*	*12/12/23 09:02*	*12/12/23 15:32*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*114 %*		*80-120*		*P3L1210*	*12/12/23 09:02*	*12/12/23 15:32*	*EPA 8021B*	
Xylenes (total)	ND	0.00204	mg/kg dry	1	[CALC]	12/12/23 09:02	12/12/23 15:32	EPA 8021B	
Total BTEX	ND	0.00102	mg/kg dry	1	[CALC]	12/12/23 09:02	12/12/23 15:32	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.5	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C12-C28	ND	25.5	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C28-C35	ND	25.5	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*72.1 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*79.8 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.5	mg/kg dry	1	[CALC]	12/08/23 13:46	12/08/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**171**	1.02	mg/kg dry	1	P3L0812	12/08/23 16:03	12/14/23 19:13	EPA 300.0	
% Moisture	**2.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-66 @ 1.5

3L07001-17 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 15:57	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 15:57	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 15:57	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 15:57	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 15:57	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*115 %*		*80-120*		*P3L1210*	*12/12/23 09:02*	*12/12/23 15:57*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*93.5 %*		*80-120*		*P3L1210*	*12/12/23 09:02*	*12/12/23 15:57*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/12/23 09:02	12/12/23 15:57	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/12/23 09:02	12/12/23 15:57	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C12-C28	**34.6**	25.8	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*79.9 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*87.7 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	**34.6**	25.8	mg/kg dry	1	[CALC]	12/08/23 13:46	12/08/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**207**	1.03	mg/kg dry	1	P3L0812	12/08/23 16:03	12/14/23 19:27	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-67 @ 1.5

3L07001-18 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00108	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 16:21	EPA 8021B	
Toluene	ND	0.00108	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 16:21	EPA 8021B	
Ethylbenzene	ND	0.00108	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 16:21	EPA 8021B	
Xylene (p/m)	ND	0.00215	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 16:21	EPA 8021B	
Xylene (o)	ND	0.00108	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 16:21	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*117 %*		*80-120*		*P3L1210*	*12/12/23 09:02*	*12/12/23 16:21*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*93.7 %*		*80-120*		*P3L1210*	*12/12/23 09:02*	*12/12/23 16:21*	*EPA 8021B*	
Xylenes (total)	ND	0.00215	mg/kg dry	1	[CALC]	12/12/23 09:02	12/12/23 16:21	EPA 8021B	
Total BTEX	ND	0.00108	mg/kg dry	1	[CALC]	12/12/23 09:02	12/12/23 16:21	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.9	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C12-C28	ND	26.9	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C28-C35	ND	26.9	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*78.5 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*86.9 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.9	mg/kg dry	1	[CALC]	12/08/23 13:46	12/08/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**186**	1.08	mg/kg dry	1	P3L0812	12/08/23 16:03	12/14/23 19:41	EPA 300.0	
% Moisture	**7.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-68 @ 1.5

3L07001-19 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 16:45	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 16:45	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 16:45	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 16:45	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 16:45	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*94.2 %*		*80-120*		*P3L1210*	*12/12/23 09:02*	*12/12/23 16:45*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*117 %*		*80-120*		*P3L1210*	*12/12/23 09:02*	*12/12/23 16:45*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/12/23 09:02	12/12/23 16:45	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/12/23 09:02	12/12/23 16:45	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*78.7 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*85.5 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/08/23 13:46	12/08/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**136**	1.04	mg/kg dry	1	P3L0813	12/08/23 16:08	12/15/23 14:18	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-69 @ 1.5

3L07001-20 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 03:41	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 03:41	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 03:41	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 03:41	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 03:41	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*115 %*		*80-120*		*P3L1303*	*12/13/23 09:44*	*12/14/23 03:41*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*93.1 %*		*80-120*		*P3L1303*	*12/13/23 09:44*	*12/14/23 03:41*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/13/23 09:44	12/14/23 03:41	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/13/23 09:44	12/14/23 03:41	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0807	12/08/23 13:46	12/08/23 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*81.1 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*89.5 %*		*70-130*		*P3L0807*	*12/08/23 13:46*	*12/08/23 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/08/23 13:46	12/08/23 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**21.5**	1.03	mg/kg dry	1	P3L0813	12/08/23 16:08	12/15/23 15:01	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-70 @ 1.5

3L07001-21 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 17:34	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 17:34	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 17:34	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 17:34	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 17:34	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*94.3 %*		*80-120*		*P3L1210*	*12/12/23 09:02*	*12/12/23 17:34*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*118 %*		*80-120*		*P3L1210*	*12/12/23 09:02*	*12/12/23 17:34*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/12/23 09:02	12/12/23 17:34	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/12/23 09:02	12/12/23 17:34	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
Surrogate: 1-Chlorooctane	*83.2 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Surrogate: o-Terphenyl	*88.9 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/08/23 13:45	12/09/23 12:27	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**100**	1.03	mg/kg dry	1	P3L0813	12/08/23 16:08	12/15/23 15:15	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-242 @ 1.5

3L07001-22 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 17:59	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 17:59	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 17:59	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 17:59	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 17:59	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*118 %*		*80-120*		*P3L1210*	*12/12/23 09:02*	*12/12/23 17:59*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*94.6 %*		*80-120*		*P3L1210*	*12/12/23 09:02*	*12/12/23 17:59*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/12/23 09:02	12/12/23 17:59	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/12/23 09:02	12/12/23 17:59	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
Surrogate: 1-Chlorooctane	*77.9 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Surrogate: o-Terphenyl	*81.5 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/08/23 13:45	12/09/23 12:27	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**25.6**	1.04	mg/kg dry	1	P3L0813	12/08/23 16:08	12/15/23 15:29	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-243 @ 1.5

3L07001-23 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 18:23	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 18:23	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 18:23	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 18:23	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 18:23	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*116 %*		*80-120*		*P3L1210*	*12/12/23 09:02*	*12/12/23 18:23*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*94.9 %*		*80-120*		*P3L1210*	*12/12/23 09:02*	*12/12/23 18:23*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/12/23 09:02	12/12/23 18:23	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/12/23 09:02	12/12/23 18:23	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
Surrogate: 1-Chlorooctane	*77.6 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Surrogate: o-Terphenyl	*83.7 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/08/23 13:45	12/09/23 12:27	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**30.4**	1.03	mg/kg dry	1	P3L0813	12/08/23 16:08	12/15/23 15:44	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-244 @ 1.5

3L07001-24 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 18:47	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 18:47	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 18:47	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 18:47	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 18:47	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*115 %*		*80-120*		*P3L1210*	*12/12/23 09:02*	*12/12/23 18:47*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*94.4 %*		*80-120*		*P3L1210*	*12/12/23 09:02*	*12/12/23 18:47*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/12/23 09:02	12/12/23 18:47	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/12/23 09:02	12/12/23 18:47	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
Surrogate: 1-Chlorooctane	*76.2 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Surrogate: o-Terphenyl	*81.5 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/08/23 13:45	12/09/23 12:27	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**132**	1.04	mg/kg dry	1	P3L0813	12/08/23 16:08	12/15/23 15:58	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-245 @ 1.5

3L07001-25 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 20:00	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 20:00	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 20:00	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 20:00	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 20:00	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*116 %*		*80-120*		*P3L1210*	*12/12/23 09:02*	*12/12/23 20:00*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*94.3 %*		*80-120*		*P3L1210*	*12/12/23 09:02*	*12/12/23 20:00*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/12/23 09:02	12/12/23 20:00	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	12/12/23 09:02	12/12/23 20:00	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
Surrogate: 1-Chlorooctane	*79.0 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Surrogate: o-Terphenyl	*83.2 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	12/08/23 13:45	12/09/23 12:27	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**77.2**	1.06	mg/kg dry	1	P3L0813	12/08/23 16:08	12/15/23 16:12	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-246 @ 1.5

3L07001-26 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 20:25	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 20:25	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 20:25	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 20:25	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 20:25	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*94.5 %*		*80-120*		*P3L1210*	*12/12/23 09:02*	*12/12/23 20:25*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*118 %*		*80-120*		*P3L1210*	*12/12/23 09:02*	*12/12/23 20:25*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/12/23 09:02	12/12/23 20:25	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/12/23 09:02	12/12/23 20:25	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
Surrogate: 1-Chlorooctane	*74.0 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Surrogate: o-Terphenyl	*76.3 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/08/23 13:45	12/09/23 12:27	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**30.4**	1.03	mg/kg dry	1	P3L0813	12/08/23 16:08	12/15/23 16:27	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-247 @ 1.5

3L07001-27 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 20:49	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 20:49	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 20:49	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 20:49	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 20:49	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*118 %*		*80-120*		*P3L1210*	*12/12/23 09:02*	*12/12/23 20:49*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*94.5 %*		*80-120*		*P3L1210*	*12/12/23 09:02*	*12/12/23 20:49*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/12/23 09:02	12/12/23 20:49	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/12/23 09:02	12/12/23 20:49	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
Surrogate: 1-Chlorooctane	*78.2 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Surrogate: o-Terphenyl	*83.7 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/08/23 13:45	12/09/23 12:27	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**203**	1.04	mg/kg dry	1	P3L0813	12/08/23 16:08	12/15/23 16:41	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-248 @ 1.5

3L07001-28 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 21:13	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 21:13	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 21:13	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 21:13	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 21:13	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*94.4 %*		*80-120*		*P3L1210*	*12/12/23 09:02*	*12/12/23 21:13*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*114 %*		*80-120*		*P3L1210*	*12/12/23 09:02*	*12/12/23 21:13*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/12/23 09:02	12/12/23 21:13	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/12/23 09:02	12/12/23 21:13	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
Surrogate: 1-Chlorooctane	*80.1 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Surrogate: o-Terphenyl	*87.6 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/08/23 13:45	12/09/23 12:27	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**51.4**	1.04	mg/kg dry	1	P3L0813	12/08/23 16:08	12/15/23 16:55	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-249 @ 1.5

3L07001-29 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 21:38	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 21:38	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 21:38	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 21:38	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 21:38	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*94.7 %*		*80-120*		*P3L1210*	*12/12/23 09:02*	*12/12/23 21:38*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*118 %*		*80-120*		*P3L1210*	*12/12/23 09:02*	*12/12/23 21:38*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/12/23 09:02	12/12/23 21:38	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/12/23 09:02	12/12/23 21:38	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
Surrogate: 1-Chlorooctane	*78.1 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Surrogate: o-Terphenyl	*85.8 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/08/23 13:45	12/09/23 12:27	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**198**	1.04	mg/kg dry	1	P3L0813	12/08/23 16:08	12/15/23 17:38	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-250 @ 1.5

3L07001-30 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 22:02	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 22:02	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 22:02	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 22:02	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 22:02	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*95.6 %*		*80-120*		*P3L1210*	*12/12/23 09:02*	*12/12/23 22:02*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*115 %*		*80-120*		*P3L1210*	*12/12/23 09:02*	*12/12/23 22:02*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/12/23 09:02	12/12/23 22:02	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/12/23 09:02	12/12/23 22:02	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
Surrogate: 1-Chlorooctane	*81.4 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Surrogate: o-Terphenyl	*87.6 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/08/23 13:45	12/09/23 12:27	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**48.4**	1.04	mg/kg dry	1	P3L0813	12/08/23 16:08	12/15/23 18:21	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-251 @ 1.5

3L07001-31 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 22:26	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 22:26	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 22:26	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 22:26	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 22:26	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*94.3 %*		*80-120*		*P3L1210*	*12/12/23 09:02*	*12/12/23 22:26*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*118 %*		*80-120*		*P3L1210*	*12/12/23 09:02*	*12/12/23 22:26*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/12/23 09:02	12/12/23 22:26	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/12/23 09:02	12/12/23 22:26	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
Surrogate: 1-Chlorooctane	*75.6 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Surrogate: o-Terphenyl	*85.6 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/08/23 13:45	12/09/23 12:27	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**265**	1.05	mg/kg dry	1	P3L0813	12/08/23 16:08	12/15/23 18:36	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-252 @ 1.5

3L07001-32 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 22:51	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 22:51	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 22:51	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 22:51	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 22:51	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*115 %*		*80-120*		*P3L1210*	*12/12/23 09:02*	*12/12/23 22:51*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*94.8 %*		*80-120*		*P3L1210*	*12/12/23 09:02*	*12/12/23 22:51*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/12/23 09:02	12/12/23 22:51	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/12/23 09:02	12/12/23 22:51	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
Surrogate: 1-Chlorooctane	*80.2 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Surrogate: o-Terphenyl	*88.9 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/08/23 13:45	12/09/23 12:27	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**49.3**	1.05	mg/kg dry	1	P3L0813	12/08/23 16:08	12/15/23 18:50	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-253 @ 1.5

3L07001-33 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 23:15	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 23:15	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 23:15	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 23:15	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 23:15	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*94.2 %*		*80-120*		*P3L1210*	*12/12/23 09:02*	*12/12/23 23:15*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*117 %*		*80-120*		*P3L1210*	*12/12/23 09:02*	*12/12/23 23:15*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/12/23 09:02	12/12/23 23:15	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/12/23 09:02	12/12/23 23:15	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
Surrogate: 1-Chlorooctane	*83.7 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Surrogate: o-Terphenyl	*90.4 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/08/23 13:45	12/09/23 12:27	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**63.1**	1.04	mg/kg dry	1	P3L0813	12/08/23 16:08	12/15/23 19:05	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-254 @ 1.5

3L07001-34 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 23:39	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 23:39	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 23:39	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 23:39	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L1210	12/12/23 09:02	12/12/23 23:39	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*118 %*		*80-120*		*P3L1210*	*12/12/23 09:02*	*12/12/23 23:39*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*94.5 %*		*80-120*		*P3L1210*	*12/12/23 09:02*	*12/12/23 23:39*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/12/23 09:02	12/12/23 23:39	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	12/12/23 09:02	12/12/23 23:39	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
Surrogate: 1-Chlorooctane	*86.1 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Surrogate: o-Terphenyl	*92.1 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	12/08/23 13:45	12/09/23 12:27	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**35.9**	1.06	mg/kg dry	1	P3L0813	12/08/23 16:08	12/15/23 19:19	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-255 @ 1.5

3L07001-35 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 04:32	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 04:32	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 04:32	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 04:32	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 04:32	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*93.9 %*		*80-120*		*P3L1211*	*12/12/23 09:04*	*12/13/23 04:32*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*116 %*		*80-120*		*P3L1211*	*12/12/23 09:04*	*12/13/23 04:32*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/12/23 09:04	12/13/23 04:32	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/12/23 09:04	12/13/23 04:32	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
Surrogate: 1-Chlorooctane	*79.6 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Surrogate: o-Terphenyl	*88.5 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/08/23 13:45	12/09/23 12:27	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**53.8**	1.04	mg/kg dry	1	P3L0813	12/08/23 16:08	12/15/23 19:33	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-256 @ 1.5

3L07001-36 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 04:56	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 04:56	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 04:56	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 04:56	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 04:56	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*117 %*		*80-120*		*P3L1211*	*12/12/23 09:04*	*12/13/23 04:56*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*93.7 %*		*80-120*		*P3L1211*	*12/12/23 09:04*	*12/13/23 04:56*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/12/23 09:04	12/13/23 04:56	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	12/12/23 09:04	12/13/23 04:56	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
Surrogate: 1-Chlorooctane	*85.2 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Surrogate: o-Terphenyl	*93.9 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	12/08/23 13:45	12/09/23 12:27	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**36.2**	1.06	mg/kg dry	1	P3L0813	12/08/23 16:08	12/15/23 19:48	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-257 @ 1.5

3L07001-37 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 05:20	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 05:20	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 05:20	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 05:20	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 05:20	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*93.8 %*		*80-120*		*P3L1211*	*12/12/23 09:04*	*12/13/23 05:20*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*116 %*		*80-120*		*P3L1211*	*12/12/23 09:04*	*12/13/23 05:20*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/12/23 09:04	12/13/23 05:20	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/12/23 09:04	12/13/23 05:20	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
Surrogate: 1-Chlorooctane	*81.0 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Surrogate: o-Terphenyl	*85.1 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/08/23 13:45	12/09/23 12:27	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**25.8**	1.04	mg/kg dry	1	P3L0813	12/08/23 16:08	12/15/23 20:02	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-258 @ 1.5

3L07001-38 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 05:45	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 05:45	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 05:45	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 05:45	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 05:45	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*94.0 %*		*80-120*		*P3L1211*	*12/12/23 09:04*	*12/13/23 05:45*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*116 %*		*80-120*		*P3L1211*	*12/12/23 09:04*	*12/13/23 05:45*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/12/23 09:04	12/13/23 05:45	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/12/23 09:04	12/13/23 05:45	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
Surrogate: 1-Chlorooctane	*98.1 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Surrogate: o-Terphenyl	*113 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/08/23 13:45	12/09/23 12:27	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**33.2**	1.05	mg/kg dry	1	P3L0813	12/08/23 16:08	12/15/23 20:16	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-259 @ 1.5

3L07001-39 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 06:09	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 06:09	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 06:09	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 06:09	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 06:09	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*94.3 %*		*80-120*		*P3L1211*	*12/12/23 09:04*	*12/13/23 06:09*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*116 %*		*80-120*		*P3L1211*	*12/12/23 09:04*	*12/13/23 06:09*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/12/23 09:04	12/13/23 06:09	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/12/23 09:04	12/13/23 06:09	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
Surrogate: 1-Chlorooctane	*79.9 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Surrogate: o-Terphenyl	*91.8 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/08/23 13:45	12/09/23 12:27	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**46.2**	1.05	mg/kg dry	1	P3L0814	12/08/23 16:12	12/09/23 02:25	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-260 @ 1.5

3L07001-40 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 06:34	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 06:34	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 06:34	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 06:34	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 06:34	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*118 %*		*80-120*		*P3L1211*	*12/12/23 09:04*	*12/13/23 06:34*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*94.3 %*		*80-120*		*P3L1211*	*12/12/23 09:04*	*12/13/23 06:34*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/12/23 09:04	12/13/23 06:34	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/12/23 09:04	12/13/23 06:34	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0808	12/08/23 13:45	12/09/23 12:27	TPH 8015M	
Surrogate: 1-Chlorooctane	*76.6 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Surrogate: o-Terphenyl	*86.5 %*		*70-130*		*P3L0808*	*12/08/23 13:45*	*12/09/23 12:27*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/08/23 13:45	12/09/23 12:27	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**96.5**	1.05	mg/kg dry	1	P3L0814	12/08/23 16:12	12/09/23 03:08	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-261 @ 1.5

3L07001-41 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 07:47	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 07:47	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 07:47	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 07:47	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 07:47	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*118 %*		*80-120*		*P3L1211*	*12/12/23 09:04*	*12/13/23 07:47*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*93.9 %*		*80-120*		*P3L1211*	*12/12/23 09:04*	*12/13/23 07:47*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/12/23 09:04	12/13/23 07:47	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/12/23 09:04	12/13/23 07:47	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0809	12/08/23 13:41	12/08/23 21:41	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0809	12/08/23 13:41	12/08/23 21:41	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0809	12/08/23 13:41	12/08/23 21:41	TPH 8015M	
Surrogate: 1-Chlorooctane	*83.1 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/08/23 21:41*	*TPH 8015M*	
Surrogate: o-Terphenyl	*94.1 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/08/23 21:41*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/08/23 13:41	12/08/23 21:41	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**63.3**	1.05	mg/kg dry	1	P3L0814	12/08/23 16:12	12/09/23 03:26	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-262 @ 1.5

3L07001-42 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 08:11	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 08:11	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 08:11	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 08:11	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 08:11	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*117 %*		*80-120*		*P3L1211*	*12/12/23 09:04*	*12/13/23 08:11*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*93.9 %*		*80-120*		*P3L1211*	*12/12/23 09:04*	*12/13/23 08:11*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/12/23 09:04	12/13/23 08:11	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/12/23 09:04	12/13/23 08:11	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0809	12/08/23 13:41	12/08/23 22:05	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0809	12/08/23 13:41	12/08/23 22:05	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0809	12/08/23 13:41	12/08/23 22:05	TPH 8015M	
Surrogate: 1-Chlorooctane	*83.0 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/08/23 22:05*	*TPH 8015M*	
Surrogate: o-Terphenyl	*95.9 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/08/23 22:05*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/08/23 13:41	12/08/23 22:05	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**150**	1.04	mg/kg dry	1	P3L0814	12/08/23 16:12	12/09/23 03:42	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-263 @ 1.5

3L07001-43 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 08:36	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 08:36	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 08:36	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 08:36	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 08:36	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*119 %*		*80-120*		*P3L1211*	*12/12/23 09:04*	*12/13/23 08:36*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*94.4 %*		*80-120*		*P3L1211*	*12/12/23 09:04*	*12/13/23 08:36*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/12/23 09:04	12/13/23 08:36	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/12/23 09:04	12/13/23 08:36	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0809	12/08/23 13:41	12/08/23 22:29	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0809	12/08/23 13:41	12/08/23 22:29	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0809	12/08/23 13:41	12/08/23 22:29	TPH 8015M	
Surrogate: 1-Chlorooctane	*80.0 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/08/23 22:29*	*TPH 8015M*	
Surrogate: o-Terphenyl	*92.1 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/08/23 22:29*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/08/23 13:41	12/08/23 22:29	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**126**	1.04	mg/kg dry	1	P3L0814	12/08/23 16:12	12/09/23 03:59	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-288 @ 1.0

3L07001-44 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 09:00	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 09:00	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 09:00	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 09:00	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 09:00	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*116 %*		*80-120*		*P3L1211*	*12/12/23 09:04*	*12/13/23 09:00*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*93.8 %*		*80-120*		*P3L1211*	*12/12/23 09:04*	*12/13/23 09:00*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/12/23 09:04	12/13/23 09:00	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/12/23 09:04	12/13/23 09:00	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0809	12/08/23 13:41	12/08/23 22:53	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0809	12/08/23 13:41	12/08/23 22:53	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0809	12/08/23 13:41	12/08/23 22:53	TPH 8015M	
Surrogate: 1-Chlorooctane	*70.2 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/08/23 22:53*	*TPH 8015M*	
Surrogate: o-Terphenyl	*83.0 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/08/23 22:53*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/08/23 13:41	12/08/23 22:53	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**44.0**	1.05	mg/kg dry	1	P3L0814	12/08/23 16:12	12/09/23 04:14	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-289 @ 1.0

3L07001-45 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 09:24	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 09:24	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 09:24	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 09:24	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 09:24	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*93.5 %*		*80-120*		*P3L1211*	*12/12/23 09:04*	*12/13/23 09:24*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*115 %*		*80-120*		*P3L1211*	*12/12/23 09:04*	*12/13/23 09:24*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/12/23 09:04	12/13/23 09:24	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/12/23 09:04	12/13/23 09:24	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0809	12/08/23 13:41	12/08/23 23:17	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0809	12/08/23 13:41	12/08/23 23:17	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0809	12/08/23 13:41	12/08/23 23:17	TPH 8015M	
Surrogate: 1-Chlorooctane	*75.7 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/08/23 23:17*	*TPH 8015M*	
Surrogate: o-Terphenyl	*89.1 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/08/23 23:17*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/08/23 13:41	12/08/23 23:17	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**18.8**	1.03	mg/kg dry	1	P3L0814	12/08/23 16:12	12/09/23 04:30	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-290 @ 1.0

3L07001-46 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 09:49	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 09:49	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 09:49	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 09:49	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 09:49	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*93.2 %*		*80-120*		*P3L1211*	*12/12/23 09:04*	*12/13/23 09:49*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*115 %*		*80-120*		*P3L1211*	*12/12/23 09:04*	*12/13/23 09:49*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/12/23 09:04	12/13/23 09:49	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/12/23 09:04	12/13/23 09:49	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0809	12/08/23 13:41	12/08/23 23:41	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0809	12/08/23 13:41	12/08/23 23:41	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0809	12/08/23 13:41	12/08/23 23:41	TPH 8015M	
Surrogate: 1-Chlorooctane	*71.2 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/08/23 23:41*	*TPH 8015M*	
Surrogate: o-Terphenyl	*84.8 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/08/23 23:41*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/08/23 13:41	12/08/23 23:41	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**29.1**	1.04	mg/kg dry	1	P3L0814	12/08/23 16:12	12/09/23 04:44	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-291 @ 1.0

3L07001-47 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 10:13	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 10:13	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 10:13	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 10:13	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 10:13	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*93.5 %*		*80-120*		*P3L1211*	*12/12/23 09:04*	*12/13/23 10:13*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*116 %*		*80-120*		*P3L1211*	*12/12/23 09:04*	*12/13/23 10:13*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/12/23 09:04	12/13/23 10:13	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/12/23 09:04	12/13/23 10:13	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 00:05	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 00:05	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 00:05	TPH 8015M	
Surrogate: 1-Chlorooctane	*76.4 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/09/23 00:05*	*TPH 8015M*	
Surrogate: o-Terphenyl	*89.2 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/09/23 00:05*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/08/23 13:41	12/09/23 00:05	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**19.4**	1.03	mg/kg dry	1	P3L0814	12/08/23 16:12	12/09/23 04:58	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-292 @ 1.0

3L07001-48 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 10:38	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 10:38	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 10:38	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 10:38	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 10:38	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*93.4 %*		*80-120*		*P3L1211*	*12/12/23 09:04*	*12/13/23 10:38*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*117 %*		*80-120*		*P3L1211*	*12/12/23 09:04*	*12/13/23 10:38*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/12/23 09:04	12/13/23 10:38	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/12/23 09:04	12/13/23 10:38	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 00:29	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 00:29	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 00:29	TPH 8015M	
Surrogate: 1-Chlorooctane	*73.9 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/09/23 00:29*	*TPH 8015M*	
Surrogate: o-Terphenyl	*86.8 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/09/23 00:29*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/08/23 13:41	12/09/23 00:29	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**35.5**	1.04	mg/kg dry	1	P3L0814	12/08/23 16:12	12/09/23 05:13	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-293 @ 1.0

3L07001-49 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 11:02	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 11:02	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 11:02	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 11:02	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 11:02	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*93.4 %*		*80-120*		*P3L1211*	*12/12/23 09:04*	*12/13/23 11:02*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*117 %*		*80-120*		*P3L1211*	*12/12/23 09:04*	*12/13/23 11:02*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/12/23 09:04	12/13/23 11:02	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/12/23 09:04	12/13/23 11:02	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 00:54	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 00:54	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 00:54	TPH 8015M	
Surrogate: 1-Chlorooctane	*75.8 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/09/23 00:54*	*TPH 8015M*	
Surrogate: o-Terphenyl	*88.3 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/09/23 00:54*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/08/23 13:41	12/09/23 00:54	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**38.1**	1.05	mg/kg dry	1	P3L0814	12/08/23 16:12	12/09/23 05:56	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-294 @ 1.0

3L07001-50 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00102	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 11:27	EPA 8021B	
Toluene	ND	0.00102	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 11:27	EPA 8021B	
Ethylbenzene	ND	0.00102	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 11:27	EPA 8021B	
Xylene (p/m)	ND	0.00204	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 11:27	EPA 8021B	
Xylene (o)	ND	0.00102	mg/kg dry	1	P3L1211	12/12/23 09:04	12/13/23 11:27	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*93.1 %*		*80-120*		*P3L1211*	*12/12/23 09:04*	*12/13/23 11:27*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*116 %*		*80-120*		*P3L1211*	*12/12/23 09:04*	*12/13/23 11:27*	*EPA 8021B*	
Xylenes (total)	ND	0.00204	mg/kg dry	1	[CALC]	12/12/23 09:04	12/13/23 11:27	EPA 8021B	
Total BTEX	ND	0.00102	mg/kg dry	1	[CALC]	12/12/23 09:04	12/13/23 11:27	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.5	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 01:18	TPH 8015M	
>C12-C28	ND	25.5	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 01:18	TPH 8015M	
>C28-C35	ND	25.5	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 01:18	TPH 8015M	
Surrogate: 1-Chlorooctane	*76.1 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/09/23 01:18*	*TPH 8015M*	
Surrogate: o-Terphenyl	*89.0 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/09/23 01:18*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.5	mg/kg dry	1	[CALC]	12/08/23 13:41	12/09/23 01:18	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**47.4**	1.02	mg/kg dry	1	P3L0814	12/08/23 16:12	12/09/23 06:41	EPA 300.0	
% Moisture	**2.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-295 @ 1.0

3L07001-51 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 04:06	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 04:06	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 04:06	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 04:06	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 04:06	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*115 %*		*80-120*		*P3L1303*	*12/13/23 09:44*	*12/14/23 04:06*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*93.6 %*		*80-120*		*P3L1303*	*12/13/23 09:44*	*12/14/23 04:06*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/13/23 09:44	12/14/23 04:06	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/13/23 09:44	12/14/23 04:06	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 02:30	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 02:30	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 02:30	TPH 8015M	
Surrogate: 1-Chlorooctane	*82.8 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/09/23 02:30*	*TPH 8015M*	
Surrogate: o-Terphenyl	*97.0 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/09/23 02:30*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/08/23 13:41	12/09/23 02:30	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**31.3**	1.05	mg/kg dry	1	P3L0814	12/08/23 16:12	12/09/23 06:55	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-264 @ 1.5

3L07001-52 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 04:30	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 04:30	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 04:30	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 04:30	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 04:30	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*115 %*		*80-120*		*P3L1303*	*12/13/23 09:44*	*12/14/23 04:30*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*93.9 %*		*80-120*		*P3L1303*	*12/13/23 09:44*	*12/14/23 04:30*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/13/23 09:44	12/14/23 04:30	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/13/23 09:44	12/14/23 04:30	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 02:54	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 02:54	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 02:54	TPH 8015M	
Surrogate: 1-Chlorooctane	*81.1 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/09/23 02:54*	*TPH 8015M*	
Surrogate: o-Terphenyl	*95.0 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/09/23 02:54*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/08/23 13:41	12/09/23 02:54	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**104**	1.03	mg/kg dry	1	P3L0814	12/08/23 16:12	12/09/23 07:10	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-265 @ 1.5

3L07001-53 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 04:55	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 04:55	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 04:55	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 04:55	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 04:55	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*93.5 %*		*80-120*		*P3L1303*	*12/13/23 09:44*	*12/14/23 04:55*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*115 %*		*80-120*		*P3L1303*	*12/13/23 09:44*	*12/14/23 04:55*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/13/23 09:44	12/14/23 04:55	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/13/23 09:44	12/14/23 04:55	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 03:18	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 03:18	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 03:18	TPH 8015M	
Surrogate: 1-Chlorooctane	*73.5 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/09/23 03:18*	*TPH 8015M*	
Surrogate: o-Terphenyl	*88.5 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/09/23 03:18*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/08/23 13:41	12/09/23 03:18	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**22.5**	1.03	mg/kg dry	1	P3L0814	12/08/23 16:12	12/09/23 07:24	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-266 @ 1.5

3L07001-54 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 05:19	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 05:19	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 05:19	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 05:19	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 05:19	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*118 %*		*80-120*		*P3L1303*	*12/13/23 09:44*	*12/14/23 05:19*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*93.2 %*		*80-120*		*P3L1303*	*12/13/23 09:44*	*12/14/23 05:19*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/13/23 09:44	12/14/23 05:19	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/13/23 09:44	12/14/23 05:19	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 03:42	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 03:42	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 03:42	TPH 8015M	
Surrogate: 1-Chlorooctane	*68.1 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/09/23 03:42*	*TPH 8015M*	*S-GC*
Surrogate: o-Terphenyl	*82.5 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/09/23 03:42*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/08/23 13:41	12/09/23 03:42	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**257**	1.03	mg/kg dry	1	P3L0814	12/08/23 16:12	12/09/23 07:39	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-267 @ 1.5

3L07001-55 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 05:43	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 05:43	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 05:43	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 05:43	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 05:43	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*93.7 %*		*80-120*		*P3L1303*	*12/13/23 09:44*	*12/14/23 05:43*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*118 %*		*80-120*		*P3L1303*	*12/13/23 09:44*	*12/14/23 05:43*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/13/23 09:44	12/14/23 05:43	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/13/23 09:44	12/14/23 05:43	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 04:06	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 04:06	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 04:06	TPH 8015M	
Surrogate: 1-Chlorooctane	*79.6 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/09/23 04:06*	*TPH 8015M*	
Surrogate: o-Terphenyl	*98.7 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/09/23 04:06*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/08/23 13:41	12/09/23 04:06	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**24.0**	1.03	mg/kg dry	1	P3L0814	12/08/23 16:12	12/09/23 07:55	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-268 @ 1.5

3L07001-56 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 06:08	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 06:08	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 06:08	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 06:08	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 06:08	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*93.3 %*		*80-120*		*P3L1303*	*12/13/23 09:44*	*12/14/23 06:08*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*115 %*		*80-120*		*P3L1303*	*12/13/23 09:44*	*12/14/23 06:08*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/13/23 09:44	12/14/23 06:08	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/13/23 09:44	12/14/23 06:08	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 04:30	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 04:30	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 04:30	TPH 8015M	
Surrogate: 1-Chlorooctane	*77.9 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/09/23 04:30*	*TPH 8015M*	
Surrogate: o-Terphenyl	*94.8 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/09/23 04:30*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/08/23 13:41	12/09/23 04:30	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**182**	1.03	mg/kg dry	1	P3L1112	12/11/23 15:38	12/12/23 00:33	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-269 @ 1.5

3L07001-57 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 06:32	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 06:32	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 06:32	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 06:32	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 06:32	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*94.1 %*		*80-120*		*P3L1303*	*12/13/23 09:44*	*12/14/23 06:32*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*117 %*		*80-120*		*P3L1303*	*12/13/23 09:44*	*12/14/23 06:32*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/13/23 09:44	12/14/23 06:32	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/13/23 09:44	12/14/23 06:32	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 04:54	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 04:54	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 04:54	TPH 8015M	
Surrogate: 1-Chlorooctane	*76.5 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/09/23 04:54*	*TPH 8015M*	
Surrogate: o-Terphenyl	*90.6 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/09/23 04:54*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/08/23 13:41	12/09/23 04:54	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**106**	1.03	mg/kg dry	1	P3L1112	12/11/23 15:38	12/12/23 01:17	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-270 @ 1.5

3L07001-58 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 06:56	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 06:56	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 06:56	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 06:56	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 06:56	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*116 %*		*80-120*		*P3L1303*	*12/13/23 09:44*	*12/14/23 06:56*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*93.4 %*		*80-120*		*P3L1303*	*12/13/23 09:44*	*12/14/23 06:56*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/13/23 09:44	12/14/23 06:56	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/13/23 09:44	12/14/23 06:56	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 05:18	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 05:18	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 05:18	TPH 8015M	
Surrogate: 1-Chlorooctane	*73.7 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/09/23 05:18*	*TPH 8015M*	
Surrogate: o-Terphenyl	*88.0 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/09/23 05:18*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/08/23 13:41	12/09/23 05:18	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**22.1**	1.03	mg/kg dry	1	P3L1112	12/11/23 15:38	12/12/23 01:32	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-271 @ 1.5

3L07001-59 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 08:09	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 08:09	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 08:09	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 08:09	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 08:09	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*117 %*		*80-120*		*P3L1303*	*12/13/23 09:44*	*12/14/23 08:09*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*93.0 %*		*80-120*		*P3L1303*	*12/13/23 09:44*	*12/14/23 08:09*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/13/23 09:44	12/14/23 08:09	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/13/23 09:44	12/14/23 08:09	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 05:42	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 05:42	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 05:42	TPH 8015M	
Surrogate: 1-Chlorooctane	*74.8 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/09/23 05:42*	*TPH 8015M*	
Surrogate: o-Terphenyl	*89.5 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/09/23 05:42*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/08/23 13:41	12/09/23 05:42	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**321**	1.04	mg/kg dry	1	P3L1112	12/11/23 15:38	12/12/23 01:47	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-272 @ 1.5

3L07001-60 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 08:34	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 08:34	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 08:34	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 08:34	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 08:34	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*116 %*		*80-120*		*P3L1303*	*12/13/23 09:44*	*12/14/23 08:34*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*92.7 %*		*80-120*		*P3L1303*	*12/13/23 09:44*	*12/14/23 08:34*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/13/23 09:44	12/14/23 08:34	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/13/23 09:44	12/14/23 08:34	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 06:06	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 06:06	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0809	12/08/23 13:41	12/09/23 06:06	TPH 8015M	
Surrogate: 1-Chlorooctane	*79.7 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/09/23 06:06*	*TPH 8015M*	
Surrogate: o-Terphenyl	*94.3 %*		*70-130*		*P3L0809*	*12/08/23 13:41*	*12/09/23 06:06*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/08/23 13:41	12/09/23 06:06	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**27.7**	1.03	mg/kg dry	1	P3L1112	12/11/23 15:38	12/12/23 02:01	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-273 @ 1.5

3L07001-61 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 08:58	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 08:58	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 08:58	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 08:58	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 08:58	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*92.9 %*		*80-120*		*P3L1303*	*12/13/23 09:44*	*12/14/23 08:58*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*115 %*		*80-120*		*P3L1303*	*12/13/23 09:44*	*12/14/23 08:58*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/13/23 09:44	12/14/23 08:58	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/13/23 09:44	12/14/23 08:58	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 09:17	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 09:17	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 09:17	TPH 8015M	
Surrogate: 1-Chlorooctane	*77.0 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 09:17*	*TPH 8015M*	
Surrogate: o-Terphenyl	*91.2 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 09:17*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/08/23 13:44	12/09/23 09:17	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**28.8**	1.03	mg/kg dry	1	P3L1112	12/11/23 15:38	12/12/23 02:16	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-274 @ 1.5

3L07001-62 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 09:23	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 09:23	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 09:23	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 09:23	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 09:23	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*118 %*		*80-120*		*P3L1303*	*12/13/23 09:44*	*12/14/23 09:23*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*92.8 %*		*80-120*		*P3L1303*	*12/13/23 09:44*	*12/14/23 09:23*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/13/23 09:44	12/14/23 09:23	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/13/23 09:44	12/14/23 09:23	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 09:41	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 09:41	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 09:41	TPH 8015M	
Surrogate: 1-Chlorooctane	*67.1 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 09:41*	*TPH 8015M*	*S-GC*
Surrogate: o-Terphenyl	*81.7 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 09:41*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/08/23 13:44	12/09/23 09:41	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**26.5**	1.03	mg/kg dry	1	P3L1112	12/11/23 15:38	12/12/23 02:31	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-275 @ 1.5

3L07001-63 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 09:47	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 09:47	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 09:47	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 09:47	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 09:47	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*93.3 %*		*80-120*		*P3L1303*	*12/13/23 09:44*	*12/14/23 09:47*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*116 %*		*80-120*		*P3L1303*	*12/13/23 09:44*	*12/14/23 09:47*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/13/23 09:44	12/14/23 09:47	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/13/23 09:44	12/14/23 09:47	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 10:04	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 10:04	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 10:04	TPH 8015M	
Surrogate: 1-Chlorooctane	*79.7 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 10:04*	*TPH 8015M*	
Surrogate: o-Terphenyl	*94.7 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 10:04*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/08/23 13:44	12/09/23 10:04	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**98.5**	1.03	mg/kg dry	1	P3L1112	12/11/23 15:38	12/12/23 02:46	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-276 @ 1.5

3L07001-64 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 10:11	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 10:11	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 10:11	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 10:11	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 10:11	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*93.4 %*		*80-120*		*P3L1303*	*12/13/23 09:44*	*12/14/23 10:11*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*116 %*		*80-120*		*P3L1303*	*12/13/23 09:44*	*12/14/23 10:11*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/13/23 09:44	12/14/23 10:11	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/13/23 09:44	12/14/23 10:11	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 10:28	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 10:28	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 10:28	TPH 8015M	
Surrogate: 1-Chlorooctane	*82.1 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 10:28*	*TPH 8015M*	
Surrogate: o-Terphenyl	*96.6 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 10:28*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/08/23 13:44	12/09/23 10:28	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**37.1**	1.03	mg/kg dry	1	P3L1112	12/11/23 15:38	12/12/23 03:01	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-277 @ 1.5

3L07001-65 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 10:36	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 10:36	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 10:36	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 10:36	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 10:36	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*115 %*		*80-120*		*P3L1303*	*12/13/23 09:44*	*12/14/23 10:36*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*93.0 %*		*80-120*		*P3L1303*	*12/13/23 09:44*	*12/14/23 10:36*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/13/23 09:44	12/14/23 10:36	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/13/23 09:44	12/14/23 10:36	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 10:52	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 10:52	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 10:52	TPH 8015M	
Surrogate: 1-Chlorooctane	*79.5 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 10:52*	*TPH 8015M*	
Surrogate: o-Terphenyl	*91.0 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 10:52*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/08/23 13:44	12/09/23 10:52	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**33.3**	1.04	mg/kg dry	1	P3L1112	12/11/23 15:38	12/12/23 03:16	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-278 @ 1.5

3L07001-66 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 11:00	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 11:00	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 11:00	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 11:00	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1303	12/13/23 09:44	12/14/23 11:00	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*93.1 %*		*80-120*		*P3L1303*	*12/13/23 09:44*	*12/14/23 11:00*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*115 %*		*80-120*		*P3L1303*	*12/13/23 09:44*	*12/14/23 11:00*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/13/23 09:44	12/14/23 11:00	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/13/23 09:44	12/14/23 11:00	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 11:16	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 11:16	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 11:16	TPH 8015M	
Surrogate: 1-Chlorooctane	*77.3 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 11:16*	*TPH 8015M*	
Surrogate: o-Terphenyl	*91.1 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 11:16*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/08/23 13:44	12/09/23 11:16	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**30.5**	1.04	mg/kg dry	1	P3L1218	12/12/23 12:13	12/15/23 22:11	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-279 @ 1.5

3L07001-67 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 18:04	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 18:04	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 18:04	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 18:04	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 18:04	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*90.6 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/14/23 18:04*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*112 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/14/23 18:04*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/14/23 09:21	12/14/23 18:04	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/14/23 09:21	12/14/23 18:04	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 11:40	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 11:40	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 11:40	TPH 8015M	
Surrogate: 1-Chlorooctane	*77.1 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 11:40*	*TPH 8015M*	
Surrogate: o-Terphenyl	*89.7 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 11:40*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/08/23 13:44	12/09/23 11:40	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**130**	1.03	mg/kg dry	1	P3L1218	12/12/23 12:13	12/15/23 22:54	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-280 @ 1.5

3L07001-68 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 18:28	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 18:28	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 18:28	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 18:28	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 18:28	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*112 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/14/23 18:28*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*90.8 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/14/23 18:28*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/14/23 09:21	12/14/23 18:28	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/14/23 09:21	12/14/23 18:28	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 12:04	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 12:04	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 12:04	TPH 8015M	
Surrogate: 1-Chlorooctane	*79.3 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 12:04*	*TPH 8015M*	
Surrogate: o-Terphenyl	*88.4 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 12:04*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/08/23 13:44	12/09/23 12:04	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**22.5**	1.03	mg/kg dry	1	P3L1218	12/12/23 12:13	12/15/23 23:08	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-281 @ 1.5

3L07001-69 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 18:53	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 18:53	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 18:53	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 18:53	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 18:53	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*115 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/14/23 18:53*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*91.2 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/14/23 18:53*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/14/23 09:21	12/14/23 18:53	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/14/23 09:21	12/14/23 18:53	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 12:28	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 12:28	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 12:28	TPH 8015M	
Surrogate: 1-Chlorooctane	*83.4 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 12:28*	*TPH 8015M*	
Surrogate: o-Terphenyl	*96.5 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 12:28*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/08/23 13:44	12/09/23 12:28	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**118**	1.04	mg/kg dry	1	P3L1218	12/12/23 12:13	12/15/23 23:23	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-282 @ 1.5

3L07001-70 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 19:17	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 19:17	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 19:17	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 19:17	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 19:17	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*89.8 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/14/23 19:17*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*112 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/14/23 19:17*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/14/23 09:21	12/14/23 19:17	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/14/23 09:21	12/14/23 19:17	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 12:52	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 12:52	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 12:52	TPH 8015M	
Surrogate: 1-Chlorooctane	*83.8 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 12:52*	*TPH 8015M*	
Surrogate: o-Terphenyl	*95.1 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 12:52*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/08/23 13:44	12/09/23 12:52	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**19.7**	1.03	mg/kg dry	1	P3L1218	12/12/23 12:13	12/15/23 23:37	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-283 @ 1.0

3L07001-71 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 19:41	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 19:41	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 19:41	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 19:41	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 19:41	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*113 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/14/23 19:41*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*91.6 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/14/23 19:41*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/14/23 09:21	12/14/23 19:41	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/14/23 09:21	12/14/23 19:41	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 14:02	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 14:02	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 14:02	TPH 8015M	
Surrogate: 1-Chlorooctane	*69.2 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 14:02*	*TPH 8015M*	
Surrogate: o-Terphenyl	*80.6 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 14:02*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/08/23 13:44	12/09/23 14:02	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**135**	1.05	mg/kg dry	1	P3L1218	12/12/23 12:13	12/15/23 23:51	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-284 @ 1.0

3L07001-72 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 20:06	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 20:06	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 20:06	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 20:06	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 20:06	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*112 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/14/23 20:06*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*90.9 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/14/23 20:06*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/14/23 09:21	12/14/23 20:06	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/14/23 09:21	12/14/23 20:06	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 14:26	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 14:26	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 14:26	TPH 8015M	
Surrogate: 1-Chlorooctane	*79.8 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 14:26*	*TPH 8015M*	
Surrogate: o-Terphenyl	*95.6 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 14:26*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/08/23 13:44	12/09/23 14:26	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**109**	1.05	mg/kg dry	1	P3L1218	12/12/23 12:13	12/16/23 00:05	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-285 @ 1.0

3L07001-73 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 20:30	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 20:30	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 20:30	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 20:30	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 20:30	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*112 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/14/23 20:30*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*90.8 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/14/23 20:30*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/14/23 09:21	12/14/23 20:30	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/14/23 09:21	12/14/23 20:30	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 14:49	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 14:49	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 14:49	TPH 8015M	
Surrogate: 1-Chlorooctane	*88.6 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 14:49*	*TPH 8015M*	
Surrogate: o-Terphenyl	*102 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 14:49*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/08/23 13:44	12/09/23 14:49	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**29.4**	1.03	mg/kg dry	1	P3L1218	12/12/23 12:13	12/16/23 00:20	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-286 @ 1.0

3L07001-74 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 20:54	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 20:54	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 20:54	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 20:54	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 20:54	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*113 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/14/23 20:54*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*91.6 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/14/23 20:54*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/14/23 09:21	12/14/23 20:54	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/14/23 09:21	12/14/23 20:54	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 15:12	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 15:12	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 15:12	TPH 8015M	
Surrogate: 1-Chlorooctane	*85.6 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 15:12*	*TPH 8015M*	
Surrogate: o-Terphenyl	*99.7 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 15:12*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/08/23 13:44	12/09/23 15:12	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**35.6**	1.04	mg/kg dry	1	P3L1218	12/12/23 12:13	12/16/23 00:34	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-287 @ 1.0

3L07001-75 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00102	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 21:19	EPA 8021B	
Toluene	ND	0.00102	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 21:19	EPA 8021B	
Ethylbenzene	ND	0.00102	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 21:19	EPA 8021B	
Xylene (p/m)	ND	0.00204	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 21:19	EPA 8021B	
Xylene (o)	ND	0.00102	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 21:19	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*114 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/14/23 21:19*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*89.8 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/14/23 21:19*	*EPA 8021B*	
Xylenes (total)	ND	0.00204	mg/kg dry	1	[CALC]	12/14/23 09:21	12/14/23 21:19	EPA 8021B	
Total BTEX	ND	0.00102	mg/kg dry	1	[CALC]	12/14/23 09:21	12/14/23 21:19	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.5	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 15:36	TPH 8015M	
>C12-C28	ND	25.5	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 15:36	TPH 8015M	
>C28-C35	ND	25.5	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 15:36	TPH 8015M	
Surrogate: 1-Chlorooctane	*83.4 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 15:36*	*TPH 8015M*	
Surrogate: o-Terphenyl	*96.4 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 15:36*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.5	mg/kg dry	1	[CALC]	12/08/23 13:44	12/09/23 15:36	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**28.8**	1.02	mg/kg dry	1	P3L1218	12/12/23 12:13	12/16/23 00:48	EPA 300.0	
% Moisture	**2.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-296 @ 1.0

3L07001-76 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 21:43	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 21:43	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 21:43	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 21:43	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 21:43	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*113 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/14/23 21:43*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*91.6 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/14/23 21:43*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/14/23 09:21	12/14/23 21:43	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/14/23 09:21	12/14/23 21:43	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 16:00	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 16:00	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 16:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*83.4 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 16:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*98.4 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 16:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/08/23 13:44	12/09/23 16:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**14.2**	1.03	mg/kg dry	1	P3L1218	12/12/23 12:13	12/16/23 01:31	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-297 @ 1.0

3L07001-77 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 22:56	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 22:56	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 22:56	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 22:56	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 22:56	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*113 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/14/23 22:56*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*91.7 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/14/23 22:56*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/14/23 09:21	12/14/23 22:56	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/14/23 09:21	12/14/23 22:56	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 16:23	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 16:23	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 16:23	TPH 8015M	
Surrogate: 1-Chlorooctane	*80.6 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 16:23*	*TPH 8015M*	
Surrogate: o-Terphenyl	*96.4 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 16:23*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/08/23 13:44	12/09/23 16:23	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**58.1**	1.05	mg/kg dry	1	P3L1218	12/12/23 12:13	12/16/23 02:14	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-298 @ 1.0

3L07001-78 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 23:20	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 23:20	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 23:20	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 23:20	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 23:20	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*114 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/14/23 23:20*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*91.8 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/14/23 23:20*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/14/23 09:21	12/14/23 23:20	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/14/23 09:21	12/14/23 23:20	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 16:47	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 16:47	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 16:47	TPH 8015M	
Surrogate: 1-Chlorooctane	*80.9 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 16:47*	*TPH 8015M*	
Surrogate: o-Terphenyl	*94.6 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 16:47*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/08/23 13:44	12/09/23 16:47	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**19.2**	1.03	mg/kg dry	1	P3L1218	12/12/23 12:13	12/16/23 02:28	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-299 @ 1.0

3L07001-79 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00102	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 23:45	EPA 8021B	
Toluene	ND	0.00102	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 23:45	EPA 8021B	
Ethylbenzene	ND	0.00102	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 23:45	EPA 8021B	
Xylene (p/m)	ND	0.00204	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 23:45	EPA 8021B	
Xylene (o)	ND	0.00102	mg/kg dry	1	P3L1401	12/14/23 09:21	12/14/23 23:45	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*115 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/14/23 23:45*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*91.4 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/14/23 23:45*	*EPA 8021B*	
Xylenes (total)	ND	0.00204	mg/kg dry	1	[CALC]	12/14/23 09:21	12/14/23 23:45	EPA 8021B	
Total BTEX	ND	0.00102	mg/kg dry	1	[CALC]	12/14/23 09:21	12/14/23 23:45	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.5	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 17:11	TPH 8015M	
>C12-C28	ND	25.5	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 17:11	TPH 8015M	
>C28-C35	ND	25.5	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 17:11	TPH 8015M	
Surrogate: 1-Chlorooctane	*81.3 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 17:11*	*TPH 8015M*	
Surrogate: o-Terphenyl	*95.9 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 17:11*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.5	mg/kg dry	1	[CALC]	12/08/23 13:44	12/09/23 17:11	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**16.3**	1.02	mg/kg dry	1	P3L1218	12/12/23 12:13	12/16/23 02:43	EPA 300.0	
% Moisture	**2.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-300 @ 1.0

3L07001-80 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1401	12/14/23 09:21	12/15/23 00:09	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1401	12/14/23 09:21	12/15/23 00:09	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1401	12/14/23 09:21	12/15/23 00:09	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1401	12/14/23 09:21	12/15/23 00:09	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1401	12/14/23 09:21	12/15/23 00:09	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*91.7 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/15/23 00:09*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*114 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/15/23 00:09*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/14/23 09:21	12/15/23 00:09	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/14/23 09:21	12/15/23 00:09	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 17:34	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 17:34	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L0810	12/08/23 13:44	12/09/23 17:34	TPH 8015M	
Surrogate: 1-Chlorooctane	*80.5 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 17:34*	*TPH 8015M*	
Surrogate: o-Terphenyl	*97.7 %*		*70-130*		*P3L0810*	*12/08/23 13:44*	*12/09/23 17:34*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/08/23 13:44	12/09/23 17:34	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**20.3**	1.03	mg/kg dry	1	P3L1218	12/12/23 12:13	12/16/23 02:57	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-301 @ 1.0

3L07001-81 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00102	mg/kg dry	1	P3L1401	12/14/23 09:21	12/15/23 00:34	EPA 8021B	
Toluene	ND	0.00102	mg/kg dry	1	P3L1401	12/14/23 09:21	12/15/23 00:34	EPA 8021B	
Ethylbenzene	ND	0.00102	mg/kg dry	1	P3L1401	12/14/23 09:21	12/15/23 00:34	EPA 8021B	
Xylene (p/m)	ND	0.00204	mg/kg dry	1	P3L1401	12/14/23 09:21	12/15/23 00:34	EPA 8021B	
Xylene (o)	ND	0.00102	mg/kg dry	1	P3L1401	12/14/23 09:21	12/15/23 00:34	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*113 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/15/23 00:34*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*91.4 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/15/23 00:34*	*EPA 8021B*	
Xylenes (total)	ND	0.00204	mg/kg dry	1	[CALC]	12/14/23 09:21	12/15/23 00:34	EPA 8021B	
Total BTEX	ND	0.00102	mg/kg dry	1	[CALC]	12/14/23 09:21	12/15/23 00:34	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.5	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 13:18	TPH 8015M	
>C12-C28	ND	25.5	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 13:18	TPH 8015M	
>C28-C35	ND	25.5	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 13:18	TPH 8015M	
Surrogate: 1-Chlorooctane	*79.8 %*		*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 13:18*	*TPH 8015M*	
Surrogate: o-Terphenyl	*93.4 %*		*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 13:18*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.5	mg/kg dry	1	[CALC]	12/11/23 10:09	12/11/23 13:18	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**20.3**	1.02	mg/kg dry	1	P3L1218	12/12/23 12:13	12/16/23 03:11	EPA 300.0	
% Moisture	**2.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-302 @ 1.0

3L07001-82 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L1401	12/14/23 09:21	12/15/23 00:58	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L1401	12/14/23 09:21	12/15/23 00:58	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L1401	12/14/23 09:21	12/15/23 00:58	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L1401	12/14/23 09:21	12/15/23 00:58	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L1401	12/14/23 09:21	12/15/23 00:58	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*91.8 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/15/23 00:58*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*115 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/15/23 00:58*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/14/23 09:21	12/15/23 00:58	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/14/23 09:21	12/15/23 00:58	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 13:42	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 13:42	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 13:42	TPH 8015M	
Surrogate: 1-Chlorooctane	*81.5 %*		*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 13:42*	*TPH 8015M*	
Surrogate: o-Terphenyl	*99.7 %*		*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 13:42*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/11/23 10:09	12/11/23 13:42	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**47.4**	1.05	mg/kg dry	1	P3L1218	12/12/23 12:13	12/16/23 03:26	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-303 @ 1.0

3L07001-83 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1401	12/14/23 09:21	12/15/23 01:22	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1401	12/14/23 09:21	12/15/23 01:22	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1401	12/14/23 09:21	12/15/23 01:22	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1401	12/14/23 09:21	12/15/23 01:22	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1401	12/14/23 09:21	12/15/23 01:22	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*114 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/15/23 01:22*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*92.2 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/15/23 01:22*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/14/23 09:21	12/15/23 01:22	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/14/23 09:21	12/15/23 01:22	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 14:06	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 14:06	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 14:06	TPH 8015M	
Surrogate: 1-Chlorooctane	*78.7 %*		*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 14:06*	*TPH 8015M*	
Surrogate: o-Terphenyl	*95.6 %*		*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 14:06*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/11/23 10:09	12/11/23 14:06	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**23.2**	1.03	mg/kg dry	1	P3L1218	12/12/23 12:13	12/16/23 03:40	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-304 @ 1.0

3L07001-84 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00102	mg/kg dry	1	P3L1401	12/14/23 09:21	12/15/23 01:47	EPA 8021B	
Toluene	ND	0.00102	mg/kg dry	1	P3L1401	12/14/23 09:21	12/15/23 01:47	EPA 8021B	
Ethylbenzene	ND	0.00102	mg/kg dry	1	P3L1401	12/14/23 09:21	12/15/23 01:47	EPA 8021B	
Xylene (p/m)	ND	0.00204	mg/kg dry	1	P3L1401	12/14/23 09:21	12/15/23 01:47	EPA 8021B	
Xylene (o)	ND	0.00102	mg/kg dry	1	P3L1401	12/14/23 09:21	12/15/23 01:47	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*114 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/15/23 01:47*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*92.2 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/15/23 01:47*	*EPA 8021B*	
Xylenes (total)	ND	0.00204	mg/kg dry	1	[CALC]	12/14/23 09:21	12/15/23 01:47	EPA 8021B	
Total BTEX	ND	0.00102	mg/kg dry	1	[CALC]	12/14/23 09:21	12/15/23 01:47	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.5	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 14:30	TPH 8015M	
>C12-C28	ND	25.5	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 14:30	TPH 8015M	
>C28-C35	ND	25.5	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 14:30	TPH 8015M	
Surrogate: 1-Chlorooctane	*80.2 %*		*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 14:30*	*TPH 8015M*	
Surrogate: o-Terphenyl	*99.2 %*		*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 14:30*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.5	mg/kg dry	1	[CALC]	12/11/23 10:09	12/11/23 14:30	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**273**	1.02	mg/kg dry	1	P3L1218	12/12/23 12:13	12/16/23 03:54	EPA 300.0	
% Moisture	**2.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-305 @ 1.0

3L07001-85 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1401	12/14/23 09:21	12/15/23 02:11	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1401	12/14/23 09:21	12/15/23 02:11	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1401	12/14/23 09:21	12/15/23 02:11	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1401	12/14/23 09:21	12/15/23 02:11	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1401	12/14/23 09:21	12/15/23 02:11	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*114 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/15/23 02:11*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*91.7 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/15/23 02:11*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/14/23 09:21	12/15/23 02:11	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/14/23 09:21	12/15/23 02:11	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 14:53	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 14:53	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 14:53	TPH 8015M	
Surrogate: 1-Chlorooctane	*82.1 %*		*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 14:53*	*TPH 8015M*	
Surrogate: o-Terphenyl	*101 %*		*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 14:53*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/11/23 10:09	12/11/23 14:53	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**32.3**	1.04	mg/kg dry	1	P3L1218	12/12/23 12:13	12/16/23 04:09	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-306 @ 1.0

3L07001-86 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1401	12/14/23 09:21	12/15/23 02:35	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1401	12/14/23 09:21	12/15/23 02:35	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1401	12/14/23 09:21	12/15/23 02:35	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1401	12/14/23 09:21	12/15/23 02:35	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1401	12/14/23 09:21	12/15/23 02:35	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*92.0 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/15/23 02:35*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*115 %*		*80-120*		*P3L1401*	*12/14/23 09:21*	*12/15/23 02:35*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/14/23 09:21	12/15/23 02:35	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/14/23 09:21	12/15/23 02:35	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 15:17	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 15:17	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 15:17	TPH 8015M	
Surrogate: 1-Chlorooctane	*81.1 %*		*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 15:17*	*TPH 8015M*	
Surrogate: o-Terphenyl	*99.7 %*		*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 15:17*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/11/23 10:09	12/11/23 15:17	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**26.5**	1.04	mg/kg dry	1	P3L1219	12/12/23 15:51	12/12/23 19:50	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-307 @ 1.0

3L07001-87 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00102	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 05:50	EPA 8021B	
Toluene	ND	0.00102	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 05:50	EPA 8021B	
Ethylbenzene	ND	0.00102	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 05:50	EPA 8021B	
Xylene (p/m)	ND	0.00204	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 05:50	EPA 8021B	
Xylene (o)	ND	0.00102	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 05:50	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*116 %*		*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 05:50*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*92.6 %*		*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 05:50*	*EPA 8021B*	
Xylenes (total)	ND	0.00204	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 05:50	EPA 8021B	
Total BTEX	ND	0.00102	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 05:50	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.5	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 16:05	TPH 8015M	
>C12-C28	ND	25.5	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 16:05	TPH 8015M	
>C28-C35	ND	25.5	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 16:05	TPH 8015M	
Surrogate: 1-Chlorooctane	*75.2 %*		*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 16:05*	*TPH 8015M*	
Surrogate: o-Terphenyl	*94.0 %*		*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 16:05*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.5	mg/kg dry	1	[CALC]	12/11/23 10:09	12/11/23 16:05	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**285**	1.02	mg/kg dry	1	P3L1219	12/12/23 15:51	12/12/23 20:37	EPA 300.0	
% Moisture	**2.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-308 @ 1.0

3L07001-88 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 06:14	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 06:14	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 06:14	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 06:14	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 06:14	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*93.2 %*		*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 06:14*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*115 %*		*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 06:14*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 06:14	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 06:14	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 16:29	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 16:29	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 16:29	TPH 8015M	
Surrogate: 1-Chlorooctane	*74.3 %*		*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 16:29*	*TPH 8015M*	
Surrogate: o-Terphenyl	*93.9 %*		*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 16:29*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/11/23 10:09	12/11/23 16:29	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**154**	1.03	mg/kg dry	1	P3L1219	12/12/23 15:51	12/12/23 20:51	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-309 @ 1.0

3L07001-89 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 06:39	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 06:39	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 06:39	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 06:39	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 06:39	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*117 %*		*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 06:39*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*92.7 %*		*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 06:39*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 06:39	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 06:39	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 16:53	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 16:53	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 16:53	TPH 8015M	
Surrogate: 1-Chlorooctane	*81.2 %*		*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 16:53*	*TPH 8015M*	
Surrogate: o-Terphenyl	*96.7 %*		*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 16:53*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/11/23 10:09	12/11/23 16:53	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**31.1**	1.04	mg/kg dry	1	P3L1219	12/12/23 15:51	12/12/23 21:06	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-310 @ 1.0

3L07001-90 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 07:03	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 07:03	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 07:03	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 07:03	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 07:03	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*116 %*		*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 07:03*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*93.0 %*		*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 07:03*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 07:03	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 07:03	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 17:16	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 17:16	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 17:16	TPH 8015M	
Surrogate: 1-Chlorooctane	*81.9 %*		*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 17:16*	*TPH 8015M*	
Surrogate: o-Terphenyl	*97.7 %*		*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 17:16*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/11/23 10:09	12/11/23 17:16	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**66.4**	1.05	mg/kg dry	1	P3L1219	12/12/23 15:51	12/12/23 21:22	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L0806	12/08/23 11:23	12/08/23 11:31	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1107 - * DEFAULT PREP *** **										
Blank (P3L1107-BLK1)				Prepared: 12/11/23 Analyzed: 12/12/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 1,4-Difluorobenzene	*0.113*		"	*0.120*		*94.5*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.140*		"	*0.120*		*117*	*80-120*			
LCS (P3L1107-BS1)				Prepared: 12/11/23 Analyzed: 12/12/23						
Benzene	0.104	0.00100	mg/kg	0.100		104	80-120			
Toluene	0.0963	0.00100	"	0.100		96.3	80-120			
Ethylbenzene	0.108	0.00100	"	0.100		108	80-120			
Xylene (p/m)	0.210	0.00200	"	0.200		105	80-120			
Xylene (o)	0.0989	0.00100	"	0.100		98.9	80-120			
Surrogate: 1,4-Difluorobenzene	*0.118*		"	*0.120*		*98.3*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.130*		"	*0.120*		*109*	*80-120*			
LCS Dup (P3L1107-BSD1)				Prepared: 12/11/23 Analyzed: 12/12/23						
Benzene	0.107	0.00100	mg/kg	0.100		107	80-120	3.36	20	
Toluene	0.0982	0.00100	"	0.100		98.2	80-120	2.02	20	
Ethylbenzene	0.109	0.00100	"	0.100		109	80-120	0.193	20	
Xylene (p/m)	0.212	0.00200	"	0.200		106	80-120	0.702	20	
Xylene (o)	0.0980	0.00100	"	0.100		98.0	80-120	0.853	20	
Surrogate: 1,4-Difluorobenzene	*0.118*		"	*0.120*		*98.3*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.129*		"	*0.120*		*107*	*80-120*			
Calibration Blank (P3L1107-CCB1)				Prepared: 12/11/23 Analyzed: 12/12/23						
Benzene	0.100		ug/kg							
Toluene	0.220		"							
Ethylbenzene	0.130		"							
Xylene (p/m)	0.160		"							
Xylene (o)	0.00		"							
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*94.7*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.142*		"	*0.120*		*118*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1107 - * DEFAULT PREP *** **										
Calibration Blank (P3L1107-CCB2)				Prepared: 12/11/23 Analyzed: 12/12/23						
Benzene	0.130		ug/kg							
Toluene	0.240		"							
Ethylbenzene	0.180		"							
Xylene (p/m)	0.230		"							
Xylene (o)	0.180		"							
Surrogate: 4-Bromofluorobenzene	*0.143*		*"*	*0.120*		*119*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.114*		*"*	*0.120*		*95.3*	*80-120*			
Calibration Check (P3L1107-CCV1)				Prepared: 12/11/23 Analyzed: 12/12/23						
Benzene	0.106	0.00100	mg/kg	0.100		106	80-120			
Toluene	0.102	0.00100	"	0.100		102	80-120			
Ethylbenzene	0.109	0.00100	"	0.100		109	80-120			
Xylene (p/m)	0.223	0.00200	"	0.200		111	80-120			
Xylene (o)	0.105	0.00100	"	0.100		105	80-120			
Surrogate: 4-Bromofluorobenzene	*0.131*		*"*	*0.120*		*109*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.118*		*"*	*0.120*		*98.3*	*75-125*			
Calibration Check (P3L1107-CCV2)				Prepared: 12/11/23 Analyzed: 12/12/23						
Benzene	0.108	0.00100	mg/kg	0.100		108	80-120			
Toluene	0.104	0.00100	"	0.100		104	80-120			
Ethylbenzene	0.111	0.00100	"	0.100		111	80-120			
Xylene (p/m)	0.224	0.00200	"	0.200		112	80-120			
Xylene (o)	0.107	0.00100	"	0.100		107	80-120			
Surrogate: 1,4-Difluorobenzene	*0.119*		*"*	*0.120*		*98.8*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.130*		*"*	*0.120*		*109*	*75-125*			
Calibration Check (P3L1107-CCV3)				Prepared: 12/11/23 Analyzed: 12/12/23						
Benzene	0.105	0.00100	mg/kg	0.100		105	80-120			
Toluene	0.106	0.00100	"	0.100		106	80-120			
Ethylbenzene	0.112	0.00100	"	0.100		112	80-120			
Xylene (p/m)	0.225	0.00200	"	0.200		113	80-120			
Xylene (o)	0.108	0.00100	"	0.100		108	80-120			
Surrogate: 4-Bromofluorobenzene	*0.135*		*"*	*0.120*		*113*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.116*		*"*	*0.120*		*96.8*	*75-125*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1107 - * DEFAULT PREP *** **										
Matrix Spike (P3L1107-MS1)	**Source: 3L05017-04**			Prepared: 12/11/23 Analyzed: 12/12/23						
Benzene	0.0876	0.00103	mg/kg dry	0.103	ND	85.0	80-120			
Toluene	0.0615	0.00103	"	0.103	ND	59.7	80-120			QM-05
Ethylbenzene	0.0447	0.00103	"	0.103	ND	43.4	80-120			QM-05
Xylene (p/m)	0.0812	0.00206	"	0.206	ND	39.4	80-120			QM-05
Xylene (o)	0.0391	0.00103	"	0.103	ND	37.9	80-120			QM-05
Surrogate: 4-Bromofluorobenzene	*0.134*		"	*0.124*		*109*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.122*		"	*0.124*		*98.4*	*80-120*			
Matrix Spike Dup (P3L1107-MSD1)	**Source: 3L05017-04**			Prepared: 12/11/23 Analyzed: 12/12/23						
Benzene	0.0514	0.00103	mg/kg dry	0.103	ND	49.9	80-120	52.0	20	QM-05
Toluene	0.0150	0.00103	"	0.103	ND	14.6	80-120	122	20	QM-05
Ethylbenzene	0.00421	0.00103	"	0.103	ND	4.08	80-120	166	20	QM-05
Xylene (p/m)	0.00660	0.00206	"	0.206	ND	3.20	80-120	170	20	QM-05
Xylene (o)	0.00407	0.00103	"	0.103	ND	3.95	80-120	162	20	QM-05
Surrogate: 1,4-Difluorobenzene	*0.122*		"	*0.124*		*98.2*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.138*		"	*0.124*		*112*	*80-120*			
Batch P3L1210 - * DEFAULT PREP *** **										
Blank (P3L1210-BLK1)				Prepared & Analyzed: 12/12/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 4-Bromofluorobenzene	*0.139*		"	*0.120*		*116*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.112*		"	*0.120*		*93.7*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1210 - * DEFAULT PREP *** **										
LCS (P3L1210-BS1)				Prepared & Analyzed: 12/12/23						
Benzene	0.103	0.00100	mg/kg	0.100		103	80-120			
Toluene	0.102	0.00100	"	0.100		102	80-120			
Ethylbenzene	0.113	0.00100	"	0.100		113	80-120			
Xylene (p/m)	0.221	0.00200	"	0.200		110	80-120			
Xylene (o)	0.102	0.00100	"	0.100		102	80-120			
Surrogate: 4-Bromofluorobenzene	*0.133*		*"*	*0.120*		*111*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.115*		*"*	*0.120*		*95.8*	*80-120*			
LCS Dup (P3L1210-BSD1)				Prepared & Analyzed: 12/12/23						
Benzene	0.104	0.00100	mg/kg	0.100		104	80-120	0.222	20	
Toluene	0.102	0.00100	"	0.100		102	80-120	0.197	20	
Ethylbenzene	0.114	0.00100	"	0.100		114	80-120	0.273	20	
Xylene (p/m)	0.221	0.00200	"	0.200		110	80-120	0.149	20	
Xylene (o)	0.102	0.00100	"	0.100		102	80-120	0.206	20	
Surrogate: 1,4-Difluorobenzene	*0.115*		*"*	*0.120*		*95.6*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.134*		*"*	*0.120*		*111*	*80-120*			
Calibration Blank (P3L1210-CCB1)				Prepared & Analyzed: 12/12/23						
Benzene	0.110		ug/kg							
Toluene	0.200		"							
Ethylbenzene	0.110		"							
Xylene (p/m)	0.190		"							
Xylene (o)	0.130		"							
Surrogate: 4-Bromofluorobenzene	*0.138*		*"*	*0.120*		*115*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.112*		*"*	*0.120*		*93.5*	*80-120*			
Calibration Blank (P3L1210-CCB2)				Prepared & Analyzed: 12/12/23						
Benzene	0.150		ug/kg							
Toluene	0.280		"							
Ethylbenzene	0.170		"							
Xylene (p/m)	0.190		"							
Xylene (o)	0.210		"							
Surrogate: 1,4-Difluorobenzene	*0.114*		*"*	*0.120*		*94.7*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.141*		*"*	*0.120*		*117*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1210 - * DEFAULT PREP *** **										
Calibration Blank (P3L1210-CCB3)				Prepared: 12/12/23 Analyzed: 12/13/23						
Benzene	0.110		ug/kg							
Toluene	0.220		"							
Ethylbenzene	0.0900		"							
Xylene (p/m)	0.170		"							
Xylene (o)	0.0800		"							
Surrogate: 4-Bromofluorobenzene	*0.139*		*"*	*0.120*		*116*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.113*		*"*	*0.120*		*94.0*	*80-120*			
Calibration Check (P3L1210-CCV1)				Prepared & Analyzed: 12/12/23						
Benzene	0.101	0.00100	mg/kg	0.100		101	80-120			
Toluene	0.108	0.00100	"	0.100		108	80-120			
Ethylbenzene	0.118	0.00100	"	0.100		118	80-120			
Xylene (p/m)	0.237	0.00200	"	0.200		118	80-120			
Xylene (o)	0.114	0.00100	"	0.100		114	80-120			
Surrogate: 4-Bromofluorobenzene	*0.135*		*"*	*0.120*		*113*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.114*		*"*	*0.120*		*95.3*	*75-125*			
Calibration Check (P3L1210-CCV2)				Prepared & Analyzed: 12/12/23						
Benzene	0.101	0.00100	mg/kg	0.100		101	80-120			
Toluene	0.107	0.00100	"	0.100		107	80-120			
Ethylbenzene	0.115	0.00100	"	0.100		115	80-120			
Xylene (p/m)	0.234	0.00200	"	0.200		117	80-120			
Xylene (o)	0.111	0.00100	"	0.100		111	80-120			
Surrogate: 1,4-Difluorobenzene	*0.115*		*"*	*0.120*		*95.8*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.136*		*"*	*0.120*		*113*	*75-125*			
Calibration Check (P3L1210-CCV3)				Prepared: 12/12/23 Analyzed: 12/13/23						
Benzene	0.100	0.00100	mg/kg	0.100		100	80-120			
Toluene	0.106	0.00100	"	0.100		106	80-120			
Ethylbenzene	0.113	0.00100	"	0.100		113	80-120			
Xylene (p/m)	0.228	0.00200	"	0.200		114	80-120			
Xylene (o)	0.108	0.00100	"	0.100		108	80-120			
Surrogate: 4-Bromofluorobenzene	*0.136*		*"*	*0.120*		*113*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.114*		*"*	*0.120*		*95.4*	*75-125*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1210 - * DEFAULT PREP *** **										
Matrix Spike (P3L1210-MS1)	**Source: 3L07001-15**			Prepared: 12/12/23 Analyzed: 12/13/23						
Benzene	0.0817	0.00102	mg/kg dry	0.102	ND	80.1	80-120			
Toluene	0.0787	0.00102	"	0.102	ND	77.1	80-120			QM-05
Ethylbenzene	0.0830	0.00102	"	0.102	ND	81.3	80-120			
Xylene (p/m)	0.164	0.00204	"	0.204	ND	80.6	80-120			
Xylene (o)	0.0723	0.00102	"	0.102	ND	70.9	80-120			QM-05
Surrogate: 4-Bromofluorobenzene	*0.137*		"	*0.122*		*112*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.116*		"	*0.122*		*95.1*	*80-120*			
Matrix Spike Dup (P3L1210-MSD1)	**Source: 3L07001-15**			Prepared: 12/12/23 Analyzed: 12/13/23						
Benzene	0.0925	0.00102	mg/kg dry	0.102	ND	90.6	80-120	12.3	20	
Toluene	0.0891	0.00102	"	0.102	ND	87.3	80-120	12.4	20	
Ethylbenzene	0.0941	0.00102	"	0.102	ND	92.2	80-120	12.5	20	
Xylene (p/m)	0.184	0.00204	"	0.204	ND	90.0	80-120	11.1	20	
Xylene (o)	0.0822	0.00102	"	0.102	ND	80.6	80-120	12.8	20	
Surrogate: 1,4-Difluorobenzene	*0.116*		"	*0.122*		*95.0*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.137*		"	*0.122*		*112*	*80-120*			
Batch P3L1211 - * DEFAULT PREP *** **										
Blank (P3L1211-BLK1)				Prepared: 12/12/23 Analyzed: 12/13/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 4-Bromofluorobenzene	*0.141*		"	*0.120*		*117*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.112*		"	*0.120*		*93.8*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1211 - * DEFAULT PREP *** **										
LCS (P3L1211-BS1)				Prepared: 12/12/23 Analyzed: 12/13/23						
Benzene	0.100	0.00100	mg/kg	0.100		100	80-120			
Toluene	0.0975	0.00100	"	0.100		97.5	80-120			
Ethylbenzene	0.107	0.00100	"	0.100		107	80-120			
Xylene (p/m)	0.206	0.00200	"	0.200		103	80-120			
Xylene (o)	0.0955	0.00100	"	0.100		95.5	80-120			
Surrogate: 4-Bromofluorobenzene	*0.136*		"	*0.120*		*113*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*94.7*	*80-120*			
LCS Dup (P3L1211-BSD1)				Prepared: 12/12/23 Analyzed: 12/13/23						
Benzene	0.0905	0.00100	mg/kg	0.100		90.5	80-120	10.0	20	
Toluene	0.0869	0.00100	"	0.100		86.9	80-120	11.5	20	
Ethylbenzene	0.0958	0.00100	"	0.100		95.8	80-120	10.6	20	
Xylene (p/m)	0.186	0.00200	"	0.200		93.2	80-120	10.1	20	
Xylene (o)	0.0848	0.00100	"	0.100		84.8	80-120	11.8	20	
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*95.0*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.135*		"	*0.120*		*112*	*80-120*			
Calibration Blank (P3L1211-CCB1)				Prepared: 12/12/23 Analyzed: 12/13/23						
Benzene	0.110		ug/kg							
Toluene	0.220		"							
Ethylbenzene	0.0900		"							
Xylene (p/m)	0.170		"							
Xylene (o)	0.0800		"							
Surrogate: 4-Bromofluorobenzene	*0.139*		"	*0.120*		*116*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.113*		"	*0.120*		*94.0*	*80-120*			
Calibration Blank (P3L1211-CCB2)				Prepared: 12/12/23 Analyzed: 12/13/23						
Benzene	0.0900		ug/kg							
Toluene	0.180		"							
Ethylbenzene	0.00		"							
Xylene (p/m)	0.220		"							
Xylene (o)	0.100		"							
Surrogate: 1,4-Difluorobenzene	*0.112*		"	*0.120*		*93.7*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.140*		"	*0.120*		*117*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1211 - * DEFAULT PREP *** **										
Calibration Check (P3L1211-CCV1)				Prepared: 12/12/23 Analyzed: 12/13/23						
Benzene	0.100	0.00100	mg/kg	0.100		100	80-120			
Toluene	0.106	0.00100	"	0.100		106	80-120			
Ethylbenzene	0.113	0.00100	"	0.100		113	80-120			
Xylene (p/m)	0.228	0.00200	"	0.200		114	80-120			
Xylene (o)	0.108	0.00100	"	0.100		108	80-120			
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*95.4*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.136*		"	*0.120*		*113*	*75-125*			
Calibration Check (P3L1211-CCV2)				Prepared: 12/12/23 Analyzed: 12/13/23						
Benzene	0.0957	0.00100	mg/kg	0.100		95.7	80-120			
Toluene	0.100	0.00100	"	0.100		100	80-120			
Ethylbenzene	0.106	0.00100	"	0.100		106	80-120			
Xylene (p/m)	0.214	0.00200	"	0.200		107	80-120			
Xylene (o)	0.102	0.00100	"	0.100		102	80-120			
Surrogate: 4-Bromofluorobenzene	*0.134*		"	*0.120*		*112*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*95.0*	*75-125*			
Calibration Check (P3L1211-CCV3)				Prepared: 12/12/23 Analyzed: 12/13/23						
Benzene	0.0862	0.00100	mg/kg	0.100		86.2	80-120			
Toluene	0.0904	0.00100	"	0.100		90.4	80-120			
Ethylbenzene	0.0970	0.00100	"	0.100		97.0	80-120			
Xylene (p/m)	0.197	0.00200	"	0.200		98.4	80-120			
Xylene (o)	0.0929	0.00100	"	0.100		92.9	80-120			
Surrogate: 4-Bromofluorobenzene	*0.137*		"	*0.120*		*115*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.113*		"	*0.120*		*94.0*	*75-125*			
Matrix Spike (P3L1211-MS1)	**Source: 3L07001-35**			Prepared: 12/12/23 Analyzed: 12/13/23						
Benzene	0.0858	0.00104	mg/kg dry	0.104	ND	82.4	80-120			
Toluene	0.0751	0.00104	"	0.104	ND	72.1	80-120			QM-05
Ethylbenzene	0.0733	0.00104	"	0.104	ND	70.4	80-120			QM-05
Xylene (p/m)	0.142	0.00208	"	0.208	ND	68.1	80-120			QM-05
Xylene (o)	0.0618	0.00104	"	0.104	ND	59.3	80-120			QM-05
Surrogate: 4-Bromofluorobenzene	*0.141*		"	*0.125*		*112*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.118*		"	*0.125*		*94.3*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1211 - * DEFAULT PREP *** **										
Matrix Spike Dup (P3L1211-MSD1)	**Source: 3L07001-35**			Prepared: 12/12/23 Analyzed: 12/13/23						
Benzene	0.0836	0.00104	mg/kg dry	0.104	ND	80.2	80-120	2.63	20	
Toluene	0.0736	0.00104	"	0.104	ND	70.6	80-120	1.98	20	QM-05
Ethylbenzene	0.0721	0.00104	"	0.104	ND	69.2	80-120	1.70	20	QM-05
Xylene (p/m)	0.141	0.00208	"	0.208	ND	67.6	80-120	0.707	20	QM-05
Xylene (o)	0.0612	0.00104	"	0.104	ND	58.8	80-120	0.881	20	QM-05
Surrogate: 1,4-Difluorobenzene	*0.118*		*"*	*0.125*		*94.0*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.141*		*"*	*0.125*		*113*	*80-120*			
Batch P3L1303 - * DEFAULT PREP *** **										
Blank (P3L1303-BLK1)				Prepared: 12/13/23 Analyzed: 12/14/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 4-Bromofluorobenzene	*0.137*		*"*	*0.120*		*114*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.111*		*"*	*0.120*		*92.6*	*80-120*			
LCS (P3L1303-BS1)				Prepared: 12/13/23 Analyzed: 12/14/23						
Benzene	0.0899	0.00100	mg/kg	0.100		89.9	80-120			
Toluene	0.0873	0.00100	"	0.100		87.3	80-120			
Ethylbenzene	0.0970	0.00100	"	0.100		97.0	80-120			
Xylene (p/m)	0.189	0.00200	"	0.200		94.4	80-120			
Xylene (o)	0.0862	0.00100	"	0.100		86.2	80-120			
Surrogate: 4-Bromofluorobenzene	*0.132*		*"*	*0.120*		*110*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.112*		*"*	*0.120*		*93.3*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1303 - * DEFAULT PREP *** **										
LCS Dup (P3L1303-BSD1)				Prepared: 12/13/23 Analyzed: 12/14/23						
Benzene	0.0988	0.00100	mg/kg	0.100		98.8	80-120	9.42	20	
Toluene	0.0974	0.00100	"	0.100		97.4	80-120	10.9	20	
Ethylbenzene	0.108	0.00100	"	0.100		108	80-120	10.5	20	
Xylene (p/m)	0.208	0.00200	"	0.200		104	80-120	9.49	20	
Xylene (o)	0.0958	0.00100	"	0.100		95.8	80-120	10.6	20	
Surrogate: 1,4-Difluorobenzene	*0.113*		*"*	*0.120*		*93.8*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.133*		*"*	*0.120*		*111*	*80-120*			
Calibration Blank (P3L1303-CCB1)				Prepared: 12/13/23 Analyzed: 12/14/23						
Benzene	0.110		ug/kg							
Toluene	0.170		"							
Ethylbenzene	0.0800		"							
Xylene (p/m)	0.140		"							
Xylene (o)	0.150		"							
Surrogate: 4-Bromofluorobenzene	*0.136*		*"*	*0.120*		*113*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.111*		*"*	*0.120*		*92.6*	*80-120*			
Calibration Blank (P3L1303-CCB2)				Prepared: 12/13/23 Analyzed: 12/14/23						
Benzene	0.130		ug/kg							
Toluene	0.210		"							
Ethylbenzene	0.130		"							
Xylene (p/m)	0.160		"							
Xylene (o)	0.0900		"							
Surrogate: 1,4-Difluorobenzene	*0.111*		*"*	*0.120*		*92.8*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.138*		*"*	*0.120*		*115*	*80-120*			
Calibration Check (P3L1303-CCV1)				Prepared: 12/13/23 Analyzed: 12/14/23						
Benzene	0.106	0.00100	mg/kg	0.100		106	80-120			
Toluene	0.0935	0.00100	"	0.100		93.5	80-120			
Ethylbenzene	0.0945	0.00100	"	0.100		94.5	80-120			
Xylene (p/m)	0.193	0.00200	"	0.200		96.4	80-120			
Xylene (o)	0.0887	0.00100	"	0.100		88.7	80-120			
Surrogate: 1,4-Difluorobenzene	*0.113*		*"*	*0.120*		*93.8*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.131*		*"*	*0.120*		*109*	*75-125*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1303 - * DEFAULT PREP *** **										
Calibration Check (P3L1303-CCV2)				Prepared: 12/13/23 Analyzed: 12/14/23						
Benzene	0.117	0.00100	mg/kg	0.100		117	80-120			
Toluene	0.104	0.00100	"	0.100		104	80-120			
Ethylbenzene	0.104	0.00100	"	0.100		104	80-120			
Xylene (p/m)	0.209	0.00200	"	0.200		105	80-120			
Xylene (o)	0.0980	0.00100	"	0.100		98.0	80-120			
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*94.9*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.134*		"	*0.120*		*111*	*75-125*			
Calibration Check (P3L1303-CCV3)				Prepared: 12/13/23 Analyzed: 12/14/23						
Benzene	0.101	0.00100	mg/kg	0.100		101	80-120			
Toluene	0.0854	0.00100	"	0.100		85.4	80-120			
Ethylbenzene	0.0846	0.00100	"	0.100		84.6	80-120			
Xylene (p/m)	0.165	0.00200	"	0.200		82.5	80-120			
Xylene (o)	0.0802	0.00100	"	0.100		80.2	80-120			
Surrogate: 4-Bromofluorobenzene	*0.108*		"	*0.120*		*90.3*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.106*		"	*0.120*		*88.3*	*75-125*			
Matrix Spike (P3L1303-MS1)		**Source: 3L07001-51**		Prepared: 12/13/23 Analyzed: 12/14/23						
Benzene	0.0680	0.00105	mg/kg dry	0.105	ND	64.6	80-120			QM-05
Toluene	0.0573	0.00105	"	0.105	ND	54.5	80-120			QM-05
Ethylbenzene	0.0648	0.00105	"	0.105	ND	61.6	80-120			QM-05
Xylene (p/m)	0.123	0.00211	"	0.211	ND	58.5	80-120			QM-05
Xylene (o)	0.0708	0.00105	"	0.105	ND	67.3	80-120			QM-05
Surrogate: 4-Bromofluorobenzene	*0.147*		"	*0.126*		*116*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.118*		"	*0.126*		*93.4*	*80-120*			
Matrix Spike Dup (P3L1303-MSD1)		**Source: 3L07001-51**		Prepared: 12/13/23 Analyzed: 12/14/23						
Benzene	0.0740	0.00105	mg/kg dry	0.105	ND	70.3	80-120	8.48	20	QM-05
Toluene	0.0627	0.00105	"	0.105	ND	59.6	80-120	8.99	20	QM-05
Ethylbenzene	0.0706	0.00105	"	0.105	ND	67.0	80-120	8.47	20	QM-05
Xylene (p/m)	0.135	0.00211	"	0.211	ND	64.1	80-120	9.13	20	QM-05
Xylene (o)	0.0611	0.00105	"	0.105	ND	58.0	80-120	14.8	20	QM-05
Surrogate: 4-Bromofluorobenzene	*0.140*		"	*0.126*		*111*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.118*		"	*0.126*		*93.3*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1401 - * DEFAULT PREP *** **										
Blank (P3L1401-BLK1)				Prepared & Analyzed: 12/14/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 1,4-Difluorobenzene	*0.109*		"	*0.120*		*90.7*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.134*		"	*0.120*		*112*	*80-120*			
LCS (P3L1401-BS1)				Prepared & Analyzed: 12/14/23						
Benzene	0.101	0.00100	mg/kg	0.100		101	80-120			
Toluene	0.0912	0.00100	"	0.100		91.2	80-120			
Ethylbenzene	0.0995	0.00100	"	0.100		99.5	80-120			
Xylene (p/m)	0.193	0.00200	"	0.200		96.5	80-120			
Xylene (o)	0.0864	0.00100	"	0.100		86.4	80-120			
Surrogate: 1,4-Difluorobenzene	*0.110*		"	*0.120*		*91.4*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.130*		"	*0.120*		*108*	*80-120*			
LCS Dup (P3L1401-BSD1)				Prepared & Analyzed: 12/14/23						
Benzene	0.114	0.00100	mg/kg	0.100		114	80-120	12.1	20	
Toluene	0.105	0.00100	"	0.100		105	80-120	14.2	20	
Ethylbenzene	0.114	0.00100	"	0.100		114	80-120	13.4	20	
Xylene (p/m)	0.219	0.00200	"	0.200		109	80-120	12.4	20	
Xylene (o)	0.0999	0.00100	"	0.100		99.9	80-120	14.5	20	
Surrogate: 1,4-Difluorobenzene	*0.110*		"	*0.120*		*91.5*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.130*		"	*0.120*		*108*	*80-120*			
Calibration Blank (P3L1401-CCB1)				Prepared & Analyzed: 12/14/23						
Benzene	0.200		ug/kg							
Toluene	0.230		"							
Ethylbenzene	0.120		"							
Xylene (p/m)	0.210		"							
Xylene (o)	0.150		"							
Surrogate: 1,4-Difluorobenzene	*0.108*		"	*0.120*		*89.8*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.133*		"	*0.120*		*111*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1401 - * DEFAULT PREP *** **										
Calibration Blank (P3L1401-CCB2)				Prepared & Analyzed: 12/14/23						
Benzene	0.100		ug/kg							
Toluene	0.210		"							
Ethylbenzene	0.110		"							
Xylene (p/m)	0.150		"							
Xylene (o)	0.0900		"							
Surrogate: 4-Bromofluorobenzene	*0.137*		*"*	*0.120*		*114*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.109*		*"*	*0.120*		*91.0*	*80-120*			
Calibration Check (P3L1401-CCV1)				Prepared & Analyzed: 12/14/23						
Benzene	0.107	0.00100	mg/kg	0.100		107	80-120			
Toluene	0.0968	0.00100	"	0.100		96.8	80-120			
Ethylbenzene	0.0994	0.00100	"	0.100		99.4	80-120			
Xylene (p/m)	0.202	0.00200	"	0.200		101	80-120			
Xylene (o)	0.0940	0.00100	"	0.100		94.0	80-120			
Surrogate: 1,4-Difluorobenzene	*0.109*		*"*	*0.120*		*91.2*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.131*		*"*	*0.120*		*109*	*75-125*			
Calibration Check (P3L1401-CCV2)				Prepared & Analyzed: 12/14/23						
Benzene	0.115	0.00100	mg/kg	0.100		115	80-120			
Toluene	0.105	0.00100	"	0.100		105	80-120			
Ethylbenzene	0.106	0.00100	"	0.100		106	80-120			
Xylene (p/m)	0.214	0.00200	"	0.200		107	80-120			
Xylene (o)	0.0988	0.00100	"	0.100		98.8	80-120			
Surrogate: 1,4-Difluorobenzene	*0.111*		*"*	*0.120*		*92.4*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.132*		*"*	*0.120*		*110*	*75-125*			
Calibration Check (P3L1401-CCV3)				Prepared: 12/14/23 Analyzed: 12/15/23						
Benzene	0.120	0.00100	mg/kg	0.100		120	80-120			
Toluene	0.112	0.00100	"	0.100		112	80-120			
Ethylbenzene	0.113	0.00100	"	0.100		113	80-120			
Xylene (p/m)	0.227	0.00200	"	0.200		113	80-120			
Xylene (o)	0.106	0.00100	"	0.100		106	80-120			
Surrogate: 1,4-Difluorobenzene	*0.113*		*"*	*0.120*		*93.8*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.134*		*"*	*0.120*		*112*	*75-125*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1401 - * DEFAULT PREP *** **										
Matrix Spike (P3L1401-MS1)	**Source: 3L07001-67**			Prepared: 12/14/23 Analyzed: 12/15/23						
Benzene	0.0788	0.00103	mg/kg dry	0.103	ND	76.4	80-120			QM-05
Toluene	0.0618	0.00103	"	0.103	ND	59.9	80-120			QM-05
Ethylbenzene	0.0650	0.00103	"	0.103	ND	63.0	80-120			QM-05
Xylene (p/m)	0.129	0.00206	"	0.206	ND	62.3	80-120			QM-05
Xylene (o)	0.0572	0.00103	"	0.103	ND	55.5	80-120			QM-05
Surrogate: 4-Bromofluorobenzene	*0.137*		*"*	*0.124*		*111*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.115*		*"*	*0.124*		*93.1*	*80-120*			
Matrix Spike Dup (P3L1401-MSD1)	**Source: 3L07001-67**			Prepared: 12/14/23 Analyzed: 12/15/23						
Benzene	0.0904	0.00103	mg/kg dry	0.103	ND	87.7	80-120	13.7	20	
Toluene	0.0691	0.00103	"	0.103	ND	67.1	80-120	11.2	20	QM-05
Ethylbenzene	0.0723	0.00103	"	0.103	ND	70.1	80-120	10.6	20	QM-05
Xylene (p/m)	0.141	0.00206	"	0.206	ND	68.4	80-120	9.24	20	QM-05
Xylene (o)	0.0630	0.00103	"	0.103	ND	61.1	80-120	9.71	20	QM-05
Surrogate: 1,4-Difluorobenzene	*0.115*		*"*	*0.124*		*93.2*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.136*		*"*	*0.124*		*110*	*80-120*			
Batch P3L1402 - * DEFAULT PREP *** **										
Blank (P3L1402-BLK1)				Prepared: 12/14/23 Analyzed: 12/15/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 1,4-Difluorobenzene	*0.111*		*"*	*0.120*		*92.3*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.140*		*"*	*0.120*		*117*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1402 - * DEFAULT PREP *** **										
LCS (P3L1402-BS1)				Prepared: 12/14/23 Analyzed: 12/15/23						
Benzene	0.114	0.00100	mg/kg	0.100		114	80-120			
Toluene	0.103	0.00100	"	0.100		103	80-120			
Ethylbenzene	0.110	0.00100	"	0.100		110	80-120			
Xylene (p/m)	0.210	0.00200	"	0.200		105	80-120			
Xylene (o)	0.0966	0.00100	"	0.100		96.6	80-120			
Surrogate: 1,4-Difluorobenzene	*0.112*		*"*	*0.120*		*93.4*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.133*		*"*	*0.120*		*111*	*80-120*			
LCS Dup (P3L1402-BSD1)				Prepared: 12/14/23 Analyzed: 12/15/23						
Benzene	0.114	0.00100	mg/kg	0.100		114	80-120	0.0262	20	
Toluene	0.103	0.00100	"	0.100		103	80-120	0.379	20	
Ethylbenzene	0.109	0.00100	"	0.100		109	80-120	1.22	20	
Xylene (p/m)	0.209	0.00200	"	0.200		104	80-120	0.430	20	
Xylene (o)	0.0957	0.00100	"	0.100		95.7	80-120	0.915	20	
Surrogate: 4-Bromofluorobenzene	*0.133*		*"*	*0.120*		*110*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.113*		*"*	*0.120*		*93.8*	*80-120*			
Calibration Blank (P3L1402-CCB1)				Prepared: 12/14/23 Analyzed: 12/15/23						
Benzene	0.130		ug/kg							
Toluene	0.160		"							
Ethylbenzene	0.200		"							
Xylene (p/m)	0.180		"							
Xylene (o)	0.150		"							
Surrogate: 1,4-Difluorobenzene	*0.110*		*"*	*0.120*		*91.8*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.138*		*"*	*0.120*		*115*	*80-120*			
Calibration Blank (P3L1402-CCB2)				Prepared: 12/14/23 Analyzed: 12/15/23						
Benzene	0.110		ug/kg							
Toluene	0.170		"							
Ethylbenzene	0.0900		"							
Xylene (p/m)	0.190		"							
Xylene (o)	0.110		"							
Surrogate: 1,4-Difluorobenzene	*0.110*		*"*	*0.120*		*91.8*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.140*		*"*	*0.120*		*116*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1402 - * DEFAULT PREP *** **										
Calibration Check (P3L1402-CCV1)				Prepared: 12/14/23 Analyzed: 12/15/23						
Benzene	0.120	0.00100	mg/kg	0.100		120	80-120			
Toluene	0.112	0.00100	"	0.100		112	80-120			
Ethylbenzene	0.113	0.00100	"	0.100		113	80-120			
Xylene (p/m)	0.227	0.00200	"	0.200		113	80-120			
Xylene (o)	0.106	0.00100	"	0.100		106	80-120			
Surrogate: 4-Bromofluorobenzene	*0.134*		"	*0.120*		*112*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.113*		"	*0.120*		*93.8*	*75-125*			
Calibration Check (P3L1402-CCV2)				Prepared: 12/14/23 Analyzed: 12/15/23						
Benzene	0.119	0.00100	mg/kg	0.100		119	80-120			
Toluene	0.109	0.00100	"	0.100		109	80-120			
Ethylbenzene	0.110	0.00100	"	0.100		110	80-120			
Xylene (p/m)	0.219	0.00200	"	0.200		110	80-120			
Xylene (o)	0.104	0.00100	"	0.100		104	80-120			
Surrogate: 1,4-Difluorobenzene	*0.112*		"	*0.120*		*93.6*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.137*		"	*0.120*		*114*	*75-125*			
Calibration Check (P3L1402-CCV3)				Prepared: 12/14/23 Analyzed: 12/15/23						
Benzene	0.117	0.00100	mg/kg	0.100		117	80-120			
Toluene	0.110	0.00100	"	0.100		110	80-120			
Ethylbenzene	0.110	0.00100	"	0.100		110	80-120			
Xylene (p/m)	0.219	0.00200	"	0.200		109	80-120			
Xylene (o)	0.104	0.00100	"	0.100		104	80-120			
Surrogate: 1,4-Difluorobenzene	*0.110*		"	*0.120*		*91.6*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.136*		"	*0.120*		*113*	*75-125*			
Matrix Spike (P3L1402-MS1)		**Source: 3L07001-87**		Prepared: 12/14/23 Analyzed: 12/15/23						
Benzene	0.0919	0.00102	mg/kg dry	0.102	ND	90.1	80-120			
Toluene	0.0763	0.00102	"	0.102	ND	74.7	80-120			QM-05
Ethylbenzene	0.0822	0.00102	"	0.102	ND	80.6	80-120			
Xylene (p/m)	0.159	0.00204	"	0.204	ND	77.7	80-120			QM-05
Xylene (o)	0.0695	0.00102	"	0.102	ND	68.1	80-120			QM-05
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.122*		*92.8*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.140*		"	*0.122*		*115*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1402 - * DEFAULT PREP *** **										
Matrix Spike Dup (P3L1402-MSD1)	**Source: 3L07001-87**			Prepared: 12/14/23 Analyzed: 12/15/23						
Benzene	0.0921	0.00102	mg/kg dry	0.102	ND	90.3	80-120	0.211	20	
Toluene	0.0759	0.00102	"	0.102	ND	74.4	80-120	0.429	20	QM-05
Ethylbenzene	0.0824	0.00102	"	0.102	ND	80.7	80-120	0.136	20	
Xylene (p/m)	0.157	0.00204	"	0.204	ND	76.7	80-120	1.35	20	QM-05
Xylene (o)	0.0688	0.00102	"	0.102	ND	67.4	80-120	1.06	20	QM-05
Surrogate: 1,4-Difluorobenzene	*0.114*		*"*	*0.122*		*93.0*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.139*		*"*	*0.122*		*113*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0807 - TX 1005										
Blank (P3L0807-BLK1)				Prepared & Analyzed: 12/08/23						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*98.4*		*"*	*100*		*98.4*	*70-130*			
Surrogate: o-Terphenyl	*51.9*		*"*	*50.0*		*104*	*70-130*			
LCS (P3L0807-BS1)				Prepared & Analyzed: 12/08/23						
C6-C12	1050	25.0	mg/kg	1000		105	75-125			
>C12-C28	1120	25.0	"	1000		112	75-125			
Surrogate: 1-Chlorooctane	*121*		*"*	*100*		*121*	*70-130*			
Surrogate: o-Terphenyl	*50.3*		*"*	*50.0*		*101*	*70-130*			
LCS Dup (P3L0807-BSD1)				Prepared & Analyzed: 12/08/23						
C6-C12	1020	25.0	mg/kg	1000		102	75-125	2.70	20	
>C12-C28	1100	25.0	"	1000		110	75-125	1.89	20	
Surrogate: 1-Chlorooctane	*118*		*"*	*100*		*118*	*70-130*			
Surrogate: o-Terphenyl	*49.5*		*"*	*50.0*		*99.1*	*70-130*			
Calibration Check (P3L0807-CCV1)				Prepared & Analyzed: 12/08/23						
C6-C12	493	25.0	mg/kg	500		98.5	85-115			
>C12-C28	567	25.0	"	500		113	85-115			
Surrogate: 1-Chlorooctane	*100*		*"*	*100*		*100*	*70-130*			
Surrogate: o-Terphenyl	*51.9*		*"*	*50.0*		*104*	*70-130*			
Calibration Check (P3L0807-CCV2)				Prepared & Analyzed: 12/08/23						
C6-C12	495	25.0	mg/kg	500		99.0	85-115			
>C12-C28	557	25.0	"	500		111	85-115			
Surrogate: 1-Chlorooctane	*104*		*"*	*100*		*104*	*70-130*			
Surrogate: o-Terphenyl	*52.9*		*"*	*50.0*		*106*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0808 - TX 1005										
Blank (P3L0808-BLK1)				Prepared: 12/08/23 Analyzed: 12/09/23						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*97.0*		*"*	*100*		*97.0*	*70-130*			
Surrogate: o-Terphenyl	*51.6*		*"*	*50.0*		*103*	*70-130*			
LCS (P3L0808-BS1)				Prepared: 12/08/23 Analyzed: 12/09/23						
C6-C12	867	25.0	mg/kg	1000		86.7	75-125			
>C12-C28	859	25.0	"	1000		85.9	75-125			
Surrogate: 1-Chlorooctane	*128*		*"*	*100*		*128*	*70-130*			
Surrogate: o-Terphenyl	*53.4*		*"*	*50.0*		*107*	*70-130*			
LCS Dup (P3L0808-BSD1)				Prepared: 12/08/23 Analyzed: 12/09/23						
C6-C12	823	25.0	mg/kg	1000		82.3	75-125	5.22	20	
>C12-C28	819	25.0	"	1000		81.9	75-125	4.85	20	
Surrogate: 1-Chlorooctane	*126*		*"*	*100*		*126*	*70-130*			
Surrogate: o-Terphenyl	*52.2*		*"*	*50.0*		*104*	*70-130*			
Calibration Check (P3L0808-CCV1)				Prepared: 12/08/23 Analyzed: 12/09/23						
C6-C12	436	25.0	mg/kg	500		87.2	85-115			
>C12-C28	428	25.0	"	500		85.6	85-115			
Surrogate: 1-Chlorooctane	*80.1*		*"*	*100*		*80.1*	*70-130*			
Surrogate: o-Terphenyl	*39.6*		*"*	*50.0*		*79.2*	*70-130*			
Calibration Check (P3L0808-CCV2)				Prepared: 12/08/23 Analyzed: 12/09/23						
C6-C12	430	25.0	mg/kg	500		86.1	85-115			
>C12-C28	471	25.0	"	500		94.1	85-115			
Surrogate: 1-Chlorooctane	*85.0*		*"*	*100*		*85.0*	*70-130*			
Surrogate: o-Terphenyl	*42.5*		*"*	*50.0*		*84.9*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0808 - TX 1005										
Calibration Check (P3L0808-CCV3)				Prepared: 12/08/23 Analyzed: 12/09/23						
C6-C12	427	25.0	mg/kg	500		85.4	85-115			
>C12-C28	475	25.0	"	500		94.9	85-115			
Surrogate: 1-Chlorooctane	*82.8*		*"*	*100*		*82.8*	*70-130*			
Surrogate: o-Terphenyl	*42.7*		*"*	*50.0*		*85.5*	*70-130*			
Batch P3L0809 - TX 1005										
Blank (P3L0809-BLK1)				Prepared & Analyzed: 12/08/23						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*110*		*"*	*100*		*110*	*70-130*			
Surrogate: o-Terphenyl	*63.6*		*"*	*50.0*		*127*	*70-130*			
LCS (P3L0809-BS1)				Prepared & Analyzed: 12/08/23						
C6-C12	1100	25.0	mg/kg	1000		110	75-125			
>C12-C28	1060	25.0	"	1000		106	75-125			
Surrogate: 1-Chlorooctane	*105*		*"*	*100*		*105*	*70-130*			
Surrogate: o-Terphenyl	*54.8*		*"*	*50.0*		*110*	*70-130*			
LCS Dup (P3L0809-BSD1)				Prepared & Analyzed: 12/08/23						
C6-C12	1110	25.0	mg/kg	1000		111	75-125	1.01	20	
>C12-C28	1100	25.0	"	1000		110	75-125	3.28	20	
Surrogate: 1-Chlorooctane	*108*		*"*	*100*		*108*	*70-130*			
Surrogate: o-Terphenyl	*56.1*		*"*	*50.0*		*112*	*70-130*			
Calibration Check (P3L0809-CCV1)				Prepared & Analyzed: 12/08/23						
C6-C12	523	25.0	mg/kg	500		105	85-115			
>C12-C28	504	25.0	"	500		101	85-115			
Surrogate: 1-Chlorooctane	*110*		*"*	*100*		*110*	*70-130*			
Surrogate: o-Terphenyl	*62.2*		*"*	*50.0*		*124*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0809 - TX 1005										
Calibration Check (P3L0809-CCV2)				Prepared: 12/08/23 Analyzed: 12/09/23						
C6-C12	469	25.0	mg/kg	500		93.8	85-115			
>C12-C28	503	25.0	"	500		101	85-115			
Surrogate: 1-Chlorooctane	*113*		*"*	*100*		*113*	*70-130*			
Surrogate: o-Terphenyl	*58.2*		*"*	*50.0*		*116*	*70-130*			
Batch P3L0810 - TX 1005										
Blank (P3L0810-BLK1)				Prepared: 12/08/23 Analyzed: 12/09/23						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*107*		*"*	*100*		*107*	*70-130*			
Surrogate: o-Terphenyl	*61.6*		*"*	*50.0*		*123*	*70-130*			
LCS (P3L0810-BS1)				Prepared: 12/08/23 Analyzed: 12/09/23						
C6-C12	1030	25.0	mg/kg	1000		103	75-125			
>C12-C28	1050	25.0	"	1000		105	75-125			
Surrogate: 1-Chlorooctane	*103*		*"*	*100*		*103*	*70-130*			
Surrogate: o-Terphenyl	*53.7*		*"*	*50.0*		*107*	*70-130*			
LCS Dup (P3L0810-BSD1)				Prepared: 12/08/23 Analyzed: 12/09/23						
C6-C12	1050	25.0	mg/kg	1000		105	75-125	1.44	20	
>C12-C28	1040	25.0	"	1000		104	75-125	0.809	20	
Surrogate: 1-Chlorooctane	*100*		*"*	*100*		*100*	*70-130*			
Surrogate: o-Terphenyl	*52.9*		*"*	*50.0*		*106*	*70-130*			
Calibration Check (P3L0810-CCV1)				Prepared: 12/08/23 Analyzed: 12/09/23						
C6-C12	448	25.0	mg/kg	500		89.6	85-115			
>C12-C28	474	25.0	"	500		94.8	85-115			
Surrogate: 1-Chlorooctane	*105*		*"*	*100*		*105*	*70-130*			
Surrogate: o-Terphenyl	*53.1*		*"*	*50.0*		*106*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0810 - TX 1005										
Calibration Check (P3L0810-CCV2)				Prepared: 12/08/23 Analyzed: 12/09/23						
C6-C12	501	25.0	mg/kg	500		100	85-115			
>C12-C28	530	25.0	"	500		106	85-115			
Surrogate: 1-Chlorooctane	*119*		*"*	*100*		*119*	*70-130*			
Surrogate: o-Terphenyl	*61.7*		*"*	*50.0*		*123*	*70-130*			
Calibration Check (P3L0810-CCV3)				Prepared: 12/08/23 Analyzed: 12/09/23						
C6-C12	480	25.0	mg/kg	500		96.1	85-115			
>C12-C28	512	25.0	"	500		102	85-115			
Surrogate: 1-Chlorooctane	*114*		*"*	*100*		*114*	*70-130*			
Surrogate: o-Terphenyl	*59.3*		*"*	*50.0*		*119*	*70-130*			
Batch P3L1108 - TX 1005										
Blank (P3L1108-BLK1)				Prepared & Analyzed: 12/11/23						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*105*		*"*	*100*		*105*	*70-130*			
Surrogate: o-Terphenyl	*63.8*		*"*	*50.0*		*128*	*70-130*			
LCS (P3L1108-BS1)				Prepared & Analyzed: 12/11/23						
C6-C12	1080	25.0	mg/kg	1000		108	75-125			
>C12-C28	1090	25.0	"	1000		109	75-125			
Surrogate: 1-Chlorooctane	*106*		*"*	*100*		*106*	*70-130*			
Surrogate: o-Terphenyl	*55.8*		*"*	*50.0*		*112*	*70-130*			
LCS Dup (P3L1108-BSD1)				Prepared & Analyzed: 12/11/23						
C6-C12	1060	25.0	mg/kg	1000		106	75-125	1.45	20	
>C12-C28	1080	25.0	"	1000		108	75-125	1.18	20	
Surrogate: 1-Chlorooctane	*105*		*"*	*100*		*105*	*70-130*			
Surrogate: o-Terphenyl	*54.7*		*"*	*50.0*		*109*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1108 - TX 1005										
Calibration Check (P3L1108-CCV1)				Prepared & Analyzed: 12/11/23						
C6-C12	484	25.0	mg/kg	500		96.7	85-115			
>C12-C28	501	25.0	"	500		100	85-115			
Surrogate: 1-Chlorooctane	*112*		*"*	*100*		*112*	*70-130*			
Surrogate: o-Terphenyl	*58.5*		*"*	*50.0*		*117*	*70-130*			
Calibration Check (P3L1108-CCV2)				Prepared & Analyzed: 12/11/23						
C6-C12	478	25.0	mg/kg	500		95.5	85-115			
>C12-C28	501	25.0	"	500		100	85-115			
Surrogate: 1-Chlorooctane	*111*		*"*	*100*		*111*	*70-130*			
Surrogate: o-Terphenyl	*58.8*		*"*	*50.0*		*118*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0806 - * DEFAULT PREP *** **										
Blank (P3L0806-BLK1)				Prepared & Analyzed: 12/08/23						
% Moisture	ND	0.1	%							
Blank (P3L0806-BLK2)				Prepared & Analyzed: 12/08/23						
% Moisture	ND	0.1	%							
Blank (P3L0806-BLK3)				Prepared & Analyzed: 12/08/23						
% Moisture	ND	0.1	%							
Blank (P3L0806-BLK4)				Prepared & Analyzed: 12/08/23						
% Moisture	ND	0.1	%							
Blank (P3L0806-BLK5)				Prepared & Analyzed: 12/08/23						
% Moisture	ND	0.1	%							
Duplicate (P3L0806-DUP1)	**Source: 3L07001-02**			Prepared & Analyzed: 12/08/23						
% Moisture	4.0	0.1	%		4.0			0.00	20	
Duplicate (P3L0806-DUP2)	**Source: 3L07001-12**			Prepared & Analyzed: 12/08/23						
% Moisture	7.0	0.1	%		7.0			0.00	20	
Duplicate (P3L0806-DUP3)	**Source: 3L07001-27**			Prepared & Analyzed: 12/08/23						
% Moisture	4.0	0.1	%		4.0			0.00	20	
Duplicate (P3L0806-DUP4)	**Source: 3L07001-37**			Prepared & Analyzed: 12/08/23						
% Moisture	4.0	0.1	%		4.0			0.00	20	
Duplicate (P3L0806-DUP5)	**Source: 3L07001-52**			Prepared & Analyzed: 12/08/23						
% Moisture	3.0	0.1	%		3.0			0.00	20	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0806 - * DEFAULT PREP *** **										
Duplicate (P3L0806-DUP6)	**Source: 3L07001-62**			Prepared & Analyzed: 12/08/23						
% Moisture	3.0	0.1	%		3.0			0.00	20	
Duplicate (P3L0806-DUP7)	**Source: 3L07001-77**			Prepared & Analyzed: 12/08/23						
% Moisture	4.0	0.1	%		5.0			22.2	20	
Duplicate (P3L0806-DUP8)	**Source: 3L07001-87**			Prepared & Analyzed: 12/08/23						
% Moisture	2.0	0.1	%		2.0			0.00	20	
Batch P3L0812 - * DEFAULT PREP *** **										
Blank (P3L0812-BLK1)				Prepared: 12/08/23 Analyzed: 12/14/23						
Chloride	ND	1.00	mg/kg							
LCS (P3L0812-BS1)				Prepared: 12/08/23 Analyzed: 12/15/23						
Chloride	20.7		mg/kg	20.0		104	90-110			
LCS Dup (P3L0812-BSD1)				Prepared: 12/08/23 Analyzed: 12/15/23						
Chloride	20.8		mg/kg	20.0		104	90-110	0.284	10	
Calibration Check (P3L0812-CCV1)				Prepared: 12/08/23 Analyzed: 12/15/23						
Chloride	20.4		mg/kg	20.0		102	90-110			
Matrix Spike (P3L0812-MS1)	**Source: 3L01003-47**			Prepared: 12/08/23 Analyzed: 12/14/23						
Chloride	124		mg/kg	100	3.03	121	80-120			QM-05
Matrix Spike (P3L0812-MS2)	**Source: 3L07001-09**			Prepared: 12/08/23 Analyzed: 12/14/23						
Chloride	114		mg/kg	100	1.28	113	80-120			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0812 - * DEFAULT PREP *** **										
Matrix Spike Dup (P3L0812-MSD1)	**Source: 3L01003-47**			Prepared: 12/08/23 Analyzed: 12/14/23						
Chloride	123		mg/kg	100	3.03	120	80-120	0.505	20	
Matrix Spike Dup (P3L0812-MSD2)	**Source: 3L07001-09**			Prepared: 12/08/23 Analyzed: 12/14/23						
Chloride	113		mg/kg	100	1.28	111	80-120	1.47	20	
Batch P3L0813 - * DEFAULT PREP *** **										
Blank (P3L0813-BLK1)				Prepared: 12/08/23 Analyzed: 12/15/23						
Chloride	ND	1.00	mg/kg							
LCS (P3L0813-BS1)				Prepared: 12/08/23 Analyzed: 12/15/23						
Chloride	20.2		mg/kg	20.0		101	90-110			
LCS Dup (P3L0813-BSD1)				Prepared: 12/08/23 Analyzed: 12/15/23						
Chloride	19.7		mg/kg	20.0		98.4	90-110	2.81	10	
Calibration Check (P3L0813-CCV1)				Prepared: 12/08/23 Analyzed: 12/15/23						
Chloride	20.5		mg/kg	20.0		103	90-110			
Calibration Check (P3L0813-CCV2)				Prepared: 12/08/23 Analyzed: 12/15/23						
Chloride	20.8		mg/kg	20.0		104	90-110			
Matrix Spike (P3L0813-MS1)	**Source: 3L07001-19**			Prepared: 12/08/23 Analyzed: 12/15/23						
Chloride	116		mg/kg	100	2.62	113	80-120			
Matrix Spike (P3L0813-MS2)	**Source: 3L07001-29**			Prepared: 12/08/23 Analyzed: 12/15/23						
Chloride	117		mg/kg	100	3.79	113	80-120			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0813 - * DEFAULT PREP *** **										
Matrix Spike Dup (P3L0813-MSD1)	**Source: 3L07001-19**			Prepared: 12/08/23 Analyzed: 12/15/23						
Chloride	114		mg/kg	100	2.62	112	80-120	1.20	20	
Matrix Spike Dup (P3L0813-MSD2)	**Source: 3L07001-29**			Prepared: 12/08/23 Analyzed: 12/15/23						
Chloride	117		mg/kg	100	3.79	113	80-120	0.464	20	
Batch P3L0814 - * DEFAULT PREP *** **										
Blank (P3L0814-BLK1)				Prepared: 12/08/23 Analyzed: 12/11/23						
Chloride	ND	1.00	mg/kg							
LCS (P3L0814-BS1)				Prepared: 12/08/23 Analyzed: 12/11/23						
Chloride	19.0		mg/kg	20.0		95.1	90-110			
LCS Dup (P3L0814-BSD1)				Prepared: 12/08/23 Analyzed: 12/09/23						
Chloride	20.3		mg/kg	20.0		102	90-110	6.66	10	
Calibration Check (P3L0814-CCV1)				Prepared: 12/08/23 Analyzed: 12/11/23						
Chloride	20.4		mg/kg	20.0		102	90-110			
Calibration Check (P3L0814-CCV2)				Prepared: 12/08/23 Analyzed: 12/09/23						
Chloride	18.3		mg/kg	20.0		91.7	90-110			
Matrix Spike (P3L0814-MS1)	**Source: 3L07001-39**			Prepared: 12/08/23 Analyzed: 12/09/23						
Chloride	109		mg/kg	100	0.878	108	80-120			
Matrix Spike (P3L0814-MS2)	**Source: 3L07001-49**			Prepared: 12/08/23 Analyzed: 12/09/23						
Chloride	102		mg/kg	100	0.725	101	80-120			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L0814 - * DEFAULT PREP *** **										
Matrix Spike Dup (P3L0814-MSD1)	**Source: 3L07001-39**			Prepared: 12/08/23 Analyzed: 12/09/23						
Chloride	112		mg/kg	100	0.878	111	80-120	2.58	20	
Matrix Spike Dup (P3L0814-MSD2)	**Source: 3L07001-49**			Prepared: 12/08/23 Analyzed: 12/09/23						
Chloride	104		mg/kg	100	0.725	104	80-120	2.35	20	
Batch P3L1112 - * DEFAULT PREP *** **										
Blank (P3L1112-BLK1)				Prepared: 12/11/23 Analyzed: 12/12/23						
Chloride	ND	1.00	mg/kg							
LCS (P3L1112-BS1)				Prepared & Analyzed: 12/11/23						
Chloride	20.6		mg/kg	20.0		103	90-110			
LCS Dup (P3L1112-BSD1)				Prepared: 12/11/23 Analyzed: 12/12/23						
Chloride	20.4		mg/kg	20.0		102	90-110	0.941	10	
Calibration Check (P3L1112-CCV1)				Prepared & Analyzed: 12/11/23						
Chloride	21.1		mg/kg	20.0		106	90-110			
Calibration Check (P3L1112-CCV2)				Prepared: 12/11/23 Analyzed: 12/12/23						
Chloride	21.1		mg/kg	20.0		106	90-110			
Matrix Spike (P3L1112-MS1)	**Source: 3L07001-56**			Prepared: 12/11/23 Analyzed: 12/12/23						
Chloride	111		mg/kg	100	3.53	108	80-120			
Matrix Spike (P3L1112-MS2)	**Source: 3L11005-01**			Prepared: 12/11/23 Analyzed: 12/12/23						
Chloride	105		mg/kg	100	0.244	104	80-120			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1112 - * DEFAULT PREP *** **										
Matrix Spike Dup (P3L1112-MSD1)	**Source: 3L07001-56**			Prepared: 12/11/23 Analyzed: 12/12/23						
Chloride	110		mg/kg	100	3.53	107	80-120	0.976	20	
Matrix Spike Dup (P3L1112-MSD2)	**Source: 3L11005-01**			Prepared: 12/11/23 Analyzed: 12/12/23						
Chloride	104		mg/kg	100	0.244	104	80-120	0.775	20	
Batch P3L1218 - * DEFAULT PREP *** **										
Blank (P3L1218-BLK1)				Prepared: 12/12/23 Analyzed: 12/17/23						
Chloride	ND	1.00	mg/kg							
LCS (P3L1218-BS1)				Prepared: 12/12/23 Analyzed: 12/15/23						
Chloride	19.7		mg/kg	20.0		98.3	90-110			
LCS Dup (P3L1218-BSD1)				Prepared: 12/12/23 Analyzed: 12/15/23						
Chloride	21.3		mg/kg	20.0		106	90-110	7.91	10	
Calibration Check (P3L1218-CCV1)				Prepared: 12/12/23 Analyzed: 12/15/23						
Chloride	21.2		mg/kg	20.0		106	90-110			
Calibration Check (P3L1218-CCV2)				Prepared: 12/12/23 Analyzed: 12/16/23						
Chloride	21.0		mg/kg	20.0		105	90-110			
Matrix Spike (P3L1218-MS1)	**Source: 3L07001-66**			Prepared: 12/12/23 Analyzed: 12/15/23						
Chloride	112		mg/kg	100	0.585	111	80-120			
Matrix Spike (P3L1218-MS2)	**Source: 3L07001-76**			Prepared: 12/12/23 Analyzed: 12/16/23						
Chloride	109		mg/kg	100	0.275	109	80-120			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1218 - * DEFAULT PREP *** **										
Matrix Spike Dup (P3L1218-MSD1)	**Source: 3L07001-66**			Prepared: 12/12/23 Analyzed: 12/15/23						
Chloride	113		mg/kg	100	0.585	113	80-120	1.69	20	
Matrix Spike Dup (P3L1218-MSD2)	**Source: 3L07001-76**			Prepared: 12/12/23 Analyzed: 12/16/23						
Chloride	111		mg/kg	100	0.275	111	80-120	2.13	20	
Batch P3L1219 - * DEFAULT PREP *** **										
Blank (P3L1219-BLK1)				Prepared & Analyzed: 12/12/23						
Chloride	ND	1.00	mg/kg							
LCS (P3L1219-BS1)				Prepared & Analyzed: 12/12/23						
Chloride	15.8		mg/kg	20.0		79.0	90-110			
LCS Dup (P3L1219-BSD1)				Prepared & Analyzed: 12/12/23						
Chloride	14.8		mg/kg	20.0		74.2	90-110	6.18	10	
Calibration Check (P3L1219-CCV1)				Prepared & Analyzed: 12/12/23						
Chloride	20.8		mg/kg	20.0		104	90-110			
Calibration Check (P3L1219-CCV2)				Prepared & Analyzed: 12/12/23						
Chloride	20.4		mg/kg	20.0		102	90-110			
Matrix Spike (P3L1219-MS1)	**Source: 3L07001-86**			Prepared & Analyzed: 12/12/23						
Chloride	98.0		mg/kg	100	0.508	97.5	80-120			
Matrix Spike (P3L1219-MS2)	**Source: 3L07003-06**			Prepared & Analyzed: 12/12/23						
Chloride	108		mg/kg	100	0.358	108	80-120			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1219 - * DEFAULT PREP *** **										
Matrix Spike Dup (P3L1219-MSD1)	**Source: 3L07001-86**			Prepared & Analyzed: 12/12/23						
Chloride	97.3		mg/kg	100	0.508	96.7	80-120	0.725	20	
Matrix Spike Dup (P3L1219-MSD2)	**Source: 3L07003-06**			Prepared & Analyzed: 12/12/23						
Chloride	107		mg/kg	100	0.358	106	80-120	1.46	20	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Notes and Definitions

S-GC	Surrogate recovery outside of control limits. The data was accepted based on valid recovery of the remaining surrogate.
ROI	Received on Ice
QM-05	The spike recovery was outside acceptance limits for the MS and/or MSD due to matrix interference. The LCS and/or LCSD were within acceptance limits showing that the laboratory is in control and the data is acceptable.
BULK	Samples received in Bulk soil containers may be biased low in the nC6-C12 TPH Range
DET	Analyte DETECTED
ND	Analyte NOT DETECTED at or above the reporting limit
NR	Not Reported
dry	Sample results reported on a dry weight basis
RPD	Relative Percent Difference
LCS	Laboratory Control Spike
MS	Matrix Spike
Dup	Duplicate

Report Approved By: Brent Barron Date: 2/2/2024

Brent Barron, Laboratory Director/Technical Director

This material is intended only for the use of the individual (s) or entity to whom it is addressed, and may contain information that is privileged and confidential.

If you have received this material in error, please notify us immediately at 432-686-7235.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Page 683 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934 **Fax No:** _____
Sampler Signature: Jose Bellor **e-mail:** Jamey@Tellusservices

Project Name: Jalapeño
Project #: CDEV # 11845
Project Loc: Lea, CO, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES

(lab use only)
ORDER #: 3607001

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total #. of Containers	Preservation & # of Containers: Ice	HNO3	HCl	H2SO4	NaOH	Na2S2O3	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge	GW = Groundwater S=Soil/Solid	NP=Non-Potable Specify Other	Analyze For: TCLP: TPH: TX 1005	TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA - 8021	TPH- EPA - 8015	Chlorides EPA-300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 hr	Standard TAT
1	BH-50@1.5	1.5	1-5	12-5-23	2:23		1									S						X	X	X		
2	BH-51@1.5	1.5	1.5	12-5-23	2:25																					
3	BH-52@1.5	1,5	1.5	12-5-23	2:27																					
4	BH-53@1.5	1.5	1.5	12-5-23	2:28																					
5	BH-54@1.5	1.5	1-5	12-5-23	2:30																					
6	BH-55@1.5	1.5	1-5	12-5-23	2:32																					
7	BH-56@1.5	1-5	1-5	12-5-23	2:34																					
8	BH-57@1.5	1.5	1.5	12-5-23	2:35																					
9	BH-58@1.5	1.5	1.5	12-5-23	2:36																					
10	BH-59@1.5	1-5	1.5	12-5-23	2:38																					

Special Instructions: Report TPH- in- C6-C12 C12-C28 7 C28-C35 fractions aswell as total TPH
same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
[signature]	12/7/23	8:46			
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL: [signature]	12/7/23	8:46

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N
by Sampler/Client Rep. ?	Y	N

by Courier? UPS DHL FedEx Lone Star

Temperature Upon Receipt:
Received: 5.(°C Thermometer: NG
Adjusted: 5.(°C Factor: NG

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

Page 684 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934 Fax No: _____
Sampler Signature: Jose Belloc e-mail: Jamey@Tellusservices

Project Name: Jalapeño
Project #: COEN # 11845
Project Loc: Lea, CO, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES

(lab use only) ORDER #: 3L07001

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total # of Containers	Preservation & # of Containers: Ice	HNO_3	HCl	H_2SO_4	NaOH	$Na_2S_2O_3$	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge	GW = Groundwater S=Soil/Solid	NP=Non-Potable Specify Other	Analyze For: TCLP: TPH: TX 1005 TX 1006	TOTAL: Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA - 8021	TPH- EPA - 8015	Chlorides EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
11	BH-60@1.5	1.5	1.5	12-5-23	2:41		1									S						X	X	Y		
12	BH-61@1.5	1.5	1.5	12-5-23	2:43		1									S										
13	BH-62@1.5	1.5	1.5	12-5-23	2:45		1									S										
14	BH-63@1.5	1.5	1.5	12-5-23	2:47		1									S										
15	BH-64@1.5	1.5	1.5	12-5-23	2:50		1									S										
16	BH-65@1.5	1.5	1.5	12-5-23	2:53		1									S										
17	BH-66@1.5	1.5	1.5	12-5-23	2:54		1									S										
18	BH-67@1.5	1.5	1.5	12-5-23	2:56		1									S										
19	BH-68@1.5	1.5	1.5	12-5-23	3:01		1									S										
20	BH-69@1.5	1.5	1.5	12-5-23	3:03		1									S										

Special Instructions: Report TPH-in-C6-C12 7 C12-C28 7 C28-C35 fractions aswell as total TPH
some instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
[signature]	12/7/23	8:46			
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL: [signature]	Date 12/7/23	Time 8:44

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N
by Sampler/Client Rep. ?	Y	N

by Courier? UPS DHL FedEx Lone Star

Temperature Upon Receipt: Received: 5.1 °C Adjusted: °C Thermometor: NC 13 Factor:

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21 Page 1 of 1

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

Page 685 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Janey fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934 **Fax No:** _____
Sampler Signature: Jose Belloc **e-mail:** Janey@Tellusservices

Project Name: Jalapeño
Project #: COEV # 11845
Project Loc: Lea, CO, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES

(lab use only)
ORDER #: 3L07001

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total #. of Containers	Preservation & # of Containers: Ice	HNO3	HCl	H2SO4	NaOH	Na2S2O3	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge	GW = Groundwater S=Soil/Solid	NP=Non-Potable Specify Other	Analyze For: TCLP: TPH: TX 1005	TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA - 8021	TPH- EPA - 8015	Chlorides EPA-300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
21	BH-70@1.5	1.5	1.5	12-5-23	3:07		1									S						X	X	X		

Special Instructions: Report TPH- in- C6-C12 7 C12-C28 7 C28-C35 fractions aswell as total TPH
same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
Jose Belloc	12/7/23	8:46			
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL: Teresa Bledsoe	Date	Time
				12/7/23	8:46

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N
by Sampler/Client Rep. ?		
by Courier? UPS DHL FedEx Lone Star		

Temperature Upon Receipt:
Received: ~~17~~ 18 °C Thermometer: IR5
Adjusted: °C Factor:

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21

5.1

Page 1 of 1

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

Page 686 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934 **Fax No:** _____
Sampler Signature: Jose Bellor **e-mail:** Jamey@Tellusservices

Project Name: Jalapeño
Project #: CDEV # 11895
Project Loc: Lea, CO, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES

(lab use only) **ORDER #:** 3L07001

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total #. of Containers	Preservation & # of Containers: Ice	HNO_3	HCl	H_2SO_4	NaOH	$Na_2S_2O_3$	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge	GW = Groundwater S=Soil/Solid	NP=Non-Potable Specify Other	Analyze For: TCLP: TOTAL: TPH: TX 1005 TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA - 8021	TPH-EPA - 8015	Chlorides EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
22	BH-242@1.5	1.5	1.5	12-4-23	7:55		1									S						x	x	x		
23	BH-243@1.5	1.5	1.5	12-4-23	8:03																					
24	BH-244@1.5	1.5	1.5	12-4-23	8:07																					
25	BH-245@1.5	1.5	1.5	12-4-23	8:01																					
26	BH-246@1.5	1.5	1.5	12-4-23	8:10																					
27	BH-247@1.5	1.5	1.5	12-4-23	8:12																					
28	BH-248@1.5	1.5	1.5	12-4-23	8:15																					
29	BH-249@1.5	1.5	1.5	12-4-23	8:16																					
30	BH-250@1.5	1.5	1.5	12-4-23	8:20																					
31	BH-251@1.5	1.5	1.5	12-4-23	8:22																					

Special Instructions: Report TPH-in-C6-C12 / C12-C28 / C28-C35 fractions aswell as total TPH
same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
Jose Bellor	12/7/23	8:46			
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL:	Date	Time
				12/7/23	8:46

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N
by Sampler/Client Rep. ?	Y	N

by Courier? UPS DHL FedEx Lone Star

Temperature Upon Receipt:
Received: 5.1 °C Thermometor: NC 03
Adjusted: °C Factor:

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21

Page 1 of 1

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934 Fax No: _____
Sampler Signature: Jose Belloc e-mail: Jamey@Tellusservices

Project Name: Jalapeño
Project #: COEN #118[illegible]5
Project Loc: Lea, CO, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES

(lab use only)
ORDER #: 3007001

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total #. of Containers	Preservation & # of Containers: Ice	HNO3	HCl	H2SO4	NaOH	Na2S2O3	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge GW=Groundwater S=Soil/Solid NP=Non-Potable Specify Other	Analyze For: TCLP: TOTAL: TPH: TX 1005	TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA - 8021	TPH- EPA - 8015	Chlorides EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
32	BH-252@1.5	1.5	1.5	12-4-23	8:24		1									5				X	X	X		
33	BH-253@1.5	1.5	1.5	12-4-23	8:29																			
34	BH-254@1.5	1.5	1.5	12-4-23	8:38																			
35	BH-255@1.5	1.5	1.5	12-4-23	8:41																			
36	BH-256@1.5	1.5	1.5	12-4-23	8:44																			
37	BH-257@1.5	1.5	1.5	12-4-23	8:45																			
38	BH-258@1.5	1.5	1.5	12-4-23	8:47																			
39	BH-259@1.5	1.5	1.5	12-4-23	8:49																			
40	BH-260@1.5	1.5	1.5	12-4-23	8:52																			
41	BH-261@1.5	1.5	1.5	12-4-23	8:53																			

Special Instructions: Report TPH-in-C6-C12 / C12-C28 / C28-C35 fractions aswell as total TPH
same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
[signature]	12/7/23	8:46			
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL: [signature]	12/7/23	8:46

Laboratory Comments:
Sample Containers Intact? Y
VOCs Free of Headspace? Y
Labels on container(s) Y
Custody seals on container(s) N
Custody seals on cooler(s) N
Sample Hand Delivered N
by Sampler/Client Rep. ? N
by Courier? UPS DHL FedEx Lone Star
Temperature Upon Receipt:
Received: 5.1 °C Thermometer: NJ
Adjusted: °C Factor: 1.0

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21

Page 1 of 1

Received by OCD: 1/30/2024 8:36:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

Page 688 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Janey Fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: Midland TX 79705
Telephone No: 432-557-0934 **Fax No:**
Sampler Signature: Jose Belloc

Project Name: Jalapeño
Project #: COEV # 11845
Project Loc: Lea, CO, NM
PO #:
Report Format: ☐ Standard ☐ TRRP ☐ NPDES
e-mail: Janey@Tellusservices

(lab use only)
ORDER #: 3L07001

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total #. of Containers	Preservation & # of Containers: Ice	HNO_3	HCl	H_2SO_4	NaOH	$Na_2S_2O_3$	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge / GW = Groundwater S=Soil/Solid / NP=Non-Potable Specify Other	Analyze For: TCLP: TPH: TX 1005 TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA - 8021	TPH- EPA - 8015	Chlorides EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
42	BH-262@1.5	1.5	1.5	12-4-23	8:55		1									S				X	X	X		
43	BH-263@1.5	1.5	1.5	12-4-23	8:56		1																	
44	BH-288@1ft	1ft	1ft	12-4-23	9:43		1																	
45	BH-289@1ft	1ft	1ft	12-4-23	9:44																			
46	BH-290@1ft	1ft	1ft	12-4-23	9:47																			
47	BH-291@1ft	1ft	1ft	12-4-23	9:50																			
48	BH-292@1ft	1ft	1ft	12-4-23	9:51																			
49	BH-293@1ft	1ft	1ft	12-4-23	9:59																			
50	BH-294@1ft	1ft	1ft	12-4-23	10:03																			
51	BH-295@1ft	1ft	1ft	12-4-23	10:04																			

Special Instructions: Report TPH-in-C6-C12 / C12-C28 / C28-C35 fractions aswell as total TPH
same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
Jose Belloc	12/14/23	8:46			
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL:	Date	Time
			Mona Bledsoe	12/14/23	8:46

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N
by Sampler/Client Rep. ?		
by Courier? UPS DHL FedEx Lone Star		

Temperature Upon Receipt:
Received: 5.1 °C Thermometor: NCF3
Adjusted: °C Factor:

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21

Page 1 of 1

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

Page 689 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934 **Fax No:**
Sampler Signature: Jose Belloc

Project Name: Jalapeño
Project #: COEU # 11845
Project Loc: Lea, CO, NM
PO #:
Report Format: ☐ Standard ☐ TRRP ☐ NPDES
e-mail: Jamey@Tellusservices

(lab use only)
ORDER #: 3L07001

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total #. of Containers	Preservation & # of Containers: Ice	HNO_3	HCl	H_2SO_4	NaOH	$Na_2S_2O_3$	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge	GW = Groundwater S=Soil/Solid	NP=Non-Potable Specify Other	Analyze For: TPH: TX 1005 TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA - 8021	TPH- EPA - 8015	Chlorides EPA-300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
52	BH-264 @ 1.5	1.5	1.5	12-4-23	8:59		1									S						X	X	X		
53	BH-265 @ 1.5	1.5	1.5	12-4-23	9:03																					
54	BH-266 @ 1.5	1.5	1.5	12-4-23	9:05																					
55	BH-267 @ 1.5	1.5	1.5	12-4-23	9:07																					
56	BH-268 @ 1.5	1.5	1.5	12-4-23	9:08																					
57	BH-269 @ 1.5	1.5	1.5	12-4-23	9:10																					
58	BH-270 @ 1.5	1.5	1.5	12-4-23	9:11																					
59	BH-271 @ 1.5	1.5	1.5	12-4-23	9:13																					
60	BH-272 @ 1.5	1.5	1.5	12-4-23	9:15																					
61	BH-273 @ 1.5	1.5	1.5	12-4-23	9:17		1																			

Special Instructions: Report TPH - in - C6 - C12 & C12 - C28 & C28 - C35 fractions aswell as total TPH
same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
Jose Belloc	12/7/23	8:46			
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL:	Date	Time
			Drusa Bledsoe	12/7/23	8:46

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N
by Sampler/Client Rep. ?	Y	N

by Courier? UPS DHL FedEx Lone Star

Temperature Upon Receipt:
Received: 5.1 °C Thermometer: WCF
Adjusted: °C Factor: L3

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

Page 690 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey Fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934 **Fax No:** _____
Sampler Signature: Jose Belloc **e-mail:** Jamey@Tellusservices

Project Name: Jalapeño
Project #: CDEV # 11845
Project Loc: Lea, CO, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES

(lab use only) **ORDER #:** 3207001

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total #. of Containers	Preservation & # of Containers: Ice	HNO3	HCl	H2SO4	NaOH	Na2S2O3	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge	GW = Groundwater S=Soil/Solid	NP=Non-Potable Specify Other	Analyze For: TCLP: TPH: TX 1005	TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA - 8021	TPH- EPA - 8015	Chlorides EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
62	BH-274@1.5	1.5	1.5	12-4-23	9:18		1									S							x	x	x		
63	BH-275@1.5	1.5	1.5	12-4-23	9:19																						
64	BH-276@1.5	1.5	1.5	12-4-23	9:21																						
65	BH-277@1.5	1.5	1.5	12-4-23	9:23																						
66	BH-278@1.5	1.5	1.5	12-4-23	9:24																						
67	BH-279@1.5	1.5	1.5	12-4-23	9:25																						
68	BH-280@1.5	1.5	1.5	12-4-23	9:30																						
69	BH-281@1.5	1.5	1.5	12-4-23	9:31																						
70	BH-282@1.5	1.5	1.5	12-4-23	9:32																						
71	BH-283@1Ft	1Ft	1Ft	12-4-23	9:33																						

Special Instructions: Report TPH- in-CB-C12 7 C12-C28 7 C28-C35 fractions aswell as total TPH
same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
Jose Belloc	12/1/23	8:44			
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL: Tessa Bledsoe	Date 12/1/23	Time 8:40

Laboratory Comments:
Sample Containers Intact? Y N
VOCs Free of Headspace? Y N
Labels on container(s) Y N
Custody seals on container(s) Y N
Custody seals on cooler(s) Y N
Sample Hand Delivered Y N
by Sampler/Client Rep. ? Y N
by Courier? UPS DHL FedEx Lone Star
Temperature Upon Receipt:
Received: 5.1 °C Thermometor: NF3
Adjusted: °C Factor:

Received by OCD: 9/20/2024 8:26:56 AM
Released to Imaging: 12/18/2024 7:45:13 AM

Page 691 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934 **Fax No:** _____
Sampler Signature: Jose Belloc **e-mail:** Jamey@Tellusservices

Project Name: Jalapeño
Project #: CDEV # 11845
Project Loc: Lea, CO, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES

(lab use only) **ORDER #:** 3107001

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total #. of Containers	Preservation & # of Containers: Ice	HNO3	HCl	H2SO4	NaOH	Na2S2O3	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge	GW = Groundwater S=Soil/Solid	NP=Non-Potable Specify Other	Analyze For: TCLP: TPH: TX 1005	TX 1006	TOTAL: Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA - 8021	TPH- EPA - 8015	Chlorides EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
72	BH-284@ 1ft	1ft	1ft	12-4-23	9:34		1									S							X	X	X		
73	BH-285@ 1ft	1ft	1ft	12-4-23	9:35																						
74	BH-286@ 1ft	1ft	1ft	12-4-23	9:37																						
75	BH-287@ 1ft	1ft	1ft	12-4-23	9:38																						

Special Instructions: Report TPH- in- C6-C12 C12-C28 C28-C35 fractions aswell as total TPH
same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
Jose Belloc	12/7/23	8:46			
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL: Tina Bledsoe	12/7/23	8:46

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N
by Sampler/Client Rep. ?	Y	N

by Courier? UPS DHL FedEx Lone Star

Temperature Upon Receipt:
Received: 6.1 °C Thermometor: IR #3
Adjusted: °C Factor:

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21

Page 1 of 1

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

Page 692 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934 **Fax No:** _____
Sampler Signature: Jose Belloc **e-mail:** Jamey@Tellusservices

Project Name: Jalapeño
Project #: CDEV # 11845
Project Loc: Lea, CO, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES

(lab use only)
ORDER #: TB ~~307~~ 3407001

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total # of Containers	Preservation & # of Containers: Ice	HNO_3	HCl	H_2SO_4	NaOH	$Na_2S_2O_3$	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge	GW = Groundwater S=Soil/Solid	NP=Non-Potable Specify Other	Analyze For: TPH: TX 1005 TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX 8021	TPH-EPA-8015	Chlorides EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
76	BH-296@ 1Ft	1Ft	1Ft	12-4-23	10:06		1									S						X	X	X		
77	BH-297@ 1Ft	1Ft	1Ft	12-4-23	10:07																					
78	BH-298@ 1Ft	1Ft	1Ft	12-4-23	10:08																					
79	BH-299@ 1Ft	1Ft	1Ft	12-4-23	10:15																					
80	BH-300@ 1Ft	1Ft	1Ft	12-4-23	10:17																					
81	BH-301@ 1Ft	1Ft	1Ft	12-4-23	10:21																					
82	BH-302@ 1Ft	1Ft	1Ft	12-4-23	10:22																					
83	BH-303@ 1Ft	1Ft	1Ft	12-4-23	10:23																					
84	BH-304@ 1Ft	1Ft	1Ft	12-4-23	10:24																					
85	BH-305@ 1Ft	1Ft	1Ft	12-4-23	10:25																					

Special Instructions: Report TPH-in-C6-C12 & C12-C28 & C28-C35 fractions aswell as total TPH
same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
Jose Belloc	12/7/23	8:46			
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL:	Date	Time
			Jessica Bledsoe	12/7/23	8:46

Laboratory Comments:
Sample Containers Intact? Y N
VOCs Free of Headspace? Y N
Labels on container(s) Y N
Custody seals on container(s) Y N
Custody seals on cooler(s) Y N
Sample Hand Delivered by Sampler/Client Rep. ? Y N
by Courier? UPS DHL FedEx Lone Star
Temperature Upon Receipt:
Received: 5.1 °C Thermometer: NCF 03
Adjusted: °C Factor:

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21 Page 1 of 1

Received by OCD: 9/20/2024 8:26:56 AM
Released to Imaging: 12/18/2024 7:45:13 AM

Page 693 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Janey fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934 **Fax No:**
Sampler Signature: Jose Belloc

Project Name: Jalapeño
Project #: COEU # 11845
Project Loc: Lea, CO, NM
PO #:
Report Format: ☐ Standard ☐ TRRP ☐ NPDES
e-mail: Janey@Tellusservices

(lab use only) **ORDER #:** 8L07001

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total #. of Containers	Preservation & # of Containers: Ice	HNO_3	HCl	H_2SO_4	NaOH	$Na_2S_2O_3$	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge	GW = Groundwater S=Soil/Solid	NP=Non-Potable Specify Other	Analyze For: TPH: TX 1005 TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA - 8021	TPH- EPA - 8015	Chlorides EPA-300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
86	BH-306@1Ft	1Ft	1Ft	12-4-23	10:27		1									S						X	X	Y		
87	BH-307@1Ft	1Ft	1Ft	12-4-23	10:28		1									S						X	X	Y		
88	BH-308@1Ft	1Ft	1Ft	12-4-23	10:31		1									S						X	X	Y		
89	BH-309@1Ft	1Ft	1Ft	12-4-23	10:42		1									S						X	X	X		
90	BH-310@1Ft	1Ft	1Ft	12-4-23	10:48		1									S						X	X	X		

Special Instructions: Report TPH-in-C6-C12 C12-C28 & C28-C35 fractions aswell as total TPH
same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
[signature]	12/7/23	8:46			
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL: [signature]	12/7/23	8:46

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?		N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N
by Sampler/Client Rep. ?		N

by Courier? UPS DHL FedEx Lone Star

Temperature Upon Receipt:
Received: 5.1 °C Thermometer: NCF 23
Adjusted: °C Factor:

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21

Page 1 of 2

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

PERMIAN BASIN
ENVIRONMENTAL LAB, LP
1400 Rankin Hwy
Midland, TX 79701

PBELAB

Analytical Report

Prepared for:

Jamey Fowler

Tellus Consulting, LLC

4000 North Big Spring Street Suite 109

Midland, TX 79705

Project: Jalapeno

Project Number: CDEV #11845

Location: Lea County, NM

Lab Order Number: 3L07003

NELAP ACCREDITED TNI LABORATORY

Current Certification

Report Date: 12/18/23

Tellus Consulting, LLC
4000 North Big Spring Street Suite 109
Midland TX, 79705

Project: Jalapeno
Project Number: CDEV #11845
Project Manager: Jamey Fowler

ANALYTICAL REPORT FOR SAMPLES

Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
BH-311 @ 1FT	3L07003-01	Soil	12/04/23 10:55	12-07-2023 08:46
BH-312 @ 1FT	3L07003-02	Soil	12/04/23 10:58	12-07-2023 08:46
BH-313 @ 1FT	3L07003-03	Soil	12/04/23 11:01	12-07-2023 08:46
BH-314 @ 1FT	3L07003-04	Soil	12/04/23 11:03	12-07-2023 08:46
BH-315 @ 1FT	3L07003-05	Soil	12/04/23 11:08	12-07-2023 08:46
BH-316 @ 1FT	3L07003-06	Soil	12/04/23 11:10	12-07-2023 08:46
BH-317 @ 1FT	3L07003-07	Soil	12/04/23 11:15	12-07-2023 08:46
BH-318 @ 1FT	3L07003-08	Soil	12/04/23 11:16	12-07-2023 08:46
BH-319 @ 1FT	3L07003-09	Soil	12/04/23 11:18	12-07-2023 08:46
BH-320 @ 1FT	3L07003-10	Soil	12/04/23 11:21	12-07-2023 08:46
BH-321 @ 1FT	3L07003-11	Soil	12/04/23 11:22	12-07-2023 08:46
BH-322 @ 1FT	3L07003-12	Soil	12/04/23 11:25	12-07-2023 08:46
BH-323 @ 1FT	3L07003-13	Soil	12/04/23 11:28	12-07-2023 08:46
BH-324 @ 1FT	3L07003-14	Soil	12/04/23 11:29	12-07-2023 08:46
BH-325 @ 1FT	3L07003-15	Soil	12/04/23 11:30	12-07-2023 08:46
BH-326 @ 1FT	3L07003-16	Soil	12/04/23 11:31	12-07-2023 08:46
BH-327 @ 1FT	3L07003-17	Soil	12/04/23 11:32	12-07-2023 08:46
BH-328 @ 1FT	3L07003-18	Soil	12/04/23 11:35	12-07-2023 08:46
BH-329 @ 1FT	3L07003-19	Soil	12/04/23 11:36	12-07-2023 08:46
BH-330 @ 1FT	3L07003-20	Soil	12/04/23 11:38	12-07-2023 08:46
BH-331 @ 1FT	3L07003-21	Soil	12/04/23 12:01	12-07-2023 08:46
BH-332 @ 1FT	3L07003-22	Soil	12/04/23 12:03	12-07-2023 08:46
BH-333 @ 1FT	3L07003-23	Soil	12/04/23 12:04	12-07-2023 08:46
BH-334 @ 1FT	3L07003-24	Soil	12/04/23 12:07	12-07-2023 08:46

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-311 @ 1FT

3L07003-01 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00102	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 07:27	EPA 8021B	
Toluene	ND	0.00102	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 07:27	EPA 8021B	
Ethylbenzene	ND	0.00102	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 07:27	EPA 8021B	
Xylene (p/m)	ND	0.00204	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 07:27	EPA 8021B	
Xylene (o)	ND	0.00102	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 07:27	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 07:27*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*92.9 %*	*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 07:27*	*EPA 8021B*	
Xylenes (total)	ND	0.00204	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 07:27	EPA 8021B	
Total BTEX	ND	0.00102	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 07:27	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.5	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 18:26	TPH 8015M	
>C12-C28	ND	25.5	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 18:26	TPH 8015M	
>C28-C35	ND	25.5	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 18:26	TPH 8015M	
Surrogate: 1-Chlorooctane		*84.0 %*	*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 18:26*	*TPH 8015M*	
Surrogate: o-Terphenyl		*99.5 %*	*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 18:26*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.5	mg/kg dry	1	[CALC]	12/11/23 10:09	12/11/23 18:26	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**15.3**	1.02	mg/kg dry	1	P3L1219	12/12/23 15:51	12/12/23 21:36	EPA 300.0	
% Moisture	**2.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-312 @ 1FT

3L07003-02 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00128	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 07:52	EPA 8021B	
Toluene	ND	0.00128	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 07:52	EPA 8021B	
Ethylbenzene	ND	0.00128	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 07:52	EPA 8021B	
Xylene (p/m)	ND	0.00256	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 07:52	EPA 8021B	
Xylene (o)	ND	0.00128	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 07:52	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*92.5 %*	*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 07:52*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 07:52*	*EPA 8021B*	
Xylenes (total)	ND	0.00256	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 07:52	EPA 8021B	
Total BTEX	ND	0.00128	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 07:52	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	32.1	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 18:50	TPH 8015M	
>C12-C28	ND	32.1	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 18:50	TPH 8015M	
>C28-C35	ND	32.1	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 18:50	TPH 8015M	
Surrogate: 1-Chlorooctane		*91.5 %*	*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 18:50*	*TPH 8015M*	
Surrogate: o-Terphenyl		*106 %*	*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 18:50*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	32.1	mg/kg dry	1	[CALC]	12/11/23 10:09	12/11/23 18:50	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**24.6**	1.28	mg/kg dry	1	P3L1219	12/12/23 15:51	12/12/23 21:51	EPA 300.0	
% Moisture	**22.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-313 @ 1FT

3L07003-03 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00122	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 08:16	EPA 8021B	
Toluene	ND	0.00122	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 08:16	EPA 8021B	
Ethylbenzene	ND	0.00122	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 08:16	EPA 8021B	
Xylene (p/m)	ND	0.00244	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 08:16	EPA 8021B	
Xylene (o)	ND	0.00122	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 08:16	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 08:16*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*93.0 %*	*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 08:16*	*EPA 8021B*	
Xylenes (total)	ND	0.00244	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 08:16	EPA 8021B	
Total BTEX	ND	0.00122	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 08:16	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	30.5	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 19:13	TPH 8015M	
>C12-C28	ND	30.5	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 19:13	TPH 8015M	
>C28-C35	ND	30.5	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 19:13	TPH 8015M	
Surrogate: 1-Chlorooctane		*80.0 %*	*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 19:13*	*TPH 8015M*	
Surrogate: o-Terphenyl		*95.6 %*	*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 19:13*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	30.5	mg/kg dry	1	[CALC]	12/11/23 10:09	12/11/23 19:13	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**29.9**	1.22	mg/kg dry	1	P3L1219	12/12/23 15:51	12/12/23 22:05	EPA 300.0	
% Moisture	**18.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-314 @ 1FT

3L07003-04 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00102	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 08:40	EPA 8021B	
Toluene	ND	0.00102	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 08:40	EPA 8021B	
Ethylbenzene	ND	0.00102	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 08:40	EPA 8021B	
Xylene (p/m)	ND	0.00204	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 08:40	EPA 8021B	
Xylene (o)	ND	0.00102	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 08:40	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 08:40*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*92.6 %*	*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 08:40*	*EPA 8021B*	
Xylenes (total)	ND	0.00204	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 08:40	EPA 8021B	
Total BTEX	ND	0.00102	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 08:40	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.5	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 19:36	TPH 8015M	
>C12-C28	ND	25.5	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 19:36	TPH 8015M	
>C28-C35	ND	25.5	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 19:36	TPH 8015M	
Surrogate: 1-Chlorooctane		*85.9 %*	*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 19:36*	*TPH 8015M*	
Surrogate: o-Terphenyl		*101 %*	*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 19:36*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.5	mg/kg dry	1	[CALC]	12/11/23 10:09	12/11/23 19:36	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**18.6**	1.02	mg/kg dry	1	P3L1219	12/12/23 15:51	12/12/23 22:21	EPA 300.0	
% Moisture	**2.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-315 @ 1FT

3L07003-05 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 09:05	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 09:05	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 09:05	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 09:05	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 09:05	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*91.7 %*	*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 09:05*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*118 %*	*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 09:05*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 09:05	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 09:05	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 19:59	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 19:59	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 19:59	TPH 8015M	
Surrogate: 1-Chlorooctane		*85.1 %*	*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 19:59*	*TPH 8015M*	
Surrogate: o-Terphenyl		*99.6 %*	*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 19:59*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/11/23 10:09	12/11/23 19:59	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**14.8**	1.03	mg/kg dry	1	P3L1219	12/12/23 15:51	12/12/23 22:35	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-316 @ 1FT

3L07003-06 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 09:29	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 09:29	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 09:29	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 09:29	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 09:29	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*118 %*	*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 09:29*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*92.4 %*	*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 09:29*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 09:29	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 09:29	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 20:23	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 20:23	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 20:23	TPH 8015M	
Surrogate: 1-Chlorooctane		*82.0 %*	*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 20:23*	*TPH 8015M*	
Surrogate: o-Terphenyl		*96.7 %*	*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 20:23*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/11/23 10:09	12/11/23 20:23	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**18.4**	1.03	mg/kg dry	1	P3L1219	12/12/23 15:51	12/12/23 23:20	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-317 @ 1FT

3L07003-07 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 10:42	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 10:42	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 10:42	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 10:42	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 10:42	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 10:42*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*92.3 %*	*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 10:42*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 10:42	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 10:42	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 20:46	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 20:46	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 20:46	TPH 8015M	
Surrogate: 1-Chlorooctane		*81.6 %*	*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 20:46*	*TPH 8015M*	
Surrogate: o-Terphenyl		*96.7 %*	*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 20:46*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/11/23 10:09	12/11/23 20:46	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**26.5**	1.03	mg/kg dry	1	P3L1219	12/12/23 15:51	12/13/23 00:06	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-318 @ 1FT

3L07003-08 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00102	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 11:07	EPA 8021B	
Toluene	ND	0.00102	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 11:07	EPA 8021B	
Ethylbenzene	ND	0.00102	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 11:07	EPA 8021B	
Xylene (p/m)	ND	0.00204	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 11:07	EPA 8021B	
Xylene (o)	ND	0.00102	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 11:07	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*118 %*	*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 11:07*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*92.0 %*	*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 11:07*	*EPA 8021B*	
Xylenes (total)	ND	0.00204	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 11:07	EPA 8021B	
Total BTEX	ND	0.00102	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 11:07	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.5	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 21:09	TPH 8015M	
>C12-C28	ND	25.5	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 21:09	TPH 8015M	
>C28-C35	ND	25.5	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 21:09	TPH 8015M	
Surrogate: 1-Chlorooctane		*83.3 %*	*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 21:09*	*TPH 8015M*	
Surrogate: o-Terphenyl		*99.7 %*	*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 21:09*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.5	mg/kg dry	1	[CALC]	12/11/23 10:09	12/11/23 21:09	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**20.0**	1.02	mg/kg dry	1	P3L1219	12/12/23 15:51	12/13/23 00:20	EPA 300.0	
% Moisture	**2.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-319 @ 1FT

3L07003-09 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 11:31	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 11:31	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 11:31	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 11:31	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 11:31	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*91.9 %*	*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 11:31*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*118 %*	*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 11:31*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 11:31	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 11:31	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 21:32	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 21:32	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 21:32	TPH 8015M	
Surrogate: 1-Chlorooctane		*89.4 %*	*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 21:32*	*TPH 8015M*	
Surrogate: o-Terphenyl		*108 %*	*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 21:32*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/11/23 10:09	12/11/23 21:32	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**27.6**	1.04	mg/kg dry	1	P3L1219	12/12/23 15:51	12/13/23 00:36	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-320 @ 1FT

3L07003-10 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 11:56	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 11:56	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 11:56	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 11:56	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 11:56	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 11:56*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*92.0 %*	*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 11:56*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 11:56	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 11:56	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 21:55	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 21:55	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L1108	12/11/23 10:09	12/11/23 21:55	TPH 8015M	
Surrogate: 1-Chlorooctane		*81.1 %*	*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 21:55*	*TPH 8015M*	
Surrogate: o-Terphenyl		*99.6 %*	*70-130*		*P3L1108*	*12/11/23 10:09*	*12/11/23 21:55*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/11/23 10:09	12/11/23 21:55	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**23.8**	1.04	mg/kg dry	1	P3L1219	12/12/23 15:51	12/13/23 00:50	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-321 @ 1FT

3L07003-11 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 12:20	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 12:20	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 12:20	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 12:20	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 12:20	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*91.8 %*	*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 12:20*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*118 %*	*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 12:20*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 12:20	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 12:20	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 00:58	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 00:58	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 00:58	TPH 8015M	
Surrogate: 1-Chlorooctane		*82.1 %*	*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 00:58*	*TPH 8015M*	
Surrogate: o-Terphenyl		*98.9 %*	*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 00:58*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/11/23 10:11	12/12/23 00:58	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**23.8**	1.03	mg/kg dry	1	P3L1219	12/12/23 15:51	12/13/23 01:05	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-322 @ 1FT

3L07003-12 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00102	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 12:45	EPA 8021B	
Toluene	ND	0.00102	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 12:45	EPA 8021B	
Ethylbenzene	ND	0.00102	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 12:45	EPA 8021B	
Xylene (p/m)	ND	0.00204	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 12:45	EPA 8021B	
Xylene (o)	ND	0.00102	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 12:45	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 12:45*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*91.7 %*	*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 12:45*	*EPA 8021B*	
Xylenes (total)	ND	0.00204	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 12:45	EPA 8021B	
Total BTEX	ND	0.00102	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 12:45	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.5	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 01:21	TPH 8015M	
>C12-C28	ND	25.5	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 01:21	TPH 8015M	
>C28-C35	ND	25.5	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 01:21	TPH 8015M	
Surrogate: 1-Chlorooctane		*75.1 %*	*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 01:21*	*TPH 8015M*	
Surrogate: o-Terphenyl		*89.5 %*	*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 01:21*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.5	mg/kg dry	1	[CALC]	12/11/23 10:11	12/12/23 01:21	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**25.7**	1.02	mg/kg dry	1	P3L1219	12/12/23 15:51	12/13/23 01:19	EPA 300.0	
% Moisture	**2.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-323 @ 1FT

3L07003-13 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00102	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 13:10	EPA 8021B	
Toluene	ND	0.00102	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 13:10	EPA 8021B	
Ethylbenzene	ND	0.00102	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 13:10	EPA 8021B	
Xylene (p/m)	ND	0.00204	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 13:10	EPA 8021B	
Xylene (o)	ND	0.00102	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 13:10	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 13:10*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*91.6 %*	*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 13:10*	*EPA 8021B*	
Xylenes (total)	ND	0.00204	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 13:10	EPA 8021B	
Total BTEX	ND	0.00102	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 13:10	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.5	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 01:44	TPH 8015M	
>C12-C28	ND	25.5	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 01:44	TPH 8015M	
>C28-C35	ND	25.5	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 01:44	TPH 8015M	
Surrogate: 1-Chlorooctane		*89.0 %*	*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 01:44*	*TPH 8015M*	
Surrogate: o-Terphenyl		*104 %*	*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 01:44*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.5	mg/kg dry	1	[CALC]	12/11/23 10:11	12/12/23 01:44	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**19.2**	1.02	mg/kg dry	1	P3L1219	12/12/23 15:51	12/13/23 01:35	EPA 300.0	
% Moisture	**2.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-324 @ 1FT

3L07003-14 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00102	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 13:34	EPA 8021B	
Toluene	ND	0.00102	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 13:34	EPA 8021B	
Ethylbenzene	ND	0.00102	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 13:34	EPA 8021B	
Xylene (p/m)	ND	0.00204	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 13:34	EPA 8021B	
Xylene (o)	ND	0.00102	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 13:34	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*91.7 %*	*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 13:34*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 13:34*	*EPA 8021B*	
Xylenes (total)	ND	0.00204	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 13:34	EPA 8021B	
Total BTEX	ND	0.00102	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 13:34	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.5	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 11:55	TPH 8015M	
>C12-C28	ND	25.5	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 11:55	TPH 8015M	
>C28-C35	ND	25.5	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 11:55	TPH 8015M	
Surrogate: 1-Chlorooctane		*150 %*	*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 11:55*	*TPH 8015M*	*S-GC1*
Surrogate: o-Terphenyl		*162 %*	*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 11:55*	*TPH 8015M*	*S-GC1*
Total Petroleum Hydrocarbon C6-C35	ND	25.5	mg/kg dry	1	[CALC]	12/11/23 10:11	12/12/23 11:55	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**20.9**	1.02	mg/kg dry	1	P3L1219	12/12/23 15:51	12/13/23 01:50	EPA 300.0	
% Moisture	**2.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-325 @ 1FT

3L07003-15 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 13:59	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 13:59	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 13:59	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 13:59	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 13:59	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*91.5 %*	*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 13:59*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*119 %*	*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 13:59*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 13:59	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 13:59	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 02:31	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 02:31	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 02:31	TPH 8015M	
Surrogate: 1-Chlorooctane		*83.3 %*	*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 02:31*	*TPH 8015M*	
Surrogate: o-Terphenyl		*100 %*	*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 02:31*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/11/23 10:11	12/12/23 02:31	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**26.0**	1.04	mg/kg dry	1	P3L1308	12/13/23 16:07	12/14/23 00:55	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-326 @ 1FT

3L07003-16 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 14:23	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 14:23	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 14:23	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 14:23	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1402	12/14/23 09:23	12/15/23 14:23	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*118 %*	*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 14:23*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*91.8 %*	*80-120*		*P3L1402*	*12/14/23 09:23*	*12/15/23 14:23*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 14:23	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/14/23 09:23	12/15/23 14:23	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 02:53	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 02:53	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 02:53	TPH 8015M	
Surrogate: 1-Chlorooctane		*84.2 %*	*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 02:53*	*TPH 8015M*	
Surrogate: o-Terphenyl		*99.4 %*	*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 02:53*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/11/23 10:11	12/12/23 02:53	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**49.4**	1.04	mg/kg dry	1	P3L1308	12/13/23 16:07	12/14/23 01:39	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-327 @ 1FT

3L07003-17 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 18:57	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 18:57	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 18:57	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 18:57	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 18:57	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*92.3 %*		*80-120*		*P3L1506*	*12/15/23 13:51*	*12/15/23 18:57*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*118 %*		*80-120*		*P3L1506*	*12/15/23 13:51*	*12/15/23 18:57*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/15/23 13:51	12/15/23 18:57	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/15/23 13:51	12/15/23 18:57	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 03:17	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 03:17	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 03:17	TPH 8015M	
Surrogate: 1-Chlorooctane	*82.4 %*		*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 03:17*	*TPH 8015M*	
Surrogate: o-Terphenyl	*96.7 %*		*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 03:17*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/11/23 10:11	12/12/23 03:17	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**20.3**	1.03	mg/kg dry	1	P3L1308	12/13/23 16:07	12/14/23 01:54	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-328 @ 1FT

3L07003-18 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 19:21	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 19:21	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 19:21	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 19:21	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 19:21	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L1506*	*12/15/23 13:51*	*12/15/23 19:21*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*92.5 %*	*80-120*		*P3L1506*	*12/15/23 13:51*	*12/15/23 19:21*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/15/23 13:51	12/15/23 19:21	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/15/23 13:51	12/15/23 19:21	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 03:40	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 03:40	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 03:40	TPH 8015M	
Surrogate: 1-Chlorooctane		*85.3 %*	*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 03:40*	*TPH 8015M*	
Surrogate: o-Terphenyl		*101 %*	*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 03:40*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/11/23 10:11	12/12/23 03:40	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**63.2**	1.04	mg/kg dry	1	P3L1308	12/13/23 16:07	12/14/23 02:10	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-329 @ 1FT

3L07003-19 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00102	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 19:46	EPA 8021B	
Toluene	ND	0.00102	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 19:46	EPA 8021B	
Ethylbenzene	ND	0.00102	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 19:46	EPA 8021B	
Xylene (p/m)	ND	0.00204	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 19:46	EPA 8021B	
Xylene (o)	ND	0.00102	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 19:46	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*91.6 %*	*80-120*		*P3L1506*	*12/15/23 13:51*	*12/15/23 19:46*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L1506*	*12/15/23 13:51*	*12/15/23 19:46*	*EPA 8021B*	
Xylenes (total)	ND	0.00204	mg/kg dry	1	[CALC]	12/15/23 13:51	12/15/23 19:46	EPA 8021B	
Total BTEX	ND	0.00102	mg/kg dry	1	[CALC]	12/15/23 13:51	12/15/23 19:46	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.5	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 12:18	TPH 8015M	
>C12-C28	ND	25.5	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 12:18	TPH 8015M	
>C28-C35	ND	25.5	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 12:18	TPH 8015M	
Surrogate: 1-Chlorooctane		*136 %*	*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 12:18*	*TPH 8015M*	*S-GC1*
Surrogate: o-Terphenyl		*178 %*	*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 12:18*	*TPH 8015M*	*S-GC1*
Total Petroleum Hydrocarbon C6-C35	ND	25.5	mg/kg dry	1	[CALC]	12/11/23 10:11	12/12/23 12:18	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**28.0**	1.02	mg/kg dry	1	P3L1308	12/13/23 16:07	12/14/23 02:24	EPA 300.0	
% Moisture	**2.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-330 @ 1FT

3L07003-20 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 20:10	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 20:10	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 20:10	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 20:10	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 20:10	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*116 %*	*80-120*		*P3L1506*	*12/15/23 13:51*	*12/15/23 20:10*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*92.5 %*	*80-120*		*P3L1506*	*12/15/23 13:51*	*12/15/23 20:10*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/15/23 13:51	12/15/23 20:10	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/15/23 13:51	12/15/23 20:10	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 04:26	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 04:26	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 04:26	TPH 8015M	
Surrogate: 1-Chlorooctane		*85.7 %*	*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 04:26*	*TPH 8015M*	
Surrogate: o-Terphenyl		*103 %*	*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 04:26*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/11/23 10:11	12/12/23 04:26	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**25.6**	1.04	mg/kg dry	1	P3L1308	12/13/23 16:07	12/14/23 02:39	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-331 @ 1FT

3L07003-21 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 20:34	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 20:34	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 20:34	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 20:34	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 20:34	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*92.4 %*	*80-120*		*P3L1506*	*12/15/23 13:51*	*12/15/23 20:34*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*118 %*	*80-120*		*P3L1506*	*12/15/23 13:51*	*12/15/23 20:34*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/15/23 13:51	12/15/23 20:34	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/15/23 13:51	12/15/23 20:34	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 05:36	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 05:36	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 05:36	TPH 8015M	
Surrogate: 1-Chlorooctane		*80.4 %*	*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 05:36*	*TPH 8015M*	
Surrogate: o-Terphenyl		*94.4 %*	*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 05:36*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/11/23 10:11	12/12/23 05:36	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**40.7**	1.04	mg/kg dry	1	P3L1308	12/13/23 16:07	12/14/23 02:54	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-332 @ 1FT

3L07003-22 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 20:59	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 20:59	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 20:59	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 20:59	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 20:59	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L1506*	*12/15/23 13:51*	*12/15/23 20:59*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*92.5 %*	*80-120*		*P3L1506*	*12/15/23 13:51*	*12/15/23 20:59*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/15/23 13:51	12/15/23 20:59	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/15/23 13:51	12/15/23 20:59	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 05:58	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 05:58	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 05:58	TPH 8015M	
Surrogate: 1-Chlorooctane		*89.6 %*	*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 05:58*	*TPH 8015M*	
Surrogate: o-Terphenyl		*107 %*	*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 05:58*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/11/23 10:11	12/12/23 05:58	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**18.5**	1.03	mg/kg dry	1	P3L1308	12/13/23 16:07	12/14/23 03:08	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-333 @ 1FT

3L07003-23 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 21:23	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 21:23	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 21:23	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 21:23	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 21:23	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L1506*	*12/15/23 13:51*	*12/15/23 21:23*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*92.6 %*	*80-120*		*P3L1506*	*12/15/23 13:51*	*12/15/23 21:23*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/15/23 13:51	12/15/23 21:23	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/15/23 13:51	12/15/23 21:23	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 06:22	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 06:22	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 06:22	TPH 8015M	
Surrogate: 1-Chlorooctane		*84.4 %*	*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 06:22*	*TPH 8015M*	
Surrogate: o-Terphenyl		*101 %*	*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 06:22*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/11/23 10:11	12/12/23 06:22	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**38.5**	1.04	mg/kg dry	1	P3L1308	12/13/23 16:07	12/14/23 03:24	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-334 @ 1FT

3L07003-24 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 21:47	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 21:47	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 21:47	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 21:47	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 21:47	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*91.9 %*	*80-120*		*P3L1506*	*12/15/23 13:51*	*12/15/23 21:47*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P3L1506*	*12/15/23 13:51*	*12/15/23 21:47*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/15/23 13:51	12/15/23 21:47	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/15/23 13:51	12/15/23 21:47	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 06:45	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 06:45	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 06:45	TPH 8015M	
Surrogate: 1-Chlorooctane		*75.6 %*	*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 06:45*	*TPH 8015M*	
Surrogate: o-Terphenyl		*93.7 %*	*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 06:45*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/11/23 10:11	12/12/23 06:45	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**37.8**	1.04	mg/kg dry	1	P3L1308	12/13/23 16:07	12/14/23 03:39	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1402 - * DEFAULT PREP *** **										
Blank (P3L1402-BLK1)				Prepared: 12/14/23 Analyzed: 12/15/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 1,4-Difluorobenzene	*0.111*		"	*0.120*		*92.3*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.140*		"	*0.120*		*117*	*80-120*			
LCS (P3L1402-BS1)				Prepared: 12/14/23 Analyzed: 12/15/23						
Benzene	0.114	0.00100	mg/kg	0.100		114	80-120			
Toluene	0.103	0.00100	"	0.100		103	80-120			
Ethylbenzene	0.110	0.00100	"	0.100		110	80-120			
Xylene (p/m)	0.210	0.00200	"	0.200		105	80-120			
Xylene (o)	0.0966	0.00100	"	0.100		96.6	80-120			
Surrogate: 4-Bromofluorobenzene	*0.133*		"	*0.120*		*111*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.112*		"	*0.120*		*93.4*	*80-120*			
LCS Dup (P3L1402-BSD1)				Prepared: 12/14/23 Analyzed: 12/15/23						
Benzene	0.114	0.00100	mg/kg	0.100		114	80-120	0.0262	20	
Toluene	0.103	0.00100	"	0.100		103	80-120	0.379	20	
Ethylbenzene	0.109	0.00100	"	0.100		109	80-120	1.22	20	
Xylene (p/m)	0.209	0.00200	"	0.200		104	80-120	0.430	20	
Xylene (o)	0.0957	0.00100	"	0.100		95.7	80-120	0.915	20	
Surrogate: 4-Bromofluorobenzene	*0.133*		"	*0.120*		*110*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.113*		"	*0.120*		*93.8*	*80-120*			
Calibration Blank (P3L1402-CCB1)				Prepared: 12/14/23 Analyzed: 12/15/23						
Benzene	0.130		ug/kg							
Toluene	0.160		"							
Ethylbenzene	0.200		"							
Xylene (p/m)	0.180		"							
Xylene (o)	0.150		"							
Surrogate: 4-Bromofluorobenzene	*0.138*		"	*0.120*		*115*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.110*		"	*0.120*		*91.8*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1402 - * DEFAULT PREP *** **										
Calibration Blank (P3L1402-CCB2)				Prepared: 12/14/23 Analyzed: 12/15/23						
Benzene	0.110		ug/kg							
Toluene	0.170		"							
Ethylbenzene	0.0900		"							
Xylene (p/m)	0.190		"							
Xylene (o)	0.110		"							
Surrogate: 4-Bromofluorobenzene	*0.140*		*"*	*0.120*		*116*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.110*		*"*	*0.120*		*91.8*	*80-120*			
Calibration Check (P3L1402-CCV1)				Prepared: 12/14/23 Analyzed: 12/15/23						
Benzene	0.120	0.00100	mg/kg	0.100		120	80-120			
Toluene	0.112	0.00100	"	0.100		112	80-120			
Ethylbenzene	0.113	0.00100	"	0.100		113	80-120			
Xylene (p/m)	0.227	0.00200	"	0.200		113	80-120			
Xylene (o)	0.106	0.00100	"	0.100		106	80-120			
Surrogate: 1,4-Difluorobenzene	*0.113*		*"*	*0.120*		*93.8*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.134*		*"*	*0.120*		*112*	*75-125*			
Calibration Check (P3L1402-CCV2)				Prepared: 12/14/23 Analyzed: 12/15/23						
Benzene	0.119	0.00100	mg/kg	0.100		119	80-120			
Toluene	0.109	0.00100	"	0.100		109	80-120			
Ethylbenzene	0.110	0.00100	"	0.100		110	80-120			
Xylene (p/m)	0.219	0.00200	"	0.200		110	80-120			
Xylene (o)	0.104	0.00100	"	0.100		104	80-120			
Surrogate: 1,4-Difluorobenzene	*0.112*		*"*	*0.120*		*93.6*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.137*		*"*	*0.120*		*114*	*75-125*			
Calibration Check (P3L1402-CCV3)				Prepared: 12/14/23 Analyzed: 12/15/23						
Benzene	0.117	0.00100	mg/kg	0.100		117	80-120			
Toluene	0.110	0.00100	"	0.100		110	80-120			
Ethylbenzene	0.110	0.00100	"	0.100		110	80-120			
Xylene (p/m)	0.219	0.00200	"	0.200		109	80-120			
Xylene (o)	0.104	0.00100	"	0.100		104	80-120			
Surrogate: 4-Bromofluorobenzene	*0.136*		*"*	*0.120*		*113*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.110*		*"*	*0.120*		*91.6*	*75-125*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1402 - * DEFAULT PREP *** **										
Matrix Spike (P3L1402-MS1)	**Source: 3L07001-87**			Prepared: 12/14/23 Analyzed: 12/15/23						
Benzene	0.0919	0.00102	mg/kg dry	0.102	ND	90.1	80-120			
Toluene	0.0763	0.00102	"	0.102	ND	74.7	80-120			QM-05
Ethylbenzene	0.0822	0.00102	"	0.102	ND	80.6	80-120			
Xylene (p/m)	0.159	0.00204	"	0.204	ND	77.7	80-120			QM-05
Xylene (o)	0.0695	0.00102	"	0.102	ND	68.1	80-120			QM-05
Surrogate: 4-Bromofluorobenzene	*0.140*		"	*0.122*		*115*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.122*		*92.8*	*80-120*			
Matrix Spike Dup (P3L1402-MSD1)	**Source: 3L07001-87**			Prepared: 12/14/23 Analyzed: 12/15/23						
Benzene	0.0921	0.00102	mg/kg dry	0.102	ND	90.3	80-120	0.211	20	
Toluene	0.0759	0.00102	"	0.102	ND	74.4	80-120	0.429	20	QM-05
Ethylbenzene	0.0824	0.00102	"	0.102	ND	80.7	80-120	0.136	20	
Xylene (p/m)	0.157	0.00204	"	0.204	ND	76.7	80-120	1.35	20	QM-05
Xylene (o)	0.0688	0.00102	"	0.102	ND	67.4	80-120	1.06	20	QM-05
Surrogate: 4-Bromofluorobenzene	*0.139*		"	*0.122*		*113*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.122*		*93.0*	*80-120*			
Batch P3L1506 - * DEFAULT PREP *** **										
Blank (P3L1506-BLK1)				Prepared & Analyzed: 12/15/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 4-Bromofluorobenzene	*0.141*		"	*0.120*		*117*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.110*		"	*0.120*		*91.8*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1506 - * DEFAULT PREP *** **										
LCS (P3L1506-BS1)				Prepared & Analyzed: 12/15/23						
Benzene	0.115	0.00100	mg/kg	0.100		115	80-120			
Toluene	0.106	0.00100	"	0.100		106	80-120			
Ethylbenzene	0.116	0.00100	"	0.100		116	80-120			
Xylene (p/m)	0.224	0.00200	"	0.200		112	80-120			
Xylene (o)	0.102	0.00100	"	0.100		102	80-120			
Surrogate: 4-Bromofluorobenzene	*0.137*		*"*	*0.120*		*114*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.112*		*"*	*0.120*		*93.1*	*80-120*			
LCS Dup (P3L1506-BSD1)				Prepared & Analyzed: 12/15/23						
Benzene	0.115	0.00100	mg/kg	0.100		115	80-120	0.435	20	
Toluene	0.106	0.00100	"	0.100		106	80-120	0.302	20	
Ethylbenzene	0.115	0.00100	"	0.100		115	80-120	0.788	20	
Xylene (p/m)	0.223	0.00200	"	0.200		111	80-120	0.376	20	
Xylene (o)	0.102	0.00100	"	0.100		102	80-120	0.147	20	
Surrogate: 4-Bromofluorobenzene	*0.139*		*"*	*0.120*		*116*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.112*		*"*	*0.120*		*93.3*	*80-120*			
Calibration Blank (P3L1506-CCB1)				Prepared & Analyzed: 12/15/23						
Benzene	0.0800		ug/kg							
Toluene	0.210		"							
Ethylbenzene	0.0800		"							
Xylene (p/m)	0.150		"							
Xylene (o)	0.0600		"							
Surrogate: 1,4-Difluorobenzene	*0.110*		*"*	*0.120*		*91.9*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.140*		*"*	*0.120*		*116*	*80-120*			
Calibration Blank (P3L1506-CCB2)				Prepared & Analyzed: 12/15/23						
Benzene	0.110		ug/kg							
Toluene	0.160		"							
Ethylbenzene	0.0700		"							
Xylene (p/m)	0.150		"							
Xylene (o)	0.0900		"							
Surrogate: 1,4-Difluorobenzene	*0.111*		*"*	*0.120*		*92.1*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.142*		*"*	*0.120*		*118*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1506 - * DEFAULT PREP *** **										
Calibration Blank (P3L1506-CCB3)				Prepared: 12/15/23 Analyzed: 12/16/23						
Benzene	0.150		ug/kg							
Toluene	0.220		"							
Ethylbenzene	0.660		"							
Xylene (p/m)	0.830		"							
Xylene (o)	0.780		"							
Surrogate: 4-Bromofluorobenzene	*0.144*		*"*	*0.120*		*120*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.111*		*"*	*0.120*		*92.6*	*80-120*			
Calibration Check (P3L1506-CCV1)				Prepared & Analyzed: 12/15/23						
Benzene	0.107	0.00100	mg/kg	0.100		107	80-120			
Toluene	0.0974	0.00100	"	0.100		97.4	80-120			
Ethylbenzene	0.0999	0.00100	"	0.100		99.9	80-120			
Xylene (p/m)	0.205	0.00200	"	0.200		103	80-120			
Xylene (o)	0.0936	0.00100	"	0.100		93.6	80-120			
Surrogate: 1,4-Difluorobenzene	*0.112*		*"*	*0.120*		*93.3*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.138*		*"*	*0.120*		*115*	*75-125*			
Calibration Check (P3L1506-CCV2)				Prepared & Analyzed: 12/15/23						
Benzene	0.118	0.00100	mg/kg	0.100		118	80-120			
Toluene	0.106	0.00100	"	0.100		106	80-120			
Ethylbenzene	0.107	0.00100	"	0.100		107	80-120			
Xylene (p/m)	0.217	0.00200	"	0.200		109	80-120			
Xylene (o)	0.101	0.00100	"	0.100		101	80-120			
Surrogate: 1,4-Difluorobenzene	*0.113*		*"*	*0.120*		*94.1*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.138*		*"*	*0.120*		*115*	*75-125*			
Calibration Check (P3L1506-CCV3)				Prepared: 12/15/23 Analyzed: 12/16/23						
Benzene	0.119	0.00100	mg/kg	0.100		119	80-120			
Toluene	0.110	0.00100	"	0.100		110	80-120			
Ethylbenzene	0.110	0.00100	"	0.100		110	80-120			
Xylene (p/m)	0.223	0.00200	"	0.200		111	80-120			
Xylene (o)	0.104	0.00100	"	0.100		104	80-120			
Surrogate: 4-Bromofluorobenzene	*0.138*		*"*	*0.120*		*115*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.114*		*"*	*0.120*		*95.2*	*75-125*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1506 - * DEFAULT PREP *** **										
Matrix Spike (P3L1506-MS1)	**Source: 3L07003-17**			Prepared: 12/15/23 Analyzed: 12/16/23						
Benzene	0.0919	0.00103	mg/kg dry	0.103	ND	89.1	80-120			
Toluene	0.0683	0.00103	"	0.103	ND	66.2	80-120			QM-05
Ethylbenzene	0.0774	0.00103	"	0.103	ND	75.1	80-120			QM-05
Xylene (p/m)	0.149	0.00206	"	0.206	ND	72.2	80-120			QM-05
Xylene (o)	0.0689	0.00103	"	0.103	ND	66.9	80-120			QM-05
Surrogate: 1,4-Difluorobenzene	*0.118*		"	*0.124*		*95.0*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.141*		"	*0.124*		*114*	*80-120*			
Matrix Spike Dup (P3L1506-MSD1)	**Source: 3L07003-17**			Prepared: 12/15/23 Analyzed: 12/16/23						
Benzene	0.0885	0.00103	mg/kg dry	0.103	ND	85.9	80-120	3.73	20	
Toluene	0.0673	0.00103	"	0.103	ND	65.3	80-120	1.49	20	QM-05
Ethylbenzene	0.0762	0.00103	"	0.103	ND	73.9	80-120	1.52	20	QM-05
Xylene (p/m)	0.149	0.00206	"	0.206	ND	72.4	80-120	0.304	20	QM-05
Xylene (o)	0.0668	0.00103	"	0.103	ND	64.8	80-120	3.10	20	QM-05
Surrogate: 1,4-Difluorobenzene	*0.117*		"	*0.124*		*95.0*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.144*		"	*0.124*		*116*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1108 - TX 1005										
Blank (P3L1108-BLK1)				Prepared & Analyzed: 12/11/23						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*105*		*"*	*100*		*105*	*70-130*			
Surrogate: o-Terphenyl	*63.8*		*"*	*50.0*		*128*	*70-130*			
LCS (P3L1108-BS1)				Prepared & Analyzed: 12/11/23						
C6-C12	1080	25.0	mg/kg	1000		108	75-125			
>C12-C28	1090	25.0	"	1000		109	75-125			
Surrogate: 1-Chlorooctane	*106*		*"*	*100*		*106*	*70-130*			
Surrogate: o-Terphenyl	*55.8*		*"*	*50.0*		*112*	*70-130*			
LCS Dup (P3L1108-BSD1)				Prepared & Analyzed: 12/11/23						
C6-C12	1060	25.0	mg/kg	1000		106	75-125	1.45	20	
>C12-C28	1080	25.0	"	1000		108	75-125	1.18	20	
Surrogate: 1-Chlorooctane	*105*		*"*	*100*		*105*	*70-130*			
Surrogate: o-Terphenyl	*54.7*		*"*	*50.0*		*109*	*70-130*			
Calibration Check (P3L1108-CCV1)				Prepared & Analyzed: 12/11/23						
C6-C12	484	25.0	mg/kg	500		96.7	85-115			
>C12-C28	501	25.0	"	500		100	85-115			
Surrogate: 1-Chlorooctane	*112*		*"*	*100*		*112*	*70-130*			
Surrogate: o-Terphenyl	*58.5*		*"*	*50.0*		*117*	*70-130*			
Calibration Check (P3L1108-CCV2)				Prepared & Analyzed: 12/11/23						
C6-C12	478	25.0	mg/kg	500		95.5	85-115			
>C12-C28	501	25.0	"	500		100	85-115			
Surrogate: 1-Chlorooctane	*111*		*"*	*100*		*111*	*70-130*			
Surrogate: o-Terphenyl	*58.8*		*"*	*50.0*		*118*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1109 - TX 1005										
Blank (P3L1109-BLK1)				Prepared: 12/11/23 Analyzed: 12/12/23						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*82.4*		*"*	*100*		*82.4*	*70-130*			
Surrogate: o-Terphenyl	*47.6*		*"*	*50.0*		*95.2*	*70-130*			
LCS (P3L1109-BS1)				Prepared & Analyzed: 12/11/23						
C6-C12	888	25.0	mg/kg	1000		88.8	75-125			
>C12-C28	850	25.0	"	1000		85.0	75-125			
Surrogate: 1-Chlorooctane	*103*		*"*	*100*		*103*	*70-130*			
Surrogate: o-Terphenyl	*47.1*		*"*	*50.0*		*94.2*	*70-130*			
LCS Dup (P3L1109-BSD1)				Prepared & Analyzed: 12/11/23						
C6-C12	903	25.0	mg/kg	1000		90.3	75-125	1.58	20	
>C12-C28	869	25.0	"	1000		86.9	75-125	2.17	20	
Surrogate: 1-Chlorooctane	*106*		*"*	*100*		*106*	*70-130*			
Surrogate: o-Terphenyl	*47.3*		*"*	*50.0*		*94.6*	*70-130*			
Calibration Check (P3L1109-CCV1)				Prepared & Analyzed: 12/11/23						
C6-C12	526	25.0	mg/kg	500		105	85-115			
>C12-C28	557	25.0	"	500		111	85-115			
Surrogate: 1-Chlorooctane	*94.6*		*"*	*100*		*94.6*	*70-130*			
Surrogate: o-Terphenyl	*48.4*		*"*	*50.0*		*96.7*	*70-130*			
Calibration Check (P3L1109-CCV2)				Prepared: 12/11/23 Analyzed: 12/12/23						
C6-C12	529	25.0	mg/kg	500		106	85-115			
>C12-C28	560	25.0	"	500		112	85-115			
Surrogate: 1-Chlorooctane	*95.4*		*"*	*100*		*95.4*	*70-130*			
Surrogate: o-Terphenyl	*48.6*		*"*	*50.0*		*97.3*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1109 - TX 1005										
Calibration Check (P3L1109-CCV3)				Prepared: 12/11/23 Analyzed: 12/12/23						
C6-C12	511	25.0	mg/kg	500		102	85-115			
>C12-C28	543	25.0	"	500		109	85-115			
Surrogate: 1-Chlorooctane	*93.1*		*"*	*100*		*93.1*	*70-130*			
Surrogate: o-Terphenyl	*46.9*		*"*	*50.0*		*93.8*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1110 - * DEFAULT PREP *** **										
Blank (P3L1110-BLK1)				Prepared & Analyzed: 12/11/23						
% Moisture	ND	0.1	%							
Blank (P3L1110-BLK2)				Prepared & Analyzed: 12/11/23						
% Moisture	ND	0.1	%							
Blank (P3L1110-BLK3)				Prepared & Analyzed: 12/11/23						
% Moisture	ND	0.1	%							
Blank (P3L1110-BLK4)				Prepared & Analyzed: 12/11/23						
% Moisture	ND	0.1	%							
Blank (P3L1110-BLK5)				Prepared & Analyzed: 12/11/23						
% Moisture	ND	0.1	%							
Blank (P3L1110-BLK6)				Prepared & Analyzed: 12/11/23						
% Moisture	ND	0.1	%							
Blank (P3L1110-BLK7)				Prepared & Analyzed: 12/11/23						
% Moisture	ND	0.1	%							
Duplicate (P3L1110-DUP1)	**Source: 3L07003-10**			Prepared & Analyzed: 12/11/23						
% Moisture	5.0	0.1	%		4.0			22.2	20	
Duplicate (P3L1110-DUP2)	**Source: 3L07003-20**			Prepared & Analyzed: 12/11/23						
% Moisture	4.0	0.1	%		4.0			0.00	20	
Duplicate (P3L1110-DUP3)	**Source: 3L07004-11**			Prepared & Analyzed: 12/11/23						
% Moisture	5.0	0.1	%		5.0			0.00	20	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1110 - * DEFAULT PREP *** **										
Duplicate (P3L1110-DUP4)		**Source: 3L07004-21**		Prepared & Analyzed: 12/11/23						
% Moisture	2.0	0.1	%		2.0			0.00	20	
Duplicate (P3L1110-DUP5)		**Source: 3L07004-36**		Prepared & Analyzed: 12/11/23						
% Moisture	3.0	0.1	%		3.0			0.00	20	
Duplicate (P3L1110-DUP6)		**Source: 3L07004-46**		Prepared & Analyzed: 12/11/23						
% Moisture	4.0	0.1	%		4.0			0.00	20	
Duplicate (P3L1110-DUP7)		**Source: 3L07005-13**		Prepared & Analyzed: 12/11/23						
% Moisture	8.0	0.1	%		8.0			0.00	20	
Duplicate (P3L1110-DUP8)		**Source: 3L07006-03**		Prepared & Analyzed: 12/11/23						
% Moisture	7.0	0.1	%		7.0			0.00	20	
Duplicate (P3L1110-DUP9)		**Source: 3L07006-18**		Prepared & Analyzed: 12/11/23						
% Moisture	11.0	0.1	%		11.0			0.00	20	
Duplicate (P3L1110-DUPA)		**Source: 3L07006-28**		Prepared & Analyzed: 12/11/23						
% Moisture	4.0	0.1	%		4.0			0.00	20	
Duplicate (P3L1110-DUPB)		**Source: 3L08006-06**		Prepared & Analyzed: 12/11/23						
% Moisture	11.0	0.1	%		11.0			0.00	20	
Duplicate (P3L1110-DUPC)		**Source: 3L08012-01**		Prepared & Analyzed: 12/11/23						
% Moisture	11.0	0.1	%		11.0			0.00	20	
Duplicate (P3L1110-DUPD)		**Source: 3L08013-15**		Prepared & Analyzed: 12/11/23						
% Moisture	6.0	0.1	%		7.0			15.4	20	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1219 - * DEFAULT PREP *** **										
Blank (P3L1219-BLK1)				Prepared & Analyzed: 12/12/23						
Chloride	ND	1.00	mg/kg							
LCS (P3L1219-BS1)				Prepared & Analyzed: 12/12/23						
Chloride	15.8		mg/kg	20.0		79.0	90-110			
LCS Dup (P3L1219-BSD1)				Prepared & Analyzed: 12/12/23						
Chloride	14.8		mg/kg	20.0		74.2	90-110	6.18	10	
Calibration Check (P3L1219-CCV1)				Prepared & Analyzed: 12/12/23						
Chloride	20.8		mg/kg	20.0		104	90-110			
Calibration Check (P3L1219-CCV2)				Prepared & Analyzed: 12/12/23						
Chloride	20.4		mg/kg	20.0		102	90-110			
Matrix Spike (P3L1219-MS1)		**Source: 3L07001-86**		Prepared & Analyzed: 12/12/23						
Chloride	98.0		mg/kg	100	0.508	97.5	80-120			
Matrix Spike (P3L1219-MS2)		**Source: 3L07003-06**		Prepared & Analyzed: 12/12/23						
Chloride	108		mg/kg	100	0.358	108	80-120			
Matrix Spike Dup (P3L1219-MSD1)		**Source: 3L07001-86**		Prepared & Analyzed: 12/12/23						
Chloride	97.3		mg/kg	100	0.508	96.7	80-120	0.725	20	
Matrix Spike Dup (P3L1219-MSD2)		**Source: 3L07003-06**		Prepared & Analyzed: 12/12/23						
Chloride	107		mg/kg	100	0.358	106	80-120	1.46	20	
Batch P3L1308 - * DEFAULT PREP *** **										
Blank (P3L1308-BLK1)				Prepared: 12/13/23 Analyzed: 12/14/23						
Chloride	ND	1.00	mg/kg							

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1308 - * DEFAULT PREP *** **										
LCS (P3L1308-BS1)				Prepared: 12/13/23 Analyzed: 12/14/23						
Chloride	20.3		mg/kg	20.0		102	90-110			
LCS Dup (P3L1308-BSD1)				Prepared: 12/13/23 Analyzed: 12/14/23						
Chloride	21.2		mg/kg	20.0		106	90-110	4.17	10	
Calibration Check (P3L1308-CCV1)				Prepared & Analyzed: 12/13/23						
Chloride	21.3		mg/kg	20.0		107	90-110			
Calibration Check (P3L1308-CCV2)				Prepared: 12/13/23 Analyzed: 12/14/23						
Chloride	21.2		mg/kg	20.0		106	90-110			
Matrix Spike (P3L1308-MS1)		**Source: 3L07003-15**		Prepared: 12/13/23 Analyzed: 12/14/23						
Chloride	107		mg/kg	100	0.500	107	80-120			
Matrix Spike (P3L1308-MS2)		**Source: 3L07004-01**		Prepared: 12/13/23 Analyzed: 12/14/23						
Chloride	106		mg/kg	100	0.367	105	80-120			
Matrix Spike Dup (P3L1308-MSD1)		**Source: 3L07003-15**		Prepared: 12/13/23 Analyzed: 12/14/23						
Chloride	108		mg/kg	100	0.500	108	80-120	1.23	20	
Matrix Spike Dup (P3L1308-MSD2)		**Source: 3L07004-01**		Prepared: 12/13/23 Analyzed: 12/14/23						
Chloride	108		mg/kg	100	0.367	108	80-120	2.35	20	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Notes and Definitions

S-GC1	Surrogate recovery outside of control limits. A second analysis confirmed the original results..
QM-05	The spike recovery was outside acceptance limits for the MS and/or MSD due to matrix interference. The LCS and/or LCSD were within acceptance limits showing that the laboratory is in control and the data is acceptable.
BULK	Samples received in Bulk soil containers may be biased low in the nC6-C12 TPH Range
DET	Analyte DETECTED
ND	Analyte NOT DETECTED at or above the reporting limit
NR	Not Reported
dry	Sample results reported on a dry weight basis
RPD	Relative Percent Difference
LCS	Laboratory Control Spike
MS	Matrix Spike
Dup	Duplicate

Report Approved By: Brent Barron Date: 12/18/2023

Brent Barron, Laboratory Director/Technical Director

This material is intended only for the use of the individual (s) or entity to whom it is addressed, and may contain information that is privileged and confidential.

If you have received this material in error, please notify us immediately at 432-686-7235.

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934
Fax No: _____
Sampler Signature: Jose Belloc
e-mail: Jamey@Tellusservices

Project Name: Jalapeño
Project #: COEV # 11845
Project Loc: Lea, CO, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES

(lab use only)
ORDER #: 3L07003

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total # of Containers	Preservation & # of Containers: Ice	HNO_3	HCl	H_2SO_4	NaOH	$Na_2S_2O_3$	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge GW = Groundwater S=Soil/Solid NP=Non-Potable Specify Other	Analyze For: TPH: TX 1005	TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA - 8021	TPH-EPA - 8015	Chlorides EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
1	BH-311@1Ft	1Ft	1Ft	12-4-23	10:55		1									S				X	X	X			
2	BH-312@1Ft	1Ft	1Ft	12-4-23	10:58																				
3	BH-313@1Ft	1Ft	1Ft	12-4-23	11:01																				
4	BH-314@1Ft	1Ft	1Ft	12-4-23	11:03																				
5	BH-315@1Ft	1Ft	1Ft	12-4-23	11:08																				
6	BH-316@1Ft	1Ft	1Ft	12-4-23	11:10																				
7	BH-317@1Ft	1Ft	1Ft	12-4-23	11:15																				
8	BH-318@1Ft	1Ft	1Ft	12-4-23	11:16																				
9	BH-319@1Ft	1Ft	1Ft	12-4-23	11:18																				
10	BH-320@1Ft	1Ft	1Ft	12-4-23	11:21		1																		

Special Instructions: Report TPH-in-C6-C12 & C12-C28 & C28-C35 fractions aswell as total TPH
same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
Jose Belloc	12/7/23	8:46			
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL:	Date	Time
			Teresa Bledsoe	12/7/23	8:46

Laboratory Comments:
Sample Containers Intact? Y
VOCs Free of Headspace? Y
Labels on container(s) Y
Custody seals on container(s) N
Custody seals on cooler(s) N
Sample Hand Delivered by Sampler/Client Rep. ? N
by Courier? UPS DHL FedEx Lone Star
Temperature Upon Receipt:
Received: 5.1 °C Thermometer: NA 63
Adjusted: °C Factor:

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21

Page 1 of 1

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

Page 735 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey Fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934
Sampler Signature: Jose Belloc

Project Name: Jalapeño
Project #: CDEV # 11845
Project Loc: Lea, CO, NM
PO #:
Fax No:
Report Format: ☐ Standard ☐ TRRP ☐ NPDES
e-mail: Jamey@Tellusservices

(lab use only)
ORDER #: 3L07003

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total # of Containers	Preservation & # of Containers: Ice	HNO_3	HCl	H_2SO_4	NaOH	$Na_2S_2O_3$	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge	GW = Groundwater S=Soil/Solid	NP=Non-Potable Specify Other	Analyze For: TPH: TX 1005 TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA - 8021	TPH- EPA - 8015	Chlorides EPA-300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
11	BH-321@ 1ft	1Ft	1Ft	12-4-23	11:22		1									S										
12	BH-322@ 1ft	1Ft	1Ft	12-4-23	11:25																	X	X	X		
13	BH-323@ 1ft	1Ft	1Ft	12-4-23	11:28																					
14	BH-324@ 1ft	1Ft	1Ft	12-4-23	11:29																					
15	BH-325@ 1ft	1Ft	1Ft	12-4-23	11:30																					
16	BH-326@ 1ft	1Ft	1Ft	12-4-23	11:31																					
17	BH-327@ 1ft	1Ft	1Ft	12-4-23	11:32																					
18	BH-328@ 1ft	1Ft	1Ft	12-4-23	11:35																					
19	BH-329@ 1ft	1Ft	1Ft	12-4-23	11:36																					
20	BH-330@ 1ft	1Ft	1Ft	12-4-23	11:38																					

Special Instructions: Report TPH-in-C6-C12 7 C12-C28 7 C28-C35 fractions aswell as total TPH
same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
	12/7/23	8.44			
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL	Date	Time
			Brisa Bledsoe	12/7/23	8.44

Laboratory Comments:
Sample Containers Intact? Y N
VOCs Free of Headspace? Y N
Labels on container(s) Y N
Custody seals on container(s) Y N
Custody seals on cooler(s) Y N
Sample Hand Delivered by Sampler/Client Rep. ? Y N
by Courier? UPS DHL FedEx Lone Star
Temperature Upon Receipt:
Received: 5.1 °C Thermometer: NCF
Adjusted: °C Factor: 1.3

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21

Page 1 of 2

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

Page 736 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934
Fax No: _____
Sampler Signature: Jose Bellor
e-mail: Jamey@Tellusservices

Project Name: Jalapeño
Project #: CDEV # 11845
Project Loc: Lea, CO, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES

(lab use only)
ORDER #: 3L07003

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total # of Containers	Preservation & # of Containers: Ice	HNO_3	HCl	H_2SO_4	NaOH	$Na_2S_2O_3$	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge GW = Groundwater S=Soil/Solid NP=Non-Potable Specify Other	Analyze For: TCLP: TOTAL: TPH: TX 1005	TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA - 8021	TPH- EPA - 8015	Chlorides EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
21	BH-331 @ 1ft	1ft	1ft	12-4-23	12:01		1									S				X	X	X		
22	BH-332 @ 1ft	1ft	1ft	12-4-23	12:03		1																	
23	BH-333 @ 1ft	1ft	1ft	12-4-23	12:04		1																	
24	BH-334 @ 1ft	1ft	1ft	12-4-23	12:07		1																	

Special Instructions: Report TPH-in-C6-C12 & C12-C28 & C28-C35 fractions aswell as total TPH
same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
Jose Bellor	12/7/23	8:44			
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL: Thresa Bledsoe	Date 12/7/23	Time 8:46

Laboratory Comments:

Sample Containers Intact?	Y
VOCs Free of Headspace?	Y
Labels on container(s)	Y
Custody seals on container(s)	N
Custody seals on cooler(s)	N
Sample Hand Delivered by Sampler/Client Rep. ?	N
by Courier? UPS DHL FedEx Lone Star	N

Temperature Upon Receipt:
Received: 5.1 °C Thermometor: NF 03
Adjusted: °C Factor:

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21

Page 1 of 1

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

PERMIAN BASIN
ENVIRONMENTAL LAB, LP
1400 Rankin Hwy
Midland, TX 79701

PBELAB

Analytical Report

Prepared for:

Jamey Fowler

Tellus Consulting, LLC

4000 North Big Spring Street Suite 109

Midland, TX 79705

Project: Jalapeno

Project Number: CDEV #11845

Location: LEA COUNTY, NM

Lab Order Number: 3L07004

NELAP ACCREDITED TNI LABORATORY

Current Certification

Report Date: 12/18/23

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

ANALYTICAL REPORT FOR SAMPLES

Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
BH-335 @ 3FT	3L07004-01	Soil	12/04/23 12:08	12-07-2023 08:46
BH-336 @ 3FT	3L07004-02	Soil	12/04/23 08:10	12-07-2023 08:46
BH-337 @ 3FT	3L07004-03	Soil	12/04/23 08:11	12-07-2023 08:46
BH-338 @ 3FT	3L07004-04	Soil	12/04/23 08:13	12-07-2023 08:46
BH-339 @ 3FT	3L07004-05	Soil	12/04/23 08:14	12-07-2023 08:46
BH-340 @ 3FT	3L07004-06	Soil	12/04/23 08:15	12-07-2023 08:46
BH-341 @ 3FT	3L07004-07	Soil	12/04/23 08:16	12-07-2023 08:46
BH-342 @ 3FT	3L07004-08	Soil	12/04/23 08:20	12-07-2023 08:46
BH-343 @ 3FT	3L07004-09	Soil	12/04/23 08:23	12-07-2023 08:46
BH-344 @ 3FT	3L07004-10	Soil	12/04/23 08:24	12-07-2023 08:46
BH-345 @ 3FT	3L07004-11	Soil	12/04/23 08:25	12-07-2023 08:46
BH-346 @ 3FT	3L07004-12	Soil	12/04/23 08:28	12-07-2023 08:46
BH-347 @ 3FT	3L07004-13	Soil	12/04/23 08:30	12-07-2023 08:46
BH-348 @ 3FT	3L07004-14	Soil	12/04/23 08:31	12-07-2023 08:46
BH-349 @ 3FT	3L07004-15	Soil	12/04/23 08:34	12-07-2023 08:46
BH-350 @ 3FT	3L07004-16	Soil	12/04/23 08:36	12-07-2023 08:46
BH-351 @ 3FT	3L07004-17	Soil	12/04/23 08:38	12-07-2023 08:46
BH-352 @ 3FT	3L07004-18	Soil	12/04/23 08:40	12-07-2023 08:46
BH-353 @ 3FT	3L07004-19	Soil	12/04/23 08:42	12-07-2023 08:46
BH-354 @ 3FT	3L07004-20	Soil	12/04/23 08:44	12-07-2023 08:46
BH-355 @ 8 IN	3L07004-21	Soil	12/04/23 08:46	12-07-2023 08:46
BH-356 @ 8 IN	3L07004-22	Soil	12/04/23 08:49	12-07-2023 08:46
BH-357 @ 8 IN	3L07004-23	Soil	12/04/23 08:51	12-07-2023 08:46
BH-358 @ 8 IN	3L07004-24	Soil	12/04/23 08:52	12-07-2023 08:46
BH-359 @ 8 IN	3L07004-25	Soil	12/04/23 08:54	12-07-2023 08:46
BH-360 @ 8 IN	3L07004-26	Soil	12/04/23 08:54	12-07-2023 08:46
BH-361 @ 8 IN	3L07004-27	Soil	12/04/23 08:57	12-07-2023 08:46
BH-362 @ 8 IN	3L07004-28	Soil	12/04/23 08:59	12-07-2023 08:46
BH-363 @ 8 IN	3L07004-29	Soil	12/04/23 09:01	12-07-2023 08:46
BH-364 @ 8 IN	3L07004-30	Soil	12/04/23 09:03	12-07-2023 08:46
BH-365 @ 8 IN	3L07004-31	Soil	12/04/23 09:05	12-07-2023 08:46
BH-366 @ 8 IN	3L07004-32	Soil	12/04/23 09:09	12-07-2023 08:46
BH-367 @ 8 IN	3L07004-33	Soil	12/04/23 09:11	12-07-2023 08:46
BH-368 @ 8 IN	3L07004-34	Soil	12/04/23 09:12	12-07-2023 08:46

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

ANALYTICAL REPORT FOR SAMPLES

Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
BH-369 @ 8 IN	3L07004-35	Soil	12/04/23 09:14	12-07-2023 08:46
BH-370 @ 8 IN	3L07004-36	Soil	12/04/23 09:15	12-07-2023 08:46
BH-371 @ 8 IN	3L07004-37	Soil	12/04/23 09:17	12-07-2023 08:46
BH-372 @ 8 IN	3L07004-38	Soil	12/04/23 09:20	12-07-2023 08:46
BH-373 @ 8 IN	3L07004-39	Soil	12/04/23 09:21	12-07-2023 08:46
BH-374 @ 8 IN	3L07004-40	Soil	12/04/23 09:22	12-07-2023 08:46
BH-375 @ 8 IN	3L07004-41	Soil	12/04/23 09:25	12-07-2023 08:46
BH-376 @ 1FT	3L07004-42	Soil	12/04/23 10:20	12-07-2023 08:46
BH-377 @ 1FT	3L07004-43	Soil	12/04/23 10:23	12-07-2023 08:46
BH-378 @ 1FT	3L07004-44	Soil	12/04/23 10:25	12-07-2023 08:46
BH-379 @ 1FT	3L07004-45	Soil	12/04/23 10:28	12-07-2023 08:46
BH-380 @ 1FT	3L07004-46	Soil	12/04/23 10:28	12-07-2023 08:46
BH-381 @ 1FT	3L07004-47	Soil	12/04/23 10:31	12-07-2023 08:46
BH-382 @ 1FT	3L07004-48	Soil	12/04/23 10:47	12-07-2023 08:46

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-335 @ 3FT

3L07004-01 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 22:12	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 22:12	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 22:12	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 22:12	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 22:12	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*118 %*	*80-120*		*P3L1506*	*12/15/23 13:51*	*12/15/23 22:12*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*92.1 %*	*80-120*		*P3L1506*	*12/15/23 13:51*	*12/15/23 22:12*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/15/23 13:51	12/15/23 22:12	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/15/23 13:51	12/15/23 22:12	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 07:08	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 07:08	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 07:08	TPH 8015M	
Surrogate: 1-Chlorooctane		*85.6 %*	*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 07:08*	*TPH 8015M*	
Surrogate: o-Terphenyl		*100 %*	*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 07:08*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/11/23 10:11	12/12/23 07:08	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**18.9**	1.03	mg/kg dry	1	P3L1308	12/13/23 16:07	12/14/23 04:25	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-336 @ 3FT

3L07004-02 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 22:36	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 22:36	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 22:36	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 22:36	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 22:36	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*118 %*	*80-120*		*P3L1506*	*12/15/23 13:51*	*12/15/23 22:36*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*92.4 %*	*80-120*		*P3L1506*	*12/15/23 13:51*	*12/15/23 22:36*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/15/23 13:51	12/15/23 22:36	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/15/23 13:51	12/15/23 22:36	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 07:31	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 07:31	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 07:31	TPH 8015M	
Surrogate: 1-Chlorooctane		*80.4 %*	*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 07:31*	*TPH 8015M*	
Surrogate: o-Terphenyl		*94.6 %*	*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 07:31*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/11/23 10:11	12/12/23 07:31	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**60.8**	1.05	mg/kg dry	1	P3L1308	12/13/23 16:07	12/14/23 05:13	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-337 @ 3FT

3L07004-03 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 23:49	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 23:49	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 23:49	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 23:49	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L1506	12/15/23 13:51	12/15/23 23:49	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*119 %*	*80-120*		*P3L1506*	*12/15/23 13:51*	*12/15/23 23:49*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*92.6 %*	*80-120*		*P3L1506*	*12/15/23 13:51*	*12/15/23 23:49*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/15/23 13:51	12/15/23 23:49	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/15/23 13:51	12/15/23 23:49	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 07:54	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 07:54	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 07:54	TPH 8015M	
Surrogate: 1-Chlorooctane		*78.3 %*	*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 07:54*	*TPH 8015M*	
Surrogate: o-Terphenyl		*91.3 %*	*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 07:54*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/11/23 10:11	12/12/23 07:54	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**163**	1.05	mg/kg dry	1	P3L1308	12/13/23 16:07	12/14/23 05:28	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-338 @ 3FT

3L07004-04 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 00:13	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 00:13	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 00:13	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 00:13	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 00:13	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*92.2 %*		*80-120*		*P3L1506*	*12/15/23 13:51*	*12/16/23 00:13*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*118 %*		*80-120*		*P3L1506*	*12/15/23 13:51*	*12/16/23 00:13*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/15/23 13:51	12/16/23 00:13	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/15/23 13:51	12/16/23 00:13	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 08:17	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 08:17	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 08:17	TPH 8015M	
Surrogate: 1-Chlorooctane	*77.8 %*		*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 08:17*	*TPH 8015M*	
Surrogate: o-Terphenyl	*91.3 %*		*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 08:17*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/11/23 10:11	12/12/23 08:17	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	ND	1.05	mg/kg dry	1	P3L1308	12/13/23 16:07	12/14/23 05:43	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-339 @ 3FT

3L07004-05 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 00:38	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 00:38	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 00:38	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 00:38	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 00:38	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*92.2 %*	*80-120*		*P3L1506*	*12/15/23 13:51*	*12/16/23 00:38*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*119 %*	*80-120*		*P3L1506*	*12/15/23 13:51*	*12/16/23 00:38*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/15/23 13:51	12/16/23 00:38	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/15/23 13:51	12/16/23 00:38	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 08:40	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 08:40	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 08:40	TPH 8015M	
Surrogate: 1-Chlorooctane		*80.0 %*	*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 08:40*	*TPH 8015M*	
Surrogate: o-Terphenyl		*93.4 %*	*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 08:40*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/11/23 10:11	12/12/23 08:40	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**58.2**	1.04	mg/kg dry	1	P3L1408	12/14/23 16:15	12/14/23 21:07	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-340 @ 3FT

3L07004-06 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 01:02	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 01:02	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 01:02	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 01:02	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 01:02	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*92.8 %*	*80-120*		*P3L1506*	*12/15/23 13:51*	*12/16/23 01:02*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*119 %*	*80-120*		*P3L1506*	*12/15/23 13:51*	*12/16/23 01:02*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/15/23 13:51	12/16/23 01:02	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	12/15/23 13:51	12/16/23 01:02	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 09:03	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 09:03	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3L1109	12/11/23 10:11	12/12/23 09:03	TPH 8015M	
Surrogate: 1-Chlorooctane		*76.5 %*	*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 09:03*	*TPH 8015M*	
Surrogate: o-Terphenyl		*89.5 %*	*70-130*		*P3L1109*	*12/11/23 10:11*	*12/12/23 09:03*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	12/11/23 10:11	12/12/23 09:03	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**52.8**	1.06	mg/kg dry	1	P3L1408	12/14/23 16:15	12/14/23 21:50	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-341 @ 3FT

3L07004-07 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 01:26	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 01:26	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 01:26	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 01:26	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 01:26	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*92.7 %*	*80-120*		*P3L1506*	*12/15/23 13:51*	*12/16/23 01:26*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*119 %*	*80-120*		*P3L1506*	*12/15/23 13:51*	*12/16/23 01:26*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/15/23 13:51	12/16/23 01:26	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/15/23 13:51	12/16/23 01:26	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*85.4 %*	*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*93.4 %*	*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/11/23 16:03	12/12/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**35.5**	1.05	mg/kg dry	1	P3L1511	12/15/23 14:56	12/16/23 05:35	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-342 @ 3FT

3L07004-08 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 01:51	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 01:51	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 01:51	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 01:51	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 01:51	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*92.4 %*	*80-120*		*P3L1506*	*12/15/23 13:51*	*12/16/23 01:51*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*119 %*	*80-120*		*P3L1506*	*12/15/23 13:51*	*12/16/23 01:51*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/15/23 13:51	12/16/23 01:51	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	12/15/23 13:51	12/16/23 01:51	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*79.6 %*	*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*87.9 %*	*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	12/11/23 16:03	12/12/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**91.7**	1.06	mg/kg dry	1	P3L1511	12/15/23 14:56	12/16/23 06:18	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-343 @ 3FT

3L07004-09 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 02:15	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 02:15	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 02:15	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 02:15	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 02:15	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*121 %*	*80-120*		*P3L1506*	*12/15/23 13:51*	*12/16/23 02:15*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*92.6 %*	*80-120*		*P3L1506*	*12/15/23 13:51*	*12/16/23 02:15*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/15/23 13:51	12/16/23 02:15	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/15/23 13:51	12/16/23 02:15	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*86.0 %*	*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*94.9 %*	*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/11/23 16:03	12/12/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**38.4**	1.04	mg/kg dry	1	P3L1513	12/15/23 16:32	12/17/23 14:53	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-344 @ 3FT

3L07004-10 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 02:39	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 02:39	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 02:39	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 02:39	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 02:39	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*93.2 %*		*80-120*		*P3L1506*	*12/15/23 13:51*	*12/16/23 02:39*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*120 %*		*80-120*		*P3L1506*	*12/15/23 13:51*	*12/16/23 02:39*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/15/23 13:51	12/16/23 02:39	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/15/23 13:51	12/16/23 02:39	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*88.8 %*		*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*97.6 %*		*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/11/23 16:03	12/12/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**13.6**	1.05	mg/kg dry	1	P3L1513	12/15/23 16:32	12/17/23 15:36	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-345 @ 3FT

3L07004-11 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 03:04	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 03:04	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 03:04	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 03:04	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 03:04	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*119 %*	*80-120*		*P3L1506*	*12/15/23 13:51*	*12/16/23 03:04*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*92.8 %*	*80-120*		*P3L1506*	*12/15/23 13:51*	*12/16/23 03:04*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/15/23 13:51	12/16/23 03:04	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/15/23 13:51	12/16/23 03:04	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*80.9 %*	*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*90.9 %*	*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/11/23 16:03	12/12/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**64.9**	1.05	mg/kg dry	1	P3L1513	12/15/23 16:32	12/17/23 15:50	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-346 @ 3FT

3L07004-12 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 03:28	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 03:28	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 03:28	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 03:28	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L1506	12/15/23 13:51	12/16/23 03:28	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*92.7 %*	*80-120*		*P3L1506*	*12/15/23 13:51*	*12/16/23 03:28*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*120 %*	*80-120*		*P3L1506*	*12/15/23 13:51*	*12/16/23 03:28*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/15/23 13:51	12/16/23 03:28	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/15/23 13:51	12/16/23 03:28	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*76.3 %*	*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*85.6 %*	*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/11/23 16:03	12/12/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**124**	1.05	mg/kg dry	1	P3L1513	12/15/23 16:32	12/17/23 16:04	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-347 @ 3FT

3L07004-13 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 06:43	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 06:43	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 06:43	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 06:43	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 06:43	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*121 %*	*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 06:43*	*EPA 8021B*	*S-GC*
Surrogate: 1,4-Difluorobenzene		*93.1 %*	*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 06:43*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 06:43	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 06:43	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*76.2 %*	*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*87.3 %*	*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/11/23 16:03	12/12/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**11.5**	1.04	mg/kg dry	1	P3L1513	12/15/23 16:32	12/17/23 16:19	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-348 @ 3FT

3L07004-14 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 07:07	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 07:07	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 07:07	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 07:07	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 07:07	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*121 %*	*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 07:07*	*EPA 8021B*	*S-GC*
Surrogate: 1,4-Difluorobenzene		*93.3 %*	*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 07:07*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 07:07	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 07:07	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*81.8 %*	*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*93.5 %*	*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/11/23 16:03	12/12/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**8.06**	1.05	mg/kg dry	1	P3L1513	12/15/23 16:32	12/17/23 16:33	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-349 @ 3FT

3L07004-15 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00108	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 07:31	EPA 8021B	
Toluene	ND	0.00108	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 07:31	EPA 8021B	
Ethylbenzene	ND	0.00108	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 07:31	EPA 8021B	
Xylene (p/m)	ND	0.00215	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 07:31	EPA 8021B	
Xylene (o)	ND	0.00108	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 07:31	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*93.1 %*		*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 07:31*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*120 %*		*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 07:31*	*EPA 8021B*	
Xylenes (total)	ND	0.00215	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 07:31	EPA 8021B	
Total BTEX	ND	0.00108	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 07:31	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.9	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C12-C28	ND	26.9	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C28-C35	ND	26.9	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*72.4 %*		*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*81.5 %*		*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.9	mg/kg dry	1	[CALC]	12/11/23 16:03	12/12/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**43.3**	1.08	mg/kg dry	1	P3L1513	12/15/23 16:32	12/17/23 16:47	EPA 300.0	
% Moisture	**7.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-350 @ 3FT

3L07004-16 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00108	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 07:56	EPA 8021B	
Toluene	ND	0.00108	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 07:56	EPA 8021B	
Ethylbenzene	ND	0.00108	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 07:56	EPA 8021B	
Xylene (p/m)	ND	0.00215	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 07:56	EPA 8021B	
Xylene (o)	ND	0.00108	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 07:56	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*92.3 %*	*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 07:56*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*121 %*	*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 07:56*	*EPA 8021B*	*S-GC*
Xylenes (total)	ND	0.00215	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 07:56	EPA 8021B	
Total BTEX	ND	0.00108	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 07:56	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.9	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C12-C28	ND	26.9	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C28-C35	ND	26.9	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*73.0 %*	*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*79.8 %*	*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.9	mg/kg dry	1	[CALC]	12/11/23 16:03	12/12/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**17.3**	1.08	mg/kg dry	1	P3L1513	12/15/23 16:32	12/17/23 17:02	EPA 300.0	
% Moisture	**7.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-351 @ 3FT

3L07004-17 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 08:20	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 08:20	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 08:20	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 08:20	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 08:20	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*93.2 %*	*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 08:20*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*120 %*	*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 08:20*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 08:20	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 08:20	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*82.7 %*	*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*95.5 %*	*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/11/23 16:03	12/12/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**45.1**	1.04	mg/kg dry	1	P3L1513	12/15/23 16:32	12/17/23 17:16	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-352 @ 3FT

3L07004-18 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 08:44	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 08:44	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 08:44	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 08:44	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 08:44	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*93.4 %*		*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 08:44*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*121 %*		*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 08:44*	*EPA 8021B*	*S-GC*
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 08:44	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 08:44	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*83.9 %*		*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*95.8 %*		*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/11/23 16:03	12/12/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**16.4**	1.05	mg/kg dry	1	P3L1513	12/15/23 16:32	12/17/23 17:30	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-353 @ 3FT

3L07004-19 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00110	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 09:09	EPA 8021B	
Toluene	ND	0.00110	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 09:09	EPA 8021B	
Ethylbenzene	ND	0.00110	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 09:09	EPA 8021B	
Xylene (p/m)	ND	0.00220	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 09:09	EPA 8021B	
Xylene (o)	ND	0.00110	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 09:09	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*93.2 %*	*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 09:09*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*121 %*	*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 09:09*	*EPA 8021B*	*S-GC*
Xylenes (total)	ND	0.00220	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 09:09	EPA 8021B	
Total BTEX	ND	0.00110	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 09:09	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.5	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C12-C28	ND	27.5	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C28-C35	ND	27.5	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*78.4 %*	*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*91.8 %*	*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.5	mg/kg dry	1	[CALC]	12/11/23 16:03	12/12/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**48.8**	1.10	mg/kg dry	1	P3L1513	12/15/23 16:32	12/17/23 18:13	EPA 300.0	
% Moisture	**9.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-354 @ 3FT

3L07004-20 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00102	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 09:33	EPA 8021B	
Toluene	ND	0.00102	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 09:33	EPA 8021B	
Ethylbenzene	ND	0.00102	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 09:33	EPA 8021B	
Xylene (p/m)	ND	0.00204	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 09:33	EPA 8021B	
Xylene (o)	ND	0.00102	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 09:33	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*120 %*	*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 09:33*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*92.9 %*	*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 09:33*	*EPA 8021B*	
Xylenes (total)	ND	0.00204	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 09:33	EPA 8021B	
Total BTEX	ND	0.00102	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 09:33	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.5	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C12-C28	ND	25.5	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C28-C35	ND	25.5	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*95.4 %*	*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*98.2 %*	*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.5	mg/kg dry	1	[CALC]	12/11/23 16:03	12/12/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**13.1**	1.02	mg/kg dry	1	P3L1513	12/15/23 16:32	12/17/23 18:56	EPA 300.0	
% Moisture	**2.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-355 @ 8 IN

3L07004-21 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00102	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 09:57	EPA 8021B	
Toluene	ND	0.00102	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 09:57	EPA 8021B	
Ethylbenzene	ND	0.00102	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 09:57	EPA 8021B	
Xylene (p/m)	ND	0.00204	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 09:57	EPA 8021B	
Xylene (o)	ND	0.00102	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 09:57	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*92.2 %*	*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 09:57*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*119 %*	*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 09:57*	*EPA 8021B*	
Xylenes (total)	ND	0.00204	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 09:57	EPA 8021B	
Total BTEX	ND	0.00102	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 09:57	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.5	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C12-C28	ND	25.5	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C28-C35	ND	25.5	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*109 %*	*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*108 %*	*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.5	mg/kg dry	1	[CALC]	12/11/23 16:03	12/12/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**12.4**	1.02	mg/kg dry	1	P3L1513	12/15/23 16:32	12/17/23 19:11	EPA 300.0	
% Moisture	**2.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-356 @ 8 IN

3L07004-22 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00102	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 10:22	EPA 8021B	
Toluene	ND	0.00102	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 10:22	EPA 8021B	
Ethylbenzene	ND	0.00102	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 10:22	EPA 8021B	
Xylene (p/m)	ND	0.00204	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 10:22	EPA 8021B	
Xylene (o)	ND	0.00102	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 10:22	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*92.4 %*		*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 10:22*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*119 %*		*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 10:22*	*EPA 8021B*	
Xylenes (total)	ND	0.00204	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 10:22	EPA 8021B	
Total BTEX	ND	0.00102	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 10:22	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.5	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C12-C28	ND	25.5	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C28-C35	ND	25.5	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*80.3 %*		*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*92.7 %*		*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.5	mg/kg dry	1	[CALC]	12/11/23 16:03	12/12/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**12.6**	1.02	mg/kg dry	1	P3L1513	12/15/23 16:32	12/17/23 19:25	EPA 300.0	
% Moisture	**2.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-357 @ 8 IN

3L07004-23 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00102	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 11:35	EPA 8021B	
Toluene	ND	0.00102	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 11:35	EPA 8021B	
Ethylbenzene	ND	0.00102	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 11:35	EPA 8021B	
Xylene (p/m)	ND	0.00204	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 11:35	EPA 8021B	
Xylene (o)	ND	0.00102	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 11:35	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*92.3 %*	*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 11:35*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*120 %*	*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 11:35*	*EPA 8021B*	
Xylenes (total)	ND	0.00204	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 11:35	EPA 8021B	
Total BTEX	ND	0.00102	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 11:35	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.5	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C12-C28	ND	25.5	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C28-C35	ND	25.5	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*80.4 %*	*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*94.4 %*	*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.5	mg/kg dry	1	[CALC]	12/11/23 16:03	12/12/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**12.2**	1.02	mg/kg dry	1	P3L1513	12/15/23 16:32	12/17/23 19:40	EPA 300.0	
% Moisture	**2.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-358 @ 8 IN

3L07004-24 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 11:59	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 11:59	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 11:59	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 11:59	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 11:59	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*92.6 %*	*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 11:59*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*119 %*	*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 11:59*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 11:59	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 11:59	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*77.7 %*	*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*90.7 %*	*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/11/23 16:03	12/12/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**246**	1.03	mg/kg dry	1	P3L1513	12/15/23 16:32	12/17/23 19:54	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-359 @ 8 IN

3L07004-25 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 12:23	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 12:23	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 12:23	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 12:23	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 12:23	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*92.1 %*	*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 12:23*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*121 %*	*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 12:23*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 12:23	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 12:23	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*81.5 %*	*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*95.4 %*	*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/11/23 16:03	12/12/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**15.2**	1.03	mg/kg dry	1	P3L1513	12/15/23 16:32	12/17/23 20:08	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-360 @ 8 IN

3L07004-26 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 12:48	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 12:48	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 12:48	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 12:48	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 12:48	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*91.8 %*		*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 12:48*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*119 %*		*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 12:48*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 12:48	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 12:48	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L1113	12/11/23 16:03	12/12/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*81.1 %*		*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*95.6 %*		*70-130*		*P3L1113*	*12/11/23 16:03*	*12/12/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/11/23 16:03	12/12/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**13.9**	1.03	mg/kg dry	1	P3L1513	12/15/23 16:32	12/17/23 20:23	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-361 @ 8 IN

3L07004-27 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 13:12	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 13:12	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 13:12	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 13:12	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 13:12	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*92.3 %*	*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 13:12*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*122 %*	*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 13:12*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 13:12	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 13:12	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 15:03	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 15:03	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 15:03	TPH 8015M	
Surrogate: 1-Chlorooctane		*79.3 %*	*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 15:03*	*TPH 8015M*	
Surrogate: o-Terphenyl		*88.4 %*	*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 15:03*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/12/23 11:05	12/12/23 15:03	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**9.28**	1.03	mg/kg dry	1	P3L1513	12/15/23 16:32	12/17/23 20:37	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-362 @ 8 IN

3L07004-28 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 13:37	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 13:37	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 13:37	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 13:37	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 13:37	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*120 %*	*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 13:37*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*92.1 %*	*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 13:37*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 13:37	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 13:37	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 15:27	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 15:27	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 15:27	TPH 8015M	
Surrogate: 1-Chlorooctane		*76.0 %*	*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 15:27*	*TPH 8015M*	
Surrogate: o-Terphenyl		*87.2 %*	*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 15:27*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/12/23 11:05	12/12/23 15:27	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**8.62**	1.03	mg/kg dry	1	P3L1513	12/15/23 16:32	12/17/23 20:51	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-363 @ 8 IN

3L07004-29 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 14:01	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 14:01	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 14:01	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 14:01	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 14:01	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*92.5 %*		*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 14:01*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*120 %*		*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 14:01*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 14:01	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 14:01	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 15:51	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 15:51	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 15:51	TPH 8015M	
Surrogate: 1-Chlorooctane	*80.8 %*		*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 15:51*	*TPH 8015M*	
Surrogate: o-Terphenyl	*91.0 %*		*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 15:51*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/12/23 11:05	12/12/23 15:51	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**7.24**	1.03	mg/kg dry	1	P3L1514	12/15/23 16:36	12/17/23 22:17	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-364 @ 8 IN

3L07004-30 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 14:26	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 14:26	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 14:26	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 14:26	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 14:26	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*92.2 %*	*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 14:26*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*120 %*	*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 14:26*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 14:26	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 14:26	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 16:14	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 16:14	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 16:14	TPH 8015M	
Surrogate: 1-Chlorooctane		*77.6 %*	*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 16:14*	*TPH 8015M*	
Surrogate: o-Terphenyl		*87.6 %*	*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 16:14*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/12/23 11:05	12/12/23 16:14	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**8.99**	1.03	mg/kg dry	1	P3L1514	12/15/23 16:36	12/17/23 23:00	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-365 @ 8 IN

3L07004-31 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 14:50	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 14:50	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 14:50	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 14:50	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 14:50	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*121 %*	*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 14:50*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*91.8 %*	*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 14:50*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 14:50	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 14:50	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 16:38	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 16:38	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 16:38	TPH 8015M	
Surrogate: 1-Chlorooctane		*69.3 %*	*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 16:38*	*TPH 8015M*	*S-GC*
Surrogate: o-Terphenyl		*77.8 %*	*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 16:38*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/12/23 11:05	12/12/23 16:38	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**10.8**	1.03	mg/kg dry	1	P3L1514	12/15/23 16:36	12/17/23 23:15	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-366 @ 8 IN

3L07004-32 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00102	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 15:14	EPA 8021B	
Toluene	ND	0.00102	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 15:14	EPA 8021B	
Ethylbenzene	ND	0.00102	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 15:14	EPA 8021B	
Xylene (p/m)	ND	0.00204	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 15:14	EPA 8021B	
Xylene (o)	ND	0.00102	mg/kg dry	1	P3L1507	12/15/23 13:56	12/16/23 15:14	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*91.7 %*		*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 15:14*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*120 %*		*80-120*		*P3L1507*	*12/15/23 13:56*	*12/16/23 15:14*	*EPA 8021B*	
Xylenes (total)	ND	0.00204	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 15:14	EPA 8021B	
Total BTEX	ND	0.00102	mg/kg dry	1	[CALC]	12/15/23 13:56	12/16/23 15:14	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.5	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 17:02	TPH 8015M	
>C12-C28	ND	25.5	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 17:02	TPH 8015M	
>C28-C35	ND	25.5	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 17:02	TPH 8015M	
Surrogate: 1-Chlorooctane	*75.3 %*		*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 17:02*	*TPH 8015M*	
Surrogate: o-Terphenyl	*86.3 %*		*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 17:02*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.5	mg/kg dry	1	[CALC]	12/12/23 11:05	12/12/23 17:02	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**16.0**	1.02	mg/kg dry	1	P3L1514	12/15/23 16:36	12/17/23 23:29	EPA 300.0	
% Moisture	**2.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-367 @ 8 IN

3L07004-33 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00102	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 14:06	EPA 8021B	
Toluene	ND	0.00102	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 14:06	EPA 8021B	
Ethylbenzene	ND	0.00102	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 14:06	EPA 8021B	
Xylene (p/m)	ND	0.00204	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 14:06	EPA 8021B	
Xylene (o)	ND	0.00102	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 14:06	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*91.4 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 14:06*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*122 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 14:06*	*EPA 8021B*	*S-GC*
Xylenes (total)	ND	0.00204	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 14:06	EPA 8021B	
Total BTEX	ND	0.00102	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 14:06	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.5	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 17:26	TPH 8015M	
>C12-C28	ND	25.5	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 17:26	TPH 8015M	
>C28-C35	ND	25.5	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 17:26	TPH 8015M	
Surrogate: 1-Chlorooctane		*76.1 %*	*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 17:26*	*TPH 8015M*	
Surrogate: o-Terphenyl		*87.6 %*	*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 17:26*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.5	mg/kg dry	1	[CALC]	12/12/23 11:05	12/12/23 17:26	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**13.4**	1.02	mg/kg dry	1	P3L1514	12/15/23 16:36	12/17/23 23:43	EPA 300.0	
% Moisture	**2.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-368 @ 8 IN

3L07004-34 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 14:31	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 14:31	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 14:31	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 14:31	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 14:31	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*91.5 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 14:31*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*122 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 14:31*	*EPA 8021B*	*S-GC*
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 14:31	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 14:31	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 17:49	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 17:49	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 17:49	TPH 8015M	
Surrogate: 1-Chlorooctane		*77.1 %*	*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 17:49*	*TPH 8015M*	
Surrogate: o-Terphenyl		*88.6 %*	*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 17:49*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/12/23 11:05	12/12/23 17:49	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**30.6**	1.04	mg/kg dry	1	P3L1514	12/15/23 16:36	12/17/23 23:58	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-369 @ 8 IN

3L07004-35 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 14:55	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 14:55	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 14:55	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 14:55	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 14:55	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*91.7 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 14:55*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*122 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 14:55*	*EPA 8021B*	*S-GC*
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 14:55	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 14:55	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 18:13	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 18:13	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 18:13	TPH 8015M	
Surrogate: 1-Chlorooctane		*75.8 %*	*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 18:13*	*TPH 8015M*	
Surrogate: o-Terphenyl		*87.4 %*	*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 18:13*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/12/23 11:05	12/12/23 18:13	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**44.8**	1.03	mg/kg dry	1	P3L1514	12/15/23 16:36	12/18/23 00:12	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-370 @ 8 IN

3L07004-36 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 15:20	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 15:20	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 15:20	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 15:20	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 15:20	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*122 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 15:20*	*EPA 8021B*	*S-GC*
Surrogate: 1,4-Difluorobenzene		*92.0 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 15:20*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 15:20	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 15:20	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 18:37	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 18:37	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 18:37	TPH 8015M	
Surrogate: 1-Chlorooctane		*77.1 %*	*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 18:37*	*TPH 8015M*	
Surrogate: o-Terphenyl		*89.3 %*	*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 18:37*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/12/23 11:05	12/12/23 18:37	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**41.3**	1.03	mg/kg dry	1	P3L1514	12/15/23 16:36	12/18/23 00:26	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-371 @ 8 IN

3L07004-37 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00102	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 15:44	EPA 8021B	
Toluene	ND	0.00102	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 15:44	EPA 8021B	
Ethylbenzene	ND	0.00102	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 15:44	EPA 8021B	
Xylene (p/m)	ND	0.00204	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 15:44	EPA 8021B	
Xylene (o)	ND	0.00102	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 15:44	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*122 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 15:44*	*EPA 8021B*	*S-GC*
Surrogate: 1,4-Difluorobenzene		*91.7 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 15:44*	*EPA 8021B*	
Xylenes (total)	ND	0.00204	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 15:44	EPA 8021B	
Total BTEX	ND	0.00102	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 15:44	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.5	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 19:48	TPH 8015M	
>C12-C28	ND	25.5	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 19:48	TPH 8015M	
>C28-C35	ND	25.5	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 19:48	TPH 8015M	
Surrogate: 1-Chlorooctane		*74.0 %*	*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 19:48*	*TPH 8015M*	
Surrogate: o-Terphenyl		*84.2 %*	*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 19:48*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.5	mg/kg dry	1	[CALC]	12/12/23 11:05	12/12/23 19:48	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**18.0**	1.02	mg/kg dry	1	P3L1514	12/15/23 16:36	12/18/23 00:40	EPA 300.0	
% Moisture	**2.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-372 @ 8 IN

3L07004-38 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 16:09	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 16:09	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 16:09	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 16:09	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 16:09	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*91.8 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 16:09*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*123 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 16:09*	*EPA 8021B*	*S-GC*
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 16:09	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 16:09	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 20:11	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 20:11	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 20:11	TPH 8015M	
Surrogate: 1-Chlorooctane		*75.7 %*	*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 20:11*	*TPH 8015M*	
Surrogate: o-Terphenyl		*87.1 %*	*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 20:11*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/12/23 11:05	12/12/23 20:11	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**47.7**	1.04	mg/kg dry	1	P3L1514	12/15/23 16:36	12/18/23 00:55	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-373 @ 8 IN

3L07004-39 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 16:33	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 16:33	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 16:33	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 16:33	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 16:33	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*123 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 16:33*	*EPA 8021B*	*S-GC*
Surrogate: 1,4-Difluorobenzene		*91.7 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 16:33*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 16:33	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 16:33	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 20:35	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 20:35	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 20:35	TPH 8015M	
Surrogate: 1-Chlorooctane		*67.6 %*	*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 20:35*	*TPH 8015M*	*S-GC*
Surrogate: o-Terphenyl		*77.8 %*	*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 20:35*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	12/12/23 11:05	12/12/23 20:35	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**21.4**	1.06	mg/kg dry	1	P3L1514	12/15/23 16:36	12/18/23 01:37	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-374 @ 8 IN

3L07004-40 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 16:57	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 16:57	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 16:57	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 16:57	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 16:57	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*123 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 16:57*	*EPA 8021B*	*S-GC*
Surrogate: 1,4-Difluorobenzene		*92.2 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 16:57*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 16:57	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 16:57	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 20:59	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 20:59	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 20:59	TPH 8015M	
Surrogate: 1-Chlorooctane		*77.3 %*	*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 20:59*	*TPH 8015M*	
Surrogate: o-Terphenyl		*90.5 %*	*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 20:59*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/12/23 11:05	12/12/23 20:59	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**16.1**	1.03	mg/kg dry	1	P3L1514	12/15/23 16:36	12/18/23 02:20	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-375 @ 8 IN

3L07004-41 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 17:22	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 17:22	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 17:22	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 17:22	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 17:22	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*91.8 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 17:22*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*123 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 17:22*	*EPA 8021B*	*S-GC*
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 17:22	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 17:22	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 21:23	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 21:23	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 21:23	TPH 8015M	
Surrogate: 1-Chlorooctane		*58.2 %*	*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 21:23*	*TPH 8015M*	*S-GC1*
Surrogate: o-Terphenyl		*66.9 %*	*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 21:23*	*TPH 8015M*	*S-GC1*
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/12/23 11:05	12/12/23 21:23	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**46.7**	1.04	mg/kg dry	1	P3L1514	12/15/23 16:36	12/18/23 02:35	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-376 @ 1FT

3L07004-42 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 17:46	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 17:46	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 17:46	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 17:46	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 17:46	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*92.1 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 17:46*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*123 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 17:46*	*EPA 8021B*	*S-GC*
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 17:46	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 17:46	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 21:46	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 21:46	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 21:46	TPH 8015M	
Surrogate: 1-Chlorooctane		*75.4 %*	*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 21:46*	*TPH 8015M*	
Surrogate: o-Terphenyl		*88.1 %*	*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 21:46*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/12/23 11:05	12/12/23 21:46	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**11.7**	1.03	mg/kg dry	1	P3L1514	12/15/23 16:36	12/18/23 02:49	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-377 @ 1FT

3L07004-43 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 19:00	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 19:00	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 19:00	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 19:00	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 19:00	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*92.3 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 19:00*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*123 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 19:00*	*EPA 8021B*	*S-GC*
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 19:00	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 19:00	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 22:10	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 22:10	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 22:10	TPH 8015M	
Surrogate: 1-Chlorooctane		*70.9 %*	*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 22:10*	*TPH 8015M*	
Surrogate: o-Terphenyl		*84.4 %*	*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 22:10*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/12/23 11:05	12/12/23 22:10	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**30.4**	1.04	mg/kg dry	1	P3L1514	12/15/23 16:36	12/18/23 03:03	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-378 @ 1FT

3L07004-44 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 19:24	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 19:24	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 19:24	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 19:24	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 19:24	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*122 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 19:24*	*EPA 8021B*	*S-GC*
Surrogate: 1,4-Difluorobenzene		*92.2 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 19:24*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 19:24	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 19:24	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 22:34	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 22:34	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 22:34	TPH 8015M	
Surrogate: 1-Chlorooctane		*71.9 %*	*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 22:34*	*TPH 8015M*	
Surrogate: o-Terphenyl		*83.9 %*	*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 22:34*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/12/23 11:05	12/12/23 22:34	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**12.7**	1.03	mg/kg dry	1	P3L1514	12/15/23 16:36	12/18/23 03:18	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-379 @ 1FT

3L07004-45 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 19:48	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 19:48	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 19:48	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 19:48	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 19:48	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*92.3 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 19:48*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*122 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 19:48*	*EPA 8021B*	*S-GC*
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 19:48	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 19:48	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 22:57	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 22:57	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 22:57	TPH 8015M	
Surrogate: 1-Chlorooctane		*78.3 %*	*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 22:57*	*TPH 8015M*	
Surrogate: o-Terphenyl		*91.8 %*	*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 22:57*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/12/23 11:05	12/12/23 22:57	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**58.7**	1.04	mg/kg dry	1	P3L1514	12/15/23 16:36	12/18/23 03:32	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-380 @ 1FT

3L07004-46 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 20:13	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 20:13	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 20:13	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 20:13	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 20:13	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*92.5 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 20:13*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*123 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 20:13*	*EPA 8021B*	*S-GC*
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 20:13	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 20:13	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 23:21	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 23:21	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L1214	12/12/23 11:05	12/12/23 23:21	TPH 8015M	
Surrogate: 1-Chlorooctane		*72.6 %*	*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 23:21*	*TPH 8015M*	
Surrogate: o-Terphenyl		*84.3 %*	*70-130*		*P3L1214*	*12/12/23 11:05*	*12/12/23 23:21*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/12/23 11:05	12/12/23 23:21	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**56.3**	1.04	mg/kg dry	1	P3L1514	12/15/23 16:36	12/18/23 03:46	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-381 @ 1FT

3L07004-47 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 20:37	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 20:37	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 20:37	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 20:37	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 20:37	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*92.6 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 20:37*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*122 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 20:37*	*EPA 8021B*	*S-GC*
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 20:37	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 20:37	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 02:32	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 02:32	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 02:32	TPH 8015M	
Surrogate: 1-Chlorooctane		*75.0 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 02:32*	*TPH 8015M*	
Surrogate: o-Terphenyl		*85.3 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 02:32*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/12/23 11:07	12/13/23 02:32	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**10.2**	1.04	mg/kg dry	1	P3L1514	12/15/23 16:36	12/18/23 04:01	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-382 @ 1FT

3L07004-48 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 21:01	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 21:01	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 21:01	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 21:01	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 21:01	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*92.7 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 21:01*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*122 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 21:01*	*EPA 8021B*	*S-GC*
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 21:01	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 21:01	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 02:56	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 02:56	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 02:56	TPH 8015M	
Surrogate: 1-Chlorooctane		*73.9 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 02:56*	*TPH 8015M*	
Surrogate: o-Terphenyl		*83.3 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 02:56*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/12/23 11:07	12/13/23 02:56	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**31.9**	1.03	mg/kg dry	1	P3L1514	12/15/23 16:36	12/18/23 04:15	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1506 - * DEFAULT PREP *** **										
Blank (P3L1506-BLK1)				Prepared & Analyzed: 12/15/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 4-Bromofluorobenzene	*0.141*		*"*	*0.120*		*117*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.110*		*"*	*0.120*		*91.8*	*80-120*			
LCS (P3L1506-BS1)				Prepared & Analyzed: 12/15/23						
Benzene	0.115	0.00100	mg/kg	0.100		115	80-120			
Toluene	0.106	0.00100	"	0.100		106	80-120			
Ethylbenzene	0.116	0.00100	"	0.100		116	80-120			
Xylene (p/m)	0.224	0.00200	"	0.200		112	80-120			
Xylene (o)	0.102	0.00100	"	0.100		102	80-120			
Surrogate: 4-Bromofluorobenzene	*0.137*		*"*	*0.120*		*114*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.112*		*"*	*0.120*		*93.1*	*80-120*			
LCS Dup (P3L1506-BSD1)				Prepared & Analyzed: 12/15/23						
Benzene	0.115	0.00100	mg/kg	0.100		115	80-120	0.435	20	
Toluene	0.106	0.00100	"	0.100		106	80-120	0.302	20	
Ethylbenzene	0.115	0.00100	"	0.100		115	80-120	0.788	20	
Xylene (p/m)	0.223	0.00200	"	0.200		111	80-120	0.376	20	
Xylene (o)	0.102	0.00100	"	0.100		102	80-120	0.147	20	
Surrogate: 4-Bromofluorobenzene	*0.139*		*"*	*0.120*		*116*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.112*		*"*	*0.120*		*93.3*	*80-120*			
Calibration Blank (P3L1506-CCB1)				Prepared & Analyzed: 12/15/23						
Benzene	0.0800		ug/kg							
Toluene	0.210		"							
Ethylbenzene	0.0800		"							
Xylene (p/m)	0.150		"							
Xylene (o)	0.0600		"							
Surrogate: 1,4-Difluorobenzene	*0.110*		*"*	*0.120*		*91.9*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.140*		*"*	*0.120*		*116*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1506 - * DEFAULT PREP *** **										
Calibration Blank (P3L1506-CCB2)				Prepared & Analyzed: 12/15/23						
Benzene	0.110		ug/kg							
Toluene	0.160		"							
Ethylbenzene	0.0700		"							
Xylene (p/m)	0.150		"							
Xylene (o)	0.0900		"							
Surrogate: 4-Bromofluorobenzene	*0.142*		*"*	*0.120*		*118*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.111*		*"*	*0.120*		*92.1*	*80-120*			
Calibration Blank (P3L1506-CCB3)				Prepared: 12/15/23 Analyzed: 12/16/23						
Benzene	0.150		ug/kg							
Toluene	0.220		"							
Ethylbenzene	0.660		"							
Xylene (p/m)	0.830		"							
Xylene (o)	0.780		"							
Surrogate: 1,4-Difluorobenzene	*0.111*		*"*	*0.120*		*92.6*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.144*		*"*	*0.120*		*120*	*80-120*			
Calibration Check (P3L1506-CCV1)				Prepared & Analyzed: 12/15/23						
Benzene	0.107	0.00100	mg/kg	0.100		107	80-120			
Toluene	0.0974	0.00100	"	0.100		97.4	80-120			
Ethylbenzene	0.0999	0.00100	"	0.100		99.9	80-120			
Xylene (p/m)	0.205	0.00200	"	0.200		103	80-120			
Xylene (o)	0.0936	0.00100	"	0.100		93.6	80-120			
Surrogate: 4-Bromofluorobenzene	*0.138*		*"*	*0.120*		*115*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.112*		*"*	*0.120*		*93.3*	*75-125*			
Calibration Check (P3L1506-CCV2)				Prepared & Analyzed: 12/15/23						
Benzene	0.118	0.00100	mg/kg	0.100		118	80-120			
Toluene	0.106	0.00100	"	0.100		106	80-120			
Ethylbenzene	0.107	0.00100	"	0.100		107	80-120			
Xylene (p/m)	0.217	0.00200	"	0.200		109	80-120			
Xylene (o)	0.101	0.00100	"	0.100		101	80-120			
Surrogate: 1,4-Difluorobenzene	*0.113*		*"*	*0.120*		*94.1*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.138*		*"*	*0.120*		*115*	*75-125*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1506 - * DEFAULT PREP *** **										
Calibration Check (P3L1506-CCV3)				Prepared: 12/15/23 Analyzed: 12/16/23						
Benzene	0.119	0.00100	mg/kg	0.100		119	80-120			
Toluene	0.110	0.00100	"	0.100		110	80-120			
Ethylbenzene	0.110	0.00100	"	0.100		110	80-120			
Xylene (p/m)	0.223	0.00200	"	0.200		111	80-120			
Xylene (o)	0.104	0.00100	"	0.100		104	80-120			
Surrogate: 4-Bromofluorobenzene	*0.138*		"	*0.120*		*115*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*95.2*	*75-125*			
Matrix Spike (P3L1506-MS1)		**Source: 3L07003-17**		Prepared: 12/15/23 Analyzed: 12/16/23						
Benzene	0.0919	0.00103	mg/kg dry	0.103	ND	89.1	80-120			
Toluene	0.0683	0.00103	"	0.103	ND	66.2	80-120			QM-05
Ethylbenzene	0.0774	0.00103	"	0.103	ND	75.1	80-120			QM-05
Xylene (p/m)	0.149	0.00206	"	0.206	ND	72.2	80-120			QM-05
Xylene (o)	0.0689	0.00103	"	0.103	ND	66.9	80-120			QM-05
Surrogate: 4-Bromofluorobenzene	*0.141*		"	*0.124*		*114*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.118*		"	*0.124*		*95.0*	*80-120*			
Matrix Spike Dup (P3L1506-MSD1)		**Source: 3L07003-17**		Prepared: 12/15/23 Analyzed: 12/16/23						
Benzene	0.0885	0.00103	mg/kg dry	0.103	ND	85.9	80-120	3.73	20	
Toluene	0.0673	0.00103	"	0.103	ND	65.3	80-120	1.49	20	QM-05
Ethylbenzene	0.0762	0.00103	"	0.103	ND	73.9	80-120	1.52	20	QM-05
Xylene (p/m)	0.149	0.00206	"	0.206	ND	72.4	80-120	0.304	20	QM-05
Xylene (o)	0.0668	0.00103	"	0.103	ND	64.8	80-120	3.10	20	QM-05
Surrogate: 4-Bromofluorobenzene	*0.144*		"	*0.124*		*116*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.117*		"	*0.124*		*95.0*	*80-120*			
Batch P3L1507 - * DEFAULT PREP *** **										
Blank (P3L1507-BLK1)				Prepared: 12/15/23 Analyzed: 12/16/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 4-Bromofluorobenzene	*0.145*		"	*0.120*		*121*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.111*		"	*0.120*		*92.7*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1507 - * DEFAULT PREP *** **										
LCS (P3L1507-BS1)				Prepared: 12/15/23 Analyzed: 12/16/23						
Benzene	0.113	0.00100	mg/kg	0.100		113	80-120			
Toluene	0.100	0.00100	"	0.100		100	80-120			
Ethylbenzene	0.107	0.00100	"	0.100		107	80-120			
Xylene (p/m)	0.207	0.00200	"	0.200		103	80-120			
Xylene (o)	0.0948	0.00100	"	0.100		94.8	80-120			
Surrogate: 1,4-Difluorobenzene	*0.114*		*"*	*0.120*		*95.0*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.137*		*"*	*0.120*		*114*	*80-120*			
LCS Dup (P3L1507-BSD1)				Prepared: 12/15/23 Analyzed: 12/16/23						
Benzene	0.103	0.00100	mg/kg	0.100		103	80-120	8.80	20	
Toluene	0.0896	0.00100	"	0.100		89.6	80-120	11.0	20	
Ethylbenzene	0.0954	0.00100	"	0.100		95.4	80-120	11.7	20	
Xylene (p/m)	0.186	0.00200	"	0.200		93.0	80-120	10.6	20	
Xylene (o)	0.0840	0.00100	"	0.100		84.0	80-120	12.0	20	
Surrogate: 4-Bromofluorobenzene	*0.138*		*"*	*0.120*		*115*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.114*		*"*	*0.120*		*95.1*	*80-120*			
Calibration Blank (P3L1507-CCB1)				Prepared: 12/15/23 Analyzed: 12/16/23						
Benzene	0.150		ug/kg							
Toluene	0.220		"							
Ethylbenzene	0.660		"							
Xylene (p/m)	0.830		"							
Xylene (o)	0.780		"							
Surrogate: 1,4-Difluorobenzene	*0.111*		*"*	*0.120*		*92.6*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.144*		*"*	*0.120*		*120*	*80-120*			
Calibration Blank (P3L1507-CCB2)				Prepared: 12/15/23 Analyzed: 12/16/23						
Benzene	0.130		ug/kg							
Toluene	0.170		"							
Ethylbenzene	0.180		"							
Xylene (p/m)	0.200		"							
Xylene (o)	0.180		"							
Surrogate: 4-Bromofluorobenzene	*0.144*		*"*	*0.120*		*120*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.111*		*"*	*0.120*		*92.2*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1507 - * DEFAULT PREP *** **										
Calibration Check (P3L1507-CCV2)				Prepared: 12/15/23 Analyzed: 12/16/23						
Benzene	0.119	0.00100	mg/kg	0.100		119	80-120			
Toluene	0.109	0.00100	"	0.100		109	80-120			
Ethylbenzene	0.109	0.00100	"	0.100		109	80-120			
Xylene (p/m)	0.220	0.00200	"	0.200		110	80-120			
Xylene (o)	0.103	0.00100	"	0.100		103	80-120			
Surrogate: 1,4-Difluorobenzene	*0.113*		"	*0.120*		*94.0*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.141*		"	*0.120*		*117*	*75-125*			
Calibration Check (P3L1507-CCV3)				Prepared: 12/15/23 Analyzed: 12/16/23						
Benzene	0.120	0.00100	mg/kg	0.100		120	80-120			
Toluene	0.111	0.00100	"	0.100		111	80-120			
Ethylbenzene	0.112	0.00100	"	0.100		112	80-120			
Xylene (p/m)	0.224	0.00200	"	0.200		112	80-120			
Xylene (o)	0.107	0.00100	"	0.100		107	80-120			
Surrogate: 1,4-Difluorobenzene	*0.112*		"	*0.120*		*93.5*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.142*		"	*0.120*		*118*	*75-125*			
Matrix Spike (P3L1507-MS1)		**Source: 3L07004-13**		Prepared: 12/15/23 Analyzed: 12/16/23						
Benzene	0.105	0.00104	mg/kg dry	0.104	ND	100	80-120			
Toluene	0.0927	0.00104	"	0.104	ND	89.0	80-120			
Ethylbenzene	0.0966	0.00104	"	0.104	ND	92.7	80-120			
Xylene (p/m)	0.187	0.00208	"	0.208	ND	89.8	80-120			
Xylene (o)	0.0836	0.00104	"	0.104	ND	80.3	80-120			
Surrogate: 4-Bromofluorobenzene	*0.148*		"	*0.125*		*119*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.116*		"	*0.125*		*93.0*	*80-120*			
Matrix Spike Dup (P3L1507-MSD1)		**Source: 3L07004-13**		Prepared: 12/15/23 Analyzed: 12/16/23						
Benzene	0.0894	0.00104	mg/kg dry	0.104	ND	85.8	80-120	15.7	20	
Toluene	0.0766	0.00104	"	0.104	ND	73.5	80-120	19.0	20	QM-05
Ethylbenzene	0.0801	0.00104	"	0.104	ND	76.9	80-120	18.7	20	QM-05
Xylene (p/m)	0.158	0.00208	"	0.208	ND	76.0	80-120	16.6	20	QM-05
Xylene (o)	0.0709	0.00104	"	0.104	ND	68.1	80-120	16.4	20	QM-05
Surrogate: 1,4-Difluorobenzene	*0.116*		"	*0.125*		*93.1*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.149*		"	*0.125*		*119*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1705 - * DEFAULT PREP *** **										
Blank (P3L1705-BLK1)				Prepared & Analyzed: 12/17/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 1,4-Difluorobenzene	*0.109*		*"*	*0.120*		*90.9*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.144*		*"*	*0.120*		*120*	*80-120*			
LCS (P3L1705-BS1)				Prepared & Analyzed: 12/17/23						
Benzene	0.118	0.00100	mg/kg	0.100		118	80-120			
Toluene	0.108	0.00100	"	0.100		108	80-120			
Ethylbenzene	0.117	0.00100	"	0.100		117	80-120			
Xylene (p/m)	0.228	0.00200	"	0.200		114	80-120			
Xylene (o)	0.102	0.00100	"	0.100		102	80-120			
Surrogate: 4-Bromofluorobenzene	*0.140*		*"*	*0.120*		*117*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.111*		*"*	*0.120*		*92.6*	*80-120*			
LCS Dup (P3L1705-BSD1)				Prepared & Analyzed: 12/17/23						
Benzene	0.118	0.00100	mg/kg	0.100		118	80-120	0.314	20	
Toluene	0.108	0.00100	"	0.100		108	80-120	0.612	20	
Ethylbenzene	0.117	0.00100	"	0.100		117	80-120	0.299	20	
Xylene (p/m)	0.228	0.00200	"	0.200		114	80-120	0.175	20	
Xylene (o)	0.102	0.00100	"	0.100		102	80-120	0.304	20	
Surrogate: 1,4-Difluorobenzene	*0.111*		*"*	*0.120*		*92.8*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.140*		*"*	*0.120*		*116*	*80-120*			
Calibration Blank (P3L1705-CCB1)				Prepared & Analyzed: 12/17/23						
Benzene	0.120		ug/kg							
Toluene	0.140		"							
Ethylbenzene	0.150		"							
Xylene (p/m)	0.210		"							
Xylene (o)	0.150		"							
Surrogate: 1,4-Difluorobenzene	*0.109*		*"*	*0.120*		*90.9*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.143*		*"*	*0.120*		*119*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1705 - * DEFAULT PREP *** **										
Calibration Blank (P3L1705-CCB2)				Prepared & Analyzed: 12/17/23						
Benzene	0.150		ug/kg							
Toluene	0.140		"							
Ethylbenzene	0.100		"							
Xylene (p/m)	0.170		"							
Xylene (o)	0.120		"							
Surrogate: 1,4-Difluorobenzene	*0.110*		*"*	*0.120*		*91.6*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.149*		*"*	*0.120*		*124*	*80-120*			*S-GC*
Calibration Blank (P3L1705-CCB3)				Prepared: 12/17/23 Analyzed: 12/18/23						
Benzene	0.0900		ug/kg							
Toluene	0.0900		"							
Ethylbenzene	0.100		"							
Xylene (p/m)	0.160		"							
Xylene (o)	0.0800		"							
Surrogate: 4-Bromofluorobenzene	*0.147*		*"*	*0.120*		*123*	*80-120*			*S-GC*
Surrogate: 1,4-Difluorobenzene	*0.112*		*"*	*0.120*		*93.1*	*80-120*			
Calibration Check (P3L1705-CCV1)				Prepared & Analyzed: 12/17/23						
Benzene	0.117	0.00100	mg/kg	0.100		117	80-120			
Toluene	0.108	0.00100	"	0.100		108	80-120			
Ethylbenzene	0.111	0.00100	"	0.100		111	80-120			
Xylene (p/m)	0.226	0.00200	"	0.200		113	80-120			
Xylene (o)	0.103	0.00100	"	0.100		103	80-120			
Surrogate: 4-Bromofluorobenzene	*0.131*		*"*	*0.120*		*109*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.105*		*"*	*0.120*		*87.6*	*75-125*			
Calibration Check (P3L1705-CCV2)				Prepared & Analyzed: 12/17/23						
Benzene	0.111	0.00100	mg/kg	0.100		111	80-120			
Toluene	0.101	0.00100	"	0.100		101	80-120			
Ethylbenzene	0.104	0.00100	"	0.100		104	80-120			
Xylene (p/m)	0.209	0.00200	"	0.200		105	80-120			
Xylene (o)	0.0989	0.00100	"	0.100		98.9	80-120			
Surrogate: 1,4-Difluorobenzene	*0.113*		*"*	*0.120*		*94.0*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.145*		*"*	*0.120*		*121*	*75-125*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1705 - * DEFAULT PREP *** **										
Calibration Check (P3L1705-CCV3)				Prepared & Analyzed: 12/17/23						
Benzene	0.0908	0.00100	mg/kg	0.100		90.8	80-120			
Toluene	0.0805	0.00100	"	0.100		80.5	80-120			
Ethylbenzene	0.0813	0.00100	"	0.100		81.3	80-120			
Xylene (p/m)	0.165	0.00200	"	0.200		82.5	80-120			
Xylene (o)	0.0804	0.00100	"	0.100		80.4	80-120			
Surrogate: 4-Bromofluorobenzene	*0.140*		"	*0.120*		*117*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*94.6*	*75-125*			
Matrix Spike (P3L1705-MS1)		**Source: 3L07004-33**		Prepared & Analyzed: 12/17/23						
Benzene	0.0728	0.00102	mg/kg dry	0.102	ND	71.3	80-120			QM-05
Toluene	0.0564	0.00102	"	0.102	ND	55.3	80-120			QM-05
Ethylbenzene	0.0531	0.00102	"	0.102	ND	52.1	80-120			QM-05
Xylene (p/m)	0.103	0.00204	"	0.204	ND	50.7	80-120			QM-05
Xylene (o)	0.0453	0.00102	"	0.102	ND	44.4	80-120			QM-05
Surrogate: 1,4-Difluorobenzene	*0.116*		"	*0.122*		*94.5*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.144*		"	*0.122*		*117*	*80-120*			
Matrix Spike Dup (P3L1705-MSD1)		**Source: 3L07004-33**		Prepared & Analyzed: 12/17/23						
Benzene	0.0749	0.00102	mg/kg dry	0.102	ND	73.4	80-120	2.89	20	QM-05
Toluene	0.0596	0.00102	"	0.102	ND	58.4	80-120	5.40	20	QM-05
Ethylbenzene	0.0577	0.00102	"	0.102	ND	56.6	80-120	8.32	20	QM-05
Xylene (p/m)	0.113	0.00204	"	0.204	ND	55.2	80-120	8.44	20	QM-05
Xylene (o)	0.0490	0.00102	"	0.102	ND	48.0	80-120	7.77	20	QM-05
Surrogate: 4-Bromofluorobenzene	*0.145*		"	*0.122*		*118*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.116*		"	*0.122*		*94.4*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1109 - TX 1005										
Blank (P3L1109-BLK1)				Prepared: 12/11/23 Analyzed: 12/12/23						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*82.4*		*"*	*100*		*82.4*	*70-130*			
Surrogate: o-Terphenyl	*47.6*		*"*	*50.0*		*95.2*	*70-130*			
LCS (P3L1109-BS1)				Prepared & Analyzed: 12/11/23						
C6-C12	888	25.0	mg/kg	1000		88.8	75-125			
>C12-C28	850	25.0	"	1000		85.0	75-125			
Surrogate: 1-Chlorooctane	*103*		*"*	*100*		*103*	*70-130*			
Surrogate: o-Terphenyl	*47.1*		*"*	*50.0*		*94.2*	*70-130*			
LCS Dup (P3L1109-BSD1)				Prepared & Analyzed: 12/11/23						
C6-C12	903	25.0	mg/kg	1000		90.3	75-125	1.58	20	
>C12-C28	869	25.0	"	1000		86.9	75-125	2.17	20	
Surrogate: 1-Chlorooctane	*106*		*"*	*100*		*106*	*70-130*			
Surrogate: o-Terphenyl	*47.3*		*"*	*50.0*		*94.6*	*70-130*			
Calibration Check (P3L1109-CCV1)				Prepared & Analyzed: 12/11/23						
C6-C12	526	25.0	mg/kg	500		105	85-115			
>C12-C28	557	25.0	"	500		111	85-115			
Surrogate: 1-Chlorooctane	*94.6*		*"*	*100*		*94.6*	*70-130*			
Surrogate: o-Terphenyl	*48.4*		*"*	*50.0*		*96.7*	*70-130*			
Calibration Check (P3L1109-CCV2)				Prepared: 12/11/23 Analyzed: 12/12/23						
C6-C12	529	25.0	mg/kg	500		106	85-115			
>C12-C28	560	25.0	"	500		112	85-115			
Surrogate: 1-Chlorooctane	*95.4*		*"*	*100*		*95.4*	*70-130*			
Surrogate: o-Terphenyl	*48.6*		*"*	*50.0*		*97.3*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1109 - TX 1005										
Calibration Check (P3L1109-CCV3)				Prepared: 12/11/23 Analyzed: 12/12/23						
C6-C12	511	25.0	mg/kg	500		102	85-115			
>C12-C28	543	25.0	"	500		109	85-115			
Surrogate: 1-Chlorooctane	*93.1*		*"*	*100*		*93.1*	*70-130*			
Surrogate: o-Terphenyl	*46.9*		*"*	*50.0*		*93.8*	*70-130*			
Batch P3L1113 - TX 1005										
Blank (P3L1113-BLK1)				Prepared: 12/11/23 Analyzed: 12/12/23						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*85.8*		*"*	*100*		*85.8*	*70-130*			
Surrogate: o-Terphenyl	*47.2*		*"*	*50.0*		*94.4*	*70-130*			
LCS (P3L1113-BS1)				Prepared: 12/11/23 Analyzed: 12/12/23						
C6-C12	830	25.0	mg/kg	1000		83.0	75-125			
>C12-C28	886	25.0	"	1000		88.6	75-125			
Surrogate: 1-Chlorooctane	*109*		*"*	*100*		*109*	*70-130*			
Surrogate: o-Terphenyl	*48.0*		*"*	*50.0*		*96.0*	*70-130*			
LCS Dup (P3L1113-BSD1)				Prepared: 12/11/23 Analyzed: 12/12/23						
C6-C12	828	25.0	mg/kg	1000		82.8	75-125	0.332	20	
>C12-C28	887	25.0	"	1000		88.7	75-125	0.0271	20	
Surrogate: 1-Chlorooctane	*111*		*"*	*100*		*111*	*70-130*			
Surrogate: o-Terphenyl	*48.2*		*"*	*50.0*		*96.4*	*70-130*			
Calibration Check (P3L1113-CCV1)				Prepared: 12/11/23 Analyzed: 12/12/23						
C6-C12	491	25.0	mg/kg	500		98.3	85-115			
>C12-C28	555	25.0	"	500		111	85-115			
Surrogate: 1-Chlorooctane	*97.5*		*"*	*100*		*97.5*	*70-130*			
Surrogate: o-Terphenyl	*46.6*		*"*	*50.0*		*93.2*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1113 - TX 1005										
Calibration Check (P3L1113-CCV2)				Prepared: 12/11/23 Analyzed: 12/12/23						
C6-C12	493	25.0	mg/kg	500		98.5	85-115			
>C12-C28	575	25.0	"	500		115	85-115			
Surrogate: 1-Chlorooctane	*96.9*		*"*	*100*		*96.9*	*70-130*			
Surrogate: o-Terphenyl	*47.6*		*"*	*50.0*		*95.2*	*70-130*			
Duplicate (P3L1113-DUP1)		**Source: 3L07004-26**		Prepared: 12/11/23 Analyzed: 12/12/23						
C6-C12	12.3	25.8	mg/kg dry		11.2			8.76	20	
>C12-C28	ND	25.8	"		ND				20	
Surrogate: 1-Chlorooctane	*86.1*		*"*	*103*		*83.5*	*70-130*			
Surrogate: o-Terphenyl	*50.9*		*"*	*51.5*		*98.7*	*70-130*			
Batch P3L1214 - TX 1005										
Blank (P3L1214-BLK1)				Prepared & Analyzed: 12/12/23						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*89.6*		*"*	*100*		*89.6*	*70-130*			
Surrogate: o-Terphenyl	*51.6*		*"*	*50.0*		*103*	*70-130*			
LCS (P3L1214-BS1)				Prepared & Analyzed: 12/12/23						
C6-C12	1210	25.0	mg/kg	1000		121	75-125			
>C12-C28	1250	25.0	"	1000		125	75-125			
Surrogate: 1-Chlorooctane	*125*		*"*	*100*		*125*	*70-130*			
Surrogate: o-Terphenyl	*52.2*		*"*	*50.0*		*104*	*70-130*			
LCS Dup (P3L1214-BSD1)				Prepared & Analyzed: 12/12/23						
C6-C12	1270	25.0	mg/kg	1000		127	75-125	4.98	20	
>C12-C28	1300	25.0	"	1000		130	75-125	3.19	20	
Surrogate: 1-Chlorooctane	*124*		*"*	*100*		*124*	*70-130*			
Surrogate: o-Terphenyl	*51.6*		*"*	*50.0*		*103*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1214 - TX 1005										
Calibration Check (P3L1214-CCV1)				Prepared & Analyzed: 12/12/23						
C6-C12	528	25.0	mg/kg	500		106	85-115			
>C12-C28	567	25.0	"	500		113	85-115			
Surrogate: 1-Chlorooctane	*96.6*		*"*	*100*		*96.6*	*70-130*			
Surrogate: o-Terphenyl	*48.1*		*"*	*50.0*		*96.1*	*70-130*			
Calibration Check (P3L1214-CCV2)				Prepared & Analyzed: 12/12/23						
C6-C12	513	25.0	mg/kg	500		103	85-115			
>C12-C28	555	25.0	"	500		111	85-115			
Surrogate: 1-Chlorooctane	*92.8*		*"*	*100*		*92.8*	*70-130*			
Surrogate: o-Terphenyl	*46.4*		*"*	*50.0*		*92.8*	*70-130*			
Batch P3L1215 - TX 1005										
Blank (P3L1215-BLK1)				Prepared: 12/12/23 Analyzed: 12/13/23						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*83.9*		*"*	*100*		*83.9*	*70-130*			
Surrogate: o-Terphenyl	*48.8*		*"*	*50.0*		*97.5*	*70-130*			
LCS (P3L1215-BS1)				Prepared: 12/12/23 Analyzed: 12/13/23						
C6-C12	898	25.0	mg/kg	1000		89.8	75-125			
>C12-C28	870	25.0	"	1000		87.0	75-125			
Surrogate: 1-Chlorooctane	*101*		*"*	*100*		*101*	*70-130*			
Surrogate: o-Terphenyl	*48.3*		*"*	*50.0*		*96.6*	*70-130*			
LCS Dup (P3L1215-BSD1)				Prepared: 12/12/23 Analyzed: 12/13/23						
C6-C12	912	25.0	mg/kg	1000		91.2	75-125	1.53	20	
>C12-C28	893	25.0	"	1000		89.3	75-125	2.60	20	
Surrogate: 1-Chlorooctane	*110*		*"*	*100*		*110*	*70-130*			
Surrogate: o-Terphenyl	*51.1*		*"*	*50.0*		*102*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1215 - TX 1005										
Calibration Check (P3L1215-CCV1)				Prepared: 12/12/23 Analyzed: 12/13/23						
C6-C12	520	25.0	mg/kg	500		104	85-115			
>C12-C28	558	25.0	"	500		112	85-115			
Surrogate: 1-Chlorooctane	*94.5*		*"*	*100*		*94.5*	*70-130*			
Surrogate: o-Terphenyl	*47.1*		*"*	*50.0*		*94.2*	*70-130*			
Calibration Check (P3L1215-CCV2)				Prepared: 12/12/23 Analyzed: 12/13/23						
C6-C12	537	25.0	mg/kg	500		107	85-115			
>C12-C28	572	25.0	"	500		114	85-115			
Surrogate: 1-Chlorooctane	*96.1*		*"*	*100*		*96.1*	*70-130*			
Surrogate: o-Terphenyl	*48.5*		*"*	*50.0*		*97.0*	*70-130*			
Duplicate (P3L1215-DUP1)	**Source: 3L07005-18**			Prepared: 12/12/23 Analyzed: 12/13/23						
C6-C12	24.8	27.8	mg/kg dry		24.6			0.945	20	
>C12-C28	ND	27.8	"		ND				20	
Surrogate: 1-Chlorooctane	*82.4*		*"*	*111*		*74.1*	*70-130*			
Surrogate: o-Terphenyl	*49.0*		*"*	*55.6*		*88.2*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1110 - * DEFAULT PREP *** **										
Blank (P3L1110-BLK1)				Prepared & Analyzed: 12/11/23						
% Moisture	ND	0.1	%							
Blank (P3L1110-BLK2)				Prepared & Analyzed: 12/11/23						
% Moisture	ND	0.1	%							
Blank (P3L1110-BLK3)				Prepared & Analyzed: 12/11/23						
% Moisture	ND	0.1	%							
Blank (P3L1110-BLK4)				Prepared & Analyzed: 12/11/23						
% Moisture	ND	0.1	%							
Blank (P3L1110-BLK5)				Prepared & Analyzed: 12/11/23						
% Moisture	ND	0.1	%							
Blank (P3L1110-BLK6)				Prepared & Analyzed: 12/11/23						
% Moisture	ND	0.1	%							
Blank (P3L1110-BLK7)				Prepared & Analyzed: 12/11/23						
% Moisture	ND	0.1	%							
Duplicate (P3L1110-DUP1)	**Source: 3L07003-10**			Prepared & Analyzed: 12/11/23						
% Moisture	5.0	0.1	%		4.0			22.2	20	
Duplicate (P3L1110-DUP2)	**Source: 3L07003-20**			Prepared & Analyzed: 12/11/23						
% Moisture	4.0	0.1	%		4.0			0.00	20	
Duplicate (P3L1110-DUP3)	**Source: 3L07004-11**			Prepared & Analyzed: 12/11/23						
% Moisture	5.0	0.1	%		5.0			0.00	20	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1110 - * DEFAULT PREP *** **										
Duplicate (P3L1110-DUP4)		**Source: 3L07004-21**		Prepared & Analyzed: 12/11/23						
% Moisture	2.0	0.1	%		2.0			0.00	20	
Duplicate (P3L1110-DUP5)		**Source: 3L07004-36**		Prepared & Analyzed: 12/11/23						
% Moisture	3.0	0.1	%		3.0			0.00	20	
Duplicate (P3L1110-DUP6)		**Source: 3L07004-46**		Prepared & Analyzed: 12/11/23						
% Moisture	4.0	0.1	%		4.0			0.00	20	
Duplicate (P3L1110-DUP7)		**Source: 3L07005-13**		Prepared & Analyzed: 12/11/23						
% Moisture	8.0	0.1	%		8.0			0.00	20	
Duplicate (P3L1110-DUP8)		**Source: 3L07006-03**		Prepared & Analyzed: 12/11/23						
% Moisture	7.0	0.1	%		7.0			0.00	20	
Duplicate (P3L1110-DUP9)		**Source: 3L07006-18**		Prepared & Analyzed: 12/11/23						
% Moisture	11.0	0.1	%		11.0			0.00	20	
Duplicate (P3L1110-DUPA)		**Source: 3L07006-28**		Prepared & Analyzed: 12/11/23						
% Moisture	4.0	0.1	%		4.0			0.00	20	
Duplicate (P3L1110-DUPB)		**Source: 3L08006-06**		Prepared & Analyzed: 12/11/23						
% Moisture	11.0	0.1	%		11.0			0.00	20	
Duplicate (P3L1110-DUPC)		**Source: 3L08012-01**		Prepared & Analyzed: 12/11/23						
% Moisture	11.0	0.1	%		11.0			0.00	20	
Duplicate (P3L1110-DUPD)		**Source: 3L08013-15**		Prepared & Analyzed: 12/11/23						
% Moisture	6.0	0.1	%		7.0			15.4	20	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1308 - * DEFAULT PREP *** **										
Blank (P3L1308-BLK1)				Prepared: 12/13/23 Analyzed: 12/14/23						
Chloride	ND	1.00	mg/kg							
LCS (P3L1308-BS1)				Prepared: 12/13/23 Analyzed: 12/14/23						
Chloride	20.3		mg/kg	20.0		102	90-110			
LCS Dup (P3L1308-BSD1)				Prepared: 12/13/23 Analyzed: 12/14/23						
Chloride	21.2		mg/kg	20.0		106	90-110	4.17	10	
Calibration Check (P3L1308-CCV1)				Prepared & Analyzed: 12/13/23						
Chloride	21.3		mg/kg	20.0		107	90-110			
Calibration Check (P3L1308-CCV2)				Prepared: 12/13/23 Analyzed: 12/14/23						
Chloride	21.2		mg/kg	20.0		106	90-110			
Matrix Spike (P3L1308-MS1)		**Source: 3L07003-15**		Prepared: 12/13/23 Analyzed: 12/14/23						
Chloride	107		mg/kg	100	0.500	107	80-120			
Matrix Spike (P3L1308-MS2)		**Source: 3L07004-01**		Prepared: 12/13/23 Analyzed: 12/14/23						
Chloride	106		mg/kg	100	0.367	105	80-120			
Matrix Spike Dup (P3L1308-MSD1)		**Source: 3L07003-15**		Prepared: 12/13/23 Analyzed: 12/14/23						
Chloride	108		mg/kg	100	0.500	108	80-120	1.23	20	
Matrix Spike Dup (P3L1308-MSD2)		**Source: 3L07004-01**		Prepared: 12/13/23 Analyzed: 12/14/23						
Chloride	108		mg/kg	100	0.367	108	80-120	2.35	20	
Batch P3L1408 - * DEFAULT PREP *** **										
Blank (P3L1408-BLK1)				Prepared & Analyzed: 12/14/23						
Chloride	ND	1.00	mg/kg							

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1408 - * DEFAULT PREP *** **										
LCS (P3L1408-BS1)				Prepared & Analyzed: 12/14/23						
Chloride	20.4		mg/kg	20.0		102	90-110			
LCS Dup (P3L1408-BSD1)				Prepared & Analyzed: 12/14/23						
Chloride	20.1		mg/kg	20.0		100	90-110	1.70	10	
Calibration Check (P3L1408-CCV1)				Prepared & Analyzed: 12/14/23						
Chloride	20.9		mg/kg	20.0		104	90-110			
Calibration Check (P3L1408-CCV2)				Prepared & Analyzed: 12/14/23						
Chloride	20.9		mg/kg	20.0		104	90-110			
Matrix Spike (P3L1408-MS1)		**Source: 3L07004-05**		Prepared & Analyzed: 12/14/23						
Chloride	106		mg/kg	100	1.12	105	80-120			
Matrix Spike (P3L1408-MS2)		**Source: 3L14003-03**		Prepared: 12/14/23 Analyzed: 12/15/23						
Chloride	130		mg/kg	100	24.5	106	80-120			
Matrix Spike Dup (P3L1408-MSD1)		**Source: 3L07004-05**		Prepared & Analyzed: 12/14/23						
Chloride	105		mg/kg	100	1.12	104	80-120	0.838	20	
Matrix Spike Dup (P3L1408-MSD2)		**Source: 3L14003-03**		Prepared: 12/14/23 Analyzed: 12/15/23						
Chloride	130		mg/kg	100	24.5	105	80-120	0.618	20	
Batch P3L1511 - * DEFAULT PREP *** **										
Blank (P3L1511-BLK1)				Prepared: 12/15/23 Analyzed: 12/17/23						
Chloride	ND	1.00	mg/kg							

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1511 - * DEFAULT PREP *** **										
LCS (P3L1511-BS1)				Prepared: 12/15/23 Analyzed: 12/16/23						
Chloride	20.1		mg/kg	20.0		100	90-110			
LCS Dup (P3L1511-BSD1)				Prepared: 12/15/23 Analyzed: 12/16/23						
Chloride	20.3		mg/kg	20.0		102	90-110	1.14	10	
Calibration Check (P3L1511-CCV1)				Prepared: 12/15/23 Analyzed: 12/16/23						
Chloride	20.2		mg/kg	20.0		101	90-110			
Calibration Check (P3L1511-CCV2)				Prepared: 12/15/23 Analyzed: 12/16/23						
Chloride	19.8		mg/kg	20.0		99.1	90-110			
Matrix Spike (P3L1511-MS1)		**Source: 3L07004-07**		Prepared: 12/15/23 Analyzed: 12/16/23						
Chloride	105		mg/kg	100	0.674	104	80-120			
Matrix Spike (P3L1511-MS2)		**Source: 3L15005-09**		Prepared: 12/15/23 Analyzed: 12/16/23						
Chloride	101		mg/kg	100	0.279	101	80-120			
Matrix Spike Dup (P3L1511-MSD1)		**Source: 3L07004-07**		Prepared: 12/15/23 Analyzed: 12/16/23						
Chloride	107		mg/kg	100	0.674	106	80-120	2.11	20	
Matrix Spike Dup (P3L1511-MSD2)		**Source: 3L15005-09**		Prepared: 12/15/23 Analyzed: 12/16/23						
Chloride	102		mg/kg	100	0.279	102	80-120	1.27	20	
Batch P3L1513 - * DEFAULT PREP *** **										
Blank (P3L1513-BLK1)				Prepared: 12/15/23 Analyzed: 12/17/23						
Chloride	ND	1.00	mg/kg							

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1513 - * DEFAULT PREP *** **										
LCS (P3L1513-BS1)				Prepared: 12/15/23 Analyzed: 12/17/23						
Chloride	20.1		mg/kg	20.0		100	90-110			
LCS Dup (P3L1513-BSD1)				Prepared: 12/15/23 Analyzed: 12/17/23						
Chloride	19.8		mg/kg	20.0		99.2	90-110	1.05	10	
Calibration Check (P3L1513-CCV1)				Prepared: 12/15/23 Analyzed: 12/17/23						
Chloride	20.3		mg/kg	20.0		102	90-110			
Calibration Check (P3L1513-CCV2)				Prepared: 12/15/23 Analyzed: 12/17/23						
Chloride	20.6		mg/kg	20.0		103	90-110			
Matrix Spike (P3L1513-MS1)		**Source: 3L07004-09**		Prepared: 12/15/23 Analyzed: 12/17/23						
Chloride	104		mg/kg	100	0.737	104	80-120			
Matrix Spike (P3L1513-MS2)		**Source: 3L07004-19**		Prepared: 12/15/23 Analyzed: 12/17/23						
Chloride	106		mg/kg	100	0.889	105	80-120			
Matrix Spike Dup (P3L1513-MSD1)		**Source: 3L07004-09**		Prepared: 12/15/23 Analyzed: 12/17/23						
Chloride	104		mg/kg	100	0.737	103	80-120	0.269	20	
Matrix Spike Dup (P3L1513-MSD2)		**Source: 3L07004-19**		Prepared: 12/15/23 Analyzed: 12/17/23						
Chloride	105		mg/kg	100	0.889	104	80-120	0.858	20	
Batch P3L1514 - * DEFAULT PREP *** **										
Blank (P3L1514-BLK1)				Prepared: 12/15/23 Analyzed: 12/17/23						
Chloride	ND	1.00	mg/kg							

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1514 - * DEFAULT PREP *** **										
LCS (P3L1514-BS1)				Prepared: 12/15/23 Analyzed: 12/17/23						
Chloride	20.4		mg/kg	20.0		102	90-110			
LCS Dup (P3L1514-BSD1)				Prepared: 12/15/23 Analyzed: 12/17/23						
Chloride	20.0		mg/kg	20.0		100	90-110	1.78	10	
Calibration Check (P3L1514-CCV1)				Prepared: 12/15/23 Analyzed: 12/17/23						
Chloride	20.8		mg/kg	20.0		104	90-110			
Calibration Check (P3L1514-CCV2)				Prepared: 12/15/23 Analyzed: 12/18/23						
Chloride	20.6		mg/kg	20.0		103	90-110			
Matrix Spike (P3L1514-MS1)		**Source: 3L07004-29**		Prepared: 12/15/23 Analyzed: 12/17/23						
Chloride	106		mg/kg	100	0.140	106	80-120			
Matrix Spike (P3L1514-MS2)		**Source: 3L07004-39**		Prepared: 12/15/23 Analyzed: 12/18/23						
Chloride	101		mg/kg	100	0.402	101	80-120			
Matrix Spike Dup (P3L1514-MSD1)		**Source: 3L07004-29**		Prepared: 12/15/23 Analyzed: 12/17/23						
Chloride	105		mg/kg	100	0.140	105	80-120	1.10	20	
Matrix Spike Dup (P3L1514-MSD2)		**Source: 3L07004-39**		Prepared: 12/15/23 Analyzed: 12/18/23						
Chloride	100		mg/kg	100	0.402	100	80-120	0.974	20	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Notes and Definitions

S-GC1	Surrogate recovery outside of control limits. A second analysis confirmed the original results..
S-GC	Surrogate recovery outside of control limits. The data was accepted based on valid recovery of the remaining surrogate.
QM-05	The spike recovery was outside acceptance limits for the MS and/or MSD due to matrix interference. The LCS and/or LCSD were within acceptance limits showing that the laboratory is in control and the data is acceptable.
BULK	Samples received in Bulk soil containers may be biased low in the nC6-C12 TPH Range
DET	Analyte DETECTED
ND	Analyte NOT DETECTED at or above the reporting limit
NR	Not Reported
dry	Sample results reported on a dry weight basis
RPD	Relative Percent Difference
LCS	Laboratory Control Spike
MS	Matrix Spike
Dup	Duplicate

Report Approved By: Brent Barron Date: 12/18/2023

Brent Barron, Laboratory Director/Technical Director

This material is intended only for the use of the individual (s) or entity to whom it is addressed, and may contain information that is privileged and confidential.

If you have received this material in error, please notify us immediately at 432-686-7235.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Page 810 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934
Fax No:
Sampler Signature: Jose Bellor
e-mail: Jamey@Tellusservices

Project Name: Jalapeño
Project #: CDEV # 11845
Project Loc: Lea, CO, NM
PO #:
Report Format: ☐ Standard ☐ TRRP ☐ NPDES

(lab use only)
ORDER #: 3L07004

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total #. of Containers	Preservation & # of Containers: Ice	HNO_3	HCl	H_2SO_4	NaOH	$Na_2S_2O_3$	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge; GW = Groundwater S=Soil/Solid; NP=Non-Potable Specify Other	Analyze For: TCLP: TOTAL: TPH: TX 1005	TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA - 8021	TPH-EPA - 8015	Chlorides EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
1	BH-335@ 3ft	3ft	3ft	12-4-23	12:08		1									S				X	X	X		
2	BH-336@ 3ft	3ft	3ft	12-5-23	8:10		1									S				X	X	X		
3	BH-337@ 3ft	3ft	3ft	12-5-23	8:11		1									S				X	X	X		
4	BH-338@ 3ft	3ft	3ft	12-5-23	8:13		1									S				X	X	X		
5	BH-339@ 3ft	3ft	3ft	12-5-23	8:14		1									S				X	X	X		
6	BH-340@ 3ft	3ft	3ft	12-5-23	8:15		1									S				X	X	X		
7	BH-341@ 3ft	3ft	3ft	12-5-23	8:16		1									S				X	X	X		
8	BH-342@ 3ft	3ft	3ft	12-5-23	8:20		1									S				X	X	X		
9	BH-343@ 3ft	3ft	3ft	12-5-23	8:23		1									S				X	X	X		
10	BH-344@ 3ft	3ft	3ft	12-5-23	8:24		1									S				X	X	X		

Special Instructions: Report TPH-in-C6-C12 & C12-C28 & C28-C35 fractions aswell as total TPH
same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
	12/7/23	8.46			
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL: Larisa Bledsoe	Date 12/7/23	Time 8.46

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered by Sampler/Client Rep. ?	Y	N
by Courier? UPS DHL FedEx Lone Star	Y	N

Temperature Upon Receipt:
Received: 5.1 °C Thermometer: NCS
Adjusted: °C Factor:

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

Page 811 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934 **Fax No:**
Sampler Signature: Jose Belloc
e-mail: Jamey@Tellusservices

Project Name: Jalapeño
Project #: CDEV #1185
Project Loc: Lea, CO, NM
PO #:
Report Format: ☐ Standard ☐ TRRP ☐ NPDES

(lab use only)
ORDER #: 3L07004

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total # of Containers	Preservation & # of Containers: Ice	HNO_3	HCl	H_2SO_4	NaOH	$Na_2S_2O_3$	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge GW=Groundwater S=Soil/Solid NP=Non-Potable Specify Other	Analyze For: TCLP: TOTAL: TPH: TX 1005	TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA-8021	TPH-EPA-8015	Chlorides EPA-300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
11	BH-345@ 3ft	3ft	3ft	12-5-23	8:25		1									S				X	X	X		
12	BH-346@ 3ft	3ft	3ft	12-5-23	8:28		1																	
13	BH-347@ 3ft	3ft	3ft	12-5-23	8:30		1																	
14	BH-348@ 3ft	3ft	3ft	12-5-23	8:31		1																	
15	BH-349@ 3ft	3ft	3ft	12-5-23	8:34		1																	
16	BH-350@ 3ft	3ft	3ft	12-5-23	8:36		1																	
17	BH-351@ 3ft	3ft	3ft	12-5-23	8:38		1																	
18	BH-352@ 3ft	3ft	3ft	12-5-23	8:40		1																	
19	BH-353@ 3ft	3ft	3ft	12-5-23	8:42		1																	
20	BH-354@ 3ft	3ft	3ft	12-5-23	8:44		1																	

Special Instructions: Report TPH-in-C6-C12 & C12-C28 & C28-C35 fractions aswell as total TPH
same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
	12/7/23	846			
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL:	Date	Time
				12/7/23	8:46

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N
by Sampler/Client Rep. ?	Y	N
by Courier? UPS DHL FedEx Lone Star	Y	N

Temperature Upon Receipt:
Received: 5.1 °C Thermometer: NCF 03
Adjusted: °C Factor:

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21

Page 1 of 1

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

Page 812 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934 Fax No: _____
Sampler Signature: Jose Belloc e-mail: Jamey@Tellusservices

Project Name: Jalapeño
Project #: COEU #11845
Project Loc: Lea, CO, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES

(lab use only)
ORDER #: 3L07004

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total #. of Containers	Preservation & # of Containers: Ice	HNO_3	HCl	H_2SO_4	NaOH	$Na_2S_2O_3$	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge GW = Groundwater S=Soil/Solid NP=Non-Potable Specify Other	Analyze For: TCLP: TOTAL: TPH: TX 1005	TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA - 8021	TPH- EPA - 8015	Chlorides EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
21	BH-355@8in	8in	8in	12-5-23	8:46		1									5				X	X	X		
22	BH-356@8in	8in	8in	12-5-23	8:49																			
23	BH-357@8in	8in	8in	12-5-23	8:51																			
24	BH-358@8in	8in	8in	12-5-23	8:52																			
25	BH-359@8in	8in	8in	12-5-23	8:54																			
26	BH-360@8in	8in	8in	12-5-23	8:54																			
27	BH-361@8in	8in	8in	12-5-23	8:57																			
28	BH-362@8in	8in	8in	12-5-23	8:59																			
29	BH-363@8in	8in	8in	12-5-23	9:01																			
30	BH-364@8in	8in	8in	12-5-23	9:03		L									L				L	L	L		

Special Instructions: Report TPH-in-C6-C12 & C12-C28 & C28-C35 fractions aswell as total TPH
same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
Jose Belloc	12/7/23	8:46			
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL: Teresa Bledsoe	Date 12/7/23	Time 8:44

Laboratory Comments:

Sample Containers Intact?	Y					N
VOCs Free of Headspace?	Y					N
Labels on container(s)	Y					N
Custody seals on container(s)	Y					N
Custody seals on cooler(s)	Y					N
Sample Hand Delivered	Y					N

by Sampler/Client Rep. ? by Courier? UPS DHL FedEx Lone Star

Temperature Upon Receipt: Received: 5.1 °C Adjusted: °C Thermometer: NCF Factor: 1.3

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21

Page 1 of 1

Received by OCD: 9/30/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

Page 813 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934
Fax No: _____
Sampler Signature: Jose Belloc
e-mail: Jamey@Tellusservices

Project Name: Jalapeño
Project #: CDEV # 11845
Project Loc: Lea, CO, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES

(lab use only)
ORDER #: 3L07004

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total #. of Containers	Preservation & # of Containers: Ice	HNO_3	HCl	H_2SO_4	NaOH	$Na_2S_2O_3$	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge	GW = Groundwater S=Soil/Solid	NP=Non-Potable Specify Other	Analyze For: TPH: TX 1005	TPH TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA - 8021	TPH-EPA - 8015	Chlorides EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
31	BH-365@8in	8in	8in	12-5-23	9:05		1									S											
32	BH-366@8in	8in	8in	12-5-23	9:09																		X	X	X		
33	BH-367@8in	8in	8in	12-5-23	9:11																						
34	BH-368@8in	8in	8in	12-5-23	9:12																						
35	BH-369@8in	8in	8in	12-5-23	9:14																						
36	BH-370@8in	8in	8in	12-5-23	9:15																						
37	BH-371@8in	8in	8in	12-5-23	9:17																						
38	BH-372@8in	8in	8in	12-5-23	9:20																						
39	BH-373@8in	8in	8in	12-5-23	9:21																						
40	BH-374@8in	8in	8in	12-5-23	9:22																						

Special Instructions: Report TPH-in-C6-C12 / C12-C28 / C28-C35 fractions aswell as total TPH
same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
Jose Belloc	12/7/23	8:46			
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL: Marisa Bledsoe	Date 12/7/23	Time 8:46

Laboratory Comments:
Sample Containers Intact? Y
VOCs Free of Headspace? Y
Labels on container(s) Y
Custody seals on container(s) N
Custody seals on cooler(s) N
Sample Hand Delivered N
by Sampler/Client Rep. ? N
by Courier? UPS DHL FedEx Lone Star
Temperature Upon Receipt:
Received: 5.1 °C Thermometor: NCF
Adjusted: °C Factor: 03

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21

Page ↓ of →

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

Page 814 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934 Fax No: _____
Sampler Signature: Jose Belloc

Project Name: Jalapeño
Project #: COEV # 11845
Project Loc: Lea, CO, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES
e-mail: Jamey@Tellusservices

(lab use only)
ORDER #: 3L07004

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total #. of Containers	Preservation & # of Containers: Ice	HNO3	HCl	H2SO4	NaOH	Na2S2O3	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge	GW = Groundwater S=Soil/Solid	NP=Non-Potable Specify Other	Analyze For: TPH: TX 1005	TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA - 8021	TPH-EPA - 8015	Chlorides EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
41	BH-375@ Bin	Bin	Bin	12-5-23	9:25		1																				
42	BH-376@ 1ft	1ft	1ft	12-5-23	10:20		1										S						X	X	X		
43	BH-377@ 1ft	1ft	1ft	12-5-23	10:23																						
44	BH-378@ 1ft	1ft	1ft	12-5-23	10:25																						
45	BH-379@1ft	1ft	1ft	12-5-23	10:26																						
46	BH-380 @1ft	1ft	1ft	12-5-23	10:28																						
47	BH-381 @1ft	1ft	1ft	12-5-23	10:31																						
48	BH-382@ 1ft	1ft	1ft	12-5-23	10:47																						

Special Instructions: Report TPH-in-C6-C12 & C12-C28 & C28-C35 fractions aswell as total TPH
same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
Jose Belloc	12/7/23	8:44			
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL:	Date	Time
			Shirna Bledsoe	12/7/23	8:46

Laboratory Comments:
Sample Containers Intact? Y
VOCs Free of Headspace? Y
Labels on container(s) Y
Custody seals on container(s) N
Custody seals on cooler(s) N
Sample Hand Delivered by Sampler/Client Rep. ? N
by Courier? UPS DHL FedEx Lone Star
Temperature Upon Receipt:
Received: 5.1 °C Thermometer: WC3
Adjusted: °C Factor:

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21

Page 1 of 1

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

PERMIAN BASIN
ENVIRONMENTAL LAB, LP
1400 Rankin Hwy
Midland, TX 79701

PBELAB

Analytical Report

Prepared for:

Jamey Fowler

Tellus Consulting, LLC

4000 North Big Spring Street Suite 109

Midland, TX 79705

Project: Jalapeno

Project Number: CDEV #11845

Location: LEA COUNTY, NM

Lab Order Number: 3L07005

NELAP ACCREDITED TNI LABORATORY

Current Certification

Report Date: 01/02/24

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

ANALYTICAL REPORT FOR SAMPLES

Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
BH-383 @ 1FT	3L07005-01	Soil	12/05/23 10:53	12-07-2023 08:46
BH-384 @ 1FT	3L07005-02	Soil	12/05/23 11:01	12-07-2023 08:46
BH-384-B @ 1FT	3L07005-03	Soil	12/06/23 08:16	12-07-2023 08:46
BH-385 @ 1FT	3L07005-04	Soil	12/05/23 11:10	12-07-2023 08:46
BH-385-B @ 1FT	3L07005-05	Soil	12/06/23 08:18	12-07-2023 08:46
BH-386 @ 1FT	3L07005-06	Soil	12/05/23 11:11	12-07-2023 08:46
BH-387 @ 1FT	3L07005-07	Soil	12/05/23 11:13	12-07-2023 08:46
BH-388 @ 3FT	3L07005-08	Soil	12/06/23 08:21	12-07-2023 08:46
BH-389 @ 3FT	3L07005-09	Soil	12/06/23 08:24	12-07-2023 08:46
BH-390 @ 3FT	3L07005-10	Soil	12/06/23 08:25	12-07-2023 08:46
BH-391 @ 3FT	3L07005-11	Soil	12/06/23 08:27	12-07-2023 08:46
BH-393 @ 3FT	3L07005-12	Soil	12/06/23 08:28	12-07-2023 08:46
BH-394 @ 3FT	3L07005-13	Soil	12/06/23 08:30	12-07-2023 08:46
BH-395 @ 3FT	3L07005-14	Soil	12/06/23 08:33	12-07-2023 08:46
BH-396 @ 3FT	3L07005-15	Soil	12/06/23 08:34	12-07-2023 08:46
BH-397 @ 3FT	3L07005-16	Soil	12/06/23 08:37	12-07-2023 08:46
BH-398 @ 1FT	3L07005-17	Soil	12/06/23 08:40	12-07-2023 08:46
BH-399 @ 1FT	3L07005-18	Soil	12/06/23 08:41	12-07-2023 08:46
BH-400 @ 1FT	3L07005-19	Soil	12/06/23 08:43	12-07-2023 08:46
BH-401 @ 1FT	3L07005-20	Soil	12/06/23 08:45	12-07-2023 08:46

This revised report reflects the correction of the Total BTEX and Total Xylenes Reporting limits .

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-383 @ 1FT

3L07005-01 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 21:26	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 21:26	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 21:26	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 21:26	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 21:26	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*122 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 21:26*	*EPA 8021B*	*S-GC*
Surrogate: 1,4-Difluorobenzene		*92.5 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 21:26*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 21:26	EPA 8021B	
Total BTEX	ND	0.00206	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 21:26	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 03:19	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 03:19	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 03:19	TPH 8015M	
Surrogate: 1-Chlorooctane		*74.7 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 03:19*	*TPH 8015M*	
Surrogate: o-Terphenyl		*82.9 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 03:19*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/12/23 11:07	12/13/23 03:19	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**30.8**	1.03	mg/kg dry	1	P3L1803	12/10/23 10:00	12/18/23 17:07	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-384 @ 1FT

3L07005-02 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00101	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 21:50	EPA 8021B	
Toluene	ND	0.00101	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 21:50	EPA 8021B	
Ethylbenzene	ND	0.00101	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 21:50	EPA 8021B	
Xylene (p/m)	ND	0.00202	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 21:50	EPA 8021B	
Xylene (o)	ND	0.00101	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 21:50	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*124 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 21:50*	*EPA 8021B*	*S-GC*
Surrogate: 1,4-Difluorobenzene		*92.7 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 21:50*	*EPA 8021B*	
Xylenes (total)	ND	0.00202	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 21:50	EPA 8021B	
Total BTEX	ND	0.00202	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 21:50	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.3	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 03:43	TPH 8015M	
>C12-C28	**41.6**	25.3	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 03:43	TPH 8015M	
>C28-C35	ND	25.3	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 03:43	TPH 8015M	
Surrogate: 1-Chlorooctane		*72.4 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 03:43*	*TPH 8015M*	
Surrogate: o-Terphenyl		*75.7 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 03:43*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	**41.6**	25.3	mg/kg dry	1	[CALC]	12/12/23 11:07	12/13/23 03:43	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**69.3**	1.01	mg/kg dry	1	P3L1803	12/10/23 10:00	12/18/23 17:21	EPA 300.0	
% Moisture	**1.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-384-B @ 1FT

3L07005-03 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00102	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 22:14	EPA 8021B	
Toluene	ND	0.00102	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 22:14	EPA 8021B	
Ethylbenzene	ND	0.00102	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 22:14	EPA 8021B	
Xylene (p/m)	ND	0.00204	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 22:14	EPA 8021B	
Xylene (o)	ND	0.00102	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 22:14	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*92.5 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 22:14*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*122 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 22:14*	*EPA 8021B*	*S-GC*
Xylenes (total)	ND	0.00204	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 22:14	EPA 8021B	
Total BTEX	ND	0.00204	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 22:14	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.5	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 04:07	TPH 8015M	
>C12-C28	ND	25.5	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 04:07	TPH 8015M	
>C28-C35	ND	25.5	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 04:07	TPH 8015M	
Surrogate: 1-Chlorooctane		*73.0 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 04:07*	*TPH 8015M*	
Surrogate: o-Terphenyl		*84.0 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 04:07*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.5	mg/kg dry	1	[CALC]	12/12/23 11:07	12/13/23 04:07	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**28.3**	1.02	mg/kg dry	1	P3L1803	12/10/23 10:00	12/18/23 17:36	EPA 300.0	
% Moisture	**2.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-385 @ 1FT

3L07005-04 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00102	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 22:39	EPA 8021B	
Toluene	ND	0.00102	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 22:39	EPA 8021B	
Ethylbenzene	ND	0.00102	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 22:39	EPA 8021B	
Xylene (p/m)	ND	0.00204	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 22:39	EPA 8021B	
Xylene (o)	ND	0.00102	mg/kg dry	1	P3L1705	12/17/23 10:44	12/17/23 22:39	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*93.0 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 22:39*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*122 %*	*80-120*		*P3L1705*	*12/17/23 10:44*	*12/17/23 22:39*	*EPA 8021B*	*S-GC*
Xylenes (total)	ND	0.00204	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 22:39	EPA 8021B	
Total BTEX	ND	0.00204	mg/kg dry	1	[CALC]	12/17/23 10:44	12/17/23 22:39	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.5	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 04:31	TPH 8015M	
>C12-C28	ND	25.5	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 04:31	TPH 8015M	
>C28-C35	ND	25.5	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 04:31	TPH 8015M	
Surrogate: 1-Chlorooctane		*77.3 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 04:31*	*TPH 8015M*	
Surrogate: o-Terphenyl		*87.8 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 04:31*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.5	mg/kg dry	1	[CALC]	12/12/23 11:07	12/13/23 04:31	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**164**	1.02	mg/kg dry	1	P3L1803	12/10/23 10:00	12/18/23 17:50	EPA 300.0	
% Moisture	**2.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-385-B @ 1FT

3L07005-05 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 01:54	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 01:54	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 01:54	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 01:54	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 01:54	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*124 %*	*80-120*		*P3L1706*	*12/17/23 10:47*	*12/18/23 01:54*	*EPA 8021B*	*S-GC*
Surrogate: 1,4-Difluorobenzene		*93.5 %*	*80-120*		*P3L1706*	*12/17/23 10:47*	*12/18/23 01:54*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/17/23 10:47	12/18/23 01:54	EPA 8021B	
Total BTEX	ND	0.00206	mg/kg dry	1	[CALC]	12/17/23 10:47	12/18/23 01:54	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 04:54	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 04:54	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 04:54	TPH 8015M	
Surrogate: 1-Chlorooctane		*70.1 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 04:54*	*TPH 8015M*	
Surrogate: o-Terphenyl		*82.1 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 04:54*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/12/23 11:07	12/13/23 04:54	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**217**	1.03	mg/kg dry	1	P3L1803	12/10/23 10:00	12/18/23 18:04	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-386 @ 1FT

3L07005-06 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 02:18	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 02:18	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 02:18	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 02:18	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 02:18	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*93.3 %*	*80-120*		*P3L1706*	*12/17/23 10:47*	*12/18/23 02:18*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*123 %*	*80-120*		*P3L1706*	*12/17/23 10:47*	*12/18/23 02:18*	*EPA 8021B*	*S-GC*
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/17/23 10:47	12/18/23 02:18	EPA 8021B	
Total BTEX	ND	0.00211	mg/kg dry	1	[CALC]	12/17/23 10:47	12/18/23 02:18	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 05:18	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 05:18	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 05:18	TPH 8015M	
Surrogate: 1-Chlorooctane		*75.2 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 05:18*	*TPH 8015M*	
Surrogate: o-Terphenyl		*86.8 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 05:18*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/12/23 11:07	12/13/23 05:18	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**13.3**	1.05	mg/kg dry	1	P3L1803	12/10/23 10:00	12/18/23 21:59	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-387 @ 1FT

3L07005-07 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00110	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 02:42	EPA 8021B	
Toluene	ND	0.00110	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 02:42	EPA 8021B	
Ethylbenzene	ND	0.00110	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 02:42	EPA 8021B	
Xylene (p/m)	ND	0.00220	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 02:42	EPA 8021B	
Xylene (o)	ND	0.00110	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 02:42	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*93.7 %*	*80-120*		*P3L1706*	*12/17/23 10:47*	*12/18/23 02:42*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*125 %*	*80-120*		*P3L1706*	*12/17/23 10:47*	*12/18/23 02:42*	*EPA 8021B*	*S-GC*
Xylenes (total)	ND	0.00220	mg/kg dry	1	[CALC]	12/17/23 10:47	12/18/23 02:42	EPA 8021B	
Total BTEX	ND	0.00220	mg/kg dry	1	[CALC]	12/17/23 10:47	12/18/23 02:42	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.5	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 05:42	TPH 8015M	
>C12-C28	ND	27.5	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 05:42	TPH 8015M	
>C28-C35	ND	27.5	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 05:42	TPH 8015M	
Surrogate: 1-Chlorooctane		*72.2 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 05:42*	*TPH 8015M*	
Surrogate: o-Terphenyl		*84.9 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 05:42*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.5	mg/kg dry	1	[CALC]	12/12/23 11:07	12/13/23 05:42	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**77.7**	1.10	mg/kg dry	1	P3L1803	12/10/23 10:00	12/18/23 22:13	EPA 300.0	
% Moisture	**9.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-388 @ 3FT

3L07005-08 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00112	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 03:07	EPA 8021B	
Toluene	ND	0.00112	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 03:07	EPA 8021B	
Ethylbenzene	ND	0.00112	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 03:07	EPA 8021B	
Xylene (p/m)	ND	0.00225	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 03:07	EPA 8021B	
Xylene (o)	ND	0.00112	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 03:07	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*123 %*	*80-120*		*P3L1706*	*12/17/23 10:47*	*12/18/23 03:07*	*EPA 8021B*	*S-GC*
Surrogate: 1,4-Difluorobenzene		*93.3 %*	*80-120*		*P3L1706*	*12/17/23 10:47*	*12/18/23 03:07*	*EPA 8021B*	
Xylenes (total)	ND	0.00225	mg/kg dry	1	[CALC]	12/17/23 10:47	12/18/23 03:07	EPA 8021B	
Total BTEX	ND	0.00225	mg/kg dry	1	[CALC]	12/17/23 10:47	12/18/23 03:07	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	28.1	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 06:06	TPH 8015M	
>C12-C28	ND	28.1	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 06:06	TPH 8015M	
>C28-C35	ND	28.1	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 06:06	TPH 8015M	
Surrogate: 1-Chlorooctane		*74.4 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 06:06*	*TPH 8015M*	
Surrogate: o-Terphenyl		*86.5 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 06:06*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	28.1	mg/kg dry	1	[CALC]	12/12/23 11:07	12/13/23 06:06	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**25.0**	1.12	mg/kg dry	1	P3L1803	12/10/23 10:00	12/18/23 22:28	EPA 300.0	
% Moisture	**11.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-389 @ 3FT

3L07005-09 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00109	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 03:31	EPA 8021B	
Toluene	ND	0.00109	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 03:31	EPA 8021B	
Ethylbenzene	ND	0.00109	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 03:31	EPA 8021B	
Xylene (p/m)	ND	0.00217	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 03:31	EPA 8021B	
Xylene (o)	ND	0.00109	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 03:31	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*93.6 %*	*80-120*		*P3L1706*	*12/17/23 10:47*	*12/18/23 03:31*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*124 %*	*80-120*		*P3L1706*	*12/17/23 10:47*	*12/18/23 03:31*	*EPA 8021B*	*S-GC*
Xylenes (total)	ND	0.00217	mg/kg dry	1	[CALC]	12/17/23 10:47	12/18/23 03:31	EPA 8021B	
Total BTEX	ND	0.00217	mg/kg dry	1	[CALC]	12/17/23 10:47	12/18/23 03:31	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.2	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 07:17	TPH 8015M	
>C12-C28	ND	27.2	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 07:17	TPH 8015M	
>C28-C35	ND	27.2	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 07:17	TPH 8015M	
Surrogate: 1-Chlorooctane		*79.3 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 07:17*	*TPH 8015M*	
Surrogate: o-Terphenyl		*92.0 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 07:17*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.2	mg/kg dry	1	[CALC]	12/12/23 11:07	12/13/23 07:17	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**20.3**	1.09	mg/kg dry	1	P3L1803	12/10/23 10:00	12/18/23 22:42	EPA 300.0	
% Moisture	**8.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-390 @ 3FT

3L07005-10 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00109	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 03:56	EPA 8021B	
Toluene	ND	0.00109	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 03:56	EPA 8021B	
Ethylbenzene	ND	0.00109	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 03:56	EPA 8021B	
Xylene (p/m)	ND	0.00217	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 03:56	EPA 8021B	
Xylene (o)	ND	0.00109	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 03:56	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*124 %*	*80-120*		*P3L1706*	*12/17/23 10:47*	*12/18/23 03:56*	*EPA 8021B*	*S-GC*
Surrogate: 1,4-Difluorobenzene		*94.0 %*	*80-120*		*P3L1706*	*12/17/23 10:47*	*12/18/23 03:56*	*EPA 8021B*	
Xylenes (total)	ND	0.00217	mg/kg dry	1	[CALC]	12/17/23 10:47	12/18/23 03:56	EPA 8021B	
Total BTEX	ND	0.00217	mg/kg dry	1	[CALC]	12/17/23 10:47	12/18/23 03:56	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.2	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 07:41	TPH 8015M	
>C12-C28	ND	27.2	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 07:41	TPH 8015M	
>C28-C35	ND	27.2	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 07:41	TPH 8015M	
Surrogate: 1-Chlorooctane		*79.8 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 07:41*	*TPH 8015M*	
Surrogate: o-Terphenyl		*93.0 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 07:41*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.2	mg/kg dry	1	[CALC]	12/12/23 11:07	12/13/23 07:41	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**121**	1.09	mg/kg dry	1	P3L1803	12/10/23 10:00	12/18/23 22:56	EPA 300.0	
% Moisture	**8.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-391 @ 3FT

3L07005-11 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00109	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 04:20	EPA 8021B	
Toluene	ND	0.00109	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 04:20	EPA 8021B	
Ethylbenzene	ND	0.00109	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 04:20	EPA 8021B	
Xylene (p/m)	ND	0.00217	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 04:20	EPA 8021B	
Xylene (o)	ND	0.00109	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 04:20	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*94.0 %*	*80-120*		*P3L1706*	*12/17/23 10:47*	*12/18/23 04:20*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*124 %*	*80-120*		*P3L1706*	*12/17/23 10:47*	*12/18/23 04:20*	*EPA 8021B*	*S-GC*
Xylenes (total)	ND	0.00217	mg/kg dry	1	[CALC]	12/17/23 10:47	12/18/23 04:20	EPA 8021B	
Total BTEX	ND	0.00217	mg/kg dry	1	[CALC]	12/17/23 10:47	12/18/23 04:20	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.2	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 08:05	TPH 8015M	
>C12-C28	ND	27.2	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 08:05	TPH 8015M	
>C28-C35	ND	27.2	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 08:05	TPH 8015M	
Surrogate: 1-Chlorooctane		*80.9 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 08:05*	*TPH 8015M*	
Surrogate: o-Terphenyl		*95.1 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 08:05*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.2	mg/kg dry	1	[CALC]	12/12/23 11:07	12/13/23 08:05	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**43.0**	1.09	mg/kg dry	1	P3L1803	12/10/23 10:00	12/20/23 11:42	EPA 300.0	
% Moisture	**8.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-393 @ 3FT

3L07005-12 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 04:44	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 04:44	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 04:44	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 04:44	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 04:44	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*93.6 %*	*80-120*		*P3L1706*	*12/17/23 10:47*	*12/18/23 04:44*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*125 %*	*80-120*		*P3L1706*	*12/17/23 10:47*	*12/18/23 04:44*	*EPA 8021B*	*S-GC*
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/17/23 10:47	12/18/23 04:44	EPA 8021B	
Total BTEX	ND	0.00211	mg/kg dry	1	[CALC]	12/17/23 10:47	12/18/23 04:44	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 08:29	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 08:29	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 08:29	TPH 8015M	
Surrogate: 1-Chlorooctane		*74.0 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 08:29*	*TPH 8015M*	
Surrogate: o-Terphenyl		*85.6 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 08:29*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/12/23 11:07	12/13/23 08:29	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**41.7**	1.05	mg/kg dry	1	P3L1803	12/10/23 10:00	12/20/23 12:25	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-394 @ 3FT

3L07005-13 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00109	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 05:09	EPA 8021B	
Toluene	ND	0.00109	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 05:09	EPA 8021B	
Ethylbenzene	ND	0.00109	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 05:09	EPA 8021B	
Xylene (p/m)	ND	0.00217	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 05:09	EPA 8021B	
Xylene (o)	ND	0.00109	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 05:09	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*124 %*	*80-120*		*P3L1706*	*12/17/23 10:47*	*12/18/23 05:09*	*EPA 8021B*	*S-GC*
Surrogate: 1,4-Difluorobenzene		*93.5 %*	*80-120*		*P3L1706*	*12/17/23 10:47*	*12/18/23 05:09*	*EPA 8021B*	
Xylenes (total)	ND	0.00217	mg/kg dry	1	[CALC]	12/17/23 10:47	12/18/23 05:09	EPA 8021B	
Total BTEX	ND	0.00217	mg/kg dry	1	[CALC]	12/17/23 10:47	12/18/23 05:09	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.2	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 08:53	TPH 8015M	
>C12-C28	ND	27.2	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 08:53	TPH 8015M	
>C28-C35	ND	27.2	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 08:53	TPH 8015M	
Surrogate: 1-Chlorooctane		*74.8 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 08:53*	*TPH 8015M*	
Surrogate: o-Terphenyl		*89.7 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 08:53*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.2	mg/kg dry	1	[CALC]	12/12/23 11:07	12/13/23 08:53	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**22.4**	1.09	mg/kg dry	1	P3L1803	12/10/23 10:00	12/20/23 12:40	EPA 300.0	
% Moisture	**8.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-395 @ 3FT

3L07005-14 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00110	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 05:33	EPA 8021B	
Toluene	ND	0.00110	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 05:33	EPA 8021B	
Ethylbenzene	ND	0.00110	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 05:33	EPA 8021B	
Xylene (p/m)	ND	0.00220	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 05:33	EPA 8021B	
Xylene (o)	ND	0.00110	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 05:33	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*124 %*	*80-120*		*P3L1706*	*12/17/23 10:47*	*12/18/23 05:33*	*EPA 8021B*	*S-GC*
Surrogate: 1,4-Difluorobenzene		*93.4 %*	*80-120*		*P3L1706*	*12/17/23 10:47*	*12/18/23 05:33*	*EPA 8021B*	
Xylenes (total)	ND	0.00220	mg/kg dry	1	[CALC]	12/17/23 10:47	12/18/23 05:33	EPA 8021B	
Total BTEX	ND	0.00220	mg/kg dry	1	[CALC]	12/17/23 10:47	12/18/23 05:33	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.5	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 09:16	TPH 8015M	
>C12-C28	ND	27.5	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 09:16	TPH 8015M	
>C28-C35	ND	27.5	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 09:16	TPH 8015M	
Surrogate: 1-Chlorooctane		*80.2 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 09:16*	*TPH 8015M*	
Surrogate: o-Terphenyl		*93.3 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 09:16*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.5	mg/kg dry	1	[CALC]	12/12/23 11:07	12/13/23 09:16	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**78.6**	1.10	mg/kg dry	1	P3L1803	12/10/23 10:00	12/20/23 12:54	EPA 300.0	
% Moisture	**9.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-396 @ 3FT

3L07005-15 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00111	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 06:46	EPA 8021B	
Toluene	ND	0.00111	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 06:46	EPA 8021B	
Ethylbenzene	ND	0.00111	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 06:46	EPA 8021B	
Xylene (p/m)	ND	0.00222	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 06:46	EPA 8021B	
Xylene (o)	ND	0.00111	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 06:46	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*93.5 %*	*80-120*		*P3L1706*	*12/17/23 10:47*	*12/18/23 06:46*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*126 %*	*80-120*		*P3L1706*	*12/17/23 10:47*	*12/18/23 06:46*	*EPA 8021B*	*S-GC*
Xylenes (total)	ND	0.00222	mg/kg dry	1	[CALC]	12/17/23 10:47	12/18/23 06:46	EPA 8021B	
Total BTEX	ND	0.00222	mg/kg dry	1	[CALC]	12/17/23 10:47	12/18/23 06:46	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.8	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 09:40	TPH 8015M	
>C12-C28	ND	27.8	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 09:40	TPH 8015M	
>C28-C35	ND	27.8	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 09:40	TPH 8015M	
Surrogate: 1-Chlorooctane		*81.5 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 09:40*	*TPH 8015M*	
Surrogate: o-Terphenyl		*95.2 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 09:40*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.8	mg/kg dry	1	[CALC]	12/12/23 11:07	12/13/23 09:40	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**15.2**	1.11	mg/kg dry	1	P3L1803	12/10/23 10:00	12/20/23 13:08	EPA 300.0	
% Moisture	**10.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-397 @ 3FT

3L07005-16 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00111	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 07:10	EPA 8021B	
Toluene	ND	0.00111	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 07:10	EPA 8021B	
Ethylbenzene	ND	0.00111	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 07:10	EPA 8021B	
Xylene (p/m)	ND	0.00222	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 07:10	EPA 8021B	
Xylene (o)	ND	0.00111	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 07:10	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*126 %*	*80-120*		*P3L1706*	*12/17/23 10:47*	*12/18/23 07:10*	*EPA 8021B*	*S-GC*
Surrogate: 1,4-Difluorobenzene		*93.5 %*	*80-120*		*P3L1706*	*12/17/23 10:47*	*12/18/23 07:10*	*EPA 8021B*	
Xylenes (total)	ND	0.00222	mg/kg dry	1	[CALC]	12/17/23 10:47	12/18/23 07:10	EPA 8021B	
Total BTEX	ND	0.00222	mg/kg dry	1	[CALC]	12/17/23 10:47	12/18/23 07:10	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.8	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 10:04	TPH 8015M	
>C12-C28	ND	27.8	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 10:04	TPH 8015M	
>C28-C35	ND	27.8	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 10:04	TPH 8015M	
Surrogate: 1-Chlorooctane		*84.3 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 10:04*	*TPH 8015M*	
Surrogate: o-Terphenyl		*99.3 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 10:04*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.8	mg/kg dry	1	[CALC]	12/12/23 11:07	12/13/23 10:04	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**13.6**	1.11	mg/kg dry	1	P3L1803	12/10/23 10:00	12/20/23 13:22	EPA 300.0	
% Moisture	**10.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-398 @ 1FT

3L07005-17 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00110	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 07:35	EPA 8021B	
Toluene	ND	0.00110	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 07:35	EPA 8021B	
Ethylbenzene	ND	0.00110	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 07:35	EPA 8021B	
Xylene (p/m)	ND	0.00220	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 07:35	EPA 8021B	
Xylene (o)	ND	0.00110	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 07:35	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*92.5 %*	*80-120*		*P3L1706*	*12/17/23 10:47*	*12/18/23 07:35*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*128 %*	*80-120*		*P3L1706*	*12/17/23 10:47*	*12/18/23 07:35*	*EPA 8021B*	*S-GC*
Xylenes (total)	ND	0.00220	mg/kg dry	1	[CALC]	12/17/23 10:47	12/18/23 07:35	EPA 8021B	
Total BTEX	ND	0.00220	mg/kg dry	1	[CALC]	12/17/23 10:47	12/18/23 07:35	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.5	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 10:28	TPH 8015M	
>C12-C28	ND	27.5	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 10:28	TPH 8015M	
>C28-C35	ND	27.5	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 10:28	TPH 8015M	
Surrogate: 1-Chlorooctane		*80.1 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 10:28*	*TPH 8015M*	
Surrogate: o-Terphenyl		*93.5 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 10:28*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.5	mg/kg dry	1	[CALC]	12/12/23 11:07	12/13/23 10:28	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**24.1**	1.10	mg/kg dry	1	P3L1803	12/10/23 10:00	12/28/23 18:51	EPA 300.0	
% Moisture	**9.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-399 @ 1FT

3L07005-18 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00111	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 07:59	EPA 8021B	
Toluene	ND	0.00111	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 07:59	EPA 8021B	
Ethylbenzene	ND	0.00111	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 07:59	EPA 8021B	
Xylene (p/m)	ND	0.00222	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 07:59	EPA 8021B	
Xylene (o)	ND	0.00111	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 07:59	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*131 %*	*80-120*		*P3L1706*	*12/17/23 10:47*	*12/18/23 07:59*	*EPA 8021B*	*S-GC*
Surrogate: 1,4-Difluorobenzene		*89.8 %*	*80-120*		*P3L1706*	*12/17/23 10:47*	*12/18/23 07:59*	*EPA 8021B*	
Xylenes (total)	ND	0.00222	mg/kg dry	1	[CALC]	12/17/23 10:47	12/18/23 07:59	EPA 8021B	
Total BTEX	ND	0.00222	mg/kg dry	1	[CALC]	12/17/23 10:47	12/18/23 07:59	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.8	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 10:52	TPH 8015M	
>C12-C28	ND	27.8	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 10:52	TPH 8015M	
>C28-C35	ND	27.8	mg/kg dry	1	P3L1215	12/12/23 11:07	12/13/23 10:52	TPH 8015M	
Surrogate: 1-Chlorooctane		*72.7 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 10:52*	*TPH 8015M*	
Surrogate: o-Terphenyl		*86.0 %*	*70-130*		*P3L1215*	*12/12/23 11:07*	*12/13/23 10:52*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.8	mg/kg dry	1	[CALC]	12/12/23 11:07	12/13/23 10:52	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**15.6**	1.11	mg/kg dry	1	P3L1803	12/10/23 10:00	12/28/23 19:13	EPA 300.0	
% Moisture	**10.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-400 @ 1FT

3L07005-19 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00109	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 08:23	EPA 8021B	
Toluene	ND	0.00109	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 08:23	EPA 8021B	
Ethylbenzene	ND	0.00109	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 08:23	EPA 8021B	
Xylene (p/m)	ND	0.00217	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 08:23	EPA 8021B	
Xylene (o)	ND	0.00109	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 08:23	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*130 %*	*80-120*		*P3L1706*	*12/17/23 10:47*	*12/18/23 08:23*	*EPA 8021B*	*S-GC*
Surrogate: 1,4-Difluorobenzene		*88.9 %*	*80-120*		*P3L1706*	*12/17/23 10:47*	*12/18/23 08:23*	*EPA 8021B*	
Xylenes (total)	ND	0.00217	mg/kg dry	1	[CALC]	12/17/23 10:47	12/18/23 08:23	EPA 8021B	
Total BTEX	ND	0.00217	mg/kg dry	1	[CALC]	12/17/23 10:47	12/18/23 08:23	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.2	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C12-C28	ND	27.2	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C28-C35	ND	27.2	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*76.8 %*	*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*89.7 %*	*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.2	mg/kg dry	1	[CALC]	12/12/23 11:08	12/13/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**21.2**	1.09	mg/kg dry	1	P3L1803	12/10/23 10:00	12/28/23 19:34	EPA 300.0	
% Moisture	**8.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-401 @ 1FT

3L07005-20 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00111	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 08:48	EPA 8021B	
Toluene	ND	0.00111	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 08:48	EPA 8021B	
Ethylbenzene	ND	0.00111	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 08:48	EPA 8021B	
Xylene (p/m)	ND	0.00222	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 08:48	EPA 8021B	
Xylene (o)	ND	0.00111	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 08:48	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*127 %*	*80-120*		*P3L1706*	*12/17/23 10:47*	*12/18/23 08:48*	*EPA 8021B*	*S-GC*
Surrogate: 1,4-Difluorobenzene		*86.8 %*	*80-120*		*P3L1706*	*12/17/23 10:47*	*12/18/23 08:48*	*EPA 8021B*	
Xylenes (total)	ND	0.00222	mg/kg dry	1	[CALC]	12/17/23 10:47	12/18/23 08:48	EPA 8021B	
Total BTEX	ND	0.00222	mg/kg dry	1	[CALC]	12/17/23 10:47	12/18/23 08:48	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.8	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C12-C28	ND	27.8	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C28-C35	ND	27.8	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*74.2 %*	*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*84.5 %*	*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.8	mg/kg dry	1	[CALC]	12/12/23 11:08	12/13/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**29.6**	1.11	mg/kg dry	1	P3L1803	12/10/23 10:00	12/28/23 19:56	EPA 300.0	
% Moisture	**10.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1705 - * DEFAULT PREP *** **										
Blank (P3L1705-BLK1)				Prepared & Analyzed: 12/17/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 1,4-Difluorobenzene	*0.109*		*"*	*0.120*		*90.9*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.144*		*"*	*0.120*		*120*	*80-120*			
LCS (P3L1705-BS1)				Prepared & Analyzed: 12/17/23						
Benzene	0.118	0.00100	mg/kg	0.100		118	80-120			
Toluene	0.108	0.00100	"	0.100		108	80-120			
Ethylbenzene	0.117	0.00100	"	0.100		117	80-120			
Xylene (p/m)	0.228	0.00200	"	0.200		114	80-120			
Xylene (o)	0.102	0.00100	"	0.100		102	80-120			
Surrogate: 1,4-Difluorobenzene	*0.111*		*"*	*0.120*		*92.6*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.140*		*"*	*0.120*		*117*	*80-120*			
LCS Dup (P3L1705-BSD1)				Prepared & Analyzed: 12/17/23						
Benzene	0.118	0.00100	mg/kg	0.100		118	80-120	0.314	20	
Toluene	0.108	0.00100	"	0.100		108	80-120	0.612	20	
Ethylbenzene	0.117	0.00100	"	0.100		117	80-120	0.299	20	
Xylene (p/m)	0.228	0.00200	"	0.200		114	80-120	0.175	20	
Xylene (o)	0.102	0.00100	"	0.100		102	80-120	0.304	20	
Surrogate: 1,4-Difluorobenzene	*0.111*		*"*	*0.120*		*92.8*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.140*		*"*	*0.120*		*116*	*80-120*			
Calibration Blank (P3L1705-CCB1)				Prepared & Analyzed: 12/17/23						
Benzene	0.120		ug/kg							
Toluene	0.140		"							
Ethylbenzene	0.150		"							
Xylene (p/m)	0.210		"							
Xylene (o)	0.150		"							
Surrogate: 1,4-Difluorobenzene	*0.109*		*"*	*0.120*		*90.9*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.143*		*"*	*0.120*		*119*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1705 - * DEFAULT PREP *** **										
Calibration Blank (P3L1705-CCB2)				Prepared & Analyzed: 12/17/23						
Benzene	0.150		ug/kg							
Toluene	0.140		"							
Ethylbenzene	0.100		"							
Xylene (p/m)	0.170		"							
Xylene (o)	0.120		"							
Surrogate: 1,4-Difluorobenzene	*0.110*		*"*	*0.120*		*91.6*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.149*		*"*	*0.120*		*124*	*80-120*			*S-GC*
Calibration Blank (P3L1705-CCB3)				Prepared: 12/17/23 Analyzed: 12/18/23						
Benzene	0.0900		ug/kg							
Toluene	0.0900		"							
Ethylbenzene	0.100		"							
Xylene (p/m)	0.160		"							
Xylene (o)	0.0800		"							
Surrogate: 4-Bromofluorobenzene	*0.147*		*"*	*0.120*		*123*	*80-120*			*S-GC*
Surrogate: 1,4-Difluorobenzene	*0.112*		*"*	*0.120*		*93.1*	*80-120*			
Calibration Check (P3L1705-CCV1)				Prepared & Analyzed: 12/17/23						
Benzene	0.117	0.00100	mg/kg	0.100		117	80-120			
Toluene	0.108	0.00100	"	0.100		108	80-120			
Ethylbenzene	0.111	0.00100	"	0.100		111	80-120			
Xylene (p/m)	0.226	0.00200	"	0.200		113	80-120			
Xylene (o)	0.103	0.00100	"	0.100		103	80-120			
Surrogate: 1,4-Difluorobenzene	*0.105*		*"*	*0.120*		*87.6*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.131*		*"*	*0.120*		*109*	*75-125*			
Calibration Check (P3L1705-CCV2)				Prepared & Analyzed: 12/17/23						
Benzene	0.111	0.00100	mg/kg	0.100		111	80-120			
Toluene	0.101	0.00100	"	0.100		101	80-120			
Ethylbenzene	0.104	0.00100	"	0.100		104	80-120			
Xylene (p/m)	0.209	0.00200	"	0.200		105	80-120			
Xylene (o)	0.0989	0.00100	"	0.100		98.9	80-120			
Surrogate: 1,4-Difluorobenzene	*0.113*		*"*	*0.120*		*94.0*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.145*		*"*	*0.120*		*121*	*75-125*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1705 - * DEFAULT PREP *** **										
Calibration Check (P3L1705-CCV3)				Prepared & Analyzed: 12/17/23						
Benzene	0.0908	0.00100	mg/kg	0.100		90.8	80-120			
Toluene	0.0805	0.00100	"	0.100		80.5	80-120			
Ethylbenzene	0.0813	0.00100	"	0.100		81.3	80-120			
Xylene (p/m)	0.165	0.00200	"	0.200		82.5	80-120			
Xylene (o)	0.0804	0.00100	"	0.100		80.4	80-120			
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*94.6*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.140*		"	*0.120*		*117*	*75-125*			
Matrix Spike (P3L1705-MS1)		**Source: 3L07004-33**		Prepared & Analyzed: 12/17/23						
Benzene	0.0728	0.00102	mg/kg dry	0.102	ND	71.3	80-120			QM-05
Toluene	0.0564	0.00102	"	0.102	ND	55.3	80-120			QM-05
Ethylbenzene	0.0531	0.00102	"	0.102	ND	52.1	80-120			QM-05
Xylene (p/m)	0.103	0.00204	"	0.204	ND	50.7	80-120			QM-05
Xylene (o)	0.0453	0.00102	"	0.102	ND	44.4	80-120			QM-05
Surrogate: 4-Bromofluorobenzene	*0.144*		"	*0.122*		*117*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.116*		"	*0.122*		*94.5*	*80-120*			
Matrix Spike Dup (P3L1705-MSD1)		**Source: 3L07004-33**		Prepared & Analyzed: 12/17/23						
Benzene	0.0749	0.00102	mg/kg dry	0.102	ND	73.4	80-120	2.89	20	QM-05
Toluene	0.0596	0.00102	"	0.102	ND	58.4	80-120	5.40	20	QM-05
Ethylbenzene	0.0577	0.00102	"	0.102	ND	56.6	80-120	8.32	20	QM-05
Xylene (p/m)	0.113	0.00204	"	0.204	ND	55.2	80-120	8.44	20	QM-05
Xylene (o)	0.0490	0.00102	"	0.102	ND	48.0	80-120	7.77	20	QM-05
Surrogate: 4-Bromofluorobenzene	*0.145*		"	*0.122*		*118*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.116*		"	*0.122*		*94.4*	*80-120*			
Batch P3L1706 - * DEFAULT PREP *** **										
Blank (P3L1706-BLK1)				Prepared: 12/17/23 Analyzed: 12/18/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 1,4-Difluorobenzene	*0.112*		"	*0.120*		*93.0*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.146*		"	*0.120*		*122*	*80-120*			*S-GC*

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1706 - * DEFAULT PREP *** **										
LCS (P3L1706-BS1)				Prepared: 12/17/23 Analyzed: 12/18/23						
Benzene	0.0849	0.00100	mg/kg	0.100		84.9	80-120			
Toluene	0.0803	0.00100	"	0.100		80.3	80-120			
Ethylbenzene	0.0808	0.00100	"	0.100		80.8	80-120			
Xylene (p/m)	0.164	0.00200	"	0.200		82.2	80-120			
Xylene (o)	0.0824	0.00100	"	0.100		82.4	80-120			
Surrogate: 1,4-Difluorobenzene	*0.116*		*"*	*0.120*		*96.8*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.145*		*"*	*0.120*		*121*	*80-120*			*S-GC*
LCS Dup (P3L1706-BSD1)				Prepared: 12/17/23 Analyzed: 12/18/23						
Benzene	0.0830	0.00100	mg/kg	0.100		83.0	80-120	2.26	20	
Toluene	0.0817	0.00100	"	0.100		81.7	80-120	1.74	20	
Ethylbenzene	0.0807	0.00100	"	0.100		80.7	80-120	0.0619	20	
Xylene (p/m)	0.165	0.00200	"	0.200		82.3	80-120	0.0851	20	
Xylene (o)	0.0821	0.00100	"	0.100		82.1	80-120	0.413	20	
Surrogate: 1,4-Difluorobenzene	*0.119*		*"*	*0.120*		*99.5*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.149*		*"*	*0.120*		*125*	*80-120*			*S-GC*
Calibration Blank (P3L1706-CCB1)				Prepared: 12/17/23 Analyzed: 12/18/23						
Benzene	0.0900		ug/kg							
Toluene	0.0900		"							
Ethylbenzene	0.100		"							
Xylene (p/m)	0.160		"							
Xylene (o)	0.0800		"							
Surrogate: 1,4-Difluorobenzene	*0.112*		*"*	*0.120*		*93.1*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.147*		*"*	*0.120*		*123*	*80-120*			*S-GC*
Calibration Blank (P3L1706-CCB2)				Prepared: 12/17/23 Analyzed: 12/18/23						
Benzene	0.0700		ug/kg							
Toluene	0.0700		"							
Ethylbenzene	0.0800		"							
Xylene (p/m)	0.0800		"							
Xylene (o)	0.0400		"							
Surrogate: 4-Bromofluorobenzene	*0.149*		*"*	*0.120*		*124*	*80-120*			*S-GC*
Surrogate: 1,4-Difluorobenzene	*0.112*		*"*	*0.120*		*93.6*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1706 - * DEFAULT PREP *** **										
Calibration Check (P3L1706-CCV1)				Prepared & Analyzed: 12/17/23						
Benzene	0.0908	0.00100	mg/kg	0.100		90.8	80-120			
Toluene	0.0805	0.00100	"	0.100		80.5	80-120			
Ethylbenzene	0.0813	0.00100	"	0.100		81.3	80-120			
Xylene (p/m)	0.165	0.00200	"	0.200		82.5	80-120			
Xylene (o)	0.0804	0.00100	"	0.100		80.4	80-120			
Surrogate: 4-Bromofluorobenzene	*0.140*		"	*0.120*		*117*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*94.6*	*75-125*			
Calibration Check (P3L1706-CCV2)				Prepared: 12/17/23 Analyzed: 12/18/23						
Benzene	0.0822	0.00100	mg/kg	0.100		82.2	80-120			
Toluene	0.0809	0.00100	"	0.100		80.9	80-120			
Ethylbenzene	0.0844	0.00100	"	0.100		84.4	80-120			
Xylene (p/m)	0.166	0.00200	"	0.200		82.9	80-120			
Xylene (o)	0.0827	0.00100	"	0.100		82.7	80-120			
Surrogate: 1,4-Difluorobenzene	*0.134*		"	*0.120*		*112*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.170*		"	*0.120*		*141*	*75-125*			*S-GC*
Calibration Check (P3L1706-CCV3)				Prepared: 12/17/23 Analyzed: 12/18/23						
Benzene	0.109	0.00100	mg/kg	0.100		109	80-120			
Toluene	0.0995	0.00100	"	0.100		99.5	80-120			
Ethylbenzene	0.103	0.00100	"	0.100		103	80-120			
Xylene (p/m)	0.212	0.00200	"	0.200		106	80-120			
Xylene (o)	0.0972	0.00100	"	0.100		97.2	80-120			
Surrogate: 1,4-Difluorobenzene	*0.116*		"	*0.120*		*96.8*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.125*		"	*0.120*		*104*	*75-125*			
Matrix Spike (P3L1706-MS1)	**Source: 3L07005-05**			Prepared: 12/17/23 Analyzed: 12/18/23						
Benzene	8.39	0.00103	mg/kg dry	0.103	ND	NR	80-120			QM-05
Toluene	6.55	0.00103	"	0.103	ND	NR	80-120			QM-05
Ethylbenzene	7.26	0.00103	"	0.103	ND	NR	80-120			QM-05
Xylene (p/m)	14.4	0.00206	"	0.206	ND	NR	80-120			QM-05
Xylene (o)	6.72	0.00103	"	0.103	ND	NR	80-120			QM-05
Surrogate: 4-Bromofluorobenzene	*0.306*		"	*0.124*		*247*	*80-120*			*S-GC*
Surrogate: 1,4-Difluorobenzene	*0.164*		"	*0.124*		*132*	*80-120*			*S-GC*

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1706 - * DEFAULT PREP *** **										
Matrix Spike Dup (P3L1706-MSD1)	**Source: 3L07005-05**			Prepared: 12/17/23 Analyzed: 12/18/23						
Benzene	2.40	0.00103	mg/kg dry	0.103	ND	NR	80-120	111	20	QM-05
Toluene	1.86	0.00103	"	0.103	ND	NR	80-120	111	20	QM-05
Ethylbenzene	2.08	0.00103	"	0.103	ND	NR	80-120	111	20	QM-05
Xylene (p/m)	4.10	0.00206	"	0.206	ND	NR	80-120	111	20	QM-05
Xylene (o)	1.80	0.00103	"	0.103	ND	NR	80-120	115	20	QM-05
Surrogate: 1,4-Difluorobenzene	*0.122*		*"*	*0.124*		*98.7*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.166*		*"*	*0.124*		*134*	*80-120*			*S-GC*

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1215 - TX 1005										
Blank (P3L1215-BLK1)				Prepared: 12/12/23 Analyzed: 12/13/23						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*83.9*		*"*	*100*		*83.9*	*70-130*			
Surrogate: o-Terphenyl	*48.8*		*"*	*50.0*		*97.5*	*70-130*			
LCS (P3L1215-BS1)				Prepared: 12/12/23 Analyzed: 12/13/23						
C6-C12	898	25.0	mg/kg	1000		89.8	75-125			
>C12-C28	870	25.0	"	1000		87.0	75-125			
Surrogate: 1-Chlorooctane	*101*		*"*	*100*		*101*	*70-130*			
Surrogate: o-Terphenyl	*48.3*		*"*	*50.0*		*96.6*	*70-130*			
LCS Dup (P3L1215-BSD1)				Prepared: 12/12/23 Analyzed: 12/13/23						
C6-C12	912	25.0	mg/kg	1000		91.2	75-125	1.53	20	
>C12-C28	893	25.0	"	1000		89.3	75-125	2.60	20	
Surrogate: 1-Chlorooctane	*110*		*"*	*100*		*110*	*70-130*			
Surrogate: o-Terphenyl	*51.1*		*"*	*50.0*		*102*	*70-130*			
Calibration Check (P3L1215-CCV1)				Prepared: 12/12/23 Analyzed: 12/13/23						
C6-C12	520	25.0	mg/kg	500		104	85-115			
>C12-C28	558	25.0	"	500		112	85-115			
Surrogate: 1-Chlorooctane	*94.5*		*"*	*100*		*94.5*	*70-130*			
Surrogate: o-Terphenyl	*47.1*		*"*	*50.0*		*94.2*	*70-130*			
Calibration Check (P3L1215-CCV2)				Prepared: 12/12/23 Analyzed: 12/13/23						
C6-C12	537	25.0	mg/kg	500		107	85-115			
>C12-C28	572	25.0	"	500		114	85-115			
Surrogate: 1-Chlorooctane	*96.1*		*"*	*100*		*96.1*	*70-130*			
Surrogate: o-Terphenyl	*48.5*		*"*	*50.0*		*97.0*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1215 - TX 1005										
Duplicate (P3L1215-DUP1)	**Source: 3L07005-18**			Prepared: 12/12/23 Analyzed: 12/13/23						
C6-C12	24.8	27.8	mg/kg dry		24.6			0.945	20	
>C12-C28	ND	27.8	"		ND				20	
Surrogate: 1-Chlorooctane	*82.4*		"	*111*		*74.1*	*70-130*			
Surrogate: o-Terphenyl	*49.0*		"	*55.6*		*88.2*	*70-130*			
Batch P3L1216 - TX 1005										
Blank (P3L1216-BLK1)				Prepared: 12/12/23 Analyzed: 12/13/23						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*79.8*		"	*100*		*79.8*	*70-130*			
Surrogate: o-Terphenyl	*48.5*		"	*50.0*		*97.1*	*70-130*			
LCS (P3L1216-BS1)				Prepared: 12/12/23 Analyzed: 12/13/23						
C6-C12	1420	25.0	mg/kg	1400		102	75-125			
>C12-C28	1400	25.0	"	1400		100	75-125			
Surrogate: 1-Chlorooctane	*117*		"	*100*		*117*	*70-130*			
Surrogate: o-Terphenyl	*53.0*		"	*50.0*		*106*	*70-130*			
Calibration Check (P3L1216-CCV1)				Prepared: 12/12/23 Analyzed: 12/13/23						
C6-C12	573	25.0	mg/kg	500		115	85-115			
>C12-C28	567	25.0	"	500		113	85-115			
Surrogate: 1-Chlorooctane	*112*		"	*100*		*112*	*70-130*			
Surrogate: o-Terphenyl	*55.6*		"	*50.0*		*111*	*70-130*			
Calibration Check (P3L1216-CCV2)				Prepared: 12/12/23 Analyzed: 12/13/23						
C6-C12	514	25.0	mg/kg	500		103	85-115			
>C12-C28	570	25.0	"	500		114	85-115			
Surrogate: 1-Chlorooctane	*99.9*		"	*100*		*99.9*	*70-130*			
Surrogate: o-Terphenyl	*52.0*		"	*50.0*		*104*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1216 - TX 1005										
Duplicate (P3L1216-DUP1)	**Source: 3L07006-18**			Prepared: 12/12/23 Analyzed: 12/13/23						
C6-C12	19.1	28.1	mg/kg dry		11.6			48.8	20	
>C12-C28	ND	28.1	"		ND				20	
Surrogate: 1-Chlorooctane	*82.8*		*"*	*112*		*73.7*	*70-130*			
Surrogate: o-Terphenyl	*45.8*		*"*	*56.2*		*81.5*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1110 - * DEFAULT PREP *** **										
Blank (P3L1110-BLK1)				Prepared & Analyzed: 12/11/23						
% Moisture	ND	0.1	%							
Blank (P3L1110-BLK2)				Prepared & Analyzed: 12/11/23						
% Moisture	ND	0.1	%							
Blank (P3L1110-BLK3)				Prepared & Analyzed: 12/11/23						
% Moisture	ND	0.1	%							
Blank (P3L1110-BLK4)				Prepared & Analyzed: 12/11/23						
% Moisture	ND	0.1	%							
Blank (P3L1110-BLK5)				Prepared & Analyzed: 12/11/23						
% Moisture	ND	0.1	%							
Blank (P3L1110-BLK6)				Prepared & Analyzed: 12/11/23						
% Moisture	ND	0.1	%							
Blank (P3L1110-BLK7)				Prepared & Analyzed: 12/11/23						
% Moisture	ND	0.1	%							
Duplicate (P3L1110-DUP1)	**Source: 3L07003-10**			Prepared & Analyzed: 12/11/23						
% Moisture	5.0	0.1	%		4.0			22.2	20	
Duplicate (P3L1110-DUP2)	**Source: 3L07003-20**			Prepared & Analyzed: 12/11/23						
% Moisture	4.0	0.1	%		4.0			0.00	20	
Duplicate (P3L1110-DUP3)	**Source: 3L07004-11**			Prepared & Analyzed: 12/11/23						
% Moisture	5.0	0.1	%		5.0			0.00	20	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1110 - * DEFAULT PREP *** **										
Duplicate (P3L1110-DUP4)		**Source: 3L07004-21**		Prepared & Analyzed: 12/11/23						
% Moisture	2.0	0.1	%		2.0			0.00	20	
Duplicate (P3L1110-DUP5)		**Source: 3L07004-36**		Prepared & Analyzed: 12/11/23						
% Moisture	3.0	0.1	%		3.0			0.00	20	
Duplicate (P3L1110-DUP6)		**Source: 3L07004-46**		Prepared & Analyzed: 12/11/23						
% Moisture	4.0	0.1	%		4.0			0.00	20	
Duplicate (P3L1110-DUP7)		**Source: 3L07005-13**		Prepared & Analyzed: 12/11/23						
% Moisture	8.0	0.1	%		8.0			0.00	20	
Duplicate (P3L1110-DUP8)		**Source: 3L07006-03**		Prepared & Analyzed: 12/11/23						
% Moisture	7.0	0.1	%		7.0			0.00	20	
Duplicate (P3L1110-DUP9)		**Source: 3L07006-18**		Prepared & Analyzed: 12/11/23						
% Moisture	11.0	0.1	%		11.0			0.00	20	
Duplicate (P3L1110-DUPA)		**Source: 3L07006-28**		Prepared & Analyzed: 12/11/23						
% Moisture	4.0	0.1	%		4.0			0.00	20	
Duplicate (P3L1110-DUPB)		**Source: 3L08006-06**		Prepared & Analyzed: 12/11/23						
% Moisture	11.0	0.1	%		11.0			0.00	20	
Duplicate (P3L1110-DUPC)		**Source: 3L08012-01**		Prepared & Analyzed: 12/11/23						
% Moisture	11.0	0.1	%		11.0			0.00	20	
Duplicate (P3L1110-DUPD)		**Source: 3L08013-15**		Prepared & Analyzed: 12/11/23						
% Moisture	6.0	0.1	%		7.0			15.4	20	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1803 - * DEFAULT PREP *** **										
Blank (P3L1803-BLK1)				Prepared: 12/10/23 Analyzed: 12/18/23						
Chloride	ND	1.00	mg/kg							
LCS (P3L1803-BS1)				Prepared: 12/10/23 Analyzed: 12/18/23						
Chloride	19.1		mg/kg	20.0		95.3	90-110			
LCS Dup (P3L1803-BSD1)				Prepared: 12/10/23 Analyzed: 12/18/23						
Chloride	19.2		mg/kg	20.0		96.1	90-110	0.831	10	
Calibration Check (P3L1803-CCV1)				Prepared: 12/10/23 Analyzed: 12/18/23						
Chloride	18.6		mg/kg	20.0		92.9	90-110			
Matrix Spike (P3L1803-MS2)		**Source: 3L07005-11**		Prepared: 12/10/23 Analyzed: 12/20/23						
Chloride	107		mg/kg	100	0.791	106	80-120			
Matrix Spike Dup (P3L1803-MSD2)		**Source: 3L07005-11**		Prepared: 12/10/23 Analyzed: 12/20/23						
Chloride	104		mg/kg	100	0.791	104	80-120	2.39	20	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Notes and Definitions

S-GC	Surrogate recovery outside of control limits. The data was accepted based on valid recovery of the remaining surrogate.
QM-05	The spike recovery was outside acceptance limits for the MS and/or MSD due to matrix interference. The LCS and/or LCSD were within acceptance limits showing that the laboratory is in control and the data is acceptable.
BULK	Samples received in Bulk soil containers may be biased low in the nC6-C12 TPH Range
DET	Analyte DETECTED
ND	Analyte NOT DETECTED at or above the reporting limit
NR	Not Reported
dry	Sample results reported on a dry weight basis
RPD	Relative Percent Difference
LCS	Laboratory Control Spike
MS	Matrix Spike
Dup	Duplicate

Report Approved By: Brent Barron Date: 1/2/2024

Brent Barron, Laboratory Director/Technical Director

This material is intended only for the use of the individual (s) or entity to whom it is addressed, and may contain information that is privileged and confidential.

If you have received this material in error, please notify us immediately at 432-686-7235.

Page 850 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934 Fax No: _____
Sampler Signature: Jose Belloc e-mail: Jamey@Tellusservices

Project Name: Jalapeño
Project #: CDEV # 11845
Project Loc: Lea, CO, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES

(lab use only)
ORDER #: 3L07005

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total # of Containers	Preservation & # of Containers: Ice	HNO_3	HCl	H_2SO_4	NaOH	$Na_2S_2O_3$	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge GW=Groundwater S=Soil/Solid NP=Non-Potable Specify Other	Analyze For: TCLP: TPH: TX 1005 TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA - 8021	TPH-EPA - 8015	Chlorides EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
1	BH-383@1ft	1ft	1ft	12-5-23	10:53		1									S				X	X	X		
2	BH-384@1ft	1ft	1ft	12-5-23	11:01		1									S				X	X	X		
3	BH-384-B@1ft	1ft	1ft	12-6-23	8:16		1									S				X	X	X		
4	BH-385@1ft	1ft	1ft	12-5-23	11:10		1									S				X	X	X		
5	BH-385-B@1ft	1ft	1ft	12-6-23	8:18		1									S				X	X	X		
6	BH-386@1ft	1ft	1ft	12-5-23	11:11		1									S				X	X	X		
7	BH-387@1ft	1ft	1ft	12-5-23	11:13		1									S				X	X	X		
8	BH-388@3ft	3ft	3ft	12-6-23	8:21		1									S				X	X	X		
9	BH-389@3ft	3ft	3ft	12-6-23	8:24		1									S				X	X	X		
10	BH-390@3ft	3ft	3ft	12-6-23	8:25		1									S				X	X	X		

Special Instructions: Report TPH-in-C6-C12 & C12-C28 & C28-C35 fractions aswell as total TPH
same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
Jose Belloc	12/7/23	8:46			
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL: Teresa Bledsoe	Date 12/7/23	Time 8:46

Laboratory Comments:
Sample Containers Intact? Y
VOCs Free of Headspace? Y
Labels on container(s) Y
Custody seals on container(s) N
Custody seals on cooler(s) N
Sample Hand Delivered N
by Sampler/Client Rep. ? N
by Courier? UPS DHL FedEx Lone Star
Temperature Upon Receipt:
Received: 5.1 °C Thermometer: NCH 43
Adjusted: °C Factor:

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21

Page 1 of 1

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

Page 851 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934 Fax No: _____
Sampler Signature: Jose Belloc e-mail: Jamey@Tellusservices

Project Name: Jalapeño
Project #: CDEV # 11845
Project Loc: Lea, CO, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES

(lab use only)
ORDER #: 3L07005

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total # of Containers	Preservation & # of Containers: Ice	HNO_3	HCl	H_2SO_4	NaOH	$Na_2S_2O_3$	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge GW=Groundwater S=Soil/Solid NP=Non-Potable Specify Other	Analyze For: TPH: TX 1005 TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA - 8021	TPH-EPA - 8015	Chlorides EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
11	BH-391@3ft	3ft	3ft	12-6-23	8:27		1									S				X	X	X		
12	BH-393@3ft	3ft	3ft	12-6-23	8:28		1									S				X	X	X		
13	BH-394@3ft	3ft	3ft	12-6-23	8:30		1									S				X	X	X		
14	BH-395@3ft	3ft	3ft	12-6-23	8:32		1									S				X	X	X		
15	BH-396@3ft	3ft	3ft	12-6-23	8:34		1									S				X	X	X		
16	BH-397@3ft	3ft	3ft	12-6-23	8:37		1									S				X	X	X		
17	BH-398@1ft	1ft	1ft	12-6-23	8:40		1									S				X	X	X		
18	BH-399@1ft	1ft	1ft	12-6-23	8:41		1									S				X	X	X		
19	BH-400@1ft	1ft	1ft	12-6-23	8:43		1									S				X	X	X		
20	BH-401@1ft	1ft	1ft	12-6-23	8:45		1									S				X	X	X		

Special Instructions: Report TPH-in-C6-C12 & C12-C28 & C28-C35 fractions aswell as total TPH
some instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
Jose Belloc	12/7/23	8:44			
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL: Brenda Bledsoe	Date 12/7/23	Time 8:46

Laboratory Comments:
Sample Containers Intact? Y
VOCs Free of Headspace? Y
Labels on container(s) Y
Custody seals on container(s) N
Custody seals on cooler(s) N
Sample Hand Delivered N
by Sampler/Client Rep. ? N
by Courier? UPS DHL FedEx Lone Star
Temperature Upon Receipt:
Received: 5.1 °C Thermometer: NCF3
Adjusted: °C Factor:

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21

Page 1 of 1

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

PERMIAN BASIN
ENVIRONMENTAL LAB, LP
1400 Rankin Hwy
Midland, TX 79701

PBELAB

Analytical Report

Prepared for:

Jamey Fowler

Tellus Consulting, LLC

4000 North Big Spring Street Suite 109

Midland, TX 79705

Project: Jalapeno

Project Number: CDEV #11845

Location: None Given

Lab Order Number: 3L07006

NELAP ACCREDITED TNI LABORATORY

Current Certification

Report Date: 01/16/24

Tellus Consulting, LLC
4000 North Big Spring Street Suite 109
Midland TX, 79705

Project: Jalapeno
Project Number: CDEV #11845
Project Manager: Jamey Fowler

ANALYTICAL REPORT FOR SAMPLES

Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
BH-402 @ 1FT	3L07006-01	Soil	12/06/23 08:47	12-07-2023 08:46
BH-403 @ 3FT	3L07006-02	Soil	12/06/23 08:50	12-07-2023 08:46
BH-404 @ 3FT	3L07006-03	Soil	12/06/23 08:52	12-07-2023 08:46
BH-405 @ 1.5	3L07006-04	Soil	12/06/23 08:53	12-07-2023 08:46
BH-406 @ 1.5	3L07006-05	Soil	12/06/23 08:55	12-07-2023 08:46
BH-407 @ 1.5	3L07006-06	Soil	12/06/23 09:03	12-07-2023 08:46
BH-408 @ 1.5	3L07006-07	Soil	12/06/23 09:05	12-07-2023 08:46
BH-409 @ 1.5	3L07006-08	Soil	12/06/23 09:10	12-07-2023 08:46
BH-410 @ 1.5	3L07006-09	Soil	12/06/23 09:12	12-07-2023 08:46
BH-411 @ 1.5	3L07006-10	Soil	12/06/23 09:15	12-07-2023 08:46
BH-412 @ 1.5	3L07006-11	Soil	12/06/23 09:17	12-07-2023 08:46
BH-413 @ 1.5	3L07006-12	Soil	12/06/23 09:20	12-07-2023 08:46
BH-414 @ 1.5	3L07006-13	Soil	12/06/23 09:23	12-07-2023 08:46
BH-415 @ 1.5	3L07006-14	Soil	12/06/23 09:30	12-07-2023 08:46
BH-416 @ 3FT	3L07006-15	Soil	12/06/23 09:32	12-07-2023 08:46
BH-417 @ 3FT	3L07006-16	Soil	12/06/23 09:35	12-07-2023 08:46
BH-418 @ 3FT	3L07006-17	Soil	12/06/23 09:35	12-07-2023 08:46
BH-419 @ 3FT	3L07006-18	Soil	12/06/23 09:38	12-07-2023 08:46
BH-420 @ 3FT	3L07006-19	Soil	12/06/23 09:38	12-07-2023 08:46
BH-421 @ 3FT	3L07006-20	Soil	12/06/23 09:42	12-07-2023 08:46
BH-422 @ 3FT	3L07006-21	Soil	12/06/23 09:45	12-07-2023 08:46
BH-423 @ 3FT	3L07006-22	Soil	12/06/23 09:47	12-07-2023 08:46
BH-424 @ 3FT	3L07006-23	Soil	12/06/23 09:50	12-07-2023 08:46
BH-425 @ 3FT	3L07006-24	Soil	12/06/23 09:53	12-07-2023 08:46
BH-426 @ 1FT	3L07006-25	Soil	12/06/23 09:55	12-07-2023 08:46
BH-427 @ 1FT	3L07006-26	Soil	12/06/23 09:56	12-07-2023 08:46
BH-428 @ 2FT	3L07006-27	Soil	12/06/23 10:00	12-07-2023 08:46
BH-429 @ 2FT	3L07006-28	Soil	12/06/23 10:03	12-07-2023 08:46

This revised report reflects the correction of the Total BTEX and Total Xylenes Reporting limits.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-402 @ 1FT

3L07006-01 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00110	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 09:12	EPA 8021B	
Toluene	ND	0.00110	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 09:12	EPA 8021B	
Ethylbenzene	ND	0.00110	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 09:12	EPA 8021B	
Xylene (p/m)	ND	0.00220	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 09:12	EPA 8021B	
Xylene (o)	ND	0.00110	mg/kg dry	1	P3L1706	12/17/23 10:47	12/18/23 09:12	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*123 %*	*80-120*		*P3L1706*	*12/17/23 10:47*	*12/18/23 09:12*	*EPA 8021B*	*S-GC*
Surrogate: 1,4-Difluorobenzene		*83.0 %*	*80-120*		*P3L1706*	*12/17/23 10:47*	*12/18/23 09:12*	*EPA 8021B*	
Xylenes (total)	ND	0.00220	mg/kg dry	1	[CALC]	12/17/23 10:47	12/18/23 09:12	EPA 8021B	
Total BTEX	ND	0.00110	mg/kg dry	1	[CALC]	12/17/23 10:47	12/18/23 09:12	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.5	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C12-C28	ND	27.5	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C28-C35	ND	27.5	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*66.1 %*	*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	*S-GC*
Surrogate: o-Terphenyl		*74.2 %*	*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.5	mg/kg dry	1	[CALC]	12/12/23 11:08	12/13/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**63.6**	1.10	mg/kg dry	1	P3L1804	12/18/23 09:07	12/26/23 11:29	EPA 300.0	
% Moisture	**9.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-403 @ 3FT

3L07006-02 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00109	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 15:20	EPA 8021B	
Toluene	ND	0.00109	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 15:20	EPA 8021B	
Ethylbenzene	ND	0.00109	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 15:20	EPA 8021B	
Xylene (p/m)	ND	0.00217	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 15:20	EPA 8021B	
Xylene (o)	ND	0.00109	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 15:20	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*95.4 %*	*80-120*		*P3L1808*	*12/18/23 10:39*	*12/18/23 15:20*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*108 %*	*80-120*		*P3L1808*	*12/18/23 10:39*	*12/18/23 15:20*	*EPA 8021B*	
Xylenes (total)	ND	0.00217	mg/kg dry	1	[CALC]	12/18/23 10:39	12/18/23 15:20	EPA 8021B	
Total BTEX	ND	0.00109	mg/kg dry	1	[CALC]	12/18/23 10:39	12/18/23 15:20	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.2	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C12-C28	ND	27.2	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C28-C35	ND	27.2	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*70.0 %*	*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*77.7 %*	*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.2	mg/kg dry	1	[CALC]	12/12/23 11:08	12/13/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**65.4**	1.09	mg/kg dry	1	P3L1804	12/18/23 09:07	12/26/23 12:33	EPA 300.0	
% Moisture	**8.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-404 @ 3FT

3L07006-03 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00108	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 15:45	EPA 8021B	
Toluene	ND	0.00108	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 15:45	EPA 8021B	
Ethylbenzene	ND	0.00108	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 15:45	EPA 8021B	
Xylene (p/m)	ND	0.00215	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 15:45	EPA 8021B	
Xylene (o)	ND	0.00108	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 15:45	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*95.3 %*	*80-120*		*P3L1808*	*12/18/23 10:39*	*12/18/23 15:45*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*107 %*	*80-120*		*P3L1808*	*12/18/23 10:39*	*12/18/23 15:45*	*EPA 8021B*	
Xylenes (total)	ND	0.00215	mg/kg dry	1	[CALC]	12/18/23 10:39	12/18/23 15:45	EPA 8021B	
Total BTEX	ND	0.00108	mg/kg dry	1	[CALC]	12/18/23 10:39	12/18/23 15:45	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.9	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C12-C28	ND	26.9	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C28-C35	ND	26.9	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*75.1 %*	*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*85.3 %*	*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.9	mg/kg dry	1	[CALC]	12/12/23 11:08	12/13/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**224**	1.08	mg/kg dry	1	P3L1804	12/18/23 09:07	12/26/23 12:55	EPA 300.0	
% Moisture	**7.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-405 @ 1.5

3L07006-04 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00102	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 16:09	EPA 8021B	
Toluene	ND	0.00102	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 16:09	EPA 8021B	
Ethylbenzene	ND	0.00102	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 16:09	EPA 8021B	
Xylene (p/m)	ND	0.00204	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 16:09	EPA 8021B	
Xylene (o)	ND	0.00102	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 16:09	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*95.8 %*	*80-120*		*P3L1808*	*12/18/23 10:39*	*12/18/23 16:09*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*106 %*	*80-120*		*P3L1808*	*12/18/23 10:39*	*12/18/23 16:09*	*EPA 8021B*	
Xylenes (total)	ND	0.00204	mg/kg dry	1	[CALC]	12/18/23 10:39	12/18/23 16:09	EPA 8021B	
Total BTEX	ND	0.00102	mg/kg dry	1	[CALC]	12/18/23 10:39	12/18/23 16:09	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.5	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C12-C28	ND	25.5	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C28-C35	ND	25.5	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*83.3 %*	*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*93.2 %*	*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.5	mg/kg dry	1	[CALC]	12/12/23 11:08	12/13/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**68.5**	1.02	mg/kg dry	1	P3L1804	12/18/23 09:07	12/26/23 14:58	EPA 300.0	
% Moisture	**2.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-406 @ 1.5

3L07006-05 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00102	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 16:34	EPA 8021B	
Toluene	ND	0.00102	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 16:34	EPA 8021B	
Ethylbenzene	ND	0.00102	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 16:34	EPA 8021B	
Xylene (p/m)	ND	0.00204	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 16:34	EPA 8021B	
Xylene (o)	ND	0.00102	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 16:34	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.2 %*	*80-120*		*P3L1808*	*12/18/23 10:39*	*12/18/23 16:34*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*107 %*	*80-120*		*P3L1808*	*12/18/23 10:39*	*12/18/23 16:34*	*EPA 8021B*	
Xylenes (total)	ND	0.00204	mg/kg dry	1	[CALC]	12/18/23 10:39	12/18/23 16:34	EPA 8021B	
Total BTEX	ND	0.00102	mg/kg dry	1	[CALC]	12/18/23 10:39	12/18/23 16:34	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.5	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C12-C28	ND	25.5	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C28-C35	ND	25.5	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*77.6 %*	*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*87.5 %*	*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.5	mg/kg dry	1	[CALC]	12/12/23 11:08	12/13/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**115**	1.02	mg/kg dry	1	P3L1804	12/18/23 09:07	12/26/23 15:20	EPA 300.0	
% Moisture	**2.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-407 @ 1.5

3L07006-06 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00110	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 16:59	EPA 8021B	
Toluene	ND	0.00110	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 16:59	EPA 8021B	
Ethylbenzene	ND	0.00110	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 16:59	EPA 8021B	
Xylene (p/m)	ND	0.00220	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 16:59	EPA 8021B	
Xylene (o)	ND	0.00110	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 16:59	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*109 %*	*80-120*		*P3L1808*	*12/18/23 10:39*	*12/18/23 16:59*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.2 %*	*80-120*		*P3L1808*	*12/18/23 10:39*	*12/18/23 16:59*	*EPA 8021B*	
Xylenes (total)	ND	0.00220	mg/kg dry	1	[CALC]	12/18/23 10:39	12/18/23 16:59	EPA 8021B	
Total BTEX	ND	0.00110	mg/kg dry	1	[CALC]	12/18/23 10:39	12/18/23 16:59	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.5	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C12-C28	ND	27.5	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C28-C35	ND	27.5	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*80.1 %*	*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*91.2 %*	*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.5	mg/kg dry	1	[CALC]	12/12/23 11:08	12/13/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**22.6**	1.10	mg/kg dry	1	P3L1804	12/18/23 09:07	12/26/23 15:41	EPA 300.0	
% Moisture	**9.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-408 @ 1.5

3L07006-07 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 17:23	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 17:23	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 17:23	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 17:23	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 17:23	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.4 %*	*80-120*		*P3L1808*	*12/18/23 10:39*	*12/18/23 17:23*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*107 %*	*80-120*		*P3L1808*	*12/18/23 10:39*	*12/18/23 17:23*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/18/23 10:39	12/18/23 17:23	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/18/23 10:39	12/18/23 17:23	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*83.3 %*	*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*95.3 %*	*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/12/23 11:08	12/13/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**45.3**	1.05	mg/kg dry	1	P3L1804	12/18/23 09:07	12/26/23 16:02	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-409 @ 1.5

3L07006-08 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 17:48	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 17:48	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 17:48	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 17:48	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 17:48	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*107 %*	*80-120*		*P3L1808*	*12/18/23 10:39*	*12/18/23 17:48*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.9 %*	*80-120*		*P3L1808*	*12/18/23 10:39*	*12/18/23 17:48*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/18/23 10:39	12/18/23 17:48	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/18/23 10:39	12/18/23 17:48	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*81.5 %*	*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*93.3 %*	*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/12/23 11:08	12/13/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**53.9**	1.03	mg/kg dry	1	P3L1804	12/18/23 09:07	12/26/23 16:24	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-410 @ 1.5

3L07006-09 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00110	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 18:12	EPA 8021B	
Toluene	ND	0.00110	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 18:12	EPA 8021B	
Ethylbenzene	ND	0.00110	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 18:12	EPA 8021B	
Xylene (p/m)	ND	0.00220	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 18:12	EPA 8021B	
Xylene (o)	ND	0.00110	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 18:12	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*96.3 %*		*80-120*		*P3L1808*	*12/18/23 10:39*	*12/18/23 18:12*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*108 %*		*80-120*		*P3L1808*	*12/18/23 10:39*	*12/18/23 18:12*	*EPA 8021B*	
Xylenes (total)	ND	0.00220	mg/kg dry	1	[CALC]	12/18/23 10:39	12/18/23 18:12	EPA 8021B	
Total BTEX	ND	0.00110	mg/kg dry	1	[CALC]	12/18/23 10:39	12/18/23 18:12	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.5	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C12-C28	ND	27.5	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C28-C35	ND	27.5	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*65.2 %*		*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	*S-GC*
Surrogate: o-Terphenyl	*73.2 %*		*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.5	mg/kg dry	1	[CALC]	12/12/23 11:08	12/13/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**23.3**	1.10	mg/kg dry	1	P3L1804	12/18/23 09:07	12/26/23 16:45	EPA 300.0	
% Moisture	**9.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-411 @ 1.5

3L07006-10 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 19:25	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 19:25	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 19:25	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 19:25	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 19:25	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*108 %*	*80-120*		*P3L1808*	*12/18/23 10:39*	*12/18/23 19:25*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*97.2 %*	*80-120*		*P3L1808*	*12/18/23 10:39*	*12/18/23 19:25*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/18/23 10:39	12/18/23 19:25	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/18/23 10:39	12/18/23 19:25	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*79.3 %*	*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*88.9 %*	*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/12/23 11:08	12/13/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**61.8**	1.03	mg/kg dry	1	P3L1804	12/18/23 09:07	12/26/23 17:06	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-412 @ 1.5

3L07006-11 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00102	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 19:50	EPA 8021B	
Toluene	ND	0.00102	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 19:50	EPA 8021B	
Ethylbenzene	ND	0.00102	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 19:50	EPA 8021B	
Xylene (p/m)	ND	0.00204	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 19:50	EPA 8021B	
Xylene (o)	ND	0.00102	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 19:50	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.9 %*	*80-120*		*P3L1808*	*12/18/23 10:39*	*12/18/23 19:50*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*107 %*	*80-120*		*P3L1808*	*12/18/23 10:39*	*12/18/23 19:50*	*EPA 8021B*	
Xylenes (total)	ND	0.00204	mg/kg dry	1	[CALC]	12/18/23 10:39	12/18/23 19:50	EPA 8021B	
Total BTEX	ND	0.00102	mg/kg dry	1	[CALC]	12/18/23 10:39	12/18/23 19:50	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.5	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C12-C28	ND	25.5	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C28-C35	ND	25.5	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*88.2 %*	*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*101 %*	*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.5	mg/kg dry	1	[CALC]	12/12/23 11:08	12/13/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**27.1**	1.02	mg/kg dry	1	P3L1804	12/18/23 09:07	12/26/23 18:11	EPA 300.0	
% Moisture	**2.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-413 @ 1.5

3L07006-12 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 20:14	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 20:14	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 20:14	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 20:14	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 20:14	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*107 %*	*80-120*		*P3L1808*	*12/18/23 10:39*	*12/18/23 20:14*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.9 %*	*80-120*		*P3L1808*	*12/18/23 10:39*	*12/18/23 20:14*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/18/23 10:39	12/18/23 20:14	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/18/23 10:39	12/18/23 20:14	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*86.0 %*	*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*98.6 %*	*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/12/23 11:08	12/13/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**26.4**	1.03	mg/kg dry	1	P3L1804	12/18/23 09:07	12/26/23 19:15	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-414 @ 1.5

3L07006-13 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 20:38	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 20:38	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 20:38	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 20:38	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 20:38	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*108 %*	*80-120*		*P3L1808*	*12/18/23 10:39*	*12/18/23 20:38*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*97.1 %*	*80-120*		*P3L1808*	*12/18/23 10:39*	*12/18/23 20:38*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/18/23 10:39	12/18/23 20:38	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/18/23 10:39	12/18/23 20:38	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*77.6 %*	*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*89.1 %*	*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/12/23 11:08	12/13/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**8.28**	1.03	mg/kg dry	1	P3L1804	12/18/23 09:07	12/26/23 19:36	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-415 @ 1.5

3L07006-14 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 21:03	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 21:03	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 21:03	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 21:03	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 21:03	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*97.5 %*		*80-120*		*P3L1808*	*12/18/23 10:39*	*12/18/23 21:03*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*107 %*		*80-120*		*P3L1808*	*12/18/23 10:39*	*12/18/23 21:03*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/18/23 10:39	12/18/23 21:03	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/18/23 10:39	12/18/23 21:03	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*78.2 %*		*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*91.1 %*		*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/12/23 11:08	12/13/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**53.7**	1.03	mg/kg dry	1	P3L1804	12/18/23 09:07	12/26/23 19:58	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-416 @ 3FT

3L07006-15 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 21:27	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 21:27	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 21:27	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 21:27	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 21:27	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*97.5 %*	*80-120*		*P3L1808*	*12/18/23 10:39*	*12/18/23 21:27*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*108 %*	*80-120*		*P3L1808*	*12/18/23 10:39*	*12/18/23 21:27*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/18/23 10:39	12/18/23 21:27	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/18/23 10:39	12/18/23 21:27	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*82.1 %*	*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*89.4 %*	*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/12/23 11:08	12/13/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**54.2**	1.04	mg/kg dry	1	P3L1804	12/18/23 09:07	12/26/23 20:19	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-417 @ 3FT

3L07006-16 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00112	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 21:52	EPA 8021B	
Toluene	ND	0.00112	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 21:52	EPA 8021B	
Ethylbenzene	ND	0.00112	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 21:52	EPA 8021B	
Xylene (p/m)	ND	0.00225	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 21:52	EPA 8021B	
Xylene (o)	ND	0.00112	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 21:52	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*97.3 %*	*80-120*		*P3L1808*	*12/18/23 10:39*	*12/18/23 21:52*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*108 %*	*80-120*		*P3L1808*	*12/18/23 10:39*	*12/18/23 21:52*	*EPA 8021B*	
Xylenes (total)	ND	0.00225	mg/kg dry	1	[CALC]	12/18/23 10:39	12/18/23 21:52	EPA 8021B	
Total BTEX	ND	0.00112	mg/kg dry	1	[CALC]	12/18/23 10:39	12/18/23 21:52	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	28.1	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C12-C28	ND	28.1	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C28-C35	ND	28.1	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*69.3 %*	*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	*S-GC*
Surrogate: o-Terphenyl		*80.0 %*	*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	28.1	mg/kg dry	1	[CALC]	12/12/23 11:08	12/13/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**37.6**	1.12	mg/kg dry	1	P3L1804	12/18/23 09:07	12/26/23 20:40	EPA 300.0	
% Moisture	**11.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-418 @ 3FT

3L07006-17 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00112	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 22:16	EPA 8021B	
Toluene	ND	0.00112	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 22:16	EPA 8021B	
Ethylbenzene	ND	0.00112	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 22:16	EPA 8021B	
Xylene (p/m)	ND	0.00225	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 22:16	EPA 8021B	
Xylene (o)	ND	0.00112	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 22:16	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*97.1 %*		*80-120*		*P3L1808*	*12/18/23 10:39*	*12/18/23 22:16*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*108 %*		*80-120*		*P3L1808*	*12/18/23 10:39*	*12/18/23 22:16*	*EPA 8021B*	
Xylenes (total)	ND	0.00225	mg/kg dry	1	[CALC]	12/18/23 10:39	12/18/23 22:16	EPA 8021B	
Total BTEX	ND	0.00112	mg/kg dry	1	[CALC]	12/18/23 10:39	12/18/23 22:16	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	28.1	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C12-C28	ND	28.1	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C28-C35	ND	28.1	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*70.3 %*		*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*82.2 %*		*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	28.1	mg/kg dry	1	[CALC]	12/12/23 11:08	12/13/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**30.4**	1.12	mg/kg dry	1	P3L1804	12/18/23 09:07	12/26/23 21:02	EPA 300.0	
% Moisture	**11.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-419 @ 3FT

3L07006-18 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00112	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 22:40	EPA 8021B	
Toluene	ND	0.00112	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 22:40	EPA 8021B	
Ethylbenzene	ND	0.00112	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 22:40	EPA 8021B	
Xylene (p/m)	ND	0.00225	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 22:40	EPA 8021B	
Xylene (o)	ND	0.00112	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 22:40	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*97.2 %*	*80-120*		*P3L1808*	*12/18/23 10:39*	*12/18/23 22:40*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*108 %*	*80-120*		*P3L1808*	*12/18/23 10:39*	*12/18/23 22:40*	*EPA 8021B*	
Xylenes (total)	ND	0.00225	mg/kg dry	1	[CALC]	12/18/23 10:39	12/18/23 22:40	EPA 8021B	
Total BTEX	ND	0.00112	mg/kg dry	1	[CALC]	12/18/23 10:39	12/18/23 22:40	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	28.1	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C12-C28	ND	28.1	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
>C28-C35	ND	28.1	mg/kg dry	1	P3L1216	12/12/23 11:08	12/13/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*73.8 %*	*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*85.5 %*	*70-130*		*P3L1216*	*12/12/23 11:08*	*12/13/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	28.1	mg/kg dry	1	[CALC]	12/12/23 11:08	12/13/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**29.1**	1.12	mg/kg dry	1	P3L1804	12/18/23 09:07	12/26/23 21:23	EPA 300.0	
% Moisture	**11.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-420 @ 3FT

3L07006-19 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00114	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 23:05	EPA 8021B	
Toluene	ND	0.00114	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 23:05	EPA 8021B	
Ethylbenzene	ND	0.00114	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 23:05	EPA 8021B	
Xylene (p/m)	ND	0.00227	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 23:05	EPA 8021B	
Xylene (o)	ND	0.00114	mg/kg dry	1	P3L1808	12/18/23 10:39	12/18/23 23:05	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*108 %*	*80-120*		*P3L1808*	*12/18/23 10:39*	*12/18/23 23:05*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*97.1 %*	*80-120*		*P3L1808*	*12/18/23 10:39*	*12/18/23 23:05*	*EPA 8021B*	
Xylenes (total)	ND	0.00227	mg/kg dry	1	[CALC]	12/18/23 10:39	12/18/23 23:05	EPA 8021B	
Total BTEX	ND	0.00114	mg/kg dry	1	[CALC]	12/18/23 10:39	12/18/23 23:05	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	28.4	mg/kg dry	1	P3L1104	12/11/23 08:00	12/11/23 12:00	TPH 8015M	
>C12-C28	ND	28.4	mg/kg dry	1	P3L1104	12/11/23 08:00	12/11/23 12:00	TPH 8015M	
>C28-C35	ND	28.4	mg/kg dry	1	P3L1104	12/11/23 08:00	12/11/23 12:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*75.8 %*	*70-130*		*P3L1104*	*12/11/23 08:00*	*12/11/23 12:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*83.4 %*	*70-130*		*P3L1104*	*12/11/23 08:00*	*12/11/23 12:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	28.4	mg/kg dry	1	[CALC]	12/11/23 08:00	12/11/23 12:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**76.7**	1.14	mg/kg dry	1	P3L1804	12/18/23 09:07	12/26/23 21:45	EPA 300.0	
% Moisture	**12.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-421 @ 3FT

3L07006-20 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00114	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 15:42	EPA 8021B	
Toluene	ND	0.00114	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 15:42	EPA 8021B	
Ethylbenzene	ND	0.00114	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 15:42	EPA 8021B	
Xylene (p/m)	ND	0.00227	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 15:42	EPA 8021B	
Xylene (o)	ND	0.00114	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 15:42	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*107 %*	*80-120*		*P3L1903*	*12/19/23 09:06*	*12/19/23 15:42*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.9 %*	*80-120*		*P3L1903*	*12/19/23 09:06*	*12/19/23 15:42*	*EPA 8021B*	
Xylenes (total)	ND	0.00227	mg/kg dry	1	[CALC]	12/19/23 09:06	12/19/23 15:42	EPA 8021B	
Total BTEX	ND	0.00114	mg/kg dry	1	[CALC]	12/19/23 09:06	12/19/23 15:42	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	28.4	mg/kg dry	1	P3L1104	12/11/23 08:00	12/11/23 12:00	TPH 8015M	
>C12-C28	ND	28.4	mg/kg dry	1	P3L1104	12/11/23 08:00	12/11/23 12:00	TPH 8015M	
>C28-C35	ND	28.4	mg/kg dry	1	P3L1104	12/11/23 08:00	12/11/23 12:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*73.6 %*	*70-130*		*P3L1104*	*12/11/23 08:00*	*12/11/23 12:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*82.0 %*	*70-130*		*P3L1104*	*12/11/23 08:00*	*12/11/23 12:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	28.4	mg/kg dry	1	[CALC]	12/11/23 08:00	12/11/23 12:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**76.5**	1.14	mg/kg dry	1	P3L1804	12/18/23 09:07	12/26/23 22:06	EPA 300.0	
% Moisture	**12.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-422 @ 3FT

3L07006-21 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00102	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 16:06	EPA 8021B	
Toluene	ND	0.00102	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 16:06	EPA 8021B	
Ethylbenzene	ND	0.00102	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 16:06	EPA 8021B	
Xylene (p/m)	ND	0.00204	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 16:06	EPA 8021B	
Xylene (o)	ND	0.00102	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 16:06	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*105 %*	*80-120*		*P3L1903*	*12/19/23 09:06*	*12/19/23 16:06*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*97.0 %*	*80-120*		*P3L1903*	*12/19/23 09:06*	*12/19/23 16:06*	*EPA 8021B*	
Xylenes (total)	ND	0.00204	mg/kg dry	1	[CALC]	12/19/23 09:06	12/19/23 16:06	EPA 8021B	
Total BTEX	ND	0.00102	mg/kg dry	1	[CALC]	12/19/23 09:06	12/19/23 16:06	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.5	mg/kg dry	1	P3L1104	12/11/23 08:00	12/11/23 11:00	TPH 8015M	
>C12-C28	**116**	25.5	mg/kg dry	1	P3L1104	12/11/23 08:00	12/11/23 11:00	TPH 8015M	
>C28-C35	**29.1**	25.5	mg/kg dry	1	P3L1104	12/11/23 08:00	12/11/23 11:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*79.6 %*	*70-130*		*P3L1104*	*12/11/23 08:00*	*12/11/23 11:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*83.9 %*	*70-130*		*P3L1104*	*12/11/23 08:00*	*12/11/23 11:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	**146**	25.5	mg/kg dry	1	[CALC]	12/11/23 08:00	12/11/23 11:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**100**	1.02	mg/kg dry	1	P3L2008	12/20/23 12:33	12/21/23 15:06	EPA 300.0	
% Moisture	**2.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-423 @ 3FT

3L07006-22 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00102	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 16:31	EPA 8021B	
Toluene	ND	0.00102	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 16:31	EPA 8021B	
Ethylbenzene	ND	0.00102	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 16:31	EPA 8021B	
Xylene (p/m)	ND	0.00204	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 16:31	EPA 8021B	
Xylene (o)	ND	0.00102	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 16:31	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.7 %*	*80-120*		*P3L1903*	*12/19/23 09:06*	*12/19/23 16:31*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*105 %*	*80-120*		*P3L1903*	*12/19/23 09:06*	*12/19/23 16:31*	*EPA 8021B*	
Xylenes (total)	ND	0.00204	mg/kg dry	1	[CALC]	12/19/23 09:06	12/19/23 16:31	EPA 8021B	
Total BTEX	ND	0.00102	mg/kg dry	1	[CALC]	12/19/23 09:06	12/19/23 16:31	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.5	mg/kg dry	1	P3L1104	12/11/23 08:00	12/11/23 11:00	TPH 8015M	
>C12-C28	**105**	25.5	mg/kg dry	1	P3L1104	12/11/23 08:00	12/11/23 11:00	TPH 8015M	
>C28-C35	**26.7**	25.5	mg/kg dry	1	P3L1104	12/11/23 08:00	12/11/23 11:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*83.7 %*	*70-130*		*P3L1104*	*12/11/23 08:00*	*12/11/23 11:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*79.1 %*	*70-130*		*P3L1104*	*12/11/23 08:00*	*12/11/23 11:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	**132**	25.5	mg/kg dry	1	[CALC]	12/11/23 08:00	12/11/23 11:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**125**	1.02	mg/kg dry	1	P3L2008	12/20/23 12:33	12/21/23 15:21	EPA 300.0	
% Moisture	**2.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-424 @ 3FT

3L07006-23 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00101	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 16:55	EPA 8021B	
Toluene	ND	0.00101	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 16:55	EPA 8021B	
Ethylbenzene	ND	0.00101	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 16:55	EPA 8021B	
Xylene (p/m)	ND	0.00202	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 16:55	EPA 8021B	
Xylene (o)	ND	0.00101	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 16:55	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*97.3 %*	*80-120*		*P3L1903*	*12/19/23 09:06*	*12/19/23 16:55*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*106 %*	*80-120*		*P3L1903*	*12/19/23 09:06*	*12/19/23 16:55*	*EPA 8021B*	
Xylenes (total)	ND	0.00202	mg/kg dry	1	[CALC]	12/19/23 09:06	12/19/23 16:55	EPA 8021B	
Total BTEX	ND	0.00101	mg/kg dry	1	[CALC]	12/19/23 09:06	12/19/23 16:55	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.3	mg/kg dry	1	P3L1104	12/11/23 08:00	12/11/23 11:00	TPH 8015M	
>C12-C28	**119**	25.3	mg/kg dry	1	P3L1104	12/11/23 08:00	12/11/23 11:00	TPH 8015M	
>C28-C35	**31.0**	25.3	mg/kg dry	1	P3L1104	12/11/23 08:00	12/11/23 11:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*76.4 %*	*70-130*		*P3L1104*	*12/11/23 08:00*	*12/11/23 11:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*80.1 %*	*70-130*		*P3L1104*	*12/11/23 08:00*	*12/11/23 11:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	**150**	25.3	mg/kg dry	1	[CALC]	12/11/23 08:00	12/11/23 11:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**127**	1.01	mg/kg dry	1	P3L2008	12/20/23 12:33	12/21/23 15:35	EPA 300.0	
% Moisture	**1.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-425 @ 3FT

3L07006-24 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00102	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 17:19	EPA 8021B	
Toluene	ND	0.00102	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 17:19	EPA 8021B	
Ethylbenzene	ND	0.00102	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 17:19	EPA 8021B	
Xylene (p/m)	ND	0.00204	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 17:19	EPA 8021B	
Xylene (o)	ND	0.00102	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 17:19	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*106 %*	*80-120*		*P3L1903*	*12/19/23 09:06*	*12/19/23 17:19*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*97.1 %*	*80-120*		*P3L1903*	*12/19/23 09:06*	*12/19/23 17:19*	*EPA 8021B*	
Xylenes (total)	ND	0.00204	mg/kg dry	1	[CALC]	12/19/23 09:06	12/19/23 17:19	EPA 8021B	
Total BTEX	ND	0.00102	mg/kg dry	1	[CALC]	12/19/23 09:06	12/19/23 17:19	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.5	mg/kg dry	1	P3L1104	12/11/23 08:00	12/11/23 11:00	TPH 8015M	
>C12-C28	**102**	25.5	mg/kg dry	1	P3L1104	12/11/23 08:00	12/11/23 11:00	TPH 8015M	
>C28-C35	**26.6**	25.5	mg/kg dry	1	P3L1104	12/11/23 08:00	12/11/23 11:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*77.0 %*	*70-130*		*P3L1104*	*12/11/23 08:00*	*12/11/23 11:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*81.8 %*	*70-130*		*P3L1104*	*12/11/23 08:00*	*12/11/23 11:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	**129**	25.5	mg/kg dry	1	[CALC]	12/11/23 08:00	12/11/23 11:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**118**	1.02	mg/kg dry	1	P3L2008	12/20/23 12:33	12/21/23 15:49	EPA 300.0	
% Moisture	**2.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-426 @ 1FT

3L07006-25 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 17:44	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 17:44	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 17:44	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 17:44	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 17:44	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*96.8 %*	*80-120*		*P3L1903*	*12/19/23 09:06*	*12/19/23 17:44*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*109 %*	*80-120*		*P3L1903*	*12/19/23 09:06*	*12/19/23 17:44*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/19/23 09:06	12/19/23 17:44	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/19/23 09:06	12/19/23 17:44	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L1104	12/11/23 08:00	12/11/23 11:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L1104	12/11/23 08:00	12/11/23 11:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L1104	12/11/23 08:00	12/11/23 11:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*78.7 %*	*70-130*		*P3L1104*	*12/11/23 08:00*	*12/11/23 11:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*84.9 %*	*70-130*		*P3L1104*	*12/11/23 08:00*	*12/11/23 11:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/11/23 08:00	12/11/23 11:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**11.3**	1.05	mg/kg dry	1	P3L2008	12/20/23 12:33	12/21/23 16:04	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-427 @ 1FT

3L07006-26 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 18:08	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 18:08	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 18:08	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 18:08	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 18:08	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*107 %*	*80-120*		*P3L1903*	*12/19/23 09:06*	*12/19/23 18:08*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*97.3 %*	*80-120*		*P3L1903*	*12/19/23 09:06*	*12/19/23 18:08*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/19/23 09:06	12/19/23 18:08	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	12/19/23 09:06	12/19/23 18:08	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L1104	12/11/23 08:00	12/11/23 11:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L1104	12/11/23 08:00	12/11/23 11:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L1104	12/11/23 08:00	12/11/23 11:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*79.7 %*	*70-130*		*P3L1104*	*12/11/23 08:00*	*12/11/23 11:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*85.8 %*	*70-130*		*P3L1104*	*12/11/23 08:00*	*12/11/23 11:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/11/23 08:00	12/11/23 11:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**13.3**	1.05	mg/kg dry	1	P3L2008	12/20/23 12:33	12/21/23 16:18	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-428 @ 2FT

3L07006-27 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 18:32	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 18:32	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 18:32	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 18:32	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 18:32	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*107 %*	*80-120*		*P3L1903*	*12/19/23 09:06*	*12/19/23 18:32*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*96.8 %*	*80-120*		*P3L1903*	*12/19/23 09:06*	*12/19/23 18:32*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/19/23 09:06	12/19/23 18:32	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	12/19/23 09:06	12/19/23 18:32	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L1104	12/11/23 08:00	12/11/23 11:00	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L1104	12/11/23 08:00	12/11/23 11:00	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L1104	12/11/23 08:00	12/11/23 11:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*80.8 %*	*70-130*		*P3L1104*	*12/11/23 08:00*	*12/11/23 11:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*85.7 %*	*70-130*		*P3L1104*	*12/11/23 08:00*	*12/11/23 11:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/11/23 08:00	12/11/23 11:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**22.5**	1.03	mg/kg dry	1	P3L2008	12/20/23 12:33	12/21/23 16:32	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-429 @ 2FT

3L07006-28 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 18:57	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 18:57	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 18:57	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 18:57	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L1903	12/19/23 09:06	12/19/23 18:57	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*97.4 %*	*80-120*		*P3L1903*	*12/19/23 09:06*	*12/19/23 18:57*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*106 %*	*80-120*		*P3L1903*	*12/19/23 09:06*	*12/19/23 18:57*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/19/23 09:06	12/19/23 18:57	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	12/19/23 09:06	12/19/23 18:57	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L1104	12/11/23 08:00	12/11/23 11:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L1104	12/11/23 08:00	12/11/23 11:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L1104	12/11/23 08:00	12/11/23 11:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*78.0 %*	*70-130*		*P3L1104*	*12/11/23 08:00*	*12/11/23 11:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*85.7 %*	*70-130*		*P3L1104*	*12/11/23 08:00*	*12/11/23 11:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/11/23 08:00	12/11/23 11:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**10.8**	1.04	mg/kg dry	1	P3L2008	12/20/23 12:33	12/21/23 16:47	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L1110	12/11/23 10:43	12/11/23 10:58	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1706 - * DEFAULT PREP *** **										
Blank (P3L1706-BLK1)				Prepared: 12/17/23 Analyzed: 12/18/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 1,4-Difluorobenzene	*0.112*		"	*0.120*		*93.0*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.146*		"	*0.120*		*122*	*80-120*			*S-GC*
LCS (P3L1706-BS1)				Prepared: 12/17/23 Analyzed: 12/18/23						
Benzene	0.0849	0.00100	mg/kg	0.100		84.9	80-120			
Toluene	0.0803	0.00100	"	0.100		80.3	80-120			
Ethylbenzene	0.0808	0.00100	"	0.100		80.8	80-120			
Xylene (p/m)	0.164	0.00200	"	0.200		82.2	80-120			
Xylene (o)	0.0824	0.00100	"	0.100		82.4	80-120			
Surrogate: 4-Bromofluorobenzene	*0.145*		"	*0.120*		*121*	*80-120*			*S-GC*
Surrogate: 1,4-Difluorobenzene	*0.116*		"	*0.120*		*96.8*	*80-120*			
LCS Dup (P3L1706-BSD1)				Prepared: 12/17/23 Analyzed: 12/18/23						
Benzene	0.0830	0.00100	mg/kg	0.100		83.0	80-120	2.26	20	
Toluene	0.0817	0.00100	"	0.100		81.7	80-120	1.74	20	
Ethylbenzene	0.0807	0.00100	"	0.100		80.7	80-120	0.0619	20	
Xylene (p/m)	0.165	0.00200	"	0.200		82.3	80-120	0.0851	20	
Xylene (o)	0.0821	0.00100	"	0.100		82.1	80-120	0.413	20	
Surrogate: 1,4-Difluorobenzene	*0.119*		"	*0.120*		*99.5*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.149*		"	*0.120*		*125*	*80-120*			*S-GC*
Calibration Blank (P3L1706-CCB1)				Prepared: 12/17/23 Analyzed: 12/18/23						
Benzene	0.0900		ug/kg							
Toluene	0.0900		"							
Ethylbenzene	0.100		"							
Xylene (p/m)	0.160		"							
Xylene (o)	0.0800		"							
Surrogate: 1,4-Difluorobenzene	*0.112*		"	*0.120*		*93.1*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.147*		"	*0.120*		*123*	*80-120*			*S-GC*

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1706 - * DEFAULT PREP *** **										
Calibration Blank (P3L1706-CCB2)				Prepared: 12/17/23 Analyzed: 12/18/23						
Benzene	0.0700		ug/kg							
Toluene	0.0700		"							
Ethylbenzene	0.0800		"							
Xylene (p/m)	0.0800		"							
Xylene (o)	0.0400		"							
Surrogate: 1,4-Difluorobenzene	*0.112*		*"*	*0.120*		*93.6*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.149*		*"*	*0.120*		*124*	*80-120*			*S-GC*
Calibration Check (P3L1706-CCV1)				Prepared & Analyzed: 12/17/23						
Benzene	0.0908	0.00100	mg/kg	0.100		90.8	80-120			
Toluene	0.0805	0.00100	"	0.100		80.5	80-120			
Ethylbenzene	0.0813	0.00100	"	0.100		81.3	80-120			
Xylene (p/m)	0.165	0.00200	"	0.200		82.5	80-120			
Xylene (o)	0.0804	0.00100	"	0.100		80.4	80-120			
Surrogate: 1,4-Difluorobenzene	*0.114*		*"*	*0.120*		*94.6*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.140*		*"*	*0.120*		*117*	*75-125*			
Calibration Check (P3L1706-CCV2)				Prepared: 12/17/23 Analyzed: 12/18/23						
Benzene	0.0822	0.00100	mg/kg	0.100		82.2	80-120			
Toluene	0.0809	0.00100	"	0.100		80.9	80-120			
Ethylbenzene	0.0844	0.00100	"	0.100		84.4	80-120			
Xylene (p/m)	0.166	0.00200	"	0.200		82.9	80-120			
Xylene (o)	0.0827	0.00100	"	0.100		82.7	80-120			
Surrogate: 1,4-Difluorobenzene	*0.134*		*"*	*0.120*		*112*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.170*		*"*	*0.120*		*141*	*75-125*			*S-GC*
Calibration Check (P3L1706-CCV3)				Prepared: 12/17/23 Analyzed: 12/18/23						
Benzene	0.109	0.00100	mg/kg	0.100		109	80-120			
Toluene	0.0995	0.00100	"	0.100		99.5	80-120			
Ethylbenzene	0.103	0.00100	"	0.100		103	80-120			
Xylene (p/m)	0.212	0.00200	"	0.200		106	80-120			
Xylene (o)	0.0972	0.00100	"	0.100		97.2	80-120			
Surrogate: 1,4-Difluorobenzene	*0.116*		*"*	*0.120*		*96.8*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.125*		*"*	*0.120*		*104*	*75-125*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1706 - * DEFAULT PREP *** **										
Matrix Spike (P3L1706-MS1)	**Source: 3L07005-05**			Prepared: 12/17/23 Analyzed: 12/18/23						
Benzene	8.39	0.00103	mg/kg dry	0.103	ND	NR	80-120			QM-05
Toluene	6.55	0.00103	"	0.103	ND	NR	80-120			QM-05
Ethylbenzene	7.26	0.00103	"	0.103	ND	NR	80-120			QM-05
Xylene (p/m)	14.4	0.00206	"	0.206	ND	NR	80-120			QM-05
Xylene (o)	6.72	0.00103	"	0.103	ND	NR	80-120			QM-05
Surrogate: 1,4-Difluorobenzene	*0.164*		"	*0.124*		*132*	*80-120*			*S-GC*
Surrogate: 4-Bromofluorobenzene	*0.306*		"	*0.124*		*247*	*80-120*			*S-GC*
Matrix Spike Dup (P3L1706-MSD1)	**Source: 3L07005-05**			Prepared: 12/17/23 Analyzed: 12/18/23						
Benzene	2.40	0.00103	mg/kg dry	0.103	ND	NR	80-120	111	20	QM-05
Toluene	1.86	0.00103	"	0.103	ND	NR	80-120	111	20	QM-05
Ethylbenzene	2.08	0.00103	"	0.103	ND	NR	80-120	111	20	QM-05
Xylene (p/m)	4.10	0.00206	"	0.206	ND	NR	80-120	111	20	QM-05
Xylene (o)	1.80	0.00103	"	0.103	ND	NR	80-120	115	20	QM-05
Surrogate: 1,4-Difluorobenzene	*0.122*		"	*0.124*		*98.7*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.166*		"	*0.124*		*134*	*80-120*			*S-GC*
Batch P3L1808 - * DEFAULT PREP *** **										
Blank (P3L1808-BLK1)				Prepared & Analyzed: 12/18/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 1,4-Difluorobenzene	*0.115*		"	*0.120*		*95.7*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.128*		"	*0.120*		*107*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1808 - * DEFAULT PREP *** **										
LCS (P3L1808-BS1)				Prepared & Analyzed: 12/18/23						
Benzene	0.106	0.00100	mg/kg	0.100		106	80-120			
Toluene	0.0972	0.00100	"	0.100		97.2	80-120			
Ethylbenzene	0.107	0.00100	"	0.100		107	80-120			
Xylene (p/m)	0.209	0.00200	"	0.200		104	80-120			
Xylene (o)	0.0939	0.00100	"	0.100		93.9	80-120			
Surrogate: 4-Bromofluorobenzene	*0.126*		"	*0.120*		*105*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.115*		"	*0.120*		*96.2*	*80-120*			
LCS Dup (P3L1808-BSD1)				Prepared & Analyzed: 12/18/23						
Benzene	0.115	0.00100	mg/kg	0.100		115	80-120	7.93	20	
Toluene	0.107	0.00100	"	0.100		107	80-120	9.18	20	
Ethylbenzene	0.117	0.00100	"	0.100		117	80-120	9.05	20	
Xylene (p/m)	0.226	0.00200	"	0.200		113	80-120	7.80	20	
Xylene (o)	0.102	0.00100	"	0.100		102	80-120	8.65	20	
Surrogate: 4-Bromofluorobenzene	*0.125*		"	*0.120*		*104*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.116*		"	*0.120*		*96.3*	*80-120*			
Calibration Blank (P3L1808-CCB1)				Prepared & Analyzed: 12/18/23						
Benzene	0.160		ug/kg							
Toluene	0.150		"							
Ethylbenzene	0.140		"							
Xylene (p/m)	0.180		"							
Xylene (o)	0.120		"							
Surrogate: 4-Bromofluorobenzene	*0.128*		"	*0.120*		*107*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.115*		"	*0.120*		*95.6*	*80-120*			
Calibration Blank (P3L1808-CCB2)				Prepared & Analyzed: 12/18/23						
Benzene	0.150		ug/kg							
Toluene	0.150		"							
Ethylbenzene	0.100		"							
Xylene (p/m)	0.200		"							
Xylene (o)	0.0900		"							
Surrogate: 4-Bromofluorobenzene	*0.129*		"	*0.120*		*108*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.116*		"	*0.120*		*96.7*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1808 - * DEFAULT PREP *** **										
Calibration Blank (P3L1808-CCB3)				Prepared: 12/18/23 Analyzed: 12/19/23						
Benzene	0.520		ug/kg							
Toluene	0.290		"							
Ethylbenzene	0.320		"							
Xylene (p/m)	0.550		"							
Xylene (o)	0.260		"							
Surrogate: 1,4-Difluorobenzene	*0.112*		*"*	*0.120*		*93.7*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.103*		*"*	*0.120*		*85.8*	*80-120*			
Calibration Check (P3L1808-CCV1)				Prepared & Analyzed: 12/18/23						
Benzene	0.109	0.00100	mg/kg	0.100		109	80-120			
Toluene	0.0995	0.00100	"	0.100		99.5	80-120			
Ethylbenzene	0.103	0.00100	"	0.100		103	80-120			
Xylene (p/m)	0.212	0.00200	"	0.200		106	80-120			
Xylene (o)	0.0972	0.00100	"	0.100		97.2	80-120			
Surrogate: 1,4-Difluorobenzene	*0.116*		*"*	*0.120*		*96.8*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.125*		*"*	*0.120*		*104*	*75-125*			
Calibration Check (P3L1808-CCV2)				Prepared & Analyzed: 12/18/23						
Benzene	0.119	0.00100	mg/kg	0.100		119	80-120			
Toluene	0.109	0.00100	"	0.100		109	80-120			
Ethylbenzene	0.112	0.00100	"	0.100		112	80-120			
Xylene (p/m)	0.226	0.00200	"	0.200		113	80-120			
Xylene (o)	0.105	0.00100	"	0.100		105	80-120			
Surrogate: 4-Bromofluorobenzene	*0.126*		*"*	*0.120*		*105*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.118*		*"*	*0.120*		*98.5*	*75-125*			
Calibration Check (P3L1808-CCV3)				Prepared: 12/18/23 Analyzed: 12/19/23						
Benzene	0.120	0.00100	mg/kg	0.100		120	80-120			
Toluene	0.107	0.00100	"	0.100		107	80-120			
Ethylbenzene	0.108	0.00100	"	0.100		108	80-120			
Xylene (p/m)	0.217	0.00200	"	0.200		109	80-120			
Xylene (o)	0.102	0.00100	"	0.100		102	80-120			
Surrogate: 4-Bromofluorobenzene	*0.124*		*"*	*0.120*		*103*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.117*		*"*	*0.120*		*97.2*	*75-125*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1808 - * DEFAULT PREP *** **										
Matrix Spike (P3L1808-MS1)	**Source: 3L07006-02**			Prepared & Analyzed: 12/18/23						
Benzene	0.107	0.00109	mg/kg dry	0.109	ND	98.4	80-120			
Toluene	0.0926	0.00109	"	0.109	ND	85.1	80-120			
Ethylbenzene	0.0973	0.00109	"	0.109	ND	89.5	80-120			
Xylene (p/m)	0.192	0.00217	"	0.217	ND	88.3	80-120			
Xylene (o)	0.0842	0.00109	"	0.109	ND	77.5	80-120			QM-05
Surrogate: 4-Bromofluorobenzene	*0.136*		"	*0.130*		*105*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.128*		"	*0.130*		*98.2*	*80-120*			
Matrix Spike Dup (P3L1808-MSD1)	**Source: 3L07006-02**			Prepared & Analyzed: 12/18/23						
Benzene	0.111	0.00109	mg/kg dry	0.109	ND	102	80-120	3.84	20	
Toluene	0.0960	0.00109	"	0.109	ND	88.3	80-120	3.69	20	
Ethylbenzene	0.101	0.00109	"	0.109	ND	93.0	80-120	3.85	20	
Xylene (p/m)	0.198	0.00217	"	0.217	ND	91.2	80-120	3.22	20	
Xylene (o)	0.0864	0.00109	"	0.109	ND	79.5	80-120	2.62	20	QM-05
Surrogate: 4-Bromofluorobenzene	*0.136*		"	*0.130*		*104*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.129*		"	*0.130*		*98.7*	*80-120*			
Batch P3L1903 - * DEFAULT PREP *** **										
Blank (P3L1903-BLK1)				Prepared & Analyzed: 12/19/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 1,4-Difluorobenzene	*0.116*		"	*0.120*		*96.3*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.126*		"	*0.120*		*105*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1903 - * DEFAULT PREP *** **										
LCS (P3L1903-BS1)				Prepared & Analyzed: 12/19/23						
Benzene	0.113	0.00100	mg/kg	0.100		113	80-120			
Toluene	0.103	0.00100	"	0.100		103	80-120			
Ethylbenzene	0.110	0.00100	"	0.100		110	80-120			
Xylene (p/m)	0.215	0.00200	"	0.200		107	80-120			
Xylene (o)	0.0969	0.00100	"	0.100		96.9	80-120			
Surrogate: 4-Bromofluorobenzene	*0.124*		*"*	*0.120*		*103*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.117*		*"*	*0.120*		*97.3*	*80-120*			
LCS Dup (P3L1903-BSD1)				Prepared & Analyzed: 12/19/23						
Benzene	0.104	0.00100	mg/kg	0.100		104	80-120	8.47	20	
Toluene	0.0939	0.00100	"	0.100		93.9	80-120	9.04	20	
Ethylbenzene	0.100	0.00100	"	0.100		100	80-120	9.38	20	
Xylene (p/m)	0.197	0.00200	"	0.200		98.7	80-120	8.29	20	
Xylene (o)	0.0886	0.00100	"	0.100		88.6	80-120	8.97	20	
Surrogate: 1,4-Difluorobenzene	*0.117*		*"*	*0.120*		*97.4*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.122*		*"*	*0.120*		*101*	*80-120*			
Calibration Blank (P3L1903-CCB1)				Prepared & Analyzed: 12/19/23						
Benzene	0.200		ug/kg							
Toluene	0.240		"							
Ethylbenzene	0.180		"							
Xylene (p/m)	0.270		"							
Xylene (o)	0.200		"							
Surrogate: 1,4-Difluorobenzene	*0.116*		*"*	*0.120*		*96.6*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.128*		*"*	*0.120*		*107*	*80-120*			
Calibration Blank (P3L1903-CCB2)				Prepared & Analyzed: 12/19/23						
Benzene	0.140		ug/kg							
Toluene	0.190		"							
Ethylbenzene	0.120		"							
Xylene (p/m)	0.240		"							
Xylene (o)	0.180		"							
Surrogate: 4-Bromofluorobenzene	*0.128*		*"*	*0.120*		*107*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.116*		*"*	*0.120*		*96.7*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1903 - * DEFAULT PREP *** **										
Calibration Check (P3L1903-CCV1)				Prepared & Analyzed: 12/19/23						
Benzene	0.119	0.00100	mg/kg	0.100		119	80-120			
Toluene	0.110	0.00100	"	0.100		110	80-120			
Ethylbenzene	0.112	0.00100	"	0.100		112	80-120			
Xylene (p/m)	0.226	0.00200	"	0.200		113	80-120			
Xylene (o)	0.106	0.00100	"	0.100		106	80-120			
Surrogate: 4-Bromofluorobenzene	*0.125*		"	*0.120*		*104*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.117*		"	*0.120*		*97.7*	*75-125*			
Calibration Check (P3L1903-CCV2)				Prepared & Analyzed: 12/19/23						
Benzene	0.119	0.00100	mg/kg	0.100		119	80-120			
Toluene	0.110	0.00100	"	0.100		110	80-120			
Ethylbenzene	0.110	0.00100	"	0.100		110	80-120			
Xylene (p/m)	0.223	0.00200	"	0.200		111	80-120			
Xylene (o)	0.104	0.00100	"	0.100		104	80-120			
Surrogate: 4-Bromofluorobenzene	*0.125*		"	*0.120*		*104*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.118*		"	*0.120*		*98.3*	*75-125*			
Calibration Check (P3L1903-CCV3)				Prepared: 12/19/23 Analyzed: 12/20/23						
Benzene	0.118	0.00100	mg/kg	0.100		118	80-120			
Toluene	0.110	0.00100	"	0.100		110	80-120			
Ethylbenzene	0.109	0.00100	"	0.100		109	80-120			
Xylene (p/m)	0.222	0.00200	"	0.200		111	80-120			
Xylene (o)	0.104	0.00100	"	0.100		104	80-120			
Surrogate: 4-Bromofluorobenzene	*0.125*		"	*0.120*		*104*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.119*		"	*0.120*		*98.8*	*75-125*			
Matrix Spike (P3L1903-MS1)	**Source: 3L07006-20**			Prepared: 12/19/23 Analyzed: 12/20/23						
Benzene	0.109	0.00114	mg/kg dry	0.114	ND	95.6	80-120			
Toluene	0.0904	0.00114	"	0.114	ND	79.6	80-120			QM-05
Ethylbenzene	0.0908	0.00114	"	0.114	ND	79.9	80-120			QM-05
Xylene (p/m)	0.171	0.00227	"	0.227	ND	75.1	80-120			QM-05
Xylene (o)	0.0822	0.00114	"	0.114	ND	72.4	80-120			QM-05
Surrogate: 4-Bromofluorobenzene	*0.143*		"	*0.136*		*105*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.134*		"	*0.136*		*98.2*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1903 - * DEFAULT PREP *** **										
Matrix Spike Dup (P3L1903-MSD1)	**Source: 3L07006-20**			Prepared: 12/19/23 Analyzed: 12/20/23						
Benzene	0.106	0.00114	mg/kg dry	0.114	ND	93.4	80-120	2.36	20	
Toluene	0.0867	0.00114	"	0.114	ND	76.3	80-120	4.16	20	QM-05
Ethylbenzene	0.0866	0.00114	"	0.114	ND	76.2	80-120	4.74	20	QM-05
Xylene (p/m)	0.165	0.00227	"	0.227	ND	72.6	80-120	3.45	20	QM-05
Xylene (o)	0.0770	0.00114	"	0.114	ND	67.8	80-120	6.52	20	QM-05
Surrogate: 4-Bromofluorobenzene	*0.141*		*"*	*0.136*		*103*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.134*		*"*	*0.136*		*98.3*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1104 - TX 1005										
Blank (P3L1104-BLK1)				Prepared & Analyzed: 12/11/23						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*79.0*		*"*	*100*		*79.0*	*70-130*			
Surrogate: o-Terphenyl	*46.1*		*"*	*50.0*		*92.2*	*70-130*			
LCS (P3L1104-BS1)				Prepared & Analyzed: 12/11/23						
C6-C12	834	25.0	mg/kg	1000		83.4	75-125			
>C12-C28	888	25.0	"	1000		88.8	75-125			
Surrogate: 1-Chlorooctane	*104*		*"*	*100*		*104*	*70-130*			
Surrogate: o-Terphenyl	*46.6*		*"*	*50.0*		*93.1*	*70-130*			
LCS Dup (P3L1104-BSD1)				Prepared & Analyzed: 12/11/23						
C6-C12	853	25.0	mg/kg	1000		85.3	75-125	2.20	20	
>C12-C28	907	25.0	"	1000		90.7	75-125	2.12	20	
Surrogate: 1-Chlorooctane	*105*		*"*	*100*		*105*	*70-130*			
Surrogate: o-Terphenyl	*45.4*		*"*	*50.0*		*90.8*	*70-130*			
Calibration Check (P3L1104-CCV1)				Prepared & Analyzed: 12/11/23						
C6-C12	520	25.0	mg/kg	500		104	85-115			
>C12-C28	564	25.0	"	500		113	85-115			
Surrogate: 1-Chlorooctane	*97.8*		*"*	*100*		*97.8*	*70-130*			
Surrogate: o-Terphenyl	*49.9*		*"*	*50.0*		*99.7*	*70-130*			
Calibration Check (P3L1104-CCV2)				Prepared & Analyzed: 12/11/23						
C6-C12	509	25.0	mg/kg	500		102	85-115			
>C12-C28	561	25.0	"	500		112	85-115			
Surrogate: 1-Chlorooctane	*96.8*		*"*	*100*		*96.8*	*70-130*			
Surrogate: o-Terphenyl	*45.6*		*"*	*50.0*		*91.2*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1104 - TX 1005										
Duplicate (P3L1104-DUP1)	**Source: 3L07006-28**			Prepared & Analyzed: 12/11/23						
C6-C12	25.3	26.0	mg/kg dry		12.6			67.2	20	R3
>C12-C28	21.1	26.0	"		ND				20	
Surrogate: 1-Chlorooctane	*83.0*		*"*	*104*		*79.7*	*70-130*			
Surrogate: o-Terphenyl	*44.5*		*"*	*52.1*		*85.5*	*70-130*			
Batch P3L1216 - TX 1005										
Blank (P3L1216-BLK1)				Prepared: 12/12/23 Analyzed: 12/13/23						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*79.8*		*"*	*100*		*79.8*	*70-130*			
Surrogate: o-Terphenyl	*48.5*		*"*	*50.0*		*97.1*	*70-130*			
LCS (P3L1216-BS1)				Prepared: 12/12/23 Analyzed: 12/13/23						
C6-C12	1420	25.0	mg/kg	1400		102	75-125			
>C12-C28	1400	25.0	"	1400		100	75-125			
Surrogate: 1-Chlorooctane	*117*		*"*	*100*		*117*	*70-130*			
Surrogate: o-Terphenyl	*53.0*		*"*	*50.0*		*106*	*70-130*			
Calibration Check (P3L1216-CCV1)				Prepared: 12/12/23 Analyzed: 12/13/23						
C6-C12	573	25.0	mg/kg	500		115	85-115			
>C12-C28	567	25.0	"	500		113	85-115			
Surrogate: 1-Chlorooctane	*112*		*"*	*100*		*112*	*70-130*			
Surrogate: o-Terphenyl	*55.6*		*"*	*50.0*		*111*	*70-130*			
Calibration Check (P3L1216-CCV2)				Prepared: 12/12/23 Analyzed: 12/13/23						
C6-C12	514	25.0	mg/kg	500		103	85-115			
>C12-C28	570	25.0	"	500		114	85-115			
Surrogate: 1-Chlorooctane	*99.9*		*"*	*100*		*99.9*	*70-130*			
Surrogate: o-Terphenyl	*52.0*		*"*	*50.0*		*104*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1216 - TX 1005										
Duplicate (P3L1216-DUP1)	**Source: 3L07006-18**		Prepared: 12/12/23 Analyzed: 12/13/23							
C6-C12	19.1	28.1	mg/kg dry		11.6			48.8	20	
>C12-C28	ND	28.1	"		ND				20	
Surrogate: 1-Chlorooctane	*82.8*		*"*	*112*		*73.7*	*70-130*			
Surrogate: o-Terphenyl	*45.8*		*"*	*56.2*		*81.5*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1110 - * DEFAULT PREP *** **										
Blank (P3L1110-BLK1)				Prepared & Analyzed: 12/11/23						
% Moisture	ND	0.1	%							
Blank (P3L1110-BLK2)				Prepared & Analyzed: 12/11/23						
% Moisture	ND	0.1	%							
Blank (P3L1110-BLK3)				Prepared & Analyzed: 12/11/23						
% Moisture	ND	0.1	%							
Blank (P3L1110-BLK4)				Prepared & Analyzed: 12/11/23						
% Moisture	ND	0.1	%							
Blank (P3L1110-BLK5)				Prepared & Analyzed: 12/11/23						
% Moisture	ND	0.1	%							
Blank (P3L1110-BLK6)				Prepared & Analyzed: 12/11/23						
% Moisture	ND	0.1	%							
Blank (P3L1110-BLK7)				Prepared & Analyzed: 12/11/23						
% Moisture	ND	0.1	%							
Duplicate (P3L1110-DUP1)	**Source: 3L07003-10**			Prepared & Analyzed: 12/11/23						
% Moisture	5.0	0.1	%		4.0			22.2	20	
Duplicate (P3L1110-DUP2)	**Source: 3L07003-20**			Prepared & Analyzed: 12/11/23						
% Moisture	4.0	0.1	%		4.0			0.00	20	
Duplicate (P3L1110-DUP3)	**Source: 3L07004-11**			Prepared & Analyzed: 12/11/23						
% Moisture	5.0	0.1	%		5.0			0.00	20	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1110 - * DEFAULT PREP *** **										
Duplicate (P3L1110-DUP4)		**Source: 3L07004-21**		Prepared & Analyzed: 12/11/23						
% Moisture	2.0	0.1	%		2.0			0.00	20	
Duplicate (P3L1110-DUP5)		**Source: 3L07004-36**		Prepared & Analyzed: 12/11/23						
% Moisture	3.0	0.1	%		3.0			0.00	20	
Duplicate (P3L1110-DUP6)		**Source: 3L07004-46**		Prepared & Analyzed: 12/11/23						
% Moisture	4.0	0.1	%		4.0			0.00	20	
Duplicate (P3L1110-DUP7)		**Source: 3L07005-13**		Prepared & Analyzed: 12/11/23						
% Moisture	8.0	0.1	%		8.0			0.00	20	
Duplicate (P3L1110-DUP8)		**Source: 3L07006-03**		Prepared & Analyzed: 12/11/23						
% Moisture	7.0	0.1	%		7.0			0.00	20	
Duplicate (P3L1110-DUP9)		**Source: 3L07006-18**		Prepared & Analyzed: 12/11/23						
% Moisture	11.0	0.1	%		11.0			0.00	20	
Duplicate (P3L1110-DUPA)		**Source: 3L07006-28**		Prepared & Analyzed: 12/11/23						
% Moisture	4.0	0.1	%		4.0			0.00	20	
Duplicate (P3L1110-DUPB)		**Source: 3L08006-06**		Prepared & Analyzed: 12/11/23						
% Moisture	11.0	0.1	%		11.0			0.00	20	
Duplicate (P3L1110-DUPC)		**Source: 3L08012-01**		Prepared & Analyzed: 12/11/23						
% Moisture	11.0	0.1	%		11.0			0.00	20	
Duplicate (P3L1110-DUPD)		**Source: 3L08013-15**		Prepared & Analyzed: 12/11/23						
% Moisture	6.0	0.1	%		7.0			15.4	20	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1804 - * DEFAULT PREP *** **										
Blank (P3L1804-BLK1)				Prepared: 12/18/23 Analyzed: 12/26/23						
Chloride	ND	1.00	mg/kg							
LCS (P3L1804-BS1)				Prepared: 12/18/23 Analyzed: 12/26/23						
Chloride	20.8		mg/kg	20.0		104	90-110			
LCS Dup (P3L1804-BSD1)				Prepared: 12/18/23 Analyzed: 12/26/23						
Chloride	21.2		mg/kg	20.0		106	90-110	2.04	10	
Calibration Check (P3L1804-CCV1)				Prepared: 12/18/23 Analyzed: 12/26/23						
Chloride	20.6		mg/kg	20.0		103	90-110			
Calibration Check (P3L1804-CCV2)				Prepared: 12/18/23 Analyzed: 12/26/23						
Chloride	21.0		mg/kg	20.0		105	90-110			
Matrix Spike (P3L1804-MS1)		**Source: 3L07006-01**		Prepared: 12/18/23 Analyzed: 12/26/23						
Chloride	113		mg/kg	100	1.16	112	80-120			
Matrix Spike (P3L1804-MS2)		**Source: 3L07006-11**		Prepared: 12/18/23 Analyzed: 12/26/23						
Chloride	113		mg/kg	100	0.531	113	80-120			
Matrix Spike Dup (P3L1804-MSD1)		**Source: 3L07006-01**		Prepared: 12/18/23 Analyzed: 12/26/23						
Chloride	113		mg/kg	100	1.16	112	80-120	0.164	20	
Matrix Spike Dup (P3L1804-MSD2)		**Source: 3L07006-11**		Prepared: 12/18/23 Analyzed: 12/26/23						
Chloride	112		mg/kg	100	0.531	112	80-120	0.906	20	
Batch P3L2008 - * DEFAULT PREP *** **										
Blank (P3L2008-BLK1)				Prepared: 12/20/23 Analyzed: 12/22/23						
Chloride	ND	1.00	mg/kg							

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L2008 - * DEFAULT PREP *** **										
LCS (P3L2008-BS1)				Prepared: 12/20/23 Analyzed: 12/22/23						
Chloride	21.1		mg/kg	20.0		106	90-110			
LCS Dup (P3L2008-BSD1)				Prepared: 12/20/23 Analyzed: 12/22/23						
Chloride	20.4		mg/kg	20.0		102	90-110	3.60	10	
Calibration Check (P3L2008-CCV2)				Prepared: 12/20/23 Analyzed: 12/22/23						
Chloride	20.5		mg/kg	20.0		103	90-110			
Calibration Check (P3L2008-CCV3)				Prepared: 12/20/23 Analyzed: 12/22/23						
Chloride	21.8		mg/kg	20.0		109	90-110			
Matrix Spike (P3L2008-MS1)		**Source: 3L08006-01**		Prepared: 12/20/23 Analyzed: 12/22/23						
Chloride	146		mg/kg	100	47.8	98.5	80-120			
Matrix Spike Dup (P3L2008-MSD1)		**Source: 3L08006-01**		Prepared: 12/20/23 Analyzed: 12/22/23						
Chloride	146		mg/kg	100	47.8	98.1	80-120	0.243	20	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Notes and Definitions

S-GC	Surrogate recovery outside of control limits. The data was accepted based on valid recovery of the remaining surrogate.
R3	The RPD exceeded the acceptance limit due to sample matrix effects.
QM-05	The spike recovery was outside acceptance limits for the MS and/or MSD due to matrix interference. The LCS and/or LCSD were within acceptance limits showing that the laboratory is in control and the data is acceptable.
BULK	Samples received in Bulk soil containers may be biased low in the nC6-C12 TPH Range
DET	Analyte DETECTED
ND	Analyte NOT DETECTED at or above the reporting limit
NR	Not Reported
dry	Sample results reported on a dry weight basis
RPD	Relative Percent Difference
LCS	Laboratory Control Spike
MS	Matrix Spike
Dup	Duplicate

Report Approved By: Brent Barron Date: 1/16/2024

Brent Barron, Laboratory Director/Technical Director

This material is intended only for the use of the individual (s) or entity to whom it is addressed, and may contain information that is privileged and confidential.

If you have received this material in error, please notify us immediately at 432-686-7235.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Page 900 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934 Fax No: _____
Sampler Signature: Jose Belloc e-mail: Jamey@Tellusservices

Project Name: Jalapeño
Project #: COEV # 11845
Project Loc: Lea, CO, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES

(lab use only)
ORDER #: 3L07006

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total #. of Containers	Preservation & # of Containers: Ice	HNO_3	HCl	H_2SO_4	NaOH	$Na_2S_2O_3$	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge	GW = Groundwater S=Soil/Solid	NP=Non-Potable Specify Other	Analyze For: TPH: TX 1005 TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA - 8021	TPH- EPA - 8015	Chlorides EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
1	BH-402 @ 1ft	1Ft	1Ft	12-6-23	8:47		1									S						X	X	X		
2	BH-403 @ 3ft	3ft	3ft	12-6-23	8:58		1									S						X	X	X		
3	BH-404 @ 3ft	3ft	3ft	12-6-23	8:52		1									S						X	X	X		
4	BH-405 @ 1.5	1.5	1.5	12-6-23	8:53		1									S						X	X	X		
5	BH-406 @ 1.5	1.5	1.5	12-6-23	8:55		1									S						X	X	X		
6	BH-407 @ 1.5	1.5	1.5	12-6-23	9:03		1									S						X	X	X		
7	BH-408 @ 1.5	1.5	1.5	12-6-23	9:05		1									S						X	X	X		
8	BH-409 @ 1.5	1.5	1.5	12-6-23	9:10		1									S						X	X	X		
9	BH-410 @ 1.5	1.5	1.5	12-6-23	9:12		1									S						X	X	X		
10	BH-411 @ 1.5	1.5	1.5	12-6-23	9:15		1									S						X	X	X		

Special Instructions: Report TPH-in-C6-C12 > C12-C28 > C28-C35 fractions aswell as total TPH
same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
Jose Belloc	12/7/23	8:46			
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL: Trina Bledsoe	Date 12/7/23	Time 8:46

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N
by Sampler/Client Rep. ?	Y	N

by Courier? UPS DHL FedEx Lone Star

Temperature Upon Receipt:
Received: 5.1 °C Thermometer: NCF
Adjusted: °C Factor: 1.3

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21

Page ___ of ___

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

Page 901 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934 Fax No: _____
Sampler Signature: Jose Bellor e-mail: Jamey@Tellusservices

Project Name: Jalapeño
Project #: COEV # 11845
Project Loc: Lea, CO, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES

(lab use only)
ORDER #: 3L07006

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total #. of Containers	Preservation & # of Containers: Ice	HNO_3	HCl	H_2SO_4	NaOH	$Na_2S_2O_3$	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge GW=Groundwater S=Soil/Solid NP=Non-Potable Specify Other	Analyze For: TCLP: TPH: TX 1005	TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA - 8021	TPH- EPA - 8015	Chlorides EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
11	BH-412@1.5	1.5	1.5	12-6-23	9:17		1									S				X	X	X		
12	BH-413@1.5	1.5	1.5	12-6-23	9:20																			
13	BH-414@1.5	1.5	1.5	12-6-23	9:23																			
14	BH-415@1.5	1.5	1.5	12-6-23	9:30																			
15	BH-416@3ft	3ft	3ft	12-6-23	9:32																			
16	BH-417@3ft	3ft	3ft	12-6-23	9:35																			
17	BH-418@3ft	3ft	3ft	12-6-23	9:35																			
18	BH-419@3ft	3ft	3ft	12-6-23	9:36																			
19	BH-420@3ft	3ft	3ft	12-6-23	9:38																			
20	BH-421@3ft	3ft	3ft	12-6-23	9:42																			

Special Instructions: Report TPH- in-C6-C12 > C12-C28 > C28-C35 fractions aswell as total TPH
same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
[signature]	12/7/23	8:46			
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL: [signature]	12/7/23	8:46

Laboratory Comments:
Sample Containers Intact? Y
VOCs Free of Headspace? Y
Labels on container(s) Y
Custody seals on container(s) N
Custody seals on cooler(s) N
Sample Hand Delivered N
by Sampler/Client Rep. ? N
by Courier? UPS DHL FedEx Lone Star
Temperature Upon Receipt:
Received: 5.1 °C Thermometor: NCF
Adjusted: °C Factor: 1.3

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21

Page 1 of 1

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

Page 902 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934 Fax No: _____
Sampler Signature: Jose Belloc e-mail: Jamey@Tellusservices

Project Name: Jalapeño
Project #: COEV # 11845
Project Loc: Lea, CO, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES

(lab use only)
ORDER #: 3L07006

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total # of Containers	Preservation & # of Containers: Ice	HNO_3	HCl	H_2SO_4	NaOH	$Na_2S_2O_3$	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge GW=Groundwater S=Soil/Solid NP=Non-Potable Specify Other	Analyze For: TCLP: TPH: TX 1005 TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX 8021	TPH-EPA-8015	Chlorides EPA-300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
21	BH-422 @ 3Ft	3Ft	3Ft	12-6-23	9:45		1									S				X	X	X		
22	BH-423 @ 3Ft	3Ft	3Ft	12-6-23	9:47																			
23	BH-424 @ 3Ft	3Ft	3Ft	12-6-23	9:50																			
24	BH-425 @ 3Ft	3Ft	3Ft	12-6-23	9:53																			
25	BH-426 @ 1Ft	1Ft	1Ft	12-6-23	9:55																			
26	BH-427 @ 1Ft	1Ft	1Ft	12-6-23	9:56																			
27	BH-428 @ 2Ft	2Ft	2Ft	12-6-23	10:00																			
28	BH-429 @ 2Ft	2Ft	2Ft	12-6-23	10:03																			

Special Instructions: Report TPH - in - C6 - C12 & C12 - C28 & C28 - C35 fractions aswell as total TPH
some instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
Jose Belloc	12/7/23	8:46			
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL:	Date	Time
			Diana Bledsoe	12/7/23	8:46

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered by Sampler/Client Rep. ?	Y	N
by Courier? UPS DHL FedEx Lone Star	Y	N

Temperature Upon Receipt:
Received: 5.1 °C Thermometer: NCF3
Adjusted: °C Factor:

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21

Page ___ of ___

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

PERMIAN BASIN
ENVIRONMENTAL LAB, LP
1400 Rankin Hwy
Midland, TX 79701

PBELAB

Analytical Report Rev. 1

Prepared for:

Jamey Fowler

Tellus Consulting, LLC

4000 North Big Spring Street Suite 109

Midland, TX 79705

Project: Jalapeno

Project Number: CDEV #11845

Location: Lea County, NM

Lab Order Number: 3L11010

NELAP ACCREDITED TNI LABORATORY

Current Certification

Report Date: 01/02/24

Tellus Consulting, LLC
4000 North Big Spring Street Suite 109
Midland TX, 79705

Project: Jalapeno
Project Number: CDEV #11845
Project Manager: Jamey Fowler

ANALYTICAL REPORT FOR SAMPLES

Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
BH-430 @ 2FT	3L11010-01	Soil	12/11/23 08:40	12-11-2023 15:55
BH-431 @ 2FT	3L11010-02	Soil	12/11/23 08:42	12-11-2023 15:55
BH-432 @ 2FT	3L11010-03	Soil	12/11/23 08:45	12-11-2023 15:55
BH-433 @ 1.5FT	3L11010-04	Soil	12/11/23 08:46	12-11-2023 15:55
BH-434 @ 1.5FT	3L11010-05	Soil	12/11/23 08:48	12-11-2023 15:55
BH-435 @ 1.5FT	3L11010-06	Soil	12/11/23 08:49	12-11-2023 15:55
BH-436 @ 1.5FT	3L11010-07	Soil	12/11/23 08:51	12-11-2023 15:55
BH-437 @ 1.5FT	3L11010-08	Soil	12/11/23 08:52	12-11-2023 15:55
BH-438 @ 1.5FT	3L11010-09	Soil	12/11/23 08:54	12-11-2023 15:55
BH-439 @ 1.5FT	3L11010-10	Soil	12/11/23 08:55	12-11-2023 15:55
BH-440 @ 1.5FT	3L11010-11	Soil	12/11/23 08:56	12-11-2023 15:55
BH-441 @ 1.5FT	3L11010-12	Soil	12/11/23 08:57	12-11-2023 15:55
BH-442 @ 1.5FT	3L11010-13	Soil	12/11/23 08:58	12-11-2023 15:55
BH-442 B @ 1.5FT	3L11010-14	Soil	12/11/23 08:59	12-11-2023 15:55
BH-443 @ 1.5FT	3L11010-15	Soil	12/11/23 09:00	12-11-2023 15:55
BH-444 @ 2FT	3L11010-16	Soil	12/11/23 09:01	12-11-2023 15:55
BH-445 @ 2FT	3L11010-17	Soil	12/11/23 09:03	12-11-2023 15:55
BH-446 @ 2FT	3L11010-18	Soil	12/11/23 09:04	12-11-2023 15:55
BH-447 @ 2FT	3L11010-19	Soil	12/11/23 09:07	12-11-2023 15:55
BH-448 @ 2FT	3L11010-20	Soil	12/11/23 09:10	12-11-2023 15:55
BH-449 @ 2FT	3L11010-21	Soil	12/11/23 09:12	12-11-2023 15:55
BH-450 @ 1FT	3L11010-22	Soil	12/11/23 09:15	12-11-2023 15:55
BH-451 @ 1FT	3L11010-23	Soil	12/11/23 09:18	12-11-2023 15:55
BH-452 @ 1FT	3L11010-24	Soil	12/11/23 09:20	12-11-2023 15:55
BH-453 @ 1FT	3L11010-25	Soil	12/11/23 09:21	12-11-2023 15:55
BH-454 @ 1FT	3L11010-26	Soil	12/11/23 09:23	12-11-2023 15:55
BH-455 @ 1FT	3L11010-27	Soil	12/11/23 09:25	12-11-2023 15:55
BH-456 @ 1FT	3L11010-28	Soil	12/11/23 09:26	12-11-2023 15:55
BH-457 @ 1FT	3L11010-29	Soil	12/11/23 09:29	12-11-2023 15:55
BH-458 @ 1FT	3L11010-30	Soil	12/11/23 09:35	12-11-2023 15:55
BH-459 @ 1FT	3L11010-31	Soil	12/11/23 09:37	12-11-2023 15:55
BH-460 @ 1FT	3L11010-32	Soil	12/11/23 09:39	12-11-2023 15:55
BH-461 @ 1FT	3L11010-33	Soil	12/11/23 09:44	12-11-2023 15:55
BH-462 @ 1FT	3L11010-34	Soil	12/11/23 09:51	12-11-2023 15:55

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

ANALYTICAL REPORT FOR SAMPLES

Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
BH-463 @ 1FT	3L11010-35	Soil	12/11/23 09:55	12-11-2023 15:55

This revised report reflects the correction of the Total BTEX and Total Xylenes Reporting limits .

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-430 @ 2FT

3L11010-01 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L2005	12/20/23 09:33	12/20/23 21:52	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L2005	12/20/23 09:33	12/20/23 21:52	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L2005	12/20/23 09:33	12/20/23 21:52	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L2005	12/20/23 09:33	12/20/23 21:52	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L2005	12/20/23 09:33	12/20/23 21:52	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*110 %*		*80-120*		*P3L2005*	*12/20/23 09:33*	*12/20/23 21:52*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*95.5 %*		*80-120*		*P3L2005*	*12/20/23 09:33*	*12/20/23 21:52*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/20/23 09:33	12/20/23 21:52	EPA 8021B	
Total BTEX	ND	0.00208	mg/kg dry	1	[CALC]	12/20/23 09:33	12/20/23 21:52	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L1304	12/13/23 09:48	12/14/23 09:12	TPH 8015M	
>C12-C28	**30.2**	26.0	mg/kg dry	1	P3L1304	12/13/23 09:48	12/14/23 09:12	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L1304	12/13/23 09:48	12/14/23 09:12	TPH 8015M	
Surrogate: 1-Chlorooctane	*86.9 %*		*70-130*		*P3L1304*	*12/13/23 09:48*	*12/14/23 09:12*	*TPH 8015M*	
Surrogate: o-Terphenyl	*100 %*		*70-130*		*P3L1304*	*12/13/23 09:48*	*12/14/23 09:12*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	**30.2**	26.0	mg/kg dry	1	[CALC]	12/13/23 09:48	12/14/23 09:12	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**66.7**	1.04	mg/kg dry	1	P3L1910	12/19/23 16:09	12/28/23 08:46	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L1212	12/12/23 09:08	12/12/23 09:16	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-431 @ 2FT

3L11010-02 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L2005	12/20/23 09:33	12/20/23 22:16	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L2005	12/20/23 09:33	12/20/23 22:16	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L2005	12/20/23 09:33	12/20/23 22:16	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L2005	12/20/23 09:33	12/20/23 22:16	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L2005	12/20/23 09:33	12/20/23 22:16	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*105 %*		*80-120*		*P3L2005*	*12/20/23 09:33*	*12/20/23 22:16*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*95.1 %*		*80-120*		*P3L2005*	*12/20/23 09:33*	*12/20/23 22:16*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/20/23 09:33	12/20/23 22:16	EPA 8021B	
Total BTEX	ND	0.00206	mg/kg dry	1	[CALC]	12/20/23 09:33	12/20/23 22:16	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L1304	12/13/23 09:48	12/14/23 09:36	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L1304	12/13/23 09:48	12/14/23 09:36	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L1304	12/13/23 09:48	12/14/23 09:36	TPH 8015M	
Surrogate: 1-Chlorooctane	*80.4 %*		*70-130*		*P3L1304*	*12/13/23 09:48*	*12/14/23 09:36*	*TPH 8015M*	
Surrogate: o-Terphenyl	*93.3 %*		*70-130*		*P3L1304*	*12/13/23 09:48*	*12/14/23 09:36*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/13/23 09:48	12/14/23 09:36	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**109**	1.03	mg/kg dry	1	P3L1910	12/19/23 16:09	12/28/23 09:07	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L1212	12/12/23 09:08	12/12/23 09:16	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-432 @ 2FT

3L11010-03 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L2005	12/20/23 09:33	12/20/23 23:30	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L2005	12/20/23 09:33	12/20/23 23:30	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L2005	12/20/23 09:33	12/20/23 23:30	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L2005	12/20/23 09:33	12/20/23 23:30	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L2005	12/20/23 09:33	12/20/23 23:30	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*94.0 %*		*80-120*		*P3L2005*	*12/20/23 09:33*	*12/20/23 23:30*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*103 %*		*80-120*		*P3L2005*	*12/20/23 09:33*	*12/20/23 23:30*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/20/23 09:33	12/20/23 23:30	EPA 8021B	
Total BTEX	ND	0.00211	mg/kg dry	1	[CALC]	12/20/23 09:33	12/20/23 23:30	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L1304	12/13/23 09:48	12/14/23 10:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L1304	12/13/23 09:48	12/14/23 10:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L1304	12/13/23 09:48	12/14/23 10:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*86.4 %*		*70-130*		*P3L1304*	*12/13/23 09:48*	*12/14/23 10:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*101 %*		*70-130*		*P3L1304*	*12/13/23 09:48*	*12/14/23 10:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/13/23 09:48	12/14/23 10:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**10.8**	1.05	mg/kg dry	1	P3L1910	12/19/23 16:09	12/28/23 09:29	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L1212	12/12/23 09:08	12/12/23 09:16	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-433 @ 1.5FT

3L11010-04 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00114	mg/kg dry	1	P3L2005	12/20/23 09:33	12/20/23 23:54	EPA 8021B	
Toluene	ND	0.00114	mg/kg dry	1	P3L2005	12/20/23 09:33	12/20/23 23:54	EPA 8021B	
Ethylbenzene	ND	0.00114	mg/kg dry	1	P3L2005	12/20/23 09:33	12/20/23 23:54	EPA 8021B	
Xylene (p/m)	ND	0.00227	mg/kg dry	1	P3L2005	12/20/23 09:33	12/20/23 23:54	EPA 8021B	
Xylene (o)	ND	0.00114	mg/kg dry	1	P3L2005	12/20/23 09:33	12/20/23 23:54	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*105 %*		*80-120*		*P3L2005*	*12/20/23 09:33*	*12/20/23 23:54*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*93.9 %*		*80-120*		*P3L2005*	*12/20/23 09:33*	*12/20/23 23:54*	*EPA 8021B*	
Xylenes (total)	ND	0.00227	mg/kg dry	1	[CALC]	12/20/23 09:33	12/20/23 23:54	EPA 8021B	
Total BTEX	ND	0.00227	mg/kg dry	1	[CALC]	12/20/23 09:33	12/20/23 23:54	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	28.4	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 13:10	TPH 8015M	
>C12-C28	ND	28.4	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 13:10	TPH 8015M	
>C28-C35	ND	28.4	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 13:10	TPH 8015M	
Surrogate: 1-Chlorooctane	*84.2 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/14/23 13:10*	*TPH 8015M*	
Surrogate: o-Terphenyl	*96.7 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/14/23 13:10*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	28.4	mg/kg dry	1	[CALC]	12/13/23 09:51	12/14/23 13:10	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**34.2**	1.14	mg/kg dry	1	P3L1910	12/19/23 16:09	12/28/23 09:50	EPA 300.0	
% Moisture	**12.0**	0.1	%	1	P3L1212	12/12/23 09:08	12/12/23 09:16	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-434 @ 1.5FT

3L11010-05 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00114	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 00:18	EPA 8021B	
Toluene	ND	0.00114	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 00:18	EPA 8021B	
Ethylbenzene	ND	0.00114	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 00:18	EPA 8021B	
Xylene (p/m)	ND	0.00227	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 00:18	EPA 8021B	
Xylene (o)	ND	0.00114	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 00:18	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*105 %*		*80-120*		*P3L2005*	*12/20/23 09:33*	*12/21/23 00:18*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*93.8 %*		*80-120*		*P3L2005*	*12/20/23 09:33*	*12/21/23 00:18*	*EPA 8021B*	
Xylenes (total)	ND	0.00227	mg/kg dry	1	[CALC]	12/20/23 09:33	12/21/23 00:18	EPA 8021B	
Total BTEX	ND	0.00227	mg/kg dry	1	[CALC]	12/20/23 09:33	12/21/23 00:18	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	28.4	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 13:33	TPH 8015M	
>C12-C28	ND	28.4	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 13:33	TPH 8015M	
>C28-C35	ND	28.4	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 13:33	TPH 8015M	
Surrogate: 1-Chlorooctane	*78.7 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/14/23 13:33*	*TPH 8015M*	
Surrogate: o-Terphenyl	*91.2 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/14/23 13:33*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	28.4	mg/kg dry	1	[CALC]	12/13/23 09:51	12/14/23 13:33	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**32.9**	1.14	mg/kg dry	1	P3L1910	12/19/23 16:09	12/28/23 10:11	EPA 300.0	
% Moisture	**12.0**	0.1	%	1	P3L1212	12/12/23 09:08	12/12/23 09:16	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-435 @ 1.5FT

3L11010-06 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 00:43	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 00:43	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 00:43	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 00:43	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 00:43	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*105 %*		*80-120*		*P3L2005*	*12/20/23 09:33*	*12/21/23 00:43*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*94.0 %*		*80-120*		*P3L2005*	*12/20/23 09:33*	*12/21/23 00:43*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/20/23 09:33	12/21/23 00:43	EPA 8021B	
Total BTEX	ND	0.00208	mg/kg dry	1	[CALC]	12/20/23 09:33	12/21/23 00:43	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 13:57	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 13:57	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 13:57	TPH 8015M	
Surrogate: 1-Chlorooctane	*80.2 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/14/23 13:57*	*TPH 8015M*	
Surrogate: o-Terphenyl	*92.8 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/14/23 13:57*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/13/23 09:51	12/14/23 13:57	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**66.8**	1.04	mg/kg dry	1	P3L2804	12/28/23 18:12	12/28/23 22:04	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L1212	12/12/23 09:08	12/12/23 09:16	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-436 @ 1.5FT

3L11010-07 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 01:07	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 01:07	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 01:07	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 01:07	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 01:07	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*94.2 %*		*80-120*		*P3L2005*	*12/20/23 09:33*	*12/21/23 01:07*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*106 %*		*80-120*		*P3L2005*	*12/20/23 09:33*	*12/21/23 01:07*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/20/23 09:33	12/21/23 01:07	EPA 8021B	
Total BTEX	ND	0.00208	mg/kg dry	1	[CALC]	12/20/23 09:33	12/21/23 01:07	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 14:21	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 14:21	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 14:21	TPH 8015M	
Surrogate: 1-Chlorooctane	*76.4 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/14/23 14:21*	*TPH 8015M*	
Surrogate: o-Terphenyl	*87.6 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/14/23 14:21*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/13/23 09:51	12/14/23 14:21	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**75.8**	1.04	mg/kg dry	1	P3L2804	12/28/23 18:12	12/28/23 23:08	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L1212	12/12/23 09:08	12/12/23 09:16	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-437 @ 1.5FT

3L11010-08 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00109	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 01:32	EPA 8021B	
Toluene	ND	0.00109	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 01:32	EPA 8021B	
Ethylbenzene	ND	0.00109	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 01:32	EPA 8021B	
Xylene (p/m)	ND	0.00217	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 01:32	EPA 8021B	
Xylene (o)	ND	0.00109	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 01:32	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*105 %*		*80-120*		*P3L2005*	*12/20/23 09:33*	*12/21/23 01:32*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*93.6 %*		*80-120*		*P3L2005*	*12/20/23 09:33*	*12/21/23 01:32*	*EPA 8021B*	
Xylenes (total)	ND	0.00217	mg/kg dry	1	[CALC]	12/20/23 09:33	12/21/23 01:32	EPA 8021B	
Total BTEX	ND	0.00217	mg/kg dry	1	[CALC]	12/20/23 09:33	12/21/23 01:32	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.2	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 14:45	TPH 8015M	
>C12-C28	ND	27.2	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 14:45	TPH 8015M	
>C28-C35	ND	27.2	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 14:45	TPH 8015M	
Surrogate: 1-Chlorooctane	*78.8 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/14/23 14:45*	*TPH 8015M*	
Surrogate: o-Terphenyl	*91.6 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/14/23 14:45*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.2	mg/kg dry	1	[CALC]	12/13/23 09:51	12/14/23 14:45	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**52.3**	1.09	mg/kg dry	1	P3L2804	12/28/23 18:12	12/28/23 23:30	EPA 300.0	
% Moisture	**8.0**	0.1	%	1	P3L1212	12/12/23 09:08	12/12/23 09:16	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-438 @ 1.5FT

3L11010-09 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00108	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 01:56	EPA 8021B	
Toluene	ND	0.00108	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 01:56	EPA 8021B	
Ethylbenzene	ND	0.00108	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 01:56	EPA 8021B	
Xylene (p/m)	ND	0.00215	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 01:56	EPA 8021B	
Xylene (o)	ND	0.00108	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 01:56	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*93.3 %*		*80-120*		*P3L2005*	*12/20/23 09:33*	*12/21/23 01:56*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*104 %*		*80-120*		*P3L2005*	*12/20/23 09:33*	*12/21/23 01:56*	*EPA 8021B*	
Xylenes (total)	ND	0.00215	mg/kg dry	1	[CALC]	12/20/23 09:33	12/21/23 01:56	EPA 8021B	
Total BTEX	ND	0.00215	mg/kg dry	1	[CALC]	12/20/23 09:33	12/21/23 01:56	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.9	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 15:09	TPH 8015M	
>C12-C28	ND	26.9	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 15:09	TPH 8015M	
>C28-C35	ND	26.9	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 15:09	TPH 8015M	
Surrogate: 1-Chlorooctane	*73.1 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/14/23 15:09*	*TPH 8015M*	
Surrogate: o-Terphenyl	*85.2 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/14/23 15:09*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.9	mg/kg dry	1	[CALC]	12/13/23 09:51	12/14/23 15:09	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**56.1**	1.08	mg/kg dry	1	P3L2804	12/28/23 18:12	12/28/23 23:51	EPA 300.0	
% Moisture	**7.0**	0.1	%	1	P3L1212	12/12/23 09:08	12/12/23 09:16	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-439 @ 1.5FT

3L11010-10 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00108	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 02:20	EPA 8021B	
Toluene	ND	0.00108	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 02:20	EPA 8021B	
Ethylbenzene	ND	0.00108	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 02:20	EPA 8021B	
Xylene (p/m)	ND	0.00215	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 02:20	EPA 8021B	
Xylene (o)	ND	0.00108	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 02:20	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*104 %*		*80-120*		*P3L2005*	*12/20/23 09:33*	*12/21/23 02:20*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*93.9 %*		*80-120*		*P3L2005*	*12/20/23 09:33*	*12/21/23 02:20*	*EPA 8021B*	
Xylenes (total)	ND	0.00215	mg/kg dry	1	[CALC]	12/20/23 09:33	12/21/23 02:20	EPA 8021B	
Total BTEX	ND	0.00215	mg/kg dry	1	[CALC]	12/20/23 09:33	12/21/23 02:20	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.9	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 15:33	TPH 8015M	
>C12-C28	ND	26.9	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 15:33	TPH 8015M	
>C28-C35	ND	26.9	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 15:33	TPH 8015M	
Surrogate: 1-Chlorooctane	*77.7 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/14/23 15:33*	*TPH 8015M*	
Surrogate: o-Terphenyl	*90.4 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/14/23 15:33*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.9	mg/kg dry	1	[CALC]	12/13/23 09:51	12/14/23 15:33	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**89.1**	1.08	mg/kg dry	1	P3L2804	12/28/23 18:12	12/29/23 00:13	EPA 300.0	
% Moisture	**7.0**	0.1	%	1	P3L1212	12/12/23 09:08	12/12/23 09:16	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-440 @ 1.5FT

3L11010-11 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 02:45	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 02:45	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 02:45	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 02:45	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 02:45	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*93.9 %*		*80-120*		*P3L2005*	*12/20/23 09:33*	*12/21/23 02:45*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*106 %*		*80-120*		*P3L2005*	*12/20/23 09:33*	*12/21/23 02:45*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/20/23 09:33	12/21/23 02:45	EPA 8021B	
Total BTEX	ND	0.00211	mg/kg dry	1	[CALC]	12/20/23 09:33	12/21/23 02:45	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 15:58	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 15:58	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 15:58	TPH 8015M	
Surrogate: 1-Chlorooctane	*75.4 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/14/23 15:58*	*TPH 8015M*	
Surrogate: o-Terphenyl	*88.3 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/14/23 15:58*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/13/23 09:51	12/14/23 15:58	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**12.4**	1.05	mg/kg dry	1	P3L2804	12/28/23 18:12	12/29/23 00:34	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L1212	12/12/23 09:08	12/12/23 09:16	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-441 @ 1.5FT

3L11010-12 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 03:09	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 03:09	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 03:09	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 03:09	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L2005	12/20/23 09:33	12/21/23 03:09	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*93.5 %*		*80-120*		*P3L2005*	*12/20/23 09:33*	*12/21/23 03:09*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*104 %*		*80-120*		*P3L2005*	*12/20/23 09:33*	*12/21/23 03:09*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/20/23 09:33	12/21/23 03:09	EPA 8021B	
Total BTEX	ND	0.00211	mg/kg dry	1	[CALC]	12/20/23 09:33	12/21/23 03:09	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 16:22	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 16:22	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 16:22	TPH 8015M	
Surrogate: 1-Chlorooctane	*68.2 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/14/23 16:22*	*TPH 8015M*	*S-GC*
Surrogate: o-Terphenyl	*79.7 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/14/23 16:22*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/13/23 09:51	12/14/23 16:22	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**41.1**	1.05	mg/kg dry	1	P3L2804	12/28/23 18:12	12/29/23 00:55	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L1212	12/12/23 09:08	12/12/23 09:16	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-442 @ 1.5FT

3L11010-13 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00110	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 06:24	EPA 8021B	
Toluene	ND	0.00110	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 06:24	EPA 8021B	
Ethylbenzene	ND	0.00110	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 06:24	EPA 8021B	
Xylene (p/m)	ND	0.00220	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 06:24	EPA 8021B	
Xylene (o)	ND	0.00110	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 06:24	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*93.6 %*		*80-120*		*P3L2006*	*12/20/23 09:42*	*12/21/23 06:24*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*104 %*		*80-120*		*P3L2006*	*12/20/23 09:42*	*12/21/23 06:24*	*EPA 8021B*	
Xylenes (total)	ND	0.00220	mg/kg dry	1	[CALC]	12/20/23 09:42	12/21/23 06:24	EPA 8021B	
Total BTEX	ND	0.00220	mg/kg dry	1	[CALC]	12/20/23 09:42	12/21/23 06:24	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.5	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 16:46	TPH 8015M	
>C12-C28	ND	27.5	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 16:46	TPH 8015M	
>C28-C35	ND	27.5	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 16:46	TPH 8015M	
Surrogate: 1-Chlorooctane	*79.2 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/14/23 16:46*	*TPH 8015M*	
Surrogate: o-Terphenyl	*93.3 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/14/23 16:46*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.5	mg/kg dry	1	[CALC]	12/13/23 09:51	12/14/23 16:46	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**108**	1.10	mg/kg dry	1	P3L2804	12/28/23 18:12	12/29/23 01:17	EPA 300.0	
% Moisture	**9.0**	0.1	%	1	P3L1212	12/12/23 09:08	12/12/23 09:16	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-442 B @ 1.5FT

3L11010-14 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 06:49	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 06:49	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 06:49	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 06:49	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 06:49	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*93.6 %*		*80-120*		*P3L2006*	*12/20/23 09:42*	*12/21/23 06:49*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*104 %*		*80-120*		*P3L2006*	*12/20/23 09:42*	*12/21/23 06:49*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/20/23 09:42	12/21/23 06:49	EPA 8021B	
Total BTEX	ND	0.00213	mg/kg dry	1	[CALC]	12/20/23 09:42	12/21/23 06:49	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 17:58	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 17:58	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 17:58	TPH 8015M	
Surrogate: 1-Chlorooctane	*82.1 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/14/23 17:58*	*TPH 8015M*	
Surrogate: o-Terphenyl	*95.8 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/14/23 17:58*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	12/13/23 09:51	12/14/23 17:58	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**202**	1.06	mg/kg dry	1	P3L2804	12/28/23 18:12	12/29/23 01:38	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3L1212	12/12/23 09:08	12/12/23 09:16	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-443 @ 1.5FT

3L11010-15 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 07:13	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 07:13	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 07:13	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 07:13	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 07:13	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*103 %*		*80-120*		*P3L2006*	*12/20/23 09:42*	*12/21/23 07:13*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*93.5 %*		*80-120*		*P3L2006*	*12/20/23 09:42*	*12/21/23 07:13*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/20/23 09:42	12/21/23 07:13	EPA 8021B	
Total BTEX	ND	0.00211	mg/kg dry	1	[CALC]	12/20/23 09:42	12/21/23 07:13	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 18:22	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 18:22	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 18:22	TPH 8015M	
Surrogate: 1-Chlorooctane	*75.6 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/14/23 18:22*	*TPH 8015M*	
Surrogate: o-Terphenyl	*88.0 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/14/23 18:22*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/13/23 09:51	12/14/23 18:22	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**22.7**	1.05	mg/kg dry	1	P3L2804	12/28/23 18:12	12/29/23 02:00	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L1212	12/12/23 09:08	12/12/23 09:16	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-444 @ 2FT

3L11010-16 (Soil)

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
Permian Basin Environmental Lab, L.P.									
BTEX by 8021B									
Benzene	ND	0.00109	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 07:37	EPA 8021B	
Toluene	ND	0.00109	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 07:37	EPA 8021B	
Ethylbenzene	ND	0.00109	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 07:37	EPA 8021B	
Xylene (p/m)	ND	0.00217	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 07:37	EPA 8021B	
Xylene (o)	ND	0.00109	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 07:37	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*93.6 %*		*80-120*		*P3L2006*	*12/20/23 09:42*	*12/21/23 07:37*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*104 %*		*80-120*		*P3L2006*	*12/20/23 09:42*	*12/21/23 07:37*	*EPA 8021B*	
Xylenes (total)	ND	0.00217	mg/kg dry	1	[CALC]	12/20/23 09:42	12/21/23 07:37	EPA 8021B	
Total BTEX	ND	0.00217	mg/kg dry	1	[CALC]	12/20/23 09:42	12/21/23 07:37	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.2	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 18:46	TPH 8015M	
>C12-C28	ND	27.2	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 18:46	TPH 8015M	
>C28-C35	ND	27.2	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 18:46	TPH 8015M	
Surrogate: 1-Chlorooctane	*78.7 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/14/23 18:46*	*TPH 8015M*	
Surrogate: o-Terphenyl	*93.0 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/14/23 18:46*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.2	mg/kg dry	1	[CALC]	12/13/23 09:51	12/14/23 18:46	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**41.6**	1.09	mg/kg dry	1	P3L2804	12/28/23 18:12	12/29/23 03:04	EPA 300.0	
% Moisture	**8.0**	0.1	%	1	P3L1212	12/12/23 09:08	12/12/23 09:16	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-445 @ 2FT

3L11010-17 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00109	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 08:02	EPA 8021B	
Toluene	ND	0.00109	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 08:02	EPA 8021B	
Ethylbenzene	ND	0.00109	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 08:02	EPA 8021B	
Xylene (p/m)	ND	0.00217	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 08:02	EPA 8021B	
Xylene (o)	ND	0.00109	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 08:02	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*105 %*		*80-120*		*P3L2006*	*12/20/23 09:42*	*12/21/23 08:02*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*93.8 %*		*80-120*		*P3L2006*	*12/20/23 09:42*	*12/21/23 08:02*	*EPA 8021B*	
Xylenes (total)	ND	0.00217	mg/kg dry	1	[CALC]	12/20/23 09:42	12/21/23 08:02	EPA 8021B	
Total BTEX	ND	0.00217	mg/kg dry	1	[CALC]	12/20/23 09:42	12/21/23 08:02	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.2	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 19:10	TPH 8015M	
>C12-C28	ND	27.2	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 19:10	TPH 8015M	
>C28-C35	ND	27.2	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 19:10	TPH 8015M	
Surrogate: 1-Chlorooctane	*74.3 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/14/23 19:10*	*TPH 8015M*	
Surrogate: o-Terphenyl	*86.6 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/14/23 19:10*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.2	mg/kg dry	1	[CALC]	12/13/23 09:51	12/14/23 19:10	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**16.0**	1.09	mg/kg dry	1	P3L2108	12/21/23 12:10	12/21/23 14:15	EPA 300.0	
% Moisture	**8.0**	0.1	%	1	P3L1212	12/12/23 09:08	12/12/23 09:16	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-446 @ 2FT

3L11010-18 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00108	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 08:26	EPA 8021B	
Toluene	ND	0.00108	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 08:26	EPA 8021B	
Ethylbenzene	ND	0.00108	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 08:26	EPA 8021B	
Xylene (p/m)	ND	0.00215	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 08:26	EPA 8021B	
Xylene (o)	ND	0.00108	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 08:26	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*93.8 %*		*80-120*		*P3L2006*	*12/20/23 09:42*	*12/21/23 08:26*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*105 %*		*80-120*		*P3L2006*	*12/20/23 09:42*	*12/21/23 08:26*	*EPA 8021B*	
Xylenes (total)	ND	0.00215	mg/kg dry	1	[CALC]	12/20/23 09:42	12/21/23 08:26	EPA 8021B	
Total BTEX	ND	0.00215	mg/kg dry	1	[CALC]	12/20/23 09:42	12/21/23 08:26	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.9	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 19:34	TPH 8015M	
>C12-C28	ND	26.9	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 19:34	TPH 8015M	
>C28-C35	ND	26.9	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 19:34	TPH 8015M	
Surrogate: 1-Chlorooctane	*76.2 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/14/23 19:34*	*TPH 8015M*	
Surrogate: o-Terphenyl	*90.0 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/14/23 19:34*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.9	mg/kg dry	1	[CALC]	12/13/23 09:51	12/14/23 19:34	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**50.2**	1.08	mg/kg dry	1	P3L2108	12/21/23 12:10	12/21/23 15:19	EPA 300.0	
% Moisture	**7.0**	0.1	%	1	P3L1212	12/12/23 09:08	12/12/23 09:16	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-447 @ 2FT

3L11010-19 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00109	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 08:51	EPA 8021B	
Toluene	ND	0.00109	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 08:51	EPA 8021B	
Ethylbenzene	ND	0.00109	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 08:51	EPA 8021B	
Xylene (p/m)	ND	0.00217	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 08:51	EPA 8021B	
Xylene (o)	ND	0.00109	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 08:51	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*104 %*		*80-120*		*P3L2006*	*12/20/23 09:42*	*12/21/23 08:51*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*93.7 %*		*80-120*		*P3L2006*	*12/20/23 09:42*	*12/21/23 08:51*	*EPA 8021B*	
Xylenes (total)	ND	0.00217	mg/kg dry	1	[CALC]	12/20/23 09:42	12/21/23 08:51	EPA 8021B	
Total BTEX	ND	0.00217	mg/kg dry	1	[CALC]	12/20/23 09:42	12/21/23 08:51	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.2	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 19:58	TPH 8015M	
>C12-C28	ND	27.2	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 19:58	TPH 8015M	
>C28-C35	ND	27.2	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 19:58	TPH 8015M	
Surrogate: 1-Chlorooctane	*77.5 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/14/23 19:58*	*TPH 8015M*	
Surrogate: o-Terphenyl	*91.5 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/14/23 19:58*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.2	mg/kg dry	1	[CALC]	12/13/23 09:51	12/14/23 19:58	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**20.2**	1.09	mg/kg dry	1	P3L2108	12/21/23 12:10	12/21/23 15:40	EPA 300.0	
% Moisture	**8.0**	0.1	%	1	P3L1212	12/12/23 09:08	12/12/23 09:16	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-448 @ 2FT

3L11010-20 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 09:15	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 09:15	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 09:15	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 09:15	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 09:15	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*104 %*		*80-120*		*P3L2006*	*12/20/23 09:42*	*12/21/23 09:15*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*93.6 %*		*80-120*		*P3L2006*	*12/20/23 09:42*	*12/21/23 09:15*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/20/23 09:42	12/21/23 09:15	EPA 8021B	
Total BTEX	ND	0.00211	mg/kg dry	1	[CALC]	12/20/23 09:42	12/21/23 09:15	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L1305	12/13/23 09:51	12/18/23 12:36	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L1305	12/13/23 09:51	12/18/23 12:36	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L1305	12/13/23 09:51	12/18/23 12:36	TPH 8015M	
Surrogate: 1-Chlorooctane	*69.8 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/18/23 12:36*	*TPH 8015M*	*S-GC*
Surrogate: o-Terphenyl	*86.8 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/18/23 12:36*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/13/23 09:51	12/18/23 12:36	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**147**	1.05	mg/kg dry	1	P3L2108	12/21/23 12:10	12/21/23 16:01	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L1212	12/12/23 09:08	12/12/23 09:16	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-449 @ 2FT

3L11010-21 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 09:40	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 09:40	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 09:40	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 09:40	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L2006	12/20/23 09:42	12/21/23 09:40	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*94.0 %*		*80-120*		*P3L2006*	*12/20/23 09:42*	*12/21/23 09:40*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*101 %*		*80-120*		*P3L2006*	*12/20/23 09:42*	*12/21/23 09:40*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/20/23 09:42	12/21/23 09:40	EPA 8021B	
Total BTEX	ND	0.00208	mg/kg dry	1	[CALC]	12/20/23 09:42	12/21/23 09:40	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 20:46	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 20:46	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 20:46	TPH 8015M	
Surrogate: 1-Chlorooctane	*76.6 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/14/23 20:46*	*TPH 8015M*	
Surrogate: o-Terphenyl	*91.6 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/14/23 20:46*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/13/23 09:51	12/14/23 20:46	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**57.8**	1.04	mg/kg dry	1	P3L2108	12/21/23 12:10	12/21/23 16:23	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L1212	12/12/23 09:08	12/12/23 09:16	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-450 @ 1FT

3L11010-22 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 20:06	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 20:06	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 20:06	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 20:06	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 20:06	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*107 %*		*80-120*		*P3L2106*	*12/21/23 10:12*	*12/21/23 20:06*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*95.6 %*		*80-120*		*P3L2106*	*12/21/23 10:12*	*12/21/23 20:06*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/21/23 10:12	12/21/23 20:06	EPA 8021B	
Total BTEX	ND	0.00208	mg/kg dry	1	[CALC]	12/21/23 10:12	12/21/23 20:06	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 21:10	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 21:10	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 21:10	TPH 8015M	
Surrogate: 1-Chlorooctane	*70.6 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/14/23 21:10*	*TPH 8015M*	
Surrogate: o-Terphenyl	*80.5 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/14/23 21:10*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/13/23 09:51	12/14/23 21:10	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**31.9**	1.04	mg/kg dry	1	P3L2108	12/21/23 12:10	12/21/23 16:44	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L1212	12/12/23 09:08	12/12/23 09:16	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-451 @ 1FT

3L11010-23 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 20:30	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 20:30	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 20:30	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 20:30	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 20:30	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*101 %*		*80-120*		*P3L2106*	*12/21/23 10:12*	*12/21/23 20:30*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*94.7 %*		*80-120*		*P3L2106*	*12/21/23 10:12*	*12/21/23 20:30*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/21/23 10:12	12/21/23 20:30	EPA 8021B	
Total BTEX	ND	0.00208	mg/kg dry	1	[CALC]	12/21/23 10:12	12/21/23 20:30	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 21:34	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 21:34	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L1305	12/13/23 09:51	12/14/23 21:34	TPH 8015M	
Surrogate: 1-Chlorooctane	*74.3 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/14/23 21:34*	*TPH 8015M*	
Surrogate: o-Terphenyl	*90.2 %*		*70-130*		*P3L1305*	*12/13/23 09:51*	*12/14/23 21:34*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/13/23 09:51	12/14/23 21:34	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**36.9**	1.04	mg/kg dry	1	P3L2108	12/21/23 12:10	12/21/23 17:05	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L1212	12/12/23 09:08	12/12/23 09:16	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-452 @ 1FT

3L11010-24 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 20:54	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 20:54	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 20:54	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 20:54	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 20:54	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*102 %*		*80-120*		*P3L2106*	*12/21/23 10:12*	*12/21/23 20:54*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*94.9 %*		*80-120*		*P3L2106*	*12/21/23 10:12*	*12/21/23 20:54*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/21/23 10:12	12/21/23 20:54	EPA 8021B	
Total BTEX	ND	0.00208	mg/kg dry	1	[CALC]	12/21/23 10:12	12/21/23 20:54	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L1217	12/14/23 15:43	12/15/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L1217	12/14/23 15:43	12/15/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L1217	12/14/23 15:43	12/15/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*88.3 %*		*70-130*		*P3L1217*	*12/14/23 15:43*	*12/15/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*98.1 %*		*70-130*		*P3L1217*	*12/14/23 15:43*	*12/15/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/14/23 15:43	12/15/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**8.98**	1.04	mg/kg dry	1	P3L2108	12/21/23 12:10	12/21/23 17:27	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L1212	12/12/23 09:08	12/12/23 09:16	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-453 @ 1FT

3L11010-25 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 21:19	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 21:19	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 21:19	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 21:19	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 21:19	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*102 %*		*80-120*		*P3L2106*	*12/21/23 10:12*	*12/21/23 21:19*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*94.6 %*		*80-120*		*P3L2106*	*12/21/23 10:12*	*12/21/23 21:19*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/21/23 10:12	12/21/23 21:19	EPA 8021B	
Total BTEX	ND	0.00208	mg/kg dry	1	[CALC]	12/21/23 10:12	12/21/23 21:19	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L1217	12/14/23 15:43	12/15/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L1217	12/14/23 15:43	12/15/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L1217	12/14/23 15:43	12/15/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*88.1 %*		*70-130*		*P3L1217*	*12/14/23 15:43*	*12/15/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*99.5 %*		*70-130*		*P3L1217*	*12/14/23 15:43*	*12/15/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/14/23 15:43	12/15/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**44.1**	1.04	mg/kg dry	1	P3L2108	12/21/23 12:10	12/21/23 17:48	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L1212	12/12/23 09:08	12/12/23 09:16	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-454 @ 1FT

3L11010-26 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 21:43	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 21:43	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 21:43	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 21:43	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 21:43	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*94.9 %*		*80-120*		*P3L2106*	*12/21/23 10:12*	*12/21/23 21:43*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*104 %*		*80-120*		*P3L2106*	*12/21/23 10:12*	*12/21/23 21:43*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/21/23 10:12	12/21/23 21:43	EPA 8021B	
Total BTEX	ND	0.00213	mg/kg dry	1	[CALC]	12/21/23 10:12	12/21/23 21:43	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3L1217	12/14/23 15:43	12/15/23 00:00	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3L1217	12/14/23 15:43	12/15/23 00:00	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3L1217	12/14/23 15:43	12/15/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*86.8 %*		*70-130*		*P3L1217*	*12/14/23 15:43*	*12/15/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*92.9 %*		*70-130*		*P3L1217*	*12/14/23 15:43*	*12/15/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	12/14/23 15:43	12/15/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**70.5**	1.06	mg/kg dry	1	P3L2108	12/21/23 12:10	12/21/23 18:09	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3L1212	12/12/23 09:08	12/12/23 09:16	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-455 @ 1FT

3L11010-27 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 22:08	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 22:08	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 22:08	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 22:08	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 22:08	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*104 %*		*80-120*		*P3L2106*	*12/21/23 10:12*	*12/21/23 22:08*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*94.6 %*		*80-120*		*P3L2106*	*12/21/23 10:12*	*12/21/23 22:08*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/21/23 10:12	12/21/23 22:08	EPA 8021B	
Total BTEX	ND	0.00208	mg/kg dry	1	[CALC]	12/21/23 10:12	12/21/23 22:08	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L1217	12/14/23 15:43	12/15/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L1217	12/14/23 15:43	12/15/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L1217	12/14/23 15:43	12/15/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*88.1 %*		*70-130*		*P3L1217*	*12/14/23 15:43*	*12/15/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*101 %*		*70-130*		*P3L1217*	*12/14/23 15:43*	*12/15/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/14/23 15:43	12/15/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**44.4**	1.04	mg/kg dry	1	P3L2108	12/21/23 12:10	12/21/23 19:14	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L1212	12/12/23 09:08	12/12/23 09:16	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-456 @ 1FT

3L11010-28 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 22:32	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 22:32	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 22:32	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 22:32	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 22:32	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*94.8 %*		*80-120*		*P3L2106*	*12/21/23 10:12*	*12/21/23 22:32*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*105 %*		*80-120*		*P3L2106*	*12/21/23 10:12*	*12/21/23 22:32*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/21/23 10:12	12/21/23 22:32	EPA 8021B	
Total BTEX	ND	0.00208	mg/kg dry	1	[CALC]	12/21/23 10:12	12/21/23 22:32	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L1217	12/14/23 15:43	12/15/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L1217	12/14/23 15:43	12/15/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L1217	12/14/23 15:43	12/15/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*86.9 %*		*70-130*		*P3L1217*	*12/14/23 15:43*	*12/15/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*101 %*		*70-130*		*P3L1217*	*12/14/23 15:43*	*12/15/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/14/23 15:43	12/15/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**51.6**	1.04	mg/kg dry	1	P3L2108	12/21/23 12:10	12/21/23 20:18	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L1212	12/12/23 09:08	12/12/23 09:16	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-457 @ 1FT

3L11010-29 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 22:56	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 22:56	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 22:56	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 22:56	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P3L2106	12/21/23 10:12	12/21/23 22:56	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*94.8 %*		*80-120*		*P3L2106*	*12/21/23 10:12*	*12/21/23 22:56*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*103 %*		*80-120*		*P3L2106*	*12/21/23 10:12*	*12/21/23 22:56*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	12/21/23 10:12	12/21/23 22:56	EPA 8021B	
Total BTEX	ND	0.00206	mg/kg dry	1	[CALC]	12/21/23 10:12	12/21/23 22:56	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P3L1217	12/14/23 15:43	12/15/23 00:00	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P3L1217	12/14/23 15:43	12/15/23 00:00	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P3L1217	12/14/23 15:43	12/15/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*80.3 %*		*70-130*		*P3L1217*	*12/14/23 15:43*	*12/15/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*92.5 %*		*70-130*		*P3L1217*	*12/14/23 15:43*	*12/15/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	12/14/23 15:43	12/15/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**101**	1.03	mg/kg dry	1	P3L2108	12/21/23 12:10	12/21/23 20:39	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P3L1212	12/12/23 09:08	12/12/23 09:16	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-458 @ 1FT

3L11010-30 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L2106	12/21/23 10:12	12/22/23 00:09	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L2106	12/21/23 10:12	12/22/23 00:09	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L2106	12/21/23 10:12	12/22/23 00:09	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L2106	12/21/23 10:12	12/22/23 00:09	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L2106	12/21/23 10:12	12/22/23 00:09	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*105 %*		*80-120*		*P3L2106*	*12/21/23 10:12*	*12/22/23 00:09*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*95.3 %*		*80-120*		*P3L2106*	*12/21/23 10:12*	*12/22/23 00:09*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/21/23 10:12	12/22/23 00:09	EPA 8021B	
Total BTEX	ND	0.00213	mg/kg dry	1	[CALC]	12/21/23 10:12	12/22/23 00:09	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3L1217	12/14/23 15:43	12/15/23 00:00	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3L1217	12/14/23 15:43	12/15/23 00:00	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3L1217	12/14/23 15:43	12/15/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*84.1 %*		*70-130*		*P3L1217*	*12/14/23 15:43*	*12/15/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*97.3 %*		*70-130*		*P3L1217*	*12/14/23 15:43*	*12/15/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	12/14/23 15:43	12/15/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**102**	1.06	mg/kg dry	1	P3L2904	12/29/23 10:51	12/29/23 13:04	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3L1212	12/12/23 09:08	12/12/23 09:16	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-459 @ 1FT

3L11010-31 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L2106	12/21/23 10:12	12/22/23 00:34	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L2106	12/21/23 10:12	12/22/23 00:34	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L2106	12/21/23 10:12	12/22/23 00:34	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L2106	12/21/23 10:12	12/22/23 00:34	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L2106	12/21/23 10:12	12/22/23 00:34	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*95.2 %*		*80-120*		*P3L2106*	*12/21/23 10:12*	*12/22/23 00:34*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*104 %*		*80-120*		*P3L2106*	*12/21/23 10:12*	*12/22/23 00:34*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/21/23 10:12	12/22/23 00:34	EPA 8021B	
Total BTEX	ND	0.00208	mg/kg dry	1	[CALC]	12/21/23 10:12	12/22/23 00:34	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L1217	12/14/23 15:43	12/15/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L1217	12/14/23 15:43	12/15/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L1217	12/14/23 15:43	12/15/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*79.5 %*		*70-130*		*P3L1217*	*12/14/23 15:43*	*12/15/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*92.8 %*		*70-130*		*P3L1217*	*12/14/23 15:43*	*12/15/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/14/23 15:43	12/15/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**46.3**	1.04	mg/kg dry	1	P3L2904	12/29/23 10:51	12/29/23 14:08	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L1212	12/12/23 09:08	12/12/23 09:16	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-460 @ 1FT

3L11010-32 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P3L2106	12/21/23 10:12	12/22/23 00:58	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P3L2106	12/21/23 10:12	12/22/23 00:58	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P3L2106	12/21/23 10:12	12/22/23 00:58	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P3L2106	12/21/23 10:12	12/22/23 00:58	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P3L2106	12/21/23 10:12	12/22/23 00:58	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*95.1 %*		*80-120*		*P3L2106*	*12/21/23 10:12*	*12/22/23 00:58*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*106 %*		*80-120*		*P3L2106*	*12/21/23 10:12*	*12/22/23 00:58*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	12/21/23 10:12	12/22/23 00:58	EPA 8021B	
Total BTEX	ND	0.00213	mg/kg dry	1	[CALC]	12/21/23 10:12	12/22/23 00:58	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P3L1217	12/14/23 15:43	12/15/23 00:00	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P3L1217	12/14/23 15:43	12/15/23 00:00	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P3L1217	12/14/23 15:43	12/15/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*76.9 %*		*70-130*		*P3L1217*	*12/14/23 15:43*	*12/15/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*87.2 %*		*70-130*		*P3L1217*	*12/14/23 15:43*	*12/15/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	12/14/23 15:43	12/15/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**84.7**	1.06	mg/kg dry	1	P3L2904	12/29/23 10:51	12/29/23 14:30	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P3L1212	12/12/23 09:08	12/12/23 09:16	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-461 @ 1FT

3L11010-33 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P3L2106	12/21/23 10:12	12/22/23 01:23	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P3L2106	12/21/23 10:12	12/22/23 01:23	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P3L2106	12/21/23 10:12	12/22/23 01:23	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P3L2106	12/21/23 10:12	12/22/23 01:23	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P3L2106	12/21/23 10:12	12/22/23 01:23	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*104 %*		*80-120*		*P3L2106*	*12/21/23 10:12*	*12/22/23 01:23*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*95.6 %*		*80-120*		*P3L2106*	*12/21/23 10:12*	*12/22/23 01:23*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	12/21/23 10:12	12/22/23 01:23	EPA 8021B	
Total BTEX	ND	0.00208	mg/kg dry	1	[CALC]	12/21/23 10:12	12/22/23 01:23	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P3L1217	12/14/23 15:43	12/15/23 00:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P3L1217	12/14/23 15:43	12/15/23 00:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P3L1217	12/14/23 15:43	12/15/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*83.5 %*		*70-130*		*P3L1217*	*12/14/23 15:43*	*12/15/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*96.3 %*		*70-130*		*P3L1217*	*12/14/23 15:43*	*12/15/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	12/14/23 15:43	12/15/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**47.2**	1.04	mg/kg dry	1	P3L2904	12/29/23 10:51	12/29/23 14:51	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P3L1212	12/12/23 09:08	12/12/23 09:16	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-462 @ 1FT

3L11010-34 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L2106	12/21/23 10:12	12/22/23 01:47	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L2106	12/21/23 10:12	12/22/23 01:47	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L2106	12/21/23 10:12	12/22/23 01:47	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L2106	12/21/23 10:12	12/22/23 01:47	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L2106	12/21/23 10:12	12/22/23 01:47	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*95.7 %*		*80-120*		*P3L2106*	*12/21/23 10:12*	*12/22/23 01:47*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*104 %*		*80-120*		*P3L2106*	*12/21/23 10:12*	*12/22/23 01:47*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/21/23 10:12	12/22/23 01:47	EPA 8021B	
Total BTEX	ND	0.00211	mg/kg dry	1	[CALC]	12/21/23 10:12	12/22/23 01:47	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L1217	12/14/23 15:43	12/15/23 00:00	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L1217	12/14/23 15:43	12/15/23 00:00	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L1217	12/14/23 15:43	12/15/23 00:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*94.0 %*		*70-130*		*P3L1217*	*12/14/23 15:43*	*12/15/23 00:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*109 %*		*70-130*		*P3L1217*	*12/14/23 15:43*	*12/15/23 00:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/14/23 15:43	12/15/23 00:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**464**	1.05	mg/kg dry	1	P3L2904	12/29/23 10:51	12/29/23 15:12	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L1212	12/12/23 09:08	12/12/23 09:16	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-463 @ 1FT

3L11010-35 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P3L2106	12/21/23 10:12	12/22/23 02:11	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P3L2106	12/21/23 10:12	12/22/23 02:11	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P3L2106	12/21/23 10:12	12/22/23 02:11	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P3L2106	12/21/23 10:12	12/22/23 02:11	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P3L2106	12/21/23 10:12	12/22/23 02:11	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*96.1 %*		*80-120*		*P3L2106*	*12/21/23 10:12*	*12/22/23 02:11*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*105 %*		*80-120*		*P3L2106*	*12/21/23 10:12*	*12/22/23 02:11*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	12/21/23 10:12	12/22/23 02:11	EPA 8021B	
Total BTEX	ND	0.00211	mg/kg dry	1	[CALC]	12/21/23 10:12	12/22/23 02:11	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P3L1213	12/11/23 18:00	12/11/23 20:49	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P3L1213	12/11/23 18:00	12/11/23 20:49	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P3L1213	12/11/23 18:00	12/11/23 20:49	TPH 8015M	
Surrogate: 1-Chlorooctane	*74.6 %*		*70-130*		*P3L1213*	*12/11/23 18:00*	*12/11/23 20:49*	*TPH 8015M*	
Surrogate: o-Terphenyl	*87.9 %*		*70-130*		*P3L1213*	*12/11/23 18:00*	*12/11/23 20:49*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	12/11/23 18:00	12/11/23 20:49	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**64.6**	1.05	mg/kg dry	1	P3L2904	12/29/23 10:51	12/29/23 15:34	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P3L1212	12/12/23 09:08	12/12/23 09:16	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L2005 - * DEFAULT PREP *** **										
Blank (P3L2005-BLK1)				Prepared & Analyzed: 12/20/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 1,4-Difluorobenzene	*0.112*		*"*	*0.120*		*93.4*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.123*		*"*	*0.120*		*103*	*80-120*			
LCS (P3L2005-BS1)				Prepared & Analyzed: 12/20/23						
Benzene	0.105	0.00100	mg/kg	0.100		105	80-120			
Toluene	0.101	0.00100	"	0.100		101	80-120			
Ethylbenzene	0.106	0.00100	"	0.100		106	80-120			
Xylene (p/m)	0.199	0.00200	"	0.200		99.5	80-120			
Xylene (o)	0.0936	0.00100	"	0.100		93.6	80-120			
Surrogate: 1,4-Difluorobenzene	*0.114*		*"*	*0.120*		*95.1*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.124*		*"*	*0.120*		*103*	*80-120*			
LCS Dup (P3L2005-BSD1)				Prepared & Analyzed: 12/20/23						
Benzene	0.106	0.00100	mg/kg	0.100		106	80-120	0.862	20	
Toluene	0.101	0.00100	"	0.100		101	80-120	0.188	20	
Ethylbenzene	0.107	0.00100	"	0.100		107	80-120	0.798	20	
Xylene (p/m)	0.200	0.00200	"	0.200		100	80-120	0.611	20	
Xylene (o)	0.0944	0.00100	"	0.100		94.4	80-120	0.819	20	
Surrogate: 1,4-Difluorobenzene	*0.114*		*"*	*0.120*		*95.1*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.125*		*"*	*0.120*		*104*	*80-120*			
Calibration Blank (P3L2005-CCB1)				Prepared & Analyzed: 12/20/23						
Benzene	0.220		ug/kg							
Toluene	0.180		"							
Ethylbenzene	0.150		"							
Xylene (p/m)	0.280		"							
Xylene (o)	0.190		"							
Surrogate: 1,4-Difluorobenzene	*0.112*		*"*	*0.120*		*93.4*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.126*		*"*	*0.120*		*105*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L2005 - * DEFAULT PREP *** **										
Calibration Blank (P3L2005-CCB2)				Prepared & Analyzed: 12/20/23						
Benzene	0.210		ug/kg							
Toluene	0.160		"							
Ethylbenzene	0.00		"							
Xylene (p/m)	0.230		"							
Xylene (o)	0.110		"							
Surrogate: 1,4-Difluorobenzene	*0.113*		*"*	*0.120*		*94.1*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.125*		*"*	*0.120*		*104*	*80-120*			
Calibration Blank (P3L2005-CCB3)				Prepared: 12/20/23 Analyzed: 12/21/23						
Benzene	0.190		ug/kg							
Toluene	0.280		"							
Ethylbenzene	0.400		"							
Xylene (p/m)	0.460		"							
Xylene (o)	0.350		"							
Surrogate: 4-Bromofluorobenzene	*0.125*		*"*	*0.120*		*104*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.112*		*"*	*0.120*		*93.4*	*80-120*			
Calibration Check (P3L2005-CCV1)				Prepared & Analyzed: 12/20/23						
Benzene	0.113	0.00100	mg/kg	0.100		113	80-120			
Toluene	0.110	0.00100	"	0.100		110	80-120			
Ethylbenzene	0.109	0.00100	"	0.100		109	80-120			
Xylene (p/m)	0.214	0.00200	"	0.200		107	80-120			
Xylene (o)	0.102	0.00100	"	0.100		102	80-120			
Surrogate: 4-Bromofluorobenzene	*0.121*		*"*	*0.120*		*101*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.114*		*"*	*0.120*		*95.4*	*75-125*			
Calibration Check (P3L2005-CCV2)				Prepared & Analyzed: 12/20/23						
Benzene	0.110	0.00100	mg/kg	0.100		110	80-120			
Toluene	0.105	0.00100	"	0.100		105	80-120			
Ethylbenzene	0.104	0.00100	"	0.100		104	80-120			
Xylene (p/m)	0.204	0.00200	"	0.200		102	80-120			
Xylene (o)	0.0978	0.00100	"	0.100		97.8	80-120			
Surrogate: 4-Bromofluorobenzene	*0.124*		*"*	*0.120*		*103*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.114*		*"*	*0.120*		*95.3*	*75-125*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L2005 - * DEFAULT PREP *** **										
Calibration Check (P3L2005-CCV3)				Prepared: 12/20/23 Analyzed: 12/21/23						
Benzene	0.111	0.00100	mg/kg	0.100		111	80-120			
Toluene	0.107	0.00100	"	0.100		107	80-120			
Ethylbenzene	0.104	0.00100	"	0.100		104	80-120			
Xylene (p/m)	0.204	0.00200	"	0.200		102	80-120			
Xylene (o)	0.0997	0.00100	"	0.100		99.7	80-120			
Surrogate: 4-Bromofluorobenzene	*0.126*		"	*0.120*		*105*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*95.2*	*75-125*			
Matrix Spike (P3L2005-MS1)		**Source: 3L08013-12**		Prepared: 12/20/23 Analyzed: 12/21/23						
Benzene	0.0981	0.00102	mg/kg dry	0.102	ND	96.1	80-120			
Toluene	0.0884	0.00102	"	0.102	ND	86.7	80-120			
Ethylbenzene	0.0882	0.00102	"	0.102	ND	86.4	80-120			
Xylene (p/m)	0.165	0.00204	"	0.204	ND	81.0	80-120			
Xylene (o)	0.0764	0.00102	"	0.102	ND	74.9	80-120			QM-05
Surrogate: 4-Bromofluorobenzene	*0.127*		"	*0.122*		*104*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.117*		"	*0.122*		*95.4*	*80-120*			
Matrix Spike Dup (P3L2005-MSD1)		**Source: 3L08013-12**		Prepared: 12/20/23 Analyzed: 12/21/23						
Benzene	0.0957	0.00102	mg/kg dry	0.102	ND	93.8	80-120	2.46	20	
Toluene	0.0864	0.00102	"	0.102	ND	84.7	80-120	2.31	20	
Ethylbenzene	0.0855	0.00102	"	0.102	ND	83.8	80-120	3.11	20	
Xylene (p/m)	0.170	0.00204	"	0.204	ND	83.2	80-120	2.73	20	
Xylene (o)	0.0745	0.00102	"	0.102	ND	73.0	80-120	2.56	20	QM-05
Surrogate: 1,4-Difluorobenzene	*0.116*		"	*0.122*		*94.9*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.125*		"	*0.122*		*102*	*80-120*			
Batch P3L2006 - * DEFAULT PREP *** **										
Blank (P3L2006-BLK1)				Prepared: 12/20/23 Analyzed: 12/21/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 1,4-Difluorobenzene	*0.113*		"	*0.120*		*93.8*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.125*		"	*0.120*		*104*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L2006 - * DEFAULT PREP *** **										
LCS (P3L2006-BS1)				Prepared: 12/20/23 Analyzed: 12/21/23						
Benzene	0.104	0.00100	mg/kg	0.100		104	80-120			
Toluene	0.0984	0.00100	"	0.100		98.4	80-120			
Ethylbenzene	0.102	0.00100	"	0.100		102	80-120			
Xylene (p/m)	0.190	0.00200	"	0.200		95.2	80-120			
Xylene (o)	0.0910	0.00100	"	0.100		91.0	80-120			
Surrogate: 1,4-Difluorobenzene	*0.113*		*"*	*0.120*		*94.4*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.123*		*"*	*0.120*		*102*	*80-120*			
LCS Dup (P3L2006-BSD1)				Prepared: 12/20/23 Analyzed: 12/21/23						
Benzene	0.102	0.00100	mg/kg	0.100		102	80-120	2.24	20	
Toluene	0.0955	0.00100	"	0.100		95.5	80-120	2.97	20	
Ethylbenzene	0.0992	0.00100	"	0.100		99.2	80-120	3.06	20	
Xylene (p/m)	0.185	0.00200	"	0.200		92.6	80-120	2.78	20	
Xylene (o)	0.0879	0.00100	"	0.100		87.9	80-120	3.42	20	
Surrogate: 1,4-Difluorobenzene	*0.113*		*"*	*0.120*		*94.6*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.123*		*"*	*0.120*		*102*	*80-120*			
Calibration Blank (P3L2006-CCB1)				Prepared: 12/20/23 Analyzed: 12/21/23						
Benzene	0.190		ug/kg							
Toluene	0.280		"							
Ethylbenzene	0.400		"							
Xylene (p/m)	0.460		"							
Xylene (o)	0.350		"							
Surrogate: 4-Bromofluorobenzene	*0.125*		*"*	*0.120*		*104*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.112*		*"*	*0.120*		*93.4*	*80-120*			
Calibration Blank (P3L2006-CCB2)				Prepared: 12/20/23 Analyzed: 12/21/23						
Benzene	0.230		ug/kg							
Toluene	0.180		"							
Ethylbenzene	0.380		"							
Xylene (p/m)	0.330		"							
Xylene (o)	0.220		"							
Surrogate: 4-Bromofluorobenzene	*0.123*		*"*	*0.120*		*103*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.114*		*"*	*0.120*		*94.6*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L2006 - * DEFAULT PREP *** **										
Calibration Check (P3L2006-CCV1)				Prepared: 12/20/23 Analyzed: 12/21/23						
Benzene	0.111	0.00100	mg/kg	0.100		111	80-120			
Toluene	0.107	0.00100	"	0.100		107	80-120			
Ethylbenzene	0.104	0.00100	"	0.100		104	80-120			
Xylene (p/m)	0.204	0.00200	"	0.200		102	80-120			
Xylene (o)	0.0997	0.00100	"	0.100		99.7	80-120			
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*95.2*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.126*		"	*0.120*		*105*	*75-125*			
Calibration Check (P3L2006-CCV2)				Prepared: 12/20/23 Analyzed: 12/21/23						
Benzene	0.116	0.00100	mg/kg	0.100		116	80-120			
Toluene	0.107	0.00100	"	0.100		107	80-120			
Ethylbenzene	0.106	0.00100	"	0.100		106	80-120			
Xylene (p/m)	0.211	0.00200	"	0.200		106	80-120			
Xylene (o)	0.0992	0.00100	"	0.100		99.2	80-120			
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*95.2*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.119*		"	*0.120*		*99.4*	*75-125*			
Calibration Check (P3L2006-CCV3)				Prepared: 12/20/23 Analyzed: 12/21/23						
Benzene	0.113	0.00100	mg/kg	0.100		113	80-120			
Toluene	0.107	0.00100	"	0.100		107	80-120			
Ethylbenzene	0.104	0.00100	"	0.100		104	80-120			
Xylene (p/m)	0.206	0.00200	"	0.200		103	80-120			
Xylene (o)	0.0998	0.00100	"	0.100		99.8	80-120			
Surrogate: 4-Bromofluorobenzene	*0.123*		"	*0.120*		*103*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*94.8*	*75-125*			
Matrix Spike (P3L2006-MS1)		**Source: 3L11010-13**		Prepared: 12/20/23 Analyzed: 12/21/23						
Benzene	0.0978	0.00110	mg/kg dry	0.110	ND	89.0	80-120			
Toluene	0.0848	0.00110	"	0.110	ND	77.2	80-120			QM-05
Ethylbenzene	0.0864	0.00110	"	0.110	ND	78.6	80-120			QM-05
Xylene (p/m)	0.168	0.00220	"	0.220	ND	76.5	80-120			QM-05
Xylene (o)	0.0765	0.00110	"	0.110	ND	69.6	80-120			QM-05
Surrogate: 4-Bromofluorobenzene	*0.136*		"	*0.132*		*103*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.124*		"	*0.132*		*93.9*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L2006 - * DEFAULT PREP *** **										
Matrix Spike Dup (P3L2006-MSD1)	**Source: 3L11010-13**			Prepared: 12/20/23 Analyzed: 12/21/23						
Benzene	0.101	0.00110	mg/kg dry	0.110	ND	91.9	80-120	3.12	20	
Toluene	0.0876	0.00110	"	0.110	ND	79.7	80-120	3.24	20	QM-05
Ethylbenzene	0.0900	0.00110	"	0.110	ND	81.9	80-120	4.11	20	
Xylene (p/m)	0.175	0.00220	"	0.220	ND	79.6	80-120	3.92	20	QM-05
Xylene (o)	0.0778	0.00110	"	0.110	ND	70.8	80-120	1.74	20	QM-05
Surrogate: 4-Bromofluorobenzene	*0.136*		*"*	*0.132*		*103*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.125*		*"*	*0.132*		*94.8*	*80-120*			
Batch P3L2106 - * DEFAULT PREP *** **										
Blank (P3L2106-BLK1)				Prepared & Analyzed: 12/21/23						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 4-Bromofluorobenzene	*0.124*		*"*	*0.120*		*103*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.113*		*"*	*0.120*		*94.4*	*80-120*			
LCS (P3L2106-BS1)				Prepared & Analyzed: 12/21/23						
Benzene	0.105	0.00100	mg/kg	0.100		105	80-120			
Toluene	0.0991	0.00100	"	0.100		99.1	80-120			
Ethylbenzene	0.103	0.00100	"	0.100		103	80-120			
Xylene (p/m)	0.198	0.00200	"	0.200		99.0	80-120			
Xylene (o)	0.0918	0.00100	"	0.100		91.8	80-120			
Surrogate: 4-Bromofluorobenzene	*0.118*		*"*	*0.120*		*98.7*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.113*		*"*	*0.120*		*94.5*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L2106 - * DEFAULT PREP *** **										
LCS Dup (P3L2106-BSD1)				Prepared & Analyzed: 12/21/23						
Benzene	0.0956	0.00100	mg/kg	0.100		95.6	80-120	9.57	20	
Toluene	0.0877	0.00100	"	0.100		87.7	80-120	12.2	20	
Ethylbenzene	0.0920	0.00100	"	0.100		92.0	80-120	11.8	20	
Xylene (p/m)	0.179	0.00200	"	0.200		89.4	80-120	10.2	20	
Xylene (o)	0.0810	0.00100	"	0.100		81.0	80-120	12.5	20	
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*95.3*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.118*		"	*0.120*		*97.9*	*80-120*			
Calibration Blank (P3L2106-CCB1)				Prepared & Analyzed: 12/21/23						
Benzene	0.140		ug/kg							
Toluene	0.160		"							
Ethylbenzene	0.110		"							
Xylene (p/m)	0.210		"							
Xylene (o)	0.110		"							
Surrogate: 1,4-Difluorobenzene	*0.113*		"	*0.120*		*94.3*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.124*		"	*0.120*		*103*	*80-120*			
Calibration Blank (P3L2106-CCB2)				Prepared & Analyzed: 12/21/23						
Benzene	0.130		ug/kg							
Toluene	0.120		"							
Ethylbenzene	0.0800		"							
Xylene (p/m)	0.190		"							
Xylene (o)	0.120		"							
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*94.9*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.125*		"	*0.120*		*104*	*80-120*			
Calibration Check (P3L2106-CCV1)				Prepared & Analyzed: 12/21/23						
Benzene	0.103	0.00100	mg/kg	0.100		103	80-120			
Toluene	0.0968	0.00100	"	0.100		96.8	80-120			
Ethylbenzene	0.0969	0.00100	"	0.100		96.9	80-120			
Xylene (p/m)	0.197	0.00200	"	0.200		98.3	80-120			
Xylene (o)	0.0921	0.00100	"	0.100		92.1	80-120			
Surrogate: 4-Bromofluorobenzene	*0.124*		"	*0.120*		*103*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*95.2*	*75-125*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L2106 - * DEFAULT PREP *** **										
Calibration Check (P3L2106-CCV2)				Prepared & Analyzed: 12/21/23						
Benzene	0.110	0.00100	mg/kg	0.100		110	80-120			
Toluene	0.103	0.00100	"	0.100		103	80-120			
Ethylbenzene	0.102	0.00100	"	0.100		102	80-120			
Xylene (p/m)	0.205	0.00200	"	0.200		102	80-120			
Xylene (o)	0.0959	0.00100	"	0.100		95.9	80-120			
Surrogate: 1,4-Difluorobenzene	*0.115*		"	*0.120*		*95.6*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.120*		"	*0.120*		*99.9*	*75-125*			
Calibration Check (P3L2106-CCV3)				Prepared: 12/21/23 Analyzed: 12/22/23						
Benzene	0.115	0.00100	mg/kg	0.100		115	80-120			
Toluene	0.106	0.00100	"	0.100		106	80-120			
Ethylbenzene	0.105	0.00100	"	0.100		105	80-120			
Xylene (p/m)	0.214	0.00200	"	0.200		107	80-120			
Xylene (o)	0.0995	0.00100	"	0.100		99.5	80-120			
Surrogate: 1,4-Difluorobenzene	*0.117*		"	*0.120*		*97.1*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.125*		"	*0.120*		*104*	*75-125*			
Matrix Spike (P3L2106-MS1)		**Source: 3L11010-22**		Prepared: 12/21/23 Analyzed: 12/22/23						
Benzene	0.0912	0.00104	mg/kg dry	0.104	ND	87.5	80-120			
Toluene	0.0746	0.00104	"	0.104	ND	71.6	80-120			QM-05
Ethylbenzene	0.0682	0.00104	"	0.104	ND	65.5	80-120			QM-05
Xylene (p/m)	0.132	0.00208	"	0.208	ND	63.6	80-120			QM-05
Xylene (o)	0.0570	0.00104	"	0.104	ND	54.7	80-120			QM-05
Surrogate: 1,4-Difluorobenzene	*0.121*		"	*0.125*		*96.8*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.128*		"	*0.125*		*103*	*80-120*			
Matrix Spike Dup (P3L2106-MSD1)		**Source: 3L11010-22**		Prepared: 12/21/23 Analyzed: 12/22/23						
Benzene	0.0903	0.00104	mg/kg dry	0.104	ND	86.7	80-120	0.964	20	
Toluene	0.0729	0.00104	"	0.104	ND	70.0	80-120	2.23	20	QM-05
Ethylbenzene	0.0679	0.00104	"	0.104	ND	65.2	80-120	0.367	20	QM-05
Xylene (p/m)	0.132	0.00208	"	0.208	ND	63.2	80-120	0.647	20	QM-05
Xylene (o)	0.0559	0.00104	"	0.104	ND	53.6	80-120	1.92	20	QM-05
Surrogate: 4-Bromofluorobenzene	*0.128*		"	*0.125*		*102*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.121*		"	*0.125*		*97.0*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1213 - TX 1005										
Blank (P3L1213-BLK1)				Prepared: 12/11/23 Analyzed: 01/22/07						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*87.1*		*"*	*100*		*87.1*	*70-130*			
Surrogate: o-Terphenyl	*52.2*		*"*	*50.0*		*104*	*70-130*			
LCS (P3L1213-BS1)				Prepared: 12/11/23 Analyzed: 01/22/07						
C6-C12	1010	25.0	mg/kg	1000		101	75-125			
>C12-C28	1110	25.0	"	1000		111	75-125			
Surrogate: 1-Chlorooctane	*124*		*"*	*100*		*124*	*70-130*			
Surrogate: o-Terphenyl	*58.5*		*"*	*50.0*		*117*	*70-130*			
LCS Dup (P3L1213-BSD1)				Prepared: 12/11/23 Analyzed: 01/22/07						
C6-C12	975	25.0	mg/kg	1000		97.5	75-125	3.44	20	
>C12-C28	1080	25.0	"	1000		108	75-125	2.47	20	
Surrogate: 1-Chlorooctane	*124*		*"*	*100*		*124*	*70-130*			
Surrogate: o-Terphenyl	*56.3*		*"*	*50.0*		*113*	*70-130*			
Calibration Check (P3L1213-CCV1)				Prepared: 12/11/23 Analyzed: 01/22/07						
C6-C12	538	25.0	mg/kg	500		108	85-115			
>C12-C28	572	25.0	"	500		114	85-115			
Surrogate: 1-Chlorooctane	*101*		*"*	*100*		*101*	*70-130*			
Surrogate: o-Terphenyl	*50.9*		*"*	*50.0*		*102*	*70-130*			
Batch P3L1217 - TX 1005										
Blank (P3L1217-BLK1)				Prepared: 12/14/23 Analyzed: 12/15/23						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*110*		*"*	*100*		*110*	*70-130*			
Surrogate: o-Terphenyl	*63.6*		*"*	*50.0*		*127*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1217 - TX 1005										
LCS (P3L1217-BS1)				Prepared: 12/14/23 Analyzed: 12/15/23						
C6-C12	753	25.0	mg/kg	1000		75.3	75-125			
>C12-C28	922	25.0	"	1000		92.2	75-125			
Surrogate: 1-Chlorooctane	*104*		"	*100*		*104*	*70-130*			
Surrogate: o-Terphenyl	*61.2*		"	*50.0*		*122*	*70-130*			
LCS Dup (P3L1217-BSD1)				Prepared: 12/14/23 Analyzed: 12/15/23						
C6-C12	845	25.0	mg/kg	1000		84.5	75-125	11.5	20	
>C12-C28	907	25.0	"	1000		90.7	75-125	1.56	20	
Surrogate: 1-Chlorooctane	*127*		"	*100*		*127*	*70-130*			
Surrogate: o-Terphenyl	*56.2*		"	*50.0*		*112*	*70-130*			
Calibration Check (P3L1217-CCV1)				Prepared: 12/14/23 Analyzed: 12/15/23						
C6-C12	466	25.0	mg/kg	500		93.1	85-115			
>C12-C28	523	25.0	"	500		105	85-115			
Surrogate: 1-Chlorooctane	*118*		"	*100*		*118*	*70-130*			
Surrogate: o-Terphenyl	*59.4*		"	*50.0*		*119*	*70-130*			
Calibration Check (P3L1217-CCV2)				Prepared: 12/14/23 Analyzed: 12/15/23						
C6-C12	469	25.0	mg/kg	500		93.8	85-115			
>C12-C28	541	25.0	"	500		108	85-115			
Surrogate: 1-Chlorooctane	*120*		"	*100*		*120*	*70-130*			
Surrogate: o-Terphenyl	*61.3*		"	*50.0*		*123*	*70-130*			
Calibration Check (P3L1217-CCV3)				Prepared: 12/14/23 Analyzed: 12/15/23						
C6-C12	445	25.0	mg/kg	500		89.1	85-115			
>C12-C28	511	25.0	"	500		102	85-115			
Surrogate: 1-Chlorooctane	*115*		"	*100*		*115*	*70-130*			
Surrogate: o-Terphenyl	*57.4*		"	*50.0*		*115*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1217 - TX 1005										
Duplicate (P3L1217-DUP1)	**Source: 3L11012-01**			Prepared: 12/14/23 Analyzed: 12/15/23						
C6-C12	ND	26.3	mg/kg dry		ND				20	
>C12-C28	ND	26.3	"		85.1				20	
Surrogate: 1-Chlorooctane	*84.6*		*"*	*105*		*80.3*	*70-130*			
Surrogate: o-Terphenyl	*48.1*		*"*	*52.6*		*91.3*	*70-130*			
Batch P3L1304 - TX 1005										
Blank (P3L1304-BLK1)				Prepared: 12/13/23 Analyzed: 12/14/23						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*101*		*"*	*100*		*101*	*70-130*			
Surrogate: o-Terphenyl	*57.9*		*"*	*50.0*		*116*	*70-130*			
LCS (P3L1304-BS1)				Prepared: 12/13/23 Analyzed: 12/14/23						
C6-C12	1220	25.0	mg/kg	1000		122	75-125			
>C12-C28	1170	25.0	"	1000		117	75-125			
Surrogate: 1-Chlorooctane	*106*		*"*	*100*		*106*	*70-130*			
Surrogate: o-Terphenyl	*58.0*		*"*	*50.0*		*116*	*70-130*			
LCS Dup (P3L1304-BSD1)				Prepared: 12/13/23 Analyzed: 12/14/23						
C6-C12	1220	25.0	mg/kg	1000		122	75-125	0.125	20	
>C12-C28	1190	25.0	"	1000		119	75-125	1.91	20	
Surrogate: 1-Chlorooctane	*104*		*"*	*100*		*104*	*70-130*			
Surrogate: o-Terphenyl	*58.3*		*"*	*50.0*		*117*	*70-130*			
Calibration Check (P3L1304-CCV1)				Prepared & Analyzed: 12/13/23						
C6-C12	495	25.0	mg/kg	500		99.0	85-115			
>C12-C28	527	25.0	"	500		105	85-115			
Surrogate: 1-Chlorooctane	*73.3*		*"*	*100*		*73.3*	*70-130*			
Surrogate: o-Terphenyl	*34.9*		*"*	*50.0*		*69.8*	*70-130*			*S-GC*

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1304 - TX 1005										
Calibration Check (P3L1304-CCV2)				Prepared: 12/13/23 Analyzed: 12/14/23						
C6-C12	498	25.0	mg/kg	500		99.6	85-115			
>C12-C28	530	25.0	"	500		106	85-115			
Surrogate: 1-Chlorooctane	*71.9*		*"*	*100*		*71.9*	*70-130*			
Surrogate: o-Terphenyl	*35.9*		*"*	*50.0*		*71.8*	*70-130*			
Batch P3L1305 - TX 1005										
Blank (P3L1305-BLK1)				Prepared: 12/13/23 Analyzed: 12/14/23						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*102*		*"*	*100*		*102*	*70-130*			
Surrogate: o-Terphenyl	*58.7*		*"*	*50.0*		*117*	*70-130*			
LCS (P3L1305-BS1)				Prepared: 12/13/23 Analyzed: 12/14/23						
C6-C12	1250	25.0	mg/kg	1000		125	75-125			
>C12-C28	1180	25.0	"	1000		118	75-125			
Surrogate: 1-Chlorooctane	*102*		*"*	*100*		*102*	*70-130*			
Surrogate: o-Terphenyl	*50.9*		*"*	*50.0*		*102*	*70-130*			
LCS Dup (P3L1305-BSD1)				Prepared: 12/13/23 Analyzed: 12/14/23						
C6-C12	1250	25.0	mg/kg	1000		125	75-125	0.0577	20	
>C12-C28	1220	25.0	"	1000		122	75-125	3.17	20	
Surrogate: 1-Chlorooctane	*100*		*"*	*100*		*100*	*70-130*			
Surrogate: o-Terphenyl	*50.6*		*"*	*50.0*		*101*	*70-130*			
Calibration Check (P3L1305-CCV1)				Prepared: 12/13/23 Analyzed: 12/14/23						
C6-C12	507	25.0	mg/kg	500		101	85-115			
>C12-C28	540	25.0	"	500		108	85-115			
Surrogate: 1-Chlorooctane	*78.8*		*"*	*100*		*78.8*	*70-130*			
Surrogate: o-Terphenyl	*38.1*		*"*	*50.0*		*76.2*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1305 - TX 1005										
Calibration Check (P3L1305-CCV2)				Prepared: 12/13/23 Analyzed: 12/14/23						
C6-C12	502	25.0	mg/kg	500		100	85-115			
>C12-C28	546	25.0	"	500		109	85-115			
Surrogate: 1-Chlorooctane	*79.9*		*"*	*100*		*79.9*	*70-130*			
Surrogate: o-Terphenyl	*39.3*		*"*	*50.0*		*78.6*	*70-130*			
Calibration Check (P3L1305-CCV3)				Prepared: 12/13/23 Analyzed: 12/15/23						
C6-C12	514	25.0	mg/kg	500		103	85-115			
>C12-C28	568	25.0	"	500		114	85-115			
Surrogate: 1-Chlorooctane	*75.8*		*"*	*100*		*75.8*	*70-130*			
Surrogate: o-Terphenyl	*38.1*		*"*	*50.0*		*76.2*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1212 - * DEFAULT PREP *** **										
Blank (P3L1212-BLK1)				Prepared & Analyzed: 12/12/23						
% Moisture	ND	0.1	%							
Blank (P3L1212-BLK2)				Prepared & Analyzed: 12/12/23						
% Moisture	ND	0.1	%							
Duplicate (P3L1212-DUP1)		**Source: 3L11007-01**		Prepared & Analyzed: 12/12/23						
% Moisture	2.0	0.1	%		2.0			0.00	20	
Duplicate (P3L1212-DUP2)		**Source: 3L11010-06**		Prepared & Analyzed: 12/12/23						
% Moisture	4.0	0.1	%		4.0			0.00	20	
Duplicate (P3L1212-DUP3)		**Source: 3L11010-21**		Prepared & Analyzed: 12/12/23						
% Moisture	4.0	0.1	%		4.0			0.00	20	
Duplicate (P3L1212-DUP4)		**Source: 3L11010-31**		Prepared & Analyzed: 12/12/23						
% Moisture	4.0	0.1	%		4.0			0.00	20	
Batch P3L1910 - * DEFAULT PREP *** **										
Blank (P3L1910-BLK1)				Prepared: 12/19/23 Analyzed: 12/28/23						
Chloride	ND	1.00	mg/kg							
LCS (P3L1910-BS1)				Prepared: 12/19/23 Analyzed: 12/28/23						
Chloride	20.4		mg/kg	20.0		102	90-110			
LCS Dup (P3L1910-BSD1)				Prepared: 12/19/23 Analyzed: 12/28/23						
Chloride	20.6		mg/kg	20.0		103	90-110	1.02	10	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L1910 - * DEFAULT PREP *** **										
Calibration Check (P3L1910-CCV1)				Prepared: 12/19/23 Analyzed: 12/27/23						
Chloride	20.8		mg/kg	20.0		104	90-110			
Calibration Check (P3L1910-CCV2)				Prepared: 12/19/23 Analyzed: 12/28/23						
Chloride	20.8		mg/kg	20.0		104	90-110			
Matrix Spike (P3L1910-MS1)		**Source: 3L08013-03**		Prepared: 12/19/23 Analyzed: 12/28/23						
Chloride	121		mg/kg	100	0.170	121	80-120			QM-05
Matrix Spike (P3L1910-MS2)		**Source: 3L08013-13**		Prepared: 12/19/23 Analyzed: 12/28/23						
Chloride	175		mg/kg	100	52.5	122	80-120			QM-05
Matrix Spike Dup (P3L1910-MSD1)		**Source: 3L08013-03**		Prepared: 12/19/23 Analyzed: 12/28/23						
Chloride	121		mg/kg	100	0.170	120	80-120	0.197	20	
Matrix Spike Dup (P3L1910-MSD2)		**Source: 3L08013-13**		Prepared: 12/19/23 Analyzed: 12/28/23						
Chloride	174		mg/kg	100	52.5	121	80-120	0.686	20	QM-05
Batch P3L2108 - * DEFAULT PREP *** **										
Blank (P3L2108-BLK1)				Prepared & Analyzed: 12/21/23						
Chloride	ND	1.00	mg/kg							
LCS (P3L2108-BS1)				Prepared & Analyzed: 12/21/23						
Chloride	20.2		mg/kg	20.0		101	90-110			
LCS Dup (P3L2108-BSD1)				Prepared & Analyzed: 12/21/23						
Chloride	20.4		mg/kg	20.0		102	90-110	0.966	10	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L2108 - * DEFAULT PREP *** **										
Calibration Check (P3L2108-CCV1)				Prepared & Analyzed: 12/21/23						
Chloride	20.2		mg/kg	20.0		101	90-110			
Calibration Check (P3L2108-CCV2)				Prepared & Analyzed: 12/21/23						
Chloride	20.6		mg/kg	20.0		103	90-110			
Matrix Spike (P3L2108-MS1)		**Source: 3L11010-17**		Prepared & Analyzed: 12/21/23						
Chloride	107		mg/kg	100	0.294	107	80-120			
Matrix Spike (P3L2108-MS2)		**Source: 3L11010-27**		Prepared & Analyzed: 12/21/23						
Chloride	108		mg/kg	100	0.853	107	80-120			
Matrix Spike Dup (P3L2108-MSD1)		**Source: 3L11010-17**		Prepared & Analyzed: 12/21/23						
Chloride	107		mg/kg	100	0.294	107	80-120	0.318	20	
Matrix Spike Dup (P3L2108-MSD2)		**Source: 3L11010-27**		Prepared & Analyzed: 12/21/23						
Chloride	108		mg/kg	100	0.853	107	80-120	0.241	20	
Batch P3L2804 - * DEFAULT PREP *** **										
Blank (P3L2804-BLK1)				Prepared & Analyzed: 12/28/23						
Chloride	ND	1.00	mg/kg							
LCS (P3L2804-BS1)				Prepared & Analyzed: 12/28/23						
Chloride	20.2		mg/kg	20.0		101	90-110			
LCS Dup (P3L2804-BSD1)				Prepared & Analyzed: 12/28/23						
Chloride	20.4		mg/kg	20.0		102	90-110	1.10	10	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L2804 - * DEFAULT PREP *** **										
Calibration Check (P3L2804-CCV1)				Prepared & Analyzed: 12/28/23						
Chloride	20.6		mg/kg	20.0		103	90-110			
Calibration Check (P3L2804-CCV2)				Prepared: 12/28/23 Analyzed: 12/29/23						
Chloride	20.7		mg/kg	20.0		104	90-110			
Matrix Spike (P3L2804-MS1)		**Source: 3L11010-06**		Prepared & Analyzed: 12/28/23						
Chloride	121		mg/kg	100	1.28	119	80-120			
Matrix Spike (P3L2804-MS2)		**Source: 3L11010-16**		Prepared: 12/28/23 Analyzed: 12/29/23						
Chloride	111		mg/kg	100	0.765	110	80-120			
Matrix Spike Dup (P3L2804-MSD1)		**Source: 3L11010-06**		Prepared & Analyzed: 12/28/23						
Chloride	120		mg/kg	100	1.28	119	80-120	0.399	20	
Matrix Spike Dup (P3L2804-MSD2)		**Source: 3L11010-16**		Prepared: 12/28/23 Analyzed: 12/29/23						
Chloride	111		mg/kg	100	0.765	110	80-120	0.267	20	
Batch P3L2904 - * DEFAULT PREP *** **										
Blank (P3L2904-BLK1)				Prepared & Analyzed: 12/29/23						
Chloride	ND	1.00	mg/kg							
LCS (P3L2904-BS1)				Prepared & Analyzed: 12/29/23						
Chloride	20.1		mg/kg	20.0		101	90-110			
LCS Dup (P3L2904-BSD1)				Prepared & Analyzed: 12/29/23						
Chloride	20.2		mg/kg	20.0		101	90-110	0.397	10	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P3L2904 - * DEFAULT PREP *** **										
Calibration Check (P3L2904-CCV1)				Prepared & Analyzed: 12/29/23						
Chloride	20.6		mg/kg	20.0		103	90-110			
Calibration Check (P3L2904-CCV2)				Prepared & Analyzed: 12/29/23						
Chloride	21.0		mg/kg	20.0		105	90-110			
Matrix Spike (P3L2904-MS1)		**Source: 3L11010-30**		Prepared & Analyzed: 12/29/23						
Chloride	112		mg/kg	100	1.92	111	80-120			
Matrix Spike (P3L2904-MS2)		**Source: 3L11012-05**		Prepared & Analyzed: 12/29/23						
Chloride	127		mg/kg	100	17.4	110	80-120			
Matrix Spike Dup (P3L2904-MSD1)		**Source: 3L11010-30**		Prepared & Analyzed: 12/29/23						
Chloride	112		mg/kg	100	1.92	110	80-120	0.631	20	
Matrix Spike Dup (P3L2904-MSD2)		**Source: 3L11012-05**		Prepared & Analyzed: 12/29/23						
Chloride	127		mg/kg	100	17.4	110	80-120	0.439	20	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Notes and Definitions

S-GC	Surrogate recovery outside of control limits. The data was accepted based on valid recovery of the remaining surrogate.
ROI	Received on Ice
QM-05	The spike recovery was outside acceptance limits for the MS and/or MSD due to matrix interference. The LCS and/or LCSD were within acceptance limits showing that the laboratory is in control and the data is acceptable.
BULK	Samples received in Bulk soil containers may be biased low in the nC6-C12 TPH Range
DET	Analyte DETECTED
ND	Analyte NOT DETECTED at or above the reporting limit
NR	Not Reported
dry	Sample results reported on a dry weight basis
RPD	Relative Percent Difference
LCS	Laboratory Control Spike
MS	Matrix Spike
Dup	Duplicate

Report Approved By: Brent Barron Date: 1/2/2024

Brent Barron, Laboratory Director/Technical Director

This material is intended only for the use of the individual (s) or entity to whom it is addressed, and may contain information that is privileged and confidential.

If you have received this material in error, please notify us immediately at 432-686-7235.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Page 961 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934 Fax No: _____
Sampler Signature: Jose Belloc

Project Name: Jalapeño
Project #: CDEV # 11845
Project Loc: Lea, CO, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES
e-mail: Jamey@Tellusservices

(lab use only)
ORDER #: 3L11010

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total # of Containers	Preservation & # of Containers: Ice	HNO3	HCl	H2SO4	NaOH	Na2S2O3	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge	GW=Groundwater S=Soil/Solid	NP=Non-Potable Specify Other	Analyze For: TCLP: TPH: TX 1005	TX 1006	Anions (Cl, SO4, Alkalinity)	TOTAL: BTEX 8021B/5030 or BTEX 8260	BTEX EPA - 8021	TPH - EPA - 8015	Chlorides EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
1	BH-430@2ft	2ft	2ft	12-11-23	8:40		1	X								S							X	X	X		
2	BH-431@2ft	2ft	2ft		8:42																						
3	BH-432@2ft	2ft	2ft		8:45																						
4	BH-433@1.5	1.5	1.5		8:46																						
5	BH-434@1.5	1.5	1.5		8:48																						
6	BH-435@1.5	1.5	1.5		8:49																						
7	BH-436@1.5	1.5	1.5		8:51																						
8	BH-437@1.5	1.5	1.5		8:52																						
9	BH-438@1.5	1.5	1.5		8:54																						
10	BH-439@1.5	1.5	1.5	L	8:55		L	L								L						L	L	L			

Special Instructions: Report TPH-in-CB-C12 & C12-C28 & C28-C35 fractions aswell as total TPH
same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
Jose Belloc					
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL: Jana MC	12/11/23	1555

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N
by Sampler/Client Rep. ?		
by Courier? UPS DHL FedEx Lone Star		

Temperature Upon Receipt:
Received: 7.3 °C Thermometor: CF0
Adjusted: °C Factor: L3

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21

Page 1 of 4

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

Page 962 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934
Sampler Signature: Jose Belloc

Project Name: Jalapeño
Project #: CDEV # 11845
Project Loc: Lea, CO, NM
PO #:
Report Format: ☐ Standard ☐ TRRP ☐ NPDES
Fax No:
e-mail: Jamey@Tellusservices

(lab use only)
ORDER #: 3L11010

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total # of Containers	Preservation & # of Containers: Ice	HNO3	HCl	H2SO4	NaOH	Na2S2O3	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge	GW = Groundwater S=Soil/Solid	NP=Non-Potable Specify Other	Analyze For: TPH: TX 1005 TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA - 8021	TPH- EPA - 8015	Chlorides EPA-300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
11	BH-440@1.5	1.5	1.5	12-11-23	8:56		1	1								S										
12	BH-441@1.5	1.5	1.5		8:57		1	1														X	X	X		
13	BH-442@1.5	1.5	1.5		8:58		1	1																		
14	BH-442-BG1.5	1.5	1.5		8:59		1	1																		
15	BH-443@1.5	1.5	1.5		9:06		1	1																		
16	BH-444@2ft	2ft	2ft		9:01		1	1																		
17	BH-445@2ft	2ft	2ft		9:03		1	1																		
18	BH-446@2ft	2ft	2ft		9:04		1	1																		
19	BH-447@2ft	2ft	2ft		9:07		1	1																		
20	BH-448@2ft	2ft	2ft	↓	9:10		1	1								↓						↓	↓	↓		

Special Instructions: Report TPH-in-C6-C12 & C12-C28 & C28-C35 fractions aswell as total TPH
same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
Jose Belloc					
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL:	Date	Time
			Jose MC	12/11/23	1555

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N
by Sampler/Client Rep. ?	Y	N

by Courier? UPS DHL FedEx Lone Star

Temperature Upon Receipt:
Received: 7.3 °C Thermometer: CF03
Adjusted: °C Factor:

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21

Page 1 of 2

24

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

Page 963 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934 Fax No: _____
Sampler Signature: Jose Belloc
e-mail: Jamey@Tellusservices

Project Name: Jalapeño
Project #: COEV # 11845
Project Loc: Lea, CO, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES

(lab use only)
ORDER #: 3L11010

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total #. of Containers	Preservation & # of Containers: Ice	HNO3	HCl	H2SO4	NaOH	Na2S2O3	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge; GW = Groundwater S=Soil/Solid; NP=Non-Potable Specify Other	Analyze For: TCLP: TPH: TX 1005	TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA - 8021	TPH- EPA - 8015	Chlorides EPA-300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
21	BH-449@2ft	2ft	2ft	12-11-23	9:12		1	X								5					X	X	X		
22	BH-450@1ft	1ft	1ft	"	9:15		"	"								"					"	"	"		
23	BH-451@1ft	1ft	1ft	"	9:18		"	"								"					"	"	"		
24	BH-452@1ft	1ft	1ft	"	9:20		"	"								"					"	"	"		
25	BH-453@1ft	1ft	1ft	"	9:21		"	"								"					"	"	"		
26	BH-454@1ft	"	"	"	9:25		"	"								"					"	"	"		
27	BH-455@1ft	"	"	"	9:25		"	"								"					"	"	"		
28	BH-456@1ft	"	"	"	9:26		"	"								"					"	"	"		
29	BH-457@1ft	"	"	"	9:27		"	"								"					"	"	"		
30	BH-458@1ft	"	"	"	9:35		"	"								"					"	"	"		

Special Instructions: Report TPH-in-C6-C12 & C12-C28 & C28-C35 fractions aswell as total TPH
same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
Jose Belloc					
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL: Laura Mc	Date 12/11/23	Time 15:55

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N

by Sampler/Client Rep. ? by Courier? UPS DHL FedEx Lone Star

Temperature Upon Receipt:
Received: 7.3 °C Thermometer: CF03
Adjusted: °C Factor:

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21

Page 3 of 4

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

Page 964 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934 Fax No: _____
Sampler Signature: Jose Belloc
e-mail: Jamey@Tellusservices

Project Name: Jalapeño
Project #: CDEV # 11845
Project Loc: Lea, CO, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES

(lab use only)
ORDER #: 3L11010

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total #. of Containers	Preservation & # of Containers: Ice	HNO_3	HCl	H_2SO_4	NaOH	$Na_2S_2O_3$	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge	GW = Groundwater S=Soil/Solid	NP=Non-Potable Specify Other	Analyze For: TCLP: TPH: TX 1005 TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA - 8021	TPH- EPA - 8015	Chlorides EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
31	BH-459@1ft	1ft	1ft	12-11-23	9:37		1	X								S						X	X	X		
32	BH-460@1ft	1ft	1ft	12-11-23	9:39		1	X								S						X	X	X		
33	BH-461@1ft	1ft	1ft	12-11-23	9:44		1	X								S						X	X	X		
34	BH-462@1ft	1ft	1ft	12-11-23	9:51		1	X								S						X	X	X		
35	BH-463@1ft	1ft	1ft	12-11-23	9:55		1	X								S						X	X	X		

Special Instructions: Report TPH-in-C6-C12 & C12-C28 & C28-C35 fractions aswell as total TPH
same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
Jose Belloc					
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL: Dana MC	12/11/23	15:55

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N
by Sampler/Client Rep. ?		
by Courier? UPS DHL FedEx Lone Star		

Temperature Upon Receipt:
Received: 7.3 °C Thermometer: CF0
Adjusted: °C Factor: 0.3

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21

Page 4 of 4

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

PERMIAN BASIN
ENVIRONMENTAL LAB, LP
1400 Rankin Hwy
Midland, TX 79701

PBELAB

Analytical Report Rev. 1

Prepared for:

Jamey Fowler

Tellus Consulting, LLC

4000 North Big Spring Street Suite 109

Midland, TX 79705

Project: Jalapeno

Project Number: CDEV #11845

Location: Lea County, NM

Lab Order Number: 4A02009

NELAP ACCREDITED TNI LABORATORY

Current Certification

Report Date: 02/13/24

Tellus Consulting, LLC
4000 North Big Spring Street Suite 109
Midland TX, 79705

Project: Jalapeno
Project Number: CDEV #11845
Project Manager: Jamey Fowler

ANALYTICAL REPORT FOR SAMPLES

Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
NWW-1 @ 8 In.	4A02009-01	Soil	12/26/23 08:10	12-29-2024 12:33
WW-2 @ 8 In.	4A02009-02	Soil	12/26/23 08:12	12-29-2024 12:33
WW-1 @ 10 In.	4A02009-03	Soil	12/26/23 08:13	12-29-2024 12:33
SW-1 @ 10 In.	4A02009-04	Soil	12/26/23 08:17	12-29-2024 12:33
EW-1 @ 10 In.	4A02009-05	Soil	12/26/23 08:20	12-29-2024 12:33
EW-2 @ 10 In.	4A02009-06	Soil	12/26/23 08:21	12-29-2024 12:33
EW-4 @ 10 In.	4A02009-07	Soil	12/26/23 08:24	12-29-2024 12:33
EW-3 @ 10 In.	4A02009-08	Soil	12/26/23 08:25	12-29-2024 12:33
NW-1 @ 1.5 Ft.	4A02009-09	Soil	12/26/23 08:27	12-29-2024 12:33
WW-5 @ 1.5 Ft.	4A02009-10	Soil	12/26/23 08:30	12-29-2024 12:33
SWW-1 @ 10 In.	4A02009-11	Soil	12/26/23 10:39	12-29-2024 12:33
WW-3 @ 10 In.	4A02009-12	Soil	12/26/23 10:41	12-29-2024 12:33
NWW-2 @ 10 In.	4A02009-13	Soil	12/26/23 10:43	12-29-2024 12:33
SW-4 @ 1 Ft.	4A02009-14	Soil	12/26/23 08:57	12-29-2024 12:33
EW-10 @ 1 Ft.	4A02009-15	Soil	12/26/23 09:01	12-29-2024 12:33
SW-5 @ 1 Ft.	4A02009-16	Soil	12/26/23 09:03	12-29-2024 12:33
SEW-1 @ 1 Ft.	4A02009-17	Soil	12/26/23 08:05	12-29-2024 12:33
EW-11 @ 10 In.	4A02009-18	Soil	12/26/23 09:07	12-29-2024 12:33
SW-6 @ 10 In.	4A02009-19	Soil	12/26/23 09:10	12-29-2024 12:33
EW-12 @ 10 In.	4A02009-20	Soil	12/26/23 09:13	12-29-2024 12:33
SW-7 @ 10 In.	4A02009-21	Soil	12/26/23 09:15	12-29-2024 12:33
EW-13 @ 10 In.	4A02009-22	Soil	12/26/23 09:16	12-29-2024 12:33
SEW-2 @ 10 In.	4A02009-23	Soil	12/26/23 09:20	12-29-2024 12:33
SW-11 @ 1.5 Ft.	4A02009-24	Soil	12/26/23 10:13	12-29-2024 12:33
SW-12 @ 1.5 Ft.	4A02009-25	Soil	12/26/23 10:17	12-29-2024 12:33
WW-12 @ 1.5 Ft.	4A02009-26	Soil	12/26/23 10:21	12-29-2024 12:33
NW-8 @ 1.5 Ft.	4A02009-27	Soil	12/26/23 10:23	12-29-2024 12:33
EW-17 @ 1.5 Ft.	4A02009-28	Soil	12/26/23 10:25	12-29-2024 12:33
WW-13 @ 1.5 Ft.	4A02009-29	Soil	12/26/23 10:27	12-29-2024 12:33
NW-9 @ 1.5 Ft.	4A02009-30	Soil	12/26/23 10:30	12-29-2024 12:33
EW-18 @ 1.5 Ft.	4A02009-31	Soil	12/26/23 10:31	12-29-2024 12:33
WW-6 @ 1 Ft.	4A02009-32	Soil	12/26/23 10:33	12-29-2024 12:33
WW-4 @ 10 In.	4A02009-33	Soil	12/26/23 10:37	12-29-2024 12:33
NW-7 @ 10 In.	4A02009-34	Soil	12/26/23 09:48	12-29-2024 12:33

Tellus Consulting, LLC
4000 North Big Spring Street Suite 109
Midland TX, 79705

Project: Jalapeno
Project Number: CDEV #11845
Project Manager: Jamey Fowler

ANALYTICAL REPORT FOR SAMPLES

Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
WW-9 @ 10 In.	4A02009-35	Soil	12/26/23 09:51	12-29-2024 12:33
SWW-2 @ 10 In.	4A02009-36	Soil	12/26/23 09:53	12-29-2024 12:33
SW-10 @ 10 In.	4A02009-37	Soil	12/26/23 09:55	12-29-2024 12:33
WW-10 @ 10 In.	4A02009-38	Soil	12/26/23 09:56	12-29-2024 12:33
NW-4 @ 10 In.	4A02009-39	Soil	12/26/23 09:58	12-29-2024 12:33
WW-11 @ 10 In.	4A02009-40	Soil	12/26/23 10:03	12-29-2024 12:33
NWW-2 @ 1 Ft.	4A02009-41	Soil	12/26/23 10:06	12-29-2024 12:33
NW-5 @ 1 Ft.	4A02009-42	Soil	12/26/23 10:08	12-29-2024 12:33
NW-6 @ 1 Ft.	4A02009-43	Soil	12/26/23 10:10	12-29-2024 12:33
NEW-1 @ 8 In.	4A02009-44	Soil	12/26/23 09:22	12-29-2024 12:33
EW-14 @ 8 In.	4A02009-45	Soil	12/26/23 09:23	12-29-2024 12:33
SW-7 @ 8 In.	4A02009-46	Soil	12/26/23 09:27	12-29-2024 12:33
EW-15 @ 8 In.	4A02009-47	Soil	12/26/23 09:30	12-29-2024 12:33
NW-3 @ 8 In.	4A02009-48	Soil	12/26/23 09:32	12-29-2024 12:33
EW-16 @ 8 In.	4A02009-49	Soil	12/26/23 09:35	12-29-2024 12:33
SW-8 @ 8 In.	4A02009-50	Soil	12/26/23 09:37	12-29-2024 12:33
WW-7 @ 8 In.	4A02009-51	Soil	12/26/23 09:41	12-29-2024 12:33
SW-9 @ 10 In.	4A02009-52	Soil	12/26/23 09:42	12-29-2024 12:33
WW-8 @ 10 In.	4A02009-53	Soil	12/26/23 09:45	12-29-2024 12:33
SW-2 @ 1.5 Ft.	4A02009-54	Soil	12/26/23 08:32	12-29-2024 12:33
EW-17 @ 1.5 Ft.	4A02009-55	Soil	12/26/23 08:35	12-29-2024 12:33
NEW-1 @ 1.5 Ft.	4A02009-56	Soil	12/26/23 08:37	12-29-2024 12:33
EW-5 @ 10 In.	4A02009-57	Soil	12/26/23 08:40	12-29-2024 12:33
EW-6 @ 10 In.	4A02009-58	Soil	12/26/23 08:42	12-29-2024 12:33
EW-7 @ 10 In.	4A02009-59	Soil	12/26/23 08:44	12-29-2024 12:33
NW-2 @ 1 Ft.	4A02009-60	Soil	12/26/23 08:45	12-29-2024 12:33
EW-8 @ 1 Ft.	4A02009-61	Soil	12/26/23 08:47	12-29-2024 12:33
SW-3 @ 1 Ft.	4A02009-62	Soil	12/26/23 08:48	12-29-2024 12:33
EW-9 @ 8 In.	4A02009-63	Soil	12/26/23 08:53	12-29-2024 12:33

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

NWW-1 @ 8 In.

4A02009-01 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 02:07	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 02:07	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 02:07	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 02:07	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 02:07	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*112 %*		*80-120*		*P4A0207*	*01/02/24 12:37*	*01/03/24 02:07*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*94.2 %*		*80-120*		*P4A0207*	*01/02/24 12:37*	*01/03/24 02:07*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	01/02/24 12:37	01/03/24 02:07	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	01/02/24 12:37	01/03/24 02:07	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P4A0208	01/02/24 14:49	01/02/24 19:39	TPH 8015M	
>C12-C28	**178**	25.8	mg/kg dry	1	P4A0208	01/02/24 14:49	01/02/24 19:39	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P4A0208	01/02/24 14:49	01/02/24 19:39	TPH 8015M	
Surrogate: 1-Chlorooctane	*86.6 %*		*70-130*		*P4A0208*	*01/02/24 14:49*	*01/02/24 19:39*	*TPH 8015M*	
Surrogate: o-Terphenyl	*99.8 %*		*70-130*		*P4A0208*	*01/02/24 14:49*	*01/02/24 19:39*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	**178**	25.8	mg/kg dry	1	[CALC]	01/02/24 14:49	01/02/24 19:39	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**29.3**	1.03	mg/kg dry	1	P4A0503	01/05/24 15:08	01/05/24 17:33	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

WW-2 @ 8 In.

4A02009-02 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 02:31	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 02:31	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 02:31	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 02:31	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 02:31	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*94.3 %*		*80-120*		*P4A0207*	*01/02/24 12:37*	*01/03/24 02:31*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*110 %*		*80-120*		*P4A0207*	*01/02/24 12:37*	*01/03/24 02:31*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	01/02/24 12:37	01/03/24 02:31	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	01/02/24 12:37	01/03/24 02:31	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P4A0208	01/02/24 14:49	01/02/24 20:02	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P4A0208	01/02/24 14:49	01/02/24 20:02	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P4A0208	01/02/24 14:49	01/02/24 20:02	TPH 8015M	
Surrogate: 1-Chlorooctane	*84.7 %*		*70-130*		*P4A0208*	*01/02/24 14:49*	*01/02/24 20:02*	*TPH 8015M*	
Surrogate: o-Terphenyl	*95.6 %*		*70-130*		*P4A0208*	*01/02/24 14:49*	*01/02/24 20:02*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	01/02/24 14:49	01/02/24 20:02	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**16.4**	1.05	mg/kg dry	1	P4A0507	01/05/24 15:13	01/08/24 03:52	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

WW-1 @ 10 In.

4A02009-03 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 02:56	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 02:56	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 02:56	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 02:56	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 02:56	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*111 %*		*80-120*		*P4A0207*	*01/02/24 12:37*	*01/03/24 02:56*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*94.5 %*		*80-120*		*P4A0207*	*01/02/24 12:37*	*01/03/24 02:56*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	01/02/24 12:37	01/03/24 02:56	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	01/02/24 12:37	01/03/24 02:56	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P4A0208	01/02/24 14:49	01/02/24 20:26	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P4A0208	01/02/24 14:49	01/02/24 20:26	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P4A0208	01/02/24 14:49	01/02/24 20:26	TPH 8015M	
Surrogate: 1-Chlorooctane	*83.9 %*		*70-130*		*P4A0208*	*01/02/24 14:49*	*01/02/24 20:26*	*TPH 8015M*	
Surrogate: o-Terphenyl	*96.0 %*		*70-130*		*P4A0208*	*01/02/24 14:49*	*01/02/24 20:26*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	01/02/24 14:49	01/02/24 20:26	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**16.4**	1.04	mg/kg dry	1	P4A0507	01/05/24 15:13	01/08/24 04:57	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

SW-1 @ 10 In.

4A02009-04 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00109	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 03:20	EPA 8021B	
Toluene	ND	0.00109	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 03:20	EPA 8021B	
Ethylbenzene	ND	0.00109	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 03:20	EPA 8021B	
Xylene (p/m)	ND	0.00217	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 03:20	EPA 8021B	
Xylene (o)	ND	0.00109	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 03:20	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*94.0 %*		*80-120*		*P4A0207*	*01/02/24 12:37*	*01/03/24 03:20*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*111 %*		*80-120*		*P4A0207*	*01/02/24 12:37*	*01/03/24 03:20*	*EPA 8021B*	
Xylenes (total)	ND	0.00217	mg/kg dry	1	[CALC]	01/02/24 12:37	01/03/24 03:20	EPA 8021B	
Total BTEX	ND	0.00109	mg/kg dry	1	[CALC]	01/02/24 12:37	01/03/24 03:20	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.2	mg/kg dry	1	P4A0208	01/02/24 14:49	01/02/24 20:49	TPH 8015M	
>C12-C28	ND	27.2	mg/kg dry	1	P4A0208	01/02/24 14:49	01/02/24 20:49	TPH 8015M	
>C28-C35	ND	27.2	mg/kg dry	1	P4A0208	01/02/24 14:49	01/02/24 20:49	TPH 8015M	
Surrogate: 1-Chlorooctane	*81.4 %*		*70-130*		*P4A0208*	*01/02/24 14:49*	*01/02/24 20:49*	*TPH 8015M*	
Surrogate: o-Terphenyl	*93.6 %*		*70-130*		*P4A0208*	*01/02/24 14:49*	*01/02/24 20:49*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.2	mg/kg dry	1	[CALC]	01/02/24 14:49	01/02/24 20:49	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**58.2**	1.09	mg/kg dry	1	P4A0507	01/05/24 15:13	01/08/24 05:18	EPA 300.0	
% Moisture	**8.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

EW-1 @ 10 In.

4A02009-05 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 03:44	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 03:44	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 03:44	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 03:44	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 03:44	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*110 %*		*80-120*		*P4A0207*	*01/02/24 12:37*	*01/03/24 03:44*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*94.7 %*		*80-120*		*P4A0207*	*01/02/24 12:37*	*01/03/24 03:44*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	01/02/24 12:37	01/03/24 03:44	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	01/02/24 12:37	01/03/24 03:44	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P4A0208	01/02/24 14:49	01/02/24 21:12	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P4A0208	01/02/24 14:49	01/02/24 21:12	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P4A0208	01/02/24 14:49	01/02/24 21:12	TPH 8015M	
Surrogate: 1-Chlorooctane	*78.3 %*		*70-130*		*P4A0208*	*01/02/24 14:49*	*01/02/24 21:12*	*TPH 8015M*	
Surrogate: o-Terphenyl	*89.8 %*		*70-130*		*P4A0208*	*01/02/24 14:49*	*01/02/24 21:12*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	01/02/24 14:49	01/02/24 21:12	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**28.9**	1.05	mg/kg dry	1	P4A0507	01/05/24 15:13	01/08/24 05:39	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

EW-2 @ 10 In.

4A02009-06 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 04:09	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 04:09	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 04:09	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 04:09	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 04:09	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*94.8 %*		*80-120*		*P4A0207*	*01/02/24 12:37*	*01/03/24 04:09*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*110 %*		*80-120*		*P4A0207*	*01/02/24 12:37*	*01/03/24 04:09*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	01/02/24 12:37	01/03/24 04:09	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	01/02/24 12:37	01/03/24 04:09	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P4A0208	01/02/24 14:49	01/02/24 21:36	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P4A0208	01/02/24 14:49	01/02/24 21:36	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P4A0208	01/02/24 14:49	01/02/24 21:36	TPH 8015M	
Surrogate: 1-Chlorooctane	*84.5 %*		*70-130*		*P4A0208*	*01/02/24 14:49*	*01/02/24 21:36*	*TPH 8015M*	
Surrogate: o-Terphenyl	*96.0 %*		*70-130*		*P4A0208*	*01/02/24 14:49*	*01/02/24 21:36*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	01/02/24 14:49	01/02/24 21:36	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**13.3**	1.04	mg/kg dry	1	P4A0507	01/05/24 15:13	01/08/24 06:01	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

EW-4 @ 10 In.

4A02009-07 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 04:33	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 04:33	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 04:33	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 04:33	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 04:33	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*94.8 %*		*80-120*		*P4A0207*	*01/02/24 12:37*	*01/03/24 04:33*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*110 %*		*80-120*		*P4A0207*	*01/02/24 12:37*	*01/03/24 04:33*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	01/02/24 12:37	01/03/24 04:33	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	01/02/24 12:37	01/03/24 04:33	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P4A0208	01/02/24 14:49	01/02/24 21:59	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P4A0208	01/02/24 14:49	01/02/24 21:59	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P4A0208	01/02/24 14:49	01/02/24 21:59	TPH 8015M	
Surrogate: 1-Chlorooctane	*84.6 %*		*70-130*		*P4A0208*	*01/02/24 14:49*	*01/02/24 21:59*	*TPH 8015M*	
Surrogate: o-Terphenyl	*96.5 %*		*70-130*		*P4A0208*	*01/02/24 14:49*	*01/02/24 21:59*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	01/02/24 14:49	01/02/24 21:59	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**25.2**	1.04	mg/kg dry	1	P4A0507	01/05/24 15:13	01/08/24 06:22	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

EW-3 @ 10 In.

4A02009-08 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 04:58	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 04:58	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 04:58	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 04:58	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 04:58	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*111 %*		*80-120*		*P4A0207*	*01/02/24 12:37*	*01/03/24 04:58*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*94.7 %*		*80-120*		*P4A0207*	*01/02/24 12:37*	*01/03/24 04:58*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	01/02/24 12:37	01/03/24 04:58	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	01/02/24 12:37	01/03/24 04:58	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P4A0208	01/02/24 14:49	01/02/24 22:23	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P4A0208	01/02/24 14:49	01/02/24 22:23	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P4A0208	01/02/24 14:49	01/02/24 22:23	TPH 8015M	
Surrogate: 1-Chlorooctane	*82.2 %*		*70-130*		*P4A0208*	*01/02/24 14:49*	*01/02/24 22:23*	*TPH 8015M*	
Surrogate: o-Terphenyl	*94.9 %*		*70-130*		*P4A0208*	*01/02/24 14:49*	*01/02/24 22:23*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	01/02/24 14:49	01/02/24 22:23	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**15.8**	1.05	mg/kg dry	1	P4A0507	01/05/24 15:13	01/08/24 06:44	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

NW-1 @ 1.5 Ft.

4A02009-09 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 06:11	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 06:11	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 06:11	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 06:11	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 06:11	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*111 %*		*80-120*		*P4A0207*	*01/02/24 12:37*	*01/03/24 06:11*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*95.2 %*		*80-120*		*P4A0207*	*01/02/24 12:37*	*01/03/24 06:11*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	01/02/24 12:37	01/03/24 06:11	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	01/02/24 12:37	01/03/24 06:11	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P4A0208	01/02/24 14:49	01/02/24 23:33	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P4A0208	01/02/24 14:49	01/02/24 23:33	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P4A0208	01/02/24 14:49	01/02/24 23:33	TPH 8015M	
Surrogate: 1-Chlorooctane	*82.9 %*		*70-130*		*P4A0208*	*01/02/24 14:49*	*01/02/24 23:33*	*TPH 8015M*	
Surrogate: o-Terphenyl	*94.9 %*		*70-130*		*P4A0208*	*01/02/24 14:49*	*01/02/24 23:33*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	01/02/24 14:49	01/02/24 23:33	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**13.5**	1.04	mg/kg dry	1	P4A0507	01/05/24 15:13	01/08/24 07:05	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

WW-5 @ 1.5 Ft.

4A02009-10 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 06:35	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 06:35	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 06:35	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 06:35	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 06:35	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*111 %*		*80-120*		*P4A0207*	*01/02/24 12:37*	*01/03/24 06:35*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*95.1 %*		*80-120*		*P4A0207*	*01/02/24 12:37*	*01/03/24 06:35*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	01/02/24 12:37	01/03/24 06:35	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	01/02/24 12:37	01/03/24 06:35	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P4A0208	01/02/24 14:49	01/02/24 23:56	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P4A0208	01/02/24 14:49	01/02/24 23:56	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P4A0208	01/02/24 14:49	01/02/24 23:56	TPH 8015M	
Surrogate: 1-Chlorooctane	*86.3 %*		*70-130*		*P4A0208*	*01/02/24 14:49*	*01/02/24 23:56*	*TPH 8015M*	
Surrogate: o-Terphenyl	*98.6 %*		*70-130*		*P4A0208*	*01/02/24 14:49*	*01/02/24 23:56*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	01/02/24 14:49	01/02/24 23:56	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**13.8**	1.03	mg/kg dry	1	P4A0507	01/05/24 15:13	01/08/24 07:26	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

SWW-1 @ 10 In.

4A02009-11 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 07:00	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 07:00	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 07:00	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 07:00	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 07:00	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*112 %*		*80-120*		*P4A0207*	*01/02/24 12:37*	*01/03/24 07:00*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*94.0 %*		*80-120*		*P4A0207*	*01/02/24 12:37*	*01/03/24 07:00*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	01/02/24 12:37	01/03/24 07:00	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	01/02/24 12:37	01/03/24 07:00	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P4A0208	01/02/24 14:49	01/03/24 00:19	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P4A0208	01/02/24 14:49	01/03/24 00:19	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P4A0208	01/02/24 14:49	01/03/24 00:19	TPH 8015M	
Surrogate: 1-Chlorooctane	*86.7 %*		*70-130*		*P4A0208*	*01/02/24 14:49*	*01/03/24 00:19*	*TPH 8015M*	
Surrogate: o-Terphenyl	*97.0 %*		*70-130*		*P4A0208*	*01/02/24 14:49*	*01/03/24 00:19*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	01/02/24 14:49	01/03/24 00:19	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**23.6**	1.03	mg/kg dry	1	P4A0507	01/05/24 15:13	01/08/24 07:48	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

WW-3 @ 10 In.

4A02009-12 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 07:24	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 07:24	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 07:24	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 07:24	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 07:24	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*111 %*		*80-120*		*P4A0207*	*01/02/24 12:37*	*01/03/24 07:24*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*95.0 %*		*80-120*		*P4A0207*	*01/02/24 12:37*	*01/03/24 07:24*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	01/02/24 12:37	01/03/24 07:24	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	01/02/24 12:37	01/03/24 07:24	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P4A0208	01/02/24 14:49	01/03/24 00:43	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P4A0208	01/02/24 14:49	01/03/24 00:43	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P4A0208	01/02/24 14:49	01/03/24 00:43	TPH 8015M	
Surrogate: 1-Chlorooctane	*90.0 %*		*70-130*		*P4A0208*	*01/02/24 14:49*	*01/03/24 00:43*	*TPH 8015M*	
Surrogate: o-Terphenyl	*100 %*		*70-130*		*P4A0208*	*01/02/24 14:49*	*01/03/24 00:43*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	01/02/24 14:49	01/03/24 00:43	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**13.9**	1.03	mg/kg dry	1	P4A0507	01/05/24 15:13	01/08/24 08:52	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

NWW-2 @ 10 In.

4A02009-13 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 07:49	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 07:49	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 07:49	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 07:49	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 07:49	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*112 %*		*80-120*		*P4A0207*	*01/02/24 12:37*	*01/03/24 07:49*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*94.4 %*		*80-120*		*P4A0207*	*01/02/24 12:37*	*01/03/24 07:49*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	01/02/24 12:37	01/03/24 07:49	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	01/02/24 12:37	01/03/24 07:49	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P4A0208	01/02/24 14:49	01/03/24 01:06	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P4A0208	01/02/24 14:49	01/03/24 01:06	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P4A0208	01/02/24 14:49	01/03/24 01:06	TPH 8015M	
Surrogate: 1-Chlorooctane	*84.6 %*		*70-130*		*P4A0208*	*01/02/24 14:49*	*01/03/24 01:06*	*TPH 8015M*	
Surrogate: o-Terphenyl	*96.3 %*		*70-130*		*P4A0208*	*01/02/24 14:49*	*01/03/24 01:06*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	01/02/24 14:49	01/03/24 01:06	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**17.2**	1.03	mg/kg dry	1	P4A0507	01/05/24 15:13	01/08/24 09:56	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

SW-4 @ 1 Ft.

4A02009-14 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 08:13	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 08:13	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 08:13	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 08:13	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 08:13	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*111 %*		*80-120*		*P4A0207*	*01/02/24 12:37*	*01/03/24 08:13*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*95.0 %*		*80-120*		*P4A0207*	*01/02/24 12:37*	*01/03/24 08:13*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	01/02/24 12:37	01/03/24 08:13	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	01/02/24 12:37	01/03/24 08:13	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P4A0208	01/02/24 14:49	01/03/24 01:29	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P4A0208	01/02/24 14:49	01/03/24 01:29	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P4A0208	01/02/24 14:49	01/03/24 01:29	TPH 8015M	
Surrogate: 1-Chlorooctane	*85.9 %*		*70-130*		*P4A0208*	*01/02/24 14:49*	*01/03/24 01:29*	*TPH 8015M*	
Surrogate: o-Terphenyl	*96.9 %*		*70-130*		*P4A0208*	*01/02/24 14:49*	*01/03/24 01:29*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	01/02/24 14:49	01/03/24 01:29	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**12.1**	1.04	mg/kg dry	1	P4A0507	01/05/24 15:13	01/08/24 11:21	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

EW-10 @ 1 Ft.

4A02009-15 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 08:37	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 08:37	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 08:37	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 08:37	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 08:37	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*112 %*		*80-120*		*P4A0207*	*01/02/24 12:37*	*01/03/24 08:37*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*95.2 %*		*80-120*		*P4A0207*	*01/02/24 12:37*	*01/03/24 08:37*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	01/02/24 12:37	01/03/24 08:37	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	01/02/24 12:37	01/03/24 08:37	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P4A0208	01/02/24 14:49	01/03/24 01:52	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P4A0208	01/02/24 14:49	01/03/24 01:52	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P4A0208	01/02/24 14:49	01/03/24 01:52	TPH 8015M	
Surrogate: 1-Chlorooctane	*83.5 %*		*70-130*		*P4A0208*	*01/02/24 14:49*	*01/03/24 01:52*	*TPH 8015M*	
Surrogate: o-Terphenyl	*93.8 %*		*70-130*		*P4A0208*	*01/02/24 14:49*	*01/03/24 01:52*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	01/02/24 14:49	01/03/24 01:52	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**40.2**	1.05	mg/kg dry	1	P4A0507	01/05/24 15:13	01/08/24 11:42	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

SW-5 @ 1 Ft.

4A02009-16 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 09:02	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 09:02	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 09:02	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 09:02	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 09:02	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*112 %*		*80-120*		*P4A0207*	*01/02/24 12:37*	*01/03/24 09:02*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*95.1 %*		*80-120*		*P4A0207*	*01/02/24 12:37*	*01/03/24 09:02*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	01/02/24 12:37	01/03/24 09:02	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	01/02/24 12:37	01/03/24 09:02	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P4A0208	01/02/24 14:49	01/03/24 02:15	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P4A0208	01/02/24 14:49	01/03/24 02:15	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P4A0208	01/02/24 14:49	01/03/24 02:15	TPH 8015M	
Surrogate: 1-Chlorooctane	*85.5 %*		*70-130*		*P4A0208*	*01/02/24 14:49*	*01/03/24 02:15*	*TPH 8015M*	
Surrogate: o-Terphenyl	*97.6 %*		*70-130*		*P4A0208*	*01/02/24 14:49*	*01/03/24 02:15*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	01/02/24 14:49	01/03/24 02:15	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**22.3**	1.04	mg/kg dry	1	P4A0507	01/05/24 15:13	01/08/24 12:04	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

SEW-1 @ 1 Ft.

4A02009-17 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 09:26	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 09:26	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 09:26	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 09:26	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 09:26	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*112 %*		*80-120*		*P4A0207*	*01/02/24 12:37*	*01/03/24 09:26*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*94.6 %*		*80-120*		*P4A0207*	*01/02/24 12:37*	*01/03/24 09:26*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	01/02/24 12:37	01/03/24 09:26	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	01/02/24 12:37	01/03/24 09:26	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P4A0208	01/02/24 14:49	01/03/24 02:39	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P4A0208	01/02/24 14:49	01/03/24 02:39	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P4A0208	01/02/24 14:49	01/03/24 02:39	TPH 8015M	
Surrogate: 1-Chlorooctane	*82.1 %*		*70-130*		*P4A0208*	*01/02/24 14:49*	*01/03/24 02:39*	*TPH 8015M*	
Surrogate: o-Terphenyl	*91.7 %*		*70-130*		*P4A0208*	*01/02/24 14:49*	*01/03/24 02:39*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	01/02/24 14:49	01/03/24 02:39	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**17.9**	1.04	mg/kg dry	1	P4A0507	01/05/24 15:13	01/08/24 12:25	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

EW-11 @ 10 In.

4A02009-18 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 09:51	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 09:51	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 09:51	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 09:51	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P4A0207	01/02/24 12:37	01/03/24 09:51	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*94.5 %*		*80-120*		*P4A0207*	*01/02/24 12:37*	*01/03/24 09:51*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*112 %*		*80-120*		*P4A0207*	*01/02/24 12:37*	*01/03/24 09:51*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	01/02/24 12:37	01/03/24 09:51	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	01/02/24 12:37	01/03/24 09:51	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P4A0208	01/02/24 14:49	01/03/24 03:02	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P4A0208	01/02/24 14:49	01/03/24 03:02	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P4A0208	01/02/24 14:49	01/03/24 03:02	TPH 8015M	
Surrogate: 1-Chlorooctane	*90.1 %*		*70-130*		*P4A0208*	*01/02/24 14:49*	*01/03/24 03:02*	*TPH 8015M*	
Surrogate: o-Terphenyl	*103 %*		*70-130*		*P4A0208*	*01/02/24 14:49*	*01/03/24 03:02*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	01/02/24 14:49	01/03/24 03:02	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**20.6**	1.04	mg/kg dry	1	P4A0507	01/05/24 15:13	01/08/24 12:46	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

SW-6 @ 10 In.

4A02009-19 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P4A0313	01/03/24 14:11	01/03/24 23:36	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P4A0313	01/03/24 14:11	01/03/24 23:36	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P4A0313	01/03/24 14:11	01/03/24 23:36	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P4A0313	01/03/24 14:11	01/03/24 23:36	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P4A0313	01/03/24 14:11	01/03/24 23:36	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*109 %*		*80-120*		*P4A0313*	*01/03/24 14:11*	*01/03/24 23:36*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*94.8 %*		*80-120*		*P4A0313*	*01/03/24 14:11*	*01/03/24 23:36*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	01/03/24 14:11	01/03/24 23:36	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	01/03/24 14:11	01/03/24 23:36	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 06:07	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 06:07	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 06:07	TPH 8015M	
Surrogate: 1-Chlorooctane	*90.4 %*		*70-130*		*P4A0209*	*01/02/24 14:51*	*01/03/24 06:07*	*TPH 8015M*	
Surrogate: o-Terphenyl	*102 %*		*70-130*		*P4A0209*	*01/02/24 14:51*	*01/03/24 06:07*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	01/02/24 14:51	01/03/24 06:07	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**22.6**	1.04	mg/kg dry	1	P4A0507	01/05/24 15:13	01/08/24 13:08	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

EW-12 @ 10 In.

4A02009-20 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 00:00	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 00:00	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 00:00	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 00:00	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 00:00	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*94.4 %*		*80-120*		*P4A0313*	*01/03/24 14:11*	*01/04/24 00:00*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*109 %*		*80-120*		*P4A0313*	*01/03/24 14:11*	*01/04/24 00:00*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	01/03/24 14:11	01/04/24 00:00	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	01/03/24 14:11	01/04/24 00:00	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 06:30	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 06:30	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 06:30	TPH 8015M	
Surrogate: 1-Chlorooctane	*86.1 %*		*70-130*		*P4A0209*	*01/02/24 14:51*	*01/03/24 06:30*	*TPH 8015M*	
Surrogate: o-Terphenyl	*98.6 %*		*70-130*		*P4A0209*	*01/02/24 14:51*	*01/03/24 06:30*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	01/02/24 14:51	01/03/24 06:30	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**43.5**	1.04	mg/kg dry	1	P4A0507	01/05/24 15:13	01/08/24 13:29	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

SW-7 @ 10 In.

4A02009-21 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 00:24	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 00:24	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 00:24	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 00:24	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 00:24	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*94.9 %*		*80-120*		*P4A0313*	*01/03/24 14:11*	*01/04/24 00:24*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*109 %*		*80-120*		*P4A0313*	*01/03/24 14:11*	*01/04/24 00:24*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	01/03/24 14:11	01/04/24 00:24	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	01/03/24 14:11	01/04/24 00:24	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 06:53	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 06:53	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 06:53	TPH 8015M	
Surrogate: 1-Chlorooctane	*89.5 %*		*70-130*		*P4A0209*	*01/02/24 14:51*	*01/03/24 06:53*	*TPH 8015M*	
Surrogate: o-Terphenyl	*102 %*		*70-130*		*P4A0209*	*01/02/24 14:51*	*01/03/24 06:53*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	01/02/24 14:51	01/03/24 06:53	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**67.6**	1.06	mg/kg dry	1	P4A0507	01/05/24 15:13	01/08/24 13:50	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

EW-13 @ 10 In.

4A02009-22 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00109	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 00:49	EPA 8021B	
Toluene	ND	0.00109	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 00:49	EPA 8021B	
Ethylbenzene	ND	0.00109	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 00:49	EPA 8021B	
Xylene (p/m)	ND	0.00217	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 00:49	EPA 8021B	
Xylene (o)	ND	0.00109	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 00:49	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*110 %*		*80-120*		*P4A0313*	*01/03/24 14:11*	*01/04/24 00:49*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*95.1 %*		*80-120*		*P4A0313*	*01/03/24 14:11*	*01/04/24 00:49*	*EPA 8021B*	
Xylenes (total)	ND	0.00217	mg/kg dry	1	[CALC]	01/03/24 14:11	01/04/24 00:49	EPA 8021B	
Total BTEX	ND	0.00109	mg/kg dry	1	[CALC]	01/03/24 14:11	01/04/24 00:49	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.2	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 07:16	TPH 8015M	
>C12-C28	ND	27.2	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 07:16	TPH 8015M	
>C28-C35	ND	27.2	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 07:16	TPH 8015M	
Surrogate: 1-Chlorooctane	*85.2 %*		*70-130*		*P4A0209*	*01/02/24 14:51*	*01/03/24 07:16*	*TPH 8015M*	
Surrogate: o-Terphenyl	*96.8 %*		*70-130*		*P4A0209*	*01/02/24 14:51*	*01/03/24 07:16*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.2	mg/kg dry	1	[CALC]	01/02/24 14:51	01/03/24 07:16	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**222**	1.09	mg/kg dry	1	P4A0806	01/08/24 14:21	01/08/24 17:03	EPA 300.0	
% Moisture	**8.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

SEW-2 @ 10 In.

4A02009-23 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00110	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 01:13	EPA 8021B	
Toluene	ND	0.00110	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 01:13	EPA 8021B	
Ethylbenzene	ND	0.00110	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 01:13	EPA 8021B	
Xylene (p/m)	ND	0.00220	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 01:13	EPA 8021B	
Xylene (o)	ND	0.00110	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 01:13	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*111 %*		*80-120*		*P4A0313*	*01/03/24 14:11*	*01/04/24 01:13*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*95.0 %*		*80-120*		*P4A0313*	*01/03/24 14:11*	*01/04/24 01:13*	*EPA 8021B*	
Xylenes (total)	ND	0.00220	mg/kg dry	1	[CALC]	01/03/24 14:11	01/04/24 01:13	EPA 8021B	
Total BTEX	ND	0.00110	mg/kg dry	1	[CALC]	01/03/24 14:11	01/04/24 01:13	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.5	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 07:39	TPH 8015M	
>C12-C28	ND	27.5	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 07:39	TPH 8015M	
>C28-C35	ND	27.5	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 07:39	TPH 8015M	
Surrogate: 1-Chlorooctane	*89.2 %*		*70-130*		*P4A0209*	*01/02/24 14:51*	*01/03/24 07:39*	*TPH 8015M*	
Surrogate: o-Terphenyl	*102 %*		*70-130*		*P4A0209*	*01/02/24 14:51*	*01/03/24 07:39*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.5	mg/kg dry	1	[CALC]	01/02/24 14:51	01/03/24 07:39	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**211**	1.10	mg/kg dry	1	P4A0806	01/08/24 14:21	01/08/24 18:07	EPA 300.0	
% Moisture	**9.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

SW-11 @ 1.5 Ft.

4A02009-24 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 01:38	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 01:38	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 01:38	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 01:38	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 01:38	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*109 %*		*80-120*		*P4A0313*	*01/03/24 14:11*	*01/04/24 01:38*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*94.5 %*		*80-120*		*P4A0313*	*01/03/24 14:11*	*01/04/24 01:38*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	01/03/24 14:11	01/04/24 01:38	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	01/03/24 14:11	01/04/24 01:38	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 08:02	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 08:02	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 08:02	TPH 8015M	
Surrogate: 1-Chlorooctane	*88.2 %*		*70-130*		*P4A0209*	*01/02/24 14:51*	*01/03/24 08:02*	*TPH 8015M*	
Surrogate: o-Terphenyl	*100 %*		*70-130*		*P4A0209*	*01/02/24 14:51*	*01/03/24 08:02*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	01/02/24 14:51	01/03/24 08:02	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**21.4**	1.03	mg/kg dry	1	P4A0806	01/08/24 14:21	01/08/24 18:28	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

SW-12 @ 1.5 Ft.

4A02009-25 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 02:03	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 02:03	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 02:03	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 02:03	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 02:03	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*109 %*		*80-120*		*P4A0313*	*01/03/24 14:11*	*01/04/24 02:03*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*93.9 %*		*80-120*		*P4A0313*	*01/03/24 14:11*	*01/04/24 02:03*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	01/03/24 14:11	01/04/24 02:03	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	01/03/24 14:11	01/04/24 02:03	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 08:26	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 08:26	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 08:26	TPH 8015M	
Surrogate: 1-Chlorooctane	*86.9 %*		*70-130*		*P4A0209*	*01/02/24 14:51*	*01/03/24 08:26*	*TPH 8015M*	
Surrogate: o-Terphenyl	*98.7 %*		*70-130*		*P4A0209*	*01/02/24 14:51*	*01/03/24 08:26*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	01/02/24 14:51	01/03/24 08:26	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**137**	1.03	mg/kg dry	1	P4A0806	01/08/24 14:21	01/08/24 18:50	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

WW-12 @ 1.5 Ft.

4A02009-26 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 02:27	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 02:27	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 02:27	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 02:27	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 02:27	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*110 %*		*80-120*		*P4A0313*	*01/03/24 14:11*	*01/04/24 02:27*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*93.9 %*		*80-120*		*P4A0313*	*01/03/24 14:11*	*01/04/24 02:27*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	01/03/24 14:11	01/04/24 02:27	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	01/03/24 14:11	01/04/24 02:27	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 08:49	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 08:49	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 08:49	TPH 8015M	
Surrogate: 1-Chlorooctane	*88.1 %*		*70-130*		*P4A0209*	*01/02/24 14:51*	*01/03/24 08:49*	*TPH 8015M*	
Surrogate: o-Terphenyl	*100 %*		*70-130*		*P4A0209*	*01/02/24 14:51*	*01/03/24 08:49*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	01/02/24 14:51	01/03/24 08:49	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**62.3**	1.03	mg/kg dry	1	P4A0806	01/08/24 14:21	01/08/24 19:11	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

NW-8 @ 1.5 Ft.

4A02009-27 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 02:51	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 02:51	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 02:51	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 02:51	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 02:51	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*94.7 %*		*80-120*		*P4A0313*	*01/03/24 14:11*	*01/04/24 02:51*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*110 %*		*80-120*		*P4A0313*	*01/03/24 14:11*	*01/04/24 02:51*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	01/03/24 14:11	01/04/24 02:51	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	01/03/24 14:11	01/04/24 02:51	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 09:12	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 09:12	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 09:12	TPH 8015M	
Surrogate: 1-Chlorooctane	*89.9 %*		*70-130*		*P4A0209*	*01/02/24 14:51*	*01/03/24 09:12*	*TPH 8015M*	
Surrogate: o-Terphenyl	*103 %*		*70-130*		*P4A0209*	*01/02/24 14:51*	*01/03/24 09:12*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	01/02/24 14:51	01/03/24 09:12	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**25.1**	1.03	mg/kg dry	1	P4A0806	01/08/24 14:21	01/08/24 19:32	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

EW-17 @ 1.5 Ft.

4A02009-28 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 03:16	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 03:16	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 03:16	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 03:16	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P4A0313	01/03/24 14:11	01/04/24 03:16	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*111 %*		*80-120*		*P4A0313*	*01/03/24 14:11*	*01/04/24 03:16*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*95.1 %*		*80-120*		*P4A0313*	*01/03/24 14:11*	*01/04/24 03:16*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	01/03/24 14:11	01/04/24 03:16	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	01/03/24 14:11	01/04/24 03:16	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 09:35	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 09:35	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 09:35	TPH 8015M	
Surrogate: 1-Chlorooctane	*85.3 %*		*70-130*		*P4A0209*	*01/02/24 14:51*	*01/03/24 09:35*	*TPH 8015M*	
Surrogate: o-Terphenyl	*96.1 %*		*70-130*		*P4A0209*	*01/02/24 14:51*	*01/03/24 09:35*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	01/02/24 14:51	01/03/24 09:35	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**30.4**	1.04	mg/kg dry	1	P4A0806	01/08/24 14:21	01/08/24 19:54	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

WW-13 @ 1.5 Ft.

4A02009-29 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 06:32	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 06:32	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 06:32	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 06:32	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 06:32	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*110 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 06:32*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*93.7 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 06:32*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 06:32	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 06:32	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 10:46	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 10:46	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 10:46	TPH 8015M	
Surrogate: 1-Chlorooctane	*83.8 %*		*70-130*		*P4A0209*	*01/02/24 14:51*	*01/03/24 10:46*	*TPH 8015M*	
Surrogate: o-Terphenyl	*96.1 %*		*70-130*		*P4A0209*	*01/02/24 14:51*	*01/03/24 10:46*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	01/02/24 14:51	01/03/24 10:46	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**95.6**	1.03	mg/kg dry	1	P4A0806	01/08/24 14:21	01/08/24 20:15	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

NW-9 @ 1.5 Ft.

4A02009-30 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 06:57	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 06:57	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 06:57	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 06:57	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 06:57	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*94.3 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 06:57*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*110 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 06:57*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 06:57	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 06:57	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 11:09	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 11:09	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 11:09	TPH 8015M	
Surrogate: 1-Chlorooctane	*79.9 %*		*70-130*		*P4A0209*	*01/02/24 14:51*	*01/03/24 11:09*	*TPH 8015M*	
Surrogate: o-Terphenyl	*91.0 %*		*70-130*		*P4A0209*	*01/02/24 14:51*	*01/03/24 11:09*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	01/02/24 14:51	01/03/24 11:09	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**18.7**	1.03	mg/kg dry	1	P4A0806	01/08/24 14:21	01/08/24 20:37	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

EW-18 @ 1.5 Ft.

4A02009-31 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 07:21	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 07:21	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 07:21	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 07:21	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 07:21	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*94.6 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 07:21*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*110 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 07:21*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 07:21	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 07:21	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 11:32	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 11:32	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 11:32	TPH 8015M	
Surrogate: 1-Chlorooctane	*83.6 %*		*70-130*		*P4A0209*	*01/02/24 14:51*	*01/03/24 11:32*	*TPH 8015M*	
Surrogate: o-Terphenyl	*95.9 %*		*70-130*		*P4A0209*	*01/02/24 14:51*	*01/03/24 11:32*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	01/02/24 14:51	01/03/24 11:32	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**23.5**	1.03	mg/kg dry	1	P4A0806	01/08/24 14:21	01/08/24 20:58	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

WW-6 @ 1 Ft.

4A02009-32 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 07:46	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 07:46	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 07:46	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 07:46	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 07:46	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*95.1 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 07:46*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*110 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 07:46*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 07:46	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 07:46	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 11:56	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 11:56	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 11:56	TPH 8015M	
Surrogate: 1-Chlorooctane	*85.9 %*		*70-130*		*P4A0209*	*01/02/24 14:51*	*01/03/24 11:56*	*TPH 8015M*	
Surrogate: o-Terphenyl	*98.0 %*		*70-130*		*P4A0209*	*01/02/24 14:51*	*01/03/24 11:56*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	01/02/24 14:51	01/03/24 11:56	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**22.3**	1.04	mg/kg dry	1	P4A0806	01/08/24 14:21	01/08/24 22:02	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

WW-4 @ 10 In.

4A02009-33 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 08:10	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 08:10	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 08:10	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 08:10	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 08:10	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*110 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 08:10*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*94.2 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 08:10*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 08:10	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 08:10	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 12:20	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 12:20	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 12:20	TPH 8015M	
Surrogate: 1-Chlorooctane	*83.9 %*		*70-130*		*P4A0209*	*01/02/24 14:51*	*01/03/24 12:20*	*TPH 8015M*	
Surrogate: o-Terphenyl	*96.3 %*		*70-130*		*P4A0209*	*01/02/24 14:51*	*01/03/24 12:20*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	01/02/24 14:51	01/03/24 12:20	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**19.6**	1.04	mg/kg dry	1	P4A0806	01/08/24 14:21	01/08/24 23:06	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

NW-7 @ 10 In.

4A02009-34 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00111	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 08:35	EPA 8021B	
Toluene	ND	0.00111	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 08:35	EPA 8021B	
Ethylbenzene	ND	0.00111	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 08:35	EPA 8021B	
Xylene (p/m)	ND	0.00222	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 08:35	EPA 8021B	
Xylene (o)	ND	0.00111	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 08:35	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*94.5 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 08:35*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*110 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 08:35*	*EPA 8021B*	
Xylenes (total)	ND	0.00222	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 08:35	EPA 8021B	
Total BTEX	ND	0.00111	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 08:35	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.8	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 12:44	TPH 8015M	
>C12-C28	ND	27.8	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 12:44	TPH 8015M	
>C28-C35	ND	27.8	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 12:44	TPH 8015M	
Surrogate: 1-Chlorooctane	*82.5 %*		*70-130*		*P4A0209*	*01/02/24 14:51*	*01/03/24 12:44*	*TPH 8015M*	
Surrogate: o-Terphenyl	*95.1 %*		*70-130*		*P4A0209*	*01/02/24 14:51*	*01/03/24 12:44*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.8	mg/kg dry	1	[CALC]	01/02/24 14:51	01/03/24 12:44	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**153**	1.11	mg/kg dry	1	P4A0806	01/08/24 14:21	01/08/24 23:27	EPA 300.0	
% Moisture	**10.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

WW-9 @ 10 In.

4A02009-35 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 08:59	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 08:59	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 08:59	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 08:59	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 08:59	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*111 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 08:59*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*95.2 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 08:59*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 08:59	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 08:59	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 13:08	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 13:08	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 13:08	TPH 8015M	
Surrogate: 1-Chlorooctane	*78.3 %*		*70-130*		*P4A0209*	*01/02/24 14:51*	*01/03/24 13:08*	*TPH 8015M*	
Surrogate: o-Terphenyl	*90.7 %*		*70-130*		*P4A0209*	*01/02/24 14:51*	*01/03/24 13:08*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	01/02/24 14:51	01/03/24 13:08	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**17.8**	1.04	mg/kg dry	1	P4A0806	01/08/24 14:21	01/08/24 23:48	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

SWW-2 @ 10 In.

4A02009-36 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 09:24	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 09:24	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 09:24	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 09:24	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 09:24	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*109 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 09:24*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*94.3 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 09:24*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 09:24	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 09:24	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P4A0211	01/02/24 14:54	01/04/24 20:36	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P4A0211	01/02/24 14:54	01/04/24 20:36	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P4A0211	01/02/24 14:54	01/04/24 20:36	TPH 8015M	
Surrogate: 1-Chlorooctane	*89.3 %*		*70-130*		*P4A0211*	*01/02/24 14:54*	*01/04/24 20:36*	*TPH 8015M*	
Surrogate: o-Terphenyl	*103 %*		*70-130*		*P4A0211*	*01/02/24 14:54*	*01/04/24 20:36*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	01/02/24 14:54	01/04/24 20:36	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**24.2**	1.04	mg/kg dry	1	P4A0806	01/08/24 14:21	01/09/24 00:10	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

SW-10 @ 10 In.

4A02009-37 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 09:48	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 09:48	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 09:48	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 09:48	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 09:48	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*110 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 09:48*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*93.7 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 09:48*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 09:48	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 09:48	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P4A0211	01/02/24 14:54	01/04/24 20:12	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P4A0211	01/02/24 14:54	01/04/24 20:12	TPH 8015M	
>C28-C35	**34.4**	26.0	mg/kg dry	1	P4A0211	01/02/24 14:54	01/04/24 20:12	TPH 8015M	
Surrogate: 1-Chlorooctane	*85.6 %*		*70-130*		*P4A0211*	*01/02/24 14:54*	*01/04/24 20:12*	*TPH 8015M*	
Surrogate: o-Terphenyl	*97.4 %*		*70-130*		*P4A0211*	*01/02/24 14:54*	*01/04/24 20:12*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	**34.4**	26.0	mg/kg dry	1	[CALC]	01/02/24 14:54	01/04/24 20:12	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**36.6**	1.04	mg/kg dry	1	P4A0806	01/08/24 14:21	01/09/24 00:31	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

WW-10 @ 10 In.

4A02009-38 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 10:13	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 10:13	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 10:13	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 10:13	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 10:13	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*94.5 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 10:13*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*110 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 10:13*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 10:13	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 10:13	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 14:19	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 14:19	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P4A0209	01/02/24 14:51	01/03/24 14:19	TPH 8015M	
Surrogate: 1-Chlorooctane	*86.2 %*		*70-130*		*P4A0209*	*01/02/24 14:51*	*01/03/24 14:19*	*TPH 8015M*	
Surrogate: o-Terphenyl	*97.5 %*		*70-130*		*P4A0209*	*01/02/24 14:51*	*01/03/24 14:19*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	01/02/24 14:51	01/03/24 14:19	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**48.2**	1.05	mg/kg dry	1	P4A0806	01/08/24 14:21	01/09/24 00:52	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

NW-4 @ 10 In.

4A02009-39 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00109	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 11:27	EPA 8021B	
Toluene	ND	0.00109	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 11:27	EPA 8021B	
Ethylbenzene	ND	0.00109	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 11:27	EPA 8021B	
Xylene (p/m)	ND	0.00217	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 11:27	EPA 8021B	
Xylene (o)	ND	0.00109	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 11:27	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*94.2 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 11:27*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*111 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 11:27*	*EPA 8021B*	
Xylenes (total)	ND	0.00217	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 11:27	EPA 8021B	
Total BTEX	ND	0.00109	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 11:27	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.2	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C12-C28	ND	27.2	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C28-C35	ND	27.2	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*75.6 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*85.2 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.2	mg/kg dry	1	[CALC]	01/02/24 14:52	01/04/24 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**85.4**	1.09	mg/kg dry	1	P4A0806	01/08/24 14:21	01/09/24 01:14	EPA 300.0	
% Moisture	**8.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

WW-11 @ 10 In.

4A02009-40 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 11:52	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 11:52	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 11:52	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 11:52	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 11:52	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*94.1 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 11:52*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*110 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 11:52*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 11:52	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 11:52	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*85.6 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*94.3 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	01/02/24 14:52	01/04/24 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**23.5**	1.04	mg/kg dry	1	P4A0808	01/08/24 07:00	01/09/24 04:04	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

NWW-2 @ 1 Ft.

4A02009-41 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 12:16	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 12:16	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 12:16	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 12:16	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 12:16	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*110 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 12:16*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*93.7 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 12:16*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 12:16	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 12:16	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*76.0 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*83.7 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	01/02/24 14:52	01/04/24 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**20.0**	1.04	mg/kg dry	1	P4A0808	01/08/24 07:00	01/09/24 05:08	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

NW-5 @ 1 Ft.

4A02009-42 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 12:41	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 12:41	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 12:41	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 12:41	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 12:41	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*94.0 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 12:41*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*109 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 12:41*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 12:41	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 12:41	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*74.4 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*83.3 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	01/02/24 14:52	01/04/24 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**17.4**	1.04	mg/kg dry	1	P4A1010	01/10/24 10:00	01/11/24 02:41	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

NW-6 @ 1 Ft.

4A02009-43 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 13:06	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 13:06	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 13:06	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 13:06	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 13:06	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*109 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 13:06*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*93.1 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 13:06*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 13:06	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 13:06	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*77.5 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*83.2 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	01/02/24 14:52	01/04/24 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**26.1**	1.04	mg/kg dry	1	P4A1010	01/10/24 10:00	01/11/24 03:36	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

NEW-1 @ 8 In.

4A02009-44 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 13:30	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 13:30	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 13:30	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 13:30	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 13:30	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*92.2 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 13:30*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*107 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 13:30*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 13:30	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 13:30	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*80.7 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*88.6 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	01/02/24 14:52	01/04/24 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**24.4**	1.04	mg/kg dry	1	P4A1010	01/10/24 10:00	01/11/24 03:54	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

EW-14 @ 8 In.

4A02009-45 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 13:55	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 13:55	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 13:55	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 13:55	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 13:55	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*108 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 13:55*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*92.0 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 13:55*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 13:55	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 13:55	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*78.1 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*85.0 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	01/02/24 14:52	01/04/24 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**30.5**	1.04	mg/kg dry	1	P4A1010	01/10/24 10:00	01/11/24 04:12	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

SW-7 @ 8 In.

4A02009-46 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 14:20	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 14:20	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 14:20	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 14:20	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 14:20	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*93.7 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 14:20*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*111 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 14:20*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 14:20	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 14:20	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*68.4 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	*S-GC*
Surrogate: o-Terphenyl	*75.3 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	01/02/24 14:52	01/04/24 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**61.7**	1.04	mg/kg dry	1	P4A1010	01/10/24 10:00	01/11/24 04:31	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

EW-15 @ 8 In.

4A02009-47 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 14:45	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 14:45	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 14:45	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 14:45	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 14:45	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*109 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 14:45*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*93.1 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 14:45*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 14:45	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 14:45	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*73.9 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*83.1 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	01/02/24 14:52	01/04/24 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**20.0**	1.04	mg/kg dry	1	P4A1010	01/10/24 10:00	01/11/24 04:49	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

NW-3 @ 8 In.

4A02009-48 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00109	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 15:09	EPA 8021B	
Toluene	ND	0.00109	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 15:09	EPA 8021B	
Ethylbenzene	ND	0.00109	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 15:09	EPA 8021B	
Xylene (p/m)	ND	0.00217	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 15:09	EPA 8021B	
Xylene (o)	ND	0.00109	mg/kg dry	1	P4A0314	01/03/24 14:24	01/04/24 15:09	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*94.0 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 15:09*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*110 %*		*80-120*		*P4A0314*	*01/03/24 14:24*	*01/04/24 15:09*	*EPA 8021B*	
Xylenes (total)	ND	0.00217	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 15:09	EPA 8021B	
Total BTEX	ND	0.00109	mg/kg dry	1	[CALC]	01/03/24 14:24	01/04/24 15:09	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.2	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C12-C28	ND	27.2	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C28-C35	ND	27.2	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*74.9 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*82.6 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.2	mg/kg dry	1	[CALC]	01/02/24 14:52	01/04/24 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**123**	1.09	mg/kg dry	1	P4A1010	01/10/24 10:00	01/11/24 05:07	EPA 300.0	
% Moisture	**8.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

EW-16 @ 8 In.

4A02009-49 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00109	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 12:44	EPA 8021B	
Toluene	ND	0.00109	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 12:44	EPA 8021B	
Ethylbenzene	ND	0.00109	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 12:44	EPA 8021B	
Xylene (p/m)	ND	0.00217	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 12:44	EPA 8021B	
Xylene (o)	ND	0.00109	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 12:44	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*89.1 %*		*80-120*		*P4A0404*	*01/04/24 13:21*	*01/05/24 12:44*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*100 %*		*80-120*		*P4A0404*	*01/04/24 13:21*	*01/05/24 12:44*	*EPA 8021B*	
Xylenes (total)	ND	0.00217	mg/kg dry	1	[CALC]	01/04/24 13:21	01/05/24 12:44	EPA 8021B	
Total BTEX	ND	0.00109	mg/kg dry	1	[CALC]	01/04/24 13:21	01/05/24 12:44	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.2	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C12-C28	ND	27.2	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C28-C35	ND	27.2	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*72.9 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*78.0 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.2	mg/kg dry	1	[CALC]	01/02/24 14:52	01/04/24 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**133**	1.09	mg/kg dry	1	P4A1010	01/10/24 10:00	01/11/24 05:26	EPA 300.0	
% Moisture	**8.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

SW-8 @ 8 In.

4A02009-50 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 13:09	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 13:09	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 13:09	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 13:09	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 13:09	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*91.0 %*		*80-120*		*P4A0404*	*01/04/24 13:21*	*01/05/24 13:09*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*105 %*		*80-120*		*P4A0404*	*01/04/24 13:21*	*01/05/24 13:09*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	01/04/24 13:21	01/05/24 13:09	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	01/04/24 13:21	01/05/24 13:09	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*79.2 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*86.5 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	01/02/24 14:52	01/04/24 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**25.6**	1.04	mg/kg dry	1	P4A1010	01/10/24 10:00	01/11/24 07:38	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

WW-7 @ 8 In.

4A02009-51 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 13:34	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 13:34	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 13:34	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 13:34	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 13:34	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*92.6 %*		*80-120*		*P4A0404*	*01/04/24 13:21*	*01/05/24 13:34*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*106 %*		*80-120*		*P4A0404*	*01/04/24 13:21*	*01/05/24 13:34*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	01/04/24 13:21	01/05/24 13:34	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	01/04/24 13:21	01/05/24 13:34	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*75.4 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*83.8 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	01/02/24 14:52	01/04/24 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**30.2**	1.03	mg/kg dry	1	P4A1010	01/10/24 10:00	01/11/24 07:57	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

SW-9 @ 10 In.

4A02009-52 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 13:58	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 13:58	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 13:58	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 13:58	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 13:58	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*92.6 %*		*80-120*		*P4A0404*	*01/04/24 13:21*	*01/05/24 13:58*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*107 %*		*80-120*		*P4A0404*	*01/04/24 13:21*	*01/05/24 13:58*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	01/04/24 13:21	01/05/24 13:58	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	01/04/24 13:21	01/05/24 13:58	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*77.8 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*86.8 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	01/02/24 14:52	01/04/24 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**49.9**	1.04	mg/kg dry	1	P4A1010	01/10/24 10:00	01/11/24 09:10	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

WW-8 @ 10 In.

4A02009-53 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00109	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 14:23	EPA 8021B	
Toluene	ND	0.00109	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 14:23	EPA 8021B	
Ethylbenzene	ND	0.00109	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 14:23	EPA 8021B	
Xylene (p/m)	ND	0.00217	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 14:23	EPA 8021B	
Xylene (o)	ND	0.00109	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 14:23	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*105 %*		*80-120*		*P4A0404*	*01/04/24 13:21*	*01/05/24 14:23*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*90.4 %*		*80-120*		*P4A0404*	*01/04/24 13:21*	*01/05/24 14:23*	*EPA 8021B*	
Xylenes (total)	ND	0.00217	mg/kg dry	1	[CALC]	01/04/24 13:21	01/05/24 14:23	EPA 8021B	
Total BTEX	ND	0.00109	mg/kg dry	1	[CALC]	01/04/24 13:21	01/05/24 14:23	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.2	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C12-C28	ND	27.2	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C28-C35	ND	27.2	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*73.7 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*83.6 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.2	mg/kg dry	1	[CALC]	01/02/24 14:52	01/04/24 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**71.9**	1.09	mg/kg dry	1	P4A1010	01/10/24 10:00	01/11/24 10:05	EPA 300.0	
% Moisture	**8.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

SW-2 @ 1.5 Ft.

4A02009-54 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 14:48	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 14:48	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 14:48	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 14:48	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 14:48	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*108 %*		*80-120*		*P4A0404*	*01/04/24 13:21*	*01/05/24 14:48*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*90.1 %*		*80-120*		*P4A0404*	*01/04/24 13:21*	*01/05/24 14:48*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	01/04/24 13:21	01/05/24 14:48	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	01/04/24 13:21	01/05/24 14:48	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*78.8 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*87.9 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	01/02/24 14:52	01/04/24 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**17.5**	1.04	mg/kg dry	1	P4A1010	01/10/24 10:00	01/11/24 10:25	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

EW-17 @ 1.5 Ft.

4A02009-55 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 15:13	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 15:13	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 15:13	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 15:13	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 15:13	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*97.9 %*		*80-120*		*P4A0404*	*01/04/24 13:21*	*01/05/24 15:13*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*112 %*		*80-120*		*P4A0404*	*01/04/24 13:21*	*01/05/24 15:13*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	01/04/24 13:21	01/05/24 15:13	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	01/04/24 13:21	01/05/24 15:13	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*79.6 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*87.8 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	01/02/24 14:52	01/04/24 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**24.1**	1.04	mg/kg dry	1	P4A1010	01/10/24 10:00	01/11/24 10:43	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

NEW-1 @ 1.5 Ft.

4A02009-56 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 15:38	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 15:38	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 15:38	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 15:38	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 15:38	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*91.9 %*		*80-120*		*P4A0404*	*01/04/24 13:21*	*01/05/24 15:38*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*105 %*		*80-120*		*P4A0404*	*01/04/24 13:21*	*01/05/24 15:38*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	01/04/24 13:21	01/05/24 15:38	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	01/04/24 13:21	01/05/24 15:38	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*67.3 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	*S-GC*
Surrogate: o-Terphenyl	*77.5 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	01/02/24 14:52	01/04/24 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**26.1**	1.03	mg/kg dry	1	P4A1010	01/10/24 10:00	01/11/24 11:02	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

EW-5 @ 10 In.

4A02009-57 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 16:03	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 16:03	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 16:03	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 16:03	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P4A0404	01/04/24 13:21	01/05/24 16:03	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*98.7 %*		*80-120*		*P4A0404*	*01/04/24 13:21*	*01/05/24 16:03*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*114 %*		*80-120*		*P4A0404*	*01/04/24 13:21*	*01/05/24 16:03*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	01/04/24 13:21	01/05/24 16:03	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	01/04/24 13:21	01/05/24 16:03	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*73.0 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*82.4 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	01/02/24 14:52	01/04/24 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**18.2**	1.04	mg/kg dry	1	P4A1010	01/10/24 10:00	01/11/24 11:20	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

EW-6 @ 10 In.

4A02009-58 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00108	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 19:23	EPA 8021B	
Toluene	ND	0.00108	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 19:23	EPA 8021B	
Ethylbenzene	ND	0.00108	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 19:23	EPA 8021B	
Xylene (p/m)	ND	0.00215	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 19:23	EPA 8021B	
Xylene (o)	ND	0.00108	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 19:23	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*100 %*		*80-120*		*P4A0405*	*01/04/24 13:31*	*01/05/24 19:23*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*115 %*		*80-120*		*P4A0405*	*01/04/24 13:31*	*01/05/24 19:23*	*EPA 8021B*	
Xylenes (total)	ND	0.00215	mg/kg dry	1	[CALC]	01/04/24 13:31	01/05/24 19:23	EPA 8021B	
Total BTEX	ND	0.00108	mg/kg dry	1	[CALC]	01/04/24 13:31	01/05/24 19:23	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.9	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C12-C28	ND	26.9	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
>C28-C35	ND	26.9	mg/kg dry	1	P4A0210	01/02/24 14:52	01/04/24 17:00	TPH 8015M	
Surrogate: 1-Chlorooctane	*78.1 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	
Surrogate: o-Terphenyl	*90.5 %*		*70-130*		*P4A0210*	*01/02/24 14:52*	*01/04/24 17:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.9	mg/kg dry	1	[CALC]	01/02/24 14:52	01/04/24 17:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**65.4**	1.08	mg/kg dry	1	P4A1010	01/10/24 10:00	01/11/24 11:38	EPA 300.0	
% Moisture	**7.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

EW-7 @ 10 In.

4A02009-59 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 19:48	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 19:48	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 19:48	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 19:48	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 19:48	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*100 %*		*80-120*		*P4A0405*	*01/04/24 13:31*	*01/05/24 19:48*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*116 %*		*80-120*		*P4A0405*	*01/04/24 13:31*	*01/05/24 19:48*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	01/04/24 13:31	01/05/24 19:48	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	01/04/24 13:31	01/05/24 19:48	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P4A0211	01/02/24 14:54	01/04/24 12:47	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P4A0211	01/02/24 14:54	01/04/24 12:47	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P4A0211	01/02/24 14:54	01/04/24 12:47	TPH 8015M	
Surrogate: 1-Chlorooctane	*85.0 %*		*70-130*		*P4A0211*	*01/02/24 14:54*	*01/04/24 12:47*	*TPH 8015M*	
Surrogate: o-Terphenyl	*95.3 %*		*70-130*		*P4A0211*	*01/02/24 14:54*	*01/04/24 12:47*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	01/02/24 14:54	01/04/24 12:47	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**62.0**	1.06	mg/kg dry	1	P4A1010	01/10/24 10:00	01/11/24 11:57	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

NW-2 @ 1 Ft.

4A02009-60 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 20:13	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 20:13	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 20:13	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 20:13	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 20:13	EPA 8021B	
Surrogate: 1,4-Difluorobenzene	*98.7 %*		*80-120*		*P4A0405*	*01/04/24 13:31*	*01/05/24 20:13*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene	*115 %*		*80-120*		*P4A0405*	*01/04/24 13:31*	*01/05/24 20:13*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	01/04/24 13:31	01/05/24 20:13	EPA 8021B	
Total BTEX	ND	0.00105	mg/kg dry	1	[CALC]	01/04/24 13:31	01/05/24 20:13	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P4A0211	01/02/24 14:54	01/04/24 13:11	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P4A0211	01/02/24 14:54	01/04/24 13:11	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P4A0211	01/02/24 14:54	01/04/24 13:11	TPH 8015M	
Surrogate: 1-Chlorooctane	*68.8 %*		*70-130*		*P4A0211*	*01/02/24 14:54*	*01/04/24 13:11*	*TPH 8015M*	*S-GC*
Surrogate: o-Terphenyl	*78.4 %*		*70-130*		*P4A0211*	*01/02/24 14:54*	*01/04/24 13:11*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	01/02/24 14:54	01/04/24 13:11	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**25.6**	1.05	mg/kg dry	1	P4A1010	01/10/24 10:00	01/11/24 12:15	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

EW-8 @ 1 Ft.

4A02009-61 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 20:38	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 20:38	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 20:38	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 20:38	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 20:38	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*116 %*		*80-120*		*P4A0405*	*01/04/24 13:31*	*01/05/24 20:38*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*99.0 %*		*80-120*		*P4A0405*	*01/04/24 13:31*	*01/05/24 20:38*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	01/04/24 13:31	01/05/24 20:38	EPA 8021B	
Total BTEX	ND	0.00104	mg/kg dry	1	[CALC]	01/04/24 13:31	01/05/24 20:38	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P4A0211	01/02/24 14:54	01/04/24 13:35	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P4A0211	01/02/24 14:54	01/04/24 13:35	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P4A0211	01/02/24 14:54	01/04/24 13:35	TPH 8015M	
Surrogate: 1-Chlorooctane	*85.7 %*		*70-130*		*P4A0211*	*01/02/24 14:54*	*01/04/24 13:35*	*TPH 8015M*	
Surrogate: o-Terphenyl	*96.4 %*		*70-130*		*P4A0211*	*01/02/24 14:54*	*01/04/24 13:35*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	01/02/24 14:54	01/04/24 13:35	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**23.0**	1.04	mg/kg dry	1	P4A1010	01/10/24 10:00	01/11/24 12:34	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

SW-3 @ 1 Ft.

4A02009-62 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 21:02	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 21:02	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 21:02	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 21:02	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 21:02	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*115 %*		*80-120*		*P4A0405*	*01/04/24 13:31*	*01/05/24 21:02*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*97.7 %*		*80-120*		*P4A0405*	*01/04/24 13:31*	*01/05/24 21:02*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	01/04/24 13:31	01/05/24 21:02	EPA 8021B	
Total BTEX	ND	0.00103	mg/kg dry	1	[CALC]	01/04/24 13:31	01/05/24 21:02	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P4A0211	01/02/24 14:54	01/04/24 13:59	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P4A0211	01/02/24 14:54	01/04/24 13:59	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P4A0211	01/02/24 14:54	01/04/24 13:59	TPH 8015M	
Surrogate: 1-Chlorooctane	*80.8 %*		*70-130*		*P4A0211*	*01/02/24 14:54*	*01/04/24 13:59*	*TPH 8015M*	
Surrogate: o-Terphenyl	*90.9 %*		*70-130*		*P4A0211*	*01/02/24 14:54*	*01/04/24 13:59*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	01/02/24 14:54	01/04/24 13:59	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**12.6**	1.03	mg/kg dry	1	P4A0909	01/09/24 13:32	01/09/24 15:59	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

EW-9 @ 8 In.

4A02009-63 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Limit	Reporting Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00106	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 21:28	EPA 8021B	
Toluene	ND	0.00106	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 21:28	EPA 8021B	
Ethylbenzene	ND	0.00106	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 21:28	EPA 8021B	
Xylene (p/m)	ND	0.00213	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 21:28	EPA 8021B	
Xylene (o)	ND	0.00106	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 21:28	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*116 %*		*80-120*		*P4A0405*	*01/04/24 13:31*	*01/05/24 21:28*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*98.5 %*		*80-120*		*P4A0405*	*01/04/24 13:31*	*01/05/24 21:28*	*EPA 8021B*	
Xylenes (total)	ND	0.00213	mg/kg dry	1	[CALC]	01/04/24 13:31	01/05/24 21:28	EPA 8021B	
Total BTEX	ND	0.00106	mg/kg dry	1	[CALC]	01/04/24 13:31	01/05/24 21:28	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.6	mg/kg dry	1	P4A0211	01/02/24 14:54	01/04/24 14:22	TPH 8015M	
>C12-C28	ND	26.6	mg/kg dry	1	P4A0211	01/02/24 14:54	01/04/24 14:22	TPH 8015M	
>C28-C35	ND	26.6	mg/kg dry	1	P4A0211	01/02/24 14:54	01/04/24 14:22	TPH 8015M	
Surrogate: 1-Chlorooctane	*75.9 %*		*70-130*		*P4A0211*	*01/02/24 14:54*	*01/04/24 14:22*	*TPH 8015M*	
Surrogate: o-Terphenyl	*85.0 %*		*70-130*		*P4A0211*	*01/02/24 14:54*	*01/04/24 14:22*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.6	mg/kg dry	1	[CALC]	01/02/24 14:54	01/04/24 14:22	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**21.8**	1.06	mg/kg dry	1	P4A0909	01/09/24 13:32	01/09/24 16:20	EPA 300.0	
% Moisture	**6.0**	0.1	%	1	P4A0308	01/03/24 10:21	01/03/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4A0207 - * DEFAULT PREP *** **										
Blank (P4A0207-BLK1)				Prepared: 01/02/24 Analyzed: 01/03/24						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 4-Bromofluorobenzene	*0.133*		"	*0.120*		*111*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.112*		"	*0.120*		*93.1*	*80-120*			
LCS (P4A0207-BS1)				Prepared: 01/02/24 Analyzed: 01/03/24						
Benzene	0.106	0.00100	mg/kg	0.100		106	80-120			
Toluene	0.0902	0.00100	"	0.100		90.2	80-120			
Ethylbenzene	0.0961	0.00100	"	0.100		96.1	80-120			
Xylene (p/m)	0.189	0.00200	"	0.200		94.5	80-120			
Xylene (o)	0.0838	0.00100	"	0.100		83.8	80-120			
Surrogate: 4-Bromofluorobenzene	*0.124*		"	*0.120*		*104*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.115*		"	*0.120*		*95.8*	*80-120*			
LCS Dup (P4A0207-BSD1)				Prepared: 01/02/24 Analyzed: 01/03/24						
Benzene	0.116	0.00100	mg/kg	0.100		116	80-120	8.73	20	
Toluene	0.100	0.00100	"	0.100		100	80-120	10.7	20	
Ethylbenzene	0.107	0.00100	"	0.100		107	80-120	10.7	20	
Xylene (p/m)	0.209	0.00200	"	0.200		105	80-120	10.3	20	
Xylene (o)	0.0945	0.00100	"	0.100		94.5	80-120	12.0	20	
Surrogate: 4-Bromofluorobenzene	*0.125*		"	*0.120*		*104*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.115*		"	*0.120*		*95.5*	*80-120*			
Calibration Blank (P4A0207-CCB1)				Prepared & Analyzed: 01/02/24						
Benzene	0.180		ug/kg							
Toluene	0.180		"							
Ethylbenzene	0.100		"							
Xylene (p/m)	0.200		"							
Xylene (o)	0.120		"							
Surrogate: 4-Bromofluorobenzene	*0.130*		"	*0.120*		*108*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.111*		"	*0.120*		*92.7*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4A0207 - * DEFAULT PREP *** **										
Calibration Blank (P4A0207-CCB2)				Prepared: 01/02/24 Analyzed: 01/03/24						
Benzene	0.100		ug/kg							
Toluene	0.0900		"							
Ethylbenzene	0.110		"							
Xylene (p/m)	0.150		"							
Xylene (o)	0.130		"							
Surrogate: 4-Bromofluorobenzene	*0.133*		*"*	*0.120*		*111*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.114*		*"*	*0.120*		*94.8*	*80-120*			
Calibration Check (P4A0207-CCV1)				Prepared & Analyzed: 01/02/24						
Benzene	0.118	0.00100	mg/kg	0.100		118	80-120			
Toluene	0.109	0.00100	"	0.100		109	80-120			
Ethylbenzene	0.111	0.00100	"	0.100		111	80-120			
Xylene (p/m)	0.223	0.00200	"	0.200		112	80-120			
Xylene (o)	0.103	0.00100	"	0.100		103	80-120			
Surrogate: 4-Bromofluorobenzene	*0.120*		*"*	*0.120*		*100*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.112*		*"*	*0.120*		*93.3*	*75-125*			
Calibration Check (P4A0207-CCV2)				Prepared: 01/02/24 Analyzed: 01/03/24						
Benzene	0.118	0.00100	mg/kg	0.100		118	80-120			
Toluene	0.109	0.00100	"	0.100		109	80-120			
Ethylbenzene	0.109	0.00100	"	0.100		109	80-120			
Xylene (p/m)	0.221	0.00200	"	0.200		111	80-120			
Xylene (o)	0.103	0.00100	"	0.100		103	80-120			
Surrogate: 4-Bromofluorobenzene	*0.124*		*"*	*0.120*		*103*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.114*		*"*	*0.120*		*95.2*	*75-125*			
Calibration Check (P4A0207-CCV3)				Prepared: 01/02/24 Analyzed: 01/03/24						
Benzene	0.119	0.00100	mg/kg	0.100		119	80-120			
Toluene	0.109	0.00100	"	0.100		109	80-120			
Ethylbenzene	0.109	0.00100	"	0.100		109	80-120			
Xylene (p/m)	0.221	0.00200	"	0.200		111	80-120			
Xylene (o)	0.104	0.00100	"	0.100		104	80-120			
Surrogate: 4-Bromofluorobenzene	*0.129*		*"*	*0.120*		*107*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.113*		*"*	*0.120*		*94.5*	*75-125*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4A0207 - * DEFAULT PREP *** **										
Matrix Spike (P4A0207-MS1)	**Source: 4A02009-01**			Prepared: 01/02/24 Analyzed: 01/03/24						
Benzene	0.103	0.00103	mg/kg dry	0.103	ND	99.5	80-120			
Toluene	0.0800	0.00103	"	0.103	ND	77.6	80-120			QM-05
Ethylbenzene	0.0757	0.00103	"	0.103	ND	73.4	80-120			QM-05
Xylene (p/m)	0.145	0.00206	"	0.206	ND	70.4	80-120			QM-05
Xylene (o)	0.0630	0.00103	"	0.103	ND	61.1	80-120			QM-05
Surrogate: 1,4-Difluorobenzene	*0.120*		"	*0.124*		*96.6*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.133*		"	*0.124*		*107*	*80-120*			
Matrix Spike Dup (P4A0207-MSD1)	**Source: 4A02009-01**			Prepared: 01/02/24 Analyzed: 01/03/24						
Benzene	0.0998	0.00103	mg/kg dry	0.103	ND	96.8	80-120	2.71	20	
Toluene	0.0779	0.00103	"	0.103	ND	75.6	80-120	2.56	20	QM-05
Ethylbenzene	0.0734	0.00103	"	0.103	ND	71.2	80-120	3.07	20	QM-05
Xylene (p/m)	0.140	0.00206	"	0.206	ND	68.0	80-120	3.40	20	QM-05
Xylene (o)	0.0603	0.00103	"	0.103	ND	58.5	80-120	4.46	20	QM-05
Surrogate: 1,4-Difluorobenzene	*0.119*		"	*0.124*		*96.3*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.131*		"	*0.124*		*106*	*80-120*			
Batch P4A0313 - * DEFAULT PREP *** **										
Blank (P4A0313-BLK1)				Prepared & Analyzed: 01/03/24						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 4-Bromofluorobenzene	*0.126*		"	*0.120*		*105*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.112*		"	*0.120*		*93.5*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4A0313 - * DEFAULT PREP *** **										
LCS (P4A0313-BS1)				Prepared & Analyzed: 01/03/24						
Benzene	0.112	0.00100	mg/kg	0.100		112	80-120			
Toluene	0.107	0.00100	"	0.100		107	80-120			
Ethylbenzene	0.109	0.00100	"	0.100		109	80-120			
Xylene (p/m)	0.212	0.00200	"	0.200		106	80-120			
Xylene (o)	0.0987	0.00100	"	0.100		98.7	80-120			
Surrogate: 1,4-Difluorobenzene	*0.115*		*"*	*0.120*		*95.4*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.121*		*"*	*0.120*		*101*	*80-120*			
LCS Dup (P4A0313-BSD1)				Prepared & Analyzed: 01/03/24						
Benzene	0.111	0.00100	mg/kg	0.100		111	80-120	0.663	20	
Toluene	0.105	0.00100	"	0.100		105	80-120	2.06	20	
Ethylbenzene	0.108	0.00100	"	0.100		108	80-120	1.35	20	
Xylene (p/m)	0.209	0.00200	"	0.200		104	80-120	1.86	20	
Xylene (o)	0.0971	0.00100	"	0.100		97.1	80-120	1.56	20	
Surrogate: 1,4-Difluorobenzene	*0.114*		*"*	*0.120*		*95.1*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.121*		*"*	*0.120*		*101*	*80-120*			
Calibration Blank (P4A0313-CCB1)				Prepared & Analyzed: 01/03/24						
Benzene	0.110		ug/kg							
Toluene	0.210		"							
Ethylbenzene	0.180		"							
Xylene (p/m)	0.300		"							
Xylene (o)	0.130		"							
Surrogate: 4-Bromofluorobenzene	*0.125*		*"*	*0.120*		*104*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.112*		*"*	*0.120*		*93.2*	*80-120*			
Calibration Blank (P4A0313-CCB2)				Prepared & Analyzed: 01/03/24						
Benzene	0.100		ug/kg							
Toluene	0.220		"							
Ethylbenzene	0.100		"							
Xylene (p/m)	0.220		"							
Xylene (o)	0.110		"							
Surrogate: 4-Bromofluorobenzene	*0.131*		*"*	*0.120*		*109*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.113*		*"*	*0.120*		*94.3*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4A0313 - * DEFAULT PREP *** **										
Calibration Blank (P4A0313-CCB3)				Prepared: 01/03/24 Analyzed: 01/04/24						
Benzene	0.130		ug/kg							
Toluene	0.240		"							
Ethylbenzene	0.140		"							
Xylene (p/m)	0.190		"							
Xylene (o)	0.130		"							
Surrogate: 1,4-Difluorobenzene	*0.112*		*"*	*0.120*		*93.7*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.131*		*"*	*0.120*		*109*	*80-120*			
Calibration Check (P4A0313-CCV1)				Prepared & Analyzed: 01/03/24						
Benzene	0.105	0.00100	mg/kg	0.100		105	80-120			
Toluene	0.101	0.00100	"	0.100		101	80-120			
Ethylbenzene	0.0962	0.00100	"	0.100		96.2	80-120			
Xylene (p/m)	0.197	0.00200	"	0.200		98.7	80-120			
Xylene (o)	0.0912	0.00100	"	0.100		91.2	80-120			
Surrogate: 4-Bromofluorobenzene	*0.121*		*"*	*0.120*		*101*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.114*		*"*	*0.120*		*95.0*	*75-125*			
Calibration Check (P4A0313-CCV2)				Prepared & Analyzed: 01/03/24						
Benzene	0.117	0.00100	mg/kg	0.100		117	80-120			
Toluene	0.108	0.00100	"	0.100		108	80-120			
Ethylbenzene	0.106	0.00100	"	0.100		106	80-120			
Xylene (p/m)	0.213	0.00200	"	0.200		107	80-120			
Xylene (o)	0.101	0.00100	"	0.100		101	80-120			
Surrogate: 4-Bromofluorobenzene	*0.129*		*"*	*0.120*		*107*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.116*		*"*	*0.120*		*96.8*	*75-125*			
Calibration Check (P4A0313-CCV3)				Prepared: 01/03/24 Analyzed: 01/04/24						
Benzene	0.120	0.00100	mg/kg	0.100		120	80-120			
Toluene	0.117	0.00100	"	0.100		117	80-120			
Ethylbenzene	0.113	0.00100	"	0.100		113	80-120			
Xylene (p/m)	0.228	0.00200	"	0.200		114	80-120			
Xylene (o)	0.110	0.00100	"	0.100		110	80-120			
Surrogate: 4-Bromofluorobenzene	*0.135*		*"*	*0.120*		*112*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.117*		*"*	*0.120*		*97.2*	*75-125*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4A0313 - * DEFAULT PREP *** **										
Matrix Spike (P4A0313-MS1)	**Source: 4A02017-01**			Prepared: 01/03/24 Analyzed: 01/04/24						
Benzene	0.0618	0.00106	mg/kg dry	0.106	ND	58.0	80-120			QM-05
Toluene	0.0302	0.00106	"	0.106	0.000734	27.7	80-120			QM-05
Ethylbenzene	0.0210	0.00106	"	0.106	0.00655	13.6	80-120			QM-05
Xylene (p/m)	0.0301	0.00213	"	0.213	0.00154	13.4	80-120			QM-05
Xylene (o)	0.0137	0.00106	"	0.106	0.00174	11.2	80-120			QM-05
Surrogate: 1,4-Difluorobenzene	*0.129*		*"*	*0.128*		*101*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.128*		*"*	*0.128*		*100*	*80-120*			
Matrix Spike Dup (P4A0313-MSD1)	**Source: 4A02017-01**			Prepared: 01/03/24 Analyzed: 01/04/24						
Benzene	0.0640	0.00106	mg/kg dry	0.106	ND	60.2	80-120	3.59	20	QM-05
Toluene	0.0311	0.00106	"	0.106	0.000734	28.6	80-120	3.27	20	QM-05
Ethylbenzene	0.0211	0.00106	"	0.106	0.00655	13.6	80-120	0.220	20	QM-05
Xylene (p/m)	0.0294	0.00213	"	0.213	0.00154	13.1	80-120	2.45	20	QM-05
Xylene (o)	0.0144	0.00106	"	0.106	0.00174	11.9	80-120	6.14	20	QM-05
Surrogate: 4-Bromofluorobenzene	*0.129*		*"*	*0.128*		*101*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.128*		*"*	*0.128*		*101*	*80-120*			
Batch P4A0314 - * DEFAULT PREP *** **										
Blank (P4A0314-BLK1)				Prepared: 01/03/24 Analyzed: 01/04/24						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 4-Bromofluorobenzene	*0.132*		*"*	*0.120*		*110*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.112*		*"*	*0.120*		*93.4*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4A0314 - * DEFAULT PREP *** **										
LCS (P4A0314-BS1)				Prepared: 01/03/24 Analyzed: 01/04/24						
Benzene	0.113	0.00100	mg/kg	0.100		113	80-120			
Toluene	0.102	0.00100	"	0.100		102	80-120			
Ethylbenzene	0.104	0.00100	"	0.100		104	80-120			
Xylene (p/m)	0.202	0.00200	"	0.200		101	80-120			
Xylene (o)	0.0926	0.00100	"	0.100		92.6	80-120			
Surrogate: 1,4-Difluorobenzene	*0.116*		*"*	*0.120*		*96.5*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.124*		*"*	*0.120*		*104*	*80-120*			
LCS Dup (P4A0314-BSD1)				Prepared: 01/03/24 Analyzed: 01/04/24						
Benzene	0.104	0.00100	mg/kg	0.100		104	80-120	7.95	20	
Toluene	0.0934	0.00100	"	0.100		93.4	80-120	8.48	20	
Ethylbenzene	0.0944	0.00100	"	0.100		94.4	80-120	10.0	20	
Xylene (p/m)	0.185	0.00200	"	0.200		92.7	80-120	8.39	20	
Xylene (o)	0.0846	0.00100	"	0.100		84.6	80-120	9.09	20	
Surrogate: 1,4-Difluorobenzene	*0.116*		*"*	*0.120*		*96.7*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.127*		*"*	*0.120*		*106*	*80-120*			
Calibration Blank (P4A0314-CCB1)				Prepared: 01/03/24 Analyzed: 01/04/24						
Benzene	0.130		ug/kg							
Toluene	0.240		"							
Ethylbenzene	0.140		"							
Xylene (p/m)	0.190		"							
Xylene (o)	0.130		"							
Surrogate: 4-Bromofluorobenzene	*0.131*		*"*	*0.120*		*109*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.112*		*"*	*0.120*		*93.7*	*80-120*			
Calibration Blank (P4A0314-CCB2)				Prepared: 01/03/24 Analyzed: 01/04/24						
Benzene	0.160		ug/kg							
Toluene	0.230		"							
Ethylbenzene	0.180		"							
Xylene (p/m)	0.190		"							
Xylene (o)	0.100		"							
Surrogate: 1,4-Difluorobenzene	*0.113*		*"*	*0.120*		*94.0*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.134*		*"*	*0.120*		*112*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4A0314 - * DEFAULT PREP *** **										
Calibration Check (P4A0314-CCV1)				Prepared: 01/03/24 Analyzed: 01/04/24						
Benzene	0.120	0.00100	mg/kg	0.100		120	80-120			
Toluene	0.117	0.00100	"	0.100		117	80-120			
Ethylbenzene	0.113	0.00100	"	0.100		113	80-120			
Xylene (p/m)	0.228	0.00200	"	0.200		114	80-120			
Xylene (o)	0.110	0.00100	"	0.100		110	80-120			
Surrogate: 1,4-Difluorobenzene	*0.117*		"	*0.120*		*97.2*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.135*		"	*0.120*		*112*	*75-125*			
Calibration Check (P4A0314-CCV2)				Prepared: 01/03/24 Analyzed: 01/04/24						
Benzene	0.118	0.00100	mg/kg	0.100		118	80-120			
Toluene	0.111	0.00100	"	0.100		111	80-120			
Ethylbenzene	0.107	0.00100	"	0.100		107	80-120			
Xylene (p/m)	0.217	0.00200	"	0.200		109	80-120			
Xylene (o)	0.102	0.00100	"	0.100		102	80-120			
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*94.9*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.126*		"	*0.120*		*105*	*75-125*			
Calibration Check (P4A0314-CCV3)				Prepared: 01/03/24 Analyzed: 01/04/24						
Benzene	0.119	0.00100	mg/kg	0.100		119	80-120			
Toluene	0.109	0.00100	"	0.100		109	80-120			
Ethylbenzene	0.105	0.00100	"	0.100		105	80-120			
Xylene (p/m)	0.210	0.00200	"	0.200		105	80-120			
Xylene (o)	0.0988	0.00100	"	0.100		98.8	80-120			
Surrogate: 1,4-Difluorobenzene	*0.115*		"	*0.120*		*95.8*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.126*		"	*0.120*		*105*	*75-125*			
Matrix Spike (P4A0314-MS1)		**Source: 4A02009-29**		Prepared: 01/03/24 Analyzed: 01/04/24						
Benzene	0.0905	0.00103	mg/kg dry	0.103	ND	87.8	80-120			
Toluene	0.0722	0.00103	"	0.103	ND	70.0	80-120			QM-05
Ethylbenzene	0.0749	0.00103	"	0.103	ND	72.7	80-120			QM-05
Xylene (p/m)	0.145	0.00206	"	0.206	ND	70.2	80-120			QM-05
Xylene (o)	0.0666	0.00103	"	0.103	ND	64.6	80-120			QM-05
Surrogate: 1,4-Difluorobenzene	*0.118*		"	*0.124*		*95.5*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.129*		"	*0.124*		*105*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4A0314 - * DEFAULT PREP *** **										
Matrix Spike Dup (P4A0314-MSD1)	**Source: 4A02009-29**			Prepared: 01/03/24 Analyzed: 01/04/24						
Benzene	0.0912	0.00103	mg/kg dry	0.103	ND	88.4	80-120	0.760	20	
Toluene	0.0710	0.00103	"	0.103	ND	68.8	80-120	1.73	20	QM-05
Ethylbenzene	0.0753	0.00103	"	0.103	ND	73.1	80-120	0.535	20	QM-05
Xylene (p/m)	0.143	0.00206	"	0.206	ND	69.2	80-120	1.40	20	QM-05
Xylene (o)	0.0648	0.00103	"	0.103	ND	62.8	80-120	2.75	20	QM-05
Surrogate: 4-Bromofluorobenzene	*0.128*		*"*	*0.124*		*103*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.116*		*"*	*0.124*		*94.2*	*80-120*			
Batch P4A0404 - * DEFAULT PREP *** **										
Blank (P4A0404-BLK1)				Prepared & Analyzed: 01/04/24						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 1,4-Difluorobenzene	*0.113*		*"*	*0.120*		*93.8*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.134*		*"*	*0.120*		*112*	*80-120*			
LCS (P4A0404-BS1)				Prepared & Analyzed: 01/04/24						
Benzene	0.118	0.00100	mg/kg	0.100		118	80-120			
Toluene	0.112	0.00100	"	0.100		112	80-120			
Ethylbenzene	0.113	0.00100	"	0.100		113	80-120			
Xylene (p/m)	0.221	0.00200	"	0.200		110	80-120			
Xylene (o)	0.101	0.00100	"	0.100		101	80-120			
Surrogate: 4-Bromofluorobenzene	*0.125*		*"*	*0.120*		*104*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.114*		*"*	*0.120*		*94.9*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4A0404 - * DEFAULT PREP *** **										
LCS Dup (P4A0404-BSD1)				Prepared & Analyzed: 01/04/24						
Benzene	0.118	0.00100	mg/kg	0.100		118	80-120	0.203	20	
Toluene	0.111	0.00100	"	0.100		111	80-120	0.771	20	
Ethylbenzene	0.112	0.00100	"	0.100		112	80-120	0.827	20	
Xylene (p/m)	0.219	0.00200	"	0.200		109	80-120	0.916	20	
Xylene (o)	0.0998	0.00100	"	0.100		99.8	80-120	1.26	20	
Surrogate: 4-Bromofluorobenzene	*0.128*		*"*	*0.120*		*106*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.114*		*"*	*0.120*		*95.3*	*80-120*			
Calibration Blank (P4A0404-CCB1)				Prepared & Analyzed: 01/04/24						
Benzene	0.160		ug/kg							
Toluene	0.310		"							
Ethylbenzene	0.110		"							
Xylene (p/m)	0.190		"							
Xylene (o)	0.110		"							
Surrogate: 1,4-Difluorobenzene	*0.111*		*"*	*0.120*		*92.5*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.133*		*"*	*0.120*		*111*	*80-120*			
Calibration Blank (P4A0404-CCB2)				Prepared: 01/04/24 Analyzed: 01/05/24						
Benzene	0.150		ug/kg							
Toluene	0.310		"							
Ethylbenzene	0.200		"							
Xylene (p/m)	0.220		"							
Xylene (o)	0.100		"							
Surrogate: 1,4-Difluorobenzene	*0.109*		*"*	*0.120*		*91.0*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.124*		*"*	*0.120*		*104*	*80-120*			
Calibration Blank (P4A0404-CCB3)				Prepared: 01/04/24 Analyzed: 01/05/24						
Benzene	0.130		ug/kg							
Toluene	0.210		"							
Ethylbenzene	0.140		"							
Xylene (p/m)	0.230		"							
Xylene (o)	0.110		"							
Surrogate: 1,4-Difluorobenzene	*0.113*		*"*	*0.120*		*94.2*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.132*		*"*	*0.120*		*110*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4A0404 - * DEFAULT PREP *** **										
Calibration Check (P4A0404-CCV1)				Prepared & Analyzed: 01/04/24						
Benzene	0.119	0.00100	mg/kg	0.100		119	80-120			
Toluene	0.119	0.00100	"	0.100		119	80-120			
Ethylbenzene	0.117	0.00100	"	0.100		117	80-120			
Xylene (p/m)	0.237	0.00200	"	0.200		119	80-120			
Xylene (o)	0.110	0.00100	"	0.100		110	80-120			
Surrogate: 1,4-Difluorobenzene	*0.116*		"	*0.120*		*96.8*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.128*		"	*0.120*		*107*	*75-125*			
Calibration Check (P4A0404-CCV2)				Prepared: 01/04/24 Analyzed: 01/05/24						
Benzene	0.116	0.00100	mg/kg	0.100		116	80-120			
Toluene	0.107	0.00100	"	0.100		107	80-120			
Ethylbenzene	0.101	0.00100	"	0.100		101	80-120			
Xylene (p/m)	0.199	0.00200	"	0.200		99.5	80-120			
Xylene (o)	0.0963	0.00100	"	0.100		96.3	80-120			
Surrogate: 4-Bromofluorobenzene	*0.120*		"	*0.120*		*99.9*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*94.6*	*75-125*			
Calibration Check (P4A0404-CCV3)				Prepared: 01/04/24 Analyzed: 01/05/24						
Benzene	0.107	0.00100	mg/kg	0.100		107	80-120			
Toluene	0.101	0.00100	"	0.100		101	80-120			
Ethylbenzene	0.0950	0.00100	"	0.100		95.0	80-120			
Xylene (p/m)	0.188	0.00200	"	0.200		93.8	80-120			
Xylene (o)	0.0926	0.00100	"	0.100		92.6	80-120			
Surrogate: 4-Bromofluorobenzene	*0.130*		"	*0.120*		*108*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*95.3*	*75-125*			
Matrix Spike (P4A0404-MS1)	**Source: 4A04001-01**			Prepared: 01/04/24 Analyzed: 01/05/24						
Benzene	0.0661	0.00106	mg/kg dry	0.106	ND	62.1	80-120			QM-05
Toluene	0.0492	0.00106	"	0.106	0.0116	35.3	80-120			QM-05
Ethylbenzene	0.0384	0.00106	"	0.106	0.0259	11.8	80-120			QM-05
Xylene (p/m)	0.0667	0.00213	"	0.213	0.103	NR	80-120			QM-05
Xylene (o)	0.0402	0.00106	"	0.106	0.0291	10.4	80-120			QM-05
Surrogate: 1,4-Difluorobenzene	*0.118*		"	*0.128*		*92.5*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.139*		"	*0.128*		*109*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4A0404 - * DEFAULT PREP *** **										
Matrix Spike Dup (P4A0404-MSD1)	**Source: 4A04001-01**			Prepared: 01/04/24 Analyzed: 01/05/24						
Benzene	0.0630	0.00106	mg/kg dry	0.106	ND	59.2	80-120	4.83	20	QM-05
Toluene	0.0430	0.00106	"	0.106	0.0116	29.5	80-120	17.9	20	QM-05
Ethylbenzene	0.0265	0.00106	"	0.106	0.0259	0.570	80-120	181	20	QM-05
Xylene (p/m)	0.0614	0.00213	"	0.213	0.103	NR	80-120	NR	20	QM-05
Xylene (o)	0.0378	0.00106	"	0.106	0.0291	8.17	80-120	24.5	20	QM-05
Surrogate: 1,4-Difluorobenzene	*0.119*		*"*	*0.128*		*92.8*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.140*		*"*	*0.128*		*110*	*80-120*			
Batch P4A0405 - * DEFAULT PREP *** **										
Blank (P4A0405-BLK1)				Prepared: 01/04/24 Analyzed: 01/05/24						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 1,4-Difluorobenzene	*0.112*		*"*	*0.120*		*93.4*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.132*		*"*	*0.120*		*110*	*80-120*			
LCS (P4A0405-BS1)				Prepared: 01/04/24 Analyzed: 01/05/24						
Benzene	0.109	0.00100	mg/kg	0.100		109	80-120			
Toluene	0.102	0.00100	"	0.100		102	80-120			
Ethylbenzene	0.0983	0.00100	"	0.100		98.3	80-120			
Xylene (p/m)	0.190	0.00200	"	0.200		95.0	80-120			
Xylene (o)	0.0903	0.00100	"	0.100		90.3	80-120			
Surrogate: 1,4-Difluorobenzene	*0.125*		*"*	*0.120*		*104*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.137*		*"*	*0.120*		*114*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4A0405 - * DEFAULT PREP *** **										
LCS Dup (P4A0405-BSD1)				Prepared: 01/04/24 Analyzed: 01/05/24						
Benzene	0.102	0.00100	mg/kg	0.100		102	80-120	6.34	20	
Toluene	0.0918	0.00100	"	0.100		91.8	80-120	10.4	20	
Ethylbenzene	0.0899	0.00100	"	0.100		89.9	80-120	8.95	20	
Xylene (p/m)	0.175	0.00200	"	0.200		87.6	80-120	8.19	20	
Xylene (o)	0.0810	0.00100	"	0.100		81.0	80-120	10.8	20	
Surrogate: 1,4-Difluorobenzene	*0.128*		"	*0.120*		*106*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.135*		"	*0.120*		*112*	*80-120*			
Calibration Blank (P4A0405-CCB1)				Prepared: 01/04/24 Analyzed: 01/05/24						
Benzene	0.130		ug/kg							
Toluene	0.210		"							
Ethylbenzene	0.140		"							
Xylene (p/m)	0.230		"							
Xylene (o)	0.110		"							
Surrogate: 1,4-Difluorobenzene	*0.113*		"	*0.120*		*94.2*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.132*		"	*0.120*		*110*	*80-120*			
Calibration Blank (P4A0405-CCB2)				Prepared: 01/04/24 Analyzed: 01/05/24						
Benzene	0.120		ug/kg							
Toluene	0.180		"							
Ethylbenzene	0.100		"							
Xylene (p/m)	0.160		"							
Xylene (o)	0.0700		"							
Surrogate: 1,4-Difluorobenzene	*0.113*		"	*0.120*		*94.3*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.136*		"	*0.120*		*113*	*80-120*			
Calibration Check (P4A0405-CCV1)				Prepared: 01/04/24 Analyzed: 01/05/24						
Benzene	0.107	0.00100	mg/kg	0.100		107	80-120			
Toluene	0.101	0.00100	"	0.100		101	80-120			
Ethylbenzene	0.0950	0.00100	"	0.100		95.0	80-120			
Xylene (p/m)	0.188	0.00200	"	0.200		93.8	80-120			
Xylene (o)	0.0926	0.00100	"	0.100		92.6	80-120			
Surrogate: 4-Bromofluorobenzene	*0.130*		"	*0.120*		*108*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.114*		"	*0.120*		*95.3*	*75-125*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4A0405 - * DEFAULT PREP *** **										
Calibration Check (P4A0405-CCV2)				Prepared: 01/04/24 Analyzed: 01/05/24						
Benzene	0.101	0.00100	mg/kg	0.100		101	80-120			
Toluene	0.0915	0.00100	"	0.100		91.5	80-120			
Ethylbenzene	0.0867	0.00100	"	0.100		86.7	80-120			
Xylene (p/m)	0.173	0.00200	"	0.200		86.4	80-120			
Xylene (o)	0.0816	0.00100	"	0.100		81.6	80-120			
Surrogate: 4-Bromofluorobenzene	*0.136*		"	*0.120*		*113*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.123*		"	*0.120*		*102*	*75-125*			
Calibration Check (P4A0405-CCV3)				Prepared: 01/04/24 Analyzed: 01/06/24						
Benzene	0.0918	0.00100	mg/kg	0.100		91.8	80-120			
Toluene	0.0813	0.00100	"	0.100		81.3	80-120			
Ethylbenzene	0.0801	0.00100	"	0.100		80.1	80-120			
Xylene (p/m)	0.161	0.00200	"	0.200		80.4	80-120			
Xylene (o)	0.0807	0.00100	"	0.100		80.7	80-120			
Surrogate: 1,4-Difluorobenzene	*0.124*		"	*0.120*		*103*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.137*		"	*0.120*		*114*	*75-125*			
Matrix Spike (P4A0405-MS1)		**Source: 4A02009-58**		Prepared: 01/04/24 Analyzed: 01/06/24						
Benzene	0.0752	0.00108	mg/kg dry	0.108	ND	69.9	80-120			QM-05
Toluene	0.0537	0.00108	"	0.108	ND	50.0	80-120			QM-05
Ethylbenzene	0.0399	0.00108	"	0.108	ND	37.2	80-120			QM-05
Xylene (p/m)	0.0813	0.00215	"	0.215	ND	37.8	80-120			QM-05
Xylene (o)	0.0550	0.00108	"	0.108	ND	51.1	80-120			QM-05
Surrogate: 4-Bromofluorobenzene	*0.138*		"	*0.129*		*107*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.124*		"	*0.129*		*96.1*	*80-120*			
Matrix Spike Dup (P4A0405-MSD1)		**Source: 4A02009-58**		Prepared: 01/04/24 Analyzed: 01/06/24						
Benzene	0.0744	0.00108	mg/kg dry	0.108	ND	69.2	80-120	0.949	20	QM-05
Toluene	0.0506	0.00108	"	0.108	ND	47.0	80-120	6.02	20	QM-05
Ethylbenzene	0.0108	0.00108	"	0.108	ND	10.0	80-120	115	20	QM-05
Xylene (p/m)	0.0947	0.00215	"	0.215	ND	44.0	80-120	15.2	20	QM-05
Xylene (o)	0.0516	0.00108	"	0.108	ND	48.0	80-120	6.33	20	QM-05
Surrogate: 4-Bromofluorobenzene	*0.138*		"	*0.129*		*107*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.125*		"	*0.129*		*96.5*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4A0208 - TX 1005										
Blank (P4A0208-BLK1)				Prepared & Analyzed: 01/02/24						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*84.3*		*"*	*100*		*84.3*	*70-130*			
Surrogate: o-Terphenyl	*48.2*		*"*	*50.0*		*96.3*	*70-130*			
LCS (P4A0208-BS1)				Prepared & Analyzed: 01/02/24						
C6-C12	846	25.0	mg/kg	1000		84.6	75-125			
>C12-C28	803	25.0	"	1000		80.3	75-125			
Surrogate: 1-Chlorooctane	*101*		*"*	*100*		*101*	*70-130*			
Surrogate: o-Terphenyl	*45.3*		*"*	*50.0*		*90.5*	*70-130*			
LCS Dup (P4A0208-BSD1)				Prepared & Analyzed: 01/02/24						
C6-C12	885	25.0	mg/kg	1000		88.5	75-125	4.53	20	
>C12-C28	829	25.0	"	1000		82.9	75-125	3.16	20	
Surrogate: 1-Chlorooctane	*105*		*"*	*100*		*105*	*70-130*			
Surrogate: o-Terphenyl	*48.2*		*"*	*50.0*		*96.4*	*70-130*			
Calibration Check (P4A0208-CCV1)				Prepared & Analyzed: 01/02/24						
C6-C12	432	25.0	mg/kg	500		86.5	85-115			
>C12-C28	430	25.0	"	500		86.0	85-115			
Surrogate: 1-Chlorooctane	*92.1*		*"*	*100*		*92.1*	*70-130*			
Surrogate: o-Terphenyl	*47.9*		*"*	*50.0*		*95.8*	*70-130*			
Calibration Check (P4A0208-CCV2)				Prepared & Analyzed: 01/02/24						
C6-C12	464	25.0	mg/kg	500		92.8	85-115			
>C12-C28	480	25.0	"	500		96.1	85-115			
Surrogate: 1-Chlorooctane	*99.5*		*"*	*100*		*99.5*	*70-130*			
Surrogate: o-Terphenyl	*51.2*		*"*	*50.0*		*102*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4A0209 - TX 1005										
Blank (P4A0209-BLK1)				Prepared: 01/02/24 Analyzed: 01/03/24						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*92.2*		*"*	*100*		*92.2*	*70-130*			
Surrogate: o-Terphenyl	*52.7*		*"*	*50.0*		*105*	*70-130*			
LCS (P4A0209-BS1)				Prepared: 01/02/24 Analyzed: 01/03/24						
C6-C12	953	25.0	mg/kg	1000		95.3	75-125			
>C12-C28	908	25.0	"	1000		90.8	75-125			
Surrogate: 1-Chlorooctane	*110*		*"*	*100*		*110*	*70-130*			
Surrogate: o-Terphenyl	*49.9*		*"*	*50.0*		*99.8*	*70-130*			
LCS Dup (P4A0209-BSD1)				Prepared: 01/02/24 Analyzed: 01/03/24						
C6-C12	932	25.0	mg/kg	1000		93.2	75-125	2.30	20	
>C12-C28	886	25.0	"	1000		88.6	75-125	2.55	20	
Surrogate: 1-Chlorooctane	*110*		*"*	*100*		*110*	*70-130*			
Surrogate: o-Terphenyl	*56.7*		*"*	*50.0*		*113*	*70-130*			
Calibration Check (P4A0209-CCV1)				Prepared: 01/02/24 Analyzed: 01/03/24						
C6-C12	478	25.0	mg/kg	500		95.6	85-115			
>C12-C28	493	25.0	"	500		98.7	85-115			
Surrogate: 1-Chlorooctane	*102*		*"*	*100*		*102*	*70-130*			
Surrogate: o-Terphenyl	*51.9*		*"*	*50.0*		*104*	*70-130*			
Calibration Check (P4A0209-CCV2)				Prepared: 01/02/24 Analyzed: 01/03/24						
C6-C12	469	25.0	mg/kg	500		93.8	85-115			
>C12-C28	501	25.0	"	500		100	85-115			
Surrogate: 1-Chlorooctane	*98.6*		*"*	*100*		*98.6*	*70-130*			
Surrogate: o-Terphenyl	*50.2*		*"*	*50.0*		*100*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4A0210 - TX 1005										
Blank (P4A0210-BLK1)				Prepared: 01/02/24 Analyzed: 01/04/24						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*88.7*		*"*	*100*		*88.7*	*70-130*			
Surrogate: o-Terphenyl	*51.8*		*"*	*50.0*		*104*	*70-130*			
LCS (P4A0210-BS1)				Prepared: 01/02/24 Analyzed: 01/04/24						
C6-C12	879	25.0	mg/kg	1000		87.9	75-125			
>C12-C28	772	25.0	"	1000		77.2	75-125			
Surrogate: 1-Chlorooctane	*112*		*"*	*100*		*112*	*70-130*			
Surrogate: o-Terphenyl	*43.8*		*"*	*50.0*		*87.6*	*70-130*			
LCS Dup (P4A0210-BSD1)				Prepared: 01/02/24 Analyzed: 01/04/24						
C6-C12	851	25.0	mg/kg	1000		85.1	75-125	3.20	20	
>C12-C28	804	25.0	"	1000		80.4	75-125	4.13	20	
Surrogate: 1-Chlorooctane	*103*		*"*	*100*		*103*	*70-130*			
Surrogate: o-Terphenyl	*43.0*		*"*	*50.0*		*85.9*	*70-130*			
Calibration Check (P4A0210-CCV1)				Prepared: 01/02/24 Analyzed: 01/04/24						
C6-C12	647	25.0	mg/kg	650		99.6	85-115			
>C12-C28	689	25.0	"	650		106	85-115			
Surrogate: 1-Chlorooctane	*101*		*"*	*100*		*101*	*70-130*			
Surrogate: o-Terphenyl	*47.1*		*"*	*50.0*		*94.1*	*70-130*			
Calibration Check (P4A0210-CCV2)				Prepared: 01/02/24 Analyzed: 01/04/24						
C6-C12	605	25.0	mg/kg	650		93.1	85-115			
>C12-C28	694	25.0	"	650		107	85-115			
Surrogate: 1-Chlorooctane	*98.9*		*"*	*100*		*98.9*	*70-130*			
Surrogate: o-Terphenyl	*47.1*		*"*	*50.0*		*94.2*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4A0210 - TX 1005										
Calibration Check (P4A0210-CCV3)				Prepared: 01/02/24 Analyzed: 01/04/24						
C6-C12	616	25.0	mg/kg	650		94.7	85-115			
>C12-C28	652	25.0	"	650		100	85-115			
Surrogate: 1-Chlorooctane	*99.2*		*"*	*100*		*99.2*	*70-130*			
Surrogate: o-Terphenyl	*48.1*		*"*	*50.0*		*96.2*	*70-130*			
Batch P4A0211 - TX 1005										
Blank (P4A0211-BLK1)				Prepared: 01/02/24 Analyzed: 01/04/24						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*102*		*"*	*100*		*102*	*70-130*			
Surrogate: o-Terphenyl	*58.8*		*"*	*50.0*		*118*	*70-130*			
LCS (P4A0211-BS1)				Prepared: 01/02/24 Analyzed: 01/04/24						
C6-C12	909	25.0	mg/kg	1000		90.9	75-125			
>C12-C28	854	25.0	"	1000		85.4	75-125			
Surrogate: 1-Chlorooctane	*110*		*"*	*100*		*110*	*70-130*			
Surrogate: o-Terphenyl	*55.5*		*"*	*50.0*		*111*	*70-130*			
LCS Dup (P4A0211-BSD1)				Prepared: 01/02/24 Analyzed: 01/04/24						
C6-C12	992	25.0	mg/kg	1000		99.2	75-125	8.65	20	
>C12-C28	912	25.0	"	1000		91.2	75-125	6.62	20	
Surrogate: 1-Chlorooctane	*96.6*		*"*	*100*		*96.6*	*70-130*			
Surrogate: o-Terphenyl	*56.2*		*"*	*50.0*		*112*	*70-130*			
Calibration Check (P4A0211-CCV1)				Prepared: 01/02/24 Analyzed: 01/04/24						
C6-C12	639	25.0	mg/kg	700		91.3	85-115			
>C12-C28	701	25.0	"	700		100	85-115			
Surrogate: 1-Chlorooctane	*100*		*"*	*100*		*100*	*70-130*			
Surrogate: o-Terphenyl	*49.8*		*"*	*50.0*		*99.7*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4A0211 - TX 1005										
Calibration Check (P4A0211-CCV2)				Prepared: 01/02/24 Analyzed: 01/04/24						
C6-C12	715	25.0	mg/kg	700		102	85-115			
>C12-C28	780	25.0	"	700		111	85-115			
Surrogate: 1-Chlorooctane	*113*		*"*	*100*		*113*	*70-130*			
Surrogate: o-Terphenyl	*55.7*		*"*	*50.0*		*111*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4A0308 - * DEFAULT PREP *** **										
Blank (P4A0308-BLK1)				Prepared & Analyzed: 01/03/24						
% Moisture	ND	0.1	%							
Blank (P4A0308-BLK2)				Prepared & Analyzed: 01/03/24						
% Moisture	ND	0.1	%							
Blank (P4A0308-BLK3)				Prepared & Analyzed: 01/03/24						
% Moisture	ND	0.1	%							
Blank (P4A0308-BLK4)				Prepared & Analyzed: 01/03/24						
% Moisture	ND	0.1	%							
Blank (P4A0308-BLK5)				Prepared & Analyzed: 01/03/24						
% Moisture	ND	0.1	%							
Duplicate (P4A0308-DUP1)	**Source: 4A02009-10**			Prepared & Analyzed: 01/03/24						
% Moisture	4.0	0.1	%		3.0			28.6	20	R3
Duplicate (P4A0308-DUP2)	**Source: 4A02009-20**			Prepared & Analyzed: 01/03/24						
% Moisture	4.0	0.1	%		4.0			0.00	20	
Duplicate (P4A0308-DUP3)	**Source: 4A02009-35**			Prepared & Analyzed: 01/03/24						
% Moisture	4.0	0.1	%		4.0			0.00	20	
Duplicate (P4A0308-DUP4)	**Source: 4A02009-45**			Prepared & Analyzed: 01/03/24						
% Moisture	4.0	0.1	%		4.0			0.00	20	
Duplicate (P4A0308-DUP5)	**Source: 4A02009-60**			Prepared & Analyzed: 01/03/24						
% Moisture	4.0	0.1	%		5.0			22.2	20	R3

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4A0308 - * DEFAULT PREP *** **										
Duplicate (P4A0308-DUP6)	**Source: 4A02011-05**			Prepared & Analyzed: 01/03/24						
% Moisture	16.0	0.1	%		14.0			13.3	20	
Duplicate (P4A0308-DUP7)	**Source: 4A02011-20**			Prepared & Analyzed: 01/03/24						
% Moisture	8.0	0.1	%		8.0			0.00	20	
Duplicate (P4A0308-DUP8)	**Source: 4A02013-01**			Prepared & Analyzed: 01/03/24						
% Moisture	2.0	0.1	%		3.0			40.0	20	R3
Duplicate (P4A0308-DUP9)	**Source: 4A02017-10**			Prepared & Analyzed: 01/03/24						
% Moisture	5.0	0.1	%		5.0			0.00	20	
Batch P4A0503 - * DEFAULT PREP *** **										
Blank (P4A0503-BLK1)				Prepared & Analyzed: 01/05/24						
Chloride	ND	1.00	mg/kg							
LCS (P4A0503-BS1)				Prepared & Analyzed: 01/05/24						
Chloride	20.3		mg/kg	20.0		101	90-110			
LCS Dup (P4A0503-BSD1)				Prepared & Analyzed: 01/05/24						
Chloride	20.2		mg/kg	20.0		101	90-110	0.524	10	
Calibration Check (P4A0503-CCV1)				Prepared & Analyzed: 01/05/24						
Chloride	20.1		mg/kg	20.0		100	90-110			
Calibration Check (P4A0503-CCV2)				Prepared & Analyzed: 01/05/24						
Chloride	21.1		mg/kg	20.0		105	90-110			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4A0503 - * DEFAULT PREP *** **										
Calibration Check (P4A0503-CCV3)				Prepared: 01/05/24 Analyzed: 01/06/24						
Chloride	19.8		mg/kg	20.0		98.8	90-110			
Matrix Spike (P4A0503-MS1)		**Source: 3L22002-12**		Prepared & Analyzed: 01/05/24						
Chloride	109		mg/kg	100	0.892	108	80-120			
Matrix Spike (P4A0503-MS2)		**Source: 4A05003-01**		Prepared & Analyzed: 01/05/24						
Chloride	109		mg/kg	100	0.339	109	80-120			
Matrix Spike Dup (P4A0503-MSD1)		**Source: 3L22002-12**		Prepared & Analyzed: 01/05/24						
Chloride	109		mg/kg	100	0.892	108	80-120	0.0715	20	
Matrix Spike Dup (P4A0503-MSD2)		**Source: 4A05003-01**		Prepared & Analyzed: 01/05/24						
Chloride	109		mg/kg	100	0.339	109	80-120	0.107	20	
Batch P4A0507 - * DEFAULT PREP *** **										
Blank (P4A0507-BLK1)				Prepared: 01/05/24 Analyzed: 01/08/24						
Chloride	ND	1.00	mg/kg							
LCS (P4A0507-BS1)				Prepared: 01/05/24 Analyzed: 01/08/24						
Chloride	20.4		mg/kg	20.0		102	90-110			
LCS Dup (P4A0507-BSD1)				Prepared: 01/05/24 Analyzed: 01/08/24						
Chloride	20.5		mg/kg	20.0		103	90-110	0.474	10	
Calibration Check (P4A0507-CCV1)				Prepared: 01/05/24 Analyzed: 01/08/24						
Chloride	20.4		mg/kg	20.0		102	90-110			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4A0507 - * DEFAULT PREP *** **										
Calibration Check (P4A0507-CCV2)				Prepared: 01/05/24 Analyzed: 01/08/24						
Chloride	20.4		mg/kg	20.0		102	90-110			
Matrix Spike (P4A0507-MS1)		**Source: 4A02009-02**		Prepared: 01/05/24 Analyzed: 01/08/24						
Chloride	114		mg/kg	100	0.312	113	80-120			
Matrix Spike (P4A0507-MS2)		**Source: 4A02009-12**		Prepared: 01/05/24 Analyzed: 01/08/24						
Chloride	102		mg/kg	100	0.270	102	80-120			
Matrix Spike Dup (P4A0507-MSD1)		**Source: 4A02009-02**		Prepared: 01/05/24 Analyzed: 01/08/24						
Chloride	114		mg/kg	100	0.312	113	80-120	0.0528	20	
Matrix Spike Dup (P4A0507-MSD2)		**Source: 4A02009-12**		Prepared: 01/05/24 Analyzed: 01/08/24						
Chloride	103		mg/kg	100	0.270	103	80-120	0.625	20	
Batch P4A0806 - * DEFAULT PREP *** **										
Blank (P4A0806-BLK1)				Prepared & Analyzed: 01/08/24						
Chloride	ND	1.00	mg/kg							
LCS (P4A0806-BS1)				Prepared & Analyzed: 01/08/24						
Chloride	20.5		mg/kg	20.0		102	90-110			
LCS Dup (P4A0806-BSD1)				Prepared & Analyzed: 01/08/24						
Chloride	20.4		mg/kg	20.0		102	90-110	0.519	10	
Calibration Check (P4A0806-CCV1)				Prepared & Analyzed: 01/08/24						
Chloride	20.2		mg/kg	20.0		101	90-110			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4A0806 - * DEFAULT PREP *** **										
Calibration Check (P4A0806-CCV2)				Prepared & Analyzed: 01/08/24						
Chloride	20.7		mg/kg	20.0		103	90-110			
Matrix Spike (P4A0806-MS1)		Source: 4A02009-22		Prepared & Analyzed: 01/08/24						
Chloride	112		mg/kg	100	4.08	107	80-120			
Matrix Spike (P4A0806-MS2)		Source: 4A02009-32		Prepared & Analyzed: 01/08/24						
Chloride	108		mg/kg	100	0.428	108	80-120			
Matrix Spike Dup (P4A0806-MSD1)		Source: 4A02009-22		Prepared & Analyzed: 01/08/24						
Chloride	112		mg/kg	100	4.08	108	80-120	0.371	20	
Matrix Spike Dup (P4A0806-MSD2)		Source: 4A02009-32		Prepared & Analyzed: 01/08/24						
Chloride	108		mg/kg	100	0.428	108	80-120	0.162	20	
Batch P4A0808 - * DEFAULT PREP *** **										
Blank (P4A0808-BLK1)				Prepared: 01/08/24 Analyzed: 01/09/24						
Chloride	ND	1.00	mg/kg							
LCS (P4A0808-BS1)				Prepared: 01/08/24 Analyzed: 01/09/24						
Chloride	20.5		mg/kg	20.0		103	90-110			
LCS Dup (P4A0808-BSD1)				Prepared: 01/08/24 Analyzed: 01/09/24						
Chloride	20.7		mg/kg	20.0		104	90-110	0.830	10	
Calibration Check (P4A0808-CCV1)				Prepared: 01/08/24 Analyzed: 01/09/24						
Chloride	20.4		mg/kg	20.0		102	90-110			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4A0808 - * DEFAULT PREP *** **										
Calibration Check (P4A0808-CCV2)				Prepared: 01/08/24 Analyzed: 01/09/24						
Chloride	20.3		mg/kg	20.0		102	90-110			
Matrix Spike (P4A0808-MS1)		**Source: 4A02009-40**		Prepared: 01/08/24 Analyzed: 01/09/24						
Chloride	108		mg/kg	100	0.451	107	80-120			
Matrix Spike (P4A0808-MS2)		**Source: 4A08008-03**		Prepared: 01/08/24 Analyzed: 01/09/24						
Chloride	111		mg/kg	100	2.45	109	80-120			
Matrix Spike Dup (P4A0808-MSD1)		**Source: 4A02009-40**		Prepared: 01/08/24 Analyzed: 01/09/24						
Chloride	108		mg/kg	100	0.451	107	80-120	0.163	20	
Matrix Spike Dup (P4A0808-MSD2)		**Source: 4A08008-03**		Prepared: 01/08/24 Analyzed: 01/09/24						
Chloride	112		mg/kg	100	2.45	109	80-120	0.364	20	
Batch P4A0909 - * DEFAULT PREP *** **										
Blank (P4A0909-BLK1)				Prepared & Analyzed: 01/09/24						
Chloride	ND	1.00	mg/kg							
LCS (P4A0909-BS1)				Prepared & Analyzed: 01/09/24						
Chloride	20.5		mg/kg	20.0		102	90-110			
LCS Dup (P4A0909-BSD1)				Prepared & Analyzed: 01/09/24						
Chloride	20.5		mg/kg	20.0		102	90-110	0.117	10	
Calibration Check (P4A0909-CCV1)				Prepared & Analyzed: 01/09/24						
Chloride	20.1		mg/kg	20.0		101	90-110			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4A0909 - * DEFAULT PREP *** **										
Calibration Check (P4A0909-CCV2)				Prepared & Analyzed: 01/09/24						
Chloride	21.1		mg/kg	20.0		105	90-110			
Matrix Spike (P4A0909-MS1)		**Source: 4A02011-05**		Prepared & Analyzed: 01/09/24						
Chloride	131		mg/kg	100	21.8	109	80-120			
Matrix Spike (P4A0909-MS2)		**Source: 4A02011-25**		Prepared & Analyzed: 01/09/24						
Chloride	116		mg/kg	100	6.85	109	80-120			
Matrix Spike Dup (P4A0909-MSD1)		**Source: 4A02011-05**		Prepared & Analyzed: 01/09/24						
Chloride	131		mg/kg	100	21.8	109	80-120	0.0741	20	
Matrix Spike Dup (P4A0909-MSD2)		**Source: 4A02011-25**		Prepared & Analyzed: 01/09/24						
Chloride	116		mg/kg	100	6.85	109	80-120	0.0809	20	
Batch P4A1010 - * DEFAULT PREP *** **										
Blank (P4A1010-BLK1)				Prepared: 01/10/24 Analyzed: 01/11/24						
Chloride	ND	1.00	mg/kg							
LCS (P4A1010-BS1)				Prepared: 01/10/24 Analyzed: 01/11/24						
Chloride	20.7		mg/kg	20.0		104	90-110			
LCS Dup (P4A1010-BSD1)				Prepared: 01/10/24 Analyzed: 01/11/24						
Chloride	20.8		mg/kg	20.0		104	90-110	0.428	10	
Calibration Check (P4A1010-CCV1)				Prepared: 01/10/24 Analyzed: 01/11/24						
Chloride	21.0		mg/kg	20.0		105	90-110			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4A1010 - * DEFAULT PREP *** **										
Calibration Check (P4A1010-CCV2)				Prepared: 01/10/24 Analyzed: 01/11/24						
Chloride	20.4		mg/kg	20.0		102	90-110			
Matrix Spike (P4A1010-MS1)		**Source: 4A02009-42**		Prepared: 01/10/24 Analyzed: 01/11/24						
Chloride	117		mg/kg	100	0.335	117	80-120			
Matrix Spike (P4A1010-MS2)		**Source: 4A02009-52**		Prepared: 01/10/24 Analyzed: 01/11/24						
Chloride	113		mg/kg	100	0.958	112	80-120			
Matrix Spike Dup (P4A1010-MSD1)		**Source: 4A02009-42**		Prepared: 01/10/24 Analyzed: 01/11/24						
Chloride	118		mg/kg	100	0.335	118	80-120	0.990	20	
Matrix Spike Dup (P4A1010-MSD2)		**Source: 4A02009-52**		Prepared: 01/10/24 Analyzed: 01/11/24						
Chloride	115		mg/kg	100	0.958	114	80-120	1.43	20	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Notes and Definitions

S-GC	Surrogate recovery outside of control limits. The data was accepted based on valid recovery of the remaining surrogate.
ROI	Received on Ice
R3	The RPD exceeded the acceptance limit due to sample matrix effects.
QM-05	The spike recovery was outside acceptance limits for the MS and/or MSD due to matrix interference. The LCS and/or LCSD were within acceptance limits showing that the laboratory is in control and the data is acceptable.
BULK	Samples received in Bulk soil containers may be biased low in the nC6-C12 TPH Range
DET	Analyte DETECTED
ND	Analyte NOT DETECTED at or above the reporting limit
NR	Not Reported
dry	Sample results reported on a dry weight basis
RPD	Relative Percent Difference
LCS	Laboratory Control Spike
MS	Matrix Spike
Dup	Duplicate

Report Approved By: Brent Barron Date: 2/13/2024

Brent Barron, Laboratory Director/Technical Director

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

This material is intended only for the use of the individual (s) or entity to whom it is addressed, and may contain information that is privileged and confidential.

If you have received this material in error, please notify us immediately at 432-686-7235.

Page 1060 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934 **Fax No:** _____
Sampler Signature: Jose Belloc

Project Name: Jalapeño
Project #: CDEV # 11845
Project Loc: Lea, CO, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES
e-mail: Jamey@Tellusservices

(lab use only)
ORDER #: 4A02009

Analyze For:
TCLP:
TOTAL:

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total # of Containers	Preservation & # of Containers: Ice	HNO3	HCl	H2SO4	NaOH	Na2S2O3	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge	GW = Groundwater S=Soil/Solid	NP=Non-Potable Specify Other	TPH: TX 1005 TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA - 8021	TPH - EPA - 8015	Chlorides EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
1	NWW-1@8in	8in	8in	12-26-23	8:10											S						X	X	X		
2	WW-2@8in	8in	8in		8:12																					
3	WW-1@10in	10in	10in		8:15																					
4	SW-1@10in	10in	10in		8:17																					
5	EW-1@10in	10in	10in		8:20																					
6	EW-2@10in	10in	10in		8:21																					
7	EW-4@10in	10in	10in		8:24																					
8	EW-3@10in	10in	10in		8:25																					
9	NW-1@1.5	1.5	1.5		8:27																					
10	WW-5@1.5	1.5	1.5		8:30																					

Special Instructions: Report TPH-in-C6-C12 / C12-C28 / C28-C35 fractions aswell as total TPH
same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
Jose Belloc					
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL: Dana Mc	12/29/23	12:33

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered by Sampler/Client Rep. ?	Y	
by Courier? UPS DHL FedEx Lone Star		

Temperature Upon Receipt:
Received: 0.5 °C Thermometer: CF2
Adjusted: °C Factor:

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21 Page 1 of 2

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

Page 1061 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Janey Fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934
Fax No: _____
Sampler Signature: Jose Belloc

Project Name: Jalapeño
Project #: COEU # 11845
Project Loc: Lea, CO, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES
e-mail: Janey@Tellusservices

(lab use only)
ORDER #: 4A02009

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total # of Containers	Preservation & # of Containers: Ice	HNO_3	HCl	H_2SO_4	NaOH	$Na_2S_2O_3$	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge GW = Groundwater S=Soil/Solid NP=Non-Potable Specify Other	Analyze For: TCLP: TPH: TX 1005 TX 1006	TOTAL: Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA - 8021	TPH- EPA - 8015	Chlorides EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
11	SWW-1@10in	10in	10in	12-26-23	10:39		1									S				X	X	X		X
12	WW3@10in	1	1	1	10:41		1									S				1	1	1		1
13	NWW-2@10in	1	1	1	10:43		1									S				1	1	1		1

Special Instructions: Report TPH - in - C6 - C12 & C12 - C28 & C28 - C35 fractions aswell as total TPH
same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
Jose Belloc					
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL: Sara Mc	12/29/23	12:33

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N
by Sampler/Client Rep. ?	Y	N

by Courier? UPS DHL FedEx Lone Star

Temperature Upon Receipt:
Received: -0.5 °C Thermometer: CF0
Adjusted: _____ °C Factor: 1.3

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21

Page 1 of 1

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

Page 1062 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST L: ____ CH: ____ W: ____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Janey Fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934 Fax No: ____
Sampler Signature: Jose Belloc

Project Name: Jalapeño
Project #: COEV # 11845
Project Loc: Lea, CO, NM
PO #: ____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES
e-mail: Janey@Tellusservices

(lab use only)
ORDER #: 4A02009

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total #. of Containers	Preservation & # of Containers: Ice	HNO_3	HCl	H_2SO_4	NaOH	$Na_2S_2O_3$	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge	GW = Groundwater S=Soil/Solid	NP=Non-Potable Specify Other	Analyze For: TCLP: / TOTAL: TPH: TX 1005	TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA - 8021	TPH- EPA - 8015	Chlorides EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
14	SW-4@ 1ft	1ft	1ft	12-26-23	8:57											S						X	X	X		X
15	EW-10@1ft	"	"	"	9:01											"						"	"	"		"
16	SW-5@ 1ft	"	"	"	9:03											"						"	"	"		"
17	SEW-1@ 1ft	"	"	"	9:05											"						"	"	"		"
18	EW-11@ 10in	10in	10in	"	9:07											"						"	"	"		"
19	SW-6 @10in	"	"	"	9:10											"						"	"	"		"
20	EW-12@10in	"	"	"	9:13											"						"	"	"		"
21	SW-7@10in	"	"	"	9:15											"						"	"	"		"
22	EW-13@10in	"	"	"	9:16											"						"	"	"		"
23	SEW-2@10in	"	"	"	9:20											"						2	2	2		2

Special Instructions: Report TPH- in- C6-C12 7 C12-C28 7 C28-C35 fractions aswell as total TPH
same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
Jose Belloc					
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL: Sara Mc	12/29/23	12:33

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N
by Sampler/Client Rep. ?	Y	N

by Courier? UPS DHL FedEx Lone Star

Temperature Upon Receipt:
Received: -0.5 °C Thermometor: CF0 L3
Adjusted: °C Factor:

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 8-21-21 Page 1 of 2

Received by OCD: 9/20/2024 8:26:56 AM
Released to Imaging: 12/18/2024 7:45:13 AM

Page 1063 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Janey Fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934 **Fax No:**
Sampler Signature: Jose Belloc

Project Name: Jalapeño
Project #: COEV # 11845
Project Loc: Lea, CO, NM
PO #:
Report Format: ☐ Standard ☐ TRRP ☐ NPDES
e-mail: Janey@Tellusservices

(lab use only)
ORDER #: 4A02009

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total #. of Containers	Preservation & # of Containers: Ice	HNO_3	HCl	H_2SO_4	NaOH	$Na_2S_2O_3$	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge	GW = Groundwater S=Soil/Solid	NP=Non-Potable Specify Other	Analyze For: TPH: TX 1005	TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA - 8021	TPH-EPA - 8015	Chlorides EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
24	SW-11@1.5	1.5	1.5	12/26/23	10:13		1									S							X	X	X		X
25	SW-12@1.5				10:17																						
26	WW-12@1.5				10:21																						
27	NW-8@1.5				10:23																						
28	EW-7@1.5				10:25																						
29	WW-13@1.5				10:27																						
30	NW-9@1.5				10:30																						
31	EW-8@1.5				10:31																						
32	WW-6@1ft	1ft	1ft		10:33																						
33	WW-4@10in	10in	1ft		10:37																						

Special Instructions: Report TPH-in-C6-C12 & C12-C28 & C28-C35 fractions aswell as total TPH
same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
Jose Belloc					
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL: Lana Mo	12/29/23	12:33

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N
by Sampler/Client Rep. ?	Y	N

by Courier? UPS DHL FedEx Lone Star

Temperature Upon Receipt:
Received: °C Thermometor: CF0 L3
Adjusted: 10.5 °C Factor:

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21

Page ↓ of ↓

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

Page 1064 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Janey Fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934
Fax No: _____
Sampler Signature: Jose Belloc

Project Name: Jalapeño
Project #: COEN # 11845
Project Loc: Lea, CO, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES
e-mail: Janey@Tellusservices

(lab use only)
ORDER #: 4A02009

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total # of Containers	Preservation & # of Containers: Ice	HNO_3	HCl	H_2SO_4	NaOH	$Na_2S_2O_3$	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge	GW = Groundwater S=Soil/Solid	NP=Non-Potable Specify Other	Analyze For: TCLP: TOTAL: TPH: TX 1005	TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA - 8021	TPH- EPA - 8015	Chlorides EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
34	NW-7@10in	10in	10in	12-26-23	9:48		1									S						X	X	X		X
35	NW-9@10in	10in	10in		9:51																					
36	SNW-2@10in	10in	10in		9:53																					
37	SW-10@10in	10in	10in		9:55																					
38	WW-10@10in	10in	10in		9:56																					
39	NW-4@10in	10in	10in		9:58																					
40	WW-11@10in	10in	10in		10:03																					
41	NWW-2@1ft	1ft	1ft		10:06																					
42	NW-5@1ft	1ft	1ft		10:08																					
43	NW-6@1ft	1ft	1ft		10:10																					

Special Instructions: Report TPH-in-C6-C12 C12-C28 & C28-C35 fractions aswell as total TPH
same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
Jose Belloc					
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL:	Date	Time
			Sara MC	12/29/23	12:33

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N
by Sampler/Client Rep. ?	Y	N

by Courier? UPS DHL FedEx Lone Star

Temperature Upon Receipt:
Received: -0.5 °C Thermometer: CF0 L3
Adjusted: °C Factor:

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21 Page ___ of ___

Received by OCD: 9/20/2024 8:26:56 AM
Released to Imaging: 12/18/2024 7:45:13 AM

Page 1065 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey Fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: Midland TX 79705
Telephone No: 432-557-0934 **Fax No:** _____
Sampler Signature: Jose Belloc
Project Name: Jalapeño
Project #: CDEV # 11845
Project Loc: Lea, CO, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES
e-mail: Jamey@Tellusservices

(lab use only) **ORDER #:** 4A02009

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total # of Containers	Preservation & # of Containers: Ice	HNO_3	HCl	H_2SO_4	NaOH	$Na_2S_2O_3$	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge	GW = Groundwater S=Soil/Solid	NP=Non-Potable Specify Other	Analyze For: TCLP: TPH: TX 1005	TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA - 8021	TPH-EPA - 8015	Chlorides EPA-300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
44	NEw-1 @ 8in			12-26-23	9:22											S						X	X	X		
45	Ew-14 @ 8in				9:23																					
46	Sw-7 @ 8in				9:27																					
47	EW-15 @ 8in				9:30																					
48	NW-3 @ 8in				9:32																					
49	Ew-16 @ 8in				9:35																					
50	Sw-8 @ 8in				9:37																					
51	WW-7 @ 8in				9:41																					
52	Sw-9 @ 10in				9:42																					
53	NW-8 @ 10in				9:45											↓						↓	↓	↓		

Special Instructions: Report TPH-in-C6-C12 / C12-C28 / C28-C35 fractions aswell as total TPH
same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
Jose Belloc					
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL: Sara MC	Date 12/29/23	Time 12:33

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N
by Sampler/Client Rep. ?	Y	N

by Courier? UPS DHL FedEx Lone Star

Temperature Upon Receipt:
Received: -0.5 °C Thermometor: CF0 L3
Adjusted: °C Factor:

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21 Page ± of ±

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey Fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934 **Fax No:** _____
Sampler Signature: Jose Belloc
e-mail: Jamey@Tellusservices

Project Name: Jalapeño
Project #: COEV # 11845
Project Loc: Lea, CO, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES

(lab use only) **ORDER #:** 4A02009

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total #. of Containers	Preservation & # of Containers: Ice	HNO_3	HCl	H_2SO_4	NaOH	$Na_2S_2O_3$	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge	GW = Groundwater S=Soil/Solid	NP=Non-Potable Specify Other	Analyze For: TCLP: TPH: TX 1005	TX 1006	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA - 8021	TPH-EPA - 8015	Chlorides EPA-300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
54	SW-2@1.5	1.5	1.5	12-26-23	8:32											S							X	X	X		
55	EW-17@1.5	1.5	1.5		8:35																						
56	NEW 1@1.5	1.5	1.5		8:37																						
57	EW-5@10	10in	10in		8:40																						
58	EW-6@10in	10in	10in		8:42																						
59	EW-7@10in	10in	10in		8:44																						
60	NW-2@1ft	1ft	1ft		8:45																						
61	EW-8@1ft	1ft	1ft		8:47																						
62	SW-3@1ft	1ft	1ft		8:49																						
63	EW-9@8in	8in	8in		8:53																						

Special Instructions: Report TPH-in-C6-C12 C12-C28 C28-C35 fractions aswell as total TPH
same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
Jose Belloc					
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL: Sara Mc	12/29/23	12:33

Laboratory Comments:

Sample Containers Intact?	Y	N
VOCs Free of Headspace?	Y	N
Labels on container(s)	Y	N
Custody seals on container(s)	Y	N
Custody seals on cooler(s)	Y	N
Sample Hand Delivered	Y	N
by Sampler/Client Rep. ?	Y	N

by Courier? UPS DHL FedEx Lone Star

Temperature Upon Receipt:
Received: -0.5 °C Thermometor: CF 0.3
Adjusted: °C Factor:

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21 Page 1 of 1

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

PERMIAN BASIN
ENVIRONMENTAL LAB, LP
1400 Rankin Hwy
Midland, TX 79701

PBELAB

Analytical Report

Prepared for:

Jamey Fowler

Tellus Consulting, LLC

4000 North Big Spring Street Suite 109

Midland, TX 79705

Project: Jalapeno

Project Number: CDEV #11845

Location: Lea Co, NM

Lab Order Number: 4A03009

NELAP ACCREDITED TNI LABORATORY

Current Certification

Report Date: 01/16/24

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

ANALYTICAL REPORT FOR SAMPLES

Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
BH-45 @ 1.5	4A03009-01	Soil	01/02/24 09:10	01-03-2024 15:30
BH-239 @ 1.5	4A03009-02	Soil	01/02/24 12:03	01-03-2024 15:30
BH-240 @ 1.5	4A03009-03	Soil	01/02/24 12:09	01-03-2024 15:30
BH-241 @ 1.5	4A03009-04	Soil	01/02/24 12:14	01-03-2024 15:30
BH-422 @ 3.6	4A03009-05	Soil	01/02/24 10:56	01-03-2024 15:30
BH-423 @ 3.6	4A03009-06	Soil	01/02/24 10:59	01-03-2024 15:30
BH-424 @ 3.6	4A03009-07	Soil	01/02/24 11:07	01-03-2024 15:30
BH-425 @ 3.6	4A03009-08	Soil	01/02/24 11:09	01-03-2024 15:30

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-45 @ 1.5

4A03009-01 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 21:52	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 21:52	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 21:52	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 21:52	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 21:52	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P4A0405*	*01/04/24 13:31*	*01/05/24 21:52*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*98.3 %*	*80-120*		*P4A0405*	*01/04/24 13:31*	*01/05/24 21:52*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	01/04/24 13:31	01/05/24 21:52	EPA 8021B	
Total BTEX	ND	0.00206	mg/kg dry	1	[CALC]	01/04/24 13:31	01/05/24 21:52	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P4A0407	01/04/24 13:33	01/05/24 14:48	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P4A0407	01/04/24 13:33	01/05/24 14:48	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P4A0407	01/04/24 13:33	01/05/24 14:48	TPH 8015M	
Surrogate: 1-Chlorooctane		*86.7 %*	*70-130*		*P4A0407*	*01/04/24 13:33*	*01/05/24 14:48*	*TPH 8015M*	
Surrogate: o-Terphenyl		*97.0 %*	*70-130*		*P4A0407*	*01/04/24 13:33*	*01/05/24 14:48*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	01/04/24 13:33	01/05/24 14:48	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**115**	1.03	mg/kg dry	1	P4A0909	01/09/24 13:32	01/09/24 23:42	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P4A0403	01/04/24 10:29	01/04/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-239 @ 1.5

4A03009-02 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 22:17	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 22:17	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 22:17	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 22:17	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 22:17	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*98.4 %*	*80-120*		*P4A0405*	*01/04/24 13:31*	*01/05/24 22:17*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P4A0405*	*01/04/24 13:31*	*01/05/24 22:17*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	01/04/24 13:31	01/05/24 22:17	EPA 8021B	
Total BTEX	ND	0.00211	mg/kg dry	1	[CALC]	01/04/24 13:31	01/05/24 22:17	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P4A0407	01/04/24 13:33	01/05/24 15:12	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P4A0407	01/04/24 13:33	01/05/24 15:12	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P4A0407	01/04/24 13:33	01/05/24 15:12	TPH 8015M	
Surrogate: 1-Chlorooctane		*80.0 %*	*70-130*		*P4A0407*	*01/04/24 13:33*	*01/05/24 15:12*	*TPH 8015M*	
Surrogate: o-Terphenyl		*91.1 %*	*70-130*		*P4A0407*	*01/04/24 13:33*	*01/05/24 15:12*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	01/04/24 13:33	01/05/24 15:12	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**175**	1.05	mg/kg dry	1	P4A0909	01/09/24 13:32	01/10/24 00:03	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P4A0403	01/04/24 10:29	01/04/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-240 @ 1.5

4A03009-03 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00104	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 22:42	EPA 8021B	
Toluene	ND	0.00104	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 22:42	EPA 8021B	
Ethylbenzene	ND	0.00104	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 22:42	EPA 8021B	
Xylene (p/m)	ND	0.00208	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 22:42	EPA 8021B	
Xylene (o)	ND	0.00104	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 22:42	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*117 %*	*80-120*		*P4A0405*	*01/04/24 13:31*	*01/05/24 22:42*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*98.5 %*	*80-120*		*P4A0405*	*01/04/24 13:31*	*01/05/24 22:42*	*EPA 8021B*	
Xylenes (total)	ND	0.00208	mg/kg dry	1	[CALC]	01/04/24 13:31	01/05/24 22:42	EPA 8021B	
Total BTEX	ND	0.00208	mg/kg dry	1	[CALC]	01/04/24 13:31	01/05/24 22:42	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.0	mg/kg dry	1	P4A0407	01/04/24 13:33	01/05/24 15:36	TPH 8015M	
>C12-C28	ND	26.0	mg/kg dry	1	P4A0407	01/04/24 13:33	01/05/24 15:36	TPH 8015M	
>C28-C35	ND	26.0	mg/kg dry	1	P4A0407	01/04/24 13:33	01/05/24 15:36	TPH 8015M	
Surrogate: 1-Chlorooctane		*88.8 %*	*70-130*		*P4A0407*	*01/04/24 13:33*	*01/05/24 15:36*	*TPH 8015M*	
Surrogate: o-Terphenyl		*99.5 %*	*70-130*		*P4A0407*	*01/04/24 13:33*	*01/05/24 15:36*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.0	mg/kg dry	1	[CALC]	01/04/24 13:33	01/05/24 15:36	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**98.1**	1.04	mg/kg dry	1	P4A0909	01/09/24 13:32	01/10/24 00:24	EPA 300.0	
% Moisture	**4.0**	0.1	%	1	P4A0403	01/04/24 10:29	01/04/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-241 @ 1.5

4A03009-04 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00103	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 23:07	EPA 8021B	
Toluene	ND	0.00103	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 23:07	EPA 8021B	
Ethylbenzene	ND	0.00103	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 23:07	EPA 8021B	
Xylene (p/m)	ND	0.00206	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 23:07	EPA 8021B	
Xylene (o)	ND	0.00103	mg/kg dry	1	P4A0405	01/04/24 13:31	01/05/24 23:07	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*118 %*	*80-120*		*P4A0405*	*01/04/24 13:31*	*01/05/24 23:07*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*99.0 %*	*80-120*		*P4A0405*	*01/04/24 13:31*	*01/05/24 23:07*	*EPA 8021B*	
Xylenes (total)	ND	0.00206	mg/kg dry	1	[CALC]	01/04/24 13:31	01/05/24 23:07	EPA 8021B	
Total BTEX	ND	0.00206	mg/kg dry	1	[CALC]	01/04/24 13:31	01/05/24 23:07	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.8	mg/kg dry	1	P4A0407	01/04/24 13:33	01/05/24 16:00	TPH 8015M	
>C12-C28	ND	25.8	mg/kg dry	1	P4A0407	01/04/24 13:33	01/05/24 16:00	TPH 8015M	
>C28-C35	ND	25.8	mg/kg dry	1	P4A0407	01/04/24 13:33	01/05/24 16:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*81.0 %*	*70-130*		*P4A0407*	*01/04/24 13:33*	*01/05/24 16:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*90.8 %*	*70-130*		*P4A0407*	*01/04/24 13:33*	*01/05/24 16:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	25.8	mg/kg dry	1	[CALC]	01/04/24 13:33	01/05/24 16:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**71.1**	1.03	mg/kg dry	1	P4A0909	01/09/24 13:32	01/10/24 00:46	EPA 300.0	
% Moisture	**3.0**	0.1	%	1	P4A0403	01/04/24 10:29	01/04/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-422 @ 3.6

4A03009-05 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00115	mg/kg dry	1	P4A0405	01/04/24 13:31	01/06/24 00:22	EPA 8021B	
Toluene	ND	0.00115	mg/kg dry	1	P4A0405	01/04/24 13:31	01/06/24 00:22	EPA 8021B	
Ethylbenzene	ND	0.00115	mg/kg dry	1	P4A0405	01/04/24 13:31	01/06/24 00:22	EPA 8021B	
Xylene (p/m)	ND	0.00230	mg/kg dry	1	P4A0405	01/04/24 13:31	01/06/24 00:22	EPA 8021B	
Xylene (o)	ND	0.00115	mg/kg dry	1	P4A0405	01/04/24 13:31	01/06/24 00:22	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*97.6 %*	*80-120*		*P4A0405*	*01/04/24 13:31*	*01/06/24 00:22*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*118 %*	*80-120*		*P4A0405*	*01/04/24 13:31*	*01/06/24 00:22*	*EPA 8021B*	
Xylenes (total)	ND	0.00230	mg/kg dry	1	[CALC]	01/04/24 13:31	01/06/24 00:22	EPA 8021B	
Total BTEX	ND	0.00230	mg/kg dry	1	[CALC]	01/04/24 13:31	01/06/24 00:22	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	28.7	mg/kg dry	1	P4A0407	01/04/24 13:33	01/05/24 16:25	TPH 8015M	
>C12-C28	ND	28.7	mg/kg dry	1	P4A0407	01/04/24 13:33	01/05/24 16:25	TPH 8015M	
>C28-C35	ND	28.7	mg/kg dry	1	P4A0407	01/04/24 13:33	01/05/24 16:25	TPH 8015M	
Surrogate: 1-Chlorooctane		*87.0 %*	*70-130*		*P4A0407*	*01/04/24 13:33*	*01/05/24 16:25*	*TPH 8015M*	
Surrogate: o-Terphenyl		*97.9 %*	*70-130*		*P4A0407*	*01/04/24 13:33*	*01/05/24 16:25*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	28.7	mg/kg dry	1	[CALC]	01/04/24 13:33	01/05/24 16:25	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**79.5**	1.15	mg/kg dry	1	P4A0909	01/09/24 13:32	01/10/24 01:07	EPA 300.0	
% Moisture	**13.0**	0.1	%	1	P4A0403	01/04/24 10:29	01/04/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-423 @ 3.6

4A03009-06 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00105	mg/kg dry	1	P4A0405	01/04/24 13:31	01/06/24 00:47	EPA 8021B	
Toluene	ND	0.00105	mg/kg dry	1	P4A0405	01/04/24 13:31	01/06/24 00:47	EPA 8021B	
Ethylbenzene	ND	0.00105	mg/kg dry	1	P4A0405	01/04/24 13:31	01/06/24 00:47	EPA 8021B	
Xylene (p/m)	ND	0.00211	mg/kg dry	1	P4A0405	01/04/24 13:31	01/06/24 00:47	EPA 8021B	
Xylene (o)	ND	0.00105	mg/kg dry	1	P4A0405	01/04/24 13:31	01/06/24 00:47	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*118 %*	*80-120*		*P4A0405*	*01/04/24 13:31*	*01/06/24 00:47*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*98.3 %*	*80-120*		*P4A0405*	*01/04/24 13:31*	*01/06/24 00:47*	*EPA 8021B*	
Xylenes (total)	ND	0.00211	mg/kg dry	1	[CALC]	01/04/24 13:31	01/06/24 00:47	EPA 8021B	
Total BTEX	ND	0.00211	mg/kg dry	1	[CALC]	01/04/24 13:31	01/06/24 00:47	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	26.3	mg/kg dry	1	P4A0407	01/04/24 13:33	01/05/24 16:49	TPH 8015M	
>C12-C28	ND	26.3	mg/kg dry	1	P4A0407	01/04/24 13:33	01/05/24 16:49	TPH 8015M	
>C28-C35	ND	26.3	mg/kg dry	1	P4A0407	01/04/24 13:33	01/05/24 16:49	TPH 8015M	
Surrogate: 1-Chlorooctane		*88.0 %*	*70-130*		*P4A0407*	*01/04/24 13:33*	*01/05/24 16:49*	*TPH 8015M*	
Surrogate: o-Terphenyl		*96.5 %*	*70-130*		*P4A0407*	*01/04/24 13:33*	*01/05/24 16:49*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	26.3	mg/kg dry	1	[CALC]	01/04/24 13:33	01/05/24 16:49	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**81.4**	1.05	mg/kg dry	1	P4A1109	01/11/24 15:38	01/11/24 22:22	EPA 300.0	
% Moisture	**5.0**	0.1	%	1	P4A0403	01/04/24 10:29	01/04/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-424 @ 3.6

4A03009-07 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00111	mg/kg dry	1	P4A0405	01/04/24 13:31	01/06/24 01:12	EPA 8021B	
Toluene	ND	0.00111	mg/kg dry	1	P4A0405	01/04/24 13:31	01/06/24 01:12	EPA 8021B	
Ethylbenzene	ND	0.00111	mg/kg dry	1	P4A0405	01/04/24 13:31	01/06/24 01:12	EPA 8021B	
Xylene (p/m)	ND	0.00222	mg/kg dry	1	P4A0405	01/04/24 13:31	01/06/24 01:12	EPA 8021B	
Xylene (o)	ND	0.00111	mg/kg dry	1	P4A0405	01/04/24 13:31	01/06/24 01:12	EPA 8021B	
Surrogate: 4-Bromofluorobenzene		*118 %*	*80-120*		*P4A0405*	*01/04/24 13:31*	*01/06/24 01:12*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene		*98.2 %*	*80-120*		*P4A0405*	*01/04/24 13:31*	*01/06/24 01:12*	*EPA 8021B*	
Xylenes (total)	ND	0.00222	mg/kg dry	1	[CALC]	01/04/24 13:31	01/06/24 01:12	EPA 8021B	
Total BTEX	ND	0.00222	mg/kg dry	1	[CALC]	01/04/24 13:31	01/06/24 01:12	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	27.8	mg/kg dry	1	P4A0407	01/04/24 13:33	01/05/24 18:00	TPH 8015M	
>C12-C28	ND	27.8	mg/kg dry	1	P4A0407	01/04/24 13:33	01/05/24 18:00	TPH 8015M	
>C28-C35	ND	27.8	mg/kg dry	1	P4A0407	01/04/24 13:33	01/05/24 18:00	TPH 8015M	
Surrogate: 1-Chlorooctane		*79.9 %*	*70-130*		*P4A0407*	*01/04/24 13:33*	*01/05/24 18:00*	*TPH 8015M*	
Surrogate: o-Terphenyl		*88.1 %*	*70-130*		*P4A0407*	*01/04/24 13:33*	*01/05/24 18:00*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	27.8	mg/kg dry	1	[CALC]	01/04/24 13:33	01/05/24 18:00	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**71.7**	1.11	mg/kg dry	1	P4A1109	01/11/24 15:38	01/11/24 22:41	EPA 300.0	
% Moisture	**10.0**	0.1	%	1	P4A0403	01/04/24 10:29	01/04/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BH-425 @ 3.6

4A03009-08 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00125	mg/kg dry	1	P4A0405	01/04/24 13:31	01/06/24 01:37	EPA 8021B	
Toluene	ND	0.00125	mg/kg dry	1	P4A0405	01/04/24 13:31	01/06/24 01:37	EPA 8021B	
Ethylbenzene	ND	0.00125	mg/kg dry	1	P4A0405	01/04/24 13:31	01/06/24 01:37	EPA 8021B	
Xylene (p/m)	ND	0.00250	mg/kg dry	1	P4A0405	01/04/24 13:31	01/06/24 01:37	EPA 8021B	
Xylene (o)	ND	0.00125	mg/kg dry	1	P4A0405	01/04/24 13:31	01/06/24 01:37	EPA 8021B	
Surrogate: 1,4-Difluorobenzene		*94.6 %*	*80-120*		*P4A0405*	*01/04/24 13:31*	*01/06/24 01:37*	*EPA 8021B*	
Surrogate: 4-Bromofluorobenzene		*113 %*	*80-120*		*P4A0405*	*01/04/24 13:31*	*01/06/24 01:37*	*EPA 8021B*	
Xylenes (total)	ND	0.00250	mg/kg dry	1	[CALC]	01/04/24 13:31	01/06/24 01:37	EPA 8021B	
Total BTEX	ND	0.00250	mg/kg dry	1	[CALC]	01/04/24 13:31	01/06/24 01:37	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	31.2	mg/kg dry	1	P4A0407	01/04/24 13:33	01/05/24 18:24	TPH 8015M	
>C12-C28	ND	31.2	mg/kg dry	1	P4A0407	01/04/24 13:33	01/05/24 18:24	TPH 8015M	
>C28-C35	ND	31.2	mg/kg dry	1	P4A0407	01/04/24 13:33	01/05/24 18:24	TPH 8015M	
Surrogate: 1-Chlorooctane		*104 %*	*70-130*		*P4A0407*	*01/04/24 13:33*	*01/05/24 18:24*	*TPH 8015M*	
Surrogate: o-Terphenyl		*116 %*	*70-130*		*P4A0407*	*01/04/24 13:33*	*01/05/24 18:24*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	ND	31.2	mg/kg dry	1	[CALC]	01/04/24 13:33	01/05/24 18:24	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**122**	1.25	mg/kg dry	1	P4A1109	01/11/24 15:38	01/11/24 22:59	EPA 300.0	
% Moisture	**20.0**	0.1	%	1	P4A0403	01/04/24 10:29	01/04/24 10:30	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4A0405 - * DEFAULT PREP *** **										
Blank (P4A0405-BLK1)				Prepared: 01/04/24 Analyzed: 01/05/24						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 1,4-Difluorobenzene	*0.112*		"	*0.120*		*93.4*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.132*		"	*0.120*		*110*	*80-120*			
LCS (P4A0405-BS1)				Prepared: 01/04/24 Analyzed: 01/05/24						
Benzene	0.109	0.00100	mg/kg	0.100		109	80-120			
Toluene	0.102	0.00100	"	0.100		102	80-120			
Ethylbenzene	0.0983	0.00100	"	0.100		98.3	80-120			
Xylene (p/m)	0.190	0.00200	"	0.200		95.0	80-120			
Xylene (o)	0.0903	0.00100	"	0.100		90.3	80-120			
Surrogate: 1,4-Difluorobenzene	*0.125*		"	*0.120*		*104*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.137*		"	*0.120*		*114*	*80-120*			
LCS Dup (P4A0405-BSD1)				Prepared: 01/04/24 Analyzed: 01/05/24						
Benzene	0.102	0.00100	mg/kg	0.100		102	80-120	6.34	20	
Toluene	0.0918	0.00100	"	0.100		91.8	80-120	10.4	20	
Ethylbenzene	0.0899	0.00100	"	0.100		89.9	80-120	8.95	20	
Xylene (p/m)	0.175	0.00200	"	0.200		87.6	80-120	8.19	20	
Xylene (o)	0.0810	0.00100	"	0.100		81.0	80-120	10.8	20	
Surrogate: 4-Bromofluorobenzene	*0.135*		"	*0.120*		*112*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.128*		"	*0.120*		*106*	*80-120*			
Calibration Blank (P4A0405-CCB1)				Prepared: 01/04/24 Analyzed: 01/05/24						
Benzene	0.130		ug/kg							
Toluene	0.210		"							
Ethylbenzene	0.140		"							
Xylene (p/m)	0.230		"							
Xylene (o)	0.110		"							
Surrogate: 4-Bromofluorobenzene	*0.132*		"	*0.120*		*110*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.113*		"	*0.120*		*94.2*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4A0405 - * DEFAULT PREP *** **										
Calibration Blank (P4A0405-CCB2)				Prepared: 01/04/24 Analyzed: 01/05/24						
Benzene	0.120		ug/kg							
Toluene	0.180		"							
Ethylbenzene	0.100		"							
Xylene (p/m)	0.160		"							
Xylene (o)	0.0700		"							
Surrogate: 4-Bromofluorobenzene	*0.136*		*"*	*0.120*		*113*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.113*		*"*	*0.120*		*94.3*	*80-120*			
Calibration Check (P4A0405-CCV1)				Prepared: 01/04/24 Analyzed: 01/05/24						
Benzene	0.107	0.00100	mg/kg	0.100		107	80-120			
Toluene	0.101	0.00100	"	0.100		101	80-120			
Ethylbenzene	0.0950	0.00100	"	0.100		95.0	80-120			
Xylene (p/m)	0.188	0.00200	"	0.200		93.8	80-120			
Xylene (o)	0.0926	0.00100	"	0.100		92.6	80-120			
Surrogate: 4-Bromofluorobenzene	*0.130*		*"*	*0.120*		*108*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.114*		*"*	*0.120*		*95.3*	*75-125*			
Calibration Check (P4A0405-CCV2)				Prepared: 01/04/24 Analyzed: 01/05/24						
Benzene	0.101	0.00100	mg/kg	0.100		101	80-120			
Toluene	0.0915	0.00100	"	0.100		91.5	80-120			
Ethylbenzene	0.0867	0.00100	"	0.100		86.7	80-120			
Xylene (p/m)	0.173	0.00200	"	0.200		86.4	80-120			
Xylene (o)	0.0816	0.00100	"	0.100		81.6	80-120			
Surrogate: 4-Bromofluorobenzene	*0.136*		*"*	*0.120*		*113*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.123*		*"*	*0.120*		*102*	*75-125*			
Calibration Check (P4A0405-CCV3)				Prepared: 01/04/24 Analyzed: 01/06/24						
Benzene	0.0918	0.00100	mg/kg	0.100		91.8	80-120			
Toluene	0.0813	0.00100	"	0.100		81.3	80-120			
Ethylbenzene	0.0801	0.00100	"	0.100		80.1	80-120			
Xylene (p/m)	0.161	0.00200	"	0.200		80.4	80-120			
Xylene (o)	0.0807	0.00100	"	0.100		80.7	80-120			
Surrogate: 1,4-Difluorobenzene	*0.124*		*"*	*0.120*		*103*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.137*		*"*	*0.120*		*114*	*75-125*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4A0405 - * DEFAULT PREP *** **										
Matrix Spike (P4A0405-MS1)	**Source: 4A02009-58**			Prepared: 01/04/24 Analyzed: 01/06/24						
Benzene	0.0752	0.00108	mg/kg dry	0.108	ND	69.9	80-120			QM-05
Toluene	0.0537	0.00108	"	0.108	ND	50.0	80-120			QM-05
Ethylbenzene	0.0399	0.00108	"	0.108	ND	37.2	80-120			QM-05
Xylene (p/m)	0.0813	0.00215	"	0.215	ND	37.8	80-120			QM-05
Xylene (o)	0.0550	0.00108	"	0.108	ND	51.1	80-120			QM-05
Surrogate: 1,4-Difluorobenzene	*0.124*		"	*0.129*		*96.1*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.138*		"	*0.129*		*107*	*80-120*			
Matrix Spike Dup (P4A0405-MSD1)	**Source: 4A02009-58**			Prepared: 01/04/24 Analyzed: 01/06/24						
Benzene	0.0744	0.00108	mg/kg dry	0.108	ND	69.2	80-120	0.949	20	QM-05
Toluene	0.0506	0.00108	"	0.108	ND	47.0	80-120	6.02	20	QM-05
Ethylbenzene	0.0108	0.00108	"	0.108	ND	10.0	80-120	115	20	QM-05
Xylene (p/m)	0.0947	0.00215	"	0.215	ND	44.0	80-120	15.2	20	QM-05
Xylene (o)	0.0516	0.00108	"	0.108	ND	48.0	80-120	6.33	20	QM-05
Surrogate: 1,4-Difluorobenzene	*0.125*		"	*0.129*		*96.5*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.138*		"	*0.129*		*107*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4A0407 - TX 1005										
Blank (P4A0407-BLK1)				Prepared: 01/04/24 Analyzed: 01/05/24						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*166*		*"*	*200*		*82.9*	*70-130*			
Surrogate: o-Terphenyl	*94.6*		*"*	*100*		*94.6*	*70-130*			
LCS (P4A0407-BS1)				Prepared: 01/04/24 Analyzed: 01/05/24						
C6-C12	938	25.0	mg/kg	1000		93.8	75-125			
>C12-C28	891	25.0	"	1000		89.1	75-125			
Surrogate: 1-Chlorooctane	*181*		*"*	*200*		*90.3*	*70-130*			
Surrogate: o-Terphenyl	*91.3*		*"*	*100*		*91.3*	*70-130*			
LCS Dup (P4A0407-BSD1)				Prepared: 01/04/24 Analyzed: 01/05/24						
C6-C12	931	25.0	mg/kg	1000		93.1	75-125	0.745	20	
>C12-C28	896	25.0	"	1000		89.6	75-125	0.556	20	
Surrogate: 1-Chlorooctane	*179*		*"*	*200*		*89.7*	*70-130*			
Surrogate: o-Terphenyl	*94.0*		*"*	*100*		*94.0*	*70-130*			
Calibration Check (P4A0407-CCV2)				Prepared: 01/04/24 Analyzed: 01/05/24						
C6-C12	466	25.0	mg/kg	500		93.2	85-115			
>C12-C28	482	25.0	"	500		96.4	85-115			
Surrogate: 1-Chlorooctane	*171*		*"*	*200*		*85.4*	*70-130*			
Surrogate: o-Terphenyl	*90.0*		*"*	*100*		*90.0*	*70-130*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4A0403 - * DEFAULT PREP *** **										
Blank (P4A0403-BLK1)				Prepared & Analyzed: 01/04/24						
% Moisture	ND	0.1	%							
Duplicate (P4A0403-DUP1)		**Source: 4A03006-09**		Prepared & Analyzed: 01/04/24						
% Moisture	15.0	0.1	%		15.0			0.00	20	
Duplicate (P4A0403-DUP2)		**Source: 4A03009-05**		Prepared & Analyzed: 01/04/24						
% Moisture	13.0	0.1	%		13.0			0.00	20	
Batch P4A0909 - * DEFAULT PREP *** **										
Blank (P4A0909-BLK1)				Prepared & Analyzed: 01/09/24						
Chloride	ND	1.00	mg/kg							
LCS (P4A0909-BS1)				Prepared & Analyzed: 01/09/24						
Chloride	20.5		mg/kg	20.0		102	90-110			
LCS Dup (P4A0909-BSD1)				Prepared & Analyzed: 01/09/24						
Chloride	20.5		mg/kg	20.0		102	90-110	0.117	10	
Calibration Check (P4A0909-CCV1)				Prepared & Analyzed: 01/09/24						
Chloride	20.1		mg/kg	20.0		101	90-110			
Calibration Check (P4A0909-CCV2)				Prepared & Analyzed: 01/09/24						
Chloride	21.1		mg/kg	20.0		105	90-110			
Matrix Spike (P4A0909-MS1)		**Source: 4A02011-05**		Prepared & Analyzed: 01/09/24						
Chloride	131		mg/kg	100	21.8	109	80-120			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4A0909 - * DEFAULT PREP *** **										
Matrix Spike (P4A0909-MS2)	**Source: 4A02011-25**			Prepared & Analyzed: 01/09/24						
Chloride	116		mg/kg	100	6.85	109	80-120			
Matrix Spike Dup (P4A0909-MSD1)	**Source: 4A02011-05**			Prepared & Analyzed: 01/09/24						
Chloride	131		mg/kg	100	21.8	109	80-120	0.0741	20	
Matrix Spike Dup (P4A0909-MSD2)	**Source: 4A02011-25**			Prepared & Analyzed: 01/09/24						
Chloride	116		mg/kg	100	6.85	109	80-120	0.0809	20	
Batch P4A1109 - * DEFAULT PREP *** **										
Blank (P4A1109-BLK1)				Prepared & Analyzed: 01/11/24						
Chloride	ND	1.00	mg/kg							
LCS (P4A1109-BS1)				Prepared & Analyzed: 01/11/24						
Chloride	20.0		mg/kg	20.0		100	90-110			
LCS Dup (P4A1109-BSD1)				Prepared & Analyzed: 01/11/24						
Chloride	19.9		mg/kg	20.0		99.5	90-110	0.516	10	
Calibration Check (P4A1109-CCV1)				Prepared & Analyzed: 01/11/24						
Chloride	19.8		mg/kg	20.0		99.0	90-110			
Calibration Check (P4A1109-CCV2)				Prepared: 01/11/24 Analyzed: 01/12/24						
Chloride	20.1		mg/kg	20.0		100	90-110			
Matrix Spike (P4A1109-MS1)	**Source: 4A04004-01**			Prepared & Analyzed: 01/11/24						
Chloride	115		mg/kg	100	3.34	112	80-120			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4A1109 - * DEFAULT PREP *** **										
Matrix Spike (P4A1109-MS2)	**Source: 4A04004-08**			Prepared: 01/11/24 Analyzed: 01/12/24						
Chloride	121		mg/kg	100	5.83	115	80-120			
Matrix Spike Dup (P4A1109-MSD1)	**Source: 4A04004-01**			Prepared & Analyzed: 01/11/24						
Chloride	116		mg/kg	100	3.34	112	80-120	0.522	20	
Matrix Spike Dup (P4A1109-MSD2)	**Source: 4A04004-08**			Prepared: 01/11/24 Analyzed: 01/12/24						
Chloride	120		mg/kg	100	5.83	114	80-120	0.820	20	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Notes and Definitions

QM-05	The spike recovery was outside acceptance limits for the MS and/or MSD due to matrix interference. The LCS and/or LCSD were within acceptance limits showing that the laboratory is in control and the data is acceptable.
BULK	Samples received in Bulk soil containers may be biased low in the nC6-C12 TPH Range
DET	Analyte DETECTED
ND	Analyte NOT DETECTED at or above the reporting limit
NR	Not Reported
dry	Sample results reported on a dry weight basis
RPD	Relative Percent Difference
LCS	Laboratory Control Spike
MS	Matrix Spike
Dup	Duplicate

Report Approved By: Brent Barron Date: 1/16/2024

Brent Barron, Laboratory Director/Technical Director

This material is intended only for the use of the individual (s) or entity to whom it is addressed, and may contain information that is privileged and confidential.

If you have received this material in error, please notify us immediately at 432-686-7235.

Page 1085 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934 **Fax No:** _____
Sampler Signature: Jose Belloc **e-mail:** Jamey@Tellusservices

Project Name: Jalapeño
Project #: COEU # 11845
Project Loc: Lea, CO, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES

(lab use only)
ORDER #: 4A03009

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total #. of Containers	Preservation & # of Containers: Ice	HNO3	HCl	H2SO4	NaOH	Na2S2O3	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge	GW = Groundwater S=Soil/Solid	NP=Non-Potable Specify Other	Analyze For: TCLP: TPH: TX 1005	TOTAL: TPH: TX 1005	Anions (Cl, SO4, Alkalinity)	BTEX 8021B/5030 or BTEX 8260	BTEX EPA - 8021	TPH- EPA - 8015	Chlorides EPA 300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
1	BH-45@1.5	1.5	1.5	1-2-24	9:10		1										5						X	X	X		X
2	BH-239@1.5	1.5	1.5	"	12:03												"						"	"	"		
3	BH-240@1.5	1.5	1.5	"	12:09												"						"	"	"		
4	BH-241@1.5	1.5	1.5	"	12:14												"						"	"	"		
5	BH-422@3.6	3.6	3.6	"	10:56												"						"	"	"		
6	BH-423@3.6	3.6	3.6	"	10:59												"						"	"	"		
7	BH-424@3.6	3.6	3.6	"	11:07												"						"	"	"		
8	BH-425@3.6	3.6	3.6	"	11:09												"						"	"	"		

Special Instructions: Report TPH- in- C6-C12 C12-C28 C28-C35 fractions aswell as total TPH
same instructions for all COC

Relinquished by:	Date	Time	Received by:	Date	Time
Jose Belloc	1/3/24	15:30			
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL: Tina Bledsoe	Date 1/3/24	Time 15:30

Laboratory Comments:
Sample Containers Intact? Y N
VOCs Free of Headspace? Y N
Labels on container(s) Y N
Custody seals on container(s) Y N
Custody seals on cooler(s) Y N
Sample Hand Delivered by Sampler/Client Rep. ? Y N
by Courier? UPS DHL FedEx Lone Star
Temperature Upon Receipt:
Received: 2.2 °C Thermometer: NCF L3
Adjusted: °C Factor:

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21

Page 1 of 1

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

PERMIAN BASIN
ENVIRONMENTAL LAB, LP
1400 Rankin Hwy
Midland, TX 79701

PBELAB

Analytical Report

Prepared for:

Jamey Fowler

Tellus Consulting, LLC

4000 North Big Spring Street Suite 109

Midland, TX 79705

Project: Jalapeno

Project Number: CDEV #11845

Location: Lea County, NM

Lab Order Number: 4B20011

NELAP ACCREDITED TNI LABORATORY

Current Certification

Report Date: 02/22/24

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

ANALYTICAL REPORT FOR SAMPLES

Sample ID	Laboratory ID	Matrix	Date Sampled	Date Received
NWW-1-B @ 8"	4B20011-01	Soil	02/19/24 12:05	02-20-2024 07:53

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

NWW-1-B @ 8''

4B20011-01 (Soil)

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Dilution	Batch	Prepared	Analyzed	Method	Notes
BTEX by 8021B									
Benzene	ND	0.00102	mg/kg dry	1	P4B2115	02/21/24 15:45	02/21/24 18:57	EPA 8021B	
Toluene	ND	0.00102	mg/kg dry	1	P4B2115	02/21/24 15:45	02/21/24 18:57	EPA 8021B	
Ethylbenzene	ND	0.00102	mg/kg dry	1	P4B2115	02/21/24 15:45	02/21/24 18:57	EPA 8021B	
Xylene (p/m)	ND	0.00204	mg/kg dry	1	P4B2115	02/21/24 15:45	02/21/24 18:57	EPA 8021B	
Xylene (o)	ND	0.00102	mg/kg dry	1	P4B2115	02/21/24 15:45	02/21/24 18:57	EPA 8021B	
Surrogate: 4-Bromofluorobenzene	*111 %*		*80-120*		*P4B2115*	*02/21/24 15:45*	*02/21/24 18:57*	*EPA 8021B*	
Surrogate: 1,4-Difluorobenzene	*94.3 %*		*80-120*		*P4B2115*	*02/21/24 15:45*	*02/21/24 18:57*	*EPA 8021B*	
Xylenes (total)	ND	0.00204	mg/kg dry	1	[CALC]	02/21/24 15:45	02/21/24 18:57	EPA 8021B	
Total BTEX	ND	0.00102	mg/kg dry	1	[CALC]	02/21/24 15:45	02/21/24 18:57	EPA 8021B	
Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M									
C6-C12	ND	25.5	mg/kg dry	1	P4B2012	02/20/24 16:10	02/21/24 13:01	TPH 8015M	
>C12-C28	**27.6**	25.5	mg/kg dry	1	P4B2012	02/20/24 16:10	02/21/24 13:01	TPH 8015M	
>C28-C35	ND	25.5	mg/kg dry	1	P4B2012	02/20/24 16:10	02/21/24 13:01	TPH 8015M	
Surrogate: 1-Chlorooctane	*90.1 %*		*70-130*		*P4B2012*	*02/20/24 16:10*	*02/21/24 13:01*	*TPH 8015M*	
Surrogate: o-Terphenyl	*96.5 %*		*70-130*		*P4B2012*	*02/20/24 16:10*	*02/21/24 13:01*	*TPH 8015M*	
Total Petroleum Hydrocarbon C6-C35	**27.6**	25.5	mg/kg dry	1	[CALC]	02/20/24 16:10	02/21/24 13:01	calc	
General Chemistry Parameters by EPA / Standard Methods									
Chloride	**31.2**	1.02	mg/kg dry	1	P4B2013	02/20/24 16:10	02/21/24 13:23	EPA 300.0	
% Moisture	**2.0**	0.1	%	1	P4B2113	02/21/24 10:11	02/21/24 10:16	ASTM D2216	

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4B2115 - * DEFAULT PREP *** **										
Blank (P4B2115-BLK1)				Prepared & Analyzed: 02/21/24						
Benzene	ND	0.00100	mg/kg							
Toluene	ND	0.00100	"							
Ethylbenzene	ND	0.00100	"							
Xylene (p/m)	ND	0.00200	"							
Xylene (o)	ND	0.00100	"							
Surrogate: 1,4-Difluorobenzene	*0.113*		"	*0.120*		*93.9*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.131*		"	*0.120*		*109*	*80-120*			
LCS (P4B2115-BS1)				Prepared & Analyzed: 02/21/24						
Benzene	0.114	0.00100	mg/kg	0.100		114	80-120			
Toluene	0.108	0.00100	"	0.100		108	80-120			
Ethylbenzene	0.118	0.00100	"	0.100		118	80-120			
Xylene (p/m)	0.234	0.00200	"	0.200		117	80-120			
Xylene (o)	0.107	0.00100	"	0.100		107	80-120			
Surrogate: 4-Bromofluorobenzene	*0.127*		"	*0.120*		*106*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.115*		"	*0.120*		*95.8*	*80-120*			
LCS Dup (P4B2115-BSD1)				Prepared & Analyzed: 02/21/24						
Benzene	0.116	0.00100	mg/kg	0.100		116	80-120	2.06	20	
Toluene	0.109	0.00100	"	0.100		109	80-120	1.30	20	
Ethylbenzene	0.119	0.00100	"	0.100		119	80-120	0.920	20	
Xylene (p/m)	0.236	0.00200	"	0.200		118	80-120	0.676	20	
Xylene (o)	0.108	0.00100	"	0.100		108	80-120	1.40	20	
Surrogate: 4-Bromofluorobenzene	*0.125*		"	*0.120*		*105*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.115*		"	*0.120*		*96.0*	*80-120*			
Calibration Blank (P4B2115-CCB1)				Prepared & Analyzed: 02/21/24						
Benzene	0.110		ug/kg							
Toluene	0.130		"							
Ethylbenzene	0.0800		"							
Xylene (p/m)	0.150		"							
Xylene (o)	0.0900		"							
Surrogate: 4-Bromofluorobenzene	*0.130*		"	*0.120*		*108*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.112*		"	*0.120*		*93.5*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

BTEX by 8021B - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4B2115 - * DEFAULT PREP *** **										
Calibration Check (P4B2115-CCV1)				Prepared & Analyzed: 02/21/24						
Benzene	0.0911	0.00100	mg/kg	0.100		91.1	80-120			
Toluene	0.0971	0.00100	"	0.100		97.1	80-120			
Ethylbenzene	0.106	0.00100	"	0.100		106	80-120			
Xylene (p/m)	0.222	0.00200	"	0.200		111	80-120			
Xylene (o)	0.103	0.00100	"	0.100		103	80-120			
Surrogate: 4-Bromofluorobenzene	*0.123*		"	*0.120*		*103*	*75-125*			
Surrogate: 1,4-Difluorobenzene	*0.115*		"	*0.120*		*95.9*	*75-125*			
Calibration Check (P4B2115-CCV2)				Prepared & Analyzed: 02/21/24						
Benzene	0.101	0.00100	mg/kg	0.100		101	80-120			
Toluene	0.108	0.00100	"	0.100		108	80-120			
Ethylbenzene	0.117	0.00100	"	0.100		117	80-120			
Xylene (p/m)	0.237	0.00200	"	0.200		119	80-120			
Xylene (o)	0.115	0.00100	"	0.100		115	80-120			
Surrogate: 1,4-Difluorobenzene	*0.116*		"	*0.120*		*96.5*	*75-125*			
Surrogate: 4-Bromofluorobenzene	*0.125*		"	*0.120*		*104*	*75-125*			
Matrix Spike (P4B2115-MS1)		**Source: 4B21009-01**		Prepared & Analyzed: 02/21/24						
Benzene	0.0410	0.00100	mg/kg wet	0.100	0.000570	40.4	80-120			QM-05
Toluene	0.0377	0.00100	"	0.100	0.00751	30.2	80-120			QM-05
Ethylbenzene	0.0351	0.00100	"	0.100	0.00907	26.1	80-120			QM-05
Xylene (p/m)	0.0730	0.00200	"	0.200	0.0222	25.4	80-120			QM-05
Xylene (o)	0.0319	0.00100	"	0.100	0.00691	25.0	80-120			QM-05
Surrogate: 1,4-Difluorobenzene	*0.113*		"	*0.120*		*94.4*	*80-120*			
Surrogate: 4-Bromofluorobenzene	*0.138*		"	*0.120*		*115*	*80-120*			
Matrix Spike Dup (P4B2115-MSD1)		**Source: 4B21009-01**		Prepared & Analyzed: 02/21/24						
Benzene	0.0817	0.00100	mg/kg wet	0.100	0.000570	81.2	80-120	67.0	20	QM-05
Toluene	0.0706	0.00100	"	0.100	0.00751	63.1	80-120	70.6	20	QM-05
Ethylbenzene	0.0646	0.00100	"	0.100	0.00907	55.6	80-120	72.3	20	QM-05
Xylene (p/m)	0.131	0.00200	"	0.200	0.0222	54.2	80-120	72.4	20	QM-05
Xylene (o)	0.0546	0.00100	"	0.100	0.00691	47.6	80-120	62.3	20	QM-05
Surrogate: 4-Bromofluorobenzene	*0.131*		"	*0.120*		*109*	*80-120*			
Surrogate: 1,4-Difluorobenzene	*0.115*		"	*0.120*		*96.2*	*80-120*			

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Total Petroleum Hydrocarbons C6-C35 by EPA Method 8015M - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4B2012 - TX 1005										
Blank (P4B2012-BLK1)				Prepared: 02/20/24 Analyzed: 02/21/24						
C6-C12	ND	25.0	mg/kg							
>C12-C28	ND	25.0	"							
>C28-C35	ND	25.0	"							
Surrogate: 1-Chlorooctane	*120*		*"*	*100*		*120*	*70-130*			
Surrogate: o-Terphenyl	*64.1*		*"*	*50.0*		*128*	*70-130*			
LCS (P4B2012-BS1)				Prepared: 02/20/24 Analyzed: 02/21/24						
C6-C12	807	25.0	mg/kg	1000		80.7	75-125			
>C12-C28	905	25.0	"	1000		90.5	75-125			
Surrogate: 1-Chlorooctane	*124*		*"*	*100*		*124*	*70-130*			
Surrogate: o-Terphenyl	*62.4*		*"*	*50.0*		*125*	*70-130*			
LCS Dup (P4B2012-BSD1)				Prepared: 02/20/24 Analyzed: 02/21/24						
C6-C12	775	25.0	mg/kg	1000		77.5	75-125	4.03	20	
>C12-C28	876	25.0	"	1000		87.6	75-125	3.24	20	
Surrogate: 1-Chlorooctane	*121*		*"*	*100*		*121*	*70-130*			
Surrogate: o-Terphenyl	*60.8*		*"*	*50.0*		*122*	*70-130*			
Calibration Check (P4B2012-CCV1)				Prepared: 02/20/24 Analyzed: 02/21/24						
C6-C12	276	25.0	mg/kg	300		92.0	85-115			
>C12-C28	292	25.0	"	300		97.3	85-115			
Surrogate: 1-Chlorooctane	*126*		*"*	*100*		*126*	*70-130*			
Surrogate: o-Terphenyl	*66.2*		*"*	*50.0*		*132*	*70-130*			*S-GC*
Calibration Check (P4B2012-CCV2)				Prepared: 02/20/24 Analyzed: 02/21/24						
C6-C12	292	25.0	mg/kg	300		97.4	85-115			
>C12-C28	335	25.0	"	300		112	85-115			
Surrogate: 1-Chlorooctane	*129*		*"*	*100*		*129*	*70-130*			
Surrogate: o-Terphenyl	*70.7*		*"*	*50.0*		*141*	*70-130*			*S-GC*

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4B2013 - * DEFAULT PREP *** **										
Blank (P4B2013-BLK1)				Prepared: 02/20/24 Analyzed: 02/21/24						
Chloride	ND	1.00	mg/kg							
LCS (P4B2013-BS1)				Prepared: 02/20/24 Analyzed: 02/21/24						
Chloride	19.5		mg/kg	20.0		97.7	90-110			
LCS Dup (P4B2013-BSD1)				Prepared: 02/20/24 Analyzed: 02/21/24						
Chloride	19.0		mg/kg	20.0		95.2	90-110	2.66	10	
Calibration Check (P4B2013-CCV1)				Prepared: 02/20/24 Analyzed: 02/21/24						
Chloride	19.1		mg/kg	20.0		95.5	90-110			
Calibration Check (P4B2013-CCV2)				Prepared: 02/20/24 Analyzed: 02/21/24						
Chloride	19.8		mg/kg	20.0		98.9	90-110			
Matrix Spike (P4B2013-MS2)		**Source: 4B20019-01**		Prepared: 02/20/24 Analyzed: 02/21/24						
Chloride	109		mg/kg	100	3.15	106	80-120			
Matrix Spike Dup (P4B2013-MSD2)		**Source: 4B20019-01**		Prepared: 02/20/24 Analyzed: 02/21/24						
Chloride	109		mg/kg	100	3.15	106	80-120	0.146	20	
Batch P4B2113 - * DEFAULT PREP *** **										
Blank (P4B2113-BLK1)				Prepared & Analyzed: 02/21/24						
% Moisture	ND	0.1	%							
Blank (P4B2113-BLK2)				Prepared & Analyzed: 02/21/24						
% Moisture	ND	0.1	%							

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

General Chemistry Parameters by EPA / Standard Methods - Quality Control

Permian Basin Environmental Lab, L.P.

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch P4B2113 - * DEFAULT PREP *** **										
Duplicate (P4B2113-DUP1)		**Source: 4B19008-21**		Prepared & Analyzed: 02/21/24						
% Moisture	7.0	0.1	%		8.0			13.3	20	
Duplicate (P4B2113-DUP2)		**Source: 4B20010-02**		Prepared & Analyzed: 02/21/24						
% Moisture	1.0	0.1	%		1.0			0.00	20	
Duplicate (P4B2113-DUP3)		**Source: 4B20016-01**		Prepared & Analyzed: 02/21/24						
% Moisture	3.0	0.1	%		2.0			40.0	20	R3

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

Notes and Definitions

S-GC	Surrogate recovery outside of control limits. The data was accepted based on valid recovery of the remaining surrogate.
ROI	Received on Ice
R3	The RPD exceeded the acceptance limit due to sample matrix effects.
QM-05	The spike recovery was outside acceptance limits for the MS and/or MSD due to matrix interference. The LCS and/or LCSD were within acceptance limits showing that the laboratory is in control and the data is acceptable.
BULK	Samples received in Bulk soil containers may be biased low in the nC6-C12 TPH Range
DET	Analyte DETECTED
ND	Analyte NOT DETECTED at or above the reporting limit
NR	Not Reported
dry	Sample results reported on a dry weight basis
RPD	Relative Percent Difference
LCS	Laboratory Control Spike
MS	Matrix Spike
Dup	Duplicate

Report Approved By: Brent Barron Date: 2/22/2024

Brent Barron, Laboratory Director/Technical Director

The results in this report apply to the samples analyzed in accordance with the samples received in the laboratory. This analytical report must be reproduced in its entirety, with written approval of Permian Basin Environmental Lab.

Tellus Consulting, LLC	Project: Jalapeno
4000 North Big Spring Street Suite 109	Project Number: CDEV #11845
Midland TX, 79705	Project Manager: Jamey Fowler

This material is intended only for the use of the individual (s) or entity to whom it is addressed, and may contain information that is privileged and confidential.

If you have received this material in error, please notify us immediately at 432-686-7235.

Page 1096 of 1291

PBELAB

CHAIN OF CUSTODY RECORD AND ANALYSIS REQUEST

L: _____ CH: _____ W: _____

Permian Basin Environmental Lab, LP
1400 Rankin HWY
Midland, Texas 79701
Phone: 432-686-7235

Project Manager: Jamey Fowler
Company Name: Tellus
Company Address: 4000 N Big Spring
City/State/Zip: midland TX 79705
Telephone No: 432-557-0934
Fax No: _____
Sampler Signature: Jose Bellac
e-mail: Jamey@Tellusservices

Project Name: Jalapeño
Project #: COEV-#11845
Project Loc: Lea, co, NM
PO #: _____
Report Format: ☐ Standard ☐ TRRP ☐ NPDES

(lab use only)
ORDER #: 4B20011

LAB # (lab use only)	FIELD CODE	Beginning Depth	Ending Depth	Date Sampled	Time Sampled	Field Filtered	Total #. of Containers	Preservation & # of Containers: Ice	HNO_3	HCl	H_2SO_4	NaOH	$Na_2S_2O_3$	None	Other (Specify)	Matrix: DW=Drinking Water SL=Sludge GW = Groundwater S=Soil/Solid NP=Non-Potable Specify Other	Analyze For: TCLP: TPH: TX 1005	TX 1006	Anions (Cl, SO4, Alkalinity)	TOTAL: BTEX 8021B/5030 or BTEX 8260	BTEX EPA-8021	TPH-EPA 8015	Chlorides EPA-300.0	RUSH TAT (Pre-Schedule) 24, 48, 72 h	Standard TAT
1	NWW-1-B	8in	8in	2-19-24	12:05											S				X	X	X		X

Special Instructions: Report TPH - in - C6 - C12 > C12 - C28 > C28 - C35 fractions aswell as total-TPH

Relinquished by:	Date	Time	Received by:	Date	Time
Jose Bellac	2-20-24	8:53			
Relinquished by:	Date	Time	Received by:	Date	Time
Relinquished by:	Date	Time	Received by PBEL:	Date: 2-20-24	Time: 7:53

Laboratory Comments:
Sample Containers Intact? Y N
VOCs Free of Headspace? Y N
Labels on container(s) Y N
Custody seals on container(s) Y N
Custody seals on cooler(s) Y N
Sample Hand Delivered Y N
by Sampler/Client Rep. ? Y N
by Courier? UPS DHL FedEx Lone Star
Temperature Upon Receipt: L3
Received: 6.0 °C Thermometer:
Adjusted: 6-0 °C Factor: N C F

PBEL_COC_2021_1 Revision #: 2021_1 Effective Date: 9-21-21

Page __ of __

Received by OCD: 9/20/2024 8:26:56 AM

Released to Imaging: 12/18/2024 7:45:13 AM

Attachment D
Waste Transportation Manifests

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0253285

Part 1 - Generator

COMPANY NAME: Permian Resources DATE: 12-15-23
LEASE: Jumpero 3 RP CDEV - H11845 PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1 #H
STATE & COUNTY ORIGIN: Lea Co, NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ ~~No~~	

(I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is/are in all respects in the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ MSDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below):

☐ EMERGENCY NON-OILFIELD: Emergency non hazardous, non oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: montgomery Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: El Paso Trucking LLC YARD #: 20 WIP #: _____ TRUCK #: 002
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN #: _____ TRAILER #: 002
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE"

DRIVER: Alex Flores (Driver's Name Printed) DRIVER'S SIGNATURE: _____
"TRANSPORTER, I CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE"

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-15-23 TIME IN: _____ AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: ~~PASS~~ FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: 0 (Less than 50 MCR)

Shake Out:

	1	2	3
H_2O	N/A		
S			

210516

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee's Printed Name) has received the above-mentioned waste, which has passed all acceptance testing and the facility may legally accept, dispose of, or recycle said waste pursuant to law.

EMPLOYEE'S SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 1253296

COMPANY NAME: Premium Resources DATE: 12/15/23
LEASE: Jalapeño 3RD CDEV #11545 PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co, NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Part 1 - Generator

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (ORF)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (ORF)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: Lea, NM		Authorize Washout?	☐ Yes ☒ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NORM Acceptance certification's on a per load basis only)

☐ RCRA NON EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21- 261.24 or listed hazardous waste as defined by 40 CFR, pa 1 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ MSDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Attach Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination, and a description of that waste must accompany this form)

Print Authorized Agent's Name: Montgomery Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Tomahawk Trucking YARD #: _____ WHP #: _____ TRUCK #: 55
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN #: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Jorge (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I, (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/15/23 TIME IN: 10:22 (AM) PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
9109 W NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS (0) FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL (0) N/A

NORM TESTING: P

Shake Out:	1	2	3
H2O			
S			

Gallon Test: _____

210517

Printed Name: _____
Signature: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: Montgomery Floyd (Authorized Agent's Printed Name and Title)
SIGNATURE:
COMPANY MAN EMAIL:
COMPANY MAN PHONE:

MANIFEST # 0285110

Part 1 - Generator

COMPANY NAME: Premian Resources. DATE: 12/12/23
LEASE: Jalapeño 3rd. Cdev #11845. PHONE:
AFE #: API: 30 025 40935.
RIG NAME: WELL #: 1H.
STATE & COUNTY ORIGIN: Lea Co. NM.

QUANTITY: ☐ BBLS ☒ YARDS 20.

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☒ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: Lea. NM.		Authorize Washout?	☐ Yes ☒ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts corrections on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Date: Signature:

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Tomahawk. YARD #: WHP #: TRUCK #: 22
ADDRESS: TICKET #: ROLL OFF BIN#: TRAILER #:
DATE RECEIVED: TIME RECEIVED: ☐ AM ☐ PM DISPATCHER NAME: DISPATCHER PHONE #:

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE

DRIVER: Alonso Morales (Driver's Name Printed) DRIVER'S SIGNATURE:
I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-15-23 TIME IN: 10:24 AM / PM TIME OUT: AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY:
WASHOUT: TIME IN: TIME OUT:

ACCEPTANCE TESTING: PAINT FILTER: ~~PASS~~ FAIL N/A
TCLP: PASS FAIL ~~N/A~~
TOX: PASS FAIL ~~N/A~~

NORM TESTING: P (Less than 50 MCR)

Shake Out:	1	2	3
H_2O	N/A		
S			

210518

Gallon Test:

SERVICE NOTES:
This is to certify that: (Employee (Printed Name)) has received the above indicated waste, waste has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE:

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:15 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
(DBA Northern Delaware Basin Landfill)
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0253298

COMPANY NAME: Permian Resources DATE: _____
LEASE: Jalapeño 3 RP CDEV # 11845 PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 7H
STATE & COUNTY ORIGIN: _____

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Part 1 - Generator

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☑ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is: (Check the appropriate exemption)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24 or listed hazardous wastes as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached: (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been approved by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of the waste must accompany this form)

For Montgomery Floyd Name: Montgomery Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: JS Truck YARD #: 20 WHP #: _____ TRUCK #: 832
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN #: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Edgar Guerrero (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I, (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

LOAD WAS RECEIVED AT (Check One): DATE: 12/15/23 TIME IN: 10:30 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: P

Shake Out:	1	2	3
H2O			
S			

210519

Gallon Test: _____

SEE LOAD NOTES

This load certified that: _____ (Employee's Printed Name)

EMPLOYEE'S SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
(NM Northern Delaware Basin Landfill)
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0253287

Part 1 - Generator

COMPANY NAME: Permian Resources
LEASE: Jaquino 32 P CDEV- #11045
AFE #: _____ API: 30-025-41093
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co. NM

DATE: _____
PHONE: _____

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box)	☐ RCRA Exempt		☐ RCRA Non-Exempt
☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☐ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached: (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Montgomery Floyd Date: 12/15/23 Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: JJR Transport LLC YARD #: 20 WHP #: _____ TRUCK #: 09
ADDRESS: PO Box 1031 Loving, NM TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:

I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART I ABOVE.

DRIVER: Noel Velazquez (Driver's Name Printed) DRIVER'S SIGNATURE: Noel Velazquez

I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One):

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 Jal, New Mexico 88252

DATE: 12/15/23 TIME IN: _____ AM / PM TIME OUT: _____ AM / PM

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MSR)

Shake Out:		
1	2	3

210520

Gallon Test: _____

SERVICE NOTES:
This is only for test _____
Employee (Print Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been placed in the cell or other container at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM
6/27/24, 10:46 AM
Image.aspx (800×1035)
Page 1103 of 1291

OWL Landfill Services, LLC
aka Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0253288

Part 1 - Generator

COMPANY NAME: ~~[illegible]~~ Permian Resources DATE: 12-15-23
LEASE: Jalapeno 3 RP CTB - #11845 PHONE: _____
AFE #: _____ API: 30-025-40435
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co, NM.

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box)	☐ RCRA Exempt	☐ RCRA Non-Exempt	
☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners	Authorize Washout?	☐ Yes ☑ No
☐ Other: _____			

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDB Accepts certifications on a per load basis only)

☐ RCRA NON EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21 261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached: (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Montgomery Floyd Date _____ Signature _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: HoSanna Services. YARD #: _____ WHP #: _____ TRUCK #: 46
ADDRESS: 721 W Birch. TICKET #: _____ ROLL OFF BIN #: _____ TRAILER #: Belly
DATE RECEIVED: 12-15-23 TIME RECEIVED: _____ ☑ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I HEREBY STATE THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Angel Salcedo (Driver's Name Printed) DRIVER'S SIGNATURE: _____

"I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE."

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-15-23 TIME IN: _____ AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W NM Highway 128 Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: ~~PASS~~ FAIL N/A
TCLP: PASS FAIL ~~N/A~~
TOX: PASS FAIL ~~N/A~~

NORM TESTING: T (Less than 50 MCR)

Shake Out:	1	2	3
H2O	N/A		
S			

210521

Gallon Test: _____

SERVICE NOTES:
I, _____ (Employee Printed Name) hereby certify that _____ has received the above mentioned waste, and it has passed all preliminary testing of this facility and the waste has been cleared for disposal in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

https://weighnavonline.com/Image.aspx?ImageType=TicketItemImage&ImageId=30858996 1/1
Released to Imaging: 12/18/2024 7:45:13 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0253299

Part 1 - Generator

COMPANY NAME: Permian Resources
DATE: _____
LEASE: Jamrock 3RD CBEV #11845
PHONE: _____
AFE #: _____ API: 30-025-40925
QUANTITY: _____ ☐ BBLS
RIG NAME: _____ WELL #: 7 H
30 ☑ YARDS
STATE & COUNTY ORIGIN: Lea Co, NM

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification)

☐ RCRA EXEMPT: Oil field wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Monty Gormley Frank Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DJ Truck Services YARD #: 20 WHP #: _____ TRUCK #: 220
ADDRESS: 520 S Burk St Hobbs TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Jaime Robles (Driver's Name Printed) DRIVER'S SIGNATURE: Jaime Robles

I, (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12.15.24 TIME IN: _____ AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A; TCLP: PASS FAIL N/A; TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H2O			
S			

210524

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptances testing at the facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Received by OCD: 9/20/2024 8:26:56 AM
6/27/24, 10:48 AM
Image.aspx (800×1035)
Page 1105 of 1291

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0253289

Part 1 - Generator

COMPANY NAME: Premium Resources DATE: 12-15-23
LEASE: Jennifer 3 RP CDEV-#11845 PHONE: _____
AFE #: _____ API: 30-025-49435
RIG NAME: _____ WELL #: 7H
STATE & COUNTY ORIGIN: _____

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box)	☐ RCRA Exempt	☐ RCRA Non-Exempt	
☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☑ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached: (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (Rrc order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: montgomery Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: El Rolo Trucking LLC YARD #: 20 WHP #: _____ TRUCK #: 002
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: 002
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE

DRIVER: Alex Flores DRIVER'S SIGNATURE: _____
Driver's Name Printed
(TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-15-23 TIME IN: 11:56 AM/PM TIME OUT: _____ AM/PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: ~~PASS~~ FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL ~~N/A~~

NORM TESTING: P (Less than 50 MCR)

Shake Out:

	1	2	3
H_2O	N/A		
S			

210538

Gallon Test: _____

SERVICE NOTES
This is to certify that: _____
I (Driver) Printed Name: _____
EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

https://weighnavonline.com/Image.aspx?ImageType=TicketItemImage&ImageId=30860198 1/1
Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

6/27/24, 10:49 AM Image.aspx (800×1035)

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0253284

Part 1 - Generator

COMPANY NAME: Permian Resources
DATE: 15/12/23
LEASE: Jalapeño 3RP COEV-#11845
PHONE: _____
AFE #: _____ API: 30-025-40435
QUANTITY: _____ ☐ BBLS
RIG NAME: _____ WELL #: 1H
20 ☒ YARDS
STATE & COUNTY ORIGIN: Lea, CO, NM

Waste Description (check only one box)	☐ RCRA Exempt	☐ RCRA Non-Exempt	
☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☒ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: Lea Co NM		Authorize Washout?	☐ Yes ☒ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is: (Check the appropriate classification)

☒ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Montgomery Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Tomahock
YARD #: _____ WHP #: _____ TRUCK #: 22
ADDRESS: _____
TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM
DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Alonso morales (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One):
DATE 12/15/23 TIME IN: 12:02 AM/PM
TIME OUT: _____ AM/PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: ~~PASS~~ FAIL N/A
TCLP: PASS FAIL ~~N/A~~
TOX: PASS FAIL ~~N/A~~

NORM TESTING: P (Less than 5pCi MCR)

Shake Out:			
	1	2	3
H2O	N/A		
S			

$210 540

Gallon Test: _____

SERVICE NOTES:
THIS IS TO CERTIFY THAT: _____ (Employee's Printed Name) has inspected the above indicated load in whole, has passed all acceptance criteria of this facility and has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

https://weighnavonline.com/Image.aspx?ImageType=TicketItemImage&ImageId=30860294 1/1
Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
(dba Northern Delaware Basin Landfill)
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0253290

Part 1 - Generator

COMPANY NAME: Premier Resources
DATE: 12/15/23
LEASE: Jalapeño 3 RP CDEV-#11845
PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co, NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: Loco, NM		Authorize Washout?	☐ Yes ☒ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided):

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below):

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form).

Print Authorized Agent's Name: montgomery Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Tomahawk Trucking
YARD #: _____ WHP #: _____ TRUCK #: 55
ADDRESS: _____
TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____

DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM
DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Jorge Reyes (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I ("TRANSPORTER"), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/15/23 TIME IN: 12:06 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: (PASS) FAIL N/A
TCLP: PASS FAIL (N/A)
TOX: PASS FAIL (N/A)

NORM TESTING: P (<5 pCi/g less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

210541

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee (Printed Name)) has received the above indicated waste, which has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: Juan B

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM
6/27/24, 10:49 AM
Image.aspx (800×1035)
Page 1108 of 1291

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 1253991

Part 1 - Generator

COMPANY NAME: Premium Resources
DATE: _____
LEASE: Jalapeño 3 DP CDEV-11845
PHONE: _____
AFE #: _____ API: 30-025-40935
QUANTITY: _____ ☐ BBLS
RIG NAME: _____ WELL #: _____ 20 ☑ YARDS
STATE & COUNTY ORIGIN: Lea Co, NM

Waste Description (check only one box)	☐ RCRA Exempt	☐ RCRA Non-Exempt	
☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☑ No	

I hereby certify that, according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOBL Accepts certification on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order documentation of non-hazardous waste determination and a description of what waste must accompany this form)

Print Name (Authorized Agent) here: Montgomery Floyd Date: 12/15/23 Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: JR Transp Weld YARD #: 20 WHP #: _____ TRUCK #: 09
ADDRESS: Po box 1031 Lamesa TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE

DRIVER: Abel Velazquez (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I, (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/15/23 TIME IN: 12:13 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: P (Less than 50 MDB)

Shake Out:	1	2	3
H_2O			
S			

210543

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has verified the above indicated waste, waste movement and acceptance testing of this facility and the waste has been accepted in accordance with approved procedures.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

https://weighpayonline.com/Images.aspx?ImageType=TicketItemImage&ImageId=30860466 1/1
Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0253292

Part 1 - Generator

COMPANY NAME: Permian Resources
LEASE: Jalapeño 32P CTB V #11845
AFE #: _____
API: 30-025-40935
RIG NAME: _____
WELL #: 7H
STATE & COUNTY ORIGIN: Lea Co, NM

DATE: 12-15-23
PHONE: _____

QUANTITY: _____ ☐ BBLS
80 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ ~~No~~	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOBL Accepts certification on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: montgomery Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DJ T Burks Service YARD #: 20 WHP #: _____ TRUCK #: 220
ADDRESS: 520 S Burks Hobbs TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Jaime Robles (Driver's Name Printed) DRIVER'S SIGNATURE: Jaime Robles

I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One):

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

DATE: 12-15-23 TIME IN: 12:16 AM / PM
TIME OUT: _____ AM / PM

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: ~~PASS~~ FAIL N/A
TCLP: PASS FAIL ~~N/A~~
TOX: PASS FAIL ~~N/A~~

NORM TESTING: P (Less than 50 MCR)

Shake Out:

	1	2	3
H_2O	N/A		
S			

210544

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above-listed waste, waste has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:43:13 AM

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0253293

COMPANY NAME: Premium Resources DATE: 12-15-23
LEASE: Jalapeno 3RP CDEV-H11845 PHONE: 575 441 6073
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 2H
STATE & COUNTY ORIGIN: _____

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Part 1 - Generator

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☐ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination, and a description of that waste must accompany this form)

Print Authorized Agent's Name: montgomery floyd. Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: HoSanna Services YARD #: _____ WHP #: _____ TRUCK #: 46
ADDRESS: 721 W Bill Lexington TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: Belly

DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Angel Salcido (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I, (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/15/23 TIME IN: 12:19 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: P (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

210545

Gallon Test: _____

SERVICE NOTES
This is to certify that: _____ Employee (Printed Name) has received the above indicated waste, waste has passed all acceptance testing of this facility and the waste has been disposed of in authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0253294

COMPANY NAME: Premian Resources DATE: 12-15-23
LEASE: Jalapeño 3 BP CDEV-H 11845 PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 2 H
STATE & COUNTY ORIGIN: lea CO, NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Part 1 - Generator

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Mods w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other:		Authorize Washout?	☐ Yes ☒ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form).

Print Authorized Agent's Name: montgomery Frood. Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: El Patio trucking YARD #: 20 WHP #: _____ TRUCK #: 002
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: 02
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE"

DRIVER: Alex Flores (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I, (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/15/23 TIME IN: 1:46 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: 8 (Less than 50 MDB)

Shake Out:	1	2	3
H2O			
S			

210562

Gallon Test: _____

SERVICE NOTES: _____
Check to certify that _____ (Employee Printed Name) has received the load and has been trained in accordance with applicable regulations.
EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: (Authorized Agent's Printed Name and Title)
SIGNATURE:
COMPANY MAN EMAIL:
COMPANY MAN PHONE:

MANIFEST # 0253300

Part 1 - Generator

COMPANY NAME: Pyramax Resources DATE: 12/12/23
LEASE: Juniper 3 DP CDEU #1HBS PHONE:
AFE #: API: 30-025-40935
RIG NAME: WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co, NM

QUANTITY: ☐ BBLS ☑ YARDS 20

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

- ☐ Water Based Cuttings (DRY)
- ☐ Water Based Cuttings (WET)
- ☑ Contaminated Soil
- ☐ Produced Sands
- ☐ Oil Based Cuttings (DRY)
- ☐ Oil Based Cuttings (WET)
- ☐ Injectable Fluids
- ☐ Non-Injectable Fluids
- ☐ Oil Base Mud
- ☐ Water Base Mud
- ☐ Muds w/Cement
- ☐ Tank Bottoms
- ☐ Rig Trash
- ☐ Pit Liners
- ☐ Other: Lea Co NM

Authorize Washout? ☐ Yes ☒ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOBL Accepts certifications on a per load basis only).

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided):

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below):

☐ EMERGENCY NON-OILFIELD: For emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non hazardous waste determination and a description of that waste must accompany this form).

Print Authorized Agent's Name: montgomery Floyd Date: Signature:

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: FOWLER YARD #: WHP #: TRUCK #: 22
ADDRESS: TICKET #: ROLL OFF BIN#: TRAILER #:
DATE RECEIVED: TIME RECEIVED: ☐ AM ☐ PM DISPATCHER NAME: DISPATCHER PHONE #:

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE

DRIVER: Alonso Morales (Driver's Name Printed) DRIVER'S SIGNATURE:

I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE 12/15/23 TIME IN: 1:50 AM / PM TIME OUT: AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY:
WASHOUT: TIME IN: TIME OUT:

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: P (Less than 50 MDC)

Shake Out:	1	2	3
H2O			
S			

210564

Gallon Test:

SERVICE NOTES:
I, _____ (Employee Printed Name), hereby certify that I have received the above indicated waste, have passed all acceptance testing criteria for its acceptance into the Northern Delaware Basin Landfill, and have authorized its disposal at the permitted site.

EMPLOYEE SIGNATURE:

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0253295

COMPANY NAME: Permian Resources DATE: 12/15/23
LEASE: Jaureño 3 RP CDEV - #10845 PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 7 H
STATE & COUNTY ORIGIN: Lea Co, NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Part 1 - Generator

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☒ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA), and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDSL Accepts certain oilfield only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: montgomery Floyd. Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Tomahawk Trucking YARD #: _____ WHP #: _____ TRUCK #: 55
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE"

DRIVER: Jorge Ruiz (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I, (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/15/23 TIME IN: 1:54 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: P (Less than 50 NCRP)

Shake Out:	1	2	3
H_2O			
S			

210565

Gallon Test: _____

SERVICE NOTES: _____

EMPLOYEE CERTIFY THAT: _____ Employee Printed Name

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent To Print Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0253297

COMPANY NAME: Premium Resources DATE: 12-15-23
LEASE: Louisiana 3RP CDEV # 11845 PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1 H
STATE & COUNTY ORIGIN: Red CO NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Part 1 - Generator

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners	Authorize Washout? ☐ Yes ☑ No	
☐ Other: _____			

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA), and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certificates on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the maximum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR part 261, subpart D as amended. The following documentation documenting the waste is non-hazardous is attached. (Check the appropriate items as provided):

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (one order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent Name: Montgomery Floyd Date: 12/15/23 Signature: _____

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

Part 2 - Transporter

COMPANY NAME: JJR Transp would YARD #: 20 WHP #: _____ TRUCK #: 09
ADDRESS: Po box 1031 Lovington TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 2 ABOVE."

DRIVER: Noel C. (Driver's Name & Printed) DRIVER'S SIGNATURE: Noel Velazquez

I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

Part 3 - Disposal Facility

TYPE(S) RECEIVED AT: (Check One):

☐ Northern Delaware Basin Landfill
3029 W. NM Highway 128 | Jal, New Mexico 88252

DATE: 12-15-23 TIME IN: 1:55 AM / PM TIME OUT: _____ AM / PM

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL ~~N/A~~
TOX: PASS FAIL ~~N/A~~

NORM TESTING: P

Shake Out:			
	1	2	3
H_2O	N/A		
S			

210566

Gallon Test: _____

REFUSED BECAUSE: _____

Print Name and Sign: _____

Cy Mays

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276902

Part 1 - Generator

COMPANY NAME: Permian Resources
DATE: _____
LEASE: Jalapeño 3 BP CDEV - # 11845
PHONE: _____
AFE #: _____ API: 30-025-40936
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co. NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box)	☐ RCRA Exempt	☐ RCRA Non-Exempt	
☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☒ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protect on Agency's July 1988 regulatory determination, the above described waste is/is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of the waste must accompany this form).

Print Authorized Agent's Name: Montgomery Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DJ Truck Service YARD #: 20 WHP #: _____ TRUCK #: 220
ADDRESS: 523 S Burk St Hobbs TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Jaime Robles (Driver's Name Printed) DRIVER'S SIGNATURE: Jaime Robles

I (DRIVER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/15/23 TIME IN: 1:58 AM (PM)
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: _____ TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: (PASS) FAIL N/A
TCLP: PASS FAIL (N/A)
TOX: PASS FAIL (N/A)

NORM TESTING: P (Less than 50 MDS)

Shake Out:	1	2	3
H2O			
S			

210567

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276901

COMPANY NAME: Permian Resources DATE: 12-15-23
LEASE: Jalapeño 32D CDEV-#11845 PHONE: 575 441 6073
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea CO, NM.

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Part 1 - Generator

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Wash	☐ Pit Liners		
☐ Other ~~Lea CO, NM~~		Authorize Washout? ☐ Yes ☒ ~~No~~	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Montgomery Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Hosanna Services YARD #: _____ WHP #: _____ TRUCK #: 46
ADDRESS: 721 W Birch Lovington NM TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: Belly

DATE RECEIVED:	TIME RECEIVED:	☐ AM ☐ PM	DISPATCHER NAME:	DISPATCHER PHONE #:

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE"

DRIVER: Angel Salcido (Driver's Name Printed) DRIVER'S SIGNATURE: _____

"I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE"

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-15- TIME IN: 2:00 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: ~~PASS~~ FAIL N/A
TCLP: PASS FAIL ~~N/A~~
TOX: PASS FAIL ~~N/A~~

NORM TESTING: P (Less than 50 MCR)

Shake Out:	1	2	3
H_2O	N/A		
S			

J10569

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptances testing at this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: (Authorized Agent's Printed Name and Title)
SIGNATURE:
COMPANY MAN EMAIL:
COMPANY MAN PHONE:

MANIFEST # 0276904

Part 1 - Generator

COMPANY NAME: Permian Resource DATE: 12/12/21
LEASE: Jalapeño 3 RP CDEU H 11845 PHONE:
AFE #: API: 30-025-40935
RIG NAME: WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co, NM.

QUANTITY: ☐ BBLS ☑ YARDS 20

Waste Description (check only one box)	☐ RCRA Exempt	☐ RCRA Non-Exempt	
☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other:		Authorize Washout?	☐ Yes ☒ No

The box certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non exempt waste (NOTE: Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached: (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY (NON-OILFIELD): Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Montgomery Floyd Date: Signature:

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Tomahawk Trucking BOARD #: WHP #: TRUCK #: 22
ADDRESS: TICKET #: ROLL OFF BIN#: TRAILER #:
DATE RECEIVED: TIME RECEIVED: ☐ AM ☐ PM DISPATCHER NAME: DISPATCHER PHONE #:

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Alonso Morales (Driver's Name Printed) DRIVER'S SIGNATURE:

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE.

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-15-23 TIME IN: 3:35 AM / PM TIME OUT: AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY:
WASHOUT: TIME IN: TIME OUT:

ACCEPTANCE TESTING: PAINT FILTER: ~~PASS~~ FAIL N/A
TCLP: PASS FAIL ~~N/A~~
TOX: PASS FAIL ~~N/A~~

NORM TESTING: P (Less than 50 MCR)

Shake Out:	1	2	3
H_2O	N/A		
S			

210590

Gallon Test:

SERVICE NOTES:
This is to certify that: (Express Print Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE:

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276903

COMPANY NAME: Premiah resources DATE: 12-15-23
LEASE: Jalapeno 3 BP CDEV-#1845 PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1 H
STATE & COUNTY ORIGIN: Lea Co, NM.

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Part 1 - Generator

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☑ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certification on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided):

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non hazardous waste determination and a description of the waste must accompany this form)

Print Authorized Agents Name: Montgomery Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: El Paso Trucking LLC YARD #: 20 WHP #: _____ TRUCK #: 002
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: 07
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Alex Flores (Driver's Name Printed) DRIVER'S SIGNATURE: _____
I, TRANSPORTER, CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/15/23 TIME IN: 3:38 AM (PM)
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: (PASS) FAIL N/A
TCLP: PASS FAIL (N/A)
TOX: PASS FAIL (N/A)

NORM TESTING: P (Less than 50 uR/h)

Shake Out:	1	2	3
H_2O			
S			

210592

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed acceptance testing at the facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

OWL Landfill Services, LLC
(DBA Northern Delaware Basin Landfill)
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276905

Part 1 - Generator

COMPANY NAME: Permian Resources
DATE: 12-15-23
LEASE: Jalapeno 3 RP CDEV # 11845
PHONE: _____
AFE #: _____ API: 30-025-40935
QUANTITY: _____ ☐ BBLS
RIG NAME: _____ WELL #: 4H
20 ☑ YARDS
STATE & COUNTY ORIGIN: Lea Co NM

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☑ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts non-Petrotex on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON OILFIELD: Exempt, non hazardous, non oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

NOT ACCEPTABLE WASTE: montgomery Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: TOMAHAWK TRUCKING YARD #: _____ WHP #: _____ TRUCK #: 55
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I (WE) CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Jorge Reyes (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-15-23 TIME IN: 3:40 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: ~~PASS~~ FAIL N/A
TCLP: PASS FAIL ~~N/A~~
TOX: PASS FAIL ~~N/A~~

NORM TESTING: ~~D~~ (less than 50 NMR)

Shake Out:	1	2	3
H_2O	N/A		
S			

210593

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste. Waste has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276906

Part 1 - Generator

COMPANY NAME: Premian Resources
LEASE: Jalapeno 32P CDEV# 11845
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co, NM

DATE: _____
PHONE: _____

QUANTITY: 20 ☐ BBLS ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☑ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the maximum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached: (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-O/F FIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Montgomery Floyd Date: 12/15/23 Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Sye Transp well YARD #: NM 20 WHP #: _____ TRUCK #: 09
ADDRESS: PO box 1031 Lovington NM TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:

I (DRIVER) CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Noel Velazquez (Driver's Name Printed) DRIVER'S SIGNATURE: Noel Velazquez

I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/15/23 TIME IN: 3:42 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A; TCLP: PASS FAIL N/A; TOX: PASS FAIL N/A

NORM TESTING: P (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

210594

Gallon Test: _____

SERVICE NOTES:

This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276907

Part 1 - Generator

COMPANY NAME: Premium Resources DATE: 12-15-23
LEASE: Jalapeno CDEV-11845 PHONE: 575 441 6073
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co., NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box)	☐ RCRA Exempt	☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Wash	☐ Pit Liners		
☐ Other _____		Authorize Washout? ☐ Yes ☑ ~~No~~	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOTE: Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD WASTE: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (fire order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Montgomery Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: HoSanna Services ORD #: _____ WHP #: _____ TRUCK #: 46
ADDRESS: 721 W Birch Lovington NM ROLL OFF BIN#: _____ TRAILER #: Belly

DATE RECEIVED:	TIME RECEIVED:	☐ AM ☐ PM	DISPATCHER NAME:	DISPATCHER PHONE #:

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE

DRIVER: Angel Salcido (Driver's Name Printed) DRIVER'S SIGNATURE: _____
I HEREBY CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-15-23 TIME IN: 3:54 AM PM
TIME OUT: _____ AM PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER ~~PASS~~ FAIL N/A
TCLP: PASS FAIL ~~N/A~~
TOX: PASS FAIL ~~N/A~~

NORM TESTING: 0 (Less than 50 MCA)

Shake Out:	1	2	3
H_2O		N/A	
S			

210598

Gallon Test: _____

SERVICE NOTES:
This is to certify that _____ employee (Printed Name)
has received the above indicated waste, and has provided all requirements testing of the facility and the waste has been disposed of in an authorized manner and permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276908

Part 1 - Generator

COMPANY NAME: ~~Ascent~~ Pivotal Resources DATE: 12-15-23
LEASE: Jalapeño 3 BP CDEV-# 11845 PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co, NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other _____		Authorize Washout? ☐ Yes ☒ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-EXEMPT: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Montgomery Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DJ Truck Services YARD #: 20 WHP #: _____ TRUCK #: 220
ADDRESS: 520 S Burk St Hobbs TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Jaime Robles (Driver's Name Printed) DRIVER'S SIGNATURE: Jaime Robles

"I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE"

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-15-23 TIME IN: 3:58 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: ~~PASS~~ FAIL N/A
TCLP: PASS FAIL ~~N/A~~
TOX: PASS FAIL ~~N/A~~

NORM TESTING: P (Less than 50 MCH)

Shake Out:		
1	2	3
H_2O N/A		
S		

210600

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Print your (Printed Name)) has received the above indicated waste, and it has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276911

COMPANY NAME: Premier Resources DATE: 12-18-23
LEASE: Jalapeño 32D CDEV - # 211845 PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co, NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Part 1 - Generator

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☑ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety; the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form.

Printed Authorized Agent's Name: management floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: El Paso Trucking LLC YARD #: 20 WHP #: _____ TRUCK #: 002
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: 02
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Alex Flores (Driver's Name Printed) DRIVER'S SIGNATURE: _____

"I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE"

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/18/23 TIME IN: 8:41 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: P (not than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

211087

Gallon Test: _____

SERVICE NOTES:
This is to certify that: Amanda L. P Employee (Printed Name) has received the above indicated waste, waste has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

OWL Landfill Services, LLC
OWL Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276910

Part 1 - Generator

COMPANY NAME: Permian Resources
DATE: _____
LEASE: Jalapeno 3 BP CDEV-H 11845
PHONE: _____
AFE #: _____ API: 30-025-40913-5
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co, NM.

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Mud w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other:		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification):

☐ RCRA EXEMPT: Oil-Field wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristic established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided):

☐ MSDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety. The order, documentation of non-hazardous waste determination and a description of that waste must accompany this form.

Facility Authorized Agent's Name: management fluid Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: ARES YARD #: 20 WHP #: _____ TRUCK #: 03
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: 03
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
(CERTIFY) THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: William Sandoval (Driver's Name Printed) DRIVER'S SIGNATURE: _____

(TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE.

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/18/23 TIME IN: 8:48 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
7029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: less than 30 MCR

Shake Out:	1	2	3
H_2O			
S			

211088

Gallon Test: _____

SERVICE NOTES:
This is to certify that: Onnaly (Employee Printed Name) has received the above indicated waste, waste has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276912

Part 1 - Generator

COMPANY NAME: Permian Resources
DATE: _____
LEASE: Jalapeño 3 RP CDEV-H 11845
PHONE: _____
AFE #: _____ API: 30-025-40935
QUANTITY: _____ ☐ BBLS
RIG NAME: _____ WELL #: 1H
20 ☑ YARDS
STATE & COUNTY ORIGIN: Lea Co. NM

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24 or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agents Name: mantgorment Flood Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DJ Truck Services YARD #: 20 WHP #: _____ TRUCK #: 220
ADDRESS: 521 S Burk St Hobbs TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Jaime Robles (Driver's Name Printed) DRIVER'S SIGNATURE: Jaime Robles

I, TRANSPORTER, CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-18-23 TIME IN: 8:50 (AM) PM AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

#210899
#220
Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above radioactive waste, and it has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276913

Part 1 - Generator

COMPANY NAME: Permian Resources
DATE: _____
LEASE: Jalapeño 3 BP CDEV-HI1845
PHONE: _____
AFE #: _____ API: 30-025-40935
QUANTITY: _____ ☐ BBLS
RIG NAME: _____ WELL #: 1H
20 ☑ YARDS
STATE & COUNTY ORIGIN: Lea Co, NM

Waste Description (check only one box)	☐ RCRA Exempt	☐ RCRA Non-Exempt	
☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☑ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR part 261, subpart D, as amended. The following documentation demonstrating the waste as non hazardous is attached: (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination, and a description of the waste must accompany this form)

Print Authorized Agent Name: Management Crew Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DJ Truck Services YARD #: 20 WHP #: _____ TRUCK #: 832
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART I ABOVE."

DRIVER: Edgar Cuevas (Driver's Name Printed) DRIVER'S SIGNATURE: _____

"I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE"

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/18/23 TIME IN: 8:54 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ Less than 50 MCR

Shake Out:		
1	2	3
H_2O		
$		

211090

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276914

COMPANY NAME: Permian Resources
LEASE: Jalapeño 3H CPEV-H 11495 46478
AFE #: _____ API: 30-025-40435
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co, NM

DATE: 12/18/23
PHONE: _____

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Part 1 - Generator

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☒ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NORM Analysis certification on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21- 261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste's non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-NON OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Printed and Typed Name: Montgomery Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Tomahawk YARD #: _____ WHP #: _____ TRUCK #: 22
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"NO FREE LIQUID OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Alonso Morales (Driver's Name Printed) DRIVER'S SIGNATURE: _____

"I (WE) TRANSPORTER(S) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE."

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One):

DATE: 12-18-23 TIME IN: 8:55 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: 10 (Less than 50 MCi)

Shake Out:	1	2	3
H2O			
S			

211091
22

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptances testing of the facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276915

Part 1 - Generator

COMPANY NAME: Premion Resources
DATE: _____
LEASE: Jalapeño 3Bp COEV-H 11515
PHONE: _____
AFE #: _____ API: _____
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☑ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON OILFIELD: Emergency non hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agents Name: management Field Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: _____ YARD #: _____ WHP #: _____ TRUCK #: _____
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Jorge Reyes (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/18/23 TIME IN: 8:59 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

Gallon Test: _____

211093

SERVICE NOTES:
This is to certify that: Anna Gallegos (Employee Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276916

Part 1 - Generator

COMPANY NAME: Premium Resources DATE: 12-18-23
LEASE: Malaprop 3AP CDEV-H 11845 PHONE: 5754416073
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea County

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☑ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste (check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOTE: Accepts limitations on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety shall be under documentation of non-hazardous waste determination and a description of that waste must accompany this form.

(Print) Authorized Agent's Name: mark garrett Flood Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: HoSanna Services YARD #: _____ WHP #: _____ TRUCK #: 46
ADDRESS: 224 W Birch Lovington N.M TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: Belly
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Angel Salvido (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-18-23 TIME IN: 4:01 (AM) PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

#211094
#46
Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Name Printed) has received the above indicated waste, waste has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
(a.k.a. Northern Delaware Basin Landfill)
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276917

COMPANY NAME: Chevron Resources
LEASE: Jalapeno 3 BP CDEV-H 11845
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

DATE: _____
PHONE: _____
QUANTITY: _____ ☐ BBLS ☑ YARDS 20

Part 1 - Generator

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☑ No	

I hereby certify according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check one appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOBL Accepts Certifications on a per load basis only).

☐ NON-RCRA EXEMPT: Oilfield waste which is non-hazardous that does not exceed the maximum standards for waste hazardous by characteristics established in RCRA regulations 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation describing the waste as non-hazardous is attached: (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form).

Print Authorized Agent Name: Management Field Date: 12/18/23 Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Silc Transp Weld YARD #: 20 WHP #: _____ TRUCK #: 09
ADDRESS: Po Box 1031 Lovington TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.
DRIVER: Noel Velazquez (Driver's Name Printed) DRIVER'S SIGNATURE: Noel Velazquez
TRANSPORTER, CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/18/23 TIME IN: 10:00 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 pCi/g)

Shake Out:		
1	2	3
H		
S		

211102

Gallon Test: _____

SERVICE NOTES:
This is to certify that: Andy (Employee Printed Name) has received the above indicated waste, waste has passed all acceptance testing criteria and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276918

COMPANY NAME: Permian Resources DATE: 12-18-23
LEASE: Jalapeno 3BP CDEV-H 11548 PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☒ YARDS

Part 1 - Generator

Waste Description (check only one box)	☒ RCRA Exempt	☐ RCRA Non-Exempt	
☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☒ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☒ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non hazardous is attached. (Check the appropriate items as provided):

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non hazardous waste determination and a description of that waste must accompany this form)

(Print Authorized Agent's Name) Montgomery Floyd Date _____ Signature _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: El Rolo Trucking LLC YARD #: 20 WHP #: _____ TRUCK #: 002
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: 02
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART I ABOVE."

DRIVER: Alex Flores (Driver's Name Printed) DRIVER'S SIGNATURE: _____

"I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE"

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-18-23 TIME IN: 10:22 (AM) PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: ~~PASS~~ FAIL N/A
TCLP: PASS FAIL ~~N/A~~
TOX: PASS FAIL ~~N/A~~

NORM TESTING: 8 (Less than 50 MCR)

Shake Out:

	1	2	3
H_2O		NA	
S			

211106

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptances testing at this facility and the waste has been disposed of in an authorized manner at a permitted site.

Gallon Test: _____

EMPLOYEE SIGNATURE: Judy R

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276920

Part 1 - Generator

COMPANY NAME: Premium Resources
DATE: _____
LEASE: Jalapeno 3FP CDEH-H 11845
PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box)	☐ RCRA Exempt	☐ RCRA Non-Exempt	
☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☐ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached: (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Mont Gammon Field Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DJ TRUCK Services YARD #: 20 WHP #: _____ TRUCK #: 220
ADDRESS: 520 S Burk St Hobbs NM TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE"

DRIVER: Jaime Robles (Driver's Name Printed) DRIVER'S SIGNATURE: Jaime Robles

"I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE"

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-18-23 TIME IN: 10:25 (AM) PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: 0 (Less than 50 MDR)

Shake Out:	1	2	3
H_2O			
S			

#211107
#220

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Authorized Agent's Printed Name) has received the above indicated waste, waste has passed all acceptance testing of this facility and the waste has been disposed of in an authorized and approved or a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

OWL Landfill Services, LLC
USA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276919

Part 1 - Generator

COMPANY NAME: Permian Resources
DATE: _____
LEASE: Jalapeno 3 FED COM #11H
PHONE: _____
AFE #: _____ API: 30-025-40935
QUANTITY: _____ ☐ BBLS
RIG NAME: _____ WELL #: 11H
20 ☑ YARDS
STATE & COUNTY ORIGIN: Lea Co, NM

Waste Description (check only one box)	☐ RCRA Exempt	☐ RCRA Non-Exempt	
☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☐ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON OILFIELD: Emergency non hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form).

(Print) Authorized Agent's Name: Montgomery Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: ARS Trucking. YARD #: 20 WHP #: _____ TRUCK #: 03
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: 03
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: William Sandoval (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I, (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/18/23 TIME IN: 10:27 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: (Less than 50 MCR)

Shake Out:

	1	2	3
H_2O	N/A		
5			

211108

Gallon Test: _____

SERVICE NOTES:
This is to certify that: Anna Ortiz (Employee (Printed Name)) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Received by OCD: 9/20/2024 8:26:56 AM

6/27/24, 11:00 AM Image.aspx (800×1035)

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276921

Part 1 - Generator

COMPANY NAME: Permian Resources
LEASE: Palermo 3BP CDEV-H 11895
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: LH
STATE & COUNTY ORIGIN: Lea Co, NM
DATE: _____
PHONE: _____
QUANTITY: _____ ☐ BBLS ☒ YARDS 20

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☒ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☒ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA), and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is: (Check the appropriate classification.

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOBL Accepts certifications on a per load basis only)

☐ RCRA NON EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Non-Authorized Agent's Name: Montgomery Frank Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DJ Truck Service YARD #: 20 WHP #: _____ TRUCK #: 832
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN #: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Edgar Guerrero (Driver's Name Printed) DRIVER'S SIGNATURE: _____

"I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE"

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One):
☐ Northern Delaware Basin Landfill
2039 W. NM Highway 128 | Jal, New Mexico 88252

DATE: 12/18/23 TIME IN: 10:34 AM / PM TIME OUT: _____ AM / PM

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: 0 (Less than 50 MCA)

Shake Out:	1	2	3
H_2O			
S			

Gallon Test: _____

21110

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above hydrated waste, waste has passed all acceptance testing at this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

https://weighmayoniine.com/Image.aspx?ImageType=TicketItemImage&ImageId=30881174 1/1
Released to Imaging: 12/18/2024 7:45:13 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276922

Part 1 - Generator

COMPANY NAME: Permian Resources
DATE: 12-18-23
LEASE: Jalapeño 3BP CDEV-A 11845
PHONE: 5755411 6073
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co, NM

QUANTITY: _____ ☐ BBLS
20 ☒ YARDS

Waste Description (check only one box)	☐ RCRA Exempt	☐ RCRA Non-Exempt	
☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☒ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☒ Yes ☐ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided):

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Management Team Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Hosanna Services - YARD #: _____ WHP #: _____ TRUCK #: 46
ADDRESS: 701 W Birch Lovington N.M. TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: Belly

DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Angel Salcido (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-18-23 TIME IN: 10:35 (AM) PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS ~~FAIL~~ ~~N/A~~
TCLP: PASS FAIL ~~N/A~~
TOX: PASS FAIL ~~N/A~~

NORM TESTING: 0 (Less than 50 MCR)

Shake Out:	1	2	3
H_2O		NA	
S			

211111

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: Judy R

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276923

Part 1 - Generator

COMPANY NAME: Pearson Pecos DATE: 12/18/23
LEASE: Jalapeño 3Bp CDEV-H 11845 PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1 1H
STATE & COUNTY ORIGIN: Lea Co, NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box)	☐ RCRA Exempt	☐ RCRA Non-Exempt	
☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other _____		Authorize Washout?	☐ Yes ☒ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached: (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non hazardous, non oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non hazardous waste determination and a description of the waste must accompany this form)

Print Authorized Agent's Name: Management Fund Title: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: TOMAHOK TRUCKING YARD #: _____ WHP #: _____ TRUCK #: 22
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE"

DRIVER: Alonso Morales. (Driver's Name Printed) DRIVER'S SIGNATURE: _____

"I, TRANSPORTER, CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE"

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/18/23 TIME IN: 10:40 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 pCi/g)

Shake Out:			
	1	2	3
H_2O			
S			

Gallon Test: _____

#21112

SERVICE NOTES: This is to certify that: analy _____ Employee (Printed Name) has received the above indicated waste, waste has passed all acceptances testing at this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST #
0276924

Part 1 - Generator

COMPANY NAME: Permian Resources
DATE: _____
LEASE: Salvacion 3RP COEV-H 11845
PHONE: _____
AFE #: _____ API: 30-025-40935
QUANTITY: _____ ☐ BBLS
RIG NAME: _____ WELL #: 1H
20 ☑ YARDS
STATE & COUNTY ORIGIN: Lea Co, NM

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NORM Accepts certificates on a per load basis only).

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided):

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other: Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Matt Garrett Field Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Tomahawk
YARD #: _____ WHP #: _____ TRUCK #: 55
ADDRESS: _____
TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM
DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Jorge Reyes (Driver's Name Printed) DRIVER'S SIGNATURE: _____

"I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE"

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One):
DATE: 12-18-23 TIME IN: 10:44 (AM) PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: 0 (Less than 50 MCA)

Shake Out:	1	2	3
H_2O			
S			

211113
#55

Gallon Test: _____

SERVICE NOTES
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
(d/b/a Northern Delaware Basin Landfill)
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276925.

Part 1 - Generator

COMPANY NAME: Permian Resources — DATE: _____
LEASE: Jalapeño 3RP COEV-H 11845 — PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea co, NM

QUANTITY: _____ ☐ BBLS ☑ YARDS 20

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ e.g Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24 or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form).

Authorized Agent's Name: Montgomery Ford Date: 12/18/23 Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: SPR Trucking LLC — YARD #: 20 — WHP #: _____ — TRUCK #: 06
ADDRESS: PO box 1031 Lovington — TICKET #: _____ — ROLL OFF BIN#: _____ — TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM — DISPATCHER NAME: _____ — DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Abel Velazquez (Driver's Name Printed) — DRIVER'S SIGNATURE: Abel Velazquez

I, TRANSPORTER, CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-13-23 TIME IN: 11:41 AM/PM TIME OUT: _____ AM/PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A; TCLP: ~~PASS~~ FAIL N/A; TOX: PASS FAIL ~~N/A~~

NORM TESTING: 0 (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

211125 #009

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agents Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0260357

Part 1 - Generator

COMPANY NAME: Premier Receiver — DATE: _____
LEASE: Jalapeno 3BP (DEV-H 11545 — PHONE: _____
AFE #: _____ API: 30-025-40455
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co, NM

QUANTITY: _____ ☐ BBLS ☑ YARDS (20)

Waste Description (check only one box)	☐ RCRA Exempt	☐ RCRA Non-Exempt	
☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☑ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other: Provide Description Below: _____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Montgomery Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: ARS Trucking — YARD #: 20 — WHP #: _____ — TRUCK #: 03
ADDRESS: Hobbs NM — TICKET #: _____ — ROLL OFF BIN#: _____ — TRAILER #: 03
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM — DISPATCHER NAME: _____ — DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: William Sandoval (Driver's Name Printed) — DRIVER'S SIGNATURE: _____

I, (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-18-23 TIME IN: 12:06 AM / PM — TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
7029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: _____ TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A — TCLP: PASS FAIL N/A — TOX: PASS FAIL N/A

NORM TESTING: P (less than 50 MCR)

Shake Out:	1	2	3
H2O			
S			

Gallon Test: _____

Z 211130 H03

SERVICE NOTES:
This is to certify that: _____ (Employee Name) has delivered the above indicated waste, waste has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility — Yellow: Transporter — Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0260358

Part 1 - Generator

COMPANY NAME: Rcemma Resource
DATE: _____
LEASE: Jimmie 3 RP CDEV-H 11845
PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co, NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box)	☐ RCRA Exempt	☐ RCRA Non Exempt	
☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other _____		Authorize Washout? ☐ Yes ☑ No	

Hereby certify, according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certification's on a per load basis only).

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristic as established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other: Provide Description Below

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form).

Print Authorized Agent's Name: Montgomery Fickl Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DJ Truck Service YARD #: 20 WHP #: _____ TRUCK #: 220
ADDRESS: 520 S Burk St Hobbs TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____

DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER Jaime Robles (Driver's Name Printed) DRIVER'S SIGNATURE: Jaime Robles

I, (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-18-23 TIME IN: 12:10 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
3029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MR)

Shake Out:	1	2	3
H_2O			
S			

211132
#220

Gallon Test: _____

REMARKS/NOTES:
I (I) (I) to certify that _____ (Driver's Name) has received the above described waste, has passed all acceptance testing criteria, and the above load has been accepted at this disposal facility on behalf of its owner and operator.

EMPLOYEE'S SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0260356

COMPANY NAME: Premium Resources
LEASE: Jalapeño 3RP CREV-H 11845
AFE #: _____ API: 30-025-46935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co, NM

DATE: _____
PHONE: _____
QUANTITY: _____ ☐ BBLS
20 ☐ YARDS

Part 1 - Generator

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☑ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agents Name: Matt Morgenroth Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: El Rebo Trucking LLC YARD #: 20 WHP #: _____ TRUCK #: 083
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: 07
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Alex Flores (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-18-23 TIME IN: 12:14 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: 9 (Less than 50 MCR)

Shake Out:	1	2	3
H2O			
S			

#211135
#001
Gallon Test: _____

SERVICE NOTES:
TOX: Yes / No
Printed Name: _____ Signature: _____
EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0260359

Part 1 - Generator

COMPANY NAME: Permian Resources
LEASE: Kikapoo 3RP ODEV-H 11845
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co, NM

DATE: _____
PHONE: _____

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other:		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste. NDBL Accepts verifications on a per load basis only.

☐ RCRA NON-EXEMPT: Oilfield waste which is non hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agents Name: mant garmon Fred Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DJ Truck Services YARD #: 20 WHP #: _____ TRUCK #: 832
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Edgar Guerrero (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I, (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/18/23 TIME IN: 1215 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Must Scan to Meet)

Shake Out:	1	2	3
H_2O			
S			

21134
Gallon Test: _____

SERVICE NOTES: _____
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed the acceptance testing of the facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0260360

Part 1 - Generator

COMPANY NAME: Cen
DATE: 12-18-23
LEASE: Kalapaso JAP COM-11845
PHONE: 5754416073
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co, NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Wash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is: (Check the appropriate classification.

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Management Tech Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: HoSanna Services LLC YARD #: _____ WHP #: _____ TRUCK #: 46
ADDRESS: 721 W. Birch Lovington, NM TICKET #: _____ ROLL OFF BIN #: _____ TRAILER #: Belly

DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Angel Salido (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I, (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-18-23 TIME IN: 12:17 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: 9 (Less than 50 MCR)

Shake Out:	1	2	3
H2O			
S			

#211135
#46
Gallon Test: _____

SERVICE NOTES:
This is to certify that _____ (Driver's Name) removed the above indicated waste, waste has passed visual inspection, hauling of this accepted waste has been disposed of in the authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: (Authorized Agent) Printed Name and Title
SIGNATURE:
COMPANY MAN EMAIL:
COMPANY MAN PHONE:

MANIFEST # 0260362

COMPANY NAME: Centennial
LEASE: Kola Penn 3RP CREV-H 11545
AFE #: API: 30025-40935
RIG NAME: WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co, NM

DATE:
PHONE:
QUANTITY: ☐ BBLS ☑ YARDS 22

Part 1 - Generator

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other:		Authorize Washout?	☐ Yes ☐ No

The above certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached: (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Authorized Agent's Name: Montgomery Ford Date: Signature:

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: TOMAHAWK TRUCKING YARD #: WHP #: TRUCK #: 55
ADDRESS: TICKET #: ROLL OFF BIN#: TRAILER #:
DATE RECEIVED: TIME RECEIVED: ☐ AM ☐ PM DISPATCHER NAME: DISPATCHER PHONE #:

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE

DRIVER: Jorge Reyes (Driver's Name Printed) DRIVER'S SIGNATURE:

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One):

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

DATE: 12-18-23 TIME IN: 12:29 AM (PM)
TIME OUT: AM / PM

WASHOUT BY:
WASHOUT: TIME IN: TIME OUT:

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: (Less than 50 MCE)

Shake Out:	1	2	3
H_2O			
S			

211138
#55

Gallon Test:

SERVICE NOTES:
I (Employee Service Name) hereby certify that I received the above described waste, it has passed all acceptance testing at this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE:

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agents Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0260361

Part 1 - Generator

COMPANY NAME: Permian Resources DATE: 12/18/23
LEASE: Jalapeño 3BP CDEV-H 11845 PHONE: _____
AFE #: _____ API: 30-025-49935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea co NM

QUANTITY: _____ ☐ BBLS
20 ☒ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☒ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

(Print) Authorized Agent's Name: Montgomery Ford Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: TOMAHOK TRUCKING YARD #: _____ WHP #: _____ TRUCK #: 22
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Alonso Morales (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I, (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/18/23 TIME IN: 1029 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ less than 50 MCR

Shake Out:	1	2	3
H_2O			
S			

211139
Gallon Test: _____

SERVICE NOTES:
This is to certify that: Jazmin Employee (Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0260363

Part 1 - Generator

COMPANY NAME: Premier Resources DATE: _____
LEASE: Jalapeño 3BP COEV-H 1845 PHONE: _____
AFE #: _____ API: 30-025-49435
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☐ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

(Print) Authorized Agent's Name: Mont Gorman Date: 12/18/23 Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: SVF Transp weld YARD #: 20 WHP #: _____ TRUCK #: 09
ADDRESS: Po Box 1031 Loving TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____

DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Abel Velazquez (Driver's Name Printed) DRIVER'S SIGNATURE: Abel Velazquez

I, (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/18/23 TIME IN: 1:44 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 VCR)

Shake Out:	1	2	3
H_2O			
S			

211151

Gallon Test: _____

SERVICE NOTES:
This is to certify that: Anna Ly (Employee (Printed Name)) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0260364

Part 1 - Generator

COMPANY NAME: Permian Resources
LEASE: Jalapeño 3RP CDEV-H 11845
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

DATE: _____
PHONE: _____

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other:		Authorize Washout? ☐ Yes ☑ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations, and are not mixed with non-exempt waste. NOBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21- 261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Management Field Date _____ Signature _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: El Patio Trucking LLC
ADDRESS: _____
YARD #: 70 WHP #: _____ TRUCK #: 052
TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: 02

DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM
DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Alex Flores (Driver's Name Printed) DRIVER'S SIGNATURE: _____

"I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE"

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One):
☐ Northern Delaware Basin Landfill
7029 W. NM Highway 128 | Jal, New Mexico 88252

DATE: 12/18/23 TIME IN: 1:53 AM / PM
TIME OUT: _____ AM / PM

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H2O			
S			

Gallon Test: _____

211153

SERVICE NOTES:
This is to certify that: Amanda Lee (Employee Printed Name) has received the above indicated waste, waste has passed all acceptance testing at this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0260365

Part 1 - Generator

COMPANY NAME: Premier Services DATE: _____
LEASE: Jalapeno 3RP COEX-11 11845 PHONE: _____
AFE #: _____ API: 30-025-40435
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co. NM

QUANTITY: _____ ☐ BBLS ☒ YARDS
20

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☒ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other:		Authorize Washout?	☐ Yes ☒ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ MSDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Management Field Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: A.R.D.S. Trucking. YARD #: 20 WHP #: _____ TRUCK #: 03
ADDRESS: Hobbs N.M TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: 03

DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE

DRIVER: Lillian Sandoval (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-18-23 TIME IN: 1:56 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: 0 (Less than 50 MCF)

Shake Out:	1	2	3
H2O			
S			

Gallon Test: _____

#211154
#03

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptance testing criteria, facility and/or applicable laws allowing it to be accepted in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0260366

COMPANY NAME: Permian Resources
LEASE: Jalapeno 3RP COEV-H 11545
AFE #: _____ API: 30-025-50935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

DATE: _____
PHONE: _____
QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Part 1 - Generator

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☑ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Management Finds Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DJ Trucking Service YARD #: 20 WHP #: _____ TRUCK #: 220
ADDRESS: 520 S Burk St Hobbs TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Jaime Robles (Driver's Name Printed) DRIVER'S SIGNATURE: Jaime Robles

"AS TRANSPORTER, I CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE"

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/18/23 TIME IN: 2:02 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 PCR)

Shake Out:	1	2	3
H_2O			
S			

211155

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ has received the above indicated waste, which has passed all acceptances testing at this facility and the waste has been disposed of in an authorized manner at a permitted site.
Employee (Printed Name)

EMPLOYEE'S SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0260367

Part 1 - Generator

COMPANY NAME: Permian Resour
LEASE: Jalapeño 3RP CDEV-H 11845
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1 H
STATE & COUNTY ORIGIN: Lea co NM

DATE: _____
PHONE: _____
QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☐ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the U.S Environmental Protection Agency's July 1988 regulatory determination, the above described waste is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form).

Print Authorized Agent's Name: Montgomery Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DJ Truck Service YARD #: 20 WHP #: _____ TRUCK #: 932
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE"

DRIVER: Edgar Guerrero (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I, (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-18-23 TIME IN: 2:02 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H2O			
S			

Gallon Test: _____

211156
832

SERVICE NOTES:
This is to certify that: _____ (Employee's Printed Name) has received the above listed solid waste, waste has passed all acceptance testing of this facility, waste has not been disposed of or authorized agent at a point of each.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0260368

Part 1 - Generator

COMPANY NAME: Permian Resources — DATE: 12-18-23
LEASE: Lalapeno 3BP COEV-H 11845 — PHONE: 575 441
AFE #: _____ API: 30-025-40435
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co, NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☑ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Montgomery Reed Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Hosanna Services LLC — YARD #: _____ WHP #: _____ TRUCK #: 46
ADDRESS: 721 W Birch Lovington NM — TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: Beam

DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Angel Salado (Drivers Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-18-23 TIME IN: 2:06 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 30 MCR)

Shake Out:	1	2	3
H_2O			
S			

211158
#46
Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has inspected the above indicated solid waste, has passed all acceptance testing criteria and the waste has been directed to the authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White: Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agents Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0260369

Part 1 - Generator

COMPANY NAME: Freman Resource
DATE: 12/18/23
LEASE: Jalapeño 3BP CDEV-H 11845
PHONE: _____
AFE #: _____ API: 30-025-49935
QUANTITY: _____ ☐ BBLS
RIG NAME: _____ WELL #: 1H
20 ☑ YARDS
STATE & COUNTY ORIGIN: Lea co NM

Waste Description (check only one box)	☐ RCRA Exempt	☐ RCRA Non-Exempt	
☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☒ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

(Print) Authorized Agent's Name: Management Team Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Tome Hack Trucking YARD #: _____ WHP #: _____ TRUCK #: 22
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Alonso Morales (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I, (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One):
DATE: 12-18-23 TIME IN: 2:20 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: ~~PASS~~ FAIL N/A
TCLP: PASS FAIL ~~N/A~~
TOX: PASS FAIL ~~N/A~~

NORM TESTING: P (Less than 52 MCR)

Shake Out: 1 2 3 — H2O: NA — S:

211162

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee (Printed Name)) has received the above indicated waste, waste has passed all acceptances testing of the facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: Judy R

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0260370

Part 1 - Generator

COMPANY NAME: Permian Resources DATE: 12/18/23
LEASE: Jakpeau 3RP CTB-V-H 11845 PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☑ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON OILFIELD: Emergency non hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Management Consultant Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: TOMAHAWK Trucking CARD #: _____ WHP #: _____ TRUCK #: 55
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____

DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Jorge Reyes (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I, (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-18-23 TIME IN: 2:22 AM (PM) TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

#211164
#55
Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee's Printed Name) has received the above indicated waste, waste has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner and permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

6/27/24, 11:19 AM Image.aspx (800×1035)

OWL Landfill Services, LLC
(DBA: Northern Delaware Basin Landfill)
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0260371

Part 1 - Generator

COMPANY NAME: Prenar Resources DATE: _____
LEASE: Jalapeno 3RP CDEV-H 11845 PHONE: _____
AFE #: _____ API: 30-025-40435
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate item's as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order documentation of non-hazardous waste determination and a description of that waste must accompany this form).

Print Authorized Agent's Name: Management Team Date: 12/18/23 Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: JPR Transp Welding YARD #: 20 WHP #: _____ TRUCK #: 09
ADDRESS: PO Box 1031 Lovington TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE"

DRIVER: Noel Velazquez (Driver's Name Printed) DRIVER'S SIGNATURE: Noel Velazquez

I, (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-19-23 TIME IN: 3:39 AM (PM)
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: 1 (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

#211187
#09
Gallon Test: _____

SERVICE NOTES
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, which has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

https://weighnavonline.com/Image.aspx?ImageType=TicketItemImage&ImageId=30886890 1/1
Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

6/27/24, 11:20 AM Image.aspx (800×1035)

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0260373

Part 1 - Generator

COMPANY NAME: Permian Resources
LEASE: Jalapeno 3RP CDEV-H 11845
AFE #: _____ API: 30025-40955
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co, NM

DATE: _____
PHONE: _____

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

Hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the U.S. Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oil field wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided):

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form).

Print Authorized Agent's Name: Montgomery Boyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: ARS Trucking YARD #: 20 WHP #: _____ TRUCK #: 03
ADDRESS: Hobbs N.M TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: 03

DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:

I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: William Sandoval (Driver's Name Printed) DRIVER'S SIGNATURE: _____

A (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One):

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

DATE: 12-18-23 TIME IN: 3:55 AM / PM
TIME OUT: _____ AM / PM

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: 1 (Less than 50 MCP)

Shake Out:	1	2	3
H_2O			
S			

211192 #03

Gallon Test: _____

SERVICE NOTES:
Tank Cleaned By (If Not): _____ Employee Printed Name: _____

I hereby certify that the above listed waste was received at the facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

https://weighpayonline.com/Images.aspx?ImageType=TicketItemImage&ImageId=30887165 1/1
Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0260374

Part 1 - Generator

COMPANY NAME: Premier Resources
LEASE: Johnson 3RP COEV-H 11345
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

DATE: _____
PHONE: _____
QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box)	☐ RCRA Exempt	☐ RCRA Non-Exempt	
☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☑ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agents Name: Montgomery Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DJ Truck Service YARD #: 20 WHP #: _____ TRUCK #: 220
ADDRESS: 520 S Gurley Hobbs NM TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE"

DRIVER: Jaime Robles (Driver's Name Printed) DRIVER'S SIGNATURE: Jaime Robles

"I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE"

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One):
☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

DATE: 12-18-23 TIME IN: 3:59 AM / PM TIME OUT: _____ AM / PM

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

Gallon Test: _____

211193
#220

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above listed oilfield waste, waste has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0260372

COMPANY NAME: Premier Resources DATE: 12-18-23
LEASE: Jalapeno 3RP CDEV-H 11845 PHONE: _____
AFE #: _____ API: 30-025-46955
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
2cc ☐ YARDS

Part 1 - Generator

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☐ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21, 261.24, or listed hazardous waste as defined by 40 CFR part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Mount Solomon Town Date _____ Signature _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: El Pato Trucking LLC YARD #: 20 WHP #: _____ TRUCK #: 602
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: 02
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Alex Flores (Driver's Name Printed) DRIVER'S SIGNATURE: _____

"I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE"

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/18/23 TIME IN: 4:00 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 UCR)

Shake Out:	1	2	3
H_2O			
S			

#211194

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptance testing of this facility and the waste has been accepted in an authorized manner at permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: (Authorized Agent's Printed Name and Title)
SIGNATURE:
COMPANY MAN EMAIL:
COMPANY MAN PHONE:

MANIFEST # 0260375

Part 1 - Generator

COMPANY NAME: Permian Resources
DATE: 12-18-23
LEASE: Jalapeno 3FH CDEV-1H 11845
PHONE: 5754416073
AFE #: API: 30-025-46435
RIG NAME: WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: ☐ BBLS ☑ YARDS
20

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Big Trash	☐ Pit Liners		
☐ Other		Authorize Washout?	☐ Yes ☑ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non exempt waste. NDBL Accepts certification on a per load basis only.

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Plains generator Date: Signature:

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Hosanna Services LLC YARD #: WHP #: TRUCK #: 46
ADDRESS: 721 W Bitch Lovington NM TICKET #: ROLL OFF BIN #: TRAILER #: B-2117

DATE RECEIVED: TIME RECEIVED: ☐ AM ☐ PM DISPATCHER NAME: DISPATCHER PHONE #:

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Angel Salido (Driver's Name Printed) DRIVER'S SIGNATURE:

"I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE"

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-18-23 TIME IN: 4:02 AM / PM
TIME OUT: AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY:
WASHOUT: TIME IN: TIME OUT:

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: Less than 50 MCR

Shake Out:	1	2	3
H_2O			
S			

Gallon Test:

#2 21145
#46

SERVICE NOTES:
This is to certify that: (Employee's Printed Name) has received the above indicated waste, waste has been unloaded at this facility and the waste has been disposed of in an authorized manner and permitted site.

EMPLOYEE SIGNATURE:

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0282051

Part 1 - Generator

COMPANY NAME: Premian Resources
LEASE: Jalapeño 3RP CDEV-# 11845
AFE #: _____ API: 30-025-40925
RIG NAME: Lea co. NM WELL #: 1H
STATE & COUNTY ORIGIN: Lea co. NM
DATE: _____
PHONE: _____
QUANTITY: _____ ☐ BBLS ☒ YARDS (20)

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☒ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Wash	☐ Pit Liners		
☐ Other _____		Authorize Washout?	☐ Yes ☒ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOTE: Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Management Ford Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DJ truck services YARD #: 20 WHP #: _____ TRUCK #: 832
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:

I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Edgar Cuevecco (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One):

☐ Northern Delaware Basin Landfill
20/30 W. NM Highway 128 | Jal, New Mexico 88252

DATE: 12/18/23 TIME IN: 4:04 AM / PM TIME OUT: _____ AM / PM

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCPI)

Shake Out:	1	2	3
H_2O			
S			

211960

Gallon Test: _____

SERVICE NOTES: _____

This is to certify that: Anna (Employee Printed Name) has received the above indicated waste, waste has passed all acceptance testing at this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0282053

Part 1 - Generator

COMPANY NAME: Premier Resources
DATE: 12/18/23
LEASE: Jalapeño 3RP CDEV-H 11845
PHONE: _____
AFE #: _____
API: 30-025-40935
RIG NAME: _____
WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co, NM
QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate class first one):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOBL Accepts certifications on a per load basis only)

☐ RCRA NON EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety: the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form.

Generator Authorized Agent's Name: management Fluid Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Tomahawk Trucking YARD #: _____ WHP #: _____ TRUCK #: 55
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN #: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Jorge Rojo (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEE

FACILITY RECEIVED AT (Check One): DATE: 12/08/23 TIME IN: 4:08 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2079 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: ~~PASS~~ FAIL N/A
TCLP: PASS FAIL ~~N/A~~
TOX: PASS FAIL ~~N/A~~

NORM TESTING: 9 (Less than 50 pCi/g)

Shake Out:	1	2	3
H_2O			
S			

211197

Gallon Test: _____

SERVICE NOTES
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, which has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner and permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:43:13 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0282052

Part 1 - Generator

COMPANY NAME: Permian Resources
DATE: 12/18/23
LEASE: Jalapeño 3RP CDEV-H 11845
PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Big Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☒ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NORL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of the waste must accompany this form)

Print Name of Person Signing: mantgorment Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Jomamck Truck, LLC YARD #: _____ WHP #: _____ TRUCK #: 22
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE"

DRIVER: Alonso Morales (Driver's Name Printed) DRIVER'S SIGNATURE: _____

"TRANSPORTER, CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE"

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-19-23 TIME IN: 4:05 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
3039 N.M Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

Gallon Test: _____

12/11/23 #22

SERVICE NOTES:
This is to certify that _____ (Employee Printed Name) has received the above listed waste, has performed all acceptance testing prior to acceptance of the waste, and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0282054

Part 1 - Generator

COMPANY NAME: Premian Resources
DATE: _____
LEASE: Jalapeno 3Rp CDEV-H 11545
PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co, NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non exempt waste (NOBL Accepts certifications on a per load basis only)

☐ RCRA NON EXEMPT: Oilfield waste which is non hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrates the waste as non-hazardous is attached: (Check the appropriate items as provided)
☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non hazardous, non oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non hazardous waste determination and a description of that waste must accompany this form)

Printed Name of Agent: Montgomery Field Date: 12/18/23 Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: JJR Transport well YARD #: 20 WHP #: _____ TRUCK #: 09
ADDRESS: PO Box 1031 Lovington TICKET #: _____ ROLL OFF BIN #: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:

I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE

DRIVER: Abel Velazquez (Driver's Name Printed) DRIVER'S SIGNATURE: Abel Velazquez

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One):

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

DATE: 12-19-23 TIME IN: 5:25 AM / PM
TIME OUT: _____ AM / PM

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCA)

Shake Out:	1	2	3
H_2O			
S			

#211315
#09

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0282055

Part 1 - Generator

COMPANY NAME: Permian Resources
DATE: _____
LEASE: Jalapeño 3RP CTB EV-H 11845
PHONE: _____
AFE #: _____ API: 30-025-40935
QUANTITY: _____ ☐ BBLS
RIG NAME: _____ WELL #: 1H
20 ☑ YARDS
STATE & COUNTY ORIGIN: Lea Co, NM

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only).

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristic as established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form).

Print Authorized Agent's Name: Montgomery Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DJ TRUCK SERVICE YARD #: 22 WHP #: _____ TRUCK #: 220
ADDRESS: 5202 S Burk St Hobbs TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Jaime Robles (Driver's Name Printed) DRIVER'S SIGNATURE: Jaime Robles

"TRANSPORTER: I CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE"

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-18-23 TIME IN: 5:39 AM (PM)
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ Less than 50 MCR!

Shake Out:	1	2	3
H_2O			
S			

Gallon Test: _____

12/18/23 #220

SERVICE NOTES:
This is to certify that _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:43:13 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0282056

Part 1 - Generator

COMPANY NAME: Premian Resources
LEASE: Jalapeño 3RP CDEV-H 11845
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea co, NM

DATE: _____
PHONE: _____

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste (part A) meets the appropriate classification:

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is more hazardous than does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Explain Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Mantgarment Fiend Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: ARBS Truckins
ADDRESS: Hobbs N.M
YARD #: 20 WHP #: _____ TRUCK #: C3
TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: 03

DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM
DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE

DRIVER: William Sandoval (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I, THE TRANSPORTER, CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT: (Check One)
☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

DATE: 12-18-23 TIME IN: 5:42 AM / PM
TIME OUT: _____ AM / PM

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ Less than 50 MCR

Shake Out:	1	2	3
H_2O			
S			

211225 #03

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0282057

COMPANY NAME: Permian Resources
DATE: 12-18-23
LEASE: Jalapeño 3RP CDEV-H 11645
PHONE: _____
AFE #: _____ API: 30-025-40935
QUANTITY: _____ ☐ BBLS
RIG NAME: _____ WELL #: 1H
20 ☑ YARDS
STATE & COUNTY ORIGIN: _____

Part 1 - Generator

Waste Description (check only one box) ☐ RCRA Exempt: ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☐ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON EXEMPT: Oilfield waste which is non hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non oilfield waste that has been approved by the Department of Public Safety (the under documentation of non hazardous waste determination and a description of that waste must accompany this form).

Print Authorized Agents Name: Montgomery Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: El Patio Trucking YARD #: 20 WHP #: _____ TRUCK #: 002
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: 02
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Alex Flores (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-18-23 TIME IN: 5:47 AM (PM)
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: ✓ (Less than 50 MCF)

Shake Out:	1	2	3
H_2O			
S			

#211227
#002

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above listed waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0282058

Part 1 - Generator

COMPANY NAME: Permian Resources
LEASE: Jalapeño 3RP CDEV-H 11845
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea co NM

DATE: _____
PHONE: _____

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached: (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Generator or Authorized Agent's Name: Mantgorment Flood Title: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Ditch YARD #: 20 WHP #: _____ TRUCK #: 832
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE"

DRIVER: Edgar Guerrero (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I, (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-18-23 TIME IN: 5:50 AM PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: ~~PASS~~ FAIL N/A
TOX: PASS FAIL ~~N/A~~

NORM TESTING: ✓ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

H211229
H832

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:15 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0282059

Part 1 - Generator

COMPANY NAME: Prendaa Services
DATE: 12-18-23
LEASE: Jalapeño 3RP CDEV-H11848
PHONE: 5754416073
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea cy NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☐ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the U.S Environmental Protection Agency's July 1988 regulatory determination, the above-described waste is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOTE: Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached: (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EXEMPT NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorize Agent's Name: Montgomery Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Ha Sonna Services LLC YARD #: _____ WHP #: _____ TRUCK #: 46
ADDRESS: 721 W Birch Lovington NM. TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: Belly

DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIALS DESCRIBED IN PART 1 ABOVE"

DRIVER: Angel Sueldo (Driver's Name Printed) DRIVER'S SIGNATURE: _____

"AS TRANSPORTER, I CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE"

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One):
DATE: 12-19-23 TIME IN: 5:53 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: 12 (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

211231
#46

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptance testing of this facility and the waste has been disposed of in an authorized receiver or a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
(DBA Northern Delaware Basin Landfill)
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST: 0282060

Part 1 - Generator

COMPANY NAME: Premian Resources
LEASE: Jalapeno 3RP ~~CDEV-H~~ CDEV-H 11845
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

DATE: 12/18/23
PHONE: _____

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☒ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the U.S. Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics as established in RCRA regulations, 40 CFR 261.21 - 261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Generator Agent Name: Management Good Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: COMANCHE TRUCKING YARD #: _____ WHP #: _____ TRUCK #: 22
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE

DRIVER: Alonso Moraces (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One):
☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

DATE: 12-18-23 TIME IN: 5:56 AM (PM)
TIME OUT: _____ AM / PM

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

211252
#22

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above referenced waste, waste has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0282061

Part 1 - Generator

COMPANY NAME: Permian Resources DATE: 12/18/23
LEASE: Jalapeno 3RP COEV-H 11845 PHONE: _____
AFE #: _____ API: 30-025
RIG NAME: _____ WELL #: 4H
STATE & COUNTY ORIGIN: Lea co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOEL Accepts certificate of non-exempt waste only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency clean hazardous non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Generator Agent Name: Montgomery Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: TOMAHAWK Trucking BID #: _____ WHP #: _____ TRUCK #: 55
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: George Boyce (Driver's Name Printed) DRIVER'S SIGNATURE: _____

"I TRANSPORTER CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE"

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-18-23 TIME IN: 5:59 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: 2 (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

Gallon Test: _____

211233
#55

SERVICE NOTES:
This is to certify that _____ (Employee Printed Name) has received the above drilling and waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0282062

Part 1 - Generator

COMPANY NAME: Prevas Resources
LEASE: Jalapeño 3BP CDEV-H 11845
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea co, NM

DATE: _____
PHONE: _____

QUANTITY: _____ ☐ BBLS
20 ☐ YARDS

Waste Description (check only one box)	☐ RCRA Exempt	☐ RCRA Non-Exempt	
☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☐ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Montgomery Flood Date: 12/19/23 Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: J&R Transp Weld YARD #: 20 WHP #: _____ TRUCK #: 09
ADDRESS: PO Box 1031 Lovington TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Abel Velasquez (Driver's Name Printed) DRIVER'S SIGNATURE: Abel V.

"I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE"

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/19/23 TIME IN: 8:54 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: 15 (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

211336

Gallon Test: _____

SERVICE NOTES:
This is to certify that: Amanda V. (Employee Printed Name) has received the above indicated waste, waste has passed all acceptances testing at my facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0282063

Part 1 - Generator

COMPANY NAME: Permian Resources
DATE: _____
LEASE: Jalapeño 3RD CDEV-H 11845
PHONE: _____
AFE #: _____ API: 30-025-40935
QUANTITY: _____ ☐ BBLS
RIG NAME: _____ WELL #: 1H
20 ☑ YARDS
STATE & COUNTY ORIGIN: Lea Co. NM

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the U.S Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Montgomery Field Date _____ Signature _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DJ Trucking Services YARD #: 20 WHP #: _____ TRUCK #: 832
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Edgar Guerrero (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I, (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/19/23 TIME IN: 904 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: P (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

211340 Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0282064

Part 1 - Generator

COMPANY NAME: Premian Resources — DATE: 12-19-23
LEASE: Jalapeño 3RP COEV-H 11845 — PHONE: 5754416073
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co, NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Montgomery Floyd — Date _____ Signature _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Hosanna Services LLC — YARD #: _____ — WHP #: _____ — TRUCK #: 416
ADDRESS: 721 W Birch Lovington NM — TICKET #: _____ — ROLL OFF BIN#: _____ — TRAILER #: Benq
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM — DISPATCHER NAME: _____ — DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I (DRIVER) TO THE BEST OF MY KNOWLEDGE NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIALS DESCRIBED IN PART 1 ABOVE"

DRIVER: Angel Salcido — DRIVER'S SIGNATURE: AS
(Driver's Name Printed)
"I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE"

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/19/23 — TIME IN: 909 AM / PM — TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A; TCLP: PASS FAIL N/A; TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:		
1	2	3
H2O		
S		

Gallon Test: 21341

SERVICE NOTES:
This is to certify that: Jazmin Employee (Printed Name) has received the above indicated waste, waste has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Received by OCD: 9/20/2024 8:26:56 AM
6/27/24, 11:25 AM
Image.aspx (800×1035)

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0282065

Part 1 - Generator

COMPANY NAME: Permian Resources
LEASE: Jalapeño 3RP CDEV – H 11845
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co, NM

DATE: _____
PHONE: _____
QUANTITY: _____ ☐ BBLS ☑ YARDS (20)

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☐ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the maximum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Authorized Agent's Name: Montgomery Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DJ Truck Services YARD #: 20 WHP #: _____ TRUCK #: 220
ADDRESS: 520 S Burk St Hobbs NM TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Jaime Robles (Driver's Name Printed) DRIVER'S SIGNATURE: Jaime Robles

I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One):

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

DATE: 12/19/23 TIME IN: 9:12 AM / PM TIME OUT: _____ AM / PM

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A; TCLP: PASS FAIL N/A; TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

Gallon Test: 211344

SERVICE NOTES:
This is to certify that: _____ (Employee (Printed Name)) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

https://weighmasteronline.com/Image.aspx?ImageType=TicketItemImage&ImageId=30890217
Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0282066

Part 1 - Generator

COMPANY NAME: Premian Resources DATE: 12/19/23
LEASE: Jalapeño 3RP CDEV-H 11845 PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☑ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification):

☐ RCRA EXEMPT: Oil field wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Montgorment Fivud Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Tomahawk Trucking YARD #: _____ WHP #: _____ TRUCK #: 55
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Jorge Reyes (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/19/23 TIME IN: 914 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 µR/h)

Shake Out:	1	2	3
H_2O			
S			

211346
Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ Employee (Printed Name) has received the above indicated waste, waste has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0282067

Part 1 - Generator

COMPANY NAME: Permian Resources DATE: 12/19/23
LEASE: Jalapeño 3BP CDEV-H 11645 PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea co, NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box)	☐ RCRA Exempt	☐ RCRA Non-Exempt	
☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☒ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agents Name: Montgomery Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Tomahawk Trucking YARD #: _____ WHP #: _____ TRUCK #: 22
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Alonso morales (Driver's Name Printed) DRIVER'S SIGNATURE: _____

"I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE"

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/19/23 TIME IN: 917 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

211348
Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0282068

Part 1 - Generator

COMPANY NAME: Premian Resuler
DATE: 12-19-23
LEASE: Jalapeño 3MP CDEV-H 11845
PHONE: _____
AFE #: _____ API: 30-025-40935
QUANTITY: _____ ☐ BBLS
RIG NAME: _____ WELL #: 1 H
20 ☐ YARDS
STATE & COUNTY ORIGIN: Lea co NM

Waste Description (check only one box)	☐ RCRA Exempt	☐ RCRA Non-Exempt	
☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is/are the appropriate classification:

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Name of Agent's Name: Montgomery Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: El Patro Trucking LLC YARD #: 20 WHP #: _____ TRUCK #: 902
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: 07
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Alex Flores (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/19/23 TIME IN: 922 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: Less than 50 MCR

Shake Out:	1	2	3
H_2O			
S			

211352
Gallon Test: _____

SERVICE NOTES:
This is to certify that: Employee (Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0282069

Part 1 - Generator

COMPANY NAME: Premier Resources
DATE: 12-19-23
LEASE: Jalapeño 3RP CDEV-H11845
PHONE: _____
AFE #: _____ API: 30-025-40956
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other		Authorize Washout? ☐ Yes ☑ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of the waste must accompany this form)

Print Authorized Agent's Name: Montgomery Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: ARBJ Trucking YARD #: _____ WHP #: _____ TRUCK #: 03
ADDRESS: Hobbs NM TICKET #: _____ ROLL OFF BIN #: _____ TRAILER #: 03

DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE"

DRIVER: William Sandoval (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-19-23 TIME IN: 9:54 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: ~~PASS~~ FAIL N/A
TCLP: PASS FAIL ~~N/A~~
TOX: PASS FAIL ~~N/A~~

NORM TESTING: P (Less than 50 MCR)

Shake Out:	1	2	3
H_2O	N/A		
S			

211358

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Received by OCD: 9/20/2024 8:26:56 AM
6/27/24, 11:29 AM
Image.aspx (800×1035)
Page 1178 of 1291

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Approved Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST #
0282071

Part 1 - Generator

COMPANY NAME: Permian Resource — DATE: 12-19-23
LEASE: Jalapeño 3RP COEV-H 11845 — PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box)	☐ RCRA Exempt	☐ RCRA Non-Exempt	
☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners	Authorize Washout?	☐ Yes ☑ No
☐ Other: _____			

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the U.S. Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (check one option in each section):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOBL Accepts certifications on a per load basis only)

☐ RCRA NON EXEMPT: Oilfield waste which is non-hazardous that does not exceed the maximum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ MSDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Non-Oilfield Waste Name: Mont garment Food Date: 12/19/23 Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: SYR Transp weld YARD #: 20 WHP #: _____ TRUCK #: 09
ADDRESS: Po box 1031 Lovington TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☑ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Noel Velazquez (Driver's Name Printed) DRIVER'S SIGNATURE: Noel Velazquez

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One):
DATE: 12-19-23 TIME IN: 10:08 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: ~~PASS~~ FAIL N/A
TCLP: PASS FAIL ~~N/A~~
TOX: PASS FAIL ~~N/A~~

NORM TESTING: P (Less than 50 pCi)

Shake Out:	1	2	3
H2O	N/A		
S			

21371

Gallon Test: _____

SERVICE NOTES
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptance testing at this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

https://weighnavonline.com/Image.aspx?ImageType=TicketItemImage&ImageId=30891832 1/1
Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM
6/27/24, 11:29 AM
Image.aspx (800×1035)

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0282073

Part 1 - Generator

COMPANY NAME: Permian Resources
DATE: 12-19-23
LEASE: Jalapeño 3RP COEV-11845
PHONE: 575 441 6073
AFE #: _____
API: 30-025-40935
RIG NAME: _____
WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Wash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☑ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOW). Accepts fabrications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261 subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety. The order, documentation of non-hazardous waste determination and a description of that waste must accompany this form.

Generator Printed Name: Montgomery Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Hosanna Services LLC YARD #: _____ WHP #: _____ TRUCK #: 46
ADDRESS: 721 W Birch Lovington NM TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: Benj

DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"THERE ARE NO OTHER MATERIALS HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIALS DESCRIBED IN PART 1 ABOVE."

DRIVER: Angel Salcido (Driver's Name Printed) DRIVER'S SIGNATURE: _____

"I AS TRANSPORTER, CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE"

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/19/23 TIME IN: 11:10 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 pCi/g)

Shake Out:	1	2	3
H_2O			
S			

Gallon Test: _____

211312

SERVICE NOTES
This is to certify that _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

https://weighmaxonline.com/Image.aspx?ImageType=TicketItemImage&ImageId=30891898
Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

6/27/24, 11:29 AM Image.aspx (800×1035)

OWL Landfill Services, LLC
(fka Northern Delaware Basin Landfill)
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0282072

Part 1 - Generator

COMPANY NAME: Premian Resources DATE: 12-19-23
LEASE: Jalapeño 3RP CDEV-H 11845 PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1 H
STATE & COUNTY ORIGIN: Lea co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I, _____ (print name), certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's June 1988 regulatory determination, the above described waste is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOEL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oil field waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-HAZ LIQUID: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Authorized Third Party Name: Mantgarment Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DJ Truck Services YARD #: 20 WHP #: _____ TRUCK #: 832
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN #: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Edgar Cisneros (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT: (Check One) DATE: 12-19-23 TIME IN: 11:12 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: P (Less than 50 uR/h)

Shake Out:

	1	2	3
H_2O	N/A		
S			

211323

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee's Printed Name) has received the above indicated waste, waste has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

https://weblogscanning.com/images.aspx?ImageType=TicketItemImage&ImageId=30891895 1/1
Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM
8/27/24: 11:30 AM
Image.aspx (800×1035)

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST #
0282074

Part 1 - Generator

COMPANY NAME: Permian Resources
DATE: _____
LEASE: Jalapeño 3RP CDEV-H 11845
PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other:		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste is non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Montgomery Ford Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DJ Truck Services YARD #: 20 WHP #: _____ TRUCK #: 220
ADDRESS: 5205 Burk st Hobbs NM TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Jaime Robles (Driver's Name Printed) DRIVER'S SIGNATURE: Jaime Robles

"I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE"

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/19/23 TIME IN: 1115 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS / FAIL / N/A
TCLP: PASS / FAIL / N/A
TOX: PASS / FAIL / N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
5			

211374
Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.
Employee (Printed Name)
EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

https://webhosting.ipline.com/Image.aspx?ImageType=TicketItemImage&ImageId=30891923 1/1
Released to Imaging: 12/18/2024 7:43:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0284753

Part 1 - Generator

COMPANY NAME: Permian Resource
DATE: 12/19/23
LEASE: Jalapeño 3RP CDEV-H 11845
PHONE: _____
AFE #: _____ API: 30-025-40925
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☒ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorizing Agent's Name: Management Fluid Date _____ Signature _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Tomahawk Trucking YARD #: _____ WHP #: _____ TRUCK #: 22
ADDRESS _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART I ABOVE.

DRIVER: Alonso Morales (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/19/23 TIME IN: 11:10 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less Than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

21375

Gallon Test: _____

SERVICE NOTES:
This is to certify that: Dynamy (Employee (Printed Name)) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:43:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0282075

Part 1 - Generator

COMPANY NAME: Premier Resources
DATE: 12/19/23
LEASE: Jalapeño 3RP CDEV-H 11845
PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Montgomery Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: TOMAHAWK Trucking YARD #: _____ WHP #: _____ TRUCK #: 55
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Jorge Reyes (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I, (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/19/23 TIME IN: 1118 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: Less than 50 yes

Shake Out:	1	2	3
H_2O			
S			

211376 Gallon Test: _____

SERVICE NOTES:
This is to certify that: Employee (Printed Name)
EMPLOYEE SIGNATURE: _____ has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:43:13 AM

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0284755

Part 1 - Generator

COMPANY NAME: Premian Resources
DATE: _____
LEASE: Jalapeño 3RP CDEV-H 11845
PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided):

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

(Print) Authorized Agent's Name: Mantgurmeet Eibud Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: AR&S Trucking YARD #: 20 WHP #: _____ TRUCK #: 03
ADDRESS: Hobbs. N.M TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: 03
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: William Sandoval (Driver's Name Printed) DRIVER'S SIGNATURE: _____

"I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/19/23 TIME IN: 1120 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A; TCLP: PASS FAIL N/A; TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

211378 Gallon Test: _____

SERVICE NOTES:
This is to certify that: Jazmine C (Employee (Printed Name)) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0284754

COMPANY NAME: Permian Resources DATE: 12-19-23
LEASE: Jalapeño 3RP CPEV-H 11845 PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Part 1 - Generator

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners	Authorize Washout? ☐ Yes	☑ No
☐ Other: _____			

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Montgomery Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: El Patro trucking LLC YARD #: 20 WHP #: _____ TRUCK #: 002
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: 02
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Alex Flores (Driver's Name Printed) DRIVER'S SIGNATURE: _____

"I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE"

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/19/23 TIME IN: 1125 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A; TCLP: PASS FAIL N/A; TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

211380 Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee (Printed Name)) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0284756

Part 1 - Generator

COMPANY NAME: Premier Resources DATE: 12-19-23
LEASE: Jalapeño 3RP CDEV-H 11845 PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☑ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the U.S. Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (check the appropriate classification):

☐ RCRA EXEMPT: Oil field wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oil field waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste is non-hazardous is attached. (Check the appropriate items as provided)

☐ MSDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ AUTHORIZED BY NDBL OFFICIAL: Emergency non-hazardous, non-oil field waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Authorized Agent's Name: Montgomery Floyd Date: 12/18/23 Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Spt Transp Weld. YARD #: 20 WHP #: _____ TRUCK #: 09
ADDRESS: PO box 0051 Longmont MARKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Abel Velazquez (Driver) Name (Printed) DRIVER'S SIGNATURE: Abel Velazquez

I, THE DRIVER, CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE.

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-19-23 TIME IN: 1:15 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: (Less than 50 MCR)

Shake Out:

	1	2	3
H_2O	N	N	
S			

211407

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Received by OCD: 9/20/2024 8:26:56 AM
6/27/24, 11:31 AM Image.aspx (800×1035)
Page 1187 of 1291

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0284757

Part 1 - Generator

COMPANY NAME: Premian Rc
LEASE: Jalapeño 3RP CDEV-H 11845
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co, NM

DATE: _____
PHONE: _____

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protect on Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print/Authorize Agent's Name: Mantgurment Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: D J truck Service YARD #: 20 WHP #: _____ TRUCK #: 832
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Edgar Guerrero (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/19/23 TIME IN: 1:21 AM (PM) TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: (PASS) FAIL N/A
TCLP: PASS FAIL (N/A)
TOX: PASS FAIL (N/A)

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:		
1	2	3

H_2O S

211410 Gallon Test: _____

SERVICE NOTES:
This is to certify that: Zachary (Employee (Printed Name)) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

https://wellbhpnonline.com/Image.aspx?ImageType=TicketItemImage&ImageId=30894043 1/1
Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0284758

Part 1 - Generator

COMPANY NAME: Permian Resources — DATE: 12-19-23
LEASE: Jalapeño 31H CDEP-H 11545 — PHONE: 5754410073
AFE #: _____ API: 30-025-40975
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

- ☐ Water Based Cuttings (DRY)
- ☐ Oil Based Cuttings (DRY)
- ☐ Oil Base Mud
- ☐ Rig Trash
- ☐ Other: _____
- ☐ Water Based Cuttings (WET)
- ☐ Oil Based Cuttings (WET)
- ☐ Water Base Mud
- ☐ Pit Liners
- ☑ Contaminated Soil
- ☐ Injectable Fluids
- ☐ Muds w/Cement
- ☐ Produced Sands
- ☐ Non-Injectable Fluids
- ☐ Tank Bottoms

Authorize Washout? ☐ Yes ☐ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOBI Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21, 261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON OILFIELD: Emergency non-hazardous, non oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Montgomery Field Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: HoSanna Services LLC — YARD #: _____ WHP #: _____ TRUCK #: 46
ADDRESS: 721 W Birch. Lovington NM — TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: Belly
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:

I CERTIFY THAT NO OTHER MATERIALS HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIALS DESCRIBED IN PART 1 ABOVE

DRIVER: Angel Salcido (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/19/23 TIME IN: 1124 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: 1 (Less than 50 MCR)

Shake Out:

	1	2	3
H_2O			
S			

Gallon Test: 21412

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:43:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0284760

Part 1 - Generator

COMPANY NAME: Permian Resources
DATE: _____
LEASE: Jalapeño 3RP CDEV-H 11845
PHONE: _____
AFE #: _____
API: 30-025-49935
RIG NAME: _____
WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box)	☐ RCRA Exempt	☐ RCRA Non-Exempt	
☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☐ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

(Print) Authorized Agent's Name: Montgomery Flood Date _____ Signature _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Tomahawk Trucking YARD #: _____ WHP #: _____ TRUCK #: 55
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Jorge Ruiz (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I, (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/19/23 TIME IN: 1:27 AM (PM)
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

2/14/13
Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee (Printed Name)) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST #
0284759

Part 1 - Generator

COMPANY NAME: Permian Resources
DATE: _____
LEASE: Jalapeño 3RP CDEV-H 11845
PHONE: _____
AFE #: _____ API: 30-025-40935
QUANTITY: _____ ☐ BBLS
RIG NAME: _____ WELL #: 1H
20 ☑ YARDS
STATE & COUNTY ORIGIN: Lea Co, NM

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided.)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Montgomery Flood Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DJ Trucking Services YARD #: 20 WHP #: _____ TRUCK #: 220
ADDRESS: 5205 Bourke St Hobbs NM TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Jaime Robles (Driver's Name Printed) DRIVER'S SIGNATURE: Jaime Robles

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/19/23 TIME IN: 1:30 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: 0 (Less than 50 MCR)

Shake Out:

	1	2	3
H_2O			
S			

211415
Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee (Printed Name)) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0284761

COMPANY NAME: Premium Resources — DATE: 12-19-23
LEASE: Cabrito 3RP CDEV-H 11845 — PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: 12/19/23 — ☐ BBLS — 20 — ☑ YARDS

Part 1 - Generator

Waste Description (check only one box) — ☐ RCRA Exempt — ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☒ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certification on a per load basis only).

☐ RCRA NON EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided):

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form).

Non-Exempt Agent's Name: Montgomery Flood — Date: _____ — Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Tommy Trucking — YARD #: _____ — WHP #: _____ — TRUCK #: 22
ADDRESS: _____ — TICKET #: _____ — ROLL OFF BIN #: _____ — TRAILER #: _____
DATE RECEIVED: _____ — TIME RECEIVED: _____ ☐ AM ☐ PM — DISPATCHER NAME: _____ — DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIALS HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE

DRIVER: Nicolas Morales (Driver's Name Printed) — DRIVER'S SIGNATURE: _____
I CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): — DATE: 12-19-23 — TIME IN: 1:31 AM / PM — TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: ~~PASS~~ FAIL N/A; TCLP: PASS FAIL ~~N/A~~; TOX: PASS FAIL ~~N/A~~

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
$			

D11416

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility — Yellow: Transporter — Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0284762

COMPANY NAME: Percussion Resources DATE: 12-19-23
LEASE: Kilopeña 3RP CDEV-H 11845 PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co. NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Part 1 - Generator

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☑ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form).

Print & Authorized Agent's Name: Management Field Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: El Patio Trucking LLC YARD #: 20 WHP #: _____ TRUCK #: 002
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: 02

DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:

I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART I ABOVE

DRIVER: Alex Flores (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-19-23 TIME IN: 1:48 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: ~~PASS~~ FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: 0 (Less than 50 MCR')

Shake Out:

1	2	3
N/A		

H_2O
S

211420

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee (Printed Name)) has received the above indicated waste, waste has passed all acceptances testing at this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0282070

Part 1 - Generator

COMPANY NAME: Premain Resources — DATE: _____
LEASE: Jalapeño 3RP CDEV-H 11845 — PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Pig Trash	☐ Pit Liners		
☐ Other _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.20-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided.)

☐ SDS information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form).

Generator Representative: Montgomery Field Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: AR&J Trucking — YARD #: _____ WHP #: _____ TRUCK #: 03
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: 03

DATE RECEIVED: TIME RECEIVED: ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: William Sanchez (Driver's Name Printed) DRIVER'S SIGNATURE: _____

"I AS TRANSPORTER, CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE"

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/19/23 TIME IN: 1:49 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: 0 (Less than 30 MCR)

Shake Out:	1	2	3
H_2O			
S			

Gallon Test: _____

#211421

SERVICE NOTES:
This is to certify that: Amanda (Employee Printed Name)

I have received the above indicated waste, waste has passed all acceptance testing at this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0284764

Part 1 - Generator

COMPANY NAME: Permian Resources DATE: 12-19-23
LEASE: Jalapeño 3BP 6DEV-H 11845 PHONE: _____
AFE #: _____ API: 30-025-48935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☐ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristic as established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oil field waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Montgomery Ford Date: 12/19 Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: JyR Transport LLC YARD #: 20 WHP #: _____ TRUCK #: 004
ADDRESS: PO Box 1031 Loving, NM TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:

I CERTIFY THAT THE WASTE HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE

DRIVER: Abel Velazquez DRIVER'S SIGNATURE: Abel Velazquez
(Drivers Name Printed)
I CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-19-23 TIME IN: 3:12 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER ~~PASS~~ FAIL N/A
TCLP: PASS FAIL ~~N/A~~
TOX: PASS FAIL ~~N/A~~

NORM TESTING: 0 (Less than 50 MCR)

Shake Out:	1	2	3
H_2O	N/A		
S			

211442

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.
Employee (Printed Name)
EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0284765

Part 1 - Generator

COMPANY NAME: Pierson Reserves
DATE: 12-19-23
LEASE: Lalapeña 3RP COEV-1H 11645
PHONE: _____
AFE #: _____ API: 30-025-40935
QUANTITY: _____ ☐ BBLS
RIG NAME: _____ WELL #: 1H
20 ☑ YARDS
STATE & COUNTY ORIGIN: Lea Co NM

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other:		Authorize Washout?	☐ Yes ☑ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste listed is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261, 261-264, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Montgomery Flood Date _____ Signature _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DS truck services YARD #: 20 WHP #: _____ TRUCK #: 832
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Edgar Cervantes (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-19-23 TIME IN: 3:17 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: ~~PASS~~ FAIL N/A
TCLP: PASS FAIL ~~N/A~~
TOX: PASS FAIL ~~N/A~~

NORM TESTING: 5 (Less than 50 MCR)

Shake Out:

	1	2	3
H_2O	NA		
S			

211444

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ Employee (Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

6/27/24, 12:41 PM Image.aspx (800×1035)

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0284766

Part 1 - Generator

COMPANY NAME: Permian Resources
DATE: 12-19-23
LEASE: Jalapeño 3RP CDEV-H 11845
PHONE: 5753441 6073
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the U.S. Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 C.F.R. 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided):

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been approved by the Department of Public Safety (The proper documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Montgomery Reed Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Hobbs Services, LLC YARD #: _____ WHP #: _____ TRUCK #: 46
ADDRESS: Pour Britt Lovington NM TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: Belly
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:

I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIALS SPECIFIED IN PART 1 ABOVE

DRIVER: Angel Salido (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (WE) HEREBY CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One):

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

DATE: 12/19/23 TIME IN: 3:20 ☐ AM ☑ PM TIME OUT: _____ ☐ AM ☐ PM

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: Less than 50 MCR

Shake Out:	1	2	3
H_2O			
S			

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ Employee (Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

https://weighmaxpolling.com/Image.aspx?ImageType=TicketItemImage&ImageId=30896307 1/1
Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0284767

Part 1 - Generator

COMPANY NAME: Remian Resources
LEASE: Delaware 3RP COEV-H 11845
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 14
STATE & COUNTY ORIGIN: Lea Co NM
DATE: _____
PHONE: _____
QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☒ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOEL Accepts certifications on a per load basis only).

☐ RCRA NON EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached: (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the waste documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Mantyvarenta Field Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DJ Truck Services YARD #: 20 WHP #: _____ TRUCK #: 220
ADDRESS: 520 S Burk St Hobbs NM TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:

I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Jaime Robles (Driver's Name Printed) DRIVER'S SIGNATURE: Jaime Robles

I TRANSPORTER CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/19/23 TIME IN: 3:28 AM/PM TIME OUT: _____ AM/PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:

	1	2	3
H_2O			
S			

#2-11448

Gallon Test: _____

SERVICE NOTES:
This is to certify that: Amanda (Employee Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

6/27/24, 12:41 PM Image.aspx (800×1035)

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0284768

Part 1 - Generator

COMPANY NAME: Permian Resources DATE: 12/19/23
LEASE: Jalapeño 3RP COEV-H 11845 PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other _____		Authorize Washout?	☐ Yes ☐ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of the waste must accompany this form).

Print Authorized Agent's Name: Montgomery Ford Date _____ Signature _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: TOMAHAWK Trucking YARD #: _____ WHP #: _____ TRUCK #: 55
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: George Reyes (Driver's Name Printed) DRIVER'S SIGNATURE: _____
I, TRANSPORTER, CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/19/23 TIME IN: 328 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: 639 < 50 MDA

Shake Out:	1	2	3
H_2O			
S			

21449
Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee (Printed Name)) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

https://weighmasteronline.com/Images.aspx?ImageType=TicketItemImage&ImageId=30896412 1/1
Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0284769

Part 1 - Generator

COMPANY NAME: Permian Resources
DATE: 12/19/22
LEASE: Jalapeño 3RP CDEV-H 11545
PHONE: _____
AFE #: _____
API: 30-025-40935
RIG NAME: _____
WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☒ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOBE Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the maximum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the origin documentation of non hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Montgomery Flood Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Tornado Trucking YARD #: _____ WHP #: _____ TRUCK #: 22
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE"

DRIVER: ALONSO MORALES (Driver's Name Printed) DRIVER'S SIGNATURE: _____
"I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE"

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/19/23 TIME IN: 332 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

211450
Gallon Test: _____

SERVICE NOTES:
This is to certify that: Jonathan G _____ has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.
Employee (Printed Name)
EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0284770

COMPANY NAME: Freeman Resources DATE: 12.19.23
LEASE: Edwards 3RP COM #H 11845 PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Part 1 - Generator

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☐ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached: (Check the appropriate items as provided)

☐ MSDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent Name: Montgomery Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: El Rolo Trucking YARD #: 20 WHP #: _____ TRUCK #: 002
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: 02
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:

I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN BOX 1 ABOVE

DRIVER: Alex Flores (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/19/23 TIME IN: 339 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 pCi/g)

Shake Out:	1	2	3
H_2O			
S			

211453
Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.
Employee (Printed Name)
EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0284771

Part 1 - Generator

COMPANY NAME: Kremion Resources
DATE: _____
LEASE: Jabberwocky 3RP CDEV-H 11845
PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners	Authorize Washout? ☐ Yes ☐ No	
☐ Other: _____			

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non hazardous waste determination and a description of that waste must accompany this form)

(Print) Authorized Agent's Name: Montgomery Elbud Date _____ Signature _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: ARS Trucking
YARD #: 20 WHP #: _____ TRUCK #: 03
ADDRESS: Hobbs. NM
TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: 03
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM
DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE"

DRIVER: William Sandoval (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I, (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/19/23 TIME IN: 353 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: less than 50 MCR

Shake Out:	1	2	3
H_2O			
S			

21457
Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee (Printed Name)) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0284772

Part 1 - Generator

COMPANY NAME: Permian Resources
DATE: _____
LEASE: Jalapeno SRP COM V-H 11845
PHONE: _____
AFE #: _____ API: 30-025-40435
QUANTITY: _____ ☐ BBLS
RIG NAME: _____ WELL #: 1H
2 ☑ YARDS
STATE & COUNTY ORIGIN: Lea, NM

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☑ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only).

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided):

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of the waste must accompany this form).

Print Authorized Agent's Name: Montgomery Ewell Date: 12/20/23 Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: JY2 Transp weld YARD #: 20 WHP #: _____ TRUCK #: 09
ADDRESS: PO box 103 Loveland, NM TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Abel Velazquez (Driver's Name Printed) DRIVER'S SIGNATURE: Abel Velazquez

I, TRANSPORTER, CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE.

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-20-23 TIME IN: 8:46 (AM) PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: 9 (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

#211582
#09

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
(FKA Northern Delaware Basin Landfill)
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0284773

Part 1 - Generator

COMPANY NAME: Premium Resources DATE: _____
LEASE: Julepena 3RP CDEV-H 11845 PHONE: _____
AFE #: _____ API: 30-025-40425
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other:		Authorize Washout?	☐ Yes ☐ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oil field wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON EXEMPT: Oil field waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Management Food Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: ARS Trucking YARD #: 40 WHP #: _____ TRUCK #: 03
ADDRESS: Hobbs TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: 03
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:

I CERTIFY MATERIAL WAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL AT GENERATOR FACILITY ABOVE

DRIVER: William Sandoval (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I ALSO HEREBY CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-20-23 TIME IN: 9:49 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: 12 (Less than 50 MCB)

Shake Out:	1	2	3
H_2O			
S			

Gallon Test: _____

H 211587
H03

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0284775

Part 1 - Generator

COMPANY NAME: Occidental Resources — DATE: _____
LEASE: Jalapeno 3BP CREV-H 11845 — PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other:		Authorize Washout? ☐ Yes ☑ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oil field wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non hazardous that does not exceed the maximum standards for waste hazardous by characteristics established in RCRA regulations 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

I, the authorized Agent's Name: Montgomery Favil Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DJ TRUCK Services YARD #: 20 WHP #: _____ TRUCK #: 220
ADDRESS: 520 S Bivins St Hobbs NM TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____

DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:

I HEREBY CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Jaime Rubio (Driver's Name Printed) DRIVER'S SIGNATURE: Jaime Rubio

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-20-23 TIME IN: 8:59 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 NCR)

Shake Out:	1	2	3
H_2O			
S			

Gallon Test: _____

SERVICE NOTES: 2 21,586 H2O

This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0284774

Part 1 - Generator

COMPANY NAME: Permian Resources
LEASE: Jolapeño 3BP COM-1H 5
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea co NM
DATE: _____
PHONE: _____
QUANTITY: _____ ☐ BBLS ☑ YARDS 20

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste can (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts Certificates on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 50 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Montgomery Ford Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DJ truck Services YARD #: 20 WHP #: _____ TRUCK #: 832
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:

I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE

DRIVER: Edgar Guerrero (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (DRIVER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 6/20/24 TIME IN: 8:59 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: 12 (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

#211587

Gallon Test: _____

SERVICE NOTES:
This is to certify that: Arrayal (Employee (Printed Name)) has received the above indicated waste, waste has passed all acceptances testing at this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276876

Part 1 - Generator

COMPANY NAME: Premier Resources DATE: 12-20-23
LEASE: Lapeña 3RP CDEV-H 11545 PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1 1T
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the U.S Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certification on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21- 261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form).

Print Authorized Agent's Name: management Fluid Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: El Potro Trucking LLC YARD #: 20 WHP #: _____ TRUCK #: 002
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: 02
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE"

DRIVER: Alex Florez (Driver's Name Printed) DRIVER'S SIGNATURE: _____

"I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE"

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-20-23 TIME IN: 9:02 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
$			

211583
002

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee (Printed Name)) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Representative Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276878

COMPANY NAME: Permian Resources
DATE: 12-20-23
LEASE: Jalmat 3RP CDEV-11 11845
PHONE: 5754416073
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 117
STATE & COUNTY ORIGIN: Lea Co. NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Part 1 - Generator

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Big Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non exempt waste (NOBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other: Provide Description Below:

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Mon+Germann Ford Date _____ Signature _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: HoSanna Services 46 YARD #: _____ WHP #: _____ TRUCK #: 46
ADDRESS: 721 W Birch Lovington NM TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: Belly

DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:

I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Angel Salido (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I, TRANSPORTER, CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-20-23 TIME IN: 9:07 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

21590 #46

Gallon Test: _____

SERVICE NOTES:
This is to certify that _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276877

Part 1 - Generator

COMPANY NAME: Permian Resources
DATE: 12/20/23
LEASE: Jalapeño 36P COM-HIWAS
PHONE: _____
APE #: _____ API: 30-025-40935
QUANTITY: _____ ☐ BBLS
RIG NAME: _____ WELL #: 1H
20 ☑ YARDS
STATE & COUNTY ORIGIN: Lea Co NM

Waste Description (check only one box)	☐ RCRA Exempt	☐ RCRA Non-Exempt	
☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other _____		Authorize Washout?	☐ Yes ☒ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOTE: Accepts certifications on a per load BASIS only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-HAZ LOAD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent Name: Management Rep Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Tomahawk Trucking YARD #: _____ WHP #: _____ TRUCK #: 22
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN #: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE

DRIVER: Alonso Morales (Driver's Name Printed) DRIVER'S SIGNATURE: _____
I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One):
DATE: 12/20/23 TIME IN: 9:11 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

#211591

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

Gallon Test: _____

SERVICE NOTES:
(This is to certify that) _____ has received the above indicated waste, waste has passed all acceptance testing at this facility and the waste has been disposed of in an authorized manner at a permitted site.
Employee (Printed Name)

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276879

Part 1 - Generator

COMPANY NAME: Precision Resources DATE: _____
LEASE: Lakpeño 3BP CDEV-H 11845 PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Wash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDR Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached: (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

The Authorized Agent's Name: Montgomery Leard Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Tomahawk Trucking YARD #: _____ WHP #: _____ TRUCK #: 112013
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____

DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:

I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE

DRIVER: Jorge Reyes (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-20-23 TIME IN: 9:11 AM PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: 1 Less than 50 MCR

Shake Out:	1	2	3
H_2O			
S			

L 21592 Y

Gallon Test: _____

SERVICE NOTES:

This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptance testing at the facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM
6/27/24, 12:45 PM
Image.aspx (800×1035)

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST #
0276880

Part 1 - Generator

COMPANY NAME: Pierce Ranches — DATE: _____
LEASE: Jalapeno 3RP (DEV-H11845 — PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1 H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oil field wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oil field waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non hazardous is attached: (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-HAZ WASTE: Emergency non hazardous, non oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Management Field Date: 12/20/23 Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: JyR Transp Weld YARD #: 20 WHP #: _____ TRUCK #: 09
ADDRESS: Po box 1031 Lovington NM TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Noel Velazquez (Driver's Name Printed) DRIVER'S SIGNATURE: Noel Velazquez

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE.

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT: (Check One) DATE: 12-20-23 TIME IN: 11:09 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: 10 (less than 50 MCR)

Shake Out:	1	2	3
H2O			
S			

Gallon Test: _____

211604
Fd9

SERVICE NOTES:
This is to certify that _____ (Employee Printed Name) has received the above listed waste, waste has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

https://imaging.emnrd.nm.gov/ImageNav/Images/Image?ImageType=TicketItemImage&ImageId=30901262
Released to Imaging: 12/18/2024 7:45:15 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
(DBA) Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST #
0276881

Part 1 - Generator

COMPANY NAME: Premier Resources
LEASE: Lybrook SRP COEV-H 11845
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea co NM

DATE: _____
PHONE: _____

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other:		Authorize Washout?	☐ Yes ☒ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the U.S Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (check the appropriate classifications):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOBE Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous in that it does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D as amended. The following documentation demonstrating the waste is non-hazardous is attached: (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Management Field Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: ARJ'S Trucking YARD #: 20 WHP #: _____ TRUCK #: 03
ADDRESS: Hobbs TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: 03
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL ACCEPTED IN PART 1 ABOVE.

DRIVER: William Sandoval (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/30/23 TIME IN: 11:01 (AM) PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: 0 (Limit Sheet 50 pCi/g)

Shake Out:	1	2	3
H_2O			
S			

211605

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

6/27/24, 12:45 PM Image.aspx (800×1035)

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276882

Part 1 - Generator

COMPANY NAME: Premier Resources
LEASE: Jalapeno 3RP CDEV-11845
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea co NM

DATE: _____
PHONE: _____

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box)	☐ RCRA Exempt	☐ RCRA Non-Exempt	
☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☑ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (me order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Montgomery Pruitt Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DJ Truck Services
ADDRESS: _____
YARD #: 20 TICKET #: _____
WHP #: _____ ROLL OFF BIN#: _____
TRUCK #: 832 TRAILER #: _____

DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM
DISPATCHER NAME: _____
DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Edgar Guerrero (Driver's Name Printed) DRIVER'S SIGNATURE: _____

"I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE"

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-20-23 TIME IN: 11:15 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: 0 (Less than 50 MCA)

Shake Out:		
1	2	3
H_2O		
S		

#211605
#932

Gallon Test: _____

SERVICE NOTES
This is to certify that: _____ (Employee's Printed Name) has received the above indicated waste, waste has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner and permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

https://ewi.hpoonline.com/Document.aspx?ImageType=TicketItemImage&ImageId=30901472 1/1
Released to Imaging: 12/18/2024 7:43:13 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276883

Part 1 - Generator

COMPANY NAME: Permian Resources
DATE: _____
LEASE: Jalapeño 3BP CDEV-H 11545
PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☐ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☐ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non exempt waste (NOBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21- 261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached: (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

PRINT AUTHORIZED AGENT NAME: Mantgarmen Ford DATE: _____ SIGNATURE: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DJ Truck Services YARD #: 20 WHP #: _____ TRUCK #: 220
ADDRESS: 520 S Buck St Hobbs NM TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I HEREBY CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Jaime Robles (Driver's Name Printed) DRIVER'S SIGNATURE: Jaime Robles

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/20/23 TIME IN: 11:19 AM PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL ~~N/A~~
TOX: PASS FAIL ~~N/A~~

NORM TESTING: 0 (Less than 50 pCi/g)

Shake Out:	1	2	3
H_2O			
S			

Gallon Test: _____

SERVICE NOTES: #211611
This is to certify that: _____ has received the above indicated waste, waste has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.
Employee Printed Name
EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
(AKA Northern Delaware Basin Landfill)
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276885

Part 1 - Generator

COMPANY NAME: Permian Resources DATE: 12-20-23
LEASE: Jalapeno 3BP CTB - H 11843 PHONE: 5754416073
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: 20 ☐ BBLS ☑ YARDS

Waste Description (check only one box)	☐ RCRA Exempt	☐ RCRA Non-Exempt	
☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Wash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is: (Check the appropriate classifications)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Your Authorized Agent's Name: Montgomery Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Hosann Services LLC YARD #: _____ WHP #: _____ TRUCK #: 46
ADDRESS: 721 W Birch, Lovington NM TICKET #: _____ ROLL OFF BIN #: _____ TRAILER #: Belly

DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:

I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART I ABOVE

DRIVER: Angel Salcido (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I, THE TRANSPORTER, CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-20-23 TIME IN: 11:23 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2020 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

M 21163
#46

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee's Printed Name) has received the above indicated waste, waste has passed all acceptance testing of the facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

https://weighmaxonline.com/Images.aspx?ImageType=TicketItemImage&ImageId=30901582 1/1
Released to Imaging: 12/18/2024 7:45:13 AM

OWL Landfill Services, LLC
aka Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276884

Part 1 - Generator

COMPANY NAME: Premian Resources
LEASE: Jalapeño 3RP COEV-H 11845
AFE #: _____ API: 30-025-49935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

DATE: _____
PHONE: _____

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box)	☐ RCRA Exempt	☐ RCRA Non-Exempt	
☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other:		Authorize Washout?	☐ Yes ☐ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oil field wastes generated from oil and gas exploration and production operations and are not mixed with non exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oil field waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation on demonstrating the waste as non hazardous is attached: (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

I, the Authorized Agent's Name: Management Field Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: El Patio Trucking YARD #: 20 WHP #: _____ TRUCK #: 002
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: 02
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE"

DRIVER: Alex Flores (Driver's Name Printed) DRIVER'S SIGNATURE: _____

"I, TRANSPORTER, CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE"

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/20/23 TIME IN: 11:25 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: less than 50 MCR

Shake Out:	1	2	3
H_2O			
S			

Gallon Test: _____

211614

SERVICE NOTES:
This is to certify that: Employee's Printed Name

EMPLOYEE SIGNATURE: _____

I have received the above indicated waste. Waste has passed all acceptance testing at this facility and the waste has been disposed of in an authorized manner at a permitted site.

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
(DBA Northern Delaware Basin Landfill)
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276886

COMPANY NAME: Permian Resources
LEASE: Jakpano 3RP CDEV-H 11845
AFE #: _____ API: 30-025-40955
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

DATE: 12/20/23
PHONE: _____

QUANTITY: _____ ☐ BBLS
20 ☒ YARDS

Part 1 - Generator

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Pig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☒ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate details below):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste. NORM Accepts certifications on a per load basis only!

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the maximum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided.)

☐ MSDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other-Provide Description Below:

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form).

Authorized Agent's Name: Montgomery Floyd Title: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Comanche Truck King YARD #: _____ WHP #: _____ TRUCK #: 22
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Alonso Morales (Driver's Name Printed) DRIVER'S SIGNATURE: _____
I HEREBY CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

MATERIALS RECEIVED AT (Check One): DATE: 12-20-23 TIME IN: 11:28 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: 1 (Less than 50 MCR)

Shake Out:		
1	2	3
H2O		
S		

21615
#22

Gallon Test: _____

SERVICE NOTES:
THIS IS TO certify that: _____ Employee Printed Name: _____ has received the above indicated waste, which has passed all acceptance testing at this facility and the waste has been disposed of in an authorized manner as a permitted use.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

6/27/24, 12:47 PM Image.aspx (800×1035)

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Author and Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276887

COMPANY NAME: Permian Resources DATE: 12/20/23
LEASE: Jalapeño 3RP CDEV-H 11843 PHONE:
AFE #: API: 30-025-40935
RIG NAME: WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: ☐ BBLS ☒ YARDS 20

Part 1 - Generator

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☒ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other:		Authorize Washout?	☐ Yes ☒ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only).

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided):

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form).

Non-Generating Agent/Broker: Management Fee Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Tomahawk Trucking YARD #: _____ WHP #: _____ TRUCK #: 55
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN #: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Jorge Reyes (Driver's Name Printed) DRIVER'S SIGNATURE: _____
AS TRANSPORTER, I CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/20/23 TIME IN: 11:30 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: P (Reading 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

Gallon Test: _____

211616

SERVICE NOTES:
This is to certify that: Employee (Printed Name) has received the above indicated waste, waste has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

https://weighmaster.com/Image.aspx?ImageType=TicketItemImage&ImageId=30901696 1/1
Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

6/27/24, 12:47 PM Image.aspx (800×1035)

OWL Landfill Services, LLC
aka Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST #
0276888

Part 1 - Generator

COMPANY NAME: Admin Resource DATE: _____
LEASE: Schwerdt 3 RP COEV-1H 11845 PHONE: _____
AFE #: _____ API: 30-025-40955
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: 20 ☐ BBLS ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I, the undersigned, state that according to the Resource Conservation and Recovery Act (RCRA) and the U.S Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (check appropriate classification):

☐ RCRA EXEMPT: Oil field wastes generated from oil and gas exploration and production operations and are not mixed with non exempt waste (NOBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Other waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations 40 CFR 261.21 - 261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste is non-hazardous is attached. (Check the appropriate items as provided)

☐ MSDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OIL FIELD: Emergency non-hazardous, non-oil field waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

I hereby certify that the above named Maintenance Foreman Date 12/20/23 Signature _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: JJR Transp Weld YARD #: 20 WHP #: _____ TRUCK #: 09
ADDRESS: Po Box 1031 Lovington CART #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:

I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Noel Velazquez (Driver's Name Printed) DRIVER'S SIGNATURE: Noel Velazquez

I FURTHER CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE.

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-20-23 TIME IN: 1:32 AM (PM)
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: 9 (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

211637
#09

Gallon Test: _____

SERVICE NOTES:
This is to certify that _____ (Employee Printed Name) has received the above indicated solid waste, has proved all acceptance testing of the facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

https://weighnavonline.com/Image.aspx?ImageType=TicketItemImage&ImageId=30903862 1/1
Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
aka Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276889

Part 1 - Generator

COMPANY NAME: Pitchfork Resources DATE: _____
LEASE: Julieanne 3RP COEV-H 11845 PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea NM

QUANTITY: _____ ☐ BBLS ☑ YARDS (20)

Waste Description (check only one box)	☐ RCRA Exempt	☐ RCRA Non Exempt	
☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other _____		Authorize Washout?	☐ Yes ☑ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NORM Acceptance Facilities on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the maximum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ MSDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print & Sign Name (Generator): Management Field Date _____ Signature _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: ARDT Trucking YARD #: 20 WHP #: _____ TRUCK #: 03
ADDRESS: Hobbs TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: 03
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:

I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL AS DESCRIBED IN PART 1 ABOVE.

DRIVER: William Sandoval (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 10/30/23 TIME IN: 1:35 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: 12 (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

Gallon Test: _____

#211038

SERVICE NOTES:
This is to certify that _____ (Employee (Printed Name)) has received the above indicated waste, same has passed all acceptance testing at this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276891

Part 1 - Generator

COMPANY NAME: Permian Resources
LEASE: Jalapeño 3RP CDEV-H 11545
DATE: _____
PHONE: _____
AFE #: _____ API: 30-025-40435
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other:			

Authorize Washout? ☐ Yes ☐ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oil field wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NORM Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oil field waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ 50% Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agents Name: Montgomery Ewell Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DJ Truck Service YARD #: 20 WHP #: _____ TRUCK #: 220
ADDRESS: 525 S Bus Hwy 62 Hobbs NM TICKET #: _____ ROLL OFF BIN #: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:

I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Jaime Robles (Driver's Name Printed) DRIVER'S SIGNATURE: Jaime Robles

I, THE UNDERSIGNED, CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One):

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

DATE: 12-20-23 TIME IN: 1:43 AM / PM
TIME OUT: _____ AM / PM

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

L 211640
#220
Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste which has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276890

Part 1 - Generator

COMPANY NAME: Precision Resources — DATE: _____
LEASE: Jalapeno 3RF COGV-H 11545 — PHONE: _____
AFE #: _____ API: 30-025-40435
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box)	☐ RCRA Exempt	☐ RCRA Non-Exempt	
☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☐ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21- 261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste is non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent Name: Management Field — Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DA Truck Services — YARD #: 20 — WHP #: _____ — TRUCK #: 832
ADDRESS: _____ — TICKET #: _____ — ROLL OFF BIN#: _____ — TRAILER #: _____
DATE RECEIVED: _____ — TIME RECEIVED: _____ ☐ AM ☐ PM — DISPATCHER NAME: _____ — DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:

I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE

DRIVER: Edgar Guerrero (Driver's Name Printed) — DRIVER'S SIGNATURE: _____

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): — DATE: 12/20/23 — TIME IN: 1:43 AM / PM — TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 NCI)

Shake Out:	1	2	3
H_2O			
S			

FF-11641

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste. Waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
(NM Northern Delaware Basin Landfill)
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: (Authorized Agent's Printed Name and Title)
SIGNATURE:
COMPANY MAN EMAIL:
COMPANY MAN PHONE:

MANIFEST # 0276892

Part 1 - Generator

COMPANY NAME: Permian Resources
DATE: 12-20-23
LEASE: Jalapeño 3RP CDEV-M 11845
PHONE:
AFE #:
API: 30-025-40935
RIG NAME:
WELL #: 117
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: ☐ BBLS ☒ YARDS 20

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☒ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other:		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOW). Accepts certifications on a per load basis only)

☐ RCRA NON EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached: (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form).

Print Authorized Agents Name: Matt Gurrent Date: Signature:

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: El Poto Trucking LLC YARD #: 20 WHP #: TRUCK #: 002
ADDRESS: TICKET #: ROLL OFF BIN #: TRAILER #: 02
DATE RECEIVED: TIME RECEIVED: ☐ AM ☐ PM DISPATCHER NAME: DISPATCHER PHONE #:

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE"

DRIVER: Alex Flores (Driver's Name Printed) DRIVER'S SIGNATURE:

I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-20-23 TIME IN: 1:46 AM (PM)
TIME OUT: AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY:
WASHOUT: TIME IN: TIME OUT:

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: 7 (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

H 211642
Y 202
Gallon Test:

SERVICE NOTES:
This is to certify that: (Employee Printed Name) has received the above indicated waste, waste has passed all acceptance testing of this facility and this waste has been disposed of in an authorized manner or a permitted site.

EMPLOYEE SIGNATURE:

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
(DBA Northern Delaware Basin Landfill)
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276893

Part 1 - Generator

COMPANY NAME: Permian Resources
DATE: 12-20-23
LEASE: Jukebox 3BS UBEV-4 11545
PHONE: 5754416073
AFE #: _____ API: 30-025-40975
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: 20 ☐ BBLS ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☒ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOBE Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON OILFIELD: Emergency non hazardous, non oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of what waste must accompany this form)

Print Authorized Agent Name: Management Field Date _____ Signature _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Hosanna Services LLC YARD #: _____ WHP #: _____ TRUCK #: 46
ADDRESS: 701 W Birch Lovington NM TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: Belly

DATE RECEIVED: _____ TIME RECEIVED: ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:

I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Angel Salcido (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I, TRANSPORTER, CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-20-23 TIME IN: 1:51 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCA)

Shake Out:	1	2	3
H_2O			
S			

Gallon Test: _____

211644
#46

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptance testing at this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM
6/27/24, 12:49 PM Image.aspx (800×1035)

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name & Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276894

Part 1 - Generator

COMPANY NAME: Premian Resources DATE: 12/20/23
LEASE: Jalapeno 3RP CDEV-H 11845 PHONE: _____
AFE #: _____ API: ~~30-025-~~ 30-025-[illegible]
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea co NM

QUANTITY: _____ ☐ BBLS
20 ☒ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Wash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☒ No	

(The Key) certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Authorized Agent's Name: Montgomery Flood Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Tomahawk Trucking YARD #: _____ WHP #: _____ TRUCK #: 22
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: ALONSO Morales (Driver's Name Printed) DRIVER'S SIGNATURE: _____
I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-20-23 TIME IN: 8:00 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

RAD TESTING: NORM (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

H. 211647
H 22
Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above referenced waste, which has passed all acceptances testing of this facility and that waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

https://web.hipaaonline.com/Hipaa/Image.aspx?ImageType=TicketItemImage&ImageId=30904455 1/1
Released to Imaging: 12/18/2024 7:43:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent) Printed Name and Title
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276895

Part 1 - Generator

COMPANY NAME: Bronco Resources DATE: 12/20/23
LEASE: Jalapeño 3RP CDEV-11845 PHONE: _____
AFE #: _____ API: 30-025-40435
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea co NM

QUANTITY: _____ ☐ BBLS ☑ YARDS (20)

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☑ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is: (Check the appropriate classification.

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only).

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261, 21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided):

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form).

Print Authorized Agent Name: Montgomery Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Tomahawk Trucking YARD #: _____ WHP #: _____ TRUCK #: 55
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN #: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Jorge Reyes (Driver's Name Printed) DRIVER'S SIGNATURE: _____
I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-20-23 TIME IN: 2:02 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

Gallon Test: _____

SERVICE NOTES: V. 211648 #55

This is to certify that _____ Employee (Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
(aka Northern Delaware Basin Landfill)
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276896

COMPANY NAME: Permian Resources
LEASE: Jalapeño 3RP CPEV-H 11845
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

DATE: _____
PHONE: _____
QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Part 1 - Generator

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☐ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Wash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☑ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield waste generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOBLE Accepts certification on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ MSDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other: Provide Description Below)

_____

☐ EMERGENCY NON OILFIELD: Emergency non-hazardous, non-oilfield waste that has been granted by the Department of Public Safety the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Approved Agent's Name: Mark Gervais Floyd Date: 12/20/23 Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: JyR Transp Weld YARD #: 20 WHP #: _____ TRUCK #: 09
ADDRESS: Po Box 1031 Lovington NM TICKET #: _____ ROLL OFF BIN #: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:

I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE

DRIVER: Noel Velazquez (Driver's Name Printed) DRIVER'S SIGNATURE: Noel Velazquez

I AS TRANSPORTER, CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/20/23 TIME IN: 4:00 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: P (Less than 50 pCi/g GMOR)

Shake Out:

	1	2	3
H2O			
S			

#211070

Gallon Test: _____

SERVICE NOTES:
This is to certify that: Annalyn (Employee Printed Name) has received the above indicated waste, waste has passed acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:43:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276897

Part 1 - Generator

COMPANY NAME: Permian Resources
LEASE: Jalapeño 3RP CDEV-H
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: LH
STATE & COUNTY ORIGIN: Lea co NM

DATE: _____
PHONE: _____

QUANTITY: _____ ☐ BBLS ☑ YARDS
20

Waste Description (check only one box)	☐ RCRA Exempt	☐ RCRA Non-Exempt	
☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners	Authorize Washout?	☐ Yes ☐ No
☐ Other: _____			

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non hazardous is attached: (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other: Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (The order documentation of non hazardous waste determination and a description of that waste must accompany this form)

Name of Authorized Agent: Montgomery Flood Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: ARJS Trucking
ADDRESS: Hobbs
YARD #: 20 WHP #: _____ TRUCK #: 03
TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: 03
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM
DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE

DRIVER: William Sandoval (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One):
☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

DATE: 12-20-23 TIME IN: 4:25 AM / PM
TIME OUT: _____ AM / PM

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: ✓ (less than 30 MCR)

Shake Out:	1	2	3
H_2O			
S			

#211671
#03

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276898

Part 1 - Generator

COMPANY NAME: Primexplosives
LEASE: Jolyn JRP CDEV-H 11845
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: LH
STATE & COUNTY ORIGIN: Lea Co NM
DATE: _____
PHONE: _____
QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the maximum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached: (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Mark Goldsmith Field Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DJ Trucking YARD #: 20 WHP #: _____ TRUCK #: 832
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE

DRIVER: Edgar Guzman (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-20-23 TIME IN: 4:12 AM (PM)
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

Gallon Test: _____

SERVICE NOTES: 211673 #832
This is to certify that: _____ (Employee Printed Name)
has received the above-listed waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.
EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

OWL Landfill Services, LLC
Dba: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276899

Part 1 - Generator

COMPANY NAME: Permian Resources
LEASE: Jalapeno 3RP CDEV-1H 11845
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM
DATE: _____
PHONE: _____
QUANTITY: _____ ☐ BBLS ☑ YARDS 20

Waste Description (check only one box)	☐ RCRA Exempt	☐ RCRA Non-Exempt	
☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☐ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NORM Accepts certifications on a per load basis only)

☐ RCRA NONEXEMPT: Oilfield waste which is non-hazardous that does not exceed the maximum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21, 261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D as amended. The following documentation demonstrating the waste as non hazardous is attached: (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form).

Non-Exempt Facility Name: Management Field Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DJ Truck Services YARD #: 20 WHP #: _____ TRUCK #: 220
ADDRESS: 520 S Bert St Hobbs NM TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Jaime Robles (Driver's Name Printed) DRIVER'S SIGNATURE: Jaime Robles

I AS A TRANSPORTER, CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One):
☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

DATE: 12-20-23 TIME IN: 4:24 AM (PM) TIME OUT: _____ AM / PM

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: Less than 50 MCR

Shake Out:	1	2	3
H_2O			
S			

#211675
#220

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated non-hz. waste, has passed all acceptance testing at this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0276900

Part 1 - Generator

COMPANY NAME: Permian Resources
DATE: 12-20-23
LEASE: Johnson 3RP CDEV-H 11545
PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☐ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Big Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the U.S Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non exempt waste (NOTE: Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24 or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non hazardous is attached: (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Jonas Gormeat Ford Date _____ Signature _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: El Rolo Trucking LLC YARD #: 20 WHP #: _____ TRUCK #: 003
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: 02
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART I ABOVE"

DRIVER: Alex Flores (Drivers Name Printed) DRIVER'S SIGNATURE: _____

"I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE"

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-20-23 TIME IN: 4:31 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: 0 Less than 50 MCR

Shake Out:	1	2	3
H2O			
S			

#211678
#002

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM
6/27/24, 12:52 PM Image.aspx (800×1035)
Page 1231 of 1291

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: (Authorized Agent's Printed Name and Title)
SIGNATURE:
COMPANY MAN EMAIL:
COMPANY MAN PHONE:

MANIFEST # 0277727

Part 1 - Generator

COMPANY NAME: Permian Resources
DATE: 12/20/23
LEASE: Jalapeño 3RP CDEV-H 11845
PHONE:
AFE #: API: 30-025-40935
RIG NAME: WELL #: 117
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: ☐ BBLS ☑ YARDS (20)

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other:		Authorize Washout? ☐ Yes ☒ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations, and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Assignment Field Date: Signature:

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: POMPANO TRUCKING YARD #: WHP #: TRUCK #: 22
ADDRESS: TICKET #: ROLL OFF BIN#: TRAILER #:
DATE RECEIVED: TIME RECEIVED: ☐ AM ☐ PM DISPATCHER NAME: DISPATCHER PHONE #:

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE

DRIVER: ALONSO MORALES. (Driver's Name Printed) DRIVER'S SIGNATURE:

I TRANSPORTER, CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-20-23 TIME IN: 4:36 AM / PM TIME OUT: AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY:
WASHOUT: TIME IN: TIME OUT:

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A; TCLP: PASS FAIL N/A; TOX: PASS FAIL N/A

NORM TESTING: (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

211679

Gallon Test:

SERVICE NOTES:
This is to certify that: (Employee Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE:

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277726

Part 1 - Generator

COMPANY NAME: Premier Resources DATE: 12-20-23
LEASE: Lakeview 3RP CREV-# 11845 PHONE: 5754416073
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea co NM

QUANTITY: _____ ☐ BBLS ☑ YARDS
20

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☒ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached: (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been cleared by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Non-Oilfield Waste Generator's Name: mart germania Food Date _____ Signature _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Hosama Services LLC YARD #: _____ WHP #: _____ TRUCK #: 46
ADDRESS: 721 W Birch Lovington TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: Belly

DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:

I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Angel Salcido (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-20-23 TIME IN: 4:39 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: ✓ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

N. 21163
#46

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ Employee (Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277728

Part 1 - Generator

COMPANY NAME: Permian Resources
DATE: 12/20/23
LEASE: Lusama 3RP CEV-H 11845
PHONE: _____
AFE #: _____ API: 30-025-46935
QUANTITY: _____ ☐ BBLS
RIG NAME: _____ WELL #: 1H
20 ☑ YARDS
STATE & COUNTY ORIGIN: Lea Co NM

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Wash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOW). Acceptable classifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non hazardous that does not exceed the maximum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

GENERATOR REPRESENTATIVE: Matt Germent Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Tomahawk Trucking YARD #: _____ WHP #: _____ TRUCK #: 55
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN #: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED ABOVE.

DRIVER: George Reyes (Driver's Name Printed) DRIVER'S SIGNATURE: _____
TRANSPORTER: I CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-20-23 TIME IN: 4:43 AM PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

#211633
H
Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptance testing at this facility and the waste has been disposed of in an authorized manner at a permitted site

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277729

Part 1 - Generator

COMPANY NAME: Permian Resources
LEASE: Jalapeño 3R CTB Lt 11845
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

DATE: _____
PHONE: _____
QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other:		Authorize Washout? ☐ Yes ☑ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the U.S. Environmental Protection Agency's July 1988 regulatory determination, the above described waste is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts classifications on a per load basis only).

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Montgomery Flood Date _____ Signature _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: D2 truck services YARD #: 20 WHP #: _____ TRUCK #: 832
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:

I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Edgar Gallegos DRIVER'S SIGNATURE: _____
(Driver's Name Printed)

I/WE TRANSPORTER CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/21/23 TIME IN: 9:32 (AM) / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: (PASS) FAIL N/A
TCLP: (PASS) FAIL N/A
TOX: (PASS) FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

211804

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee (Printed Name)) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277730

Part 1 - Generator

COMPANY NAME: Permian Resources — DATE: _____
LEASE: Jabanero 3RP COEV-H 11545 — PHONE: _____
AFE #: _____ API: 30-025-49485
RIG NAME: _____ WELL #: 11H
STATE & COUNTY ORIGIN: Lea co NM

QUANTITY: _____ ☐ BBLS ☑ YARDS
20

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Wash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

Certified according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination. The above described waste is not a hazardous waste as defined in 40 CFR Part 261 and is in full compliance with all applicable federal, state and local laws and regulations.

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOEL Accepts test if stations on a per load basis only).

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the maximum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR part 261.24, or listed hazardous waste as defined by 40 CFR part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached: (check the appropriate items as provided)
☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other: Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

I hereby certify that the above named Permian Resources Corporation is authorized to ship the above described waste. Date: 12-21-23 Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Hosanna Services LLC — YARD #: _____ — WHP #: _____ — TRUCK #: 2-17
ADDRESS: 721 w Birch Lovington NM — TICKET #: _____ — ROLL OFF BIN #: _____ — TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM — DISPATCHER NAME: _____ — DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I AM OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIALS DESCRIBED IN PART 1 ABOVE

DRIVER: SAUL ENRIQUEZ (Driver's Name Printed) — DRIVER'S SIGNATURE: _____
TRANSPORTER CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/21/23 — TIME IN: 938 AM / PM — TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A; TCLP: PASS FAIL N/A; TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out	1	2	3
H_2O			
S			

211806

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: Jayden M

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277733

Part 1 - Generator

COMPANY NAME: ~~[illegible]~~ Premier Reserve DATE: _____
LEASE: Jalapeno 3RP CDEV-H 11845 PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached: (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

(Print) Authorized Agent's Name: Montgomery Floyd Date: 12/21/23 Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: J&R Transp weld YARD #: 20 WHP #: _____ TRUCK #: 09
ADDRESS: Po box 1031 Lovington NM ROLL OFF BIN#: _____ TRAILER #: _____

DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Noel Velazquez (Driver's Name Printed) DRIVER'S SIGNATURE: Noel Velazquez

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-21-23 TIME IN: 9:40 ~~AM~~ PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL ~~N/A~~

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:

	1	2	3
H_2O			
S			

H211807
H 09
Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277731

Part 1 - Generator

COMPANY NAME: Premier Resources
DATE: _____
LEASE: Jalapeño 3RP (DEV-H) 11845
PHONE: _____
AFE #: _____ API: 30-025-49435
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☑ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the U.S. Environmental Protection Agency's July 1988 regulatory determination, the above described waste is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOBI Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the maximum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR part 261, subpart D, as amended, the following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Margaret Ford Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: AA&J Trucking
YARD #: 20 WHP #: _____ TRUCK #: 03
ADDRESS: _____
TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: 03

DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM
DISPATCHER NAME: _____
DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:

I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: William Sandoval (Driver's Name Printed)
DRIVER'S SIGNATURE: _____

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One):
DATE: 12/21/23 TIME IN: 9:40 (AM) PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: (PASS) FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL (N/A)

NORM TESTING: P (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

211808

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277734

Part 1 - Generator

COMPANY NAME: Permian Resources — DATE: _____
LEASE: Lilyporte 3RD CDEV-H 11H45 — PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1 H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☑ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided):

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Authorized Agent's Name: Management Team Date: 12-21-23 Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: El Potro trucking LLC — YARD #: 20 — WHP #: _____ — TRUCK #: #001
ADDRESS: 1103 E Bates St Hobbs NM — TICKET #: _____ — ROLL OFF BIN#: _____ — TRAILER #: #01

DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:

I (DRIVER) CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: JAIME TORRES (Driver's Name Printed) DRIVER'S SIGNATURE: JAIME TORRES

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/21/23 TIME IN: 9:45 (AM) / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: (PASS) FAIL N/A
TCLP: PASS FAIL (N/A)
TOX: PASS FAIL (N/A)

NORM TESTING: P (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

21810

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA- Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST #
0277732

Part 1 - Generator

COMPANY NAME: Premier Resources
DATE: _____
LEASE: Jalapeno 3RP CDEV-H 11845
PHONE: _____
AFE #: _____ API: 30-025-40935
QUANTITY: _____ ☐ BBLS
RIG NAME: _____ WELL #: 1 1H
20 ☑ YARDS
STATE & COUNTY ORIGIN: Lea co NM

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners	Authorize Washout?	☐ Yes ☐ No
☐ Other: _____			

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

(Print) Authorized Agent's Name: Management Fiscal Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DJ Truck Services YARD #: 20 WHP #: _____ TRUCK #: 220
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Jaime Robles (Driver's Name Printed) DRIVER'S SIGNATURE: Jaime Robles

I, (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12-21-23 TIME IN: 9:46 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ less than 50 MCR

Shake Out:	1	2	3
H_2O			
S			

HZ11811
H220
Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee (Printed Name)) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277736

Part 1 - Generator

COMPANY NAME: Pronto Resources
LEASE: Jalapeno 3RP COEV-H11845
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

DATE: _____
PHONE: _____
QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☒ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other		Authorize Washout?	☐ Yes ☑ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste can be (check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the maximum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Montgomery Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Tomahawk Trucking YARD #: _____ WHP #: 350 TRUCK #: 55
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE

DRIVER: George Reyes (Driver's Name Printed) DRIVER'S SIGNATURE: _____
I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/21/23 TIME IN: 9:49 (AM) PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: (PASS) FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL (N/A)

NORM TESTING: P (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

21863

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ Employee (Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:15 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
(DBA Northern Delaware Basin Landfill)
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Author and Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277735

Part 1 - Generator

COMPANY NAME: Permian Resources DATE: 12/21/23
LEASE: Jalapeño 3RP CTB#1 11545 PHONE:
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea-NM

QUANTITY: _____ ☐ BBLS
20 ☒ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☒ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the U.S Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste. (NOTE: Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Montgomery Floyd Title: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Tomahawk Trucking YARD #: _____ WHP #: _____ TRUCK #: 22
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Alonso Morales (Driver's Name Printed) DRIVER'S SIGNATURE: _____
"I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE"

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/21/23 TIME IN: 954 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A; TCLP: PASS FAIL N/A; TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

211814

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.
EMPLOYEE SIGNATURE: Jayden W

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
FKA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277737

Part 1 - Generator

COMPANY NAME: Permian Resources
DATE: _____
LEASE: Lumpkin 30 CTB V-11 11848
PHONE: _____
AFE #: _____
API: 30-025-40975
QUANTITY: _____ ☐ BBLS
RIG NAME: _____
WELL #: 1 11
20 ☑ YARDS
STATE & COUNTY ORIGIN: Lea Co NM

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other _____		Authorize Washout?	☐ Yes ☐ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOBL Accepts certifications on a per load basis only)

☐ RCRA NON EXEMPT: Oilfield waste which is non-hazardous that does not exceed the maximum standards for waste hazardous by characteristics established in RCRA regulations, 40 C.F.R. 261.21-261.24, or listed hazardous waste as defined by 40 C.F.R. (part 261, subpart D, as amended. The following documentation demonstrating the waste as non hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Management Field Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: JD Trucking
YARD #: 20
WHP #: _____
TRUCK #: 93
ADDRESS: _____
TICKET #: _____
ROLL OFF BIN #: _____
TRAILER #: _____
DATE RECEIVED: _____
TIME RECEIVED: _____ ☐ AM ☐ PM
DISPATCHER NAME: _____
DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:

CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Edgar Guerrero (Driver's Name Printed)
DRIVER'S SIGNATURE: _____

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One):
DATE: 12/21/23
TIME IN: 120 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

211856

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ Employee (Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277739

Part 1 - Generator

COMPANY NAME: Francis Resources
DATE: _____
LEASE: Jalapeno 3RP COEV-H 11845
PHONE: _____
AFE #: _____ API: 30-025-40933
QUANTITY: _____ ☐ BBLS
RIG NAME: _____ WELL #: 1H
☑ YARDS 20
STATE & COUNTY ORIGIN: Lea Co. NM

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certification on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Kenneth Edmondson Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: ARTS Trucking, LLC YARD #: 20 WHP #: _____ TRUCK #: 03
ADDRESS: Hobbs NM TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: 03
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:

"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE"

DRIVER: William Sandoval (Driver's Name Printed) DRIVER'S SIGNATURE: _____

"I (WE) TRANSPORTER, CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE"

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/21/23 TIME IN: 1357 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

2118663

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee (Printed Name)) has received the above indicated waste, which has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: Jayden W.

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277738

Part 1 - Generator

COMPANY NAME: Pioneer Resources — DATE: _____
LEASE: Jalapeno 3RD COED-H 11843 — PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☑ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certification on a per load basis only).

☐ RCRA NON-HAZ: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items provided):

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form).

Generator Authorized Agent's Name: Mark Pecenka Field Date: 12-21-23 Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Hosanna Services LLC — YARD #: _____ WHP #: _____ TRUCK #: 2-17
ADDRESS: 721 W. Birch Lovington NM 88260 — TICKET #: _____ ROLL OFF BIN #: _____ TRAILER #: _____

DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM — DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:

I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN BOX 21 ABOVE.

DRIVER: SAUL ENRIQUEZ (Driver's Name Printed) — DRIVER'S SIGNATURE: _____

I AM A DULY AUTHORIZED TRANSPORTER. I CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE.

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/21/23 TIME IN: 1:38 ☐ AM ☑ PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: ☑ PASS ☐ FAIL ☐ N/A
TCLP: ☐ PASS ☐ FAIL ☑ N/A
TOX: ☐ PASS ☐ FAIL ☑ N/A

NORM TESTING: P (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

211864

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:43:13 AM

OWL Landfill Services, LLC
(DBA Northern Delaware Basin Landfill)
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST #
0277740

Part 1 - Generator

COMPANY NAME: Pronton Resources
LEASE: Jalapeno 3RP LOEV-H 11845
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 17
STATE & COUNTY ORIGIN: Lea co NM

DATE: _____
PHONE: _____

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the U.S Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOW). Accepts certifications on a per load basis only.

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-O.F.FIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form).

Print Authorized Agent's Name: Management Field Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DJ Truck Services YARD #: 20 WHP #: _____ TRUCK #: 220
ADDRESS: 520 S Burkett Hobbs TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Jaime Robles (Driver's Name Printed) DRIVER'S SIGNATURE: Jaime Robles

I, TRANSPORTER, CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/21/23 TIME IN: 142 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

211866

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee (Printed Name)) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: Hayden W

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Author and Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277741

Part 1 - Generator

COMPANY NAME: Permian Resources
DATE: _____
LEASE: Lobero 3BP CDEV-H 11845
PHONE: _____
AFE #: _____ API: 30-025-60935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other:		Authorize Washout? ☐ Yes ☒ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOBL Accepts certifications on a per load basis only)

☐ RCRA NON EXEMPT: Oilfield waste which is non-hazardous that does not exceed the maximum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21, 261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form).

I, the Authorized Agent for the management Ford Date 12/21/23 Signature _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: JVR Transp Welc YARD #: 20 WHP #: _____ TRUCK #: 09
ADDRESS: P O Box 1631 Lovington NM ACCT #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:

I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Noel Velazquez (Driver's Name Printed) DRIVER'S SIGNATURE: Noel Velazquez

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/21/23 TIME IN: 1:44 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: 0 (Less than 50 MCR)

Shake Out:

	1	2	3
H_2O			
S			

211867

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ Employee (Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277742

Part 1 - Generator

COMPANY NAME: Pearson Resources
LEASE: Jalapeno 3RP CDEJ-H 11845
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

DATE: _____
PHONE: _____
QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other:		Authorize Washout?	☐ Yes ☐ No

(I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the maximum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR part 261 subpart D as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided):

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD*: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form).

Print Customer Agent's Name: Montgomery Flood Date: 12-21-23 Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: El Potro trucking LLC YARD #: 20 WHP #: _____ TRUCK #: #001
ADDRESS: 1103 E Butte St Hobbs NM TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: #01

DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:

I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: JAIME TORRES (Driver's Name Printed) DRIVER'S SIGNATURE: JAIME TORRES

I, TRANSPORTER, CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE.

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/21/23 TIME IN: 147 AM (PM)
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

2118601

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee (Printed Name)) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: Jayden M

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277743

Part 1 - Generator

COMPANY NAME: Permian Resources
DATE: 12/21/23
LEASE: Jalapeno 3RP COEY-1H 11845
PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: NM Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other:		Authorize Washout?	☐ Yes ☑ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOTE: Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, Subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached: (Check the appropriate items as provided)

☐ MSDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: management Flood Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Tomahawk Trucking YARD #: _____ WHP #: _____ TRUCK #: _____
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE

DRIVER: Jorge Reyes (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/21/23 TIME IN: 1:48 AM (PM)
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: (PASS) FAIL N/A
TCLP: PASS FAIL (N/A)
TOX: PASS FAIL (N/A)

NORM TESTING: ✓ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

211870

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ Employee (Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277744

Part 1 - Generator

COMPANY NAME: Permian Resources
DATE: 12/21/23
LEASE: Jalapeno 32P COM V-H 11845
PHONE: _____
AFE #: _____ API: 30-025-49935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Pig Trash	☐ Pit Liners		
☐ Other _____		Authorize Washout? ☐ Yes ☒ No	

The undersigned certifies that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste. (NDBL Accepts certification on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the maximum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached: (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Your Authorized Agent Name: Montgomery Flood Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: TOMAHAWK TRUCKING YARD #: _____ WHP #: _____ TRUCK #: 22
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN #: _____ TRAILER #: _____

DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: ALONSO MORALES (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/21/23 TIME IN: 1:53 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

211871

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee (Printed Name)) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277745

Part 1 - Generator

COMPANY NAME: Freeman Resources DATE: _____
LEASE: Jalapeño SLP CBEV-11 11845 PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 111
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached: (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Management Field Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Dp truck YARD #: 20 WHP #: _____ TRUCK #: 832
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Edgar Guerrero (Driver's Name Printed) DRIVER'S SIGNATURE: E. V
"I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE"

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/21/23 TIME IN: 429 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

211904

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: Jayden W

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST #
0277747

Part 1 - Generator

COMPANY NAME: Permian Resources
LEASE: Jalapeño 3BP CDEV-H 10845
AFE #: _____ API: 30-025-40975
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

DATE: _____
PHONE: _____

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box)	☐ RCRA Exempt	☐ RCRA Non-Exempt	
☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other _____		Authorize Washout?	☐ Yes ☑ No

I hereby certify (according to the Resource Conservation and Recovery Act (RCRA) and the U.S. Environmental Protection Agency's July 1988 regulatory determination, the above described waste is: (Check the appropriate classification.)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NORM Accepted certification on a per load basis only)

☐ RCRA NON-EXEMPT: Oil field waste which is non-hazardous that does not exceed the maximum standards for waste hazardous by characteristic as established by RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EXEMPT / NON-RCRA: Exempt and non-hazardous, non-oil field waste that has been ordered by the Department of Public Safety the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form.

Authorized Agent's Name: Manuel Flood Date: 12-21-23 Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Hosanna Services LLC YARD #: _____ WHP #: _____ TRUCK #: 2-17
ADDRESS: 72 W Birch Lovington TICKET #: _____ ROLL OFF BIN #: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL UNLESS BEING PAID FOR AT THE GENERATOR SITE.

DRIVER: SAUL ENRIQUEZ (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I TRANSPORTER, CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE.

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One):
DATE: 12/21/23 TIME IN: 4:29 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: 9 (less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

211905

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ Employee (Printed Name) has received the above indicated waste, waste has passed all acceptances testing of the facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: (Authorized Agent's Printed Name and Title)
SIGNATURE:
COMPANY MAN EMAIL:
COMPANY MAN PHONE:

MANIFEST # 0277746

Part 1 - Generator

COMPANY NAME: Permian Recovery DATE:
LEASE: Jalapeno 3RP CDEV-#11845 PHONE:
AFE #: API: 30-025-40935
RIG NAME: WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: ☐ BBLS 20 ☐ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other		Authorize Washout? ☐ Yes ☒ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certification on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations 40 CFR 261.21, 261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached: (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other: Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Montgomery Reed Date: Signature:

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DJ Truck Service YARD #: 20 WHP #: TRUCK #: 220
ADDRESS: 520 S Burk st Hobbs NM TICKET #: ROLL OFF BIN #: TRAILER #:
DATE RECEIVED: TIME RECEIVED: ☐ AM ☐ PM DISPATCHER NAME: DISPATCHER PHONE #:

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Jaime Robles (Driver's Name Printed) DRIVER'S SIGNATURE: Jaime Robles

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE.

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/21/23 TIME IN: 433 AM (PM)
TIME OUT: AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY:
WASHOUT: TIME IN: TIME OUT:

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

211907

Gallon Test:

SERVICE NOTES:
This is to certify that: (Employee (Printed Name)) has received the above indicated waste, waste has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: Jayden W

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277748

Part 1 - Generator

COMPANY NAME: Pierson Recuser
DATE: _____
LEASE: Jalapeno 3RP CDEV-H 11845
PHONE: _____
AFE #: _____ API: 30-025-40935
QUANTITY: _____ ☐ BBLS
RIG NAME: _____ WELL #: 1H
20 ☑ YARDS
STATE & COUNTY ORIGIN: Lea Co NM

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other:		Authorize Washout? ☐ Yes ☑ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Montgomery Frost Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: ARBS Trucking LLC YARD #: 20 WHP #: _____ TRUCK #: 03
ADDRESS: Hobbs NM TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: 03
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:

I (DRIVER) CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: William Sandoval (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/21/23 TIME IN: 4:34 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

211908

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee (Printed Name)) has received the above indicated waste, waste has passed all acceptances testing at this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 9:45:13 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277749

Part 1 - Generator

COMPANY NAME: Permian Resources — DATE: _____
LEASE: Jalapeno BRP CDEV-H 11845 — PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co, NM

QUANTITY: _____ ☐ BBLS
20 ☒ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☒ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☒ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certification on a per load basis only).

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation is demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ MSDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other: Provide Description Below

☐ NON-EXEMPT/NON-OILFIELD: Exempt/non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form).

Generator Authorized Agent's Name: Matt Galmeau Edvid — Date: 12/21/23 — Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: JYR Transp Weld — YARD #: 20 — WHP #: _____ — TRUCK #: 09
ADDRESS: PO Box 1031 Lovington — UNIT #: _____ — ROLL OFF BIN #: _____ — TRAILER #: _____
DATE RECEIVED: _____ — TIME RECEIVED: _____ ☐ AM ☐ PM — DISPATCHER NAME: _____ — DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Abel Velazquez (Driver's Name Printed) — DRIVER'S SIGNATURE: Abel Velazquez
I HEREBY CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE.

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): — DATE: 12/21/23 — TIME IN: 437 AM / PM — TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A; TCLP: PASS FAIL N/A; TOX: PASS FAIL N/A

NORM TESTING: _____ (Less Than 50 MCR)

Shake Out:

	1	2	3
H_2O			
S			

211909

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee (Printed Name)) has received the above indicated waste, waste has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.
EMPLOYEE SIGNATURE: Jayden W

White Copy: Disposal Facility — Yellow: Transporter — Pink: Generator

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277750

Part 1 - Generator

COMPANY NAME: Premier Resources
DATE: _____
LEASE: Jalapeno 3RP CDEV-H 11845
PHONE: _____
AFE #: _____ API: 30-025-40935
QUANTITY: _____ ☐ BBLS
RIG NAME: _____ WELL #: 1H
20 ☑ YARDS
STATE & COUNTY ORIGIN: Lea Co NM

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other:		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOTE: Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached: (Check the appropriate items as provided)

☐ MSDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form).

I, the Authorized Agent's Name: mark garmen Floyd Date: 12-21-23 Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: EL Potro trucking LLC YARD #: 20 WHP #: _____ TRUCK #: #001
ADDRESS: 1103 E. Butte St Hobbs N.M TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: #01

DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:

I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: JAIME TORRES (Driver's Name Printed) DRIVER'S SIGNATURE: JAIME TORRES

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE.

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/21/23 TIME IN: 1442 AM / (PM)
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

211912

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee (Printed Name)) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: Jayden W

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277876

COMPANY NAME: Permian Resources DATE: 12/21/23
LEASE: Jalapeño 3RP CTB EV-H 11595 PHONE: _____
AFE #: _____ API: 30-025-40985
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Part 1 - Generator

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☒ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is/ is NOT (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste(NOR). Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Anthony Emerson Field Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Tomahawk Trucking YARD #: _____ WHP #: _____ TRUCK #: 55
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Jorge Reyes (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/21/23 TIME IN: 4:45 AM (PM)
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: P (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

211913

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee (Printed Name)) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name And Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277877

Part 1 - Generator

COMPANY NAME: Permian Resources DATE: 12/21/22
LEASE: Jalapeno 3RP CDEV-H 11845 PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box)	☐ RCRA Exempt	☐ RCRA Non-Exempt	
☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Wash	☐ Pit Liners	Authorize Washout?	☐ Yes ☒ No
☐ Other: _____			

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the U.S. Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOW). Accepts certifications on a per load basis only.

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the maximum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non hazardous is attached. (Check the appropriate items provided):

☐ MSDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other: Provide Description Below:

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been approved by the Department of Public Safety. The order, documentation of non-hazardous waste determination and a description of that waste must accompany this form.

Authorized Agent's Name: Maintenance Hand Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Tomahawk Trucking YARD #: _____ WHP #: _____ TRUCK #: 22
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I HEREBY CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Alonso Moraes (Driver's Name Printed) DRIVER'S SIGNATURE: _____
I (DRIVER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/21/22 TIME IN: 449 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 VCR)

Shake Out:	1	2	3
H_2O			
S			

211915

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee (Printed Name)) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.
EMPLOYEE SIGNATURE: Jayden W

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277878

Part 1 - Generator

COMPANY NAME: Preston Resources — DATE: _____
LEASE: Jalapeno 32P COEV-H 11845 — PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other:		Authorize Washout?	☐ Yes ☑ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste. (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ MSDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, the determination of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: management Field — Date: 12/22/23 — Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: JJR Transp. weld. — YARD #: 20 — WHP #: _____ — TRUCK #: 09
ADDRESS: PO box 1031 Lovington N.M. — TICKET #: _____ — ROLL OFF BIN#: _____ — TRAILER #: _____

DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM — DISPATCHER NAME: _____ — DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:

I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Noel Velazquez (Driver's Name Printed) — DRIVER'S SIGNATURE: Noel Velazquez

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): — DATE: 12/22/23 — TIME IN: 10:46 ☑ AM ☐ PM — TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A — TCLP: PASS FAIL N/A — TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

12/2023

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee (Printed Name)) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: Juan B

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277879

Part 1 - Generator

COMPANY NAME: Permian Resources
LEASE: Jalapeno SRP COEV-H 11545
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

DATE: _____
PHONE: _____
QUANTITY: _____ ☐ BBLS ☒ YARDS 20

Waste Description (check only one box)	☐ RCRA Exempt	☐ RCRA Non Exempt	
☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☒ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☐ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NORM Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached: (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been assigned by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Montgomery Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DJ Truck Service YARD #: 20 WHP #: _____ TRUCK #: 220
ADDRESS: 520 S Turk St Hobbs NM TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Jaime Robles (Driver's Name Printed) DRIVER'S SIGNATURE: Jaime Robles

I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE.

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One):
☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

DATE: 12/20/24 TIME IN: 1047 AM / PM TIME OUT: _____ AM / PM

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A; TCLP: PASS FAIL N/A; TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

212024

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee (Printed Name)) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: Jayden W

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277881

Part 1 - Generator

COMPANY NAME: Permian Resources
LEASE: Jalapeno JRP CDEV-H 81845
AFE #: _____ API: 30-025-40435
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea co NM

DATE: _____
PHONE: _____

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other:		Authorize Washout? ☐ Yes ☑ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Montgomery Flood Date: 12-22-23 Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Hosanna Services LLC YARD #: _____ WHP #: _____ TRUCK #: 2-17
ADDRESS: 721 w Birch Lovington NM TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____

DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: SAUL ENRIQUEZ (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One):
☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

DATE: 12/22/23 TIME IN: 10:51 (AM) PM TIME OUT: _____ AM / PM

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: (PASS) FAIL N/A TCLP: PASS FAIL (N/A) TOX: PASS FAIL (N/A)

NORM TESTING: P (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

Gallon Test: _____

2/2025

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: Juan Z.

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
D&K Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277880

Part 1 - Generator

COMPANY NAME: Pre.ren Resources
LEASE: Lakeside 32RY COM - H 11545
DATE: _____
PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☑ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only).

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristic established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form).

(Print) Authorized Agent's Name: management Flow Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DJ truck Services YARD #: 20 WHP #: _____ TRUCK #: 832
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Edgar Cisneros (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE.

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One):
DATE: 12/22/23 TIME IN: 10:56 (AM) / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: 0 (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

212028

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee (Printed Name)) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST #
0277882

Part 1 - Generator

COMPANY NAME: Permian Resources
DATE: _____
LEASE: Hilpono 3RP CBIEV #11895
PHONE: _____
AFE #: _____
API: 30-025-40935
RIG NAME: _____
WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co. NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NMOCC Accepts certifications on a continued basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21- 261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON OILFIELD: Emergency non hazardous, non oilfield waste that has been approved by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form).

Print Authorized Agent's Name: Montgomery Flood Date _____ Signature _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: ARJS Trucking
YARD #: 20 WHP #: _____ TRUCK #: 03
ADDRESS: Hobbs
TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: 03
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM
DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:

I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: William Sandoval (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One):
DATE: 12/20/23 TIME IN: 1059 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 30 MCR)

Shake Out:	1	2	3
H_2O			
S			

212029

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: Jayden W

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277883

Part 1 - Generator

COMPANY NAME: Permian Resource — DATE: 12/22/23
LEASE: Jackpine 3RP COEV-H 11845 — PHONE: _____
AFE #: _____ API: 30-025-40485
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☒ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☒ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oil field wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certification on a per load basis only)

☐ RCRA NON-EXEMPT: Oil field waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ MSDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-EXEMPT: Emergency non-hazardous, non-oil field waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent Name: Grant Germent Ford — Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Tomahawk Trucking — YARD #: _____ WHP #: _____ TRUCK #: 22
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM — DISPATCHER NAME: _____ — DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE"

DRIVER: Alonso Morales (Driver's Name Printed) — DRIVER'S SIGNATURE: _____

"TRANSPORTER: CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE"

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/22/23 TIME IN: 11:00 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: 7 (Less than 50 MCR)

Shake Out		
1	2	3
H_2O		
S		

212030

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee (Printed Name)) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277884

COMPANY NAME: ~~Ridge~~ Permian Resources DATE: 12/22/23
LEASE: Jalapeño 3RP CDEV-H 11845 PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea, NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Part 1 - Generator

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certification on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following document(s) demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agents Name: Montgomery Title: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Tomahawk Trucking YARD #: _____ WHP #: _____ TRUCK #: 55
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE"

DRIVER: George Reyes (Driver's Name Printed) DRIVER'S SIGNATURE: _____

"I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE"

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/22/23 TIME IN: 11:04 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: (PASS) FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL (N/A)

NORM TESTING: 0 (Less than 50 MCR)

Shake Out:

	1	2	3
H_2O			
S			

21203

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee (Printed Name)) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277885

Part 1 - Generator

COMPANY NAME: Permian Resources
LEASE: Salvador 3RP LOEV-H 11845
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: _____
STATE & COUNTY ORIGIN: Lea Co. N.M.

DATE: _____
PHONE: _____
QUANTITY: _____ ☐ BBLS
20 ☐ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☒ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the U.S Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste. (NOTE: Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristic as established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous wastes as defined by 40 CFR part 261, subpart D as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Mantgel Mgt Food Date: 12/22/23 Signature

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: 3R2 Trans? weld YARD #: 20 WHP #: _____ TRUCK #: 94
ADDRESS: PO Box 6031 Lovington TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____

DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE

DRIVER: Noel Velazquez (Driver's Name Printed) DRIVER'S SIGNATURE: Noel Velazquez

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/22/23 TIME IN: 12:57 AM (PM)
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: (PASS) FAIL N/A
TCLP: PASS FAIL (N/A)
TOX: PASS FAIL (N/A)

NORM TESTING: ✓ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

Gallon Test: _____

212060

SERVICE NOTES:
This is to certify that: _____ (Employee (Printed Name)) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: (Authorized Agent's Printed Name & Title)
SIGNATURE:
COMPANY MAN EMAIL:
COMPANY MAN PHONE:

MANIFEST # 0277887

Part 1 - Generator

COMPANY NAME: Premian Resources
DATE:
LEASE: Jalapeño 2RP CDEVEN 11H5
PHONE:
AFE #:
API: 30-025-40935
RIG NAME:
WELL #: 11H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: ☐ BBLS ☑ YARDS 20

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other		Authorize Washout? ☐ Yes ☐ No	

The waste listed is according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOBL Accepts certain specific oil and gas waste only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D as amended. The following documentation demonstrating the waste as non-hazardous is attached: (Check the appropriate items as provided)

☐ MSDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency/non-hazardous, non-oilfield waste that has been approved by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Generator Agent's Name: Brent Strachan Field Date: 12-22-23 Signature:

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Hasanna Services LLC YARD #: WHP #: TRUCK #: 2-17
ADDRESS: 721 w Birch Lovington 88260 TICKET #: ROLL OFF BIN #: TRAILER #:
DATE RECEIVED: TIME RECEIVED: ☐ AM ☐ PM DISPATCHER NAME: DISPATCHER PHONE #:

The following statement must be signed by the truck driver prior to unloading at disposal facility:

I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIALS DESCRIBED IN PART 2 ABOVE.

DRIVER: SAUL ENRIQUEZ (Driver's Name Printed) DRIVER'S SIGNATURE:

TRANSPORTER CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/22/23 TIME IN: 102 AM (PM)
TIME OUT: AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY:
WASHOUT: TIME IN: TIME OUT:

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

#212061

Gallon Test:

SERVICE NOTES:
This is to certify that: Employee (Printed Name) has received the above indicated waste, waste has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: Jayden W

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277886

Part 1 - Generator

COMPANY NAME: Permian Resources
DATE: _____
LEASE: Jalapeño 3RP CDEV-H 11 8 4S
PHONE: _____
AFE #: _____
API: 30-025-40935
RIG NAME: _____
WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box)	☐ RCRA Exempt	☐ RCRA Non-Exempt	
☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☑ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDEL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Management Food Date _____ Signature _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DJ Truck Services YARD #: 20 WHP #: _____ TRUCK #: 220
ADDRESS: 520 S Burk St Hobbs NM TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE

DRIVER: Jaime Robles (Driver's Name Printed) DRIVER'S SIGNATURE: Jaime Robles

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One):
DATE: 12/22/23 TIME IN: 1:02 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: (PASS) FAIL N/A
TCLP: PASS FAIL (N/A)
TOX: PASS FAIL (N/A)

NORM TESTING: 7 (less than 30 MCR)

Shake Out:	1	2	3
H_2O			
S			

212062

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.
EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277888

Part 1 - Generator

COMPANY NAME: Permian Resources
DATE: _____
LEASE: Jalapeno 3RP COEV-1H 11845
PHONE: _____
AFE #: _____ API: 30-025-40935
QUANTITY: _____ ☐ BBLS
RIG NAME: _____ WELL #: 1H
20 ☑ YARDS
STATE & COUNTY ORIGIN: Lea Co NM

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other:		Authorize Washout?	☐ Yes ☑ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste fluid is (check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided):

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non hazardous, non oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Montgomery Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Ly truck services YARD #: 20 WHP #: _____ TRUCK #: 832
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE

DRIVER: Edgar Guerrero (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I, TRANSPORTER, CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/22/23 TIME IN: 1:05 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

2/2063

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee's Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (As Provided Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277889

Part 1 - Generator

COMPANY NAME: Permian Resources
LEASE: Delaware 3RP CDEV-H 11845
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1 H
STATE & COUNTY ORIGIN: Lea co NM

DATE: _____
PHONE: _____
QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☑ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the U.S. Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOT Accepts certification on an as-received basis only)

☐ RCRA NON EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 C.F.R. 261.21-261.24, or listed hazardous waste as defined by 40 C.F.R. part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached: (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of the waste must accompany this form)

Print Authorized Agent's Name: Montgomery Flow Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: ARJ Trucking LLC YARD #: 20 WHP #: _____ TRUCK #: 03
ADDRESS: Hobbs N.M TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: 03
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: William Sandoval (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/22/23 TIME IN: 1:10 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: 0 (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

2/2064

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ Employee (Printed Name) has received the above indicated waste, waste has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277890

Part 1 - Generator

COMPANY NAME: Permian Resources
DATE: 12/22/23
LEASE: Jalapeño 3RP CDEV-H 11545
PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☒ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☒ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination, and a description of that waste must accompany this form)

Print Generator Agent's Name: Montgomery Flood Date _____ Signature _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Tomahawk Trucking YARD #: _____ WHP #: _____ TRUCK #: 22
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____

DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Alonso morales (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/22/23 TIME IN: 1:18 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: P (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

212066

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee (Printed Name)) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: Juan B

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277891

Part 1 - Generator

COMPANY NAME: Premier Resources
DATE: 12/22/23
LEASE: Jukpac 3RP CDEV-#11845
PHONE: _____
AFE #: _____
API: 30-025-40935
RIG NAME: _____
WELL #: 1H
STATE & COUNTY ORIGIN: Lea co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☑ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate class Section)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOEL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the maximum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (Fax order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Montgomery Reed Date _____ Signature _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Tomahawk Trucking YARD #: _____ WHP #: _____ TRUCK #: 55
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE

DRIVER: Jorge Reyes (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/22/23 TIME IN: 1:22 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: P (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

212067

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.
Employee (Printed Name)
EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277892

Part 1 - Generator

COMPANY NAME: Premier Resources
LEASE: Edwards 3RP CDEV-H 11645
AFE #: _____ API: 30-025-40435
RIG NAME: _____ WELL #: 11H
STATE & COUNTY ORIGIN: Lea Co NM

DATE: _____
PHONE: _____

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☒ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oil field wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste. (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent Name: Management Date: 12/22/23 Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Syp Transp Weld YARD #: 20 WHP #: _____ TRUCK #: 09
ADDRESS: PO Box 1031 Loving NM TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:

"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE"

DRIVER: Noel Velazquez (Driver's Name Printed) DRIVER'S SIGNATURE: Noel Velazquez

"I, TRANSPORTER, CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE"

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT: (Check One):

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

DATE: 12/22/23 TIME IN: 245 AM / PM
TIME OUT: _____ AM / PM

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

212085

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee (Printed Name)) has received the above indicated waste, waste has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: Jayden W

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

OWL Landfill Services, LLC
(DBA Northern Delaware Basin Landfill)
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST #
0277893

Part 1 - Generator

COMPANY NAME: Permian Resources
DATE: _____
LEASE: Jalapeño 3RT CTB V-# 11845
PHONE: _____
AFE #: _____
API: 30-025-40935
QUANTITY: _____ ☐ BBLS
20 ☑ YARDS
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☑ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOTE: Accepts certifications on a per load basis only)

☐ RCRA NON EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non hazardous, non-oilfield waste that has been ordered by the Department of Public Safety: the order, documentation of non hazardous waste determination and a description of that waste must accompany this form.

(Print) Authorized Agent's Name: Montgomery Ford Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DJ Truck Services YARD #: 20 WHP #: _____ TRUCK #: 220
ADDRESS: 520 S Burk St Hobbs TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Jaime Robles (Driver's Name Printed) DRIVER'S SIGNATURE: Jaime Robles

I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/22/23 TIME IN: 2:49 AM / (PM)
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: 0 (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

212086

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Received by OCD: 9/20/2024 8:26:56 AM

6/27/24, 1:31 PM Image.aspx (800×1035)

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277894

Part 1 - Generator

COMPANY NAME: Diamondback Resources
LEASE: Libano 3RP CDEV-#11845
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea co NM

DATE: _____
PHONE: _____
QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☐ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certification on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous wastes as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste is non hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent Name: Montgomery Ford Date: 12-22-23 Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Hasanna Services LLC YARD #: _____ WHP #: _____ TRUCK #: 2-17
ADDRESS: 721 W Birch Lovington NM TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: SAUL ENRIQUEZ (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE.

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One):
☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

DATE: 12/22/23 TIME IN: 251 AM / PM
TIME OUT: _____ AM / PM

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

212081

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: Jayden M.

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

https://ewb.nmenv.state.nm.us/OCD/Image.aspx?ImageType=TicketItemImage&ImageId=30925767 1/1
Released to Imaging: 12/18/2024 7:45:15 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST #
0277895

Part 1 - Generator

COMPANY NAME: Premier Resources DATE: _____
LEASE Jalapeño 3RP CDEV-H 11845 PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes	☑ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate class that applies):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOSE Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached: (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY/NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Montgomery Flood Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DJ Truck Service YARD #: 20 WHP #: _____ TRUCK #: 832
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Edgar Guerrero (Driver's Name Printed) DRIVER'S SIGNATURE: _____
I, TRANSPORTER, CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/22/23 TIME IN: 303 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

#212000

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: Jayden M

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

6/27/24, 1:32 PM Image.aspx (800×1035)

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST #
0277896

Part 1 - Generator

COMPANY NAME: Permian Resources DATE: 12/22/23
LEASE: Salvador SRP COEV-17 11845 PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☒ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the U.S. Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NORM Activity Level I Letters on a per load basis only).

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations 40 CFR 261.21-261.24 or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided):

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form).

Print Authorized Agent Name: Matt Gelman Fixed Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Comanche Trucking YARD #: _____ WHP #: _____ TRUCK #: 22
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART I ABOVE.

DRIVER: Alonso morales (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I, TRANSPORTER, CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE.

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/22/23 TIME IN: 3:05 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

212091

Gallon Test: _____

SERVICE NOTES
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

https://webapp.mylinen.com/Images.aspx?ImageType=TicketItemImage&ImageId=30926008 1/1
Released to Imaging: 12/18/2024 7:45:13 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277897

Part 1 - Generator

COMPANY NAME: Preston Resources DATE: 12/22/23
LEASE: Jalapeño 3RP CDEV-H 1H45 PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea, NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☐ No

Hereby certifying according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NOBL Accepts certification on a per load basis only).

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided):

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non oilfield waste that has been ordered by the Department of Public Safety: the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form).

Authorized Agent's Name: Mark Garrett Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Tomahawk Trucking YARD #: _____ WHP #: _____ TRUCK #: 55
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I HEREBY STATE NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: George Reyes (Driver's Name Printed) DRIVER'S SIGNATURE: _____

"I, (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE."

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/22/23 TIME IN: 307 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCA)

Shake Out:	1	2	3
H_2O			
S			

212092

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee (Printed Name)) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: Jayden Cy

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
(DBA Northern Delaware Basin Landfill)
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277898

Part 1 - Generator

COMPANY NAME: Permian Resource DATE: _____
LEASE: Jalapeno 3RP CDEV-H 11845 PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS
20 ☑ YARDS

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

_____

☐ EMERGENCY NON OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Management Field Date: 12/22/23 Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: SJR Transport YARD #: 20 WHP #: _____ TRUCK #: 09
ADDRESS: PO Box 1031 Loving TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____

DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:

I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Noel Velazquez (Driver's Name Printed) DRIVER'S SIGNATURE: Noel Velazquez

I, TRANSPORTER, CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE.

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/22/23 TIME IN: 4:21 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: 2 (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

212102

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent (Please Name and Title))
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277899

Part 1 - Generator

COMPANY NAME: Permian Resource — DATE: _____
LEASE: Jalapeno 30F CDER-H 11845 — PHONE: _____
AFE #: _____ API: 30-025-40935
RIG NAME: _____ WELL #: 1H
STATE & COUNTY ORIGIN: Lea Co NM

QUANTITY: _____ ☐ BBLS ☑ YARDS (20)

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other:		Authorize Washout? ☐ Yes ☑ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certification on a per load basis only)

☐ RCRA NON EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations, 40 C.F.R. 261.21-261.24, or listed hazardous waste as defined by 40 C.F.R. part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached. (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON-OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form).

Generator Authorized Agent Name: Management Field (Date) _____ (Signature) _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DJ TRUCK Services — YARD #: 20 — WHP #: _____ — TRUCK #: 220
ADDRESS: 520 S Borst Hobbs NM — TICKET #: _____ — ROLL OFF BIN#: _____ — TRAILER #: _____
DATE RECEIVED: _____ — TIME RECEIVED: _____ ☐ AM ☐ PM — DISPATCHER NAME: _____ — DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I, THE DRIVER, CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Jaime Robles (Driver's Name Printed) — DRIVER'S SIGNATURE: Jaime Robles
I, TRANSPORTER, CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE.

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): — DATE: 12/22/23 — TIME IN: 4:36 AM (PM) — TIME OUT: _____ AM PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: (PASS) FAIL N/A — TCLP: PASS FAIL (N/A) — TOX: PASS FAIL (N/A)

NORM TESTING: 0 (Less than 50 MCR)

Shake Out	1	2	3
H_2O			
S			

212106

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptance testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0277900

Part 1 - Generator

COMPANY NAME: Premier Resources
DATE: _____
LEASE: Jalapeno 3RP CDEV-H 11845
PHONE: _____
AFE #: _____ API: 30-025-40485
QUANTITY: _____ ☐ BBLS
RIG NAME: _____ WELL #: 1 1H
20 ☑ YARDS
STATE & COUNTY ORIGIN: Lea Co NM

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other _____		Authorize Washout? ☐ Yes ☑ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is: (Check the appropriate classification)

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON EXEMPT: Oilfield waste which is non hazardous that does not exceed the minimum standards for waste hazardous by characteristics established by RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached: (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON OILFIELD: Emergency non hazardous, non oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Montgomery Flood Date: 12-22-23 Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: HOSANNA SERVICES YARD #: _____ WHP #: _____ TRUCK #: 2-17
ADDRESS: 721 W Birch Lovington TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE

DRIVER: SAUL ENRIQUEZ (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I (TRANSPORTER) CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One): DATE: 12/22/23 TIME IN: 4:39 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 30 MCR)

Shake Out:	1	2	3
H_2O			
S			

212.09

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ (Employee Printed Name) has received the above indicated waste, waste has passed all acceptances testing of this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA: Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0281912

Part 1 - Generator

COMPANY NAME: Premium Resources
DATE: _____
LEASE: Jalapeño 3-DCW- ~~####~~ 11845
PHONE: _____
AFE #: _____ API: 30-025-40935
QUANTITY: _____ ☐ BBLS
RIG NAME: _____ WELL #: # 1H
20 ☐ YARDS
STATE & COUNTY ORIGIN: Lea Co. NM

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☒ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-Injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout?	☐ Yes ☒ No

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste load is (Check the appropriate classification):

☐ RCRA EXEMPT: Oil field wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON-EXEMPT: Oil field waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristics established in RCRA regulations 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR part 261, subpart D, as amended. The following documentation demonstrating the waste as non-hazardous is attached: (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide Description Below)

☐ EMERGENCY NON OIL FIELD: Emergency non-hazardous non-oil field waste that has been ordered by the Department of Public Safety (on order, documentation of non-hazardous waste determination and a description of that waste must accompany this form)

Print Authorized Agent's Name: Montgomery Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: Centeno Trucking LLC / DJ Trucking LLC
YARD #: 20 WHP #: _____ TRUCK #: 10
ADDRESS: _____ TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: 1-10-24 TIME RECEIVED: _____ ☐ AM ☐ PM
DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE.

DRIVER: Ruben Mejia (Driver's Name Printed) DRIVER'S SIGNATURE: _____

I, TRANSPORTER, CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT (Check One):
DATE: 1/10/24 TIME IN: 2:54 AM / PM
TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2029 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: P (Less than 50 MCFI)

Shake Out:	1	2	3
H_2O			
S			

25380

Gallon Test: _____

SERVICE NOTES:
This is to certify that _____ (Employee First/Last Name) has received the above indicated waste, waste has passed acceptances testing at this facility and the waste has been disposed of in an authorized manner at a permitted site.

EMPLOYEE SIGNATURE: _____

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Received by OCD: 9/20/2024 8:26:56 AM

OWL Landfill Services, LLC
DBA Northern Delaware Basin Landfill
8201 Preston Rd., Suite 520
Dallas, TX 75225
214.292.2011
ar@ndblandfill.com

COMPANY MAN: _____ (Authorized Agent's Printed Name and Title)
SIGNATURE: _____
COMPANY MAN EMAIL: _____
COMPANY MAN PHONE: _____

MANIFEST # 0281910

Part 1 - Generator

COMPANY NAME: Permian Resources
DATE: _____
LEASE: Jalapeño 3-COEV-~~FED~~ 11845
PHONE: _____
AFE #: _____ API: 30-025-40934
QUANTITY: _____ ☐ BBLS
RIG NAME: _____ WELL #: 1H
20 ☐ YARDS
STATE & COUNTY ORIGIN: Lea Co NM

Waste Description (check only one box) ☐ RCRA Exempt ☐ RCRA Non-Exempt

☐ Water Based Cuttings (DRY)	☐ Water Based Cuttings (WET)	☑ Contaminated Soil	☐ Produced Sands
☐ Oil Based Cuttings (DRY)	☐ Oil Based Cuttings (WET)	☐ Injectable Fluids	☐ Non-injectable Fluids
☐ Oil Base Mud	☐ Water Base Mud	☐ Muds w/Cement	☐ Tank Bottoms
☐ Rig Trash	☐ Pit Liners		
☐ Other: _____		Authorize Washout? ☐ Yes ☐ No	

I hereby certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988 regulatory determination, the above described waste is (Check the appropriate classification):

☐ RCRA EXEMPT: Oilfield wastes generated from oil and gas exploration and production operations and are not mixed with non-exempt waste (NDBL Accepts certifications on a per load basis only)

☐ RCRA NON EXEMPT: Oilfield waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by characteristic established in RCRA regulations 40 CFR 261.21-261.24, or listed hazardous waste as defined by 40 CFR, part 261, subpart D as amended. The following documentation demonstrating the waste as non-hazardous is attached: (Check the appropriate items as provided)

☐ SDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other: Provide Description Below:

☐ EMERGENCY NON OILFIELD: Emergency non-hazardous, non-oilfield waste that has been ordered by the Department of Public Safety (the order, documentation of non-hazardous waste determination and a description of the waste must accompany this form):

Print Authorized Agent's Name: Montgomery Floyd Date: _____ Signature: _____

Part 2 - Transporter

TO BE COMPLETED BY THE TRANSPORTER WHILE THE GENERATOR IS PRESENT

COMPANY NAME: DJ Truck Services YARD #: 20 WHP #: _____ TRUCK #: 832
ADDRESS: 520 S Burk St Hobbs TICKET #: _____ ROLL OFF BIN#: _____ TRAILER #: _____
DATE RECEIVED: _____ TIME RECEIVED: _____ ☐ AM ☐ PM DISPATCHER NAME: _____ DISPATCHER PHONE #: _____

The following statement must be signed by the truck driver prior to unloading at disposal facility:
"I CERTIFY THAT NO OTHER MATERIAL HAS BEEN PLACED IN THIS VESSEL SINCE LOADING OF MATERIAL DESCRIBED IN PART 1 ABOVE."

DRIVER: Jaime Robles (Driver's Name Printed) DRIVER'S SIGNATURE: Jaime Robles

I (TRANSPORTER), CERTIFY THAT THE INFORMATION GIVEN ON THIS MANIFEST IS TRUE AND ACCURATE TO THE BEST OF MY KNOWLEDGE

Part 3 - Disposal Facility

TO BE COMPLETED BY OWL LANDFILL EMPLOYEES

FACILITY RECEIVED AT: (Check One) DATE 1/7/24 TIME IN: 255 AM / PM TIME OUT: _____ AM / PM

☐ Northern Delaware Basin Landfill
2020 W. NM Highway 128 | Jal, New Mexico 88252

WASHOUT BY: _____
WASHOUT: TIME IN: _____ TIME OUT: _____

ACCEPTANCE TESTING: PAINT FILTER: PASS FAIL N/A
TCLP: PASS FAIL N/A
TOX: PASS FAIL N/A

NORM TESTING: _____ (Less than 50 MCR)

Shake Out:	1	2	3
H_2O			
S			

215381

Gallon Test: _____

SERVICE NOTES:
This is to certify that: _____ Employee Printed Name
EMPLOYEE SIGNATURE: _____

Has received the above indicated waste, has passed all acceptance testing of this form, and the waste has been disposed of in an authorized manner at a permitted site.

White Copy: Disposal Facility Yellow: Transporter Pink: Generator

Released to Imaging: 12/18/2024 7:45:13 AM

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

QUESTIONS

Operator: Permian Resources Operating, LLC 300 N. Marienfeld St Ste 1000 Midland, TX 79701	OGRID: 372165
	Action Number: 383007
	Action Type: [C-141] Reclamation Report C-141 (C-141-v-Reclamation)

QUESTIONS

Prerequisites	
Incident ID (n#)	**nAPP2319523778**
Incident Name	**NAPP2319523778 JALAPENO 3 RP @ 0**
Incident Type	**Produced Water Release**
Incident Status	**Reclamation Report Received**

Location of Release Source	
Please answer all the questions in this group.	
Site Name	JALAPENO 3 RP
Date Release Discovered	06/21/2023
Surface Owner	Private

Incident Details	
Please answer all the questions in this group.	
Incident Type	Produced Water Release
Did this release result in a fire or is the result of a fire	No
Did this release result in any injuries	No
Has this release reached or does it have a reasonable probability of reaching a watercourse	No
Has this release endangered or does it have a reasonable probability of endangering public health	No
Has this release substantially damaged or will it substantially damage property or the environment	No
Is this release of a volume that is or may with reasonable probability be detrimental to fresh water	No

Nature and Volume of Release	
Material(s) released, please answer all that apply below. Any calculations or specific justifications for the volumes provided should be attached to the follow-up C-141 submission.	
Crude Oil Released (bbls) Details	Cause: Midstream Emergency Maintenance | Pipeline (Any) | Crude Oil | Released: 13 BBL | Recovered: 4 BBL | Lost: 9 BBL.
Produced Water Released (bbls) Details	Cause: Midstream Emergency Maintenance | Pipeline (Any) | Produced Water | Released: 244 BBL | Recovered: 51 BBL | Lost: 193 BBL.
Is the concentration of chloride in the produced water >10,000 mg/l	No
Condensate Released (bbls) Details	*Not answered.*
Natural Gas Vented (Mcf) Details	*Not answered.*
Natural Gas Flared (Mcf) Details	*Not answered.*
Other Released Details	*Not answered.*
Are there additional details for the questions above (i.e. any answer containing Other, Specify, Unknown, and/or Fire, or any negative lost amounts)	*Not answered.*

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

QUESTIONS (continued)

Operator: Permian Resources Operating, LLC 300 N. Marienfeld St Ste 1000 Midland, TX 79701	OGRID: 372165
	Action Number: 383007
	Action Type: [C-141] Reclamation Report C-141 (C-141-v-Reclamation)

QUESTIONS

Nature and Volume of Release (continued)	
Is this a gas only submission (i.e. only significant Mcf values reported)	**No, according to supplied volumes this does not appear to be a "gas only" report.**
Was this a major release as defined by Subsection A of 19.15.29.7 NMAC	**Yes**
Reasons why this would be considered a submission for a notification of a major release	**From paragraph A. "Major release" determine using:** **(1) an unauthorized release of a volume, excluding gases, of 25 barrels or more.**

With the implementation of the 19.15.27 NMAC (05/25/2021), venting and/or flaring of natural gas (i.e. gas only) are to be submitted on the C-129 form.

Initial Response	
The responsible party must undertake the following actions immediately unless they could create a safety hazard that would result in injury.	
The source of the release has been stopped	True
The impacted area has been secured to protect human health and the environment	True
Released materials have been contained via the use of berms or dikes, absorbent pads, or other containment devices	True
All free liquids and recoverable materials have been removed and managed appropriately	True
If all the actions described above have not been undertaken, explain why	*Not answered.*

Per Paragraph (4) of Subsection B of 19.15.29.8 NMAC the responsible party may commence remediation immediately after discovery of a release. If remediation has begun, please prepare and attach a narrative of actions to date in the follow-up C-141 submission. If remedial efforts have been successfully completed or if the release occurred within a lined containment area (see Subparagraph (a) of Paragraph (5) of Subsection A of 19.15.29.11 NMAC), please prepare and attach all information needed for closure evaluation in the follow-up C-141 submission.

I hereby certify that the information given above is true and complete to the best of my knowledge and understand that pursuant to OCD rules and regulations all operators are required to report and/or file certain release notifications and perform corrective actions for releases which may endanger public health or the environment. The acceptance of a C-141 report by the OCD does not relieve the operator of liability should their operations have failed to adequately investigate and remediate contamination that pose a threat to groundwater, surface water, human health or the environment. In addition, OCD acceptance of a C-141 report does not relieve the operator of responsibility for compliance with any other federal, state, or local laws and/or regulations.

I hereby agree and sign off to the above statement	Name: Matthew Taylor Title: Environmental Coordinator Email: matthew.taylor@permianres.com Date: 09/20/2024

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

QUESTIONS (continued)

Operator: Permian Resources Operating, LLC 300 N. Marienfeld St Ste 1000 Midland, TX 79701	OGRID: 372165
	Action Number: 383007
	Action Type: [C-141] Reclamation Report C-141 (C-141-v-Reclamation)

QUESTIONS

Site Characterization	
Please answer all the questions in this group (only required when seeking remediation plan approval and beyond). This information must be provided to the appropriate district office no later than 90 days after the release discovery date.	
What is the shallowest depth to groundwater beneath the area affected by the release in feet below ground surface (ft bgs)	Between 26 and 50 (ft.)
What method was used to determine the depth to ground water	NM OSE iWaters Database Search
Did this release impact groundwater or surface water	No
What is the minimum distance, between the closest lateral extents of the release and the following surface areas:	
A continuously flowing watercourse or any other significant watercourse	Greater than 5 (mi.)
Any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark)	Between 1 and 5 (mi.)
An occupied permanent residence, school, hospital, institution, or church	Between 1 and 5 (mi.)
A spring or a private domestic fresh water well used by less than five households for domestic or stock watering purposes	Between 1000 (ft.) and ½ (mi.)
Any other fresh water well or spring	Between 1000 (ft.) and ½ (mi.)
Incorporated municipal boundaries or a defined municipal fresh water well field	Greater than 5 (mi.)
A wetland	Between 1 and 5 (mi.)
A subsurface mine	Greater than 5 (mi.)
An (non-karst) unstable area	Greater than 5 (mi.)
Categorize the risk of this well / site being in a karst geology	Low
A 100-year floodplain	Greater than 5 (mi.)
Did the release impact areas not on an exploration, development, production, or storage site	Yes

Remediation Plan	
Please answer all the questions that apply or are indicated. This information must be provided to the appropriate district office no later than 90 days after the release discovery date.	
Requesting a remediation plan approval with this submission	Yes
Attach a comprehensive report demonstrating the lateral and vertical extents of soil contamination associated with the release have been determined, pursuant to 19.15.29.11 NMAC and 19.15.29.13 NMAC.	
Have the lateral and vertical extents of contamination been fully delineated	Yes
Was this release entirely contained within a lined containment area	No
Soil Contamination Sampling: (Provide the highest observable value for each, in milligrams per kilograms.)	
Chloride (EPA 300.0 or SM4500 Cl B)	7560
TPH (GRO+DRO+MRO) (EPA SW-846 Method 8015M)	735
GRO+DRO (EPA SW-846 Method 8015M)	735
BTEX (EPA SW-846 Method 8021B or 8260B)	0
Benzene (EPA SW-846 Method 8021B or 8260B)	0
Per Subsection B of 19.15.29.11 NMAC unless the site characterization report includes completed efforts at remediation, the report must include a proposed remediation plan in accordance with 19.15.29.12 NMAC, which includes the anticipated timelines for beginning and completing the remediation.	
On what estimated date will the remediation commence	10/23/2023
On what date will (or did) the final sampling or liner inspection occur	02/19/2024
On what date will (or was) the remediation complete(d)	03/11/2024
What is the estimated surface area (in square feet) that will be reclaimed	143975
What is the estimated volume (in cubic yards) that will be reclaimed	3770
What is the estimated surface area (in square feet) that will be remediated	143975
What is the estimated volume (in cubic yards) that will be remediated	3770
These estimated dates and measurements are recognized to be the best guess or calculation at the time of submission and may (be) change(d) over time as more remediation efforts are completed.	
The OCD recognizes that proposed remediation measures may have to be minimally adjusted in accordance with the physical realities encountered during remediation. If the responsible party has any need to significantly deviate from the remediation plan proposed, then it should consult with the division to determine if another remediation plan submission is required.	

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

QUESTIONS (continued)

Operator: Permian Resources Operating, LLC 300 N. Marienfeld St Ste 1000 Midland, TX 79701	OGRID: 372165
	Action Number: 383007
	Action Type: [C-141] Reclamation Report C-141 (C-141-v-Reclamation)

QUESTIONS

Remediation Plan (continued)	
Please answer all the questions that apply or are indicated. This information must be provided to the appropriate district office no later than 90 days after the release discovery date.	
This remediation will (or is expected to) utilize the following processes to remediate / reduce contaminants:	
(Select all answers below that apply.)	
(Ex Situ) Excavation and **off-site** disposal (i.e. dig and haul, hydrovac, etc.)	Yes
Which OCD approved facility will be used for **off-site** disposal	OWL LANDFILL JAL [fJEG1635837366]
OR which OCD approved well (API) will be used for **off-site** disposal	*Not answered.*
OR is the **off-site** disposal site, to be used, out-of-state	*Not answered.*
OR is the **off-site** disposal site, to be used, an NMED facility	*Not answered.*
(Ex Situ) Excavation and **on-site** remediation (i.e. On-Site Land Farms)	*Not answered.*
(In Situ) Soil Vapor Extraction	*Not answered.*
(In Situ) Chemical processing (i.e. Soil Shredding, Potassium Permanganate, etc.)	*Not answered.*
(In Situ) Biological processing (i.e. Microbes / Fertilizer, etc.)	*Not answered.*
(In Situ) Physical processing (i.e. Soil Washing, Gypsum, Disking, etc.)	*Not answered.*
Ground Water Abatement pursuant to 19.15.30 NMAC	*Not answered.*
OTHER (Non-listed remedial process)	*Not answered.*
Per Subsection B of 19.15.29.11 NMAC unless the site characterization report includes completed efforts at remediation, the report must include a proposed remediation plan in accordance with 19.15.29.12 NMAC, which includes the anticipated timelines for beginning and completing the remediation.	
I hereby certify that the information given above is true and complete to the best of my knowledge and understand that pursuant to OCD rules and regulations all operators are required to report and/or file certain release notifications and perform corrective actions for releases which may endanger public health or the environment. The acceptance of a C-141 report by the OCD does not relieve the operator of liability should their operations have failed to adequately investigate and remediate contamination that pose a threat to groundwater, surface water, human health or the environment. In addition, OCD acceptance of a C-141 report does not relieve the operator of responsibility for compliance with any other federal, state, or local laws and/or regulations.	
I hereby agree and sign off to the above statement	Name: Matthew Taylor Title: Environmental Coordinator Email: matthew.taylor@permianres.com Date: 09/20/2024
The OCD recognizes that proposed remediation measures may have to be minimally adjusted in accordance with the physical realities encountered during remediation. If the responsible party has any need to significantly deviate from the remediation plan proposed, then it should consult with the division to determine if another remediation plan submission is required.	

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

QUESTIONS (continued)

Operator: Permian Resources Operating, LLC 300 N. Marienfeld St Ste 1000 Midland, TX 79701	OGRID: 372165
	Action Number: 383007
	Action Type: [C-141] Reclamation Report C-141 (C-141-v-Reclamation)

QUESTIONS

Deferral Requests Only *Only answer the questions in this group if seeking a deferral upon approval this submission. Each of the following items must be confirmed as part of any request for deferral of remediation.*	
Requesting a deferral of the remediation closure due date with the approval of this submission	No

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

QUESTIONS (continued)

Operator: Permian Resources Operating, LLC 300 N. Marienfeld St Ste 1000 Midland, TX 79701	OGRID: 372165
	Action Number: 383007
	Action Type: [C-141] Reclamation Report C-141 (C-141-v-Reclamation)

QUESTIONS

Sampling Event Information	
Last sampling notification (C-141N) recorded	**383178**
Sampling date pursuant to Subparagraph (a) of Paragraph (1) of Subsection D of 19.15.29.12 NMAC	**09/18/2024**
What was the (estimated) number of samples that were to be gathered	**568**
What was the sampling surface area in square feet	**143975**

Remediation Closure Request	
Only answer the questions in this group if seeking remediation closure for this release because all remediation steps have been completed.	
Requesting a remediation closure approval with this submission	Yes
Have the lateral and vertical extents of contamination been fully delineated	**Yes**
Was this release entirely contained within a lined containment area	**No**
All areas reasonably needed for production or subsequent drilling operations have been stabilized, returned to the sites existing grade, and have a soil cover that prevents ponding of water, minimizing dust and erosion	Yes
What was the total surface area (in square feet) remediated	143975
What was the total volume (cubic yards) remediated	3770
All areas not reasonably needed for production or subsequent drilling operations have been reclaimed to contain a minimum of four feet of non-waste contain earthen material with concentrations less than 600 mg/kg chlorides, 100 mg/kg TPH, 50 mg/kg BTEX, and 10 mg/kg Benzene	Yes
What was the total surface area (in square feet) reclaimed	143975
What was the total volume (in cubic yards) reclaimed	3770
Summarize any additional remediation activities not included by answers (above)	Remediation activities have been completed at this site.

The responsible party must attach information demonstrating they have complied with all applicable closure requirements and any conditions or directives of the OCD. This demonstration should be in the form of a comprehensive report (in .pdf format) including a scaled site map, sampling diagrams, relevant field notes, photographs of any excavation prior to backfilling, laboratory data including chain of custody documents of final sampling, and a narrative of the remedial activities. Refer to 19.15.29.12 NMAC.

I hereby certify that the information given above is true and complete to the best of my knowledge and understand that pursuant to OCD rules and regulations all operators are required to report and/or file certain release notifications and perform corrective actions for releases which may endanger public health or the environment. The acceptance of a C-141 report by the OCD does not relieve the operator of liability should their operations have failed to adequately investigate and remediate contamination that pose a threat to groundwater, surface water, human health or the environment. In addition, OCD acceptance of a C-141 report does not relieve the operator of responsibility for compliance with any other federal, state, or local laws and/or regulations. The responsible party acknowledges they must substantially restore, reclaim, and re-vegetate the impacted surface area to the conditions that existed prior to the release or their final land use in accordance with 19.15.29.13 NMAC including notification to the OCD when reclamation and re-vegetation are complete.

I hereby agree and sign off to the above statement	Name: Matthew Taylor Title: Environmental Coordinator Email: matthew.taylor@permianres.com Date: 09/20/2024

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

QUESTIONS (continued)

Operator: Permian Resources Operating, LLC 300 N. Marienfeld St Ste 1000 Midland, TX 79701	OGRID: 372165
	Action Number: 383007
	Action Type: [C-141] Reclamation Report C-141 (C-141-v-Reclamation)

QUESTIONS

Reclamation Report	
Only answer the questions in this group if all reclamation steps have been completed.	
Requesting a reclamation approval with this submission	Yes
What was the total reclamation surface area (in square feet) for this site	143975
What was the total volume of replacement material (in cubic yards) for this site	3770
Per Paragraph (1) of Subsection D of 19.15.29.13 NMAC the reclamation must contain a minimum of four feet of non-waste containing, uncontaminated, earthen material with chloride concentrations less than 600 mg/kg as analyzed by EPA Method 300.0, or other test methods approved by the division. The soil cover must include a top layer, which is either the background thickness of topsoil or one foot of suitable material to establish vegetation at the site, whichever is greater.	
Is the soil top layer complete and is it suitable material to establish vegetation	Yes
On what (estimated) date will (or was) the reseeding commence(d)	03/01/2025
Summarize any additional reclamation activities not included by answers (above)	The site will be reseeded during the first favorable growing season.
The responsible party must attach information demonstrating they have complied with all applicable reclamation requirements and any conditions or directives of the OCD. This demonstration should be in the form of attachments (in .pdf format) including a scaled site map, any proposed reseeding plans or relevant field notes, photographs of reclaimed area, and a narrative of the reclamation activities. Refer to 19.15.29.13 NMAC.	
I hereby certify that the information given above is true and complete to the best of my knowledge and understand that pursuant to OCD rules and regulations all operators are required to report and/or file certain release notifications and perform corrective actions for releases which may endanger public health or the environment. The acceptance of a C-141 report by the OCD does not relieve the operator of liability should their operations have failed to adequately investigate and remediate contamination that pose a threat to groundwater, surface water, human health or the environment. In addition, OCD acceptance of a C-141 report does not relieve the operator of responsibility for compliance with any other federal, state, or local laws and/or regulations. The responsible party acknowledges they must substantially restore, reclaim, and re-vegetate the impacted surface area to the conditions that existed prior to the release or their final land use in accordance with 19.15.29.13 NMAC including notification to the OCD when reclamation and re-vegetation are complete.	
I hereby agree and sign off to the above statement	Name: Matthew Taylor Title: Environmental Coordinator Email: matthew.taylor@permianres.com Date: 09/20/2024

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

QUESTIONS (continued)

Operator: Permian Resources Operating, LLC 300 N. Marienfeld St Ste 1000 Midland, TX 79701	OGRID: 372165
	Action Number: 383007
	Action Type: [C-141] Reclamation Report C-141 (C-141-v-Reclamation)

QUESTIONS

Revegetation Report	
Only answer the questions in this group if all surface restoration, reclamation and re-vegetation obligations have been satisfied.	
Requesting a restoration complete approval with this submission	No
Per Paragraph (4) of Subsection (D) of 19.15.29.13 NMAC for any major or minor release containing liquids, the responsible party must notify the division when reclamation and re-vegetation are complete.	

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Operator: Permian Resources Operating, LLC 300 N. Marienfeld St Ste 1000 Midland, TX 79701	OGRID: 372165
	Action Number: 383007
	Action Type: [C-141] Reclamation Report C-141 (C-141-v-Reclamation)

CONDITIONS

Created By	Condition	Condition Date
nvelez	Remediation closure & reclamation reports approved, release resolved.	12/18/2024