

Accepted - 02/24/2025



ENSOLUM

NV

July 31, 2024

New Mexico Oil Conservation Division

New Mexico Energy, Minerals, and Natural Resources Department
1220 South St. Francis Drive
Santa Fe, New Mexico 87505

Re: Second Quarter 2024 – Solar SVE System Update

James Ranch Unit #10 Battery
Eddy County, New Mexico
XTO Energy, Inc.

NMOCD Incident Numbers NAB1535754357, NAB1521257588, and NAB1904653072

To Whom it May Concern:

Ensolum, LLC (Ensolum), on behalf of XTO Energy, Inc. (XTO), presents this *Second Quarter 2024 - Solar SVE System Update* report summarizing the solar soil vapor extraction (SVE) system performance at the James Ranch Unit #10 Battery (Site), located in Unit H, Section 1, Township 23 South, Range 30 East in Eddy County, New Mexico (Figure 1). The SVE system has operated since May 27, 2022, to remediate residual subsurface soil impacts at the Site. This report summarizes Site activities performed in April, May, and June of 2024 for the New Mexico Oil Conservation Division (NMOCD).

SVE SYSTEM SPECIFICATIONS

Currently, a VariSun Direct Solar SVE system is installed at the Site. This system consists of a 6.2 horsepower (HP) Pentair SST65 high efficiency regenerative blower capable of producing 250 cubic feet per minute (cfm) flow and a vacuum of 110 inches of water column (IWC). The system is powered by 12, 415-watt solar modules capable of producing 5 kilowatts (KW) of electricity. A motor controller automatically starts the system as soon as sunlight is available and increases the electrical output to the blower as solar power increases throughout the day.

Ten SVE wells (SVE01 through SVE06 and SVE-PT-01 through SVE-PT-04) are currently installed at the Site, as depicted on Figure 2. In order to target total petroleum hydrocarbons (TPH) and benzene, toluene, ethylbenzene, and total xylenes (BTEX) soil impacts at different depth intervals, the screened intervals of the SVE wells were installed in shallow, medium, and deep zones. Specifically, SVE wells SVE01, SVE02, SVE03, and SVE04 target shallow zone impacts and are screened at depths between 5 feet and 20 feet below ground surface (bgs). SVE wells SVE-PT-02, SVE-PT-03, and SVE-PT-04 target medium zone impacts and are screened between 15 feet and 30 feet bgs. SVE wells SVE05, SVE06, and SVE-PT-01 target deep zone impacts and are screened at depths between 25 feet and 65 feet bgs.

SUMMARY OF SVE OPERATIONS

During the second quarter of 2024, Ensolum personnel performed routine operation and maintenance (O&M) visits to verify that the system was operating as designed and to perform any

required maintenance. In accordance with the approved *Revised Remediation Work Plan – SVE System* prepared by LT Environmental, Inc. (LTE, dated October 30, 2019), O&M inspections were performed at least monthly during this time period. Field notes taken during O&M visits are included as Appendix A.

During the second quarter of 2024, vapor extraction was applied to all SVE wells except for SVE03 and SVE06 (as recommended in the *Second Quarter 2023 - Solar SVE System Update*) to remove hydrocarbon impacts from the impacted zones at the Site. Between March 13, 2024, and July 2, 2024, approximately 1,409 total hours of nominal daylight were available for the solar SVE system to operate. Available nominal daylight hours are based on estimates by the National Oceanic and Atmospheric Administration's (NOAA's) National Weather Service (NWS) for the Site location. Between these dates, the actual runtime for the system was 1,363.9 hours, equating to a runtime efficiency of 96.8 percent (%). Run time for solar SVE systems can be less than the nominal hours due to cloud cover or other adverse weather preventing sufficient sunlight to generate electrical energy through solar conversion. Table 1 presents the SVE system runtime compared to nominal available daylight hours per month.

VAPOR SAMPLING RESULTS

Due to a scheduling error, a second quarter 2024 vapor sample was not collected until July 2, 2024. The vapor sample was collected from a sample port located between the SVE piping manifold and the SVE blower using a high vacuum air sampler. Prior to collection, the vapor sample was field screened with a photoionization detector (PID) for organic vapor monitoring (OVM). The vapor sample was collected directly into two 1-Liter Tedlar® bags and submitted to Eurofins Laboratories (Eurofins) in Carlsbad, New Mexico for analysis of total volatile petroleum hydrocarbons (TVPH – also known as TPH – gasoline range organics (GRO)) and BTEX following Environmental Protection Agency (EPA) Method 8260C.

TVPH concentrations account for the majority contaminant mass and system emissions, with a result of 870 micrograms per liter (µg/L). In comparison, individual BTEX constituent concentrations range from below the laboratory reporting limits up to 29.5 µg/L in the second quarter of 2024. Table 2 presents a summary of TVPH and BTEX analytical data collected during the sampling events, with the full laboratory analytical reports included in Appendix B.

Vapor sample data and measured stack flow rates are used to estimate total mass recovered and total emissions generated by the SVE system (Table 2). Based on these estimates, approximately 18,362 pounds (9.18 tons) of TVPH have been removed by the system to date.

SYSTEM ADJUSTMENTS AND RECOMMENDATIONS

As noted in the *First Quarter 2024 – Solar SVE System Update*, telemetry flow readings could not be used to calculate average flow for March of 2024 as data logging has not been functioning properly since March 2, 2024. On April 19, 2024, it was identified that the telemetry issue was the result of a licensing error. The error was resolved with the system manufacturer thereafter.

A notable drop in TVPH was observed between the results of the first quarter 2024 vapor sample and second quarter 2024 vapor sample. Ensolum personnel are working to identify whether the drop in mass removal is due to a leak within the process stream allowing for fresh air to mix with the recovered vapor prior to the same port or whether the decrease is because less mass remains in the subsurface. Adjustments to system operation will continue to be made in order to maximize mass removal.

XTO Energy, Inc.
Second Quarter 2024 - Solar SVE System Update
James Ranch Unit #10 Battery

Page 3


Monthly O&M visits will continue to be performed by Ensolum personnel to verify the SVE system is operating within normal working ranges (i.e., temperature, pressure, and vacuum). Deviations from regular operations will be noted on field logs and included in the following update report. XTO will continue operating the SVE system until TVPH concentrations decrease to below 1,000 µg/L for several consecutive quarters and/or asymptotic conditions are observed. At that time, an evaluation of residual petroleum hydrocarbons will be assessed and further recommendations for remedial actions, if any, will be provided to the NMOCD.

We appreciate the opportunity to provide this report to the NMOCD. If you should have any questions or comments regarding this report, please contact the undersigned.

Sincerely,
Ensolum, LLC



Stuart Hyde
Senior Managing Geologist
(970) 903-1607
shyde@ensolum.com




Daniel R. Moir
Senior Managing Geologist
(303) 887-2946
dmoir@ensolum.com

Attachments:

Figure 1	Site Location Map
Figure 2	SVE System Configuration
Table 1	Soil Vapor Extraction System Runtime Calculations
Table 2	Soil Vapor Extraction System Mass Removal and Emissions
Appendix A	Field Notes
Appendix B	Laboratory Analytical Reports & Chain-of-Custody Documentation



FIGURES

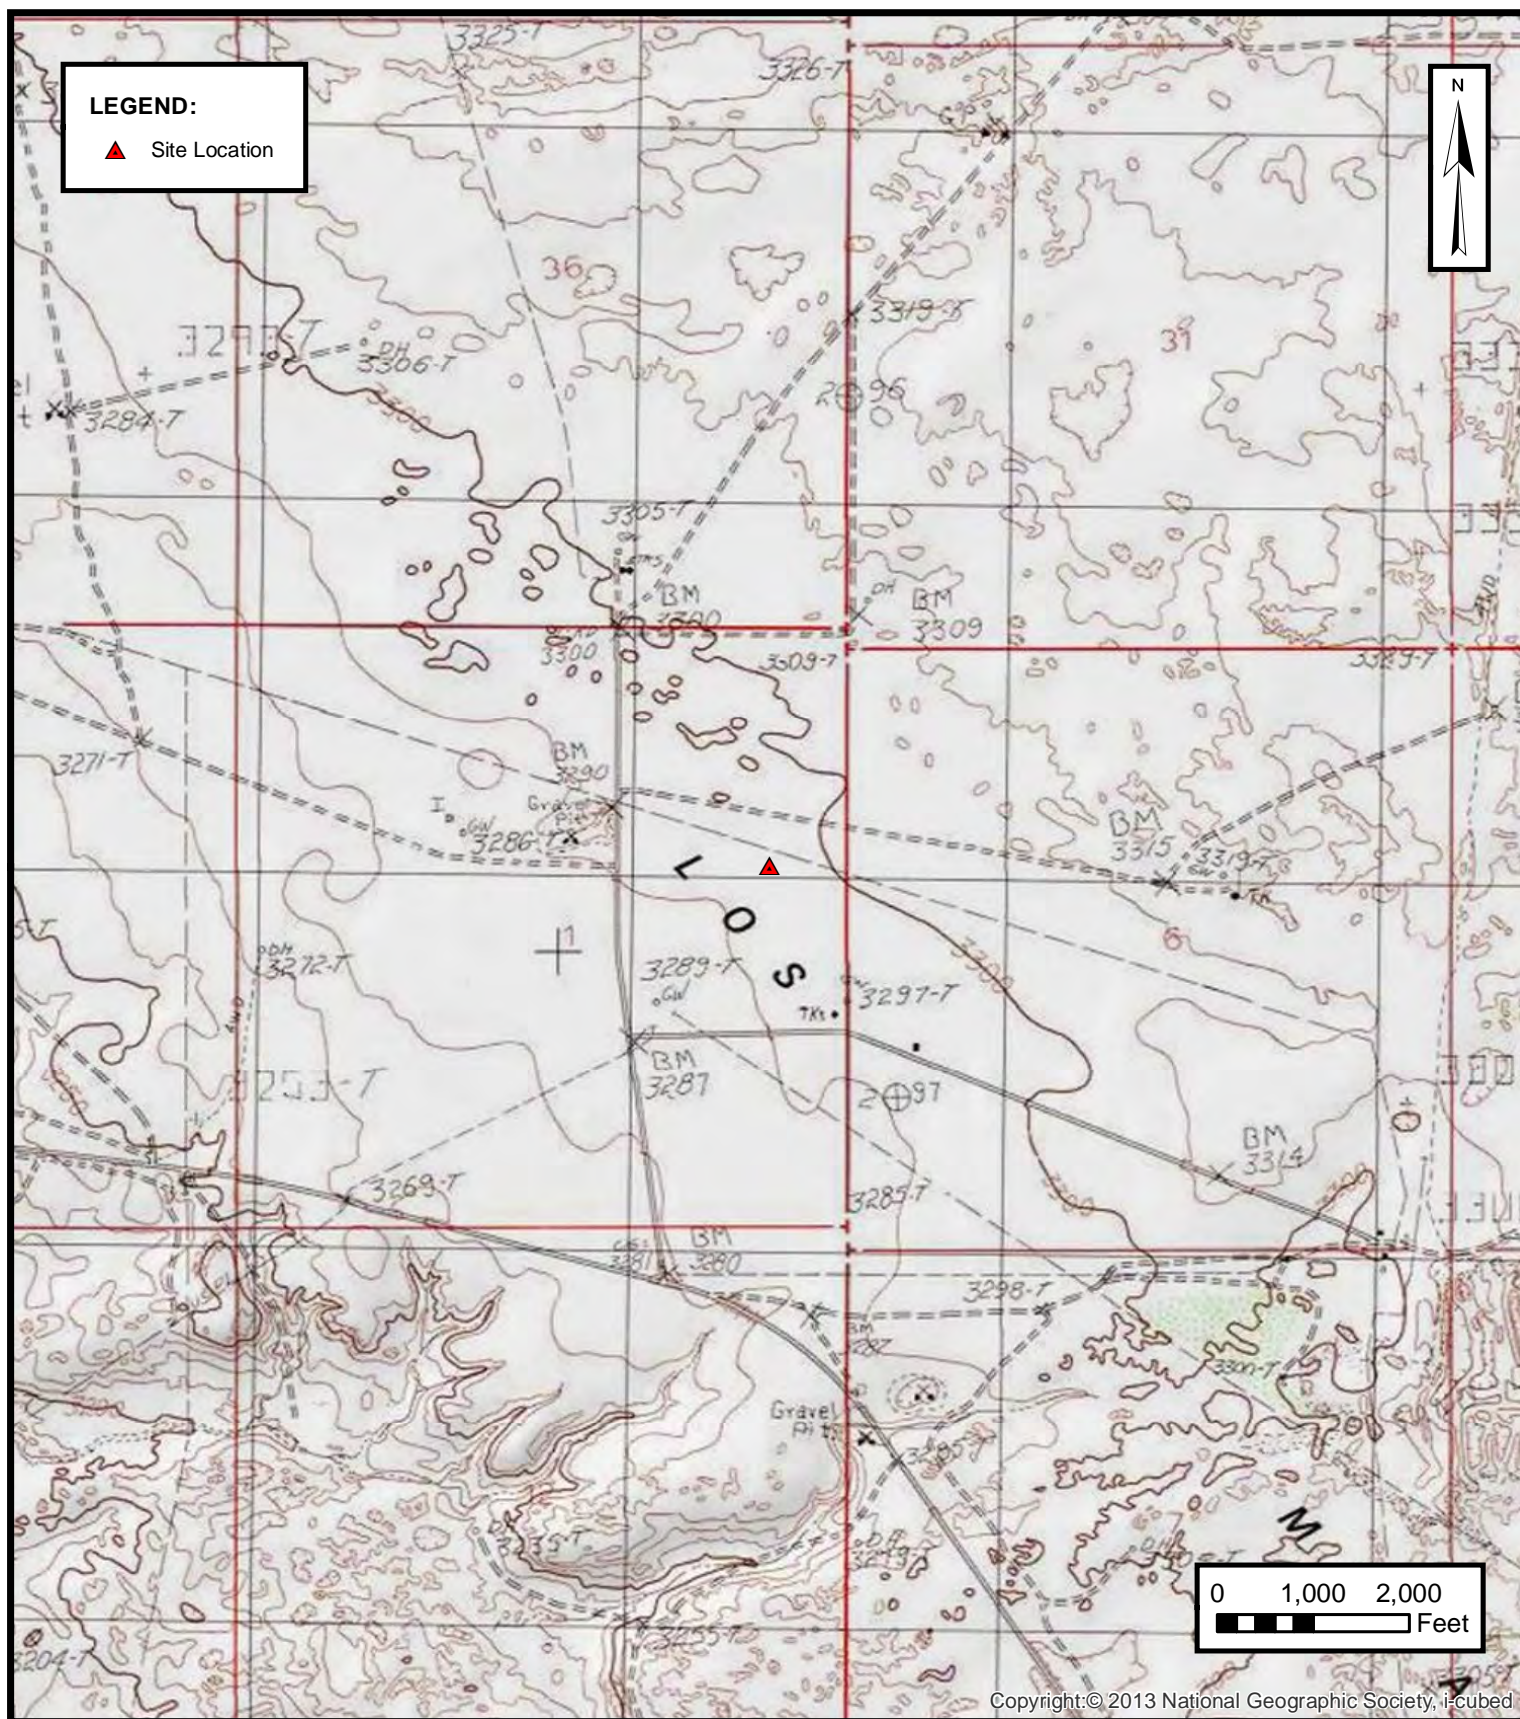


SITE LOCATION MAP

XTO ENERGY, INC
JAMES RANCH UNIT #10 BATTERY
Unit H, Sec 1, T23S, R30E
Eddy County, New Mexico

FIGURE

1

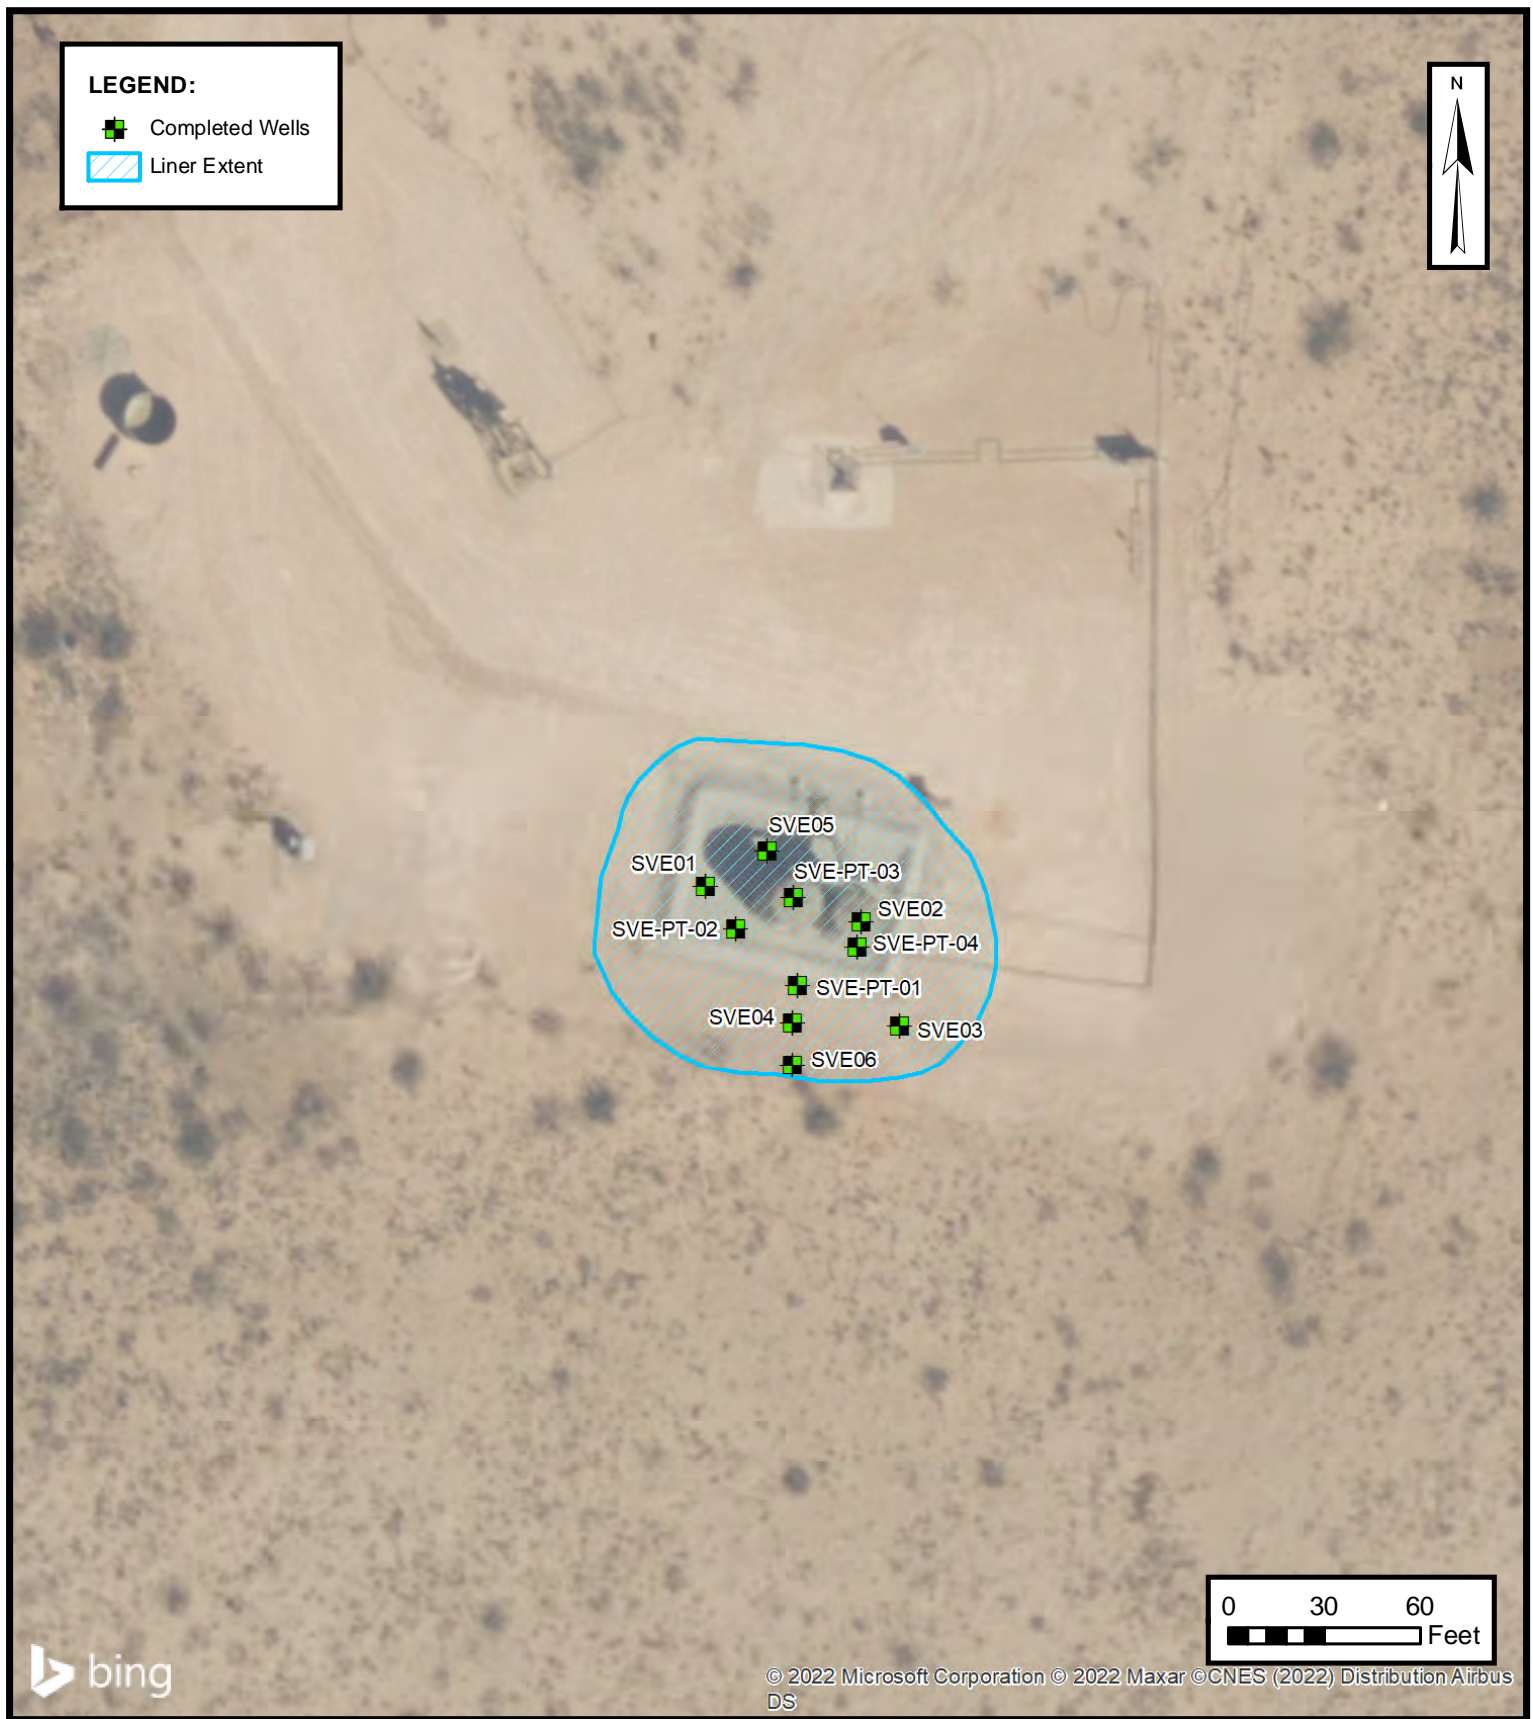**ENSOLUM**

Environmental & Hydrogeologic Consultants

SVE SYSTEM CONFIGURATION

XTO ENERGY, INC
JAMES RANCH UNIT #10 BATTERY
Unit H, Sec 1, T23S, R30E
Eddy County, New Mexico

FIGURE**2**



TABLES



TABLE 1
SOIL VAPOR EXTRACTION SYSTEM RUNTIME CALCULATIONS

James Ranch Unit #10 Battery

XTO Energy

Eddy County, New Mexico

Date	Runtime Meter Hours	Delta Hours
3/13/2024	6,483.1	--
7/2/2024	7,847.0	1,363.9

Time Period	March 13 to March 31, 2024	April 1 to April 30, 2024	May 1 to May 31, 2024	June 1 and June 30, 2024	July 1 and July 2, 2024
Days	18	30	31	30	2
Avg. Nominal Daylight Hours	11	12	13	14	14
Available Runtime Hours	198	360	403	420	28

Quarterly Available Daylight Runtime Hours **1,409**

Quarterly Runtime Hours **1,363.9**

Quarterly % Runtime **96.8%**

Month	Days	Nominal Daylight Hours	Total Month Hours
January	31	9	279
February	28	10	280
March	31	11	341
April	30	12	360
May	31	13	403
June	30	14	420
July	31	14	434
August	31	13	403
September	30	12	360
October	31	11	341
November	30	10	300
December	31	9	279



TABLE 2
SOIL VAPOR EXTRACTION SYSTEM MASS REMOVAL AND EMISSIONS

James Ranch Unit #10 Battery
XTO Energy
Eddy County, New Mexico

Laboratory Analytical Results

Date	PID (ppm)	Benzene (µg/L)	Toluene (µg/L)	Ethylbenzene (µg/L)	Total Xylenes (µg/L)	TVPH (µg/L)
5/27/2022*	679	12.6	40.5	10.0	34.6	12,500
6/8/2022*	901	21.0	210	9.90	434	35,000
6/20/2022*	960	21.2	199	10	225	20,200
7/18/2022*	535	17.1	138	11.1	252	14,400
8/15/2022*	987	50.0	135	50.0	227	12,300
9/19/2022	380	10.0	54.9	10.0	110	4,830
12/19/2022	337	10.0	27.7	10.0	47.1	3,030
3/15/2023	245	10.0	25.2	10.0	29.4	1,630
6/14/2023	323	10.0	29.2	10.0	54.9	2,180
9/20/2023	611	10.0	43.4	10.0	106	5,210
12/14/2023	278	10.0	30.3	10.0	78.4	3,820
3/13/2024	358	10.0	29.0	10.0	80.8	2,900
7/2/2024	260	10.0	16.9	10.0	29.5	870
Average	527	15.5	75	13.2	131	9,144

Flow and Vapor Extraction Summary

Date	Flow Rate (cfm) ⁽¹⁾	Total System Flow (cf)	Delta Flow (cf)	Benzene (lb/hr)	Toluene (lb/hr)	Ethylbenzene (lb/hr)	Total Xylenes (lb/hr)	TVPH (lb/hr)
5/27/2022	140	0	--	--	--	--	--	--
6/8/2022	113	1,046,154	1,046,154	0.00710	0.0529	0.00421	0.0990	10.0
6/20/2022	105	2,047,854	1,001,700	0.00829	0.0803	0.00391	0.129	10.8
7/18/2022	70	3,572,454	1,524,600	0.00501	0.0441	0.00276	0.0624	4.53
8/15/2022	98	5,656,098	2,083,644	0.0123	0.0501	0.0112	0.0879	4.90
9/19/2022	138	8,742,054	3,085,956	0.0155	0.0490	0.0155	0.0870	4.42
12/19/2022	150	15,449,754	6,707,700	0.00561	0.0232	0.00561	0.0441	2.20
3/15/2023	141	21,230,472	5,780,718	0.00527	0.0139	0.00527	0.0202	1.23
6/14/2023	132	29,220,168	7,989,696	0.00494	0.0134	0.00494	0.0208	0.940
9/20/2023	132	38,728,920	9,508,752	0.00494	0.0179	0.00494	0.0397	1.82
12/14/2023	149	45,377,598	6,648,678	0.00557	0.0205	0.00557	0.0514	2.52
3/13/2024 ⁽²⁾	133	50,950,830	5,573,232	0.00497	0.0147	0.00497	0.0396	1.67
7/2/2024	146	62,898,594	11,947,764	0.00546	0.0125	0.00546	0.0301	1.03
Average				0.00708	0.0327	0.00619	0.0593	3.84

Mass Removal and Emissions Summary

Date	Total SVE System Hours	Delta Hours	Benzene (pounds)	Toluene (pounds)	Ethylbenzene (pounds)	Total Xylenes (pounds)	TVPH (pounds)	TVPH (tons)
5/27/2022	0	0	--	--	--	--	--	--
6/8/2022	154	154	1.10	8.17	0.649	15.3	1,549	0.774
6/20/2022	313	159	1.32	12.8	0.621	20.6	1,723	0.862
7/18/2022	676	363	1.82	16.0	1.00	22.7	1,644	0.822
8/15/2022	1,030	354	4.36	17.7	3.97	31.1	1,734	0.867
9/19/2022	1,403	373	5.77	18.3	5.77	32.4	1,648	0.824
12/19/2022	2,148	745	4.18	17.3	4.18	32.8	1,643	0.822
3/15/2023	2,832	683	3.60	9.5	3.60	13.8	840	0.420
6/14/2023	3,840	1,009	4.98	13.5	4.98	21.0	949	0.474
9/20/2023	5,041	1,201	5.93	21.5	5.93	47.7	2,190	1.10
12/14/2023	5,785	744	4.14	15.3	4.14	38.2	1,871	0.936
3/13/2024	6,483	698	3.47	10.3	3.47	27.7	1,167	0.584
7/2/2024	7,847	1,364	7.45	17.1	7.45	41.1	1,404	0.702
Total Mass Recovery to Date			48.1	177.5	45.8	344	18,362	9.18

Notes:

(1): average flow calculated from telemetry data beginning 9/21/2023

(2): flow rate for 3/13/2024 calcs based on January and February telemetry plus March site visit due to telemetry issues

cf: cubic feet

cfm: cubic feet per minute

µg/L: micrograms per liter

lb/hr: pounds per hour

--: not sampled

PID: photoionization detector

ppm: parts per million

SVE: soil vapor extraction

TVPH: total volatile petroleum hydrocarbons

gray: laboratory reporting limit used for calculating emissions

*: analytical results differ from those reported in the August 23, 2022 "Solar SVE System Update" due to unit conversion errors



APPENDIX A

Field Notes

Location _____

Date

4-25-24

Project / Client

XTO JRU 10 SVE 08m

CW

14:00 on site SVE running Sunny Clear
KO tank $< 1/4$ full

Main Vac: 36 in H₂O

Runtime: 7000 Hrs.

Flow: 138 cfm

(in H₂O)

02

26

PT04

29

PT01

29

03

N/A

Valve closed

05

28

PT03

27

01

28

04

28

06

N/A

Valve closed

PT02

30

14:15 off site

Location _____

Date 5-20-24

Project / Client XTO JRU 10 SVE O&M

8:15	on site	SVE running	70. MO sunny, clear
	KO tank	empty	(no water in tube)
	Main Vac:	27 in H ₂ O	
	Runtime:	7314.5 Hrs	
	Flow:	112.7 cfm	
	Wells:	(in H ₂ O)	
	02	19	
	PT04	21	
	PT01	18	
	03	N/A	valve closed
	05	21	
	PT03	20	
	01	20	
	04	20	
	06	N/A	valve closed
	PT02	22	
8:50	offsite		

48

Location

Date

6-11-24

Project / Client

XTO JRV 1e

CW JB

9:45

on site system running, clear/sunny
KO tank @ no waterNom vac 30 in H₂O

Runtime 7598.1 Hrs

Flow 120 cfm

Wdls (in H₂O)

SVE02 22

PT04 25

PT01 24

O3 N/A valve closed

O5 24

PT03 23

O1 23

O4 23

O6 N/A valve closed

PT02 25

1005 offsite

LHA

Location

Project / Client

XTO DRU 10 Sampling

CW

8:10 on site + JSA, sunny system running

Main Vac: 25 in H₂O

Run time: 7847

Flow: 106.5 CFM

Influent all wells: 259.9 ppm

SVE wells(in H₂O)

02

18

PT04

22

PT01

20

03

NA

valve closed

05

20

PT03

20

01

20

04

20

06

NA

valve closed

PT02

22

8:35 Sample collected, (2) Tetter bags (1 L each)

8:50 Euro fins picks up samples
off site



APPENDIX B

Laboratory Analytical Reports & Chain-of-Custody Documentation



Environment Testing

1

2

3

4

5

6

7

8

9

10

11

12

13

14

ANALYTICAL REPORT

PREPARED FOR

Attn: Stuart Hyde

Ensolum

601 N. Marienfeld St.

Suite 400

Midland, Texas 79701

Generated 7/19/2024 4:12:20 PM Revision 1

JOB DESCRIPTION

James Ranch Unit #10

JOB NUMBER

890-6877-1

Eurofins Carlsbad
1089 N Canal St.
Carlsbad NM 88220

Eurofins Carlsbad

Job Notes

This report may not be reproduced except in full, and with written approval from the laboratory. The results relate only to the samples tested. For questions please contact the Project Manager at the e-mail address or telephone number listed on this page.

Analytical test results meet all requirements of the associated regulatory program (i.e., NELAC (TNI), DoD, and ISO 17025) unless otherwise noted under the individual analysis.

Authorization



Authorized for release by
Jessica Kramer, Project Manager
Jessica.Kramer@et.eurofinsus.com
(432)704-5440

Generated
7/19/2024 4:12:20 PM
Revision 1

Client: Ensolum
Project/Site: James Ranch Unit #10

Laboratory Job ID: 890-6877-1

Table of Contents

Cover Page	1
Table of Contents	3
Definitions/Glossary	4
Case Narrative	5
Client Sample Results	6
Surrogate Summary	7
QC Sample Results	8
QC Association Summary	10
Lab Chronicle	11
Certification Summary	12
Method Summary	13
Sample Summary	14
Chain of Custody	15
Receipt Checklists	16

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14

Definitions/Glossary

Client: Ensolum
Project/Site: James Ranch Unit #10

Job ID: 890-6877-1

Qualifiers

GC/MS VOA

Qualifier	Qualifier Description
U	Indicates the analyte was analyzed for but not detected.

Glossary

Abbreviation	These commonly used abbreviations may or may not be present in this report.
α	Listed under the "D" column to designate that the result is reported on a dry weight basis
%R	Percent Recovery
CFL	Contains Free Liquid
CFU	Colony Forming Unit
CNF	Contains No Free Liquid
DER	Duplicate Error Ratio (normalized absolute difference)
Dil Fac	Dilution Factor
DL	Detection Limit (DoD/DOE)
DL, RA, RE, IN	Indicates a Dilution, Re-analysis, Re-extraction, or additional Initial metals/anion analysis of the sample
DLC	Decision Level Concentration (Radiochemistry)
EDL	Estimated Detection Limit (Dioxin)
LOD	Limit of Detection (DoD/DOE)
LOQ	Limit of Quantitation (DoD/DOE)
MCL	EPA recommended "Maximum Contaminant Level"
MDA	Minimum Detectable Activity (Radiochemistry)
MDC	Minimum Detectable Concentration (Radiochemistry)
MDL	Method Detection Limit
ML	Minimum Level (Dioxin)
MPN	Most Probable Number
MQL	Method Quantitation Limit
NC	Not Calculated
ND	Not Detected at the reporting limit (or MDL or EDL if shown)
NEG	Negative / Absent
POS	Positive / Present
PQL	Practical Quantitation Limit
PRES	Presumptive
QC	Quality Control
RER	Relative Error Ratio (Radiochemistry)
RL	Reporting Limit or Requested Limit (Radiochemistry)
RPD	Relative Percent Difference, a measure of the relative difference between two points
TEF	Toxicity Equivalent Factor (Dioxin)
TEQ	Toxicity Equivalent Quotient (Dioxin)
TNTC	Too Numerous To Count

Case Narrative

Client: Ensolum
Project: James Ranch Unit #10

Job ID: 890-6877-1

Job ID: 890-6877-1

Eurofins Carlsbad

Job Narrative
890-6877-1

REVISION

The report being provided is a revision of the original report sent on 7/15/2024. The report (revision 1) is being revised due to Per client phone call, reporting unit needs to be corrected.

Analytical test results meet all requirements of the associated regulatory program listed on the Accreditation/Certification Summary Page unless otherwise noted under the individual analysis. Data qualifiers and/or narrative comments are included to explain any exceptions, if applicable.

- Matrix QC may not be reported if insufficient sample is provided or site-specific QC samples were not submitted. In these situations, to demonstrate precision and accuracy at a batch level, a LCS/LCSD may be performed, unless otherwise specified in the method.
- Surrogate and/or isotope dilution analyte recoveries (if applicable) which are outside of the QC window are confirmed unless attributed to a dilution or otherwise noted in the narrative.

Regulated compliance samples (e.g. SDWA, NPDES) must comply with the associated agency requirements/permits.

Receipt

The samples were received on 7/2/2024 2:08 PM. Unless otherwise noted below, the samples arrived in good condition, and, where required, properly preserved and on ice. The temperature of the cooler at receipt time was 0.0°C.

Gasoline Range Organics

No additional analytical or quality issues were noted, other than those described above or in the Definitions/ Glossary page.

GC/MS VOA

No additional analytical or quality issues were noted, other than those described above or in the Definitions/ Glossary page.

Eurofins Carlsbad

Client Sample Results

Client: Ensolum
Project/Site: James Ranch Unit #10

Job ID: 890-6877-1

Client Sample ID: Influent All Wells

Lab Sample ID: 890-6877-2

Date Collected: 07/02/24 08:35

Matrix: Air

Date Received: 07/02/24 14:08

Sample Container: Tedlar Bag 1L

Method: SW846 8260C GRO - Volatile Organic Compounds (GC/MS)

Analyte	Result	Qualifier	RL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics	870000		50000	ug/m3	-		07/05/24 18:00	1
Surrogate	%Recovery	Qualifier	Limits			Prepared	Analyzed	Dil Fac
4-Bromofluorobenzene (Surr)	88		60 - 140				07/05/24 18:00	1

Method: SW846 8260C - Volatile Organic Compounds (GCMS)

Analyte	Result	Qualifier	RL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<10000	U	10000	ug/m3	-		07/05/24 18:00	1
Toluene	16900		10000	ug/m3			07/05/24 18:00	1
Ethylbenzene	<10000	U	10000	ug/m3			07/05/24 18:00	1
m,p-Xylenes	29500		20000	ug/m3			07/05/24 18:00	1
o-Xylene	<10000	U	10000	ug/m3			07/05/24 18:00	1
Xylenes, Total	29500		20000	ug/m3			07/05/24 18:00	1
Surrogate	%Recovery	Qualifier	Limits			Prepared	Analyzed	Dil Fac
4-Bromofluorobenzene (Surr)	92		70 - 135				07/05/24 18:00	1

Eurofins Carlsbad

Surrogate Summary

Client: Ensolum
Project/Site: James Ranch Unit #10

Job ID: 890-6877-1

Method: 8260C - Volatile Organic Compounds (GCMS)
Matrix: Air

Prep Type: Total/NA

Percent Surrogate Recovery (Acceptance Limits)		
Lab Sample ID	Client Sample ID	BFB (70-135)
890-6877-2	Influent All Wells	92
LCS 860-169725/3	Lab Control Sample	91
LCSD 860-169725/4	Lab Control Sample Dup	90
MB 860-169725/6	Method Blank	93
Surrogate Legend		
BFB = 4-Bromofluorobenzene (Surr)		

Method: 8260C GRO - Volatile Organic Compounds (GC/MS)
Matrix: Air

Prep Type: Total/NA

Percent Surrogate Recovery (Acceptance Limits)		
Lab Sample ID	Client Sample ID	BFB (60-140)
890-6877-2	Influent All Wells	88
LCS 860-169724/4	Lab Control Sample	85
LCSD 860-169724/5	Lab Control Sample Dup	84
MB 860-169724/7	Method Blank	87
Surrogate Legend		
BFB = 4-Bromofluorobenzene (Surr)		

QC Sample Results

Client: Ensolum
Project/Site: James Ranch Unit #10

Job ID: 890-6877-1

Method: 8260C - Volatile Organic Compounds (GC/MS)

Lab Sample ID: MB 860-169725/6

Matrix: Air

Analysis Batch: 169725

Client Sample ID: Method Blank

Prep Type: Total/NA

Analyte	MB Result	MB Qualifier	RL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	<10000	U	10000	ug/m3			07/05/24 16:29	1
Toluene	<10000	U	10000	ug/m3			07/05/24 16:29	1
Ethylbenzene	<10000	U	10000	ug/m3			07/05/24 16:29	1
m,p-Xylenes	<20000	U	20000	ug/m3			07/05/24 16:29	1
o-Xylene	<10000	U	10000	ug/m3			07/05/24 16:29	1
Xylenes, Total	<20000	U	20000	ug/m3			07/05/24 16:29	1

Surrogate	MB %Recovery	MB Qualifier	Limits	Prepared	Analyzed	Dil Fac
4-Bromofluorobenzene (Surr)	93		70 - 135		07/05/24 16:29	1

Lab Sample ID: LCS 860-169725/3

Matrix: Air

Analysis Batch: 169725

Client Sample ID: Lab Control Sample

Prep Type: Total/NA

Analyte	Spike Added	LCS Result	LCS Qualifier	Unit	D	%Rec	%Rec Limits
Benzene	50000	46860		ug/m3		94	70 - 125
Toluene	50000	45550		ug/m3		91	70 - 125
Ethylbenzene	50000	42940		ug/m3		86	70 - 125
m,p-Xylenes	50000	42900		ug/m3		86	70 - 125
o-Xylene	50000	43500		ug/m3		87	70 - 125

Surrogate	LCS %Recovery	LCS Qualifier	Limits
4-Bromofluorobenzene (Surr)	91		70 - 135

Lab Sample ID: LCSD 860-169725/4

Matrix: Air

Analysis Batch: 169725

Client Sample ID: Lab Control Sample Dup

Prep Type: Total/NA

Analyte	Spike Added	LCSD Result	LCSD Qualifier	Unit	D	%Rec	%Rec Limits	RPD	RPD Limit
Benzene	50000	47670		ug/m3		95	70 - 125	2	35
Toluene	50000	46020		ug/m3		92	70 - 125	1	35
Ethylbenzene	50000	43940		ug/m3		88	70 - 125	2	35
m,p-Xylenes	50000	43050		ug/m3		86	70 - 125	0	35
o-Xylene	50000	45010		ug/m3		90	70 - 125	3	35

Surrogate	LCSD %Recovery	LCSD Qualifier	Limits
4-Bromofluorobenzene (Surr)	90		70 - 135

Method: 8260C GRO - Volatile Organic Compounds (GC/MS)

Lab Sample ID: MB 860-169724/7

Matrix: Air

Analysis Batch: 169724

Client Sample ID: Method Blank

Prep Type: Total/NA

Analyte	MB Result	MB Qualifier	RL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics	<50000	U	50000	ug/m3			07/05/24 16:29	1

Eurofins Carlsbad

QC Sample Results

Client: Ensolum
Project/Site: James Ranch Unit #10

Job ID: 890-6877-1

Method: 8260C GRO - Volatile Organic Compounds (GC/MS) (Continued)

Lab Sample ID: MB 860-169724/7

Matrix: Air

Analysis Batch: 169724

Client Sample ID: Method Blank

Prep Type: Total/NA

	MB	MB				
Surrogate	%Recovery	Qualifier	Limits	Prepared	Analyzed	Dil Fac
4-Bromofluorobenzene (Surr)	87		60 - 140		07/05/24 16:29	1

Lab Sample ID: LCS 860-169724/4

Matrix: Air

Analysis Batch: 169724

Client Sample ID: Lab Control Sample

Prep Type: Total/NA

Analyte			Spike Added	LCS Result	LCS Qualifier	Unit	D	%Rec	%Rec Limits		
Gasoline Range Organics			500000	415900		ug/m3		83	60 - 140		
Surrogate	LCS %Recovery	LCS Qualifier	Limits								
4-Bromofluorobenzene (Surr)	85		60 - 140								

Lab Sample ID: LCSD 860-169724/5

Matrix: Air

Analysis Batch: 169724

Client Sample ID: Lab Control Sample Dup

Prep Type: Total/NA

Analyte			Spike Added	LCSD Result	LCSD Qualifier	Unit	D	%Rec	%Rec Limits	RPD	RPD Limit
Gasoline Range Organics			500000	412500		ug/m3		83	60 - 140	1	35
Surrogate	LCSD %Recovery	LCSD Qualifier	Limits								
4-Bromofluorobenzene (Surr)	84		60 - 140								

Eurofins Carlsbad

QC Association Summary

Client: Ensolum
Project/Site: James Ranch Unit #10

Job ID: 890-6877-1

GC/MS VOA

Analysis Batch: 169724

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
890-6877-2	Influent All Wells	Total/NA	Air	8260C GRO	
MB 860-169724/7	Method Blank	Total/NA	Air	8260C GRO	
LCS 860-169724/4	Lab Control Sample	Total/NA	Air	8260C GRO	
LCSD 860-169724/5	Lab Control Sample Dup	Total/NA	Air	8260C GRO	

Analysis Batch: 169725

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
890-6877-2	Influent All Wells	Total/NA	Air	8260C	
MB 860-169725/6	Method Blank	Total/NA	Air	8260C	
LCS 860-169725/3	Lab Control Sample	Total/NA	Air	8260C	
LCSD 860-169725/4	Lab Control Sample Dup	Total/NA	Air	8260C	

Lab Chronicle

Client: Ensolum
Project/Site: James Ranch Unit #10

Job ID: 890-6877-1

Client Sample ID: Influent All Wells

Lab Sample ID: 890-6877-2

Date Collected: 07/02/24 08:35

Matrix: Air

Date Received: 07/02/24 14:08

Prep Type	Batch Type	Batch Method	Run	Dil Factor	Initial Amount	Final Amount	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Analysis	8260C		1	5 mL	5 mL	169725	07/05/24 18:00	KLV	EET HOU
Total/NA	Analysis	8260C GRO		1	5 mL	5 mL	169724	07/05/24 18:00	KLV	EET HOU

Laboratory References:
EET HOU = Eurofins Houston, 4145 Greenbriar Dr, Stafford, TX 77477, TEL (281)240-4200

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14

Accreditation/Certification Summary

Client: Ensolum
Project/Site: James Ranch Unit #10

Job ID: 890-6877-1

Laboratory: Eurofins Houston

Unless otherwise noted, all analytes for this laboratory were covered under each accreditation/certification below.

Authority	Program	Identification Number	Expiration Date
Texas	NELAP	T104704215	06-30-25
The following analytes are included in this report, but the laboratory is not certified by the governing authority. This list may include analytes for which the agency does not offer certification.			
Analysis Method	Prep Method	Matrix	Analyte
8260C		Air	Benzene
8260C		Air	Ethylbenzene
8260C		Air	m,p-Xylenes
8260C		Air	o-Xylene
8260C		Air	Toluene
8260C		Air	Xylenes, Total
8260C GRO		Air	Gasoline Range Organics

Method Summary

Client: Ensolum
Project/Site: James Ranch Unit #10

Job ID: 890-6877-1

Method	Method Description	Protocol	Laboratory
8260C	Volatile Organic Compounds (GCMS)	SW846	EET HOU
8260C GRO	Volatile Organic Compounds (GC/MS)	SW846	EET HOU
5030C	Collection/Prep Tedlar Bag (P&T)	SW846	EET HOU

Protocol References:
SW846 = "Test Methods For Evaluating Solid Waste, Physical/Chemical Methods", Third Edition, November 1986 And Its Updates.

Laboratory References:
EET HOU = Eurofins Houston, 4145 Greenbriar Dr, Stafford, TX 77477, TEL (281)240-4200

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14

Sample Summary

Client: Ensolum
Project/Site: James Ranch Unit #10

Job ID: 890-6877-1

Lab Sample ID	Client Sample ID	Matrix	Collected	Received
890-6877-2	Influent All Wells	Air	07/02/24 08:35	07/02/24 14:08

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14



Dallas, Texas (214-902-0300)



890-6877 Chain of Custody

El Paso, TX (915-585-3443)

Xenoco Job #:

890-6877 Chain of Custody

Login Sample Receipt Checklist

Client: Ensolum

Job Number: 890-6877-1

Login Number: 6877

List Number: 1

Creator: Lopez, Abraham

List Source: Eurofins Carlsbad

Question	Answer	Comment
The cooler's custody seal, if present, is intact.	True	
Sample custody seals, if present, are intact.	True	
The cooler or samples do not appear to have been compromised or tampered with.	True	
Samples were received on ice.	True	
Cooler Temperature is acceptable.	True	
Cooler Temperature is recorded.	True	
COC is present.	True	
COC is filled out in ink and legible.	True	
COC is filled out with all pertinent information.	True	
Is the Field Sampler's name present on COC?	True	
There are no discrepancies between the containers received and the COC.	True	
Samples are received within Holding Time (excluding tests with immediate HTs)	True	
Sample containers have legible labels.	True	
Containers are not broken or leaking.	True	
Sample collection date/times are provided.	True	
Appropriate sample containers are used.	True	
Sample bottles are completely filled.	True	
Sample Preservation Verified.	N/A	
There is sufficient vol. for all requested analyses, incl. any requested MS/MSDs	True	
Containers requiring zero headspace have no headspace or bubble is <6mm (1/4").	N/A	

Login Sample Receipt Checklist

Client: Ensolum

Job Number: 890-6877-1

Login Number: 6877

List Number: 2

Creator: Grandits, Corey

List Source: Eurofins Houston

List Creation: 07/05/24 12:19 PM

Question	Answer	Comment
The cooler's custody seal, if present, is intact.	True	
Sample custody seals, if present, are intact.	N/A	
The cooler or samples do not appear to have been compromised or tampered with.	True	
Samples were received on ice.	True	
Cooler Temperature is acceptable.	True	
Cooler Temperature is recorded.	True	
COC is present.	True	
COC is filled out in ink and legible.	True	
COC is filled out with all pertinent information.	True	
Is the Field Sampler's name present on COC?	True	
There are no discrepancies between the containers received and the COC.	True	
Samples are received within Holding Time (excluding tests with immediate HTs)	True	
Sample containers have legible labels.	True	
Containers are not broken or leaking.	True	
Sample collection date/times are provided.	True	
Appropriate sample containers are used.	True	
Sample bottles are completely filled.	True	
Sample Preservation Verified.	True	
There is sufficient vol. for all requested analyses, incl. any requested MS/MSDs	True	
Containers requiring zero headspace have no headspace or bubble is <6mm (1/4").	True	

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 367459

CONDITIONS

Operator: XTO ENERGY, INC 6401 Holiday Hill Road Midland, TX 79707	OGRID: 5380
	Action Number: 367459
	Action Type: [REPORT] Alternative Remediation Report (C-141AR)

CONDITIONS

Created By	Condition	Condition Date
nvez	Accepted for the record. See App ID 425793 for most updated status.	2/24/2025