Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form C-101
August 1, 2011

Permit 421310

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

1. Operator Name and Address	2. OGRID Number
Avant Operating II, LLC 1515 Wynkoop Street Denver, CO 80202	332947
	3. API Number 30-025-56804

4. Property Code	5. Property Name	6. Well No.
339498	The Jones 19 20 State Com	834H

7. Surface Location

UL - Lot	Section	Township	Range	Lot Idn	Feet From	N/S Line	Feet From	E/W Line	County
D	19	17S	34E	1	1080	N	393	W	Lea

8. Proposed Bottom Hole Location

UL - Lot	Section	Township	Range	Lot Idn	Feet From	N/S Line	Feet From	E/W Line	County
A	20	17S	34E	A	907	N	100	E	Lea

9. Pool Information

98414	98414

Additional Well Information

11. Work Type	12. Well Type	13. Cable/Rotary	14. Lease Type	15. Ground Level Elevation
New Well	OIL		State	4126
16. Multiple	**17. Proposed Depth**	**18. Formation**	**19. Contractor**	**20. Spud Date**
N	22342	Cisco		4/1/2027
Depth to Ground water		Distance from nearest fresh water well		Distance to nearest surface water

☐ **We will be using a closed-loop system in lieu of lined pits**

21. Proposed Casing and Cement Program

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surf	14.75	11.75	42	1557	610	0
Int1	10.625	8.625	32	11695	2035	0
Prod	7.875	5.5	23	22342	2430	0

Casing/Cement Program: Additional Comments

22. Proposed Blowout Prevention Program

Type	Working Pressure	Test Pressure	Manufacturer
Pipe	10000	5000	CAMERON

23. I hereby certify that the information given above is true and complete to the best of my knowledge and belief.
I hereby certify that no additives containing PFAS chemicals will be added to the completion or recompletion of this well.
I further certify I have complied with 19.15.14.9 (A) NMAC ☐ and/or 19.15.14.9 (B) NMAC ☐, if applicable.

Signature:

OIL CONSERVATION DIVISION

Printed Name:	Electronically filed by Sarah Ferreyros	Approved By:	Jeffrey Harrison
Title:	Director of Regulatory	Title:	Petroleum Specialist III
Email Address:	sarah@avantnr.com	Approved Date:	8/27/2026 Expiration Date: 8/27/2028
Date:	7/24/2026 Phone: 720-854-9020	Conditions of Approval Attached	

C-102	State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION	Revised July 9, 2024
Submit Electronically Via OCD Permitting		Submittal Type: ☒ Initial Submittal ☐ Amended Report ☐ As Drilled

WELL LOCATION INFORMATION

API Number	Pool Code	Pool Name	
30-025-56804	98414	WC-025 G-08 S173430M;CISCO-CANYON	
Property Code: 339498	Property Name: THE JONES 19 20 STATE COM		Well Number: #834H
OGRID No.: 332947	Operator Name: AVANT OPERATING II, LLC		Ground Level Elevation: 4126'
Surface Owner: ☒ State ☐ Fee ☐ Tribal ☐ Federal		Mineral Owner: ☒ State ☐ Fee ☐ Tribal ☐ Federal	

Surface Location

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
D	19	17 S	34 E	LOT 1	1080' FNL	393' FWL	32.824559°	-103.606703°	LEA

Bottom Hole Location

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
A	20	17 S	34 E		907' FNL	100' FEL	32.825067°	-103.574529°	LEA

Dedicated Acres	Infill or Defining Well	Defining Well API	Overlapping Spacing Unit (Y/N)	Consolidation Code
1257.92	Infill	821H	N	C,F
Order Numbers. Pending			Well setbacks are under Common Ownership: ☐Yes ☒No	

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
D	19	17 S	34 E	LOT 1	1080' FNL	393' FWL	32.824559°	-103.606703°	LEA

First Take Point (FTP)

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
D	19	17 S	34 E	LOT 1	907' FNL	100' FWL	32.825036°	-103.607656°	LEA

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Ft. from N/S	Ft. from E/W	Latitude	Longitude	County
A	20	17 S	34 E		907' FNL	100' FEL	32.825067°	-103.574529°	LEA

Unitized Area or Area of Uniform Interest	Spacing Unit Type ☒ Horizontal ☐ Vertical	Ground Floor Elevation:
State CA Pending		4126' DF'

OPERATOR CERTIFICATIONS

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and, if the well is a vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

If this well is a horizontal well, I further certify that this organization has received the consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division.

7/20/2026

Signature Date

Sarah Ferreyros

Printed Name

sarah@avantnr.com

Email Address

SURVEYOR CERTIFICATIONS

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

TIM C. PAPPAS NEW MEXICO 21209 PROFESSIONAL SURVEYOR


29 May 2026

Signature and Seal of Professional Surveyor

21209 MAY 6, 2026

Certificate Number Date of Survey

Note: No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

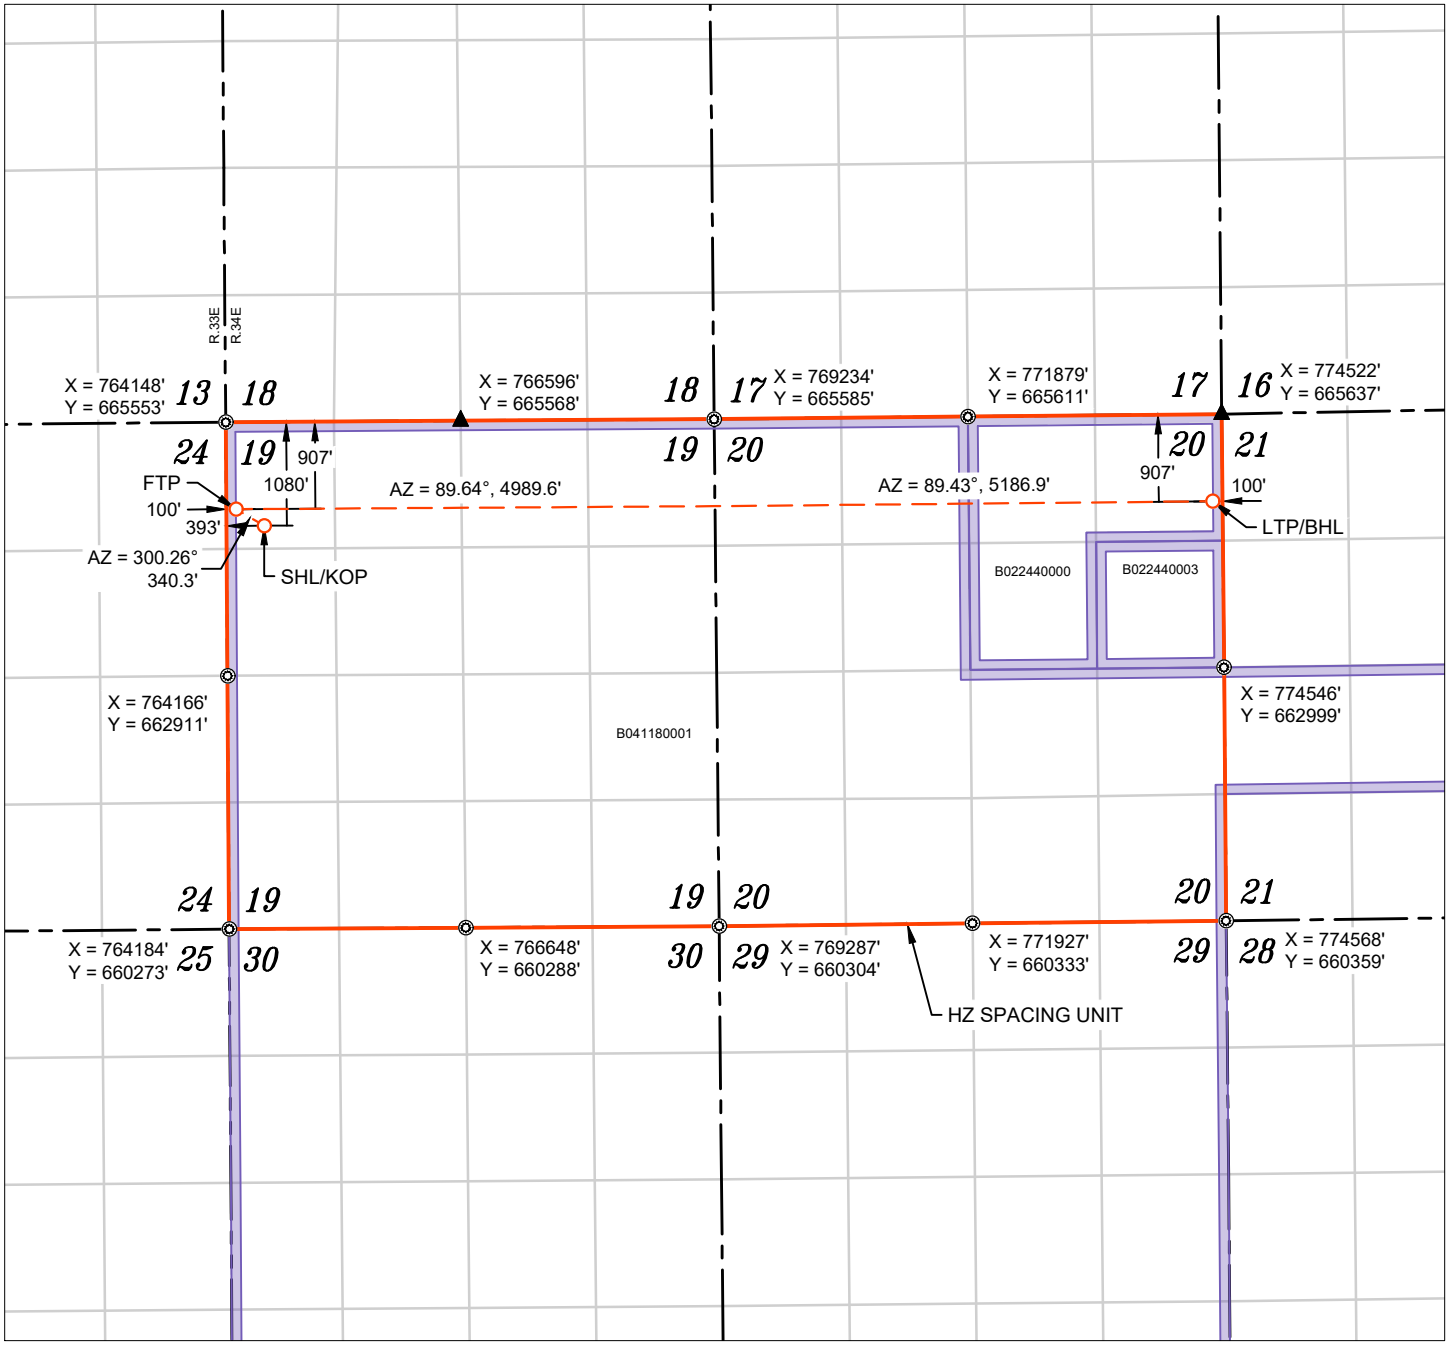

WELL NAME: THE JONES 19 20 STATE COM #834H
ELEVATION: 4126'

NAD 83 (SHL/KOP) 1080' FNL & 393' FWL
LATITUDE = 32.824559° LONGITUDE = -103.606703°
NAD 27 (SHL/KOP)
LATITUDE = 32.824442° LONGITUDE = -103.606200°
STATE PLANE NAD 83 (N.M. EAST)
N: 664474.80' E: 764547.73'
STATE PLANE NAD 27 (N.M. EAST)
N: 664411.47' E: 723369.68'

NAD 83 (FTP) 907' FNL & 100' FWL
LATITUDE = 32.825036° LONGITUDE = -103.607656°
NAD 27 (FTP)
LATITUDE = 32.824919° LONGITUDE = -103.607153°
STATE PLANE NAD 83 (N.M. EAST)
N: 664646.27' E: 764253.80'
STATE PLANE NAD 27 (N.M. EAST)
N: 664582.94' E: 723075.75'

NAD 83 (LTP/BHL) 907' FNL & 100' FEL
LATITUDE = 32.825067° LONGITUDE = -103.574529°
NAD 27 (LTP/BHL)
LATITUDE = 32.824950° LONGITUDE = -103.574027°
STATE PLANE NAD 83 (N.M. EAST)
N: 664729.07' E: 774429.93'
STATE PLANE NAD 27 (N.M. EAST)
N: 664665.66' E: 733251.90'

APPROXIMATE WELL BORE DISTANCE FROM FTP TO LTP	
B041180001	4989.58'
B022440000	5186.91'
TOTAL	10176.49'

FOUND MONUMENT
CALC. CORNER
SHL/ KOP/ FTP / PPP/ LTP / BHL
WELLBORE
HORIZONTAL SPACING UNIT
STATE OIL & GAS LEASE
BLM OIL & GAS LEASE

0' 2000' 4000'
SCALE: 1" = 2000'

NOTES

1. ALL COORDINATES, BEARINGS, AND DISTANCES CONTAINED HEREIN ARE GRID, BASED UPON THE NEW MEXICO STATE PLANE COORDINATES SYSTEM, NORTH AMERICAN DATUM 83, NEW MEXICO EAST (3001).

2. THIS DOCUMENT IS BASED UPON AN ON THE GROUND SURVEY PERFORMED DURING MAY, 2026. CERTIFICATION OF THIS DOCUMENT IS ONLY TO THE LOCATION OF THIS INFORMATION IN RELATION TO RECORDED MONUMENT OF DEEDS PROVIDED BY THE CLIENT.

3. ELEVATIONS MSL, DERIVED FROM G.N.S.S. OBSERVATION AND DERIVED FROM SAID ON-THE-GROUND SURVEY.

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form APD Comments

Permit 421310

PERMIT COMMENTS

Operator Name and Address:	API Number:
Avant Operating II, LLC [332947] 1515 Wynkoop Street Denver, CO 80202	30-025-56804
	Well: The Jones 19 20 State Com #834H

Created By	Comment	Comment Date
twelem	GOR data for offset Iggles wells attached to support new Wildcat pool. These offset wells are in sections 16 and 21, T18S R34E, and target the same formation.	7/24/2026

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form APD Conditions

Permit 421310

PERMIT CONDITIONS OF APPROVAL

Operator Name and Address:	API Number:
Avant Operating II, LLC [332947] 1515 Wynkoop Street Denver, CO 80202	30-025-56804
	Well: The Jones 19 20 State Com #834H

OCD Reviewer	Condition
jeffrey.harrison	All logs run on the well must be submitted to NMOCD.
jeffrey.harrison	No additives containing PFAS chemicals will be added to the drilling fluids or completion fluids used during drilling, completions, or recompletions operations.
jeffrey.harrison	Prior to production of this well a change to the well name/number is required to comply with the OCD well naming convention.
jeffrey.harrison	NSP required prior to production IF not included in an existing order OR not an infill to an appropriate defining well in the same pool and spacing unit.
jeffrey.harrison	Surface casing shall be set a minimum of 25' into the Rustler Anhydrite, above the salt, and below usable fresh water and cemented to the surface. If salt is encountered set casing at least 25 ft. above the salt.
jeffrey.harrison	If a DV tool used, once the DV tool is opened and circulation is established, it needs to be noted if cement is circulated off of the top of the DV tool and how much.
jeffrey.harrison	If cement is not circulated off of the top of the DV tool, then a CBL will be required. Depending upon the results of the CBL, remedial action may be required prior to drilling operations continuing.
jeffrey.harrison	Cement must be in place for at least 8 hours AND achieve a minimum compressive strength of 500 psi before performing further operations on the well.
jeffrey.harrison	File As Drilled C-102 and a directional Survey with C-104 completion packet.
jeffrey.harrison	Notify the OCD 24 hours prior to casing & cement.
jeffrey.harrison	A [C-103] Sub. Drilling (C-103N) is required within (10) days of spud.
jeffrey.harrison	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string.
jeffrey.harrison	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system.
jeffrey.harrison	Cement is required to circulate on both surface and intermediate1 strings of casing.
jeffrey.harrison	If the method of isolation was not by circulation, a CBL must be performed; if strata isolation is not achieved, then remediation will be required before further operations.

API/UWI	Monthly Production Date	Monthly Oil	Monthly Gas	Monthly Water	Monthly BOE	GOR(scf/bbl)
3.00255E+13	6/1/2025	50		3803	50	
3.00255E+13	7/1/2025	3377	3801	55476	4010.5	1125.555227
3.00255E+13	8/1/2025	7352	8344	24508	8742.67	1134.929271
3.00255E+13	9/1/2025	9165	9386	14189	10729.33	1024.113475
3.00255E+13	10/1/2025	9383	9914	10441	11035.33	1056.591708
3.00255E+13	11/1/2025	8612	10442	11627	10352.33	1212.494194
3.00255E+13	12/1/2025	8359	11330	6859	10247.33	1355.42529
3.00255E+13	1/1/2026	7494	10287	5106	9208.5	1372.698159
3.00255E+13	2/1/2026	7156	10472	5160	8901.33	1463.387367
3.00255E+13	3/1/2026	7531	9860	4950	9174.33	1309.255079
3.00255E+13	4/1/2026	7169	8723	4503	8622.83	1216.766634

API/UWI	Monthly Production Date	Monthly Oil	Monthly Gas	Monthly Water	Monthly BOE	GOR(scf/bbl)
3.00255E+13	6/1/2025			10	0	
3.00255E+13	7/1/2025	1672	2555	58649	2097.83	1528.110048
3.00255E+13	8/1/2025	6993	6771	23503	8121.5	968.2539683
3.00255E+13	9/1/2025	7127	7377	12075	8356.5	1035.077873
3.00255E+13	10/1/2025	7292	6097	9117	8308.17	836.1217773
3.00255E+13	11/1/2025	6726	6774	7220	7855	1007.136485
3.00255E+13	12/1/2025	6527	7016	6642	7696.33	1074.919565
3.00255E+13	1/1/2026	5870	6662	5538	6980.33	1134.923339
3.00255E+13	2/1/2026	5492	6646	5307	6599.67	1210.123816
3.00255E+13	3/1/2026	5853	6852	4937	6995	1170.681702
3.00255E+13	4/1/2026	5355	7219	4449	6558.17	1348.085901

API/UWI	Monthly Production Date	Monthly Oil	Monthly Gas	Monthly Water	Monthly BOE	GOR (scf/bbl)
3.00255E+13	6/1/2025			10	0	
3.00255E+13	7/1/2025	720	1216	17762	922.67	1688.888889
3.00255E+13	8/1/2025	7105	11287	26133	8986.17	1588.599578
3.00255E+13	9/1/2025	7544	14725	12298	9998.17	1951.882291
3.00255E+13	10/1/2025	6840	6719	7963	7959.83	982.3099415
3.00255E+13	11/1/2025	6447	7270	6402	7658.67	1127.656274
3.00255E+13	12/1/2025	5934	7804	4852	7234.67	1315.133131
3.00255E+13	1/1/2026	5302	7198	3434	6501.67	1357.600905
3.00255E+13	2/1/2026	4960	7228	3991	6164.67	1457.258065
3.00255E+13	3/1/2026	5317	9312	4068	6869	1751.363551
3.00255E+13	4/1/2026	4994	7014	3592	6163	1404.485382

API/UWI	Monthly Production Date	Monthly Oil	Monthly Gas	Monthly Water	Monthly BOE	GOR (scf/bbl)
3.00255E+13	6/1/2025			10	0	
3.00255E+13	7/1/2025	933	1624	41758	1203.67	1740.621651
3.00255E+13	8/1/2025	8511	11776	27436	10473.67	1383.621196
3.00255E+13	9/1/2025	8587	7626	13456	9858	888.0866426
3.00255E+13	10/1/2025	7850	6657	8903	8959.5	848.0254777
3.00255E+13	11/1/2025	8084	7955	7249	9409.83	984.0425532
3.00255E+13	12/1/2025	7643	8468	6423	9054.33	1107.941908
3.00255E+13	1/1/2026	6790	7622	4680	8060.33	1122.533137
3.00255E+13	2/1/2026	7082	8206	4553	8449.67	1158.712228
3.00255E+13	3/1/2026	7455	9001	4645	8955.17	1207.377599
3.00255E+13	4/1/2026	6758	7524	3942	8012	1113.347144

State of New Mexico
Energy, Minerals and Natural Resources Department

Submit Electronically
Via E-permitting

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description

Effective May 25, 2021

I. Operator: Avant Operating II, LLC **OGRID:** 332947 **Date:** 07/21/2026

II. Type: ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
The Jones 19 20 State Com 813H		D-19-T17S-R34E	1140FNL/392FWL	960 BBL/D	1728 MCF/D	5760 BBL/D
The Jones 19 20 State Com 814H		D-19-T17S-R34E	1060FNL/393FWL	960 BBL/D	1728 MCF/D	5760 BBL/D
The Jones 19 20 State Com 824H		D-19-T17S-R34E	1100FNL/393FWL	960 BBL/D	1728 MCF/D	5760 BBL/D
The Jones 19 20 State Com 825H		D-19-T17S-R34E	1040FNL/393FWL	960 BBL/D	1728 MCF/D	5760 BBL/D
The Jones 19 20 State Com 833H		D-19-T17S-R34E	1120FNL/392FWL	960 BBL/D	1728 MCF/D	5760 BBL/D
The Jones 19 20 State Com 834H		D-19-T17S-R34E	1080FNL/393FWL	960 BBL/D	1728 MCF/D	5760 BBL/D

IV. Central Delivery Point Name: The Jones CTB [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
The Jones 19 20 State Com 813H		08/01/2027	9/15/2027	10/01/2027	12/01/2027	12/30/2027
The Jones 19 20 State Com 814H		08/01/2027	9/15/2027	10/01/2027	12/01/2027	11/30/2027
The Jones 19 20 State Com 824H		08/01/2027	9/15/2027	10/01/2027	12/01/2027	11/30/2027
The Jones 19 20 State Com 825H		08/01/2027	9/15/2027	10/01/2027	12/01/2027	11/30/2027
The Jones 19 20 State Com 833H		08/01/2027	9/15/2027	10/01/2027	12/01/2027	11/30/2027
The Jones 19 20 State Com 834H		08/01/2027	9/15/2027	10/01/2027	12/01/2027	11/30/2027

of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan

EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications

Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system. ***If Operator checks this box, Operator will select one of the following:***

Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- **(a)** power generation on lease;
- **(b)** power generation for grid;
- **(c)** compression on lease;
- **(d)** liquids removal on lease;
- **(e)** reinjection for underground storage;
- **(f)** reinjection for temporary storage;
- **(g)** reinjection for enhanced oil recovery;
- **(h)** fuel cell production; and
- **(i)** other alternative beneficial uses approved by the division.

Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature:
Printed Name: John Harper
Title: SVP – Assets and Exploration
E-mail Address: John@avantnr.com
Date: 7/20/2026
Phone: 678-988-6644

OIL CONSERVATION DIVISION **(Only applicable when submitted as a standalone form)**
Approved By:
Title:
Approval Date:
Conditions of Approval:

Avant Operating II, LLC Natural Gas Management Plan

VI. Separation equipment will be sized by construction engineering staff based on stated manufacturer daily throughput capacities and anticipated daily production rates to ensure adequate capacity. Closed vent system piping, compression needs, and VRUs will be sized utilizing ProMax modelling software to ensure adequate capacity for anticipated production volumes and conditions.

VII. Avant Operating, LLC (Avant) will take the following actions to comply with the regulations listed in 19.15.27.8:

A. Avant will maximize the recovery of natural gas by minimizing the waste, as defined by 19.15.2 NMAC,of natural gas through venting and flaring. Avant will ensure that well(s) will be connected to a natural gas gathering system with sufficient capacity to transport natural gas.

B. All drilling operations will be equipped with a rig flare located at least 100' from the nearest surface hole. Rig flare will be utilized to combust any natural gas that is brought to surface during normal drilling operations. In the case of emergency venting or flaring the volumes will be estimated and reported appropriately.

C. During completion operations any natural gas brought to surface will be flared. Immediately following the finish of completion operations, all well flowback will be directed to permanent separation equipment. Produced natural gas from separation equipment will be sent to sales. Avant will ensure that the flare is sized properly and is equipped with automatic igniter or continuous pilot. The gas sample will be analyzed twice per week, and the gas will be routed into a gathering system as soon as pipeline specifications are met.

D. Avant will comply with the performance standards requirements and provisions listed in 19.15.27.8 (l)through (8). All equipment will be designed and sized to handle maximum anticipated pressures and throughputs to minimize the waste. Production storage tanks constructed after May 25, 2021, will be equipped with automatic gauging system. Flares constructed after May 25, 2021, will be equipped with automatic igniter or continuous pilot. Flares will be located at least 100' from the well and storage tanks unless otherwise approved by the division. Avant will conduct AVO inspections as described in 19.15.27.8 E (5) (a) with frequencies specified in 19.15.27.8 E (5) (b) and (c). All emergencies will be resolved as quickly and safely as feasible to minimize waste.

E. The volume of natural gas that is vented or flared as the result of malfunction or emergency during drilling and completions operations will be estimated. The volume of natural gas that is vented, flared, or beneficially used during production operations, will be measured, or estimated. Avant will install equipment to measure


F. Measurement meters will be in place for low- and high-pressure gas that is flared due to not being able to use for reuse or sales. Equipment will be installed off tanks to reduce vented gas and the gas will be measured with a meter.

VIII. Best Management Practices: Avant plans to communicate consistently with midstream partners to ensure sufficient takeaway capacity is available and understand planned maintenance to minimize venting. Avant will depressurize equipment and capture vented gases for reuse before any maintenance occurs. Avant will use vapor recovery units for the vented gas off the tanks to capture for reuse or sales to minimize venting during active operations. Avant will be proactive on inspections to identify and fix leaks before they escalate.

AVANT NATURAL RESOURCES


WELL DETAILS: The Jones 19 20 State Com #834H					
Ground Elev: 4126.0 KB: 4152.5					
+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
0.0	0.0	664474.80	764547.73	32.824559	-103.606703

PROJECT DETAILS: Lea County, NM (NAD 83)	
Geodetic System:	US State Plane 1983
Datum:	North American Datum 1983
Ellipsoid:	GRS 1980
Zone:	New Mexico Eastern Zone
System Datum:	Mean Sea Level

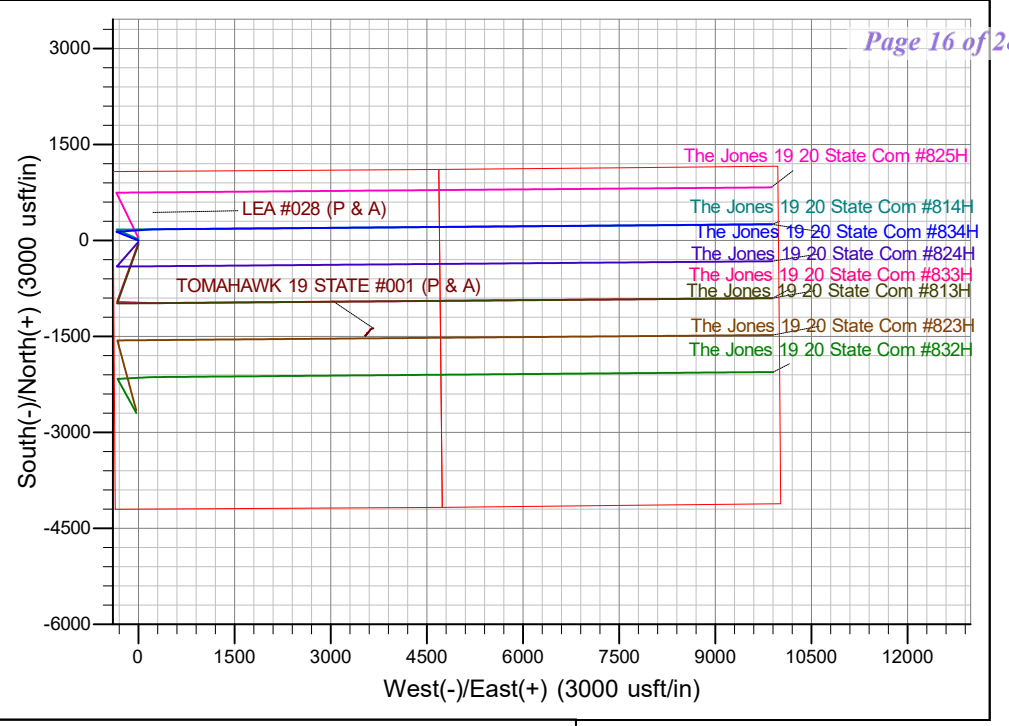


SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DIeg	TFace	VSect	Annotation
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	5000.0	0.00	0.00	5000.0	0.0	0.0	0.00	0.00	0.0	KOP - Start Build 2.00
3	5159.9	3.20	291.82	5159.8	1.7	-4.1	2.00	291.82	-4.1	Start 6424.5 hold at 5159.9 MD
4	11584.3	3.20	291.82	11574.2	134.8	-336.8	0.00	0.00	-335.7	Start Drop -2.00
5	11744.2	0.00	0.00	11734.0	136.5	-340.9	2.00	180.00	-339.8	Start 100.5 hold at 11744.2 MD
6	11844.7	0.00	0.00	11834.5	136.5	-340.9	0.00	0.00	-339.8	KOP #2 - Start Build 12.00
7	12594.7	90.00	86.00	12312.0	169.8	135.4	12.00	86.00	136.8	LP - Start DLS 2.00 TFO 90.00
8	12771.4	90.00	89.54	12312.0	176.7	312.0	2.00	90.00	313.4	Start 9570.5 hold at 12771.4 MD
9	22341.9	90.00	89.54	12312.0	254.3	9882.2	0.00	0.00	9883.9	TD at 22341.9



Azimuths to Grid North
True North: -0.39°
Magnetic North: 7.42°

Magnetic Field
Strength: 49145.6nT
Dip Angle: 60.79°
Date: 12/31/2009
Model: IGRF200510

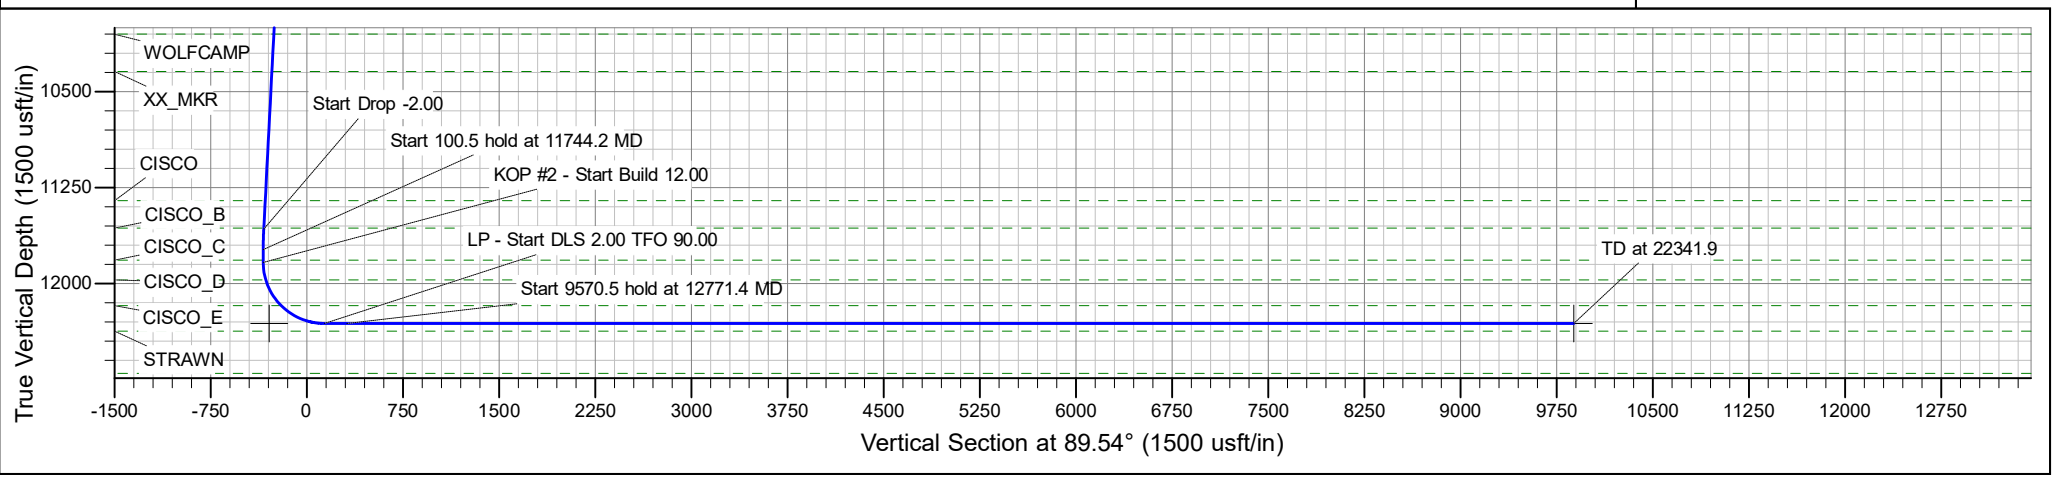

Avant Operating II, LLC

Lea County, NM (NAD 83)
The Jones Pad 2
The Jones 19 20 State Com #834H

OH

Plan: Plan 0.1

Standard Planning Report

14 May, 2026

Planning Report

Database:	EDM 5000.16 Single User Db	**Local Co-ordinate Reference:**	Well The Jones 19 20 State Com #834H
Company:	Avant Operating II, LLC	**TVD Reference:**	WELL @ 4152.5usft (4152.5)
Project:	Lea County, NM (NAD 83)	**MD Reference:**	WELL @ 4152.5usft (4152.5)
Site:	The Jones Pad 2	**North Reference:**	Grid
Well:	The Jones 19 20 State Com #834H	**Survey Calculation Method:**	Minimum Curvature
Wellbore:	OH		
Design:	Plan 0.1		

Project Lea County, NM (NAD 83)

Map System:	US State Plane 1983	**System Datum:**	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site The Jones Pad 2

Site Position:		**Northing:**	664,414.80 usft	**Latitude:**	32.824395
From:	Map	**Easting:**	764,547.73 usft	**Longitude:**	-103.606704
Position Uncertainty:	0.0 usft	**Slot Radius:**	13-3/16 "		

Well The Jones 19 20 State Com #834H

Well Position	**+N/-S**	0.0 usft	**Northing:**	664,474.80 usft	**Latitude:**	32.824560
	+E/-W	0.0 usft	**Easting:**	764,547.73 usft	**Longitude:**	-103.606703
Position Uncertainty		0.0 usft	**Wellhead Elevation:**	usft	**Ground Level:**	4,126.0 usft
Grid Convergence:		0.39 °				

Wellbore OH

Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF200510	12/31/2009	7.81	60.79	49,145.56963057

Design Plan 0.1

Audit Notes:

Version:		**Phase:**	PROTOTYPE	**Tie On Depth:**	0.0

Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.0	0.0	0.0	89.54

Plan Survey Tool Program **Date** 5/14/2026

	Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks
1	0.0	22,341.9	Plan 0.1 (OH)	MWD	
				OWSG MWD - Standard	

Released to Imaging: 8/27/2026 2:57:14 PM

Planning Report

Database:	EDM 5000.16 Single User Db	**Local Co-ordinate Reference:**	Well The Jones 19 20 State Com #834H
Company:	Avant Operating II, LLC	**TVD Reference:**	WELL @ 4152.5usft (4152.5)
Project:	Lea County, NM (NAD 83)	**MD Reference:**	WELL @ 4152.5usft (4152.5)
Site:	The Jones Pad 2	**North Reference:**	Grid
Well:	The Jones 19 20 State Com #834H	**Survey Calculation Method:**	Minimum Curvature
Wellbore:	OH		
Design:	Plan 0.1		

Plan Sections

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
5,000.0	0.00	0.00	5,000.0	0.0	0.0	0.00	0.00	0.00	0.00	
5,159.9	3.20	291.82	5,159.8	1.7	-4.1	2.00	2.00	0.00	291.82	
11,584.3	3.20	291.82	11,574.2	134.8	-336.8	0.00	0.00	0.00	0.00	
11,744.2	0.00	0.00	11,734.0	136.5	-340.9	2.00	-2.00	0.00	180.00	
11,844.7	0.00	0.00	11,834.5	136.5	-340.9	0.00	0.00	0.00	0.00	
12,594.7	90.00	86.00	12,312.0	169.8	135.4	12.00	12.00	0.00	86.00	
12,771.4	90.00	89.54	12,312.0	176.7	312.0	2.00	0.00	2.00	90.00	
22,341.9	90.00	89.54	12,312.0	254.3	9,882.2	0.00	0.00	0.00	0.00	LTP/BHL - The Jones

Planning Report

Database:	EDM 5000.16 Single User Db	**Local Co-ordinate Reference:**	Well The Jones 19 20 State Com #834H
Company:	Avant Operating II, LLC	**TVD Reference:**	WELL @ 4152.5usft (4152.5)
Project:	Lea County, NM (NAD 83)	**MD Reference:**	WELL @ 4152.5usft (4152.5)
Site:	The Jones Pad 2	**North Reference:**	Grid
Well:	The Jones 19 20 State Com #834H	**Survey Calculation Method:**	Minimum Curvature
Wellbore:	OH		
Design:	Plan 0.1		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.0	0.00	0.00	0.00
1,300.0	0.00	0.00	1,300.0	0.0	0.0	0.0	0.00	0.00	0.00
1,400.0	0.00	0.00	1,400.0	0.0	0.0	0.0	0.00	0.00	0.00
1,500.0	0.00	0.00	1,500.0	0.0	0.0	0.0	0.00	0.00	0.00
1,532.0	0.00	0.00	1,532.0	0.0	0.0	0.0	0.00	0.00	0.00
RUSTLER									
1,600.0	0.00	0.00	1,600.0	0.0	0.0	0.0	0.00	0.00	0.00
1,700.0	0.00	0.00	1,700.0	0.0	0.0	0.0	0.00	0.00	0.00
1,800.0	0.00	0.00	1,800.0	0.0	0.0	0.0	0.00	0.00	0.00
1,900.0	0.00	0.00	1,900.0	0.0	0.0	0.0	0.00	0.00	0.00
2,000.0	0.00	0.00	2,000.0	0.0	0.0	0.0	0.00	0.00	0.00
2,100.0	0.00	0.00	2,100.0	0.0	0.0	0.0	0.00	0.00	0.00
2,200.0	0.00	0.00	2,200.0	0.0	0.0	0.0	0.00	0.00	0.00
2,300.0	0.00	0.00	2,300.0	0.0	0.0	0.0	0.00	0.00	0.00
2,400.0	0.00	0.00	2,400.0	0.0	0.0	0.0	0.00	0.00	0.00
2,500.0	0.00	0.00	2,500.0	0.0	0.0	0.0	0.00	0.00	0.00
2,600.0	0.00	0.00	2,600.0	0.0	0.0	0.0	0.00	0.00	0.00
2,700.0	0.00	0.00	2,700.0	0.0	0.0	0.0	0.00	0.00	0.00
2,752.0	0.00	0.00	2,752.0	0.0	0.0	0.0	0.00	0.00	0.00
TANSIL (Base Salt)									
2,800.0	0.00	0.00	2,800.0	0.0	0.0	0.0	0.00	0.00	0.00
2,892.0	0.00	0.00	2,892.0	0.0	0.0	0.0	0.00	0.00	0.00
YATES									
2,900.0	0.00	0.00	2,900.0	0.0	0.0	0.0	0.00	0.00	0.00
3,000.0	0.00	0.00	3,000.0	0.0	0.0	0.0	0.00	0.00	0.00
3,100.0	0.00	0.00	3,100.0	0.0	0.0	0.0	0.00	0.00	0.00
3,200.0	0.00	0.00	3,200.0	0.0	0.0	0.0	0.00	0.00	0.00
3,212.0	0.00	0.00	3,212.0	0.0	0.0	0.0	0.00	0.00	0.00
SVRV									
3,300.0	0.00	0.00	3,300.0	0.0	0.0	0.0	0.00	0.00	0.00
3,400.0	0.00	0.00	3,400.0	0.0	0.0	0.0	0.00	0.00	0.00
3,500.0	0.00	0.00	3,500.0	0.0	0.0	0.0	0.00	0.00	0.00
3,600.0	0.00	0.00	3,600.0	0.0	0.0	0.0	0.00	0.00	0.00
3,700.0	0.00	0.00	3,700.0	0.0	0.0	0.0	0.00	0.00	0.00
3,800.0	0.00	0.00	3,800.0	0.0	0.0	0.0	0.00	0.00	0.00
3,857.0	0.00	0.00	3,857.0	0.0	0.0	0.0	0.00	0.00	0.00
QUEEN									
3,900.0	0.00	0.00	3,900.0	0.0	0.0	0.0	0.00	0.00	0.00
4,000.0	0.00	0.00	4,000.0	0.0	0.0	0.0	0.00	0.00	0.00
4,100.0	0.00	0.00	4,100.0	0.0	0.0	0.0	0.00	0.00	0.00
4,200.0	0.00	0.00	4,200.0	0.0	0.0	0.0	0.00	0.00	0.00
4,300.0	0.00	0.00	4,300.0	0.0	0.0	0.0	0.00	0.00	0.00

Planning Report

Database:	EDM 5000.16 Single User Db	**Local Co-ordinate Reference:**	Well The Jones 19 20 State Com #834H
Company:	Avant Operating II, LLC	**TVD Reference:**	WELL @ 4152.5usft (4152.5)
Project:	Lea County, NM (NAD 83)	**MD Reference:**	WELL @ 4152.5usft (4152.5)
Site:	The Jones Pad 2	**North Reference:**	Grid
Well:	The Jones 19 20 State Com #834H	**Survey Calculation Method:**	Minimum Curvature
Wellbore:	OH		
Design:	Plan 0.1		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,400.0	0.00	0.00	4,400.0	0.0	0.0	0.0	0.00	0.00	0.00
4,500.0	0.00	0.00	4,500.0	0.0	0.0	0.0	0.00	0.00	0.00
4,600.0	0.00	0.00	4,600.0	0.0	0.0	0.0	0.00	0.00	0.00
4,640.0	0.00	0.00	4,640.0	0.0	0.0	0.0	0.00	0.00	0.00
SAN ANDREAS									
4,700.0	0.00	0.00	4,700.0	0.0	0.0	0.0	0.00	0.00	0.00
4,800.0	0.00	0.00	4,800.0	0.0	0.0	0.0	0.00	0.00	0.00
4,900.0	0.00	0.00	4,900.0	0.0	0.0	0.0	0.00	0.00	0.00
5,000.0	0.00	0.00	5,000.0	0.0	0.0	0.0	0.00	0.00	0.00
KOP - Start Build 2.00									
5,100.0	2.00	291.82	5,100.0	0.6	-1.6	-1.6	2.00	2.00	0.00
5,112.0	2.24	291.82	5,112.0	0.8	-2.0	-2.0	2.00	2.00	0.00
Cherry Canyon / Base Capitan									
5,159.9	3.20	291.82	5,159.8	1.7	-4.1	-4.1	2.00	2.00	0.00
Start 6424.5 hold at 5159.9 MD									
5,200.0	3.20	291.82	5,199.9	2.5	-6.2	-6.2	0.00	0.00	0.00
5,300.0	3.20	291.82	5,299.7	4.6	-11.4	-11.4	0.00	0.00	0.00
5,400.0	3.20	291.82	5,399.5	6.6	-16.6	-16.5	0.00	0.00	0.00
5,500.0	3.20	291.82	5,499.4	8.7	-21.8	-21.7	0.00	0.00	0.00
5,600.0	3.20	291.82	5,599.2	10.8	-26.9	-26.8	0.00	0.00	0.00
5,700.0	3.20	291.82	5,699.1	12.9	-32.1	-32.0	0.00	0.00	0.00
5,800.0	3.20	291.82	5,798.9	14.9	-37.3	-37.2	0.00	0.00	0.00
5,900.0	3.20	291.82	5,898.8	17.0	-42.5	-42.3	0.00	0.00	0.00
6,000.0	3.20	291.82	5,998.6	19.1	-47.6	-47.5	0.00	0.00	0.00
6,100.0	3.20	291.82	6,098.5	21.1	-52.8	-52.6	0.00	0.00	0.00
6,128.6	3.20	291.82	6,127.0	21.7	-54.3	-54.1	0.00	0.00	0.00
GLORIETA									
6,200.0	3.20	291.82	6,198.3	23.2	-58.0	-57.8	0.00	0.00	0.00
6,300.0	3.20	291.82	6,298.1	25.3	-63.2	-63.0	0.00	0.00	0.00
6,400.0	3.20	291.82	6,398.0	27.4	-68.3	-68.1	0.00	0.00	0.00
6,500.0	3.20	291.82	6,497.8	29.4	-73.5	-73.3	0.00	0.00	0.00
6,600.0	3.20	291.82	6,597.7	31.5	-78.7	-78.4	0.00	0.00	0.00
6,700.0	3.20	291.82	6,697.5	33.6	-83.9	-83.6	0.00	0.00	0.00
6,800.0	3.20	291.82	6,797.4	35.7	-89.1	-88.8	0.00	0.00	0.00
6,900.0	3.20	291.82	6,897.2	37.7	-94.2	-93.9	0.00	0.00	0.00
7,000.0	3.20	291.82	6,997.1	39.8	-99.4	-99.1	0.00	0.00	0.00
7,100.0	3.20	291.82	7,096.9	41.9	-104.6	-104.2	0.00	0.00	0.00
7,200.0	3.20	291.82	7,196.7	44.0	-109.8	-109.4	0.00	0.00	0.00
7,300.0	3.20	291.82	7,296.6	46.0	-114.9	-114.6	0.00	0.00	0.00
7,400.0	3.20	291.82	7,396.4	48.1	-120.1	-119.7	0.00	0.00	0.00
7,500.0	3.20	291.82	7,496.3	50.2	-125.3	-124.9	0.00	0.00	0.00
7,600.0	3.20	291.82	7,596.1	52.2	-130.5	-130.1	0.00	0.00	0.00
7,700.0	3.20	291.82	7,696.0	54.3	-135.7	-135.2	0.00	0.00	0.00
7,756.1	3.20	291.82	7,752.0	55.5	-138.6	-138.1	0.00	0.00	0.00
TUBB									
7,800.0	3.20	291.82	7,795.8	56.4	-140.8	-140.4	0.00	0.00	0.00
7,900.0	3.20	291.82	7,895.7	58.5	-146.0	-145.5	0.00	0.00	0.00
8,000.0	3.20	291.82	7,995.5	60.5	-151.2	-150.7	0.00	0.00	0.00
8,100.0	3.20	291.82	8,095.3	62.6	-156.4	-155.9	0.00	0.00	0.00
8,200.0	3.20	291.82	8,195.2	64.7	-161.5	-161.0	0.00	0.00	0.00
8,286.9	3.20	291.82	8,282.0	66.5	-166.0	-165.5	0.00	0.00	0.00
ABO									
8,300.0	3.20	291.82	8,295.0	66.8	-166.7	-166.2	0.00	0.00	0.00

Planning Report

Database:	EDM 5000.16 Single User Db	**Local Co-ordinate Reference:**	Well The Jones 19 20 State Com #834H
Company:	Avant Operating II, LLC	**TVD Reference:**	WELL @ 4152.5usft (4152.5)
Project:	Lea County, NM (NAD 83)	**MD Reference:**	WELL @ 4152.5usft (4152.5)
Site:	The Jones Pad 2	**North Reference:**	Grid
Well:	The Jones 19 20 State Com #834H	**Survey Calculation Method:**	Minimum Curvature
Wellbore:	OH		
Design:	Plan 0.1		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
8,400.0	3.20	291.82	8,394.9	68.8	-171.9	-171.3	0.00	0.00	0.00
8,500.0	3.20	291.82	8,494.7	70.9	-177.1	-176.5	0.00	0.00	0.00
8,600.0	3.20	291.82	8,594.6	73.0	-182.3	-181.7	0.00	0.00	0.00
8,700.0	3.20	291.82	8,694.4	75.0	-187.4	-186.8	0.00	0.00	0.00
8,800.0	3.20	291.82	8,794.3	77.1	-192.6	-192.0	0.00	0.00	0.00
8,900.0	3.20	291.82	8,894.1	79.2	-197.8	-197.1	0.00	0.00	0.00
9,000.0	3.20	291.82	8,993.9	81.3	-203.0	-202.3	0.00	0.00	0.00
9,100.0	3.20	291.82	9,093.8	83.3	-208.1	-207.5	0.00	0.00	0.00
9,200.0	3.20	291.82	9,193.6	85.4	-213.3	-212.6	0.00	0.00	0.00
9,300.0	3.20	291.82	9,293.5	87.5	-218.5	-217.8	0.00	0.00	0.00
9,400.0	3.20	291.82	9,393.3	89.6	-223.7	-222.9	0.00	0.00	0.00
9,500.0	3.20	291.82	9,493.2	91.6	-228.8	-228.1	0.00	0.00	0.00
9,600.0	3.20	291.82	9,593.0	93.7	-234.0	-233.3	0.00	0.00	0.00
9,700.0	3.20	291.82	9,692.9	95.8	-239.2	-238.4	0.00	0.00	0.00
9,800.0	3.20	291.82	9,792.7	97.9	-244.4	-243.6	0.00	0.00	0.00
9,900.0	3.20	291.82	9,892.5	99.9	-249.6	-248.7	0.00	0.00	0.00
10,000.0	3.20	291.82	9,992.4	102.0	-254.7	-253.9	0.00	0.00	0.00
10,059.7	3.20	291.82	10,052.0	103.2	-257.8	-257.0	0.00	0.00	0.00
WOLFCAMP									
10,100.0	3.20	291.82	10,092.2	104.1	-259.9	-259.1	0.00	0.00	0.00
10,200.0	3.20	291.82	10,192.1	106.1	-265.1	-264.2	0.00	0.00	0.00
10,300.0	3.20	291.82	10,291.9	108.2	-270.3	-269.4	0.00	0.00	0.00
10,350.2	3.20	291.82	10,342.0	109.3	-272.9	-272.0	0.00	0.00	0.00
XX_MKR									
10,400.0	3.20	291.82	10,391.8	110.3	-275.4	-274.5	0.00	0.00	0.00
10,500.0	3.20	291.82	10,491.6	112.4	-280.6	-279.7	0.00	0.00	0.00
10,600.0	3.20	291.82	10,591.4	114.4	-285.8	-284.9	0.00	0.00	0.00
10,700.0	3.20	291.82	10,691.3	116.5	-291.0	-290.0	0.00	0.00	0.00
10,800.0	3.20	291.82	10,791.1	118.6	-296.2	-295.2	0.00	0.00	0.00
10,900.0	3.20	291.82	10,891.0	120.7	-301.3	-300.4	0.00	0.00	0.00
11,000.0	3.20	291.82	10,990.8	122.7	-306.5	-305.5	0.00	0.00	0.00
11,100.0	3.20	291.82	11,090.7	124.8	-311.7	-310.7	0.00	0.00	0.00
11,200.0	3.20	291.82	11,190.5	126.9	-316.9	-315.8	0.00	0.00	0.00
11,300.0	3.20	291.82	11,290.4	128.9	-322.0	-321.0	0.00	0.00	0.00
11,361.7	3.20	291.82	11,352.0	130.2	-325.2	-324.2	0.00	0.00	0.00
CISCO									
11,400.0	3.20	291.82	11,390.2	131.0	-327.2	-326.2	0.00	0.00	0.00
11,500.0	3.20	291.82	11,490.0	133.1	-332.4	-331.3	0.00	0.00	0.00
11,577.1	3.20	291.82	11,567.0	134.7	-336.4	-335.3	0.00	0.00	0.00
CISCO_B									
11,584.3	3.20	291.82	11,574.2	134.8	-336.8	-335.7	0.00	0.00	0.00
Start Drop -2.00									
11,600.0	2.88	291.82	11,589.9	135.2	-337.5	-336.4	2.00	-2.00	0.00
11,700.0	0.88	291.82	11,689.8	136.4	-340.6	-339.5	2.00	-2.00	0.00
11,744.2	0.00	0.00	11,734.0	136.5	-340.9	-339.8	2.00	-2.00	0.00
Start 100.5 hold at 11744.2 MD									
11,800.0	0.00	0.00	11,789.8	136.5	-340.9	-339.8	0.00	0.00	0.00
11,827.2	0.00	0.00	11,817.0	136.5	-340.9	-339.8	0.00	0.00	0.00
CISCO_C									
11,844.7	0.00	0.00	11,834.5	136.5	-340.9	-339.8	0.00	0.00	0.00
KOP #2 - Start Build 12.00									
11,900.0	6.64	86.00	11,889.7	136.7	-337.7	-336.6	12.00	12.00	0.00
11,984.1	16.74	86.00	11,972.0	137.9	-320.7	-319.6	12.00	12.00	0.00

Planning Report

Database:	EDM 5000.16 Single User Db	**Local Co-ordinate Reference:**	Well The Jones 19 20 State Com #834H
Company:	Avant Operating II, LLC	**TVD Reference:**	WELL @ 4152.5usft (4152.5)
Project:	Lea County, NM (NAD 83)	**MD Reference:**	WELL @ 4152.5usft (4152.5)
Site:	The Jones Pad 2	**North Reference:**	Grid
Well:	The Jones 19 20 State Com #834H	**Survey Calculation Method:**	Minimum Curvature
Wellbore:	OH		
Design:	Plan 0.1		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
CISCO_D									
12,000.0	18.64	86.00	11,987.1	138.2	-315.9	-314.8	12.00	12.00	0.00
12,100.0	30.64	86.00	12,077.8	141.2	-274.4	-273.3	12.00	12.00	0.00
12,200.0	42.64	86.00	12,157.9	145.3	-215.0	-213.8	12.00	12.00	0.00
12,219.5	44.98	86.00	12,172.0	146.2	-201.5	-200.3	12.00	12.00	0.00
CISCO_E									
12,240.8	47.53	86.00	12,186.7	147.3	-186.2	-185.0	12.00	12.00	0.00
FTP - The Jones 19 20 State Com #834H									
12,300.0	54.64	86.00	12,223.9	150.5	-140.2	-139.0	12.00	12.00	0.00
12,400.0	66.64	86.00	12,272.8	156.6	-53.5	-52.2	12.00	12.00	0.00
12,500.0	78.64	86.00	12,302.6	163.2	41.6	42.9	12.00	12.00	0.00
12,594.7	90.00	86.00	12,312.0	169.8	135.4	136.8	12.00	12.00	0.00
LP - Start DLS 2.00 TFO 90.00									
12,600.0	90.00	86.11	12,312.0	170.2	140.7	142.1	2.00	0.00	2.00
12,700.0	90.00	88.11	12,312.0	175.2	240.6	242.0	2.00	0.00	2.00
12,771.4	90.00	89.54	12,312.0	176.7	312.0	313.4	2.00	0.00	2.00
Start 9570.5 hold at 12771.4 MD									
12,800.0	90.00	89.54	12,312.0	176.9	340.6	342.0	0.00	0.00	0.00
12,900.0	90.00	89.54	12,312.0	177.7	440.6	442.0	0.00	0.00	0.00
13,000.0	90.00	89.54	12,312.0	178.5	540.6	542.0	0.00	0.00	0.00
13,100.0	90.00	89.54	12,312.0	179.4	640.6	642.0	0.00	0.00	0.00
13,200.0	90.00	89.54	12,312.0	180.2	740.6	742.0	0.00	0.00	0.00
13,300.0	90.00	89.54	12,312.0	181.0	840.6	842.0	0.00	0.00	0.00
13,400.0	90.00	89.54	12,312.0	181.8	940.6	942.0	0.00	0.00	0.00
13,500.0	90.00	89.54	12,312.0	182.6	1,040.6	1,042.0	0.00	0.00	0.00
13,600.0	90.00	89.54	12,312.0	183.4	1,140.5	1,142.0	0.00	0.00	0.00
13,700.0	90.00	89.54	12,312.0	184.2	1,240.5	1,242.0	0.00	0.00	0.00
13,800.0	90.00	89.54	12,312.0	185.0	1,340.5	1,342.0	0.00	0.00	0.00
13,900.0	90.00	89.54	12,312.0	185.8	1,440.5	1,442.0	0.00	0.00	0.00
14,000.0	90.00	89.54	12,312.0	186.6	1,540.5	1,542.0	0.00	0.00	0.00
14,100.0	90.00	89.54	12,312.0	187.5	1,640.5	1,642.0	0.00	0.00	0.00
14,200.0	90.00	89.54	12,312.0	188.3	1,740.5	1,742.0	0.00	0.00	0.00
14,300.0	90.00	89.54	12,312.0	189.1	1,840.5	1,842.0	0.00	0.00	0.00
14,400.0	90.00	89.54	12,312.0	189.9	1,940.5	1,942.0	0.00	0.00	0.00
14,500.0	90.00	89.54	12,312.0	190.7	2,040.5	2,042.0	0.00	0.00	0.00
14,600.0	90.00	89.54	12,312.0	191.5	2,140.5	2,142.0	0.00	0.00	0.00
14,700.0	90.00	89.54	12,312.0	192.3	2,240.5	2,242.0	0.00	0.00	0.00
14,800.0	90.00	89.54	12,312.0	193.1	2,340.5	2,342.0	0.00	0.00	0.00
14,900.0	90.00	89.54	12,312.0	193.9	2,440.5	2,442.0	0.00	0.00	0.00
15,000.0	90.00	89.54	12,312.0	194.8	2,540.5	2,542.0	0.00	0.00	0.00
15,100.0	90.00	89.54	12,312.0	195.6	2,640.5	2,642.0	0.00	0.00	0.00
15,200.0	90.00	89.54	12,312.0	196.4	2,740.5	2,742.0	0.00	0.00	0.00
15,300.0	90.00	89.54	12,312.0	197.2	2,840.5	2,842.0	0.00	0.00	0.00
15,400.0	90.00	89.54	12,312.0	198.0	2,940.5	2,942.0	0.00	0.00	0.00
15,500.0	90.00	89.54	12,312.0	198.8	3,040.5	3,042.0	0.00	0.00	0.00
15,600.0	90.00	89.54	12,312.0	199.6	3,140.5	3,142.0	0.00	0.00	0.00
15,700.0	90.00	89.54	12,312.0	200.4	3,240.5	3,242.0	0.00	0.00	0.00
15,800.0	90.00	89.54	12,312.0	201.2	3,340.5	3,342.0	0.00	0.00	0.00
15,900.0	90.00	89.54	12,312.0	202.1	3,440.5	3,442.0	0.00	0.00	0.00
16,000.0	90.00	89.54	12,312.0	202.9	3,540.5	3,542.0	0.00	0.00	0.00
16,100.0	90.00	89.54	12,312.0	203.7	3,640.5	3,642.0	0.00	0.00	0.00
16,200.0	90.00	89.54	12,312.0	204.5	3,740.5	3,742.0	0.00	0.00	0.00
16,300.0	90.00	89.54	12,312.0	205.3	3,840.5	3,842.0	0.00	0.00	0.00

Planning Report

Database:	EDM 5000.16 Single User Db	**Local Co-ordinate Reference:**	Well The Jones 19 20 State Com #834H
Company:	Avant Operating II, LLC	**TVD Reference:**	WELL @ 4152.5usft (4152.5)
Project:	Lea County, NM (NAD 83)	**MD Reference:**	WELL @ 4152.5usft (4152.5)
Site:	The Jones Pad 2	**North Reference:**	Grid
Well:	The Jones 19 20 State Com #834H	**Survey Calculation Method:**	Minimum Curvature
Wellbore:	OH		
Design:	Plan 0.1		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
16,400.0	90.00	89.54	12,312.0	206.1	3,940.5	3,942.0	0.00	0.00	0.00
16,500.0	90.00	89.54	12,312.0	206.9	4,040.5	4,042.0	0.00	0.00	0.00
16,600.0	90.00	89.54	12,312.0	207.7	4,140.4	4,142.0	0.00	0.00	0.00
16,700.0	90.00	89.54	12,312.0	208.5	4,240.4	4,242.0	0.00	0.00	0.00
16,800.0	90.00	89.54	12,312.0	209.3	4,340.4	4,342.0	0.00	0.00	0.00
16,900.0	90.00	89.54	12,312.0	210.2	4,440.4	4,442.0	0.00	0.00	0.00
17,000.0	90.00	89.54	12,312.0	211.0	4,540.4	4,542.0	0.00	0.00	0.00
17,100.0	90.00	89.54	12,312.0	211.8	4,640.4	4,642.0	0.00	0.00	0.00
17,200.0	90.00	89.54	12,312.0	212.6	4,740.4	4,742.0	0.00	0.00	0.00
17,300.0	90.00	89.54	12,312.0	213.4	4,840.4	4,842.0	0.00	0.00	0.00
17,400.0	90.00	89.54	12,312.0	214.2	4,940.4	4,942.0	0.00	0.00	0.00
17,500.0	90.00	89.54	12,312.0	215.0	5,040.4	5,042.0	0.00	0.00	0.00
17,600.0	90.00	89.54	12,312.0	215.8	5,140.4	5,142.0	0.00	0.00	0.00
17,700.0	90.00	89.54	12,312.0	216.6	5,240.4	5,242.0	0.00	0.00	0.00
17,800.0	90.00	89.54	12,312.0	217.5	5,340.4	5,342.0	0.00	0.00	0.00
17,900.0	90.00	89.54	12,312.0	218.3	5,440.4	5,442.0	0.00	0.00	0.00
18,000.0	90.00	89.54	12,312.0	219.1	5,540.4	5,542.0	0.00	0.00	0.00
18,100.0	90.00	89.54	12,312.0	219.9	5,640.4	5,642.0	0.00	0.00	0.00
18,200.0	90.00	89.54	12,312.0	220.7	5,740.4	5,742.0	0.00	0.00	0.00
18,300.0	90.00	89.54	12,312.0	221.5	5,840.4	5,842.0	0.00	0.00	0.00
18,400.0	90.00	89.54	12,312.0	222.3	5,940.4	5,942.0	0.00	0.00	0.00
18,500.0	90.00	89.54	12,312.0	223.1	6,040.4	6,042.0	0.00	0.00	0.00
18,600.0	90.00	89.54	12,312.0	223.9	6,140.4	6,142.0	0.00	0.00	0.00
18,700.0	90.00	89.54	12,312.0	224.7	6,240.4	6,242.0	0.00	0.00	0.00
18,800.0	90.00	89.54	12,312.0	225.6	6,340.4	6,342.0	0.00	0.00	0.00
18,900.0	90.00	89.54	12,312.0	226.4	6,440.4	6,442.0	0.00	0.00	0.00
19,000.0	90.00	89.54	12,312.0	227.2	6,540.4	6,542.0	0.00	0.00	0.00
19,100.0	90.00	89.54	12,312.0	228.0	6,640.4	6,642.0	0.00	0.00	0.00
19,200.0	90.00	89.54	12,312.0	228.8	6,740.4	6,742.0	0.00	0.00	0.00
19,300.0	90.00	89.54	12,312.0	229.6	6,840.4	6,842.0	0.00	0.00	0.00
19,400.0	90.00	89.54	12,312.0	230.4	6,940.4	6,942.0	0.00	0.00	0.00
19,500.0	90.00	89.54	12,312.0	231.2	7,040.4	7,042.0	0.00	0.00	0.00
19,600.0	90.00	89.54	12,312.0	232.0	7,140.4	7,142.0	0.00	0.00	0.00
19,700.0	90.00	89.54	12,312.0	232.9	7,240.3	7,242.0	0.00	0.00	0.00
19,800.0	90.00	89.54	12,312.0	233.7	7,340.3	7,342.0	0.00	0.00	0.00
19,900.0	90.00	89.54	12,312.0	234.5	7,440.3	7,442.0	0.00	0.00	0.00
20,000.0	90.00	89.54	12,312.0	235.3	7,540.3	7,542.0	0.00	0.00	0.00
20,100.0	90.00	89.54	12,312.0	236.1	7,640.3	7,642.0	0.00	0.00	0.00
20,200.0	90.00	89.54	12,312.0	236.9	7,740.3	7,742.0	0.00	0.00	0.00
20,300.0	90.00	89.54	12,312.0	237.7	7,840.3	7,842.0	0.00	0.00	0.00
20,400.0	90.00	89.54	12,312.0	238.5	7,940.3	7,942.0	0.00	0.00	0.00
20,500.0	90.00	89.54	12,312.0	239.3	8,040.3	8,042.0	0.00	0.00	0.00
20,600.0	90.00	89.54	12,312.0	240.1	8,140.3	8,142.0	0.00	0.00	0.00
20,700.0	90.00	89.54	12,312.0	241.0	8,240.3	8,242.0	0.00	0.00	0.00
20,800.0	90.00	89.54	12,312.0	241.8	8,340.3	8,342.0	0.00	0.00	0.00
20,900.0	90.00	89.54	12,312.0	242.6	8,440.3	8,442.0	0.00	0.00	0.00
21,000.0	90.00	89.54	12,312.0	243.4	8,540.3	8,542.0	0.00	0.00	0.00
21,100.0	90.00	89.54	12,312.0	244.2	8,640.3	8,642.0	0.00	0.00	0.00
21,200.0	90.00	89.54	12,312.0	245.0	8,740.3	8,742.0	0.00	0.00	0.00
21,300.0	90.00	89.54	12,312.0	245.8	8,840.3	8,842.0	0.00	0.00	0.00
21,400.0	90.00	89.54	12,312.0	246.6	8,940.3	8,942.0	0.00	0.00	0.00
21,500.0	90.00	89.54	12,312.0	247.4	9,040.3	9,042.0	0.00	0.00	0.00
21,600.0	90.00	89.54	12,312.0	248.3	9,140.3	9,142.0	0.00	0.00	0.00
21,700.0	90.00	89.54	12,312.0	249.1	9,240.3	9,242.0	0.00	0.00	0.00

Planning Report

Database:	EDM 5000.16 Single User Db	**Local Co-ordinate Reference:**	Well The Jones 19 20 State Com #834H
Company:	Avant Operating II, LLC	**TVD Reference:**	WELL @ 4152.5usft (4152.5)
Project:	Lea County, NM (NAD 83)	**MD Reference:**	WELL @ 4152.5usft (4152.5)
Site:	The Jones Pad 2	**North Reference:**	Grid
Well:	The Jones 19 20 State Com #834H	**Survey Calculation Method:**	Minimum Curvature
Wellbore:	OH		
Design:	Plan 0.1		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
21,800.0	90.00	89.54	12,312.0	249.9	9,340.3	9,342.0	0.00	0.00	0.00
21,900.0	90.00	89.54	12,312.0	250.7	9,440.3	9,442.0	0.00	0.00	0.00
22,000.0	90.00	89.54	12,312.0	251.5	9,540.3	9,542.0	0.00	0.00	0.00
22,100.0	90.00	89.54	12,312.0	252.3	9,640.3	9,642.0	0.00	0.00	0.00
22,200.0	90.00	89.54	12,312.0	253.1	9,740.3	9,742.0	0.00	0.00	0.00
22,300.0	90.00	89.54	12,312.0	253.9	9,840.3	9,842.0	0.00	0.00	0.00
22,341.9	90.00	89.54	12,312.0	254.3	9,882.2	9,883.9	0.00	0.00	0.00
TD at 22341.9 - LTP/BHL - The Jones 19 20 State Com #834H									

Design Targets

Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
LTP/BHL - The Jones 19 - plan hits target center - Point	0.00	0.00	12,312.0	254.3	9,882.2	664,729.07	774,429.93	32.825068	-103.574529
FTP - The Jones 19 20 S - plan misses target center by 167.0usft at 12240.8usft MD (12186.7 TVD, 147.3 N, -186.2 E) - Point	0.00	0.00	12,312.0	171.5	-293.9	664,646.27	764,253.80	32.825036	-103.607656

Formations

Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)
1,532.0	1,532.0	RUSTLER			
2,752.0	2,752.0	TANSIL (Base Salt)			
2,892.0	2,892.0	YATES			
3,212.0	3,212.0	SVRV			
3,857.0	3,857.0	QUEEN			
4,640.0	4,640.0	SAN ANDREAS			
5,112.0	5,112.0	Cherry Canyon / Base Capitan			
6,128.6	6,127.0	GLORIETA			
7,756.1	7,752.0	TUBB			
8,286.9	8,282.0	ABO			
10,059.7	10,052.0	WOLFCAMP			
10,350.2	10,342.0	XX_MKR			
11,361.7	11,352.0	CISCO			
11,577.1	11,567.0	CISCO_B			
11,827.2	11,817.0	CISCO_C			
11,984.1	11,972.0	CISCO_D			
12,219.5	12,172.0	CISCO_E			

Released to Imaging: 8/27/2026 2:57:14 PM

Planning Report

Database:	EDM 5000.16 Single User Db	**Local Co-ordinate Reference:**	Well The Jones 19 20 State Com #834H
Company:	Avant Operating II, LLC	**TVD Reference:**	WELL @ 4152.5usft (4152.5)
Project:	Lea County, NM (NAD 83)	**MD Reference:**	WELL @ 4152.5usft (4152.5)
Site:	The Jones Pad 2	**North Reference:**	Grid
Well:	The Jones 19 20 State Com #834H	**Survey Calculation Method:**	Minimum Curvature
Wellbore:	OH		
Design:	Plan 0.1		

Plan Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates +N/-S (usft)	+E/-W (usft)	Comment
5,000.0	5,000.0	0.0	0.0	KOP - Start Build 2.00
5,159.9	5,159.8	1.7	-4.1	Start 6424.5 hold at 5159.9 MD
11,584.3	11,574.2	134.8	-336.8	Start Drop -2.00
11,744.2	11,734.0	136.5	-340.9	Start 100.5 hold at 11744.2 MD
11,844.7	11,834.5	136.5	-340.9	KOP #2 - Start Build 12.00
12,594.7	12,312.0	169.8	135.4	LP - Start DLS 2.00 TFO 90.00
12,771.4	12,312.0	176.7	312.0	Start 9570.5 hold at 12771.4 MD
22,341.9	12,312.0	254.3	9,882.2	TD at 22341.9

AFE: NM1669

API:

REGULATORY: NMOCD

PERMIT #

RIG: HP 615

KB: 4152.5 (26.5')

GL: 4126'


The Jones 19 20 State Com #834H

Upper Pennsylvanian

Lea County, NM

SHL: *Sec. 19, T-17S, R-34E; 1080 FNL, 393 FWL*

Lat: 32.824559, Long: -103.606703 (NAD83)

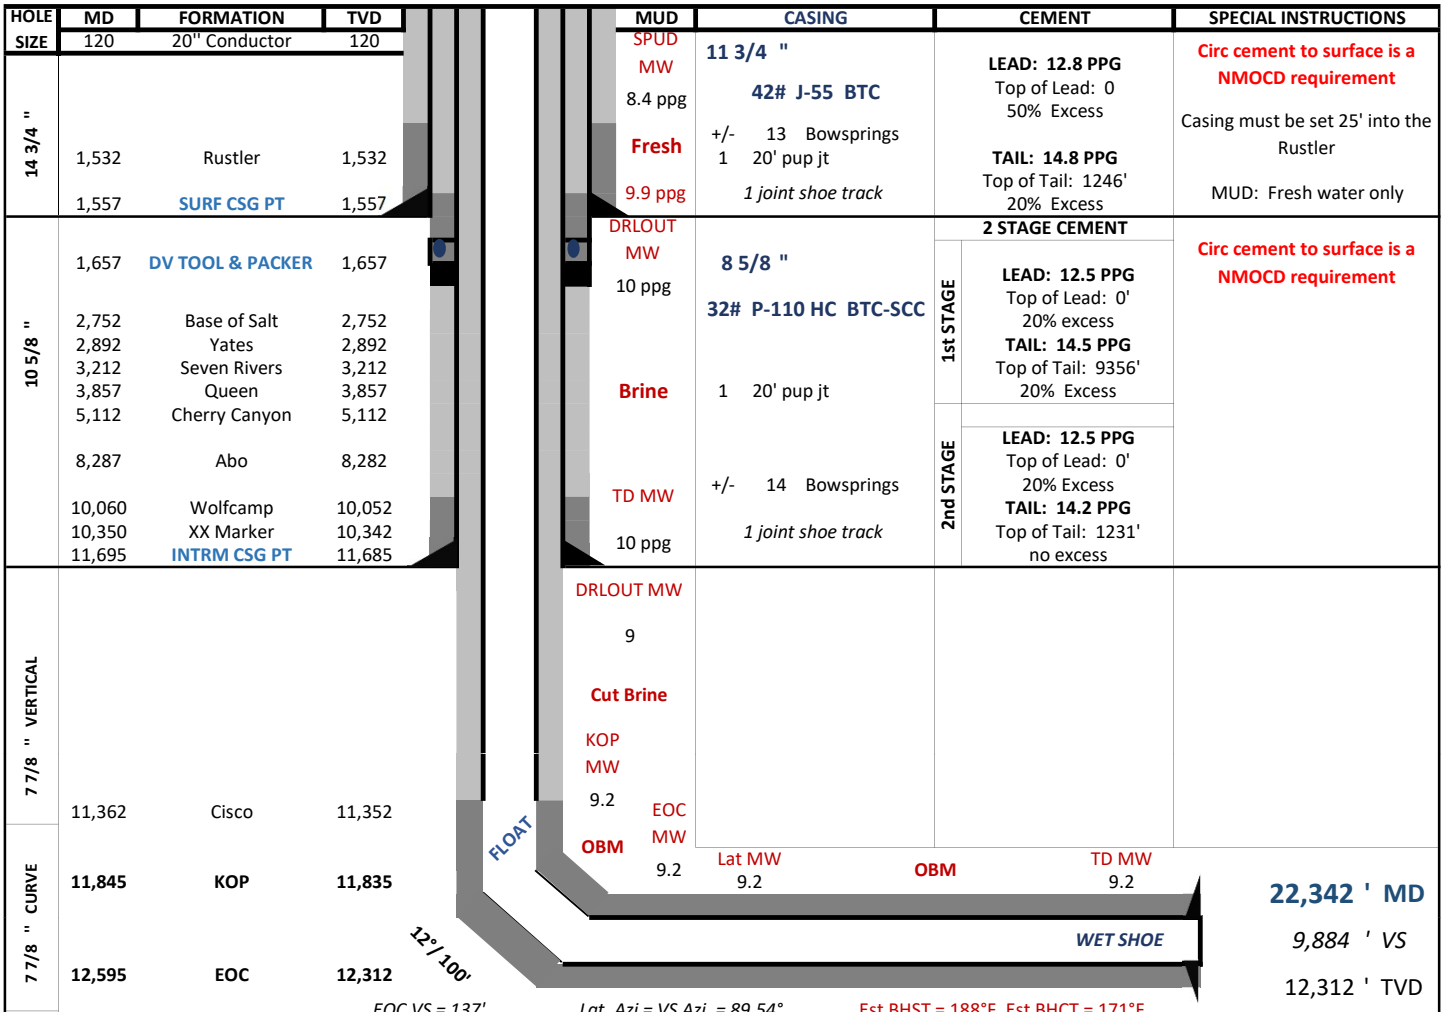

DIRECTIONS TO LOCATION:

Drilling Engineer: Ryan Harris

The Jones 19 20 State Com #834H (HP 615)

Date: 7/1/2026

Intent ☐ As Drilled ☐

API #

Operator Name:	Property Name:	Well Number

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County

Latitude	Longitude	NAD

First Take Point (FTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County

Latitude	Longitude	NAD

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County

Latitude	Longitude	NAD

Is this well the defining well for the Horizontal Spacing Unit? ☐

Is this well an infill well? ☐

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API #

Operator Name:	Property Name:	Well Number

KZ 06/29/2018