

30-039-07655

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SW Sec. 11 Twp 29 Rng 7

Name of Well/Wells or Pipeline Serviced SAN JUAN 29-7 UNIT #57

cps 310w

Elevation 6272' Completion Date 9/1/66 Total Depth 500' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. N/A

RECEIVED

MAY 31 1991

OIL CON. DIV
DIST. 3

Depths gas encountered: N/A

Type & amount of coke breeze used: 6240 lbs.

Depths anodes placed: 405', 399', 393', 387', 360', 354', 348', 340'

Depths vent pipes placed: 399' OF 3/4" HOSE

Vent pipe perforations: N/A

Remarks: gb #2 PE-PVC WIREW ON ANODES (YELLOW JACKET).

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

240' #17 Drag
43/4"

Date 9-1-66

Well Name J.V. 29-7 #57			CPS No. 310 W		
Location SW 11 - 29-7			Work Order No. 184-40158-50-20		
Anode Hole Depth 500	Total Drilling Rig Time 26 1/2	Type & Size Bit Used 54893 = 60' 6 1/4 54905 = 440		No. Sacks Mud Used 0	
No. Sacks Lost Circulation Mat'l Used 0	Anode Depth	# 1 405	# 2 399	# 3 393	# 4 387
		# 5 360	# 6 354		
Total Lbs. Coke Used 6240 lbs	Anode Output (Volts)	# 1 3.5	# 2 3.7	# 3 3.5	# 4 2.8
		# 5 3.0	# 6 3.4		
Total Circuit Resistance	No. Ft. Surface Cable Conduit				
Volts 11.6	Amps 7.5	Ohms 1.55	3306 Anodes 225 Surface = 3531		
			7 3.48	8 3.40	
			7 3.4	8 2.5	


Drilling Log (Attach Hereto). ☐

Remarks: PE-PVC Wire on Anodes (yellow jacket)
3/4" Hose to No. 2 Anode
15 lbs Barafos Circ. Thru Hole After Washing Hole

All Construction Completed

Barrels
(Signature)

GROUND BED LAYOUT SKETCH

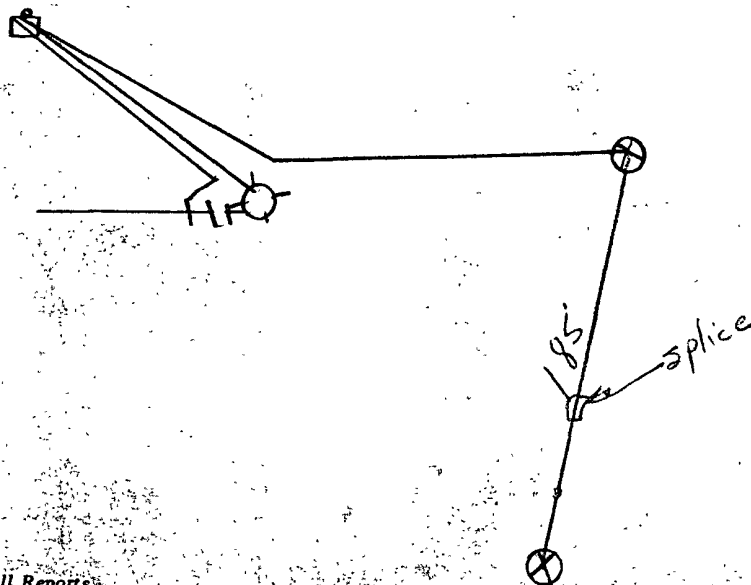

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SW Sec 11 Twp 29 Rng 7

Name of Well/Wells or Pipeline Serviced SAN JUAN 29-7 UNIT #57

cps 310w

Elevation 6272' Completion Date 3/4/63 Total Depth 260' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. N/A

RECEIVED

MAY 31 1991

Depths gas encountered: N/A

OIL CON. DIV.
DIST. 3

Type & amount of coke breeze used: 1870 lbs.

Depths anodes placed: 240', 234', 228', 203', 197', 191', 65'

Depths vent pipes placed: N/A

Vent pipe perforations: N/A

Remarks: gb #1

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

DATE 3-4-63

WELL NAME SAN UAN 29-7 # ⁵⁷~~67~~ CPS NO. 310W

LOCATION 11-29N-7W

WORK ORDER NUMBER 184-40542-50-02

ANODE HOLE DEPTH 260'

TOTAL DRILLING RIG TIME 13 hrs

DRILLING TIME FOR RECTIFIER POLE HOLE 0

TYPE AND SIZE BIT USED _____

NUMBER SACKS MUD USED 0

NUMBER SACKS LOST CIRCULATION MAT'L USED 0

ANODE DEPTHS #1 240', #2 234', #3 228', #4 203' 5. 192' 6. 18' 7. 65'

TOTAL LBS. COKE USED 1870 lbs

ANODE OUTPUTS 12 VOLTS, #1 1.5, #2 1.4, #3 1.4, #4 2.3 5. 2.4 6. 1.8 7. 1.2

TOTAL CIRCUIT RESISTANCE: VOLTS 11.7 AMPERES 5.7 OHMS 2.06

NUMBER FEET SURFACE CABLE CONDUCT 705'

DRILLING LOG (ATTACH HERETO).

FORMATION LOG (ATTACH HERETO).

REMARKS: Static $\phi/s = .72R$ 600 N

ALL CONSTRUCTION COMPLETED

E. Paulk
SIGNATURE

GROUND BED LAYOUT SKETCH



ORIGINAL & 1 COPY
ALL REPORTS

MORNING

Rig Time 13 hrs.

Company Supervisor

12