

192-30-039-20497
101-30-039-06693

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

47-30-039-06672

Operator UNOCAL Location: Unit Sec. 1 Twp 26 Rng 7

Name of Well/Wells or Pipeline Serviced Rincon Unit No. 192 DK, 101 MV, 47 PC,
& 271 FC.

Elevation 6466' Completion Date 7-30-90 Total Depth 300' Land Type* F

Casing, Sizes, Types & Depths NONE

If Casing is cemented, show amounts & types used NONE

If Cement or Bentonite Plugs have been placed, show depths & amounts used
NONE

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 140 FT. deep, 5' thick, fresh water.

Depths gas encountered: NONE

Type & amount of coke breeze used: 300' deep with carbo 60=99.9% carbon, Coke Breeze
1500 lbs.

Depths anodes placed: 245', 255', 265', 275', 285', 295'

Depths vent pipes placed: 0' to 300'

Vent pipe perforations: Laser cut slots from 140' to 300' deep

Remarks: 1st ground bed installed at this location.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

RECEIVED

JAN 30 1991

OIL CON. DIV.

DIST. 3

DATA SHEET NO. 1061

COMPANY Unocal JOB NO. 751-00084 DATE: 7-30-90
 WELL: Riser Unit #192 PIPELINE: _____
 LOCATION: SEC. 1 TWP. 26 RGE. 7 CO. Rio Arriba STATE NM
 ELEV. 6466'6" FT: ROTARY 300 FT: CABLE TOOL _____ FT: CASING Carbo 60 ft.
 GROUNDBED: DEPTH 300 FT. DIA. 6" IN. GAS 1500 LBS. ANODES Lids 6 ea. STL 6/50

DEPTH, FT.	DRILLER'S LOG	EXPLORING ANODE TO STRUCTURE			NO COKE	WITH COKE	ANODE NO.	DEPTH, TOP OF ANODES
		E	I	R				
0-15	Brown Sand,							
15 to	First water 140" Damp							
100	(Dark) Brown Sandstone w/ hard Gravel Stone .2							
5								
10								
15								
20								
25								
30								
35								
140	All vent pipe							
45								
50								
55								
60								
65								
70								
75								
80								
85								
190	Sandstone, grey							
95								
200								
5								
210	Shale, grey to Dark grey							
15								
20								
25								
30								
235								
40								
245							6	295
50								
255							5	255
60								
265						7.3	4	265
70								
275							3	275
80								
285							2	285
90								
295							1	295
300								
5								

GROUNDED RESISTANCE: (1) VOLTS 12.64 - AMPS 7.3 - 1.73 OHMS

(2) VIBROGROUND _____ OHMS

GENERAL CATHODIC PROTECTION SERVICES CO.

A LUKE'S COMPANY

MO-TE DRILLING, INC.

DAY Monday

DRILLER <u>C. L. L.</u>		LEFT TOWN	ARRIVED FIELD
HELPER <u>D. L. L.</u>		LEFT FIELD	ARRIVED TOWN
HELPER		TOTAL FOOTAGE TODAY	

RIG NO. 206 DATE 9-30-92 CLIENT Ums-C-1

BEGIN WORK ON HOLE NO. Benton 102 AT _____ FEET


BEGIN WORK ON HOLE NO. _____ AT _____ FEET

TIME		ACTIVITY
FROM	TO	
0	15	Brown sand
15	170	Change to dark brown sand to with some hard gravel looking stones.
170	210	Sandstone, grey
210	300	Shale, grey to dark grey.

BIT RECORD		
SIZE & MAKE	SERIAL NO.	FOOTAGE
1 5/8	new special	

CIRCULATION MATERIAL		
QUAN.	UNIT	MATERIAL

NO. OF LOADS OF WATER _____ SOURCE _____

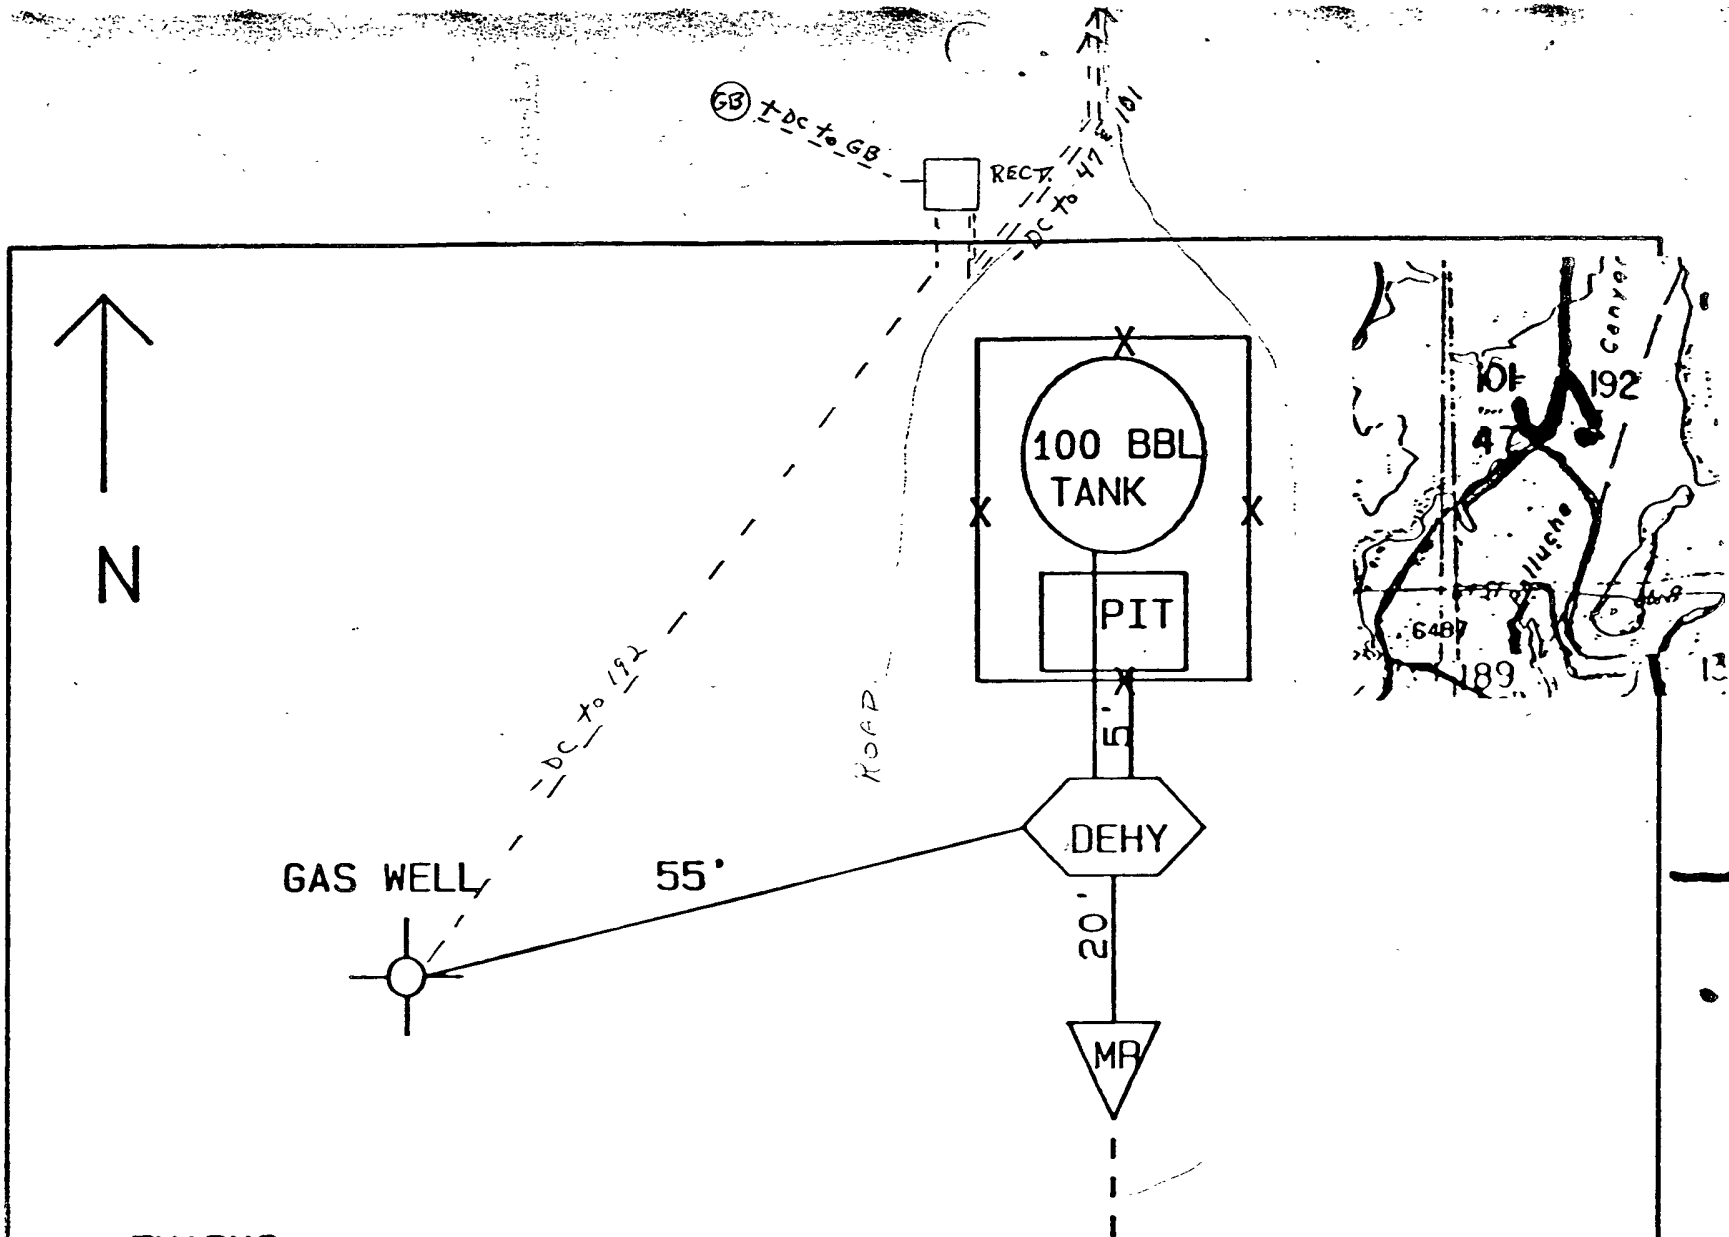

REMARKS

	RINCON UNIT #192 DK
	NE/SW SEC 1 T26NR7W NMPM
	METER NO. 87419
DATE: 05/25/89	SF-079160
SCALE: NONE	UNOCAL