District-I 1625 N French Dr., Hobbs, NM 88240

District II

1301 W Grand Ave , Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

Form C-144 June 16, 2008

For temporary pits, closed-loop sytems, and below-grade tanks, submit to the appropriate NMOCD District Office.

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Pit, Closed-Loop System, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application OIL CONS. DIV.

Type of action:	X Permit of a pit, closed-loop system, below-grade tank, or proposed alternative methodIS1. 3
	Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method

Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the

environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances

Operator: Burlington Resources Oil & Gas Company, LP	OGRID#: 14538
Address: PO Box 4289, Farmington, NM 87499	Ο Ο ΚΙΔπ. 14330
Facility or well name: San Juan 32-9 Unit #279S	
	CD Permit Number:
U/L or Qtr/Qtr: C(NENW) Section: 31 Township: 32N	Range: 9W County: San Juan
Center of Proposed Design: Latitude: 36.94636300' N I	Longitude: 107.82320300' W NAD: X 1927 1983 al Trust or Indian Allotment
Pit: Subsection F or G of 19.15.17.11 NMAC	X Closed-loop Systems: Subsection H of 19.15.17.11 NMAC
Temporary: Drilling Workover	Drying Pad X Tanks Haul-off Bins Other:
Permanent Emergency Cavitation	Lined Unlined
Lined Unlined	Liner type: Thickness mil LLDPE HDPE PVC
Liner type: ThicknessmilLLDPEHDPEPVC	Other:
Other String-Reinforced	Seams: Welded Factory Other:
Seams: Welded Factory Other	Volume: 500 bbl 104 yd3
Volume:bbl Dimensions: LxWxD	Dimernsions: Length 45' x Width 10'
Below-grade tank: Subsection I of 19.15.17 11 NMAC	Fencing: Subsection D of 19.15.17 11 NMAC
Volume:bbl	Chain link, six feet in height, two strangs of barbed wire at top
Type of fluid:	Four foot height, four strands of barbed wire evenly spaced between
Tank Construction Material:	one and four feet
Secondary containment with leak detection	Netting: Subsection E of 19.15.17.11
Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off	Screen Netting Other
Visible sidewalls and liner	Monthly inspections
Visible sidewalls only	Signs: Subsection C of 19 15.17.11 NMAC
Other:	12"x 24", 2" lettering, provided Operator's name, site location, and
Liner type: Thickness:mil HDPE PVC	emergency telephone numbers
Other:	X Signed in compliance with 19.15.3.103 NMAC
Alternative Method:	Administrative Approvals and Exceptions:
Submittal of an exception request is required. Exceptions must be	Justifications and/or demonstrations of equivalency are required. Please
submitted to the Santa Fe Environmental Bureau office for consideration of approval.	refer to 19.15.17 NMAC for guidance.
οι αργιοναι.	Please check a box if one or more of the following is requested, if not leave blank:
	Administrative approval(s): Requests must be submitted to the
	appropriate division district or the Santa Fe Environmental Bureau office for consideration of approval. (Fencing in Design Plan)
	Exception(s): Requests must be submitted to the Santa Fe
	Environmental Bureau office for consideration of approval.

Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above grade-tanks associated with a closed-loop system.					
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes	□No			
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	□Yes	□No			
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes	□No			
(Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	□NA				
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes	No			
(Applied to permanent pits) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	□NA	!			
Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.	Yes	□No			
- NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site.					
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended	Yes	□No			
- Written confirmation or verification from the municipality; Written approval obtained from the municipality Within 500 feet of a wetland.	Пv	Пх			
- US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	∐Yes	∐No			
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division	Yes	□No			
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological	Yes	□No			
Society; Topographic map Within a 100-year floodplain - FEMA map	Yes	□No			
Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.	9 NMAC				
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the de-	ocuments ar	e attached.			
Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintence Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC					
Previously Approved Design (attach copy of API Number: or Permit					
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Geologic and Hydrogeologic Data (required for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations (required for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.12 NMAC					
X Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC Previously Approved Design (attach copy of API Number:					

Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC				
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.				
Hydrogeologic Report - based upon the requirements of Paragraph (I) of Subsection B of 19.15.17.9 NMAC				
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC				
Climatological Factors Assessment				
Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC				
Dike Protection and Structural Integrity Design: based upon the appropriate requirements of 19.15.17.11 NMAC				
Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC				
Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC				
Quality Control/Quality Assurance Construction and Installation Plan				
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC				
Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC				
Nuisance or Hazardous Odors, including H2S, Prevention Plan				
Emergency Response Plan				
Oil Field Waste Stream Characterization				
Monitoring and Inspection Plan				
Erosion Control Plan				
Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC				
D. LOI (O.C. ELONDALO)				
Proposed Closure: 19.15.17.13 NMAC				
Type: Drilling Workover Emergency Cavitation Permanent Pit Below-grade Tank X Closed-loop System Alteri	native			
Proposed Closure X Waste Excavation and Removal				
•				
On-site Closure Method (only for temporary pits and closed-loop				
□ In-place □ On-site Trench				
Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau f	or			
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC				
Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommentations of acceptable source				
material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate				
material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste.	∐Yes ∏No			
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.	□Yes □No □NA			
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste.				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	□NA □			
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste	□NA □Yes □No			
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells	□NA □Yes□No □NA			
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste.	NA Yes No NA Yes No			
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	NA Yes No NA Yes No NA			
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal	NA Yes No NA Yes No NA			
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial	NA Yes No NA Yes No NA			
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site	NA Yes No NA Yes No NA Yes No			
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial	NA Yes No NA Yes No NA Yes No Yes No			
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	NA Yes No NA Yes No NA Yes No			
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.	NA Yes No NA Yes No NA Yes No Yes No			
district office or may be considered an exception which must be submitted to the Sana Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time	NA Yes No NA Yes No NA Yes No Yes No			
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.	NA Yes No NA Yes No NA Yes No Yes No			
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes,or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended	NA Yes No NA Yes No NA Yes No Yes No			
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells. Ground water is between 50 and 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells. Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells. Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site. Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image. Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes,or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site. Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal	NA Yes No NA Yes No NA Yes No Yes No			
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes,or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended	NA Yes No NA Yes No NA Yes No Yes No Yes No			
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended Written confirmation or verification from the municipality; Written approval obtained from the municipality	NA Yes No NA Yes No NA Yes No Yes No			
district office or may be considered an exception which must be submitted to the Sania Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map: Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended Within 500 feet of a wetland.	NA Yes No NA Yes No NA Yes No Yes No Yes No Yes No			
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended Witten confirmation or verification from the municipality; Written approval obtained from the municipality Within 500 feet of a wetland.	NA Yes No NA Yes No NA Yes No Yes No Yes No			
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended Witten confirmation or verification from the municipality; Written approval obtained from the municipality Within 500 feet of a wetland. Proposed site Witten confirmation or verification or map from the NM EMNRD - Mining and Mineral Division	NA Yes No NA Yes No NA Yes No Yes No Yes No Yes No Yes No			
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended Within 500 feet of a wetland. Proposed site Within the area overlying a subsurface mine. Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division Within an unstable area.	NA Yes No NA Yes No NA Yes No Yes No Yes No Yes No			
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes,or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended Within 500 feet of a wetland. Proposed site Within the area overlying a subsurface mine. Within an unstable area. Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM	NA Yes No NA Yes No NA Yes No Yes No Yes No Yes No Yes No			
district affice or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau affice for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended Witten confirmation or verification from the municipality; Written approval obtained from the municipality Within 500 feet of a wetland. Proposed site Within an unstable area.	NA Yes No NA Yes No NA Yes No Yes No Yes No Yes No Yes No			
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes,or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended Within 500 feet of a wetland. Proposed site Within the area overlying a subsurface mine. Within the area overlying a subsurface mine. Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM	NA Yes No NA Yes No NA Yes No Yes No Yes No Yes No Yes No			

Waste Excavation and Removal Closure Plan Checklist: (19.15 17 13 N to the closure plan. Please indicfate, by a check mark in the box, that the documents are						
$ \overline{X} $ Protocols and Procedures - based upon the appropriate requirements of						
Confirantion Sampling Plan (if applicable) - based upon the appropria						
Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)						
Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19 15 17.13 NMAC						
Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19 15.17.13 NMAC						
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19 15 17.13 NMAC						
Waste Removal Closure for Closed-loop Systems That Utilize Haul-off facilities for the disposal of liquids, drilling fluids and drill cuttings.	Bins Only: (19 15 17 13 D NMAC) Instructions: Please identify the facility or					
Disposal Facility Name: Envirotech, Basin Disposal	Disposal Facility Permit Number: NM-01-0011 & NM-01-005					
On-Site Closure Plan Checklist: (19 15 17 13 NMAC) Instructions: Each of the check mark in the box, that the documents are attached.	following items must bee attached to the closure plan. Please indicate, by a					
Siting Criteria Compliance Demonstrations - based upon the appropri	ate requirements of 19.15.17.10 NMAC					
Proof of Surface Owner Notice - based upon the appropriate requirem	ents of Subsection F of 19 15 17.13 NMAC					
Construction and Design of Burial Trench (if applicable) based upon	the appropriate requirements of 19.15.17.11 NMAC					
Protocols and Procedures - based upon the appropriate requirements of	f 19.15.17.13 NMAC					
Confirmation Sampling Plan (if applicable) - based upon the appropris	-					
Waste Material Sampling Plan - based upon the appropriate requirement						
Disposal Facility Name and Permit Number (for liquids, drilling fluids						
Soil Cover Design - based upon the appropriate requirements of Substitution 1.						
Re-vegetation Plan - based upon the appropriate requirements of Subs						
	discensify of 19.13.17.13 MMAC					
Operator Application Certification: Thereby certify that the information submitted with this application is true, accura	ta and complete to the host of my knowledge and heliof					
Name (Print). Crystal Tafoya	Title: Regulatory Technician					
7/17/						
Signature: Lapona lapona	Date. 7/16/2008					
e-mail address: <u>drystal.tafoya@conodophilfips.com</u>	Telephone: 505-326-9837					
OCD Approval: Permit Application (including closure plan)	Closure Plan (only)					
OCD Representative Signature: Bank Dell	OCD Permit Number.					
OCD Representative Signature: But Dell Title: Enviro / Spec	OCD Permit Number.					
OCD Representative Signature: B. S.	Approval Date: 7-18-08 OCD Permit Number.					
OCD Representative Signature: B. S.	Approval Date: 7-18-08 OCD Permit Number. 17 13 NMAC Closure Completion Date:					
OCD Representative Signature: B. S.	Approval Date: 7-18-08 OCD Permit Number.					
OCD Representative Signature: B. Spec Title: English Spec Closure Report (required within 60 days of closure completion): Subsection K of 19 15 Closure Method: Waste Excavation and Removal On-Site Closure Al If different from approved plan, please explain	Approval Date: 7–18–09 OCD Permit Number. 17 13 NMAC Closure Completion Date: ternative Closure					
OCD Representative Signature: Title: Spec Closure Report (required within 60 days of closure completion): Subsection K of 19 15 Closure Method: Waste Excavation and Removal On-Site Closure Al If different from approved plan, please explain Closure Report Attactment Checklist: Instructions: Each of the following item box, that the documents are attached.	Approval Date: 7–18–09 OCD Permit Number. 17 13 NMAC Closure Completion Date: ternative Closure					
OCD Representative Signature: Title: Spec Closure Report (required within 60 days of closure completion): Subsection K of 19 15 Closure Method: Waste Excavation and Removal On-Site Closure Al If different from approved plan, please explain Closure Report Attactment Checklist: Instructions: Each of the following item box, that the documents are attached. Proof of Closure Notice	Approval Date: 7–18–09 OCD Permit Number. 17 13 NMAC Closure Completion Date: ternative Closure					
OCD Representative Signature: Title: Spec Closure Report (required within 60 days of closure completion): Subsection K of 19 15 Closure Method: Waste Excavation and Removal On-Site Closure Al If different from approved plan, please explain Closure Report Attactment Checklist: Instructions: Each of the following item box, that the documents are attached.	Approval Date: 7–18–09 OCD Permit Number. 17 13 NMAC Closure Completion Date: ternative Closure					
OCD Representative Signature: Title: Spec Closure Report (required within 60 days of closure completion): Subsection K of 19 15 Closure Method: Waste Excavation and Removal On-Site Closure Al If different from approved plan, please explain Closure Report Attactment Checklist: Instructions: Each of the following item box, that the documents are attached. Proof of Closure Notice Proof of Deed Notice (if applicable)	Approval Date: 7–18–09 OCD Permit Number. 17 13 NMAC Closure Completion Date: ternative Closure					
OCD Representative Signature: Title: ENJICO Spec Closure Report (required within 60 days of closure completion): Subsection K of 19 15 Closure Method: Waste Excavation and Removal On-Site Closure Al If different from approved plan, please explain Closure Report Attactment Checklist: Instructions: Each of the following item box, that the documents are attached. Proof of Closure Notice Proof of Deed Notice (if applicable) Plot Plan Confirmation Sampling Analytical Results Waste Material Sampling Analytical Results	Approval Date: 7–18–09 OCD Permit Number. 17 13 NMAC Closure Completion Date: ternative Closure					
OCD Representative Signature: Title: ENJICO SPEC Closure Report (required within 60 days of closure completion): Subsection K of 19 15 Closure Method: Waste Excavation and Removal On-Site Closure Al If different from approved plan, please explain Closure Report Attactment Checklist: Instructions: Each of the following item box, that the documents are attached. Proof of Closure Notice Proof of Deed Notice (if applicable) Plot Plan Confirmation Sampling Analytical Results Waste Material Sampling Analytical Results Disposal Facility Name and Permit Number	Approval Date: 7–18–09 OCD Permit Number. 17 13 NMAC Closure Completion Date: ternative Closure					
OCD Representative Signature: Title: Spec Closure Report (required within 60 days of closure completion): Subsection K of 19 15 Closure Method: Waste Excavation and Removal On-Site Closure Al If different from approved plan, please explain Closure Report Attactment Checklist: Instructions: Each of the following item box, that the documents are attached. Proof of Closure Notice Proof of Deed Notice (if applicable) Plot Plan Confirmation Sampling Analytical Results Waste Material Sampling Analytical Results Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation	Approval Date: 7–18–09 OCD Permit Number. 17 13 NMAC Closure Completion Date: ternative Closure					
OCD Representative Signature: Title: Spec Closure Report (required within 60 days of closure completion): Subsection K of 19 15 Closure Method: Waste Excavation and Removal On-Site Closure Al If different from approved plan, please explain Closure Report Attactment Checklist: Instructions: Each of the following item box, that the documents are attached. Proof of Closure Notice Proof of Deed Notice (if applicable) Plot Plan Confirmation Sampling Analytical Results Waste Material Sampling Analytical Results Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique	Approval Date: 7–18–09 OCD Permit Number. 17 13 NMAC Closure Completion Date: ternative Closure					
OCD Representative Signature: Title: Spec Closure Report (required within 60 days of closure completion): Subsection K of 19 15 Closure Method: Waste Excavation and Removal On-Site Closure Al If different from approved plan, please explain Closure Report Attactment Checklist: Instructions: Each of the following item box, that the documents are attached. Proof of Closure Notice Proof of Deed Notice (if applicable) Plot Plan Confirmation Sampling Analytical Results Waste Material Sampling Analytical Results Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation	OCD Permit Number. 17 13 NMAC Closure Completion Date: ternative Closure s must be attached to the closure report. Please indicate, by a check mark in the					
OCD Representative Signature: Title: Spec Closure Report (required within 60 days of closure completion): Subsection K of 19 15 Closure Method: Waste Excavation and Removal On-Site Closure Al If different from approved plan, please explain Closure Report Attactment Checklist: Instructions: Each of the following item box, that the documents are attached. Proof of Closure Notice Proof of Deed Notice (if applicable) Plot Plan Confirmation Sampling Analytical Results Waste Material Sampling Analytical Results Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation) On-site Closure Latitude:	OCD Permit Number. 17 13 NMAC Closure Completion Date: ternative Closure s must be attached to the closure report. Please indicate, by a check mark in the					
Closure Report (required within 60 days of closure completion): Subsection K of 19 15 Closure Method: Waste Excavation and Removal On-Site Closure Al If different from approved plan, please explain Closure Report Attactment Checklist: Instructions: Each of the following item box, that the documents are attached. Proof of Closure Notice Proof of Deed Notice (if applicable) Plot Plan Confirmation Sampling Analytical Results Waste Material Sampling Analytical Results Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation) On-site Closure Latitude:	Approval Date: 7-18-09 OCD Permit Number. 17 13 NMAC Closure Completion Date: ternative Closure s must be attached to the closure report. Please inducate, by a check mark in the Longitude: NAD: 1927 1983					
Closure Report (required within 60 days of closure completion): Subsection K of 19 15 Closure Method: Waste Excavation and Removal On-Site Closure Al If different from approved plan, please explain Closure Report Attactment Checklist: Instructions: Each of the following item box, that the documents are attached. Proof of Closure Notice Proof of Deed Notice (if applicable) Plot Plan Confirmation Sampling Analytical Results Waste Material Sampling Analytical Results Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation) On-site Closure Latitude: Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure report is treclosure complies with all applicable closure requirements and conditions specified in the agents.	Approval Date: 7-18-09 OCD Permit Number. 17 13 NMAC Closure Completion Date: ternative Closure s must be attached to the closure report. Please inducate, by a check mark in the Longitude: NAD: 1927 1983 ue, accurate and complete to the best of my knowledge and belief I also certify that the proved closure plan					
Closure Report (required within 60 days of closure completion): Subsection K of 19 15 Closure Method: Waste Excavation and Removal On-Site Closure All If different from approved plan, please explain Closure Report Attactment Checklist: Instructions: Each of the following item box, that the documents are attached. Proof of Closure Notice Proof of Deed Notice (if applicable) Plot Plan Confirmation Sampling Analytical Results Waste Material Sampling Analytical Results Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation) On-site Closure Latitude: Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure report is treclosure complies with all applicable closure requirements and conditions specified in the applicable (Print).	Approval Date:					
Closure Report (required within 60 days of closure completion): Subsection K of 19 15 Closure Method: Waste Excavation and Removal On-Site Closure Al If different from approved plan, please explain Closure Report Attactment Checklist: Instructions: Each of the following item box, that the documents are attached. Proof of Closure Notice Proof of Deed Notice (if applicable) Plot Plan Confirmation Sampling Analytical Results Waste Material Sampling Analytical Results Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation) On-site Closure Latitude: Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure report is treclosure complies with all applicable closure requirements and conditions specified in the agents.	Approval Date: 7-18-09 OCD Permit Number. 17 13 NMAC Closure Completion Date: ternative Closure s must be attached to the closure report. Please inducate, by a check mark in the Longitude: NAD: 1927 1983 ue, accurate and complete to the best of my knowledge and belief I also certify that the proved closure plan					

Oistrict I ,PO Box 1980. Hobbs. NM 88241~1980

District II Ph Drawer DD, Artesia, NM 88211-0719

Ostrict III 1000 Rio Brazos Ad., Aztec, NM 87410

Ostrict IV PO Box 2088, Santa Fe, NM 87504-2088

State of New Mexico Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION PO Box 2088 Santa Fe. NM 87504-2088

Form C-102 Revised February 21, 1994 Instructions on back Submit to Appropriate District Office

State Lease - 4 Copies Fee Lease - 3 Copies

AMENDED REPORT


WELL LOCATION AND ACREAGE DEDICATION PLAT


'API Number 30-045-	*Pool Code 71629	'Pool Name Basin Fruitland Coal	
*Property Code		operty Name	*Well Number
7473	SAN JU	AN 32-9 UNIT	2795
'OGRID No.	*Op	erator Name	°Elevation
14538	BURLINGTON RESOURCE	ES OIL & GAS COMPANY, LP	6628
	10 Cun f	aco Location	

Surface Location Section Let Idn Feet from the North/South line UL or lot no. Feet from the East/West line C 31 32N 9W 730 NORTH 845 WEST SAN JUAN 11 Bottom Hole Location Ιf Different From Surface

UL or lot no Section Feet from the North/South line Feet from the County 12 Dedicated Acres ¹³ Joint or Infill 14 Consolidation Code R-9222 NSP

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

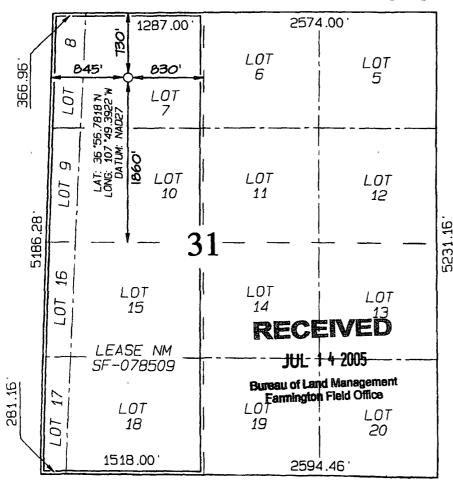

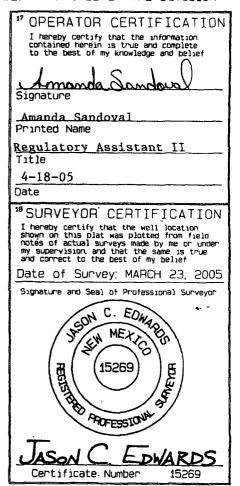

Burlington Resources Oil & Gas Company, LP Closed-loop Plans

Closed-loop Design Plan

BR's closed loop system will not entail a drying pad, temporary pit, below grade tank or sump. It will include an above ground tank suitable for holding the cuttings and fluids for rig operations. The tank will be sufficient volume to maintain a safe free board between disposal of the liquids and solids from rig operations.

- 1. Fencing is not required for an above ground closed-loop system
- 2. It will be signed in compliance with 19.15.3.103 NMAC
- 3. A frac tank will be on location to store fresh water

Closed-loop Operating and Maintenance Plan

BR's closed-loop tank will be operated and maintained to contain liquids and solids in order to prevent contamination of fresh water sources, in order to protect public health and the environment. To ensure the operation is maintained the following steps will be followed:

- 1. The liquids will be vacuumed out and disposed of at the Basin Disposal facility (Permit # NM-01-005). Solids in the closed-loop tank will be vacuumed out and disposed of at Envirotech (Permit # NM-01-0011) on a periodic basis to prevent over topping.
- 2. No hazardous waste, miscellaneous solid waste or debris will be discharged into or stored in the tank. Only fluids or cutting used or generated by rig operations will be placed or stored in the tank.
- 3. The division district office will be notified within 48 hours of the discovery of compromised integrity of the closed-loop tank. Upon the discovery of the compromised tank, repairs will be enacted immediately
- 4. All of the above operations will be inspected and a log will be signed and dated. During rig operations the inspection will be daily.

Closed-loop Closure Plan

The closed-loop tank will be closed in accordance with 19.15.17.13. This will be done by transporting cuttings and all remaining sludges to Envirotech (Permit # NM-01-0011) immediately following rig operations. All remaining liquids will be transported and disposed of in the Basin Disposal facility (Permit # NM-01-005). The tanks will be removed from the location as part of the rig move. At time of well abandonment, the site will be reclaimed and re-vegetated to pre-existing conditions when possible.