District I

1625 N French Dr , Hobbs, NM 88240

District II

1301 W Grand Ave , Artesia, NM 88210

District III

1000 Rio Brazos Rd , Aztec, NM 87410

District IV

1220 S St Francis Dr , Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

July 21, 2008 For temporary pits, closed-loop sytems, and below-grade

Form C-144

tanks, submit to the appropriate NMOCD District Office

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office

<u>Pit, Closed-Loop System, Below-Grade Tank, or</u> <u>Proposed Alternative Method Permit or Closure Plan Application</u>

Type of action:	Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method
	Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method
	Modification to an existing permit
	Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system,
	below-grade tank, or proposed alternative method

Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request

Please be advised that approval of this request does not relieve the operator of hability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.

environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations of ordinances.
Operator: Burlington Resources Oil & Gas Company, LP OGRID#: 14538
Address: PO Box 4289, Farmington, NM 87499
Facility or well name: Pierce A 210S
API Number: 30-045-34591 OCD Permit Number
U/L or Qtr/Qtr: O(SWSE) Section: 13 Township: 30N Range: 10W County: San Juan
Center of Proposed Design: Latitude: 36.80706' N Longitude: 107.83297' W NAD: 1927 X 1983
Surface Owner: X Federal State Private Tribal Trust or Indian Allotment
X Pit: Subsection F or G of 19.15.17.11 NMAC
Closed-loop System: Subsection H of 19.15.17.11 NMAC Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent) Drying Pad Above Ground Steel Tanks Haul-off Bins Other Lined Unlined Liner type: Thickness mil LLDPE HDPE PVD Other Liner Seams: Welded Factory Other
Below-grade tank: Subsection I of 19.15.17.11 NMAC Volume. bbl Type of fluid. Tank Construction material: Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off Visible sidewalls and liner Visible sidewalls only Other Liner Type: Thickness mil HDPE PVC Other
5 Alternative Method: Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval

Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pit, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution of the light, four strands of barbed wire evenly spaced between one and four feet X Alternate Please specify 4' hogwire fence with a single strand of barbed wire on top. Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)	tution or churc	:h)
Screen Netting Other Monthly inspections (If netting or screening is not physically feasible)		
8 Signs: Subsection C of 19 15.17 11 NMAC 12" X 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers X Signed in compliance with 19.15.3 103 NMAC		
Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required Please refer to 19.15.17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank: Administrative approval(s): Requests must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for consi Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	deration of ap	proval.
10		
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above grade-tanks associated with a closed-loop system.		
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes.	XNo
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	Yes	XNo
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes	X No
(Applies to temporary, emergency, or cavitation pits and below-grade tanks)	□NA	
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	l	_
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applied to permanent pits)	Yes XNA	∐No
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image		
Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.	∐Yes	XNo
- NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site.		
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended	Yes	XNo
 Written confirmation or verification from the municipality; Written approval obtained from the municipality Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site 	Yes	XNo
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division	Yes	XNo
Within an unstable area Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological	Yes	XNo
Society; Topographic map Within a 100-year floodplain - FEMA map	Yes	XNo

Temporary Pits, Emergency Pits and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17 9 NMAC Instructions Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17 9 NMAC
X Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19 15 17.10 NMAC
X Design Plan - based upon the appropriate requirements of 19 15.17.11 NMAC
X Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of
19 15.17 9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API or Permit
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19 15.17.9 NMAC Instructions Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 10.15.17.10 NMAC
Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC
Design Plan - based upon the appropriate requirements of 19.15 17.11 NMAC
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15 17.9 NMAC and 19 15.17.13 NMAC
Previously Approved Design (attach copy of design) API
Previously Approved Operating and Maintenance Plan API
13
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
Hydrogeologic Report - based upon the requirements of Paragraph (I) of Subsection B of 19.15.17.9 NMAC
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC
Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19 15.17 11 NMAC
Dike Protection and Structural Integrity Design: based upon the appropriate requirements of 19.15.17.11 NMAC
Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC
Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19 15.17.11 NMAC
Quality Control/Quality Assurance Construction and Installation Plan
Operating and Maintenance Plan - based upon the appropriate requirements of 19 15.17.12 NMAC
Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
Nuisance or Hazardous Odors, including H2S, Prevention Plan
Emergency Response Plan
Oil Field Waste Stream Characterization
Monitoring and Inspection Plan
Erosion Control Plan
Closure Plan - based upon the appropriate requirements of Subsection C of 19 15.17 9 NMAC and 19.15 17.13 NMAC
14 Proposed Change 10 15 17 10 NA C
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.
Type. X Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System
Alternative Proposed Closure Method Waste Evacuation and Removal
Proposed Closure Method. Waste Excavation and Removal Waste Removal (Closed-loop systems only)
X On-site Closure Method (only for temporary pits and closed-loop systems)
X In-place Burnal On-site Trench
Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan.
Please indicate, by a check mark in the box, that the documents are attached. Protocols and Procedures - besed years the appropriate requirements of 10.15.17.13 NIMAC.
Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill outlings)
Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17 13 NMAC
Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19 15.17.13 NMAC
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15 17.13 NMAC
To the Resident Linit - based upon the appropriate requirements of subsection 6 of 17.13 17.13 (1917)

Form C-144 Oil Conservation Division Page 3 of 5

Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tasks or Hundrell Bins Onther (19) 15.171.35 DMAC								
Disposal Facility Name: Disposal Facility Permit #. Disposal Facility Name: Disposal Facility Name: Disposal Facility Name: Disposal Facility Permit #. Disposal Facility Name: Disposal Facility Name: Disposal Facility Name: Disposal Facility Permit #. Disposal Facility Name: Disposal Facility Permit #. Disposal Facility Name: Disposal Facility Permit #. Disposal Facility Name: Disposal Facility Name: Disposal Facility Name: Disposal Facility Permit #. Disposal Facility Name: Disposal Permit #. Dis								
Disposal Facility Name: Disposal Facility Permit #: Will any of the proposed closed-loop system operations and associated activities occur on or an areas that will not be used for future service and operations? Yes (If yes, please provide the information No Required for impacted areas which will not be used for future service and operations? Soil Backfill and Cover Design Specification - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Street Reclamation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Street Reclamation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Street Reclamation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Street Reclamation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Street Reclamation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Street Reclamation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Street Reclamation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Street Reclamation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Street Reclamation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Street Reclamation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Street Reclamation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Street Reclamation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Street Reclamation of Appropriate I of 19.15.17.10 NMAC Street Reclamation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.10 NMAC Street Reclamation Plan - based upon the Based upon I of 19.15.17.10 NMAC Street Reclamation Plan - based upon I of 19.1								
Will any of the proposed closed-loop system operations and associated activities occur on or mareas that will not be used for future service and operations? Yes (if yes, please provide the information No No No No No No No								
Soil Backfill and Cover Design Specification - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC								
Siting Criteria (Regarding on-site closure methods only: 19.15.17.10 NMAC Instructions Each sting criteria requires a demonstration of complaine in the closure plan Recommendations of acceptable source material are provided below. Requests regarding changes to certain wing; criteria may require administration group road from the appropriate district office or may be considered on exception which must be submitted to the Sama Fe Environmental Bureau office for consideration of approval. Instifications analise demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for gailance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS: Data obtained from nearby wells. Ground water is between 50 and 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells. NIA Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site within 1000 horizontal feet of a private, domestic fresh water well or spring, in existence at the time of initial application Visual inspection (certification) of the proposed site; Arnal photo; satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring, in existence at the time of the initial application. NO flice of the State Engineer - iWATERS database, Visual inspection (certification) of the proposed site Within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of the initial application. NO flice of the State Engineer - iWATERS database, Visual inspection (certification) of the proposed site Within 1000 horizontal feet of a weltand - US fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification								
- NM Office of the State Engineer - tWATERS database search; USGS: Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - tWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - tWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application - Visual inspection (certification) of the proposed site; Aerial photo; satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring, in existence at the time of the initial application. - NM Office of the State Engineer - iWATERS database, Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as anended. - Written confirmation or verification from the municipality, Written approval obtained from the municipality Within 500 feet of a wetland - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Drivision Within an unstable area - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society: Topographic map Within a 100-year floodplain.								
- NM Office of the State Engineer - 1WATERS database search; USGS; Data obtained from nearby wells N/A N/A N/A N/A N/A								
- NM Office of the State Engineer - 1WATERS database search; USGS; Data obtained from nearby wells N/A N/A N/A N/A N/A								
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application - Visual inspection (certification) of the proposed site; Aerial photo; satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal fee of any other fresh water well or spring, in existence at the time of the initial application. - NM Office of the State Engineer - iWATERS database, Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality, Written approval obtained from the municipality Within 500 feet of a wetland - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division Within an unstable area - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map Within a 100-year floodplain.								
NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application Visual inspection (certification) of the proposed site; Aerial photo; satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal fee of any other fresh water well or spring, in existence at the time of the initial application. NM Office of the State Engineer - iWATERS database, Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. Within 500 feet of a wetland US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division Within an unstable area Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map Within a 100-year floodplain.								
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application Visual inspection (certification) of the proposed site; Aerial photo; satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal fee of any other fresh water well or spring, in existence at the time of the initial application. NM Office of the State Engineer - iWATERS database, Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. Within 500 feet of a wetland US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine Within the area overlying a subsurface mine Within an unstable area Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map Within a 100-year floodplain.								
(measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application - Visual inspection (certification) of the proposed site; Aerial photo; satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal fee of any other fresh water well or spring, in existence at the time of the initial application. - NM Office of the State Engineer - iWATERS database, Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality, Written approval obtained from the municipality Within 500 feet of a wetland - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division Within an unstable area - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map Within a 100-year floodplain.								
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application - Visual inspection (certification) of the proposed site; Aerial photo; satellite image Yes X No								
- Visual inspection (certification) of the proposed site; Aerial photo; satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal fee of any other fresh water well or spring, in existence at the time of the initial application. - NM Office of the State Engineer - iWATERS database, Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality, Written approval obtained from the municipality Within 500 feet of a wetland - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division Within an unstable area - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map Within a 100-year floodplain. Yes X No								
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal fee of any other fresh water well or spring, in existence at the time of the initial application. - NM Office of the State Engineer - iWATERS database, Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality, Written approval obtained from the municipality Within 500 feet of a wetland - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division Within an unstable area - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map Within a 100-year floodplain. Yes X No								
purposes, or within 1000 horizontal fee of any other fresh water well or spring, in existence at the time of the initial application. NM Office of the State Engineer - iWATERS database, Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. Written confirmation or verification from the municipality, Written approval obtained from the municipality Within 500 feet of a wetland US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division Within an unstable area Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map Within a 100-year floodplain. Yes X No								
pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality, Written approval obtained from the municipality Within 500 feet of a wetland - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division Within an unstable area - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map Within a 100-year floodplain. Yes X No								
Within 500 feet of a wetland - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine - Written confiramtion or verification or map from the NM EMNRD-Mining and Mineral Division Within an unstable area - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map Within a 100-year floodplain.								
- US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine - Written confiramtion or verification or map from the NM EMNRD-Mining and Mineral Division Within an unstable area - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map Within a 100-year floodplain. Yes X No								
- Written confiramtion or verification or map from the NM EMNRD-Mining and Mineral Division Within an unstable area - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map Within a 100-year floodplain.								
Within an unstable area - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map Within a 100-year floodplain.								
- Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map Within a 100-year floodplain.								
Topographic map Within a 100-year floodplain. Yes X No								
18 On-Site Closure Plan Checklist: (19 15 17.13 NMAC) Instructions: Each of the following items must bee attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.								
X Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19 15.17.10 NMAC								
X Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC								
Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19 15.17.11 NMAC								
Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19 15.17.11 NMAC								
Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19 15.17.11 NMAC Construction/Design Plan of Temporary Pit (for in place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.11 NMAC								
Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19 15.17.11 NMAC Construction/Design Plan of Temporary Pit (for in place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.11 NMAC Yerotocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC								
Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19 15.17.11 NMAC Construction/Design Plan of Temporary Ptt (for in place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.11 NMAC Tonstruction/Design Plan of Temporary Ptt (for in place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC								
Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19 15.17.11 NMAC Construction/Design Plan of Temporary Pit (for in place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.11 NMAC Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC								

Form C-144 Oil Conservation Division Page 4 of 5

Derator Application hereby certify that the in	Certification: Information submitted with this application is true,	, accurate and complete to the	best of my knowledge and belief	
Name (Print):	_ Crystal Tafoya	Title:	Regulatory Technician	
Signature:	Joseph Takey	Date:	9/25/08	
e-mail address	crystal.tafoya@conocophillips.com	Telephone:	505-326-9837	A TOTAL CONTROL OF THE PARTY OF
. man address				
0 OCD Approval:	Permit Application (including closure plan)	Closure Plan (only)	OCD Conditions (see attac	chment)
OCD Representative			— Approval Date:	10/14/08
l'itle: <u>E</u>	njiro/spec	OCD Peri	nit Number:	
nstructions Operators of operators of operators of operators of the second operators ope	tired within 60 days of closure completion): are required to obtain an approved closure plan p ubmitted to the division within 60 days of the com as been obtained and the closure activities have b	rior to implementing any clos apletion of the closure activiti	ire activities and submitting the clo	
		Closur	e Completion Date:	
2 U Madhada				
Closure Method: Waste Excavatio	n and Removal On-site Closure Metho	od Alternative Closure	Method Waste Removal (C	osed-loop systems only)
	approved plan, please explain.			,
3				
losure Report Regard	ing Waste Removal Closure For Closed-loop Syntify the facility or facilities for where the liquids			
ere utilized.		D 15 %	D 231 1	
Disposal Facility Nan		-	Permit Number:	
Disposal Facility Nan	system operations and associated activities perform		Permit Number:	nartions?
_ `	se demonstrate compliane to the items below)	No	" be used for future service and ope	artions
	d areas which will not be used for future service a	and operations		
— ' ' '	(Photo Documentation)	1		
Soil Backfilling	and Cover Installation			
Re-vegetation Ap	pplication Rates and Seeding Technique			
24				
Closure Report At	ttachment Checklist: Instructions: Each of th	e following items must be att	ached to the closure report. Please	indicate, by a check mark in
_ ′	re Notice (surface owner and division)	•		
ш	Notice (required for on-site closure)			
=	n-site closures and temporary pits)			
	Sampling Analytical Results (if applicable)			
	Sampling Analytical Results (if applicable)			
=	ty Name and Permit Number			
= 1	g and Cover Installation			
= `	Application Rates and Seeding Technique			
=	on (Photo Documentation)			
On-site Closure	,	Longitude.	NAD 🗍	1927 1983
25				
Operator Closure Ce	ertification: information and attachments submitted with this c	losure report is turn account	and complete to the best of we be	wledge and helief. I also certify that
	mformation and attachments submitted with this c h all applicable closure requirements and conditu	•	-	теаде ана непер 1 авн сепцу тап
Name (Print):	·······	Title:		
Signature [.]		Date [.]		

New Mexico Office of the State Engineer POD Reports and Downloads

WATER COLUMN REPORT 08/21/2008

(quarters are 1=NW 2=NE 3=SW 4=SE)

•	(quarter	s are	e big	gge	st to	smallest)			Depth	Depth	Water	(in feet)
POD Number	Tws	Rng	Sec	q ·	a a	Zone	x	Y	Well	Water	Column	(,
SJ 00050	30N	10W	02	1	3 2				520	306	214	
SJ 03460	30N	10W	02	1	3 2				520	500	20	
SJ 03230	30N	10W	03	1	2 1				120	70	5 0	
SJ 03113	30N	10W	05	4	1 4				42	30	12	
SJ 00589	30N	10W	80	1	1 1				175	150	25	
SJ 00774	30N	10W	80	1	2 1				195	160	35	
SJ 02316	30и	10W	80	1	3				210	98	112	
SJ 02102	30N	10W	80	1	3 4				· 190	90	100	
SJ 01527	30N	10W	80	2	2				120	60	60	-
SJ 01193	30N	10W	80	2	2				100	70	30	
SJ 02808	30N	10W	80	2	3 4				165'	105	60	
SJ 01102	30N	10W	80	2	4				200	159	41	
SJ 02998	30N	10W	80	3	3 1	•			260	117	143	
SJ 02772	30N	10W	80	4	2 2				200	160	40	
SJ 00523	30и	10W	80	4	4				160	120	40	
SJ 01362	30и	10W	20	1	3 3				238	190	48	
SJ 03442	30и	10W		1	4 1				200			
SJ 02782	30N	10W	20	1	4 4				250			
SJ 02797	30N	10W		2	4 1				70			
SJ 00024	30N	10W			4 2				305			
SJ 00051	30и	10W		_	4 2				305			
SJ 00197	30и	10W	23	4.	2				975	500	475	
SJ 00010	30N	10W		2					292			
SJ 01116	30N	10W			1				105	45	60	
SJ 01059	30и	10W	34	1	2 4				115	75	40	
SJ 01182	30N	10W	34	1	3 3				235	125	110	

Record Count: 26

New Mexico Office of the State Engineer POD Reports and Downloads


Township: 30N Range: 09W Sections:
NAD27 X: Y: Zone: Search Radius:
County: Basin: Number: Suffix:
Owner Name: (First) (Last) C Non-Domestic C Domestic C All
POD// Surface Data Report. Avg Depth to Water Report Water Column Report
Clear Form WATERS Menû Help


WATER COLUMN REPORT 08/21/2008

(quarters are 1=NW 2=NE 3=SW 4=SE)

	(quarter:	s are	bi:	gge	st to	smallest))		Depth	Depth	Water	(in fee	t)
POD Number	Tws	Rng	Sec	đ	g q	Zone	X	Y	Well	Water	Column		
SJ 00009	30N	09W	06	3					396	60	336		
SJ 00140	30N	09W	25	1					10				
SJ 02744	30N	09W	25	2	4 4				21	10	11		
SJ 02092	30N	09W	33	4	4 4				32	15	17		
SJ 02170	30N	09W	35	1	4 3				20	10	10		
SJ 03565	30N	09W	35	2	4 3				20				
SJ 00091	30N	09W	35	3	2 2				34				
SJ 01330	30N	09W	36	1	1 2				· 20	5	15		
SJ 02298	30N	09W	36	3					15	4	11	•	

Record Count: 9

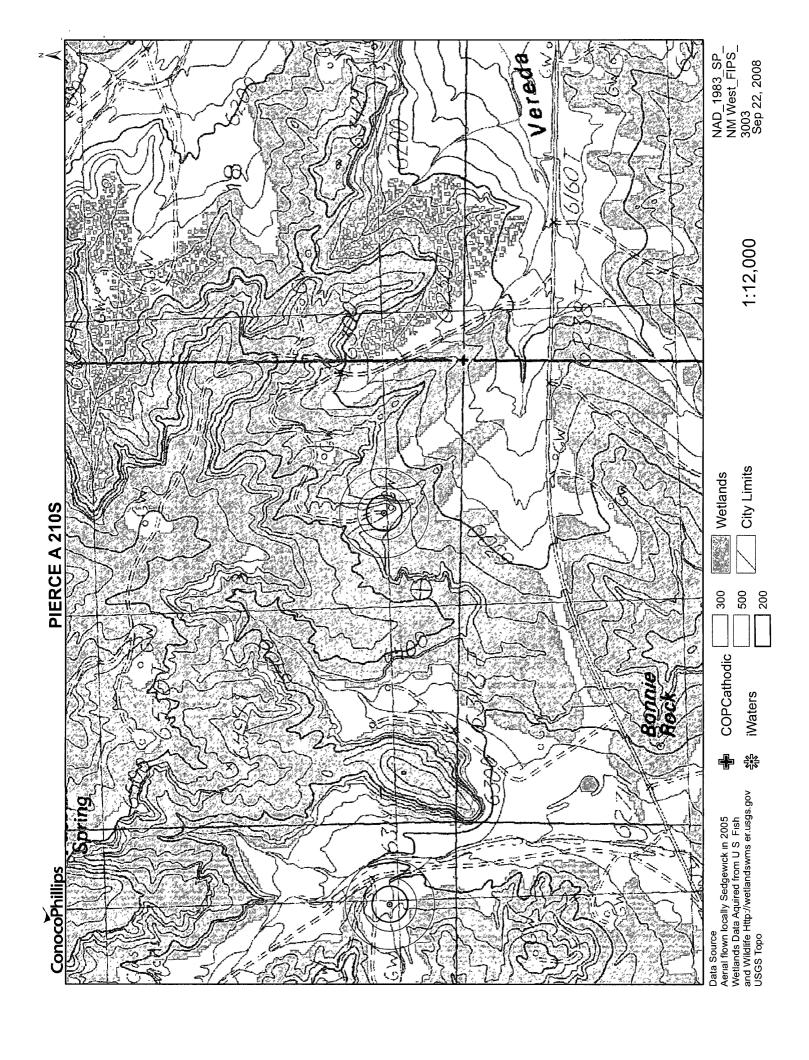

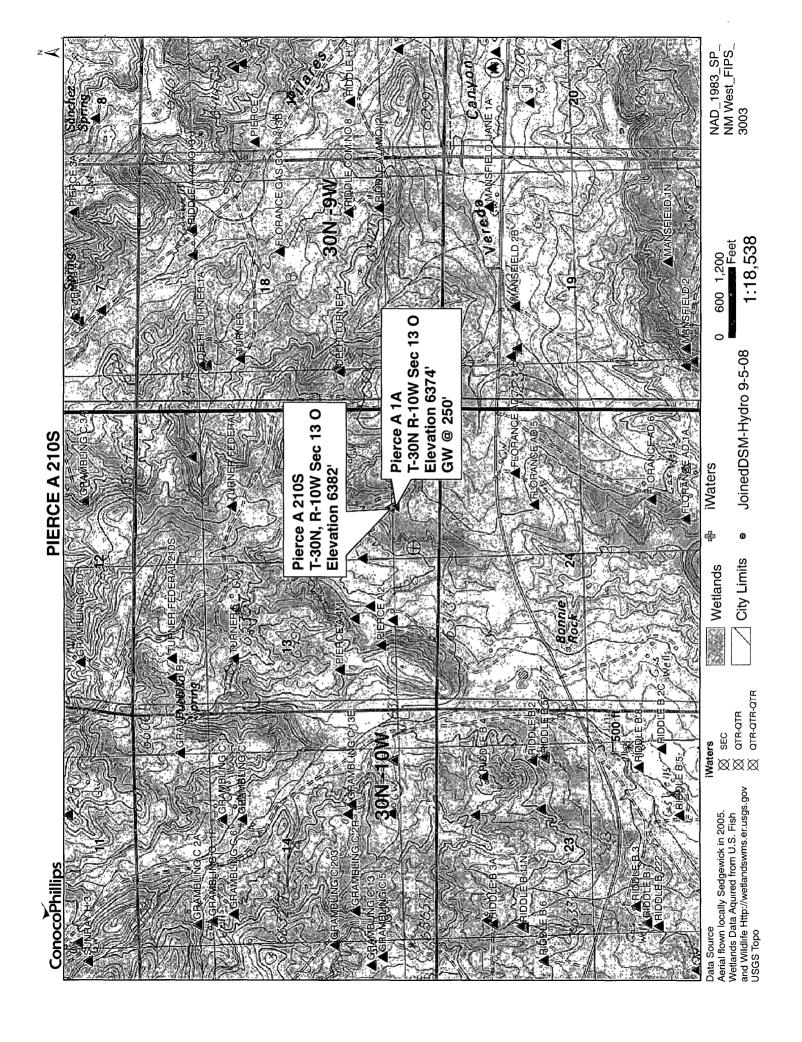

30-045-21127


DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS NORTHWESTERN NEW MEXICO (Submit 3 copies to OCD Aztec Office)

Operator	MERIDIAN OIL	Location:	Unit_SE_Sec13	3 Twp 30 Rng 10
Name of We	ell/Wells or Pipeline	Serviced PIER	CE A #1A	
				cps 1078w
Elevation_	6374'Completion Date 5/	<u>/20/77 </u> Total De	pth 500' Land	Type* N/A
Casing, Si	zes, Types & Depths	N/A		
If Casing	is cemented, show amou	ınts & types us	ed N/A	
If Cement	or Bentonite Plugs hav	ve been placed,	show depths &	amounts used
Depths & t	hickness of water zone	es with descrip	tion of water	when possible:
Fresh, Cle	ar, Salty, Sulphur, Et	ec. 250'	, , , , , , , , , , , , , , , , , , , 	
Depths gas	encountered: N/A		WAY 3 I	1991,
Type & amo	unt of coke breeze use	ed: 71 SACKS	OIST.	i. DIVoj
Depths ano	des placed: 500', 490'	, 480', 470', 445	•	
	t pipes placed: 500			
Vent pipe	perforations: 40	0'		
Remarks:	gb #1			
			······································	
	the above data is unavuding Drillers Log, Wa			

be submitted when available. Unplugged abandoned wells are to be included.


^{*}Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee. If Federal or Indian, add Lease Number.


Farm 9-3.9 (Rev. 5-63)		LIN	11.77.77	C.T. /.	TEC	SUBM	IT IN	TOUPLICA	TE*	•	Form a	ipproved.	
	DEDADI		NT O					(Sec e	di crin	` · -		Burrau No. 4	
	DEPART					ERIOF	7		e sile)	1 101-		HEN AND SE	141, NO.
		.>EOI	_OGIC	AL 50	RVET					_!_SF0781		TIEF OR TRI	. VALCE
WELL CON	APLETION	OR	RECO	MPLET	ION F	REP ₁ ORT	ΑN	D LO	3 ~	1	is, and	1156 04 1811	, AR III
1a. TYPE OF WILL	: : : : : : : : : : : : : : : : : : : :		GAS [<u>X</u> ,	пу []	Other				7 (57: 5	REEMEN	T NAME	
b. TYPE OF COMP	LETION:												
	over i	<u>" </u>	BACK	1.15	VR.	Other				S + 45/1 0		NAME	
2, NAME OF OPERATO										Pierca			
El Paso Natur	PAL GAS CO	<u>upan</u>	. <u>Y</u>							$ _{1\Lambda}$			
P. O. Box 990	o, Faraing	ton,	NM	87401							AND FOO	I, OR WILLC	,
4. LOCATION OF WILL At surface				iccordance	e with uni	y Stae requir	r e men	ts) •				Verde	
	800' S, 16									01.10	EA	-30-N, R	
At top prod. inter	rvas reposted bei	i, w								N.M.F.		50 . 1, 10	10 11
At total depth										-		1.10	
				31 61	RMIT NO.	1	DATE	ISSUED		12 CO'NE Palti E	ſ	13. STAT	
15. DATE SPUDDED 1	16. DATE TO L	CHED	17. DAT	E COMPI	(Ready to	prou.) 18	. ELE	VATIONS (D	F, PKB,	I San Ju		ELEV. CASING	MOXICO
04-27-75	05-05-75		05	-28-75				6374					
20. TOTAL DEPTH, MD &			T.D., MD &	TVD 12	HOW M.	TIPLE COMPL.	1	23. INTE		ROTALL I	OOLS	CABLE T	(H. 1.8
56931 24. PRODUCING INTURY	ALIST GE TRO	5683	TION—TOF	BOTTON	NAME (N	(D. AN . TVD)*	, -	<u> </u>	→	<u> </u>	693	5. WAS DIREC	TONAL
4952-5196' (!		. , , , , , , , , , , , , , , , , , , ,	311011 - 101	, 5011071,					,,,,		-	SURVEY M	
4932-3190 (1	·1v)							150	المناعقة				
26. TYPE ELECTRIC AN	D OTHER LOGS F	et N						70%	\$.	7 8	27. 15	AS WELL CO	RED
IEL; CDL-GR;	Temp. Sur	vey	0.10	DEC.	NT (7	4 -1 -4-1		1 191	31 ,~,	चार्याः	 		No_
CASING SIZE	WEIGHT, LB /	F. —	DEPTH SE			ort al string. LESDE	8 861 1	r ch	MTiho	RECORD	-	AMOUNT P	t TED
9 5/8"	36#		219'		13	3/4''	23	66 cu.	ft	O CON			
7''	20#		3391'		8	3/4''	37	19 Call	ft	T 3			
	İ	-										<u> </u>	
29.	<u> </u>	LINER	RECORD		<u> </u>		-	3).		TUBING RE	CORD		
SIZE	TOP (MD)	SOTTO	M (MD)	SACKS C	EMENT*	SCREEN (M	D)	SIZE		DEPTH SET	(MD)	PACKER SE	r (MD)
4 1/2"	3240'	569	931	422	2 cf			2 3/8	**	5185'			
31. PERFORATION RECO	ED (Intervel, et	and.	number)		·	32.	A.C.	TO SHOT	ERAC	TURE, CEME	Nº COI	EPPE PTC	
4952', 4991'	, 5022', 5 94', 5312'	5152	, 51/0	5', 519 3353'.	96', 5364'	DE TH IN				MOUNT AND E			
5388', 5414' 5557', 5584'	, 5432', S	5449	, 5510), 55.	3304 30',	4352-5	5190	51		000# sa:			
5557', 5584'	, 5594', 5	5010'	, 5634	' W/]	SPZ	5294-5	5634	1'	104,	000# sar	nd; 10	02,500 g	al wtr
													
33.*					PROI	OUCT: ON			<u> </u>				
DATE FIRST PRODUCTIO	OS PRODU	CTION	METHOD (lowing, g	as lift, pi	mpin,1—size	and t	ppe of pun	ip)	14.5.1	LL STATU hut-in)	s (Producing	or
DATE OF TEST	HOLRS TESTED		Clowing	PROD'	N. FOR	OIL -BBL.		GAS-MC	· F	NATERE		t-in GAS-OIL RAT	10
05-28-75	3 hours	-	3/4" Va	TES	PERIOD	12.30	6	1		39.		4.5 012 11.1	
PLOW. TUBING PERSS.	CASING PRESSUR	E CA	LCULATED -HOUR RAT	01L	BBL.	GAS-			WATER			RAVITY-API (CORR.)
SI 163	SI 1097	1 2 2				2	129	MCF/D-	AOF			42.7	
Or. Distribution of the	s (2010, usta)01	1.161, 11	entea, etc.)							TEST WIT) Hondu
35. LIST OF ATTACHM	ENTS				****					<u>ı</u> <u>u</u> .	norto	on and F	nardy
36. I hereby certify t	hat the foregoin	g and	attached in	formation	is comp	lete and corr	ect as	s determin	ed from	all available	records	l	
SIGNED .	J. SH	100	0	11	TLE	Dri lling	<u>z C1</u>	erk		ГА	TE	June	<u>12,</u> 1975

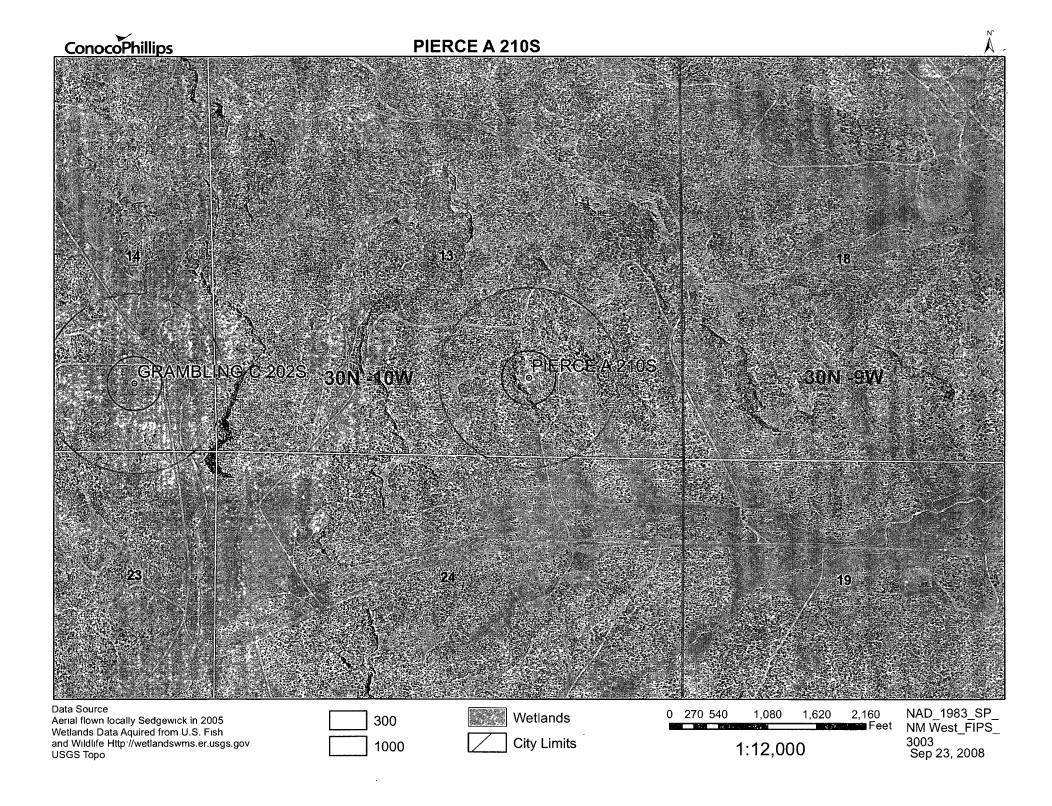


Pierce A 210S Mines, Mills and Quarries Web Map

Mines, Mills	& Quarries Commodity Groups				
Δ	Aggregate & Stone Mines				
•	Coal Mines				
*	Industrial Minerals Mines				
•	Industrial Minerals Mills				
	Metal Mines and Mill Concentrate				
1	Potash Mines & Refineries				
	Smelters & Refinery Ops.				
¥	Uranium Mines				
•	Uranium Mills				
Population					
•	Cities - major				
Transportation					
1	Railways				
	Interstate Highways				
-	Major Roads				
	· · · · · · · · · · · · · · · · · · ·				

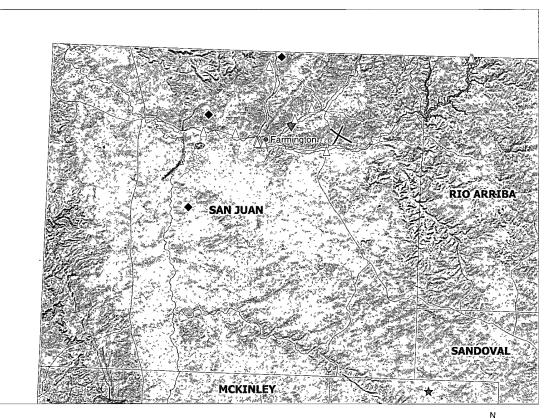





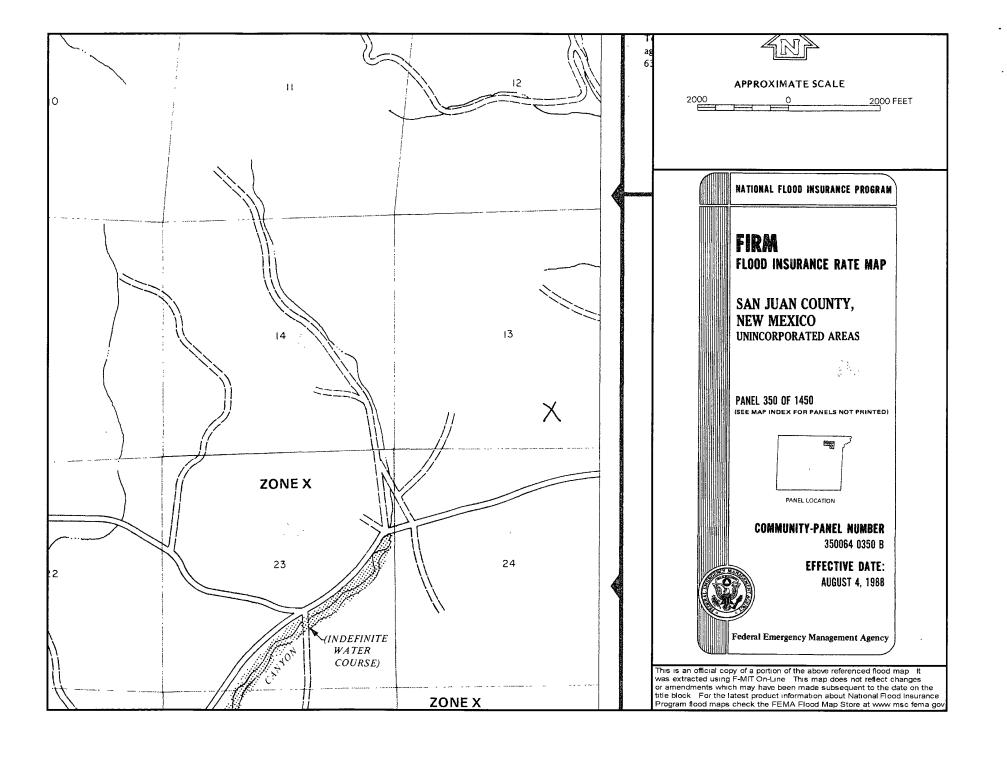

Hydrogeological report for Pierce A 210S

Regional Hydrogeological context:

The San Jose Formation of Eocene age occurs in New Mexico and Colorado, and its outcrop forms the land surface over much of the eastern half of the central basin. It overlies the Nacimiento Formation in the area generally south of the Colorado-New Mexico State line and overlies the Animas Formation in the area generally north of the State line.

The San Jose Formation was deposited in various fluvial-type environments. In general, the unit consists of an interbedded sequence of sandstone, siltstone, and variegated shale. Thickness of the San Jose Formation generally increases from west to east (200 feet in the west and south to almost 2,700 feet in the center of the structural basin). Ground water is associated with alluvial and fluvial sandstone aquifers. Thus, the occurrence of ground water is mainly controlled by the distribution of sandstone in the formation. The distribution of such sandstone is the result of original depositional extent plus any post-depositional modifications, namely erosion and structural deformation. Transmissivity data for San Jose Formation are minimal. Values of 40 and 120 feet squared per day were determined from two aquifer tests (Stone et al, 1983, table 5). The reported or measured discharge from 46 water wells completed in San Jose Formation ranges from 0.15 to 61 gallons per minute and the median is 5 gallons per minute. Most of the wells provide water for livestock and domestic use.

The San Jose Formation is a very suitable unit for recharge from precipitation because soils that form on the unit are sandy and highly permeable and therefore readily adsorb precipitation. However, low annual precipitation, relatively high transpiration and evaporation rates, and deep dissection of the San Jose Formation by the San Juan River and its tributaries all tend to reduce the effective recharge to the unit.

Stone et al., 1983, Hydrogeology and Water Resources of the San Juan Basin, New Mexico: Socorro, New Mexico Bureau of Mines and Mineral Resources Hydrologic Report 6, 70 p.

Siting Criteria Compliance Demonstration & Hydro Geologic Analysis

The Pierce A 210S is not located in an unstable area. The location is not over a mine and is not on the side of a hill as indicated on the Mines, Mills and Quarries Map and Topographic Map. The location of the excavated pit material will not be located within 300' of any continuously flowing watercourse or 200' from any other watercourse as indicated on the Topographic Map. The location is not within a 100-year floodplain area as indicated on the FEMA Map. The groundwater depth is considered to be greater than 100' as determined by the topographic map and the Cathodic well data from the Pierce A #1A with an elevation of 6374' and groundwater depth of 250'. The subject well has an elevation of 6382' which is slightly less than the Pierce A #1A, therefore the groundwater depth is greater than 100'. There are no iWATERS data points located in the area as indicated on the TOPO Map. The Cathodic data provides the indication that groundwater depth is greater than 100'. The hydro geologic analysis indicates the groundwater depth and the San Jose formation will create a stable area for this new location.

Tafoya, Crystal

From:

Tafoya, Crystal

Sent:

Thursday, July 10, 2008 8:16 AM

To: Subject:

'mark_kelly@nm.blm.gov' OCD Pit Closure Notification

The following temporary pits will be closed on-site. The new OCD Pit Rule 17 requires the surface owner be notified. Please feel free to contact me at any time if you have any questions. Thank you!

Allison Unit 2B

Allison Unit 40N

Angel Peak B 27E

Ballard 11F

Cain 725S

Canyon Largo Unit 250N

Canyon Largo Unit 279E

Canyon Largo Unit 288E

Canyon largo Unit 297E

Canyon Largo Unit 465E

Carson SRC 4E

Day B 4P

Day B 5A

East 17S

EPNG A 1B

EPNG B 1M

Federal A 1E

Filan 5M

Filan 5N

Fogelson 4 100

Fogelson 4 100S

Grambling C 202S

Hagood 19

Hamner 9S

Hardie 4P

Hare 295

Heaton Com 100

Helms Federal 1G

Howell 12

Huerfanito Unit 103F

Huerfanito Unit 29S

Huerfanito Unit 39S

Huerfanito Unit 47S

Huerfanito Unit 50E

Huerfanito Unit 75E

Huerfanito Unit 83E

Huerfanito Unit 87E

Huerfanito Unit 90E

Huerfanito Unit 90M

Huerfanito Unit 98S Huerfano Unit 108F

Huerfano Unit 282E

Huerfano unit 305

Huerfano unit 307

Huerfano Unit 554

Johnston Federal 24S

King 3

Lackey A Com 100S

Lambe 1C

Lambe 7S

Lively 8M

Lloyd A 100

Lloyd A 100S Martin 100

McCord B 1F

McDurmitt Com 100S

McManus 13R

Mitchell 1S

Morris A 14

Newberry B 1N

Newsom B 503

Newsom B 8N

Pierce A 210S

Roelofs 1N

San Juan 27-4 Unit 132G

San Juan 27-4 Unit 132M

San Juan 27-4 Unit 139N

San Juan 27-4 Unit 140B

San Juan 27-4 Unit 141M

San Juan 27-4 Unit 147Y

San Juan 27-4 Unit 153B

San Juan 27-4 Unit 22M

San Juan 27-4 Unit 38P

San Juan 27-4 Unit 41N

San Juan 27-4 Unit 42N

San Juan 27-4 Unit 569N

San Juan 27-4 Unit 59N

San Juan 27-4 Unit 60M

San Juan 27-5 Unit 113F

San Juan 27-5 Unit 59N

San Juan 27-5 Unit 84N

San Juan 27-5 unit 901

San Juan 27-5 Unit 902

San Juan 27-5 Unit 903

San Juan 27-5 Unit 904

San Juan 27-5 Unit 905

San Juan 27-5 Unit 906

San Juan 27-5 Unit 907

San Juan 27-5 Unit 908

San Juan 27-5 Unit 909

San Juan 27-5 Unit 910

San Juan 27-5 Unit 912

San Juan 27-5 Unit 913 San Juan 27-5 Unit 914

San Juan 27-5 Unit 915

San Juan 27-5 Unit POW 916

San Juan 28-4 Unit 27M

San Juan 28-5 Unit 54F

San Juan 28-5 Unit 62E

San Juan 28-5 Unit 63M

San Juan 28-5 Unit 76N San Juan 28-5 Unit 77N

San Juan 28-6 Unit 113N

R. G.J. D

FEB 0 5 2008

DISTRICT 1 1625 N. French Dr., Hobbs, N.M. 68240

State of New Mexico

Energy, Minerals & Natural Resources Department of Land ManageRevised October 12, 2005

DISTRICT I] 1301 W. Grand Avenue, Artesia, N.M. 88210

Farming Submit to Appropriate District Office State Lease - 4 Copies Fee Lease - 3 Copies

DISTRICT III 1000 Rio Brazos Rd., Aztec, N.M. 87410

OIL CONSERVATION DIVISION 1220 South St. Francis Dr. . Santa Fe. NM 87505

☐ AMENDED REPORT

DISTRICT IV. 1220 S. St. Francis Dr., Santa Fe, NM 87506

WELL LOCATION AND ACREAGE DEDICATION PLAT


1 API Number 30-045- 34591	² Paol Code 71629	*Pool Name BASIN FRUITLAND COAL		
Property Code 7389		Property Name PIERCE A		
70GRID No. 14538		Operator Nature CES OIL AND GAS COMPANY LP	Elevation 6382	

10 Surface Location North/South line UL or lot ao. Section Tównship Range Lot Idn Feet from the Feet from the Rast/West line County 30N 10W 15 838' SOUTH 1714 **EAST** SAN JUAN 0 13

"Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the.	North/South line	Feet from the	East/West line	County
0							. ,		,
12 Dedicated Acres	9		13 Joint or	infili	"Consolidation C	ode	"Order No.		
314.2)	cres -	(S/2)							

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED

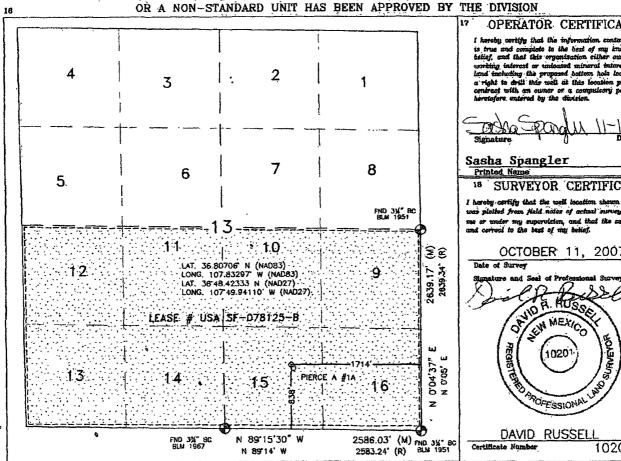

OPERATOR CERTIFICATION


I hereby certify that the information contenues agrees is true and complete to the best of my knowledge and billef, and that this organization either awas a working interest or unlocated universal interest in the land imbuling the proposed bottom hole location or ha a right to drill this well at this location persuant to

Sasha Spangler

SURVEYOR CERTIFICATION

I heroby certify that the well location shown on this plat was platted from Held notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

OCTOBER 11, 2007



DAVID RUSSELI

10201

Burlington Resources Oil & Gas Company, LP San Juan Basin Closure Plan

In accordance with Rule 19.15.17.12 NMAC the following information describes the closure requirements of temporary pits on Burlington Resources Oil & Gas Company, LP (BR) locations. This is BR's standard procedure for all temporary pits. A separate plan will be submitted for any temporary pit which does not conform to this plan.

All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of pit closure. Closure report will be filed on C-144 and incorporate the following:

- Details on Capping and Covering, where applicable.
- Plot Plan (Pit Diagram)
- Inspection Reports
- Sampling Results
- C-105
- · Copy of Deed Notice will be filed with County Clerk

General Plan:

- 1. All free standing liquids will be removed at the start of the pit closure process from the pit and disposed of in a division—approved facility or recycle, reuse or reclaim the liquids in a manner that the appropriate division district office approves. The facilities to be used will be Basin Disposal (Permit #NM-01-005) and Envirotech Land Farm (Permit #NM-01-011).
- 2. The preferred method of closure for all temporary pits will be on-site burial, assuming that all the criteria listed in sub-section (B) of 19.15.17.13 are met.
- 3. The surface owner shall be notified of BR's closing of the temporary pit prior to closure as per the approved closure plan via certified mail, return receipt requested.
- 4. Within 6 months of the Rig Off status occurring BR will ensure that temporary pits are closed, re-contoured, and reseeded.
- 5. Notice of Closure will be given prior to closure to the Aztec Division office between 72 hours and one week via email, or verbally. The notification of closure will include the following:
 - i. Operator's name
 - Location by Unit Letter, Section, Township, and Range. Well name and API number.
- 6. Liner of temporary pit shall be removed above "mud level" after stabilization. Removal of liner will consist of manually or mechanically cutting liner at mud level and removing all remaining liner. Care will be taken to remove "All" of the liner i.e., edges of liner entrenched or buried. All excessive liner will be disposed of at the San Juan County Landfill located on CR 3100.
- 7. Pit contents shall be mixed with non-waste containing, earthen material in order to achieve the solidification process. The solidification process will be accomplished using a combination of natural drying and mechanically mixing. Pit contents will be mixed with non-waste, earthen material to a consistency that is deemed a safe and stable. The mixing ratio shall not exceed 3 parts clean soil to 1 part pit contents.
- 8. A five point composite sample will be taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.13(B)(1)(b). In the event that the criteria are not met, all contents will be handled per Subparagraph (a) of Paragraph (1) of Subsection B of 19.15.17.13 i.e., Dig and haul.

Components	Tests Method	Limit (mg/Kg)
Benzene	EPA SW-846 8021B or 8260B	0.2
BTEX	EPA SW-846 8021B or 8260B	50
TPH	EPA SW-846 418.1	2500
GRO/DRO	EPA SW-846 8015M	500
Chlorides	EPA 300.1	1000/500

- 9. Upon completion of solidification and testing standards being passed, the pit area will be backfilled with compacted, non-waste containing, earthen material. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater. If standard testing fails BR will dig and haul all contents pursuant to 19.15.17.13.i.a. After doing such, confirmation sampling will be conducted to ensure a release has not occurred.
- 10. During the stabilization process if the liner is ripped by equipment the Aztec OCD office will be notified within 48 hours and the liner will be repaired if possible. If the liner can not be repaired then all contents will be excavated and removed.
- 11. Dig and Haul Material will be transported to the Envirotech Land Farm located 16 miles south of Bloomfield on Angel Peak Road, CR 7175. Permit # NM010011
- 12. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Reshaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.
- 13. Notification will be sent to OCD when the reclaimed area is seeded.
- 14. BR shall seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM or Forest Service stipulated seed mixes will used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (unimpacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

Type .	Variety or Cultivator	PLS/A
Western wheatgrass	Arriba	3.0
Indian ricegrass	Paloma or Rimrock	3.0
Slender wheatgrass	San Luis	2.0
Crested wheatgrass	Hy-crest	3.0
Bottlebrush Squirreltail	Unknown	2.0
Four-wing Saltbrush	Delar	.25

Species shall be planted in pounds of pure live seed per acre: Present Pure Live Seed (PLS) = Purity X Germination/100 Two lots of seed can be compared on the basis of PLS as follows:

Source No. One (poor quality)
Purity
50 percent
Germination
Percent PLS
20 percent

We basis of PLS as follows.
Source No. two (better quality)
Purity
80 percent
Germination
63 percent
Percent PLS
50 percent

5 lb. bulk seed required to make 2 lb. bulk seed required to make

1 lb. PLS 1 lb. PLS

15. The temporary pit will be located with a steel marker, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial upon the abandonment of all the wells on the pad. The marker will be flush with the ground to allow access of the active well pad and for safety concerns. The marker will include a threaded collar to be used for future abandonment. The top of the marker will contain a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the operator's information at the time of all wells on the pad are abandoned. The operator's information will include the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.