District I

1625 N French Dr., Hobbs, NM 88240

District II

1301 W Grand Ave , Artesia, NM 88210

District III 1000 Rio Brazos Rd , Aztec, NM 87410

District IV

1220 S St Francis Dr , Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

July 21, 2008 For temporary pits, closed-loop sytems, and below-grade tanks, submit to the appropriate NMOCD District Office

Form C-144

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Pit, Closed-Loop System, Below-Grade Tank, or

Proposed Alternative Method Permit or Closure Plan Application
Type of action: Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method Modification to an existing permit X Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method
Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water of the environment. Not does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.
Operator: Burlington Resources Oil & Gas Company, LP OGRID#: 14538 Address: PO Box 4289, Farmington, NM 87499
Facility or well name: Canyon Largo Unit 250N
API Number: 30-039-30398 OCD Permit Number:
U/L or Qtr/Qtr: G(SWNE) Section: 1 Township: 25N Range: 6W County: Rio Arriba Center of Proposed Design: Latitude: 36.431166' N Longitude: 107.416505' W NAD: 1927 X 1983 Surface Owner: X Federal State Private Tribal Trust or Indian Allotment
X Pit: Subsection F or G of 19.15.17.11 NMAC Temporary. X Drilling Workover Permanent Emergency Cavitation P&A X Lined Unlined Liner type Thickness 20 mil X LLDPE HDPE PVC Other X String-Reinforced Liner Seams X Welded X Factory Other Volume. 4400 bbl Dimensions L 65' x W 45' x D 10'
Closed-loop System: Subsection H of 19.15 17.11 NMAC Type of Operation
Below-grade tank: Subsection I of 19.15.17.11 NMAC Volume: bbl Type of fluid: Tank Construction material: Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off Visible sidewalls and liner Visible sidewalls only Other Liner Type Thickness mil HDPE PVC Other
5 Alternative Method:

Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

6 Fencing: Subsection D of 19.15 17.11 NMAC (Applies to permanent ptt, temporary ptts, and below-grade tanks)		į
Chan last, our fact in books two strends of borked wire at too (Resulted of the stad within 1000 feet of a permanent revidence velocal hypoted in the	utution or chur	~ h)
Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, inst Four foot height, four strands of barbed wire evenly spaced between one and four feet	maton or char	(n)
X Alternate. Please specify 4' hogwire fence with a single strand of barbed wire on top.		
7		
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)		
Screen Netting Other		
Monthly inspections (If netting or screening is not physically feasible)		
8 Signs: Subsection C of 19.15.17.11 NMAC		į
12" X 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers		
X Signed in compliance with 19 15.3.103 NMAC		
9	<u> </u>	
Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required Please refer to 19 15.17 NMAC for guidance.		
Please check a box if one or more of the following is requested, if not leave blank:		
		ĺ
Administrative approval(s) Requests must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for cons	ideration of ap	proval
Exception(s). Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval		
Siting Criteria (regarding permitting): 19.15.17.10 NMAC		
Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable		
source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for		
consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria		
does not apply to drying pads or above grade-tanks associated with a closed-loop system.		_
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes	∐No
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa	Yes	No
lake (measured from the ordinary high-water mark).		_
- Topographic map; Visual inspection (certification) of the proposed site		_
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes	∐No
(Applies to temporary, emergency, or cavitation pits and helow-grade tanks)	NA	
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image		
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes	No
(Applied to permanent pits) Visual improvious (contification) of the proposed situated arised photos. Satellite arrange	∐NA	
 Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering 	∏Yes	
purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.		
- NM Office of the State Engineer - 1WATERS database search; Visual inspection (certification) of the proposed site.		į
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended	Yes	No
- Written confirmation or verification from the municipality; Written approval obtained from the municipality		_
Within 500 feet of a wetland US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	Yes	∐No
Within the area overlying a subsurface mine. Written confirmation or verification or man from the NM EMNED. Musing and Mineral Division.	Yes	□No
- Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division Within an unstable area.	Yes	□No
- Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological	🗆 🐃	ш.,,
Society; Topographic map		
Within a 100-year floodplain - FEMA map	Yes	□No

Form C-144 Oil Conservation Division Page 2 of 5

Temporary Pits, Emergency Pits and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19 15.17 9 NMAC
Instructions Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached
Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17 9 NMAC
Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19 15.17 9
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15 17 10 NMAC
Design Plan - based upon the appropriate requirements of 19.15 17.11 NMAC
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API or Permit
12
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17 9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19 15.17.9
Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15 17 10 NMAC
Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17 12 NMAC
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15 17 9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API
Previously Approved Operating and Maintenance Plan API
D APAR CALL COLUMN COLU
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
Hydrogeologic Report - based upon the requirements of Paragraph (I) of Subsection B of 19 15.17.9 NMAC
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15 17 10 NMAC
Climatological Factors Assessment
Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC
Dike Protection and Structural Integrity Design based upon the appropriate requirements of 19.15.17.11 NMAC
Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC
Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15 17.11 NMAC
Quality Control/Quality Assurance Construction and Installation Plan
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15 17.11 NMAC
Nussance or Hazardous Odors, including H2S, Prevention Plan
Emergency Response Plan
Oil Field Waste Stream Characterization
Monitoring and Inspection Plan
Erosion Control Plan
Closure Plan - based upon the appropriate requirements of Subsection C of 19.15 17.9 NMAC and 19 15.17.13 NMAC
14 Proposed Closure: 19.15 17.13 NMAC
Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.
Type: X Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System
Alternative
Proposed Closure Method. Waste Excavation and Removal
Waste Removal (Closed-loop systems only)
X On-site Closure Method (only for temporary pits and closed-loop systems)
X In-place Burial On-site Trench
Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
Waste Everystian and Removal Closure Plan Checklist: (10.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan
Waste Excavation and Removal Closure Plan Checklist: (19 15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.
Protocols and Procedures - based upon the appropriate requirements of 19 15.17.13 NMAC
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15 17.13 NMAC
Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)
Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC
Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15 17.13 NMAC
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19 15.17.13 NMAC

Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bir Instructions Please identify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings.	ns Only: (19.15 17.13.D NMAC) Use attachment if more than two facilities					
are required.						
Disposal Facility Name: Disposal Facility Peri						
Disposal Facility Name Disposal Facility Permit #:						
Will any of the proposed closed-loop system operations and associated activities occur on or in areas Yes (If yes, please provide the information No	that will not be used for future service and operations?					
Required for impacted areas which will not be used for future service and operations: Soil Backfill and Cover Design Specification - based upon the appropriate requirements of Subsection H of 19.15.17 13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15 17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19 15.17 13 NMAC						
17						
Siting Criteria (Regarding on-site closure methods only: 19.15.17 10 NMAC Instructions Each siting criteria requires a demonstration of compliance in the closure plan Recommendations of accept certain siting criteria may require administrative approval from the appropriate district office or may be considered an exfor consideration of approval Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17.	ception which must be submitted to the Santa Fe Environmental Bureau offi	ce				
Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS. Data obtained from nearby wells	Yes X No N/A					
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search, USGS; Data obtained from nearby wells	Yes X No	1				
Ground water is more than 100 feet below the bottom of the buried waste.	X Yes No					
- NM Office of the State Engineer - iWATERS database search, USGS; Data obtained from nearby wells	N/A					
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakeb (measured from the ordinary high-water mark). - Topographic map: Visual inspection (certification) of the proposed site	bed, sinkhole, or playa lake Yes X No					
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of it	nitial application Yes X No					
- Visual inspection (certification) of the proposed site, Aerial photo; satellite image	Yes X No					
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for purposes, or within 1000 horizontal fee of any other fresh water well or spring, in existence at the time of the in - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed si Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a	utial application.					
pursuant to NMSA 1978, Section 3-27-3, as amended - Written confirmation or verification from the municipality; Written approval obtained from the municipal	lity					
Within 500 feet of a wetland - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the	he proposed site					
Within the area overlying a subsurface mine. - Written confirantion or verification or map from the NM EMNRD-Mining and Mineral Division	Yes X No	ŀ				
Within an unstable area.	Yes XNo					
 Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources; USGS; Topographic map 						
Within a 100-year floodplain - FEMA map	Yes X No					
On-Site Closure Plan Checklist: (19.15 17 13 NMAC) Instructions: Each of the following items by a check mark in the box, that the documents are attached.	must bee attached to the closure plan. Please indicate,					
X Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15	5 17.10 NMAC					
Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 1	9 15 17.13 NMAC					
Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requiren	nents of 19.15.17 11 NMAC					
Construction/Design Plan of Temporary Pit (for in place burial of a drying pad) - based upon the Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC	he appropriate requirements of 19 15 17.11 NMAC					
X Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subst	ection F of 19.15.17 13 NMAC					
Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19						
X Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in o						
Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15 17 13 1						
Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15 17 13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC						

19 Operator Applica	ation Certification:		
I hereby certify that	the information submitted with this application is true, acc	urate and complete to the	best of my knowledge and belief
Name (Print):	Crystal Tafoya	Title:	Regulatory Technician
Signature:	Constal Taloya	Date	10 16 08
e-mail address	crystal.tafova@conocophillips.dom	Telephone:	505-326-9837
20 OCD Approval:	Permit Application (including closure plan)	Closure Plan (only)	OCD Conditions (see attachment)
		•	
OCD Representa	VIC D-W		Approval Date: 10-29-08
Title:	Enviro/spec	OCD Per	nit Number:
Closure Report (required within 60 days of closure completion): Sut		c
Instructions: Operat	tors are required to obtain an approved closure plan prior	to implementing any clos	ure activities and submitting the closure report. The closure
	o be submitted to the division within 60 days of the complet an has been obtained and the closure activities have been		es. Please do not complete this section of the form until an
аррголеа стояте ра	un nus veen voiumen and me closure activities have veen	·	re Completion Date:
		Closur	e Completion Date:
22 Cl. Made al.			
Closure Method:	vation and Removal On-site Closure Method	Alternative Closure	: Method Waste Removal (Closed-loop systems only)
	From approved plan, please explain.	Alternative Closure	waste Kemovai (Closed-100p systems only)
	Tom approved plan, please explain.		
23 Closure Report Res	garding Waste Removal Closure For Closed-loop Syster	ne That Utiliza Abaya C	round Stool Tonks or Houl off Pins Only
			ings were disposed. Use attachment if more than two facilities
were utilized.			
Disposal Facility		-	y Permit Number:
Disposal Facility		· -	y Permit Number:
	loop system operations and associated activities performed please demonstrate compliane to the items below)	on or in areas that will n	of be used for future service and opeartions?
	•		
	pacted areas which will not be used for future service and a ation (Photo Documentation)	pperanons [,]	
=	ling and Cover Installation		
Re-vegetatio	on Application Rates and Seeding Technique		
24			
Closure Repor		llowing items must be att	ached to the closure report. Please indicate, by a check mark in
	documents are attached.		
<u></u>	osure Notice (surface owner and division)		
=	eed Notice (required for on-site closure) or on-site closures and temporary pits)		
	* • •		
=	on Sampling Analytical Results (if applicable)		
=	erial Sampling Analytical Results (if applicable)		
= '	acility Name and Permit Number Hing and Cover Installation		
=	on Application Rates and Seeding Technique		
= ·			
	nation (Photo Documentation) sure Location: Latitude:	Longituda	NAD 🗍 1927 🦷 1983
On-site Clo	Danie Location. Lantique.	Longitude	
25			
Operator Closure	e Certification:		
I hereby certify that	the information and attachments submitted with this closur		and complete to the best of my knowledge and belief I also certify that
the closure complies	with all applicable closure requirements and conditions s	pecified in the approved	closure plan.
Name (Print)		Title:	
Signature:		Date:	
e-mail address.		Telephone.	

New Mexico Office of the State Engineer POD Reports and Downloads

Township: 26N Range: 06W Sections:	
NAD27 X: Zone: Search Radius:	
County: Basin: Number: Suffix:	
Owner Name: (First) (Last) C Non-Domestic O Domestic O A	11
POD / Surface Data Report Avg Depth to Water Report Water Column Report	
Clear Form iWATERS Menu Help	
WATER COLUMN REPORT 08/20/2008	
(quarters are 1=NW 2=NE 3=SW 4=SE) (quarters are biggest to smallest) POD Number Tws Rng Sec g g g Zone X V Well Water Column	in

No Records found, try again

New Mexico Office of the State Engineer POD Reports and Downloads

Township: 26N Ran	ge: 05W Sections:	
NAD27 X: Y	Zone: Se	earch Radius:
County: Basin:	Number Number	Suffix:
Owner Name: (First)	(Last) C No	on-Domestic C Domestic © All
POD / Surface Data Report	Avg Depth to Water Report	Water Column Report
Clea	r Form (iWATERS Menu) He	<u> </u>
	WATER COLUMN REPORT 08/20/	/2008
(quarters are 1=	NW 2=NE 3=SW 4=SE)	
(quarters are bi	ggest to smallest)	Depth Depth Water (in

Zone

No Records found, try again

Tws Rng Sec q q q

80

435

New Mexico Office of the State Engineer POD Reports and Downloads

Township: 25N Range: 06W Sections:				-		
NAD27 X: Y: Zone:	2.20	Searc	ch Radius			
County: Basin:	Num	ber:	,	Suffix:		,
Owner Name: (First) (Last)	· (Non-D	Oomestic	← Dom	estic 6	All
POD // Surface Data Report Avg Depth to Water	Report		Wate	r Column	Report	73 (
Clear Form WATERS Me	nu	Help				overmed.
WATER COLUMN REPORT	RT 08/	20/20	08			
(quarters are biggest to smallest)			Depth	Depth	Water	(in
POD Number Tws Rng Sec q q q Zone X		¥	Well	Water	Column	
SJ 00201 25N 06W 03 4 1			1346	500	846	

Record Count: 3

25N

25N

06W 21

06W 33

4 1 4

4 4 4


SJ 00681


SJ 00681 12

New Mexico Office of the State Engineer POD Reports and Downloads

1 OD Reports and Downloads
Township: 25N Range: 05W Sections:
NAD27 X: Zone: Search Radius:
County: Basin: Number: Suffix:
Owner Name: (First) (Last) C Non-Domestic C Domestic All
POD Surface Data Réport Avg Depth to Water Report Water Column Réport
Clear Form iWATERS Menu : Help
WATER COLUMN REPORT 08/20/2008
(quarters are 1=NW 2=NE 3=SW 4=SE) (quarters are biggest to smallest) POD Number Tws Rng Sec q q q Zone X Y Well Water Column

No Records found, try again

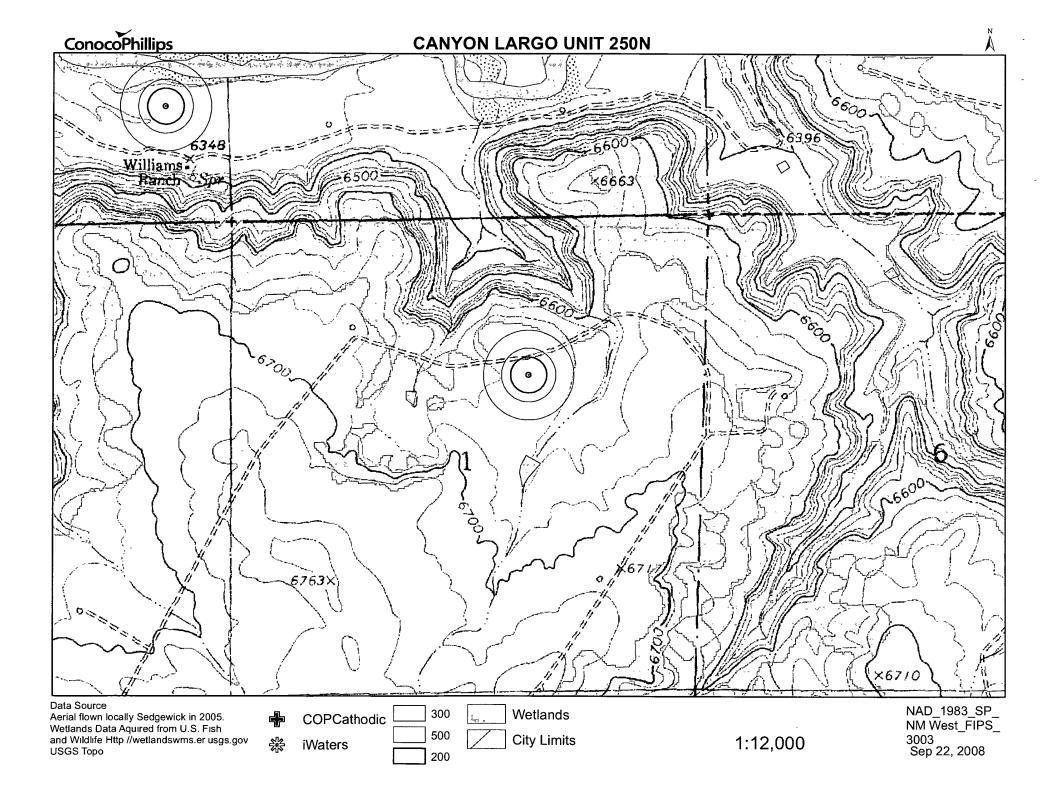

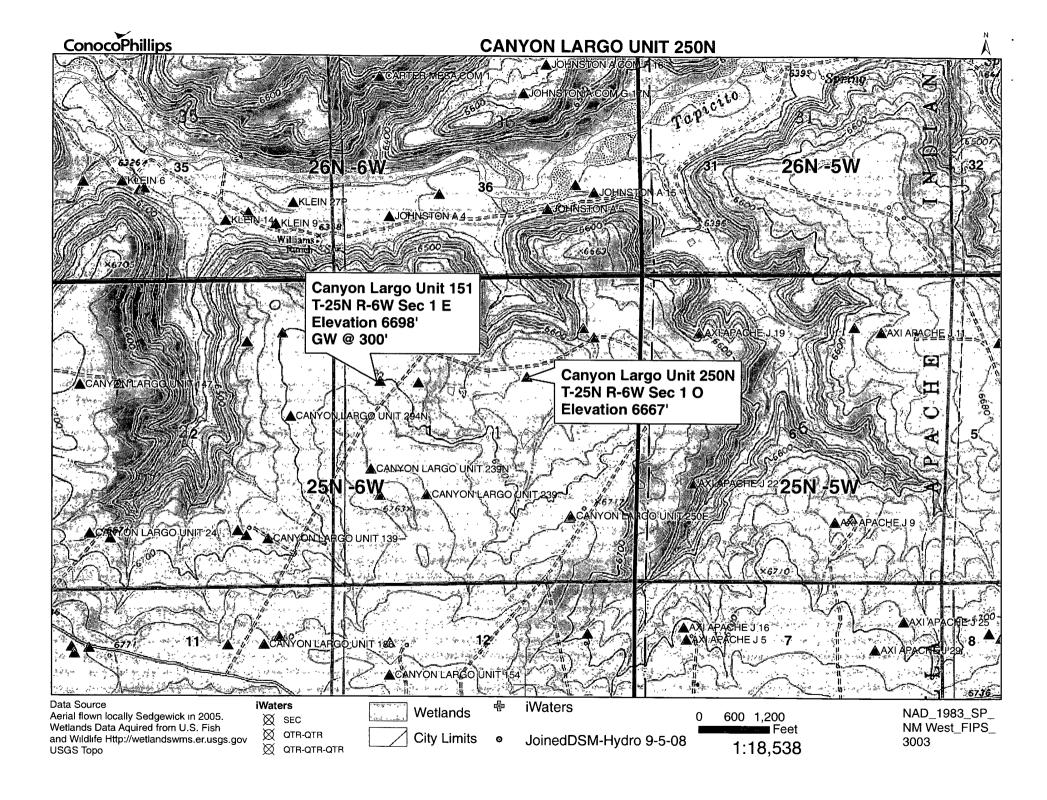

61= 30-039-06189

#151= 30-039-20271

DATA SHEET FOR DEEP GROUND BED CATHODIC. PROTECTION WELLS NORTHWESTERN NEW MEXICO

perator Metidian Vil INC. Location: Unit F Sec. 01 Two 25 Rag 06
Name of Well/Wells.or Pipeline Serviced
CANYON LAYOR UNIT #239E, #67 AND #151
Elevation Completion Date 2/14/96 Total Depth 485 Land Type F
Casing Strings, Sizes, Types & Depths 2/13 Set. 99 of 8 Puc Casing.
NO GAS, WATER OF Boulders Were ENCOUNTERED DURING CASING.
If Casing Strings are cemented, show amounts & types used <u>CemenTed</u> WITH 2H SACKS.
If Cement or Bentonite Plugs have been placed, show depths & amounts used None
Depths & thickness of water zones with description of water: Fresh, Clear, Salty, Sulphur, Etc. HIT Fresh WATER AT 300.
Depths gas encountered: Nowe
Ground bed depth with type 6 amount of coke breeze used: 485' DepTH. USED 128 SACKS of Asbury 218R (6400**)
Depths anodes placed: 390,335,292 284,276,264,256 248,240,232,234 198,190,182, + 140
Depths vent pipes placed: Surface To 485.
Vent pipe perforations: Bottom 370.
Remarks: FEB 1 9 1997
DIST. 3 DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

Land Type may be shown: F-Federal: I-Indian: S-State: P-Fee. If Federal or Indian, add Lease Number.

	,			/
	NO. OF COPIES RECEIVED	1		·
	DISTRIBUTION	NEW MEXICO OIL O	CONSERVATION COMMISSION	Form C-104
	SANTA FE /	1	FOR ALLOWABLE	Supersedes Old C-104 and C-11
	FILE / _		AND	Effective 1-1-65
	U.S.G.S.	AUTHORIZATION TO TRA	ANSPORT OIL AND NATURAL	GAS
	LAND OFFICE	<u> </u>		•
	IRANSPORTER GAS /			
	OPERATOR 2			COLINE
ı.	PRORATION OFFICE			ZILTIVED\
	Operator El Paso Natural Gas	Company		/ // // // // // // // // // // // // /
	Address			NOV 1 9 1969
	Reason(s) for filing (Check proper box	, New Mexico - 87401	Total (D)	OIL CON COM
	New We!!	Change in Transporter of:	Other (Please explain,	DIST 3
	Recompletion	Oil Dry Go	rs [200.0
	Change in Ownership	Casinghead Gas Conde		
	If change of ownership give name and address of previous owner			
u.	DESCRIPTION OF WELL AND	LEASE		· ·
	Lease Name	Well No. Fool Name, Including F	1	
	Canyon Largo Unit	151 Otero Chac	TB. State, Foder	gl or Fee SF 078885
	Unit Letter E ; 1750	Feet From The North	ne and 600 Feet From	The West
	Line of Section 1 To	wnship 25N Range (W , NMPM, Ric	Arriba County
п.	DESIGNATION OF TRANSPOR	TER OF OIL AND NATURAL GA	ıs	
	Name of Authorized Transporter of Oli El Paso Natural Gas	or Condensate 🛣	Box 990, Farmington,	
	Name of Authorized Transporter of Ca El Paso Natural Gas	singhead Gas or Dry Gas X	Address (Give address to which appro	oved copy of this form is to be sent)
	If well produces oil or liquids,	Unit Sec Twp. Ege.	Box 990, Farmington, Is gas actually connected?	New Mexico - 87401
	give location of tanks.	E 1 25N 6W		
		th that from any other lease or pool,	give commingling order number	
٧.	Designation DATA	Cil Well Gas Well	New Well Workover Deepen	Plug Back Same Res'v. Diff. Res'v.
	Designate Type of Completion	Date Compl. Ready to Prod.	X X -XXX-	P.B.T.D.
	9-24-69	11-3-69		3690*
	Elevations (DF, RKB, RT, GR, etc.)	Name of Producing Formation	3900 Top YGUN /Gas Pay	Tubing Depth
	6698' GL	Chacra	3736	Tubingless Completion
	Perforations			Depth Casing Shoe
	3736-50', 3834-42'			3900'
			D CEMENTING RECORD	SAGVE SEVENE
	HOLE SIZE	8 5/8"	-129 / 59'	85 Sks.
	6 3/4"	2 7/8"	3900'	265 Sks.
			3742	20) dana
٧.	TEST DATA AND REQUEST F	OR ALLOWABLE (Test must be d		l and must be equal to or exceed top allow-
	OIL WELL Date First New Oil Run To Tanks	able for this d	epth or be for full 24 hours) Producing Method (Flow, pump, gas l	ift, etc.)
	Length of Test	Tubing Pressure	Casing Pressure	Choke Size
	Length of rest	raping riessare	Out.ing 1 143545	
	Actual Prod. During Test	Oil-Bbls.	Water - Bbls.	Gas - MCF
			<u></u>	
	GAS WELL	1	Table Co. Lead Co. Co.	To " 10 i
	Actual Prod. Test-MCF/D	Length of Test 3 Hrs.	Bbls. Condensate/MMCF	Gravity of Condensate
	Testing Method (pstot, back pr.)	Tubing Pressure (Shut-in)	Casing Pressure (Shut-in)	Choke Size
	Calculated A.O.F.		924	3/4"
VI.	CERTIFICATE OF COMPLIAN	CE	OIL CONSERV	NOISSIMMOD NOITA
	I hereby certify that the rules and	regulations of the Oil Conservation	APPROVED Ling in the Driver by	
	commission have been complied above is true and complete to the	with and that the information given e best of my knowledge and belief.	BA CUMPTAN OF THE LAW OF) mary () market
	^	. 1	TITLE SUPLE	lacoa diet
	C	રાજ્યો Cigned By:	4i	

L O Van Ryan

(Signature)

(Title)

(Date)

Petroleum Engineer

November 10, 1969


This form is to be filed in compliance with RULE 1104.

If this is a request for allowable for a newly drilled or deepened well, this form must be accompanied by a tabulation of the deviation tests taken on the well in accordance with RULE 111.


All sections of this form must be filled out completely for allowable on new and recompleted wells.


Fill out only Sections I, II, and VI for changes of owner, well name or number, or transporter, or other such change of condition.


Separate Forms C-104 must be filed for each pool in multiply completed wells.

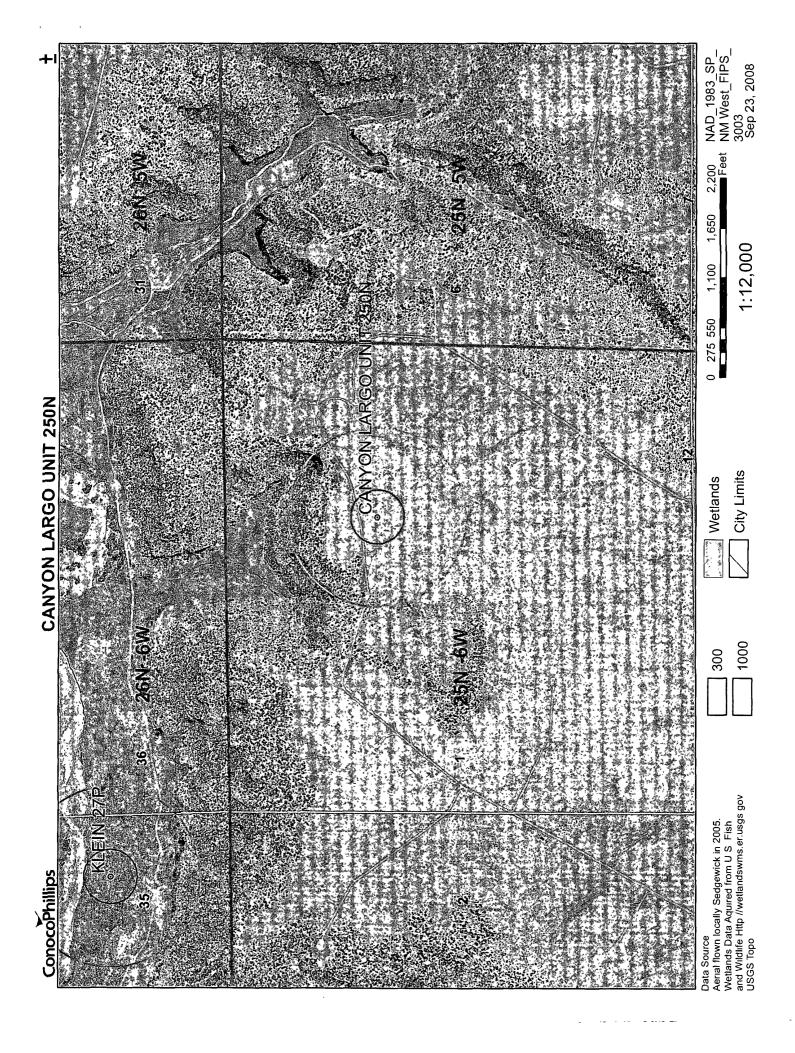


Canyon Largo Unit 250N Mines, Mills and Quarries Web Map

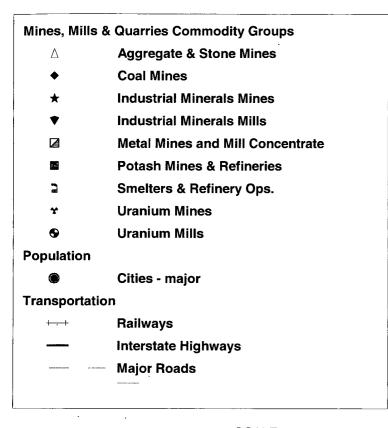

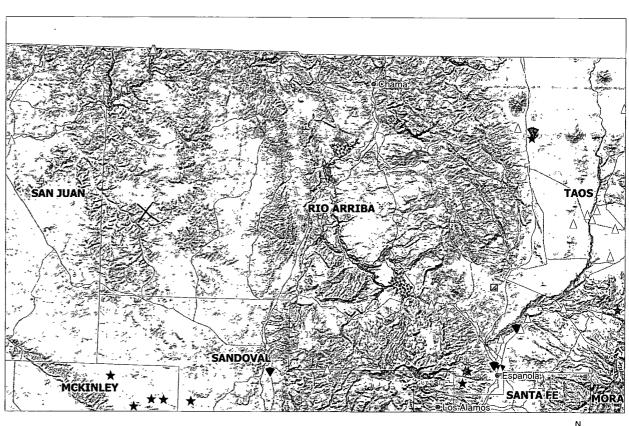





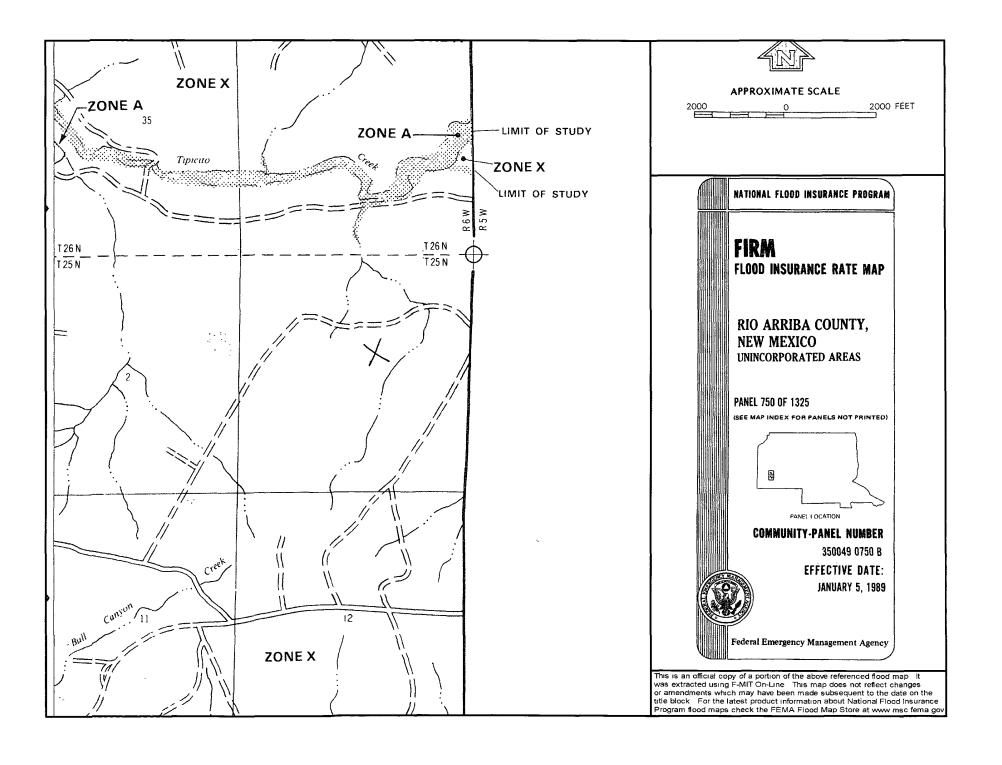

Hydrogeological report for Canyon Largo Unit 250N

Regional Hydrogeological context:

The San Jose Formation of Eocene age occurs in New Mexico and Colorado, and its outcrop forms the land surface over much of the eastern half of the central basin. It overlies the Nacimiento Formation in the area generally south of the Colorado-New Mexico State line and overlies the Animas Formation in the area generally north of the State line.

The San Jose Formation was deposited in various fluvial-type environments. In general, the unit consists of an interbedded sequence of sandstone, siltstone, and variegated shale. Thickness of the San Jose Formation generally increases from west to east (200 feet in the west and south to almost 2,700 feet in the center of the structural basin). Ground water is associated with alluvial and fluvial sandstone aquifers. Thus, the occurrence of ground water is mainly controlled by the distribution of sandstone in the formation. The distribution of such sandstone is the result of original depositional extent plus any post-depositional modifications, namely erosion and structural deformation. Transmissivity data for San Jose Formation are minimal. Values of 40 and 120 feet squared per day were determined from two aquifer tests (Stone et al, 1983, table 5). The reported or measured discharge from 46 water wells completed in San Jose Formation ranges from 0.15 to 61 gallons per minute and the median is 5 gallons per minute. Most of the wells provide water for livestock and domestic use.

The San Jose Formation is a very suitable unit for recharge from precipitation because soils that form on the unit are sandy and highly permeable and therefore readily adsorb precipitation. However, low annual precipitation, relatively high transpiration and evaporation rates, and deep dissection of the San Jose Formation by the San Juan River and its tributaries all tend to reduce the effective recharge to the unit.

Stone et al., 1983, Hydrogeology and Water Resources of the San Juan Basin, New Mexico: Socorro, New Mexico Bureau of Mines and Mineral Resources Hydrologic Report 6, 70 p.

Siting Criteria Compliance Demonstration & Hydro Geologic Analysis

The Canyon Largo Unit 250N is not located in an unstable area. The location is not over a mine and is not on the side of a hill as indicated on the Mines, Mills and Quarries Map and Topographic Map. The location of the excavated pit material will not be located within 300' of any continuously flowing watercourse or 200' from any other watercourse as indicated on the Topographic Map. The location is not within a 100-year floodplain area as indicated on the FEMA Map. The Cathodic well data from the Canyon Largo Unit 151 has an elevation of 6698' and groundwater depth of 300'. The subject well has an elevation of 6667' which is slightly less than the Canyon Largo Unit 151, therefore the groundwater depth is greater than 200'. There are no iWATERS data points located in the area as indicated on the TOPO Map. The hydro geologic analysis indicates the groundwater depth and the San Jose formation will create a stable area for this new location.

Tafoya, Crystal

From:

Tafoya, Crystal

Sent:

Thursday, October 16, 2008 10:55 AM

To: Subject: 'mark_kelly@nm.blm.gov' Surface Owner Notification

The following locations temporary pit will be closed on-site. Please let me know if you have any questions.

Grambling C 202S McDurmitt Com 100S Huerfano Unit 305

Canyon Largo Unit 250N

Federal A 1E Helms Federal 1G

Thank you,

Crystal L. Tafoya Regulatory Technician *ConocoPhillips Company* San Juan Business Unit Phone: (505) 326-9837

Email: Crystal.Tafoya@conocophillips.com

District I 1625 N. French Dr., Hobbe, NM 88240 District II 1301 W. Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Rd., Aziec, NM 87410 District IV

1220 S. St. Francis Or., Santa Fe, NM 87505

State of New Mexico

Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION

Submit to Appropriate District Office

State Lease - 7 Copies

Fac Lease - 3 Copies Form C-102

OCT 1 2 2007

Fee Lease - 3 Copies


Bureau of Land Management AMMENDED REPORT

Farmington Field Office WELL LOCATION AND ACREAGE DEDICATION PLAT

Santa Fe, NM 87505

30-039-	PI Number	398	72319	Pool Code 9 / 71	599		• • • • • • • • • • • • • • • • • • • •	oi Namo RDE / DAKOTA	
⁴ Property Co 6886	de .	,			•	rty Name LARGO UNIT			Well Number 250N
7 OGRID N 14538	BUF	© Operator Nation RLINGTON RESOURCES OIL AND GAS COMPANY					⁹ Elevation 6667		
					10 SURFACE	LOCATION		· · · · · · · · · · · · · · · · · · ·	
UI. or lot no. G	Section 1	Towaship 25-N	Range 6-W	Lot ldn	Feet from the 1745	North/South line NORTH	Foot from the 1945	East/West line EAST	County RIO ARRIBA
			ii B	ottom H	ole Location	If Different Fro	m Surface		
UL or lot no G	Section	Township	Range		Fact from the	North/South line	Feet from the	East/West line	County
Desticated Acres 320.2 E		or Infill	Consolidation	Code 15	Order No.				,

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN

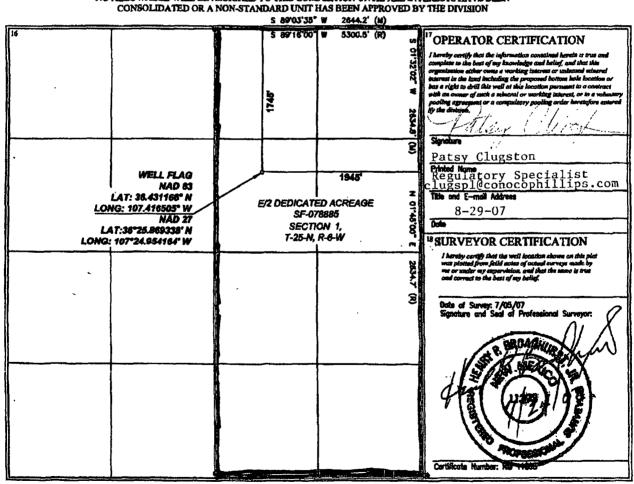

S. C.C.I. SURVEYS IS NOT LIBBLE FOR UNDERGROUND UTILITIES OR PIPELINES.


CONTRACTOR SHOULD CALL ONE—CALL FOR LOCATION OF ANY MARKED OR UNMARKED BURIED

CONTRACTOR SHOULD CALL ONE—CALL FOR LOCATION OF ANY MARKED OR UNMARKED BURIED

SECONDARY OF THE CONTRACTOR OF TH

1: KEZEKAE BIT DIKE: TO BE 8, VBOAE DEEP SIDE (OAERFLOM-3, WIDE AND 1, VBOAE SHATTOM SIDE):


NOLEZ:

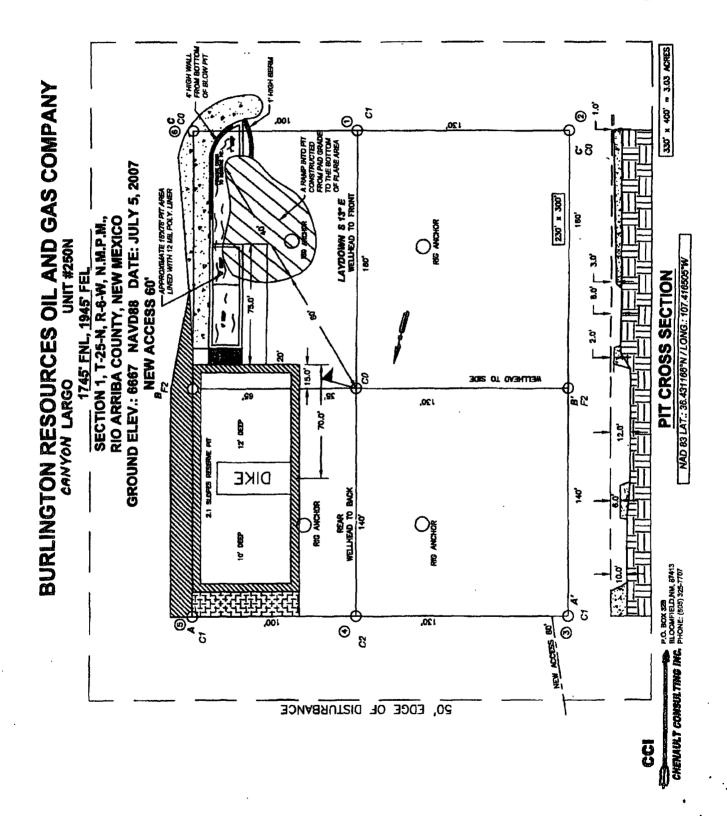

BURLINGTON RESOURCES OIL AND GAS COMPANY

CANYON LARGO UNIT #250N 1745' FNL, 1945' FEL SECTION 1, T-25-N, R-6-W, N.M.P.M., RIO ARRIBA COUNTY, NEW MEXICO



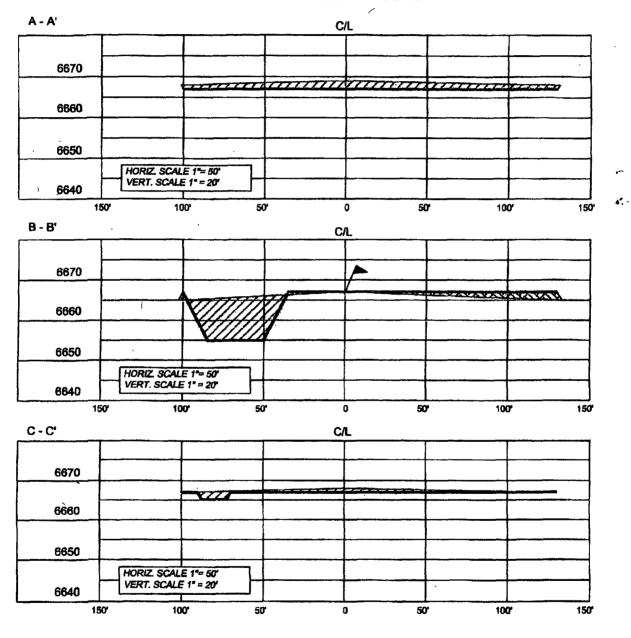

NOTE: CCI IS NOT LIABLE FOR UNDERGROUND UTILITIES OR PIPELINES.

CONTRACTOR SHOULD CALL ONE-CALL FOR LOCATION OF ANY MARKED OR UNMARKED BURIED PIPELINES OR CABLES ON WELL PAD AND OR ACCESS ROAD PRIOR TO CONSTRUCTION.

REVISIONS					
NO.	DESCRIPTION	REVISED BY	DATE		
1	ISSUED FOR REVIEW	TJR	7/17/07		

P.O. BOX 328
BLOCAFFIELD.NM, 67413
PHONE: (505)328-7707

CHENAULT CONSULTING INC.

Burlington Resources Oil & Gas Company, LP San Juan Basin Closure Plan

In accordance with Rule 19.15.17.12 NMAC the following information describes the closure requirements of temporary pits on Burlington Resources Oil & Gas Company, LP (BR) locations. This is BR's standard procedure for all temporary pits. A separate plan will be submitted for any temporary pit which does not conform to this plan.

All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of pit closure. Closure report will be filed on C-144 and incorporate the following:

- Details on Capping and Covering, where applicable.
- Plot Plan (Pit Diagram)
- Inspection Reports
- Sampling Results
- C-105
- Copy of Deed Notice will be filed with County Clerk

General Plan:

- All free standing liquids will be removed at the start of the pit closure process from the pit and disposed of in a division—approved facility or recycle, reuse or reclaim the liquids in a manner that the appropriate division district office approves. The facilities to be used will be Basin Disposal (Permit #NM-01-005) and Envirotech Land Farm (Permit #NM-01-011).
- 2. The preferred method of closure for all temporary pits will be on-site burial, assuming that all the criteria listed in sub-section (B) of 19.15.17.13 are met.
- 3. The surface owner shall be notified of BR's closing of the temporary pit prior to closure as per the approved closure plan via certified mail, return receipt requested.
- 4. Within 6 months of the Rig Off status occurring BR will ensure that temporary pits are closed, re-contoured, and reseeded.
- 5. Notice of Closure will be given prior to closure to the Aztec Division office between 72 hours and one week via email, or verbally. The notification of closure will include the following:
 - i. Operator's name
 - Location by Unit Letter, Section, Township, and Range. Well name and API number.
- 6. Liner of temporary pit shall be removed above "mud level" after stabilization. Removal of liner will consist of manually or mechanically cutting liner at mud level and removing all remaining liner. Care will be taken to remove "All" of the liner i.e., edges of liner entrenched or buried. All excessive liner will be disposed of at the San Juan County Landfill located on CR 3100.
- 7. Pit contents shall be mixed with non-waste containing, earthen material in order to achieve the solidification process. The solidification process will be accomplished using a combination of natural drying and mechanically mixing. Pit contents will be mixed with non-waste, earthen material to a consistency that is deemed a safe and stable. The mixing ratio shall not exceed 3 parts clean soil to 1 part pit contents.
- 8. A five point composite sample will be taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.13(B)(1)(b). In the event that the criteria are not met, all contents will be handled per Subparagraph (a) of Paragraph (1) of Subsection B of 19.15.17.13 i.e., Dig and haul.

Components	Tests Method	Limit (mg/Kg)
Benzene	EPA SW-846 8021B or 8260B	0.2
BTEX	EPA SW-846 8021B or 8260B	50
TPH	EPA SW-846 418.1	2500
GRO/DRO	EPA SW-846 8015M	_500
Chlorides	EPA 300.1	/1000/500

- 9. Upon completion of solidification and testing standards being passed, the pit area will be backfilled with compacted, non-waste containing, earthen material. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater. If standard testing fails BR will dig and haul all contents pursuant to 19.15.17.13.i.a. After doing such, confirmation sampling will be conducted to ensure a release has not occurred.
- 10. During the stabilization process if the liner is ripped by equipment the Aztec OCD office will be notified within 48 hours and the liner will be repaired if possible. If the liner can not be repaired then all contents will be excavated and removed.
- 11. Dig and Haul Material will be transported to the Envirotech Land Farm located 16 miles south of Bloomfield on Angel Peak Road, CR 7175. Permit # NM010011
- 12. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Reshaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.
- 13. Notification will be sent to OCD when the reclaimed area is seeded.
- 14. BR shall seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM stipulated seed mixes will used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

Туре	Variety or Cultivator	PLS/A
Western wheatgrass	Arriba	3.0
Indian ricegrass	Paloma or Rimrock	3.0
Slender wheatgrass	San Luis	2.0
Crested wheatgrass	Hy-crest	3.0
Bottlebrush Squirreltail	Unknown	2.0
Four-wing Saltbrush	Delar	.25

Species shall be planted in pounds of pure live seed per acre: Present Pure Live Seed (PLS) = Purity X Germination/100 Two lots of seed can be compared on the basis of PLS as follows:

Source No. One (poor quality)

Purity

50 percent

Germination

40 percent

Percent PLS

20 percent

Source No. two (better quality)

Purity

80 percent

Germination

63 percent

Percent PLS

50 percent

5 lb. bulk seed required to make 2 lb. bulk seed required to make

1 lb. PLS 1 lb. PLS

15. The temporary pit will be located with a steel marker, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial upon the abandonment of all the wells on the pad. The marker will be flush with the ground to allow access of the active well pad and for safety concerns. The marker will include a threaded collar to be used for future abandonment. The top of the marker will contain a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the operator's information at the time of all wells on the pad are abandoned. The operator's information will include the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.