

3R - 196

**ANNUAL
MONITORING
REPORT**

04/02/2008



MWH

BUILDING A BETTER WORLD

RECEIVED

2008 APR 4 PM 1 38

April 2, 2008

Mr. Glenn von Gonten
New Mexico Oil Conservation Division (NMOCD)
1220 South St., Francis Drive
Santa Fe, New Mexico 87505

**RE: El Paso Tennessee Pipeline Company Pit Groundwater Remediation Sites
2007 Annual Reports**

Dear Mr. Von Gonten:

MWH Americas, Inc., on behalf of El Paso Tennessee Pipeline Company (EPTPC), is submitting the enclosed 2007 Annual Reports for each of EPTPC's 21 remaining San Juan River Basin pit groundwater remediation Sites. The reports present the 2007 sampling and product recovery data and include recommendations for 2008 activities at these Sites.

Copies of the reports for Sites located on Federal or Navajo lands are also being sent under separate cover to the Bureau of Land Management and the Navajo Nation Environmental Protection Agency.

If you have any questions concerning the enclosed reports, please call either Nancy Prince of EPTPC (719-520-4690) or me (303-291-2276).

Sincerely,

Jed Smith
Project Manager

cc: Brandon Powell – NMOCD, Aztec, NM
Nancy Prince – EPTPC
MWH Project File

**2007 ANNUAL GROUNDWATER REPORT
FEDERAL SITES VOLUME I
EL PASO TENNESSEE PIPELINE COMPANY**

TABLE OF CONTENTS

METER or LINE ID	SITE NAME	TOWNSHIP	RANGE	SECTION	UNIT	
89961	Fields A#7A	32N	11W	34	E	3R170
89232	Johnston Fed #6A	31N	09W	35	F	3R202
94715	James F. Bell #1E	30N	13W	10	P	3R196
89620	Sandoval GC A #1A	30N	09W	35	C	3R235
LD151	Lat 0-21 Line Drip	30N	09W	12	O	3R213
73220	Fogelson 4-1 Com. #14	29N	11W	4	P	3R068
97213	Hamner #9	29N	09W	20	A	3R190
LD174	LAT L 40	28N	04W	13	H	3R212
89894	Hammond #41A	27N	08W	25	O	3R186
94810	Miles Fed 1A	26N	07W	5	F	3R223
LD072	K27 LD072	25N	06W	4	E	3R204
87640	Canada Mesa #2	24N	06W	24	I	3R155
70194	Johnston Fed #4	31N	09W	33	H	3R201



MWH

3R196

**EPTPC GROUNDWATER SITES
2007 ANNUAL GROUNDWATER REPORT**

**James F. Bell #1E
Meter Code: 94715**

SITE DETAILS

Legal Description:	Town: 30N	Range: 13W	Sec: 10	Unit: P
NMOCD Haz Ranking: 40	Land Type:	Federal	Operator:	BP / Amoco Production Company

PREVIOUS ACTIVITIES

Site Assessment:	3/94	Excavation:	4/94	Soil Boring:	10/95
Monitor Well:	10/95	Geoprobe:	NA	Additional MWs:	6/99
Downgradient MWs:	11/95	Replace MW:	NA	Quarterly Initiated:	NA
ORC Nutrient Injection:	NA	Re-Excavation:	NA	PSH Removal Initiated:	7/97
Annual Initiated:	10/00	Quarterly Resumed:	NA	PSH Removal in 2007?	No

* Additional downgradient monitoring wells were attempted in 1995 and in 1999; however, these borings were dry and wells were not installed.

SUMMARY OF 2007 ACTIVITIES

MW-1: Annual groundwater sampling was performed in June 2007. Quarterly static water level monitoring was performed during 2007.

MW-2: Annual groundwater sampling was performed in June 2007. Quarterly static water level monitoring was performed during 2007.

MW-3: Annual groundwater sampling was performed in June 2007. Quarterly static water level monitoring was performed during 2007.

MW-4: Quarterly static water level monitoring was performed during 2007.

Site-Wide Activities: No other Site-wide activities occurred during 2007.

SITE MAP

A Site map (June) is attached as Figure 1.

**EPTPC GROUNDWATER SITES
2007 ANNUAL GROUNDWATER REPORT**

**James F. Bell #1E
Meter Code: 94715**

SUMMARY TABLES AND GRAPHS

- Analytical data for 2007 are included in Table 1, and historic data are also presented graphically in Figures 2 through 5.
- Historic free-product recovery data are presented in Table 2 and graphically in Figures 6 and 7.
- The laboratory report is presented in Attachment 1 (included on CD).
- Field documentation is presented in Attachment 2 (included on CD).

GEOLOGIC LOGS AND WELL COMPLETION DIAGRAMS

No subsurface activities were performed at this Site during 2007.

DISPOSITION OF GENERATED WASTES

All purge water was taken to the El Paso Natural Gas Rio Vista Compressor Station.

ISOCONCENTRATION MAPS

No isoconcentration maps were prepared for this Site; however, the attached Site map presents both the analytical data collected during the June 2007 event.

CONCLUSIONS

- There was no free-product observed in MW-1 in 2007. This well was sampled in June 2007, and the BTEX results were significantly above the NMWQCC standards. The BTEX concentrations are nearly identical to those observed when the well was last sampled, which was in March 1997.
- BTEX concentrations in MW-2 were below detection limits in 2007. BTEX concentrations in MW-2 have been below the NMWQCC standards now for 5 years.
- Free-product has not been detected in MW-3 since January 2004. Benzene and toluene concentrations (868 µg/L and <1 µg/L) have attenuated over time, though benzene remains above its NMWQCC standard. Ethylbenzene (1,490 µg/L) and total xylenes concentrations (13,900 µg/L) appear to be stable at levels well above their respective standards.


**EPTPC GROUNDWATER SITES
2007 ANNUAL GROUNDWATER REPORT**

**James F. Bell #1E
Meter Code: 94715**

RECOMMENDATIONS


- The dissolved phase BTEX concentrations in MW-1 appear to be stable over the last 10 years. EPTPC will continue to sample this well annually in conjunction with MW-2 and MW-3, if free-product does not reappear. MW-1 will be gauged quarterly to check for free-product. EPTPC plans to evaluate this Site for potential additional remedial measures during 2008.
- EPTPC will continue annual groundwater sample collection and quarterly water level monitoring at MW-2 and MW-3.
- Because historic data collected at MW-4 indicate concentrations of BTEX constituents below analytical detection limits, EPTPC will not sample this well until the Site closure samples are collected. Water level monitoring will continue on a quarterly basis.

FIGURE 2
SUMMARY OF BTEX COMPOUNDS IN GROUNDWATER SAMPLES
JAMES F. BELL #1E (METER #94715)
MW01

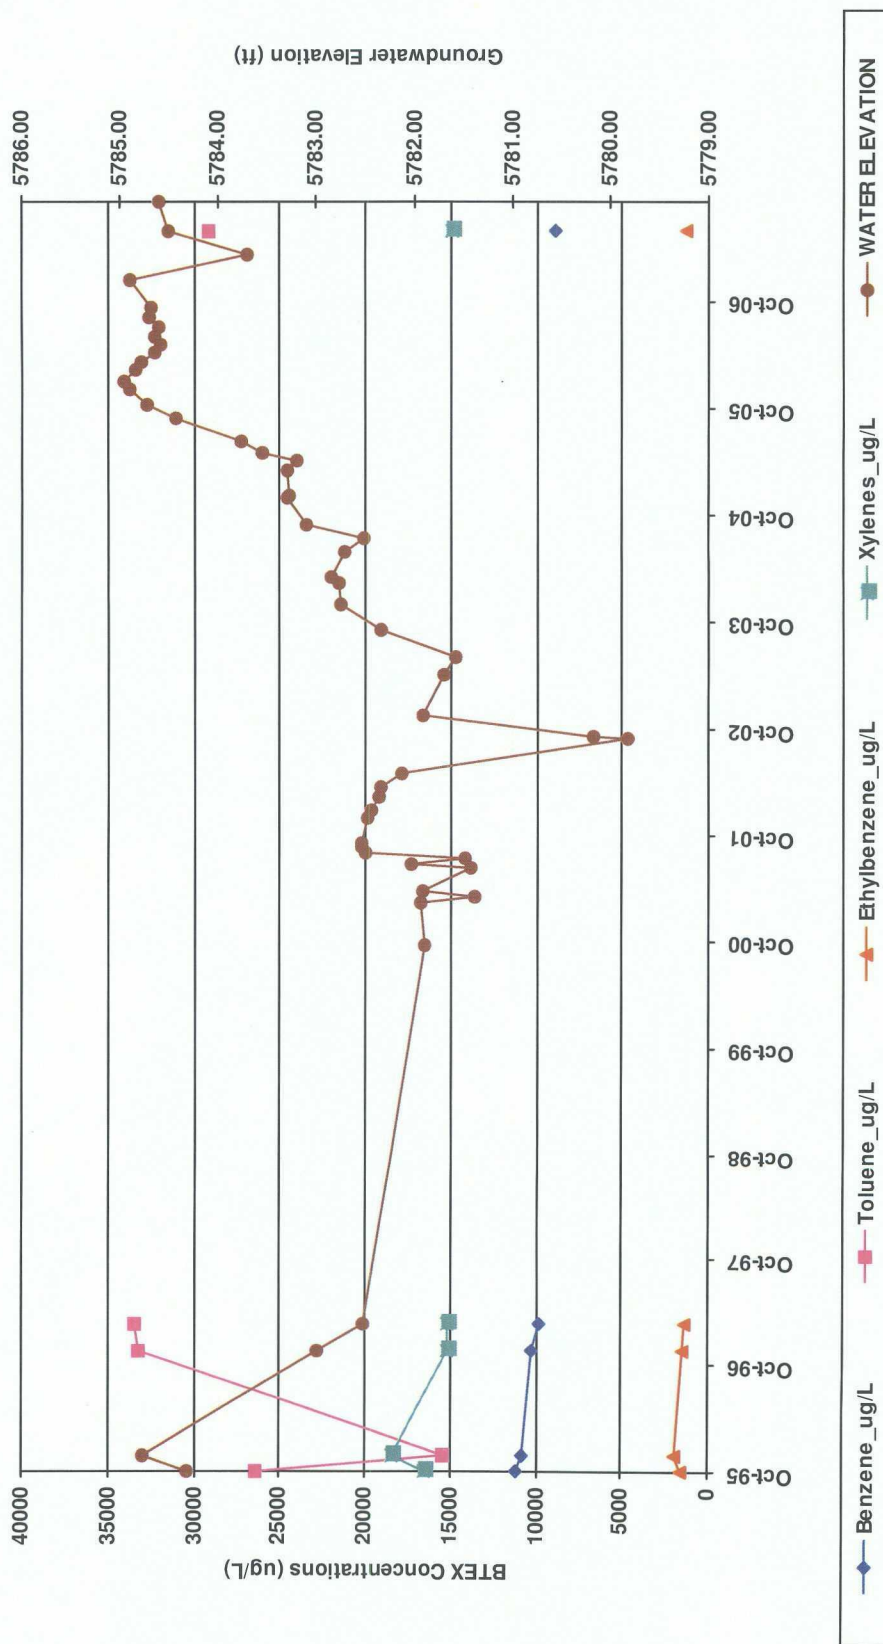


Note: Non Detects are represented by a value of 1.

FIGURE 3
SUMMARY OF BTEX COMPOUNDS IN GROUNDWATER SAMPLES
JAMES F. BELL #1E (METER #94715)
MW02

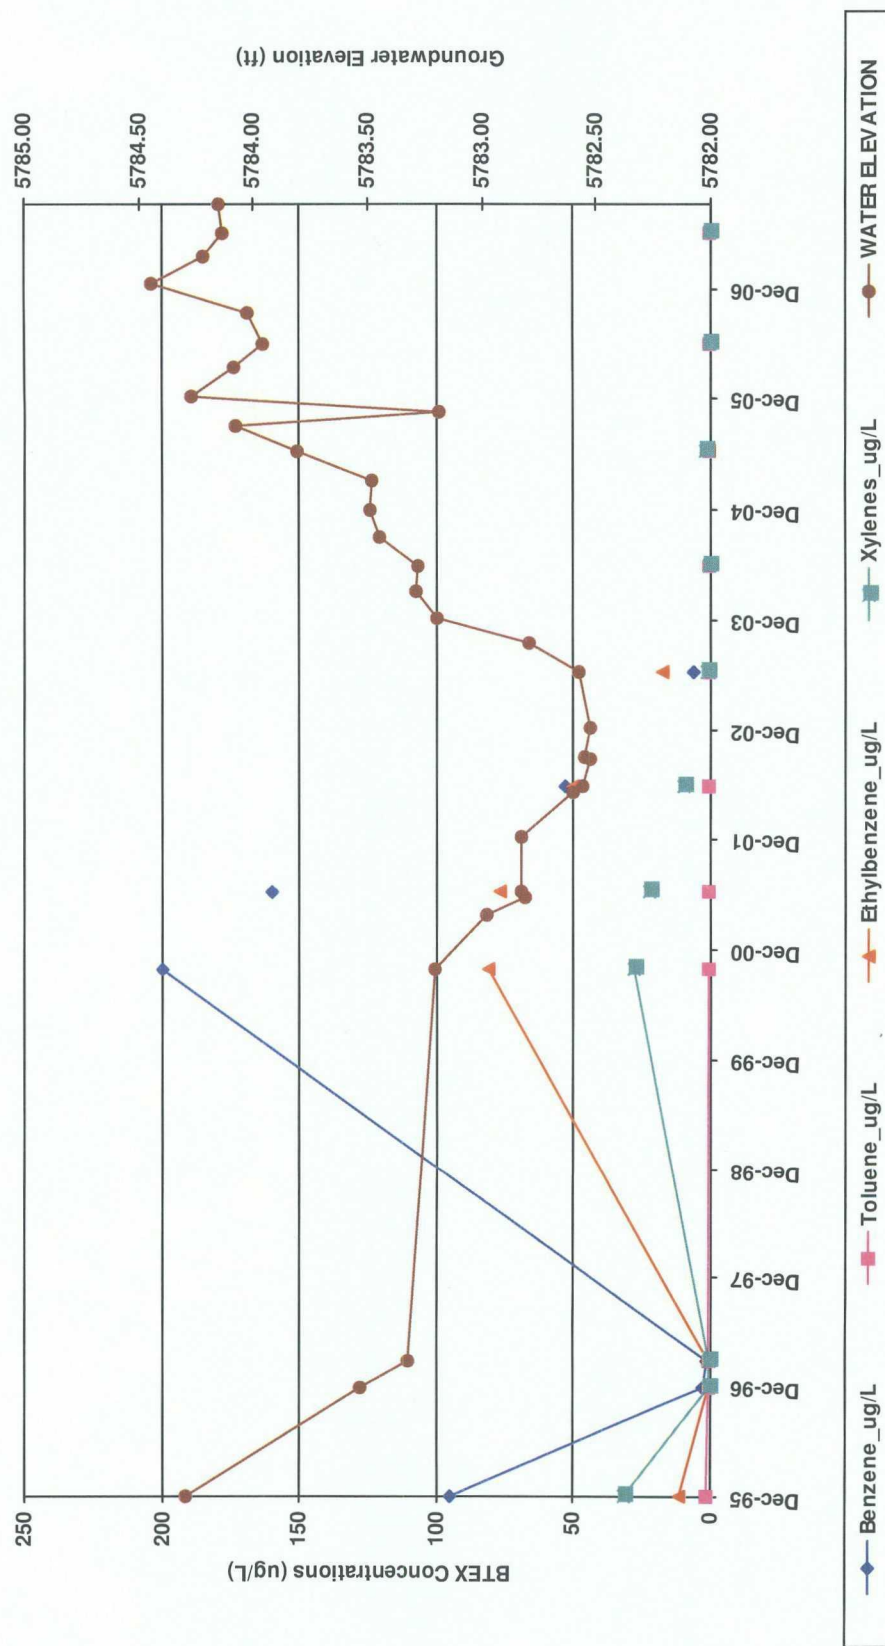


Note: Non Detects are represented by a value of 1.

FIGURE 4
SUMMARY OF BTEX COMPOUNDS IN GROUNDWATER SAMPLES
JAMES F. BELL #1E (METER #94715)
MW03

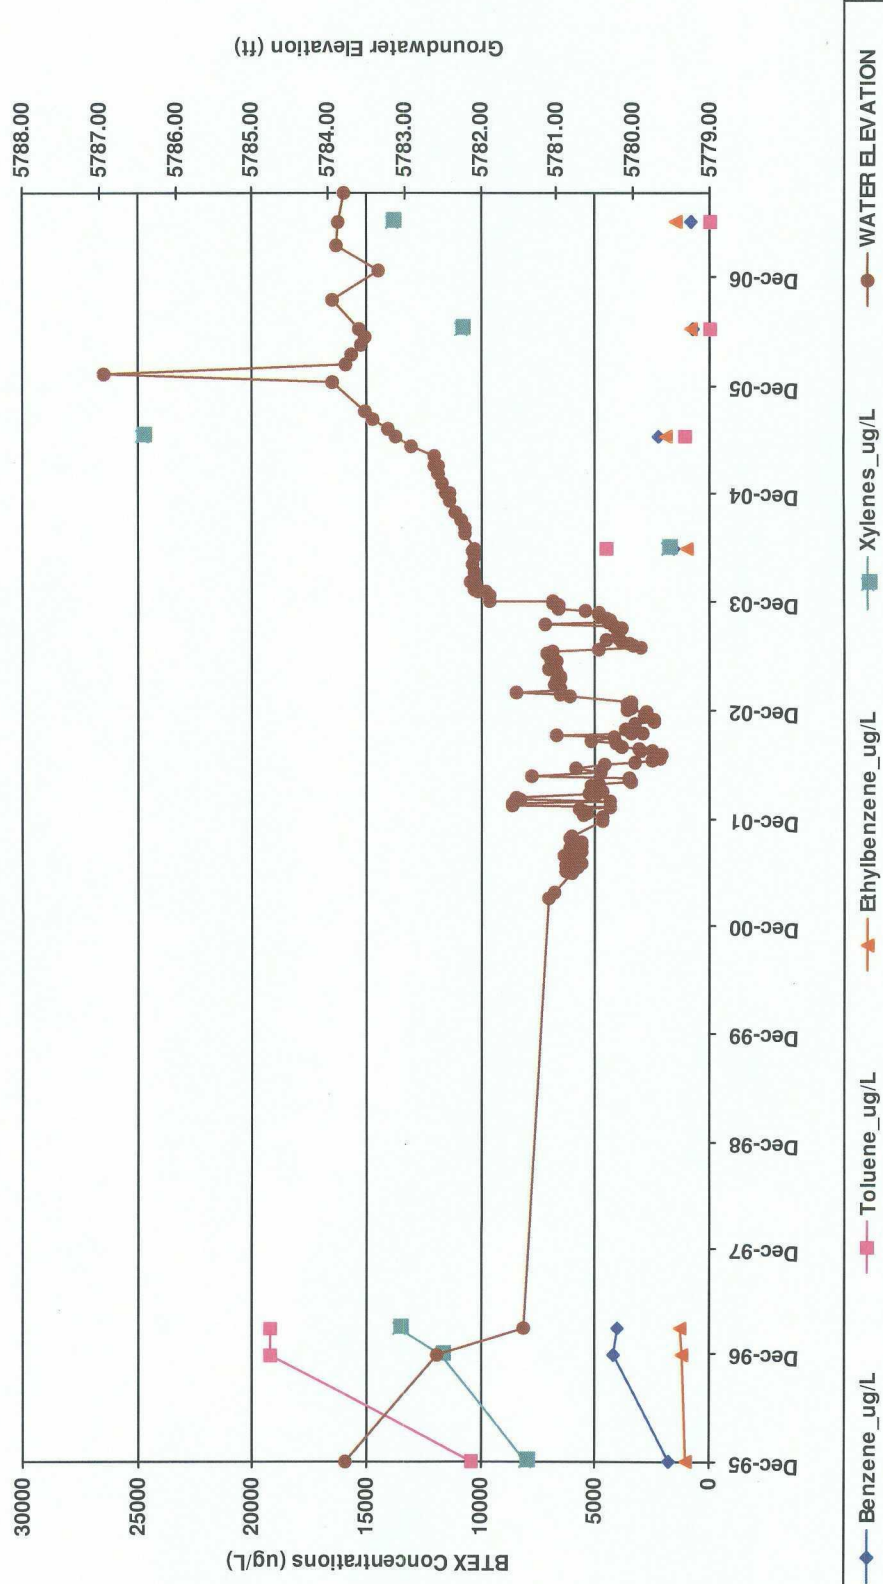

Note: Non Detects are represented by a value of 1.

FIGURE 5
SUMMARY OF BTEX COMPOUNDS IN GROUNDWATER SAMPLES
JAMES F. BELL #1E (METER #94715)
MW04

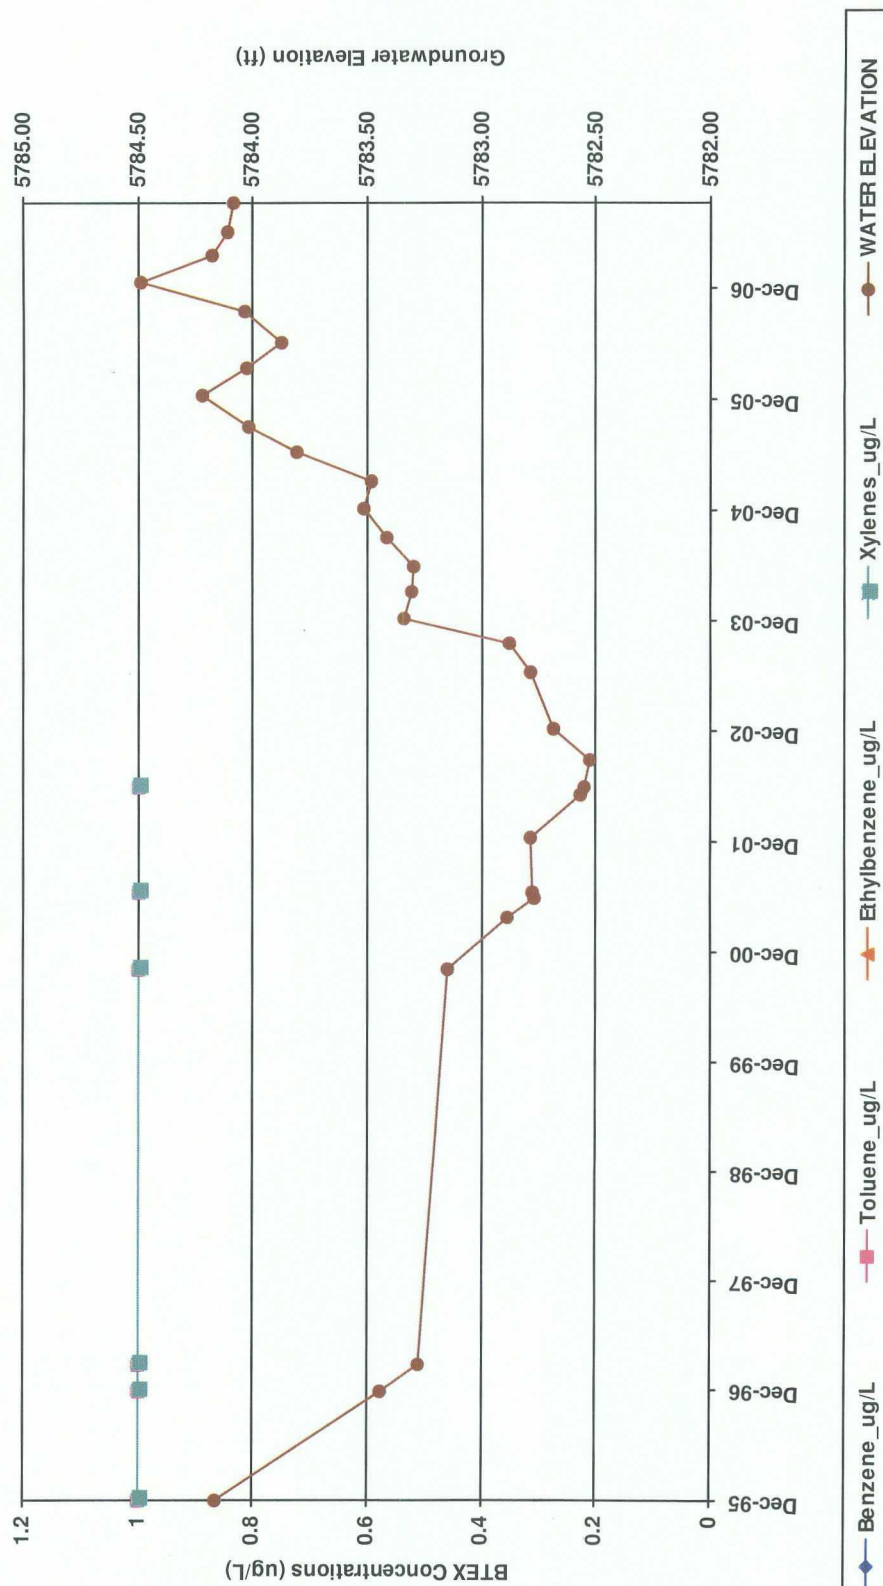

Note: Non Detects are represented by a value of 1.

FIGURE 6
SUMMARY OF FREE-PRODUCT REMOVAL
JAMES F. BELL #1E (METER #94715)
MW01

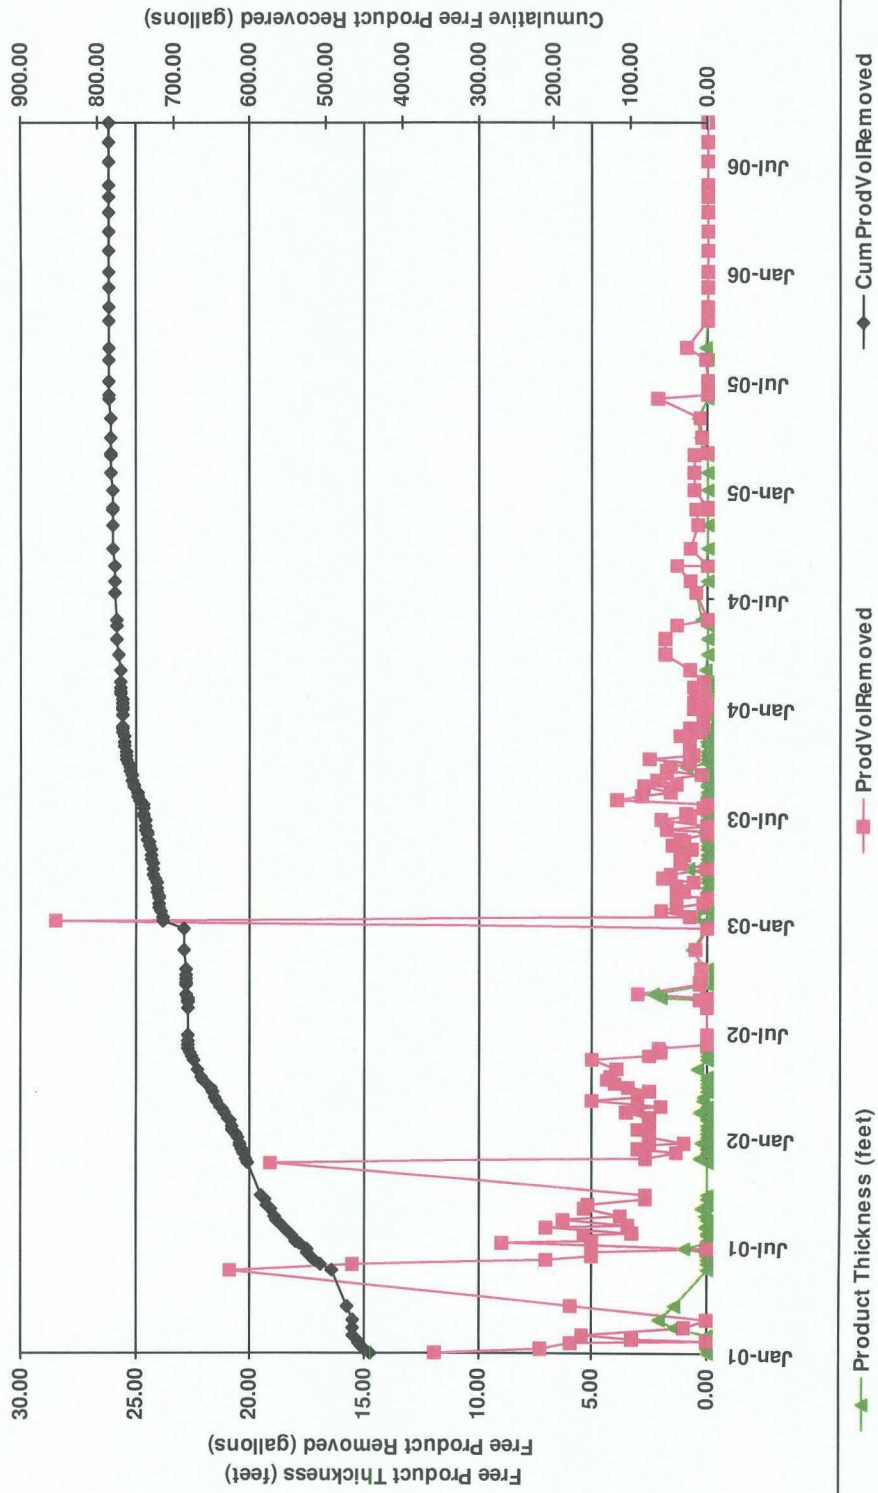


FIGURE 7
SUMMARY OF FREE-PRODUCT REMOVAL
JAMES F. BELL #1E (METER #94715)
MW03

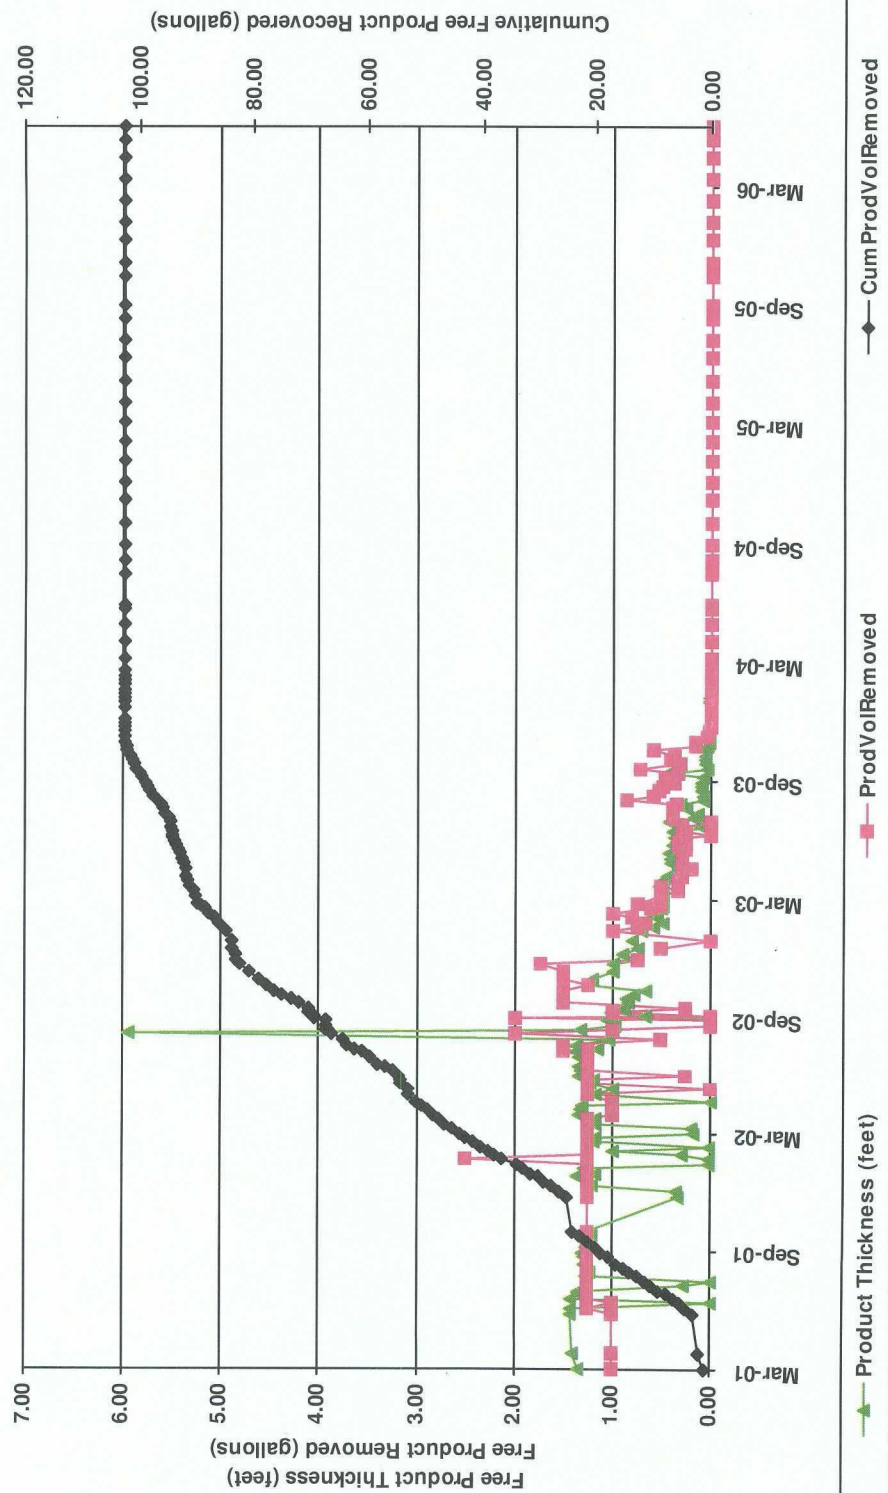


TABLE 1

**SUMMARY OF BTEX COMPOUNDS IN GROUNDWATER SAMPLES
JAMES F. BELL #1E (METER #94715)**

Monitoring Well	Sample Date	Benzene (ug/L)	Toluene (ug/L)	Ethylbenzene (ug/L)	Total Xylenes (ug/L)	Depth to Water (ft BTOC)
MW01	10/17/1995	11200	26400	1540	16500	26.67
	12/11/1995	10800	15400	1870	18400	26.23
	12/4/1996	10300	33200	1400	15200	28.00
	3/5/1997	9850	33400	1370	15200	28.47
	6/11/2007	8910	29200	1360	15000	26.47
MW02	12/11/1995	94.7	1.4	11.3	31.1	25.32
	12/4/1996	2.52	1	1	1	26.09
	3/5/1997	1.49	1	1	1	26.30
	10/11/2000	200	1	81	28	26.41
	6/25/2001	160	1	77	22	26.79
	6/5/2002	53	1	50	9.7	27.06
	6/19/2003	6.5	1	17.8	1.7	27.04
	6/9/2004	1	1	1	1	26.34
	6/23/2005	1	1	1	2	25.81
	6/14/2006	1	1	1	1	25.66
	6/11/2007	1	1	1	1	25.48
MW03	12/11/1995	1790	10400	1010	8070	26.52
	12/4/1996	4210	19200	1140	11700	27.72
	3/5/1997	4000	19200	1280	13600	28.87
	6/9/2004	1590	4520	966	1830	28.21
	6/23/2005	2260	1090	1920	24800	27.18
	6/14/2006	795	1	818	10900	26.71
	6/11/2007	868	1	1490	13900	26.42
MW04	12/11/1995	1	1	1	1	25.55
	12/4/1996	1	1	1	1	26.27
	3/5/1997	1	1	1	1	26.44
	10/11/2000	1	1	1	1	26.56
	6/25/2001	1	1	1	1	26.93
	6/5/2002	1	1	1	1	27.16

Note: Non Detects are represented by a value of 1.

TABLE 2

**SUMMARY OF FREE-PRODUCT REMOVAL
JAMES F. BELL #1E (METER #94715)**

Monitoring Well	Removal Date	Depth to Product (feet btoc)	Depth to Water (feet btoc)	Product Thickness (feet)	Volume Removed (gallons)	Cumulative Volume of Product Removed (gallons)
MW01	1/16/2001			0	11.86	443.26
	1/24/2001			0	7.27	450.53
	1/31/2001			0	5.93	456.46
	2/5/2001			0	0.00	456.46
	2/8/2001			0	3.25	459.71
	2/16/2001			0	5.48	465.19
	2/26/2001	27.61	29.06	1.45	1.00	466.19
	3/14/2001	27.49	29.6	2.11	0.00	466.19
	4/6/2001	27.67	29.08	1.41	5.93	472.12
	6/5/2001			0	20.85	492.97
	6/14/2001			0	15.50	508.47
	6/22/2001	28.1	29.57	1.47	7.00	515.47
	6/28/2001			0	5.00	520.47
	7/6/2001			0	5.00	525.47
	7/11/2001	27.95	28.95	1.00	0.00	525.47
	7/20/2001			0	9.00	534.47
	7/26/2001	28.21	29.51	1.30	5.00	539.47
	8/2/2001			0	5.40	544.87
	8/8/2001			0	3.25	548.12
	8/16/2001	28.4	28.49	0.09	7.00	555.12
	8/20/2001			0	3.40	558.52
	8/31/2001			0	6.30	564.82
	9/6/2001	28.41	28.46	0.05	3.80	568.62
	9/17/2001	28.19	28.46	0.27	5.36	573.98
	9/26/2001			0	5.17	579.15
	10/3/2001			0	2.70	581.85
	10/11/2001			0	2.70	584.55
	12/4/2001			0	19.13	603.68
	12/13/2001	28.2	28.5	0.30	2.70	606.38
	12/21/2001			0	1.34	607.72
	12/28/2001			0	3.00	610.72
	1/4/2002			0	2.49	613.21
	1/8/2002	28.25	28.54	0.29	1.00	614.21
	1/17/2002			0	2.50	616.71
	1/23/2002			0	2.50	619.21
	1/31/2002			0	3.00	622.21
	2/7/2002			0	2.50	624.71
	2/14/2002			0	2.50	627.21
	2/20/2002			0	2.50	629.71

TABLE 2

**SUMMARY OF FREE-PRODUCT REMOVAL
JAMES F. BELL #1E (METER #94715)**

Monitoring Well	Removal Date	Depth to Product (feet btoc)	Depth to Water (feet btoc)	Product Thickness (feet)	Volume Removed (gallons)	Cumulative Volume of Product Removed (gallons)
MW01	2/28/2002	28.31	28.62	0.31	3.50	633.21
	3/6/2002			0	3.00	636.21
	3/11/2002			0	2.00	638.21
	3/21/2002			0	5.00	643.21
	3/28/2002	28.51	28.64	0.13	3.00	646.21
	4/4/2002			0	2.50	648.71
	4/12/2002			0	3.44	652.15
	4/19/2002			0	4.00	656.15
	4/25/2002			0	4.37	660.52
	5/3/2002			0	4.23	664.75
	5/15/2002	28.48	28.87	0.39	3.95	668.70
	5/31/2002			0	5.00	673.70
	6/7/2002			0	2.50	676.20
	6/14/2002			0	2.00	678.20
	6/21/2002			0	2.10	680.30
	6/27/2002			0	0.00	680.30
	7/2/2002			0	0.00	680.30
	7/11/2002			0	0.00	680.30
	8/28/2002			0	0.00	680.30
	9/6/2002			0	0.00	680.30
	9/10/2002			0	0.33	680.63
	9/13/2002	29.2	31.17	1.97	0.00	680.63
	9/19/2002	28.45	30.82	2.37	3.00	683.63
	10/4/2002			0	0.33	683.96
	10/10/2002			0	0.33	684.29
	10/15/2002			0	0.25	684.54
	10/23/2002			0	0.25	684.79
	10/30/2002			0	0.25	685.04
	12/4/2002	28.37	29.07	0.70	0.50	685.54
	1/7/2003			0	0.00	685.54
	1/22/2003			0	28.50	714.04
	1/29/2003			0	0.75	714.79
	2/5/2003			0	2.00	716.79
	2/12/2003			0	1.38	718.16
	2/20/2003			0	0.17	718.34
	2/28/2003			0	0.00	718.34
	3/6/2003			0	1.38	719.71
	3/12/2003			0	0.98	720.69
	3/19/2003			0	1.38	722.07

TABLE 2

**SUMMARY OF FREE-PRODUCT REMOVAL
JAMES F. BELL #1E (METER #94715)**

Monitoring Well	Removal Date	Depth to Product (feet btoc)	Depth to Water (feet btoc)	Product Thickness (feet)	Volume Removed (gallons)	Cumulative Volume of Product Removed (gallons)
MW01	3/26/2003			0	0.60	722.66
	4/2/2003			0	1.96	724.63
	4/10/2003			0	1.57	726.20
	4/18/2003	28.44	29.29	0.85	0.00	726.20
	4/28/2003			0	1.18	727.38
	5/7/2003			0	1.18	728.56
	5/13/2003			0	1.00	729.56
	5/21/2003			0	0.69	730.25
	5/27/2003			0	1.47	731.72
	6/3/2003			0	0.98	732.70
	6/9/2003			0	1.18	733.87
	6/16/2003			0	0.00	733.87
	6/19/2003	29.19	29.41	0.22	0.00	733.87
	6/23/2003			0	1.77	735.64
	7/1/2003			0	0.00	735.64
	7/10/2003			0	2.00	737.64
	7/15/2003			0	0.79	738.43
	7/21/2003			0	0.88	739.31
	7/29/2003			0	0.19	739.50
	8/4/2003			0	0.00	739.50
	8/11/2003			0	3.96	743.46
	8/18/2003			0	2.85	746.31
	8/25/2003			0	1.57	747.88
	9/2/2003			0	2.78	750.66
	9/8/2003			0	1.37	752.03
	9/15/2003			0	2.16	754.19
	9/22/2003	28.31	28.64	0.33	0.25	754.44
	9/29/2003			0	1.77	756.21
	10/6/2003			0	1.57	757.78
	10/13/2003			0	0.78	758.56
	10/20/2003			0	2.55	761.11
	10/27/2003			0	0.55	761.66
	11/3/2003			0	0.79	762.45
	11/10/2003			0	0.79	763.24
	11/17/2003			0	0.79	764.03
	11/26/2003			0	1.18	765.21
	12/4/2003			0	0.30	765.51
	12/9/2003			0	0.79	766.30
	12/15/2003	28.04	28.24	0.20	0.13	766.43

TABLE 2

**SUMMARY OF FREE-PRODUCT REMOVAL
JAMES F. BELL #1E (METER #94715)**

Monitoring Well	Removal Date	Depth to Product (feet btoc)	Depth to Water (feet btoc)	Product Thickness (feet)	Volume Removed (gallons)	Cumulative Volume of Product Removed (gallons)
MW01	1/2/2004			0	0.20	766.63
	1/11/2004			0	0.59	767.22
	1/16/2004			0	0.00	767.22
	1/23/2004			0	0.59	767.81
	1/30/2004			0	0.10	767.91
	2/6/2004			0	0.49	768.40
	2/12/2004			0	0.20	768.60
	2/18/2004			0	0.59	769.19
	2/27/2004	28.19	28.21	0.02	0.20	769.39
	3/16/2004	28.08	28.13	0.05	0.79	770.18
	4/13/2004			0	1.87	772.05
	5/10/2004			0	1.87	773.92
	6/2/2004			0	1.37	775.29
	6/9/2004	28.03	28.27	0.24	0.00	775.29
	7/26/2004	27.95	28.48	0.53	0.50	775.79
	8/16/2004			0	0.79	776.58
	9/9/2004			0	1.37	777.95
	9/10/2004	27.82	27.89	0.07	0.00	777.95
	10/11/2004			0	0.79	778.74
	11/17/2004			0	0.39	779.13
	12/13/2004			0	0.49	779.62
	12/14/2004	27.675	27.68	0.01	0.00	779.62
	12/18/2004	27.67	27.71	0.04	0.00	779.62
	1/17/2005			0	0.58	780.20
	2/15/2005			0	0.58	780.78
	3/16/2005			0	0.59	781.37
	3/17/2005	27.65	27.83	0.18	0.00	781.37
	4/15/2005	27.72	28.03	0.31	0.22	781.59
	5/17/2005	27.35	27.78	0.43	0.36	781.95
	6/17/2005			0	2.15	784.10
	6/23/2005	27.21	27.23	0.02	0.00	784.10
	7/19/2005			0	0.00	784.10
	8/22/2005			0	0.10	784.20
	9/12/2005	26.52	26.56	0.04	0.88	785.08
	10/28/2005		26.27	0	0.00	785.08
	11/18/2005		26.26	0	0.00	785.08
	12/22/2005		26.09	0	0.00	785.08
	1/18/2006		26.02	0	0.00	785.08
	2/21/2006		26.14	0	0.00	785.08

TABLE 2

**SUMMARY OF FREE-PRODUCT REMOVAL
JAMES F. BELL #1E (METER #94715)**

Monitoring Well	Removal Date	Depth to Product (feet btoc)	Depth to Water (feet btoc)	Product Thickness (feet)	Volume Removed (gallons)	Cumulative Volume of Product Removed (gallons)
MW01	3/25/2006		26.2	0	0.00	785.08
	4/28/2006		26.34	0	0.00	785.08
	5/23/2006		26.39	0	0.00	785.08
	6/14/2006		26.33	0	0.00	785.08
	7/21/2006		26.38	0	0.00	785.08
	8/24/2006		26.29	0	0.00	785.08
	9/25/2006		26.3	0	0.00	785.08
MW03	3/12/2001	27.84	29.18	1.34	1.00	1.00
	4/6/2001	27.86	29.27	1.41	1.00	2.00
	6/5/2001	28.06	29.48	1.42	1.00	3.00
	6/14/2001	27.98	29.41	1.43	1.25	4.25
	6/22/2001			0	1.00	5.25
	6/28/2001	28.15	29.57	1.42	1.25	6.50
	7/6/2001	28.06	29.41	1.35	1.25	7.75
	7/11/2001	28.26	29.61	1.35	1.25	9.00
	7/20/2001	28.13	29.43	1.30	1.25	10.25
	7/26/2001			0	1.25	11.50
	8/2/2001	28.22	29.5	1.28	1.25	12.75
	8/8/2001	28.16	29.4	1.24	1.25	14.00
	8/16/2001	28.21	29.46	1.25	1.25	15.25
	8/20/2001	28.31	29.61	1.30	1.25	16.50
	8/31/2001	28.17	29.47	1.30	1.25	17.75
	9/6/2001	28.31	29.62	1.31	1.25	19.00
	9/17/2001	28.34	29.62	1.28	1.25	20.25
	9/25/2001	28.22	29.48	1.26	1.25	21.50
	10/3/2001	28.25	29.47	1.22	1.25	22.75
	10/11/2001	28.23	29.5	1.27	1.25	24.00
	12/4/2001	28.55	29.89	1.34	1.25	25.25
	12/13/2001	28.54	29.89	1.35	1.25	26.50
	12/21/2001	28.36	29.63	1.27	1.25	27.75
	12/28/2001	28.43	29.68	1.25	1.25	29.00
	1/4/2002	28.39	29.63	1.24	1.25	30.25
	1/8/2002	28.41	29.59	1.18	1.25	31.50
	1/17/2002	28.7	30	1.30	1.25	32.75
	1/23/2002	28.7	28.71	0.01	1.25	34.00
	1/31/2002	28.68	28.7	0.02	2.50	36.50
	2/7/2002	28.7	30	1.30	1.25	37.75
	2/14/2002	27.8	28.8	1.00	1.25	39.00
	2/20/2002	28.74	28.76	0.02	1.25	40.25

TABLE 2

**SUMMARY OF FREE-PRODUCT REMOVAL
JAMES F. BELL #1E (METER #94715)**

Monitoring Well	Removal Date	Depth to Product (feet btoc)	Depth to Water (feet btoc)	Product Thickness (feet)	Volume Removed (gallons)	Cumulative Volume of Product Removed (gallons)
MW03	2/28/2002	28.64	29.82	1.18	1.25	41.50
	3/6/2002	28.55	29.72	1.17	1.25	42.75
	3/11/2002	28.72	29.9	1.18	1.25	44.00
	3/21/2002	28.61	29.82	1.21	1.25	45.25
	3/28/2002	28.57	29.74	1.17	1.25	46.50
	4/4/2002	28.66	29.84	1.18	1.25	47.75
	4/12/2002	28.93	30.28	1.35	1.00	48.75
	4/19/2002	28.93	30.25	1.32	1.00	49.75
	4/25/2002	28.93	30.24	1.31	1.00	50.75
	5/3/2002		28.96	0	1.00	51.75
	5/15/2002	28.69	29.86	1.17	1.25	53.00
	5/24/2002	28.53	29.53	1.00	0.00	53.00
	5/31/2002	28.72	29.96	1.24	1.25	54.25
	6/7/2002	28.72	29.91	1.19	1.25	54.25
	6/14/2002	28.97	30.31	1.34	0.25	54.50
	6/21/2002	29.32	30.54	1.22	1.25	55.75
	6/27/2002	29.3	30.65	1.35	1.25	57.00
	7/2/2002	29.25	30.56	1.31	1.25	58.25
	7/11/2002	29.31	30.66	1.35	1.25	59.50
	7/22/2002	29.17	30.54	1.37	1.50	61.00
	7/25/2002	29.246	30.398	1.15	1.25	62.25
	7/31/2002	29.042	30.38	1.34	1.50	63.75
	8/8/2002	29.125	30.15	1.03	0.50	64.25
	8/16/2002	29.3	35.25	5.95	2.00	66.25
	8/22/2002	28.74	30.07	1.33	1.00	67.25
	8/28/2002	28.78	29.75	0.97	0.00	67.25
	9/6/2002	28.975	30.032	1.06	0.00	67.25
	9/10/2002			0	2.00	69.25
	9/13/2002	28.63	29.29	0.66	0.00	69.25
	9/19/2002	29.415	30.43	1.01	1.00	70.25
	9/25/2002	29.4	30.279	0.88	0.25	70.50
	10/4/2002	29.345	30.19	0.85	1.50	72.00
	10/10/2002	29.455	30.315	0.86	1.50	73.50
	10/15/2002	29.495	30.285	0.79	1.50	75.00
	10/23/2002	29.66	30.32	0.66	1.50	76.50
	10/30/2002	29.32	30.575	1.26	1.25	77.75
	11/8/2002	29.36	30.578	1.22	1.50	79.25
	11/21/2002	29.45	30.45	1.00	1.50	80.75
	12/4/2002	29.48	30.47	0.99	1.75	82.50

TABLE 2

**SUMMARY OF FREE-PRODUCT REMOVAL
JAMES F. BELL #1E (METER #94715)**

Monitoring Well	Removal Date	Depth to Product (feet btoc)	Depth to Water (feet btoc)	Product Thickness (feet)	Volume Removed (gallons)	Cumulative Volume of Product Removed (gallons)
MW03	12/10/2002	29.48	30.23	0.75	0.75	83.25
	12/18/2002	29.38	30.28	0.90		83.25
	12/27/2002	29.45	30.21	0.76	0.50	83.75
	1/7/2003	29.45	30.26	0.81	0.00	83.75
	1/22/2003	28.75	29.46	0.71	1.00	84.75
	1/29/2003	28.76	29.34	0.58	0.75	85.50
	2/5/2003	28.29	28.77	0.48	0.66	86.16
	2/12/2003	28.78	29.33	0.55	0.80	86.96
	2/20/2003	28.77	29.33	0.56	1.00	87.96
	2/28/2003	28.8	29.31	0.51	0.60	88.56
	3/2/2003	28.81	29.27	0.46	0.50	89.06
	3/6/2003	28.79	29.31	0.52	0.75	89.81
	3/19/2003	28.82	29.3	0.48	0.50	90.31
	3/26/2003	28.82	29.33	0.51	0.33	90.64
	4/2/2003	28.8	29.33	0.53	0.50	91.14
	4/10/2003	28.84	29.32	0.48	0.33	91.47
	4/18/2003	28.85	29.29	0.44	0.30	91.77
	4/28/2003	28.86	29.19	0.33	0.20	91.97
	5/7/2003	28.83	29.25	0.42	0.30	92.27
	5/13/2003	28.85	29.27	0.42	0.30	92.57
	5/21/2003	28.86	29.29	0.43	0.30	92.87
	5/27/2003	28.85	29.21	0.36	0.25	93.12
	6/3/2003	28.84	29.23	0.39	0.33	93.45
	6/9/2003	28.84	29.2	0.36	0.33	93.78
	6/16/2003	28.82	29.2	0.38	0.25	94.03
	6/19/2003	28.86	29.16	0.30	0.00	94.03
	6/23/2003	28.83	29.23	0.40	0.25	94.28
	7/1/2003	29.78	29.85	0.07	0.30	94.58
	7/10/2003	29.96	30.39	0.43	0.00	94.58
	7/15/2003	30.12	30.29	0.17	0.40	94.98
	7/21/2003	30.11	30.24	0.13	0.40	95.38
	7/29/2003	29.89	30.14	0.25	0.40	95.78
	8/4/2003	29.62	29.94	0.32	0.36	96.14
	8/11/2003	30.02	30.09	0.07	0.86	97.00
	8/18/2003	30.01	30.09	0.08	0.59	97.59
	8/25/2003	30	30.09	0.09	0.53	98.12
	9/2/2003	30.03	30.12	0.09	0.49	98.62
	9/8/2003	30.05	30.15	0.10	0.38	98.99
	9/15/2003	29.97	30.05	0.08	0.47	99.46

TABLE 2

**SUMMARY OF FREE-PRODUCT REMOVAL
JAMES F. BELL #1E (METER #94715)**

Monitoring Well	Removal Date	Depth to Product (feet btoc)	Depth to Water (feet btoc)	Product Thickness (feet)	Volume Removed (gallons)	Cumulative Volume of Product Removed (gallons)
MW03	9/22/2003	28.7	29.14	0.44	0.33	99.79
	9/29/2003	29.95	29.98	0.03	0.73	100.52
	10/6/2003	29.94	30	0.06	0.31	100.84
	10/13/2003	29.89	29.95	0.06	0.42	101.26
	10/20/2003	29.8	29.86	0.06	0.38	101.63
	10/27/2003	29.8	29.85	0.05	0.59	102.23
	11/3/2003	29.8	29.83	0.03	0.16	102.38
	11/10/2003	29.65	29.66	0.01	0.16	102.54
	11/17/2003	29.31	29.32	0.01	0.03	102.57
	11/26/2003	29.31	29.32	0.01	0.01	102.58
	12/4/2003		29.23	0	0.00	102.58
	12/9/2003		29.24	0	0.00	102.58
	12/15/2003		28.4	0	0.00	102.58
	1/2/2004		28.42	0	0.00	102.58
	1/11/2004	28.36	28.37	0.01	0.00	102.58
	1/16/2004	28.245	28.25	0.00	0.00	102.59
	1/23/2004		28.22	0	0.00	102.59
	1/30/2004	28.22	28.222	0.00	0.00	102.59
	2/6/2004		28.23	0	0.00	102.59
	2/12/2004		28.2	0	0.00	102.59
	2/18/2004		28.17	0	0.00	102.59
	2/27/2004		28.2	0	0.00	102.59
	3/16/2004		28.21	0	0.00	102.59
	4/13/2004		28.19	0	0.00	102.59
	5/10/2004		28.22	0	0.00	102.59
	6/2/2004		28.19	0	0.00	102.59
	6/9/2004		28.21	0	0.00	102.59
	7/26/2004		28.08	0	0.00	102.59
	8/16/2004		28.08	0	0.00	102.59
	9/9/2004		28.02	0	0.00	102.59
	9/10/2004		28.03	0	0.00	102.59
	10/11/2004		27.96	0	0.00	102.59
	11/17/2004		27.87	0	0.00	102.59
	12/13/2004		27.87	0	0.00	102.59
	12/14/2004		27.825	0	0.00	102.59
	1/17/2005		27.78	0	0.00	102.59
	2/15/2005		27.74	0	0.00	102.59
	3/16/2005		27.72	0	0.00	102.59
	3/17/2005		27.69	0	0.00	102.59

TABLE 2

**SUMMARY OF FREE-PRODUCT REMOVAL
JAMES F. BELL #1E (METER #94715)**

Monitoring Well	Removal Date	Depth to Product (feet btoc)	Depth to Water (feet btoc)	Product Thickness (feet)	Volume Removed (gallons)	Cumulative Volume of Product Removed (gallons)
MW03	4/15/2005		27.69	0	0.00	102.59
	5/17/2005		27.38	0	0.00	102.59
	6/23/2005		27.185	0	0.00	102.59
	7/19/2005		27.065	0	0.00	102.59
	8/22/2005		26.87	0	0.00	102.59
	9/13/2005		26.78	0	0.00	102.59
	10/28/2005		26.43	0	0.00	102.59
	11/18/2005		26.44	0	0.00	102.59
	12/22/2005		26.36	0	0.00	102.59
	1/18/2006		23.36	0	0.00	102.59
	2/21/2006		26.52	0	0.00	102.59
	3/25/2006		26.6	0	0.00	102.59
	4/28/2006		26.73	0	0.00	102.59
	5/23/2006		26.78	0	0.00	102.59
	6/14/2006		26.71	0	0.00	102.59