1625 N French Dr., Hobbs, NM 88240

District II

1301 W Grand Ave, Artesia, NM 88210

District III

1000 Rio Brazos Rd, Aztec, NM 87410

1220 S St Francis Dr , Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

July 21, 2008

Form C-144

For temporary pits, closed-loop sytems, and below-grade tanks, submit to the appropriate NMOCD District Office.

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office

Pit, Closed-Loop System, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application Type of action: Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method Modification to an existing permit X Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request Please be advised that approval of this request does not relieve the operator of hability should operations result in pollution of surface water, ground water of the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances Operator: Burlington Resources Oil & Gas Company, LP OGRID#: 14538 Address: PO Box 4289, Farmington, NM 87499 Facility or well name: McDurmitt Com 100S API Number: 30-045-34358 OCD Permit Number: E(SWNW) Section: U/L or Otr/Otr: 6 Township: 31N Range: 12W County: San Juan Center of Proposed Design: Latitude: 36.93170' N 108.14196' W NAD: 1927 X 1983 Longitude: Surface Owner: X Federal State Private Tribal Trust or Indian Allotment X Pit: Subsection F or G of 19.15.17.11 NMAC X Drilling Workover Temporary: Permanent Emergency Cavitation P&A XLined X LLDPE HDPE PVC Other Unlined Liner type: Thickness 20 mil X String-Reinforced X Welded X Liner Seams. Factory Other 4400 bbl Dimensions L 65' Volume: Subsection H of 19 15 17 11 NMAC Closed-loop System: Type of Operation. Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent) Drying Pad Above Ground Steel Tanks Haul-off Bins Other Unlined Liner type: Thickness LLDPE HDPE PVD Other Lined mil Liner Seams. Welded Factory Other ULI DUUD Below-grade tank: Subsection I of 19 15.17.11 NMAC OIL CONS. DIV. DIST. 3 Type of fluid. Volume: bbl Tank Construction material: _1808eg Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off Visible sidewalls and liner Visible sidewalls only Other Liner Type Thickness HDPE IPVC Other mıl

Alternative Method:

Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval

Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pit, temporary pits, and below-grade tanks)									
Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church)									
Four foot height, four strands of barbed wire evenly spaced between one and four feet									
X Alternate Please specify 4' hogwire fence with a single strand of barbed wire on top.									
7									
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)									
Screen Netting Other									
Monthly inspections (If netting or screening is not physically feasible)									
8									
Signs: Subsection C of 19.15.17.11 NMAC 12" X 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers									
X Signed in compliance with 19.15 3.103 NMAC									
9 Administrative Approvals and Exceptions:		ľ							
Justifications and/or demonstrations of equivalency are required. Please refer to 19 15.17 NMAC for guidance.									
Please check a box if one or more of the following is requested, if not leave blank:									
Administrative approval(s): Requests must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for cons	ideration of an	proval							
Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	deration of up	provar							
Siting Criteria (regarding permitting): 19.15.17.10 NMAC									
Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable									
source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for									
consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria									
does not apply to drying pads or above grade-tanks associated with a closed-loop system.									
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank.	Yes	□No							
- NM Office of the State Engineer - tWATERS database search; USGS; Data obtained from nearby wells		_							
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).	∐Yes	∐No							
- Topographic map; Visual inspection (certification) of the proposed site									
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial	Yes	□No							
application.		_							
(Applies to temporary, emergency, or cavitation pits and below-grade tanks)	NA								
- Visual inspection (certification) of the proposed site, Aerial photo; Satellite image	l —	_							
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes	∐No							
(Applied to permanent pits) Years I proportion (confiferation) of the proportion desired April Inductor Setallity are as	∐NA	İ							
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image									
Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.	Yes	∐No							
NIM Office of the Case Fundament WATERS detailed and by Visual Secretary (1945) and 1945									
- NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site.	l								
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended	Yes	∐No							
- Written confirmation or verification from the municipality; Written approval obtained from the municipality									
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	Yes	No							
Within the area overlying a subsurface mine.	□Yes	□No							
- Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division		П о							
Within an unstable area.	Yes	No							
- Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological		_							
Society; Topographic map Within a 100-year floodplain	☐ Yes	□No							
- FEMA map	ا ا	□,,,							

Temporary Pits, Emergency Pits and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19 15.17.9 NMAC Instructions Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC
Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15 17.10 NMAC
Design Plan - based upon the appropriate requirements of 19.15.17 11 NMAC
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17 12 NMAC
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15 17 13 NMAC
Previously Approved Design (attach copy of design) API or Permit
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15 17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 15.17.9 NMAC and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API
Previously Approved Operating and Maintenance Plan API
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report - based upon the requirements of Paragraph (I) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design: based upon the appropriate requirements of 19 15 17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17 11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15 17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17 12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H2S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15 17.13 NMAC
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.
Type: X Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative
Proposed Closure Method Waste Excavation and Removal
Waste Removal (Closed-loop systems only)
X On-site Closure Method (only for temporary pits and closed-loop systems)
X In-place Burial On-site Trench
Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
Waste Excavation and Removal Closure Plan Checklist: (19.15 17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15 17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15 17.13 NMAC
Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19 15.17.13 NMAC
Ste Reclamation Plan - based upon the appropriate requirements of Subsection G of 19 15.17.13 NMAC

Form C-144 Oil Conservation Division Page 3 of 5

16	The last 1 of Pine Only (10 15 17 12 D NIMAC)							
Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Instructions: Please identify the facility or facilities for the disposal of liquids, drilling flu	Tanks of Haut-off Bins Only: (19.15.17.13.D NMAC) uids and drill cuttings. Use attachment if more than two fa	acilities						
are required. Disposal Faculty Name: I	Disposal Facility Permit #							
	Disposal Facility Permit #:							
Will any of the proposed closed-loop system operations and associated activities Yes (If yes, please provide the information No								
Required for impacted areas which will not be used for future service and operations. Soil Backfill and Cover Design Specification - based upon the appropriate Re-vegetation Plan - based upon the appropriate requirements of Subsecti Site Reclamation Plan - based upon the appropriate requirements of Subsecti	on I of 19.15.17.13 NMAC	c						
17								
Siting Criteria (Regarding on-site closure methods only: 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan Receptain siting criteria may require administrative approval from the appropriate district office or for consideration of approval – Justifications and/or demonstrations of equivalency are required	may be considered an exception which must be submitted to the							
Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - 1WATERS database search, USGS: Data obtain	ed from nearby wells	Yes XNo						
Ground water is between 50 and 100 feet below the bottom of the buried waste		Yes X No						
- NM Office of the State Engineer - IWATERS database search; USGS; Data obtained	ed from nearby wells	□N/A						
Ground water is more than 100 feet below the bottom of the buried waste.		X Yes No						
- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained	ed from nearby wells	□ N/A						
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant (measured from the ordinary high-water mark).	Yes X No							
- Topographic map; Visual inspection (certification) of the proposed site								
Within 300 feet from a permanent residence, school, hospital, institution, or church in ex - Visual inspection (certification) of the proposed site, Aerial photo; satellite image	Yes XNo							
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than purposes, or within 1000 horizontal fee of any other fresh water well or spring, in existen - NM Office of the State Engineer - iWATERS database; Visual inspection (certificat Within incorporated municipal boundaries or within a defined municipal fresh water well pursuant to NMSA 1978, Section 3-27-3, as amended.	to at the time of the initial application. tion) of the proposed site I field covered under a municipal ordinance adopted	Yes X No						
 Written confirmation or verification from the municipality, Written approval obtain Within 500 feet of a wetland US Fish and Wildlife Wetland Identification map; Topographic map, Visual inspec 	. ,	Yes XNo						
Within the area overlying a subsurface mine. - Written confirantion or verification or map from the NM EMNRD-Mining and Mi		Yes X No						
Within an unstable area. - Engineering measures incorporated into the design, NM Bureau of Geology & Mine		Yes X No						
Topographic map Within a 100-year floodplain - FEMA map		Yes X No						
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of by a check mark in the box, that the documents are attached.	the following items must bee attached to the closure	e plan. Please indicate,						
X Siting Criteria Compliance Demonstrations - based upon the appropriate r	requirements of 19.15.17.10 NMAC							
X Proof of Surface Owner Notice - based upon the appropriate requirements	of Subsection F of 19.15.17.13 NMAC							
Construction/Design Plan of Burial Trench (if applicable) based upon the	appropriate requirements of 19.15.17.11 NMAC							
Construction/Design Plan of Temporary Pit (for in place burial of a drying		9.15.17.11 NMAC						
X Protocols and Procedures - based upon the appropriate requirements of 19								
Confirmation Sampling Plan (if applicable) - based upon the appropriate r								
X Waste Material Sampling Plan - based upon the appropriate requirements								
X Disposal Facility Name and Permit Number (for liquids, drilling fluids and X Soil Cover Design - based upon the appropriate requirements of Subsection	•	nnot be achieved)						
X Re-vegetation Plan - based upon the appropriate requirements of Subsection	on I of 19.15 17.13 NMAC							
X Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC								

Form C-144 Oil Conservation Division Page 4 of 5

Operator Application Certification:
I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief
Name (Print) Crystal Tafoya Title: Regulatory Technician
Signature Crystal Taloya Date: 10/16/08
e-mail address: <u>crystalltafoya@conocophillips.com</u> Telephone 509-326-9837
20 OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment)
OCD Representative Signature: Approval Date: 10/29/62
Title: Enviro Spec OCD Permit Number:
Closure Report (required within 60 days of closure completion): Subsection K of 19 15 17 13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed. Closure Completion Date:
22 Closure Method:
Waste Excavation and Removal On-site Closure Method Alternative Closure Method Waste Removal (Closed-loop systems only)
If different from approved plan, please explain
23
Closure Report Regarding Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only:
Instructions: Please identify the facility or facilities for where the liquids, drilling fluids and drill cuttings were disposed. Use attachment if more than two facilities were utilized.
Disposal Facility Name: Disposal Facility Permit Number:
Disposal Facility Name Disposal Facility Permit Number
Were the closed-loop system operations and associated activities performed on or in areas that will not be used for future service and operations?
Yes (If yes, please demonstrate complilane to the items below)
Required for impacted areas which will not be used for future service and operations: Site Reclamation (Photo Documentation)
Soil Backfilling and Cover Installation
Re-vegetation Application Rates and Seeding Technique
24
Closure Report Attachment Checklist: Instructions: Each of the following items must be attached to the closure report. Please indicate, by a check mark in
the box, that the documents are attached. Proof of Closure Notice (surface owner and division)
Proof of Deed Notice (required for on-site closure)
Plot Plan (for on-site closures and temporary pits)
Confirmation Sampling Analytical Results (if applicable)
Waste Material Sampling Analytical Results (if applicable)
Disposal Facility Name and Permit Number
Soil Backfilling and Cover Installation
Re-vegetation Application Rates and Seeding Technique
Site Reclamation (Photo Documentation) On-site Closure Location. Latitude Longitude: NAD 1927 1983
On-site Closure Location. Latitude Longitude: NAD 1927 1983
25
Operator Closure Certification:
Thereby certify that the information and attachments submitted with this closure report is ture, accurate and complete to the best of my knowledge and belief. I also certify that
the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.
Name (Print). Title
Signature Date
e-mail address: Telephone

Depth

114

34

Well

Y

Depth

70

19

Water

Wat∈

Colun

4

1

New Mexico Office of the State Engineer POD Reports and Downloads

1								
ıffix:								
omestic								
POD / Surface Data Report Avg Depth to Water Report Water Column Report								
Clear Form iWATERS Menu Help								
12-2-3								

Zone X

(quarters are biggest to smallest)

Tws Rng Sec q q q

31N 13W 02 1 2 3

31N 13W 02 2 2

Record Count: 2

POD Number

SJ 02590

SJ 00835

New Mexico Office of the State Engineer POD Reports and Downloads

Township: 31N	Range: 12W	Sections: 6,5,	7,8				
NAD27 X:	Y:	Zone:		Search Ra	dius:		
County:	Basin:			Number:		Suffix	ί:
Owner Name: (First)	(Last)	ļ	○Non-Do	mestic	O Dome	estic
POD / Su	face Data Report Water	Avg Column Report		to Water Re	port , ,	כ	
(Clear Form	iWATERS Mer	nu ,	Help			
	ITAW	ER COLUMN RE	PORT	10/16/200	8	e dia pao airiga a defende e e e e e e e e e e e e e e e e e e	anni anni anni anni anni anni anni anni
(quarter	s are 1=NW 2=NI	E 3=SW 4=SE)					
(quarter	s are biggest t	co smallest)			Depth	Depth	Wat∈
POD Number Tws SJ 02904 31N	Rng Sec q q q 12W 08 4 4 4	Zone	x	Y	Well 325	Water 142	Colun 18

Record Count: 1

New Mexico Office of the State Engineer POD Reports and Downloads

Towns	ship: ¦32N	Range: 12W	Sections: 3	1,32					
NAD27	X:	Y :	Zone:		Search Radius:				
County:		Basin:	1		Number:	Suffix:			
Owner Name: (F	First)	. (Last) ⊚All		○Non-Domestic	O Domesti	c		
POD / Surface Data Report Avg Depth to Water Report Water Column Report									
		Clear Form] [iWATERȘ <u>Ņ</u>	⁄lenu [Help				
		s are 1=NW	WATER COLUMN 2=NE 3=SW 4=S st to smalles	E)	10/16/2008 Depth	Depth	Wate		
POD Number	Tws	Rng Sec q	q q Zone	x	Y Well	Water C	olum		

No Records found, try again

New Mexico Office of the State Engineer POD Reports and Downloads

Township:	32N	Range: 13	BW Sections:	36,25,35				
NAD27 X:		Y :	Zone:		Search Radius:			
County:	F	Basin:			Number:	Suffix:		
Owner Name: (First)			(Last) All	***	O Non-Domestic	ODomestic		
POD / Surface Data Report Avg Depth to Water Report Water Column Report								
Clear Form iWATERS Menu Help								
277 (112)					and by a second control of the second contro			

WATER COLUMN REPORT 10/16/2008

(quarters are 1=NW 2=NE 3=SW 4=SE) (quarters are biggest to smallest) Wate Depth Depth POD Number Tws Rng Sec q q q Zone X Well Water Colum SJ 03090 32N 13W 35 3 1 1 59 47 1 32N 13W 35 3 3 2 60 35 SJ 02589

Record Count: 3


SJ 02783


32N 13W 35 3 3 4

1

62

48

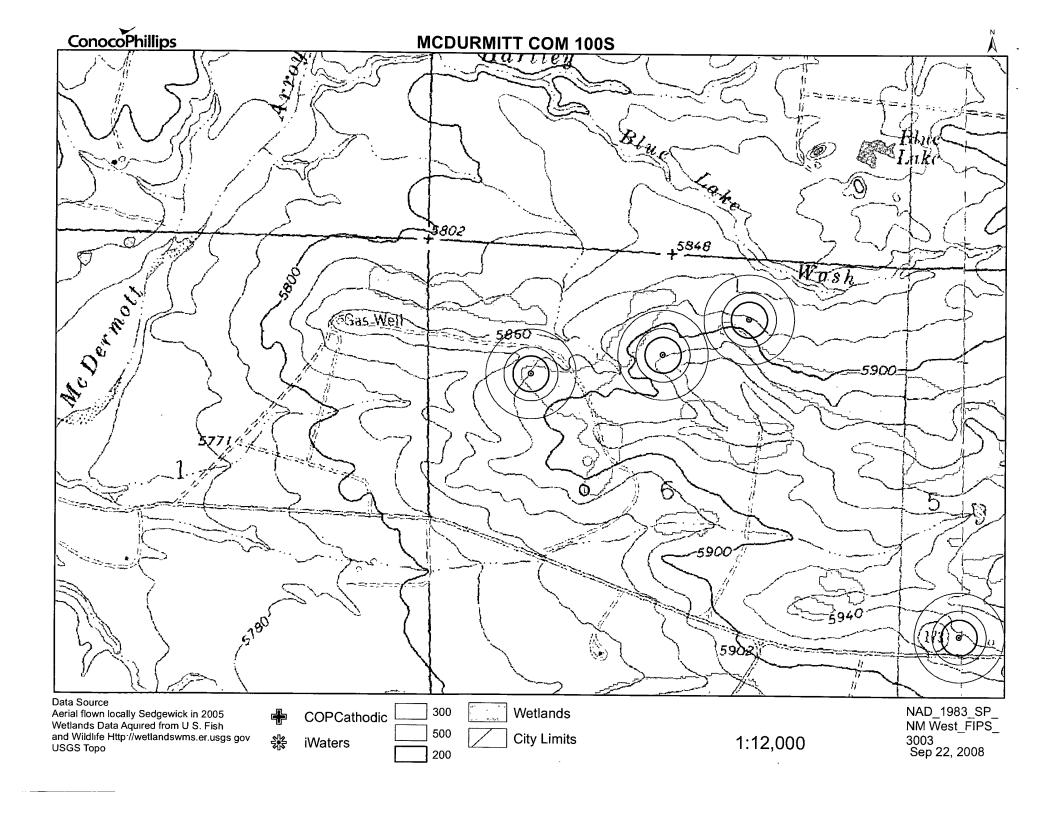

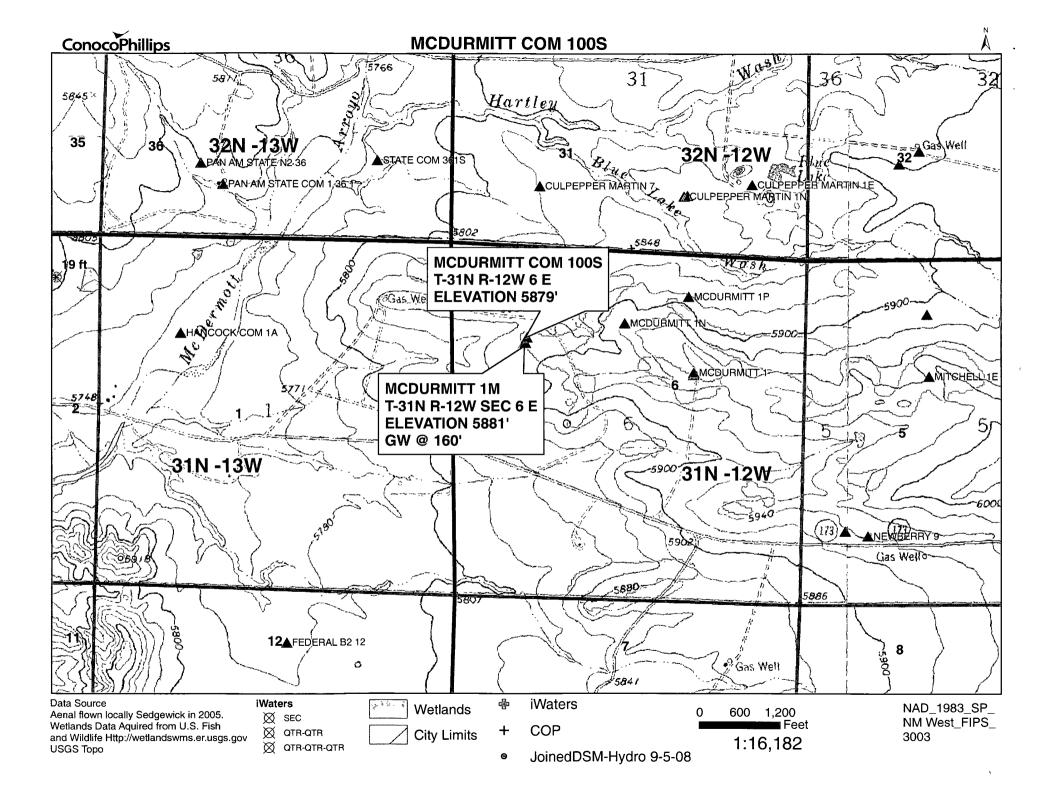

30-045- 26257

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS NORTHWESTERN NEW MEXICO (Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit E Sec. 6 Twp 31 Rng 12
Name of Well/Wells or Pipeline Serviced McDURMITT #1M
cps 1990w
Elevation 5881 Completion Date 9/1/88 Total Depth 360' Land Type* N/A
Casing, Sizes, Types & Depths N/A
If Casing is cemented, show amounts & types used N/A
If Cement or Bentonite Plugs have been placed, show depths & amounts used N/A
Depths & thickness of water zones with description of water when possible: Fresh, Clear, Salty, Sulphur, Etc. 160' SAMPLE TAKEN
Depths gas encountered: N/A
Type & amount of coke breeze used: N/A
Depths anodes placed: 340', 305', 295', 285', 275', 265'; 255'; 240'; 225'; 200'
Depths vent pipes placed: 360' DECEIVED
Vent pipe perforations: 260' MAY 31 1991
Remarks: gb #1 OIL CON. DIV
DIST

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

^{*}Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee. If Federal or Indian, add Lease Number.

Form 3160-4 (November 1983) (formerly 9-330)

UNITED STATES

SUBMIT IN DUPLICATE.


Form approved.
Budget Bureau No. 1004-0137
Expires August 31, 1985

DEPARTMENT	OF	THE	INTERIO	R
RUPEAU OF I	AND	MANAG	FMENT	


1 Secuther In-


0.

		10 01 6211	U MAN	AGEMEN	Τ		_/		019413	
WELL CO	MPLETION O	R RECON	APLET	ION RI	EPORT	AND	LOG*	G. IF IN	HAN. ALLO	TYPE OF THIRS NA
L TYPE OF WE	Whit -	J Weile XX			ther R	ECEI	VED		CREE WEN	
2. MANL OF OPERA	ron L	nock [1:3 \	<u> </u>	ther	AN 06	1986		urmitt	,
El Paso I	Natural Gas Co	mpany		1***	· / ·			9 WELL	NO.	}
P. O. Box	x 4289, Farmin)	FARMIN	GTON RES	MANAGEM CURST AF	EA TO. FIELD		US PILDCAT ,
At surface	450'N, 1100'N		caraance	with any	State regin	rements)	19. 19 Cara	· ·	T . R., M., C	ota/Blanco
	terval reported below	•			•	'~~ j	- 4 3			-31-N, R-1
At total depth					<u>~</u>			NMP	Μ	
				RMIT NO.		DATE INSI			Juan	NM LEY. CASINGHEAD
15. DATE SPUDDED 11-7-85	11-20-85	1	L2-18-		18	. CLEVATIO	5881 t	B. RT. GB. ETC.) GL	• 15. L	5881'
20. TOTAL DEPTH, MD	1	K T.D., MD A TV	D 22.	IF MILTIT	T.	. 25	DRELLEU E		EJON	CABLE TOOLS
6931 '	VALUED, OF THIS CONT	120 1	BOTTOM.	NAME (MD	TWO			Rotary	1 25	NO MAS DIRECTIONA
6774-690	2' (Basin Dako	ota)							l	NO NO
26. TYPE ELECTRIC A	ND OTHER LOGS RIN	orrelatio	on Gan	ıma-Rav	Log:				27. 74	S WELL COREC
	g; Ind. Log; D	ual Ind.	Log;	Format	ion Der			L;Temp S.	<u> </u>	No
29. CANING SIZE	WEIGHT, LB./FT	DEPTH SET		ID (Report		ACL IN ICE		G RECORD	1	AMOUNT PULLED
9 5/8"	32.3#	341'		12 1			224 c			
	23.0#	4150	<u>'</u>	8 3	<u> </u>		1257 c	u ft		
	LIVE	RECORD	i			(30.		TUBING RE	2006	
BIZE			CKS CEN	EAL S	CREEN (MD		SIZE ;	DEPTH SET (PACKER SET (MD)
4 1/2"	3982' 69	28' 5	34 cu	ft			/8"	39721		5025'
PERFORATION RECO	ED (Interval, size and	numaeri n					/2"	6899'		
					EPTH INT			TURE, CEMES		
	Perf'd (DK) , 6786, 6788,				5774-69					& 83,890 ·
6, 679 8, 6849	, 6852, 6855,	6858, 68	371,6	874,						treated
	, 6896, 6899, wer Pt) 4723,				4723-4 <u>9</u>	22'	72.	000# 20/4) sand	§ 94,960 slickwat
stinued Perf'	s listed on b		ing, yas	PRODUC				WELL	STATUS	& 87,330 Profitekwat
11-30-85	HOURS TESTED , CH	OKE SIZE	PROD'Y		5 L—88L.	GAN		"ATER-BB		ut in
	SI · 7 Days	3/4"	TEST PF	<u> </u>	0		79 MCF			0
		HOLE RATE	***************************************	0	18	344	I WATER	MRL.	ĺ	O
Shut in to b		ented, etc.)						Vodebibi		RECORD
Temp Survey 5. I bereby certify th	at tae foregoing and a	attached Inform	DALION IS	complete	ind correct	t as deter	nined from	ail availabje k	ropa 1	986
SIGNED		Menz	TITL		rilling	_		F ARMiR ∂ ₹	10	ree area

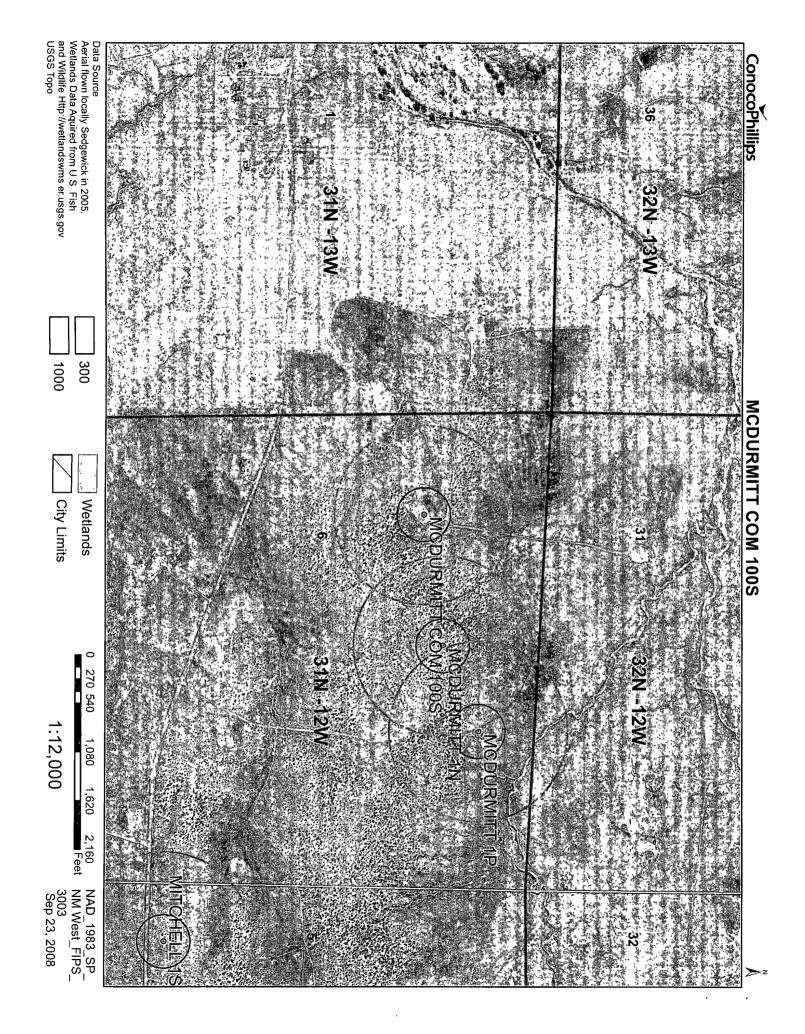


McDurmitt Com 100S Mines, Mills and Quarries Web Map

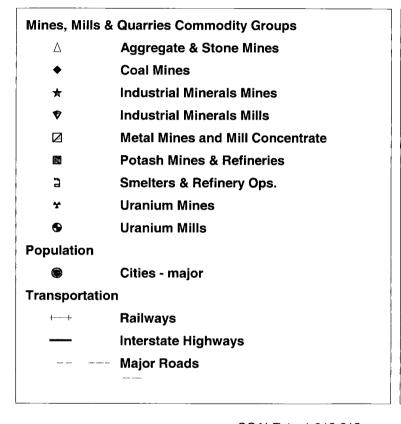

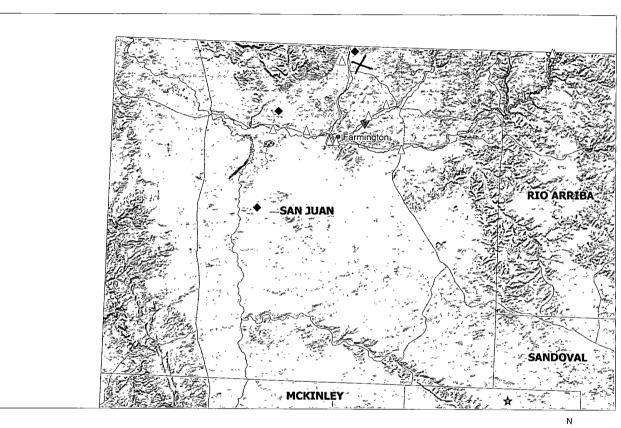





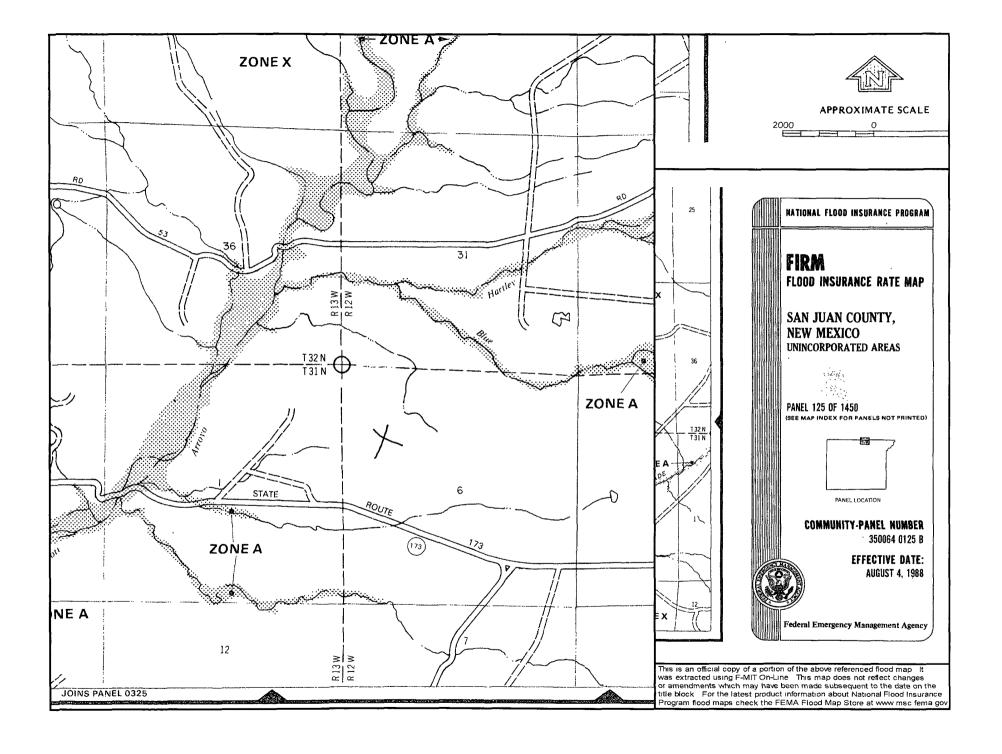

Hydrogeological Report for McDurmitt Com 100S

Regional Geological context:

The Nacimiento Formation is of Paleocene age (Baltz, 1967, p. 35). It crops out in a broad band inside the southern and western margins of the central basin and in a narrow band along the west face of the Nacimiento Uplift. The Nacimiento is a nonresistant unit and typically erodes to low, rounded hills or forms badland topography.

The Nacimiento Formation occurs in approximately only the southern two-thirds of the San Juan Basin where it commformably overlies and intertongues with the Ojo Alamo Sandstone (Fassett, 1974, p. 229). The Nacimiento Formation grades laterally into the main part of the Animas Formation (Fassett and Hinds, 1971, p. 34); thus, in this area, the two formations occupy the same stratigraphic interval.

Strata of the Nacimiento Formation were deposited in lakebeds in the central basin area with lesser deposition in stream channels (Brimhall, 1973, p. 201). In general, the Nacimiento consists of drab, interbedded black and gray shale with discontinuous, white, medium- to very coarse grained arkosic sandstone (Stone e al., 1983, p.30). Stone et al. indicated that the formation may contain more sandstone than commonly reported because some investigators assume the slope-forming strata in the unit area shales, whereas in many places the strata actually are poorly consolidated sandstones. Total thickness of the Nacimiento Formation ranges from about 500 to 1,300 feet. The unit generally thickens from the basin margins toward the basin center (Steven et al., 1974). The sandstone deposits within the Nacimiento Formation are much thinner than the total thickness of the formation because their environment of deposition was localized stream channels (Brimhall, 1973, p. 201). The thickness of the combined San Jose, Animas, and Nacimiento Formations ranges from 500 to more than 3.500 feet.

Hydraulic Properties:

Reported well yields for 53 wells completed in either the Animas or Nacimiento Formations range from 2 to 90 gallons per minute and the median yield is 7.5 gallons per minute. The primary use of water from Nacimiento and Animas Formations is domestic and livestock supplies. There are no known aquifer tests for the Animas or Nacimiento Formations, but specific capacities reported for six wells range from 0.24 to 2.30 gallons per minute per foot of drawdown (Levings et al., 1990).

The Animas and Nacimiento Formations are in many ways hydrologically similar to the San Jose Formation because sands in both units produce approximately the same quantities of water. However, the greater percentage of fine materials in the Animas and Nacimiento Formations may restrict downward vertical leakage to the Ojo Alamo Sandstone or Kirtland Shale. The poorly cemented fine material is highly erodible, forms a badland terrain, and supports only spotty vegetation. These conditions are more conductive to runoff than retention of precipitation.

References:

Baltz, E.H., 1967, Stratigraphy and regional tectonic implications of part of Upper Cretaceous rocks, east-central San Juan Basin, New Mexico: USGS Professional Paper

552, 101 p.

Brimhall, R.M., 1973, Ground-water hydrology of Tertiary rocks of the San Juan Basin, New Mexico, in Fassett, J.E., ed., Cretaceous and Tertiary rocks of the Southern Colorado Plateau: Four Corners Geological Society Memoir, p. 197-207.

Fassett, J.E., 1974, Cretaceous and Tertiary rocks of the eastern San Juan Basin, New Mexico and Colorado, in Guidebook of Ghost Ranch, central-northern New Mexico: New Mexico Geological Society, 25th Field Conference, p. 225-230.

Fassett, J.E., and Hinds, J.S., 1971, Geology and fuel resources of the Fruitland Formation and Kirtland Shale of the San Juan Basin, New Mexico and Colorado: USGS Professional Paper 676, 76 p.

Levings, G.W., Craigg, S.d., Dam, W.L., Kernodle, J.M., and Thorn, C.R., 1990, Hydrogeology of the San Jose, Nacimiento, and Animas Formations in the San Juan structural basin, New Mexico, Colorado, Arizona, and Utah: USGS Hydrologic Investigations Atlas HA-720-A, 2 sheets.

Stone, W.J., Lyford, F.P., Frenzel, P.F., Mizell, N.H., and Padgett, E.T., 1983, Hydrogeology and water resources of San Juan Basin, New Mexico: New Mexico Bureau of Mines and Mineral Resources, Hydrologic Report 6.

Siting Criteria Compliance Demonstration & Hydro Geologic Analysis

The McDurmitt Com 100S is not located in an unstable area. The location is not over a mine and is not on the side of a hill as indicated on the Mines, Mills and Quarries Map and Topographic Map. The location of the excavated pit material will not be located within 300' of any continuously flowing watercourse or 200' from any other watercourse as indicated on the Topographic Map. The location is not within a 100-year floodplain area as indicated on the FEMA Map. The Cathodic well data from the McDurmitt 1M has an elevation of 5881' and groundwater depth of 160'. The subject well has an elevation of 5879' which is 2' less than the McDurmitt 1M, therefore the groundwater depth is greater than 150'. There are no iWATERS data points located in the area as indicated on the TOPO Map. The hydro geologic analysis indicates the groundwater depth and the Nacimiento formation will create a stable area for this new location.

Tafoya, Crystal

From: Sent:

Tafoya, Crystal

Thursday, October 16, 2008 10:55 AM

To: Subject: 'mark_kelly@nm.blm.gov' Surface Owner Notification

The following locations temporary pit will be closed on-site. Please let me know if you have any questions.

Grambling-C-202S_ McDurmitt_Com_100S_ Huerfano Unit 305 Canyon Largo Unit 250N Federal A 1E Helms Federal 1G

Thank you,

Crystal L. Tafoya Regulatory Technician ConocoPhillips Company San Juan Business Unit Phone: (505) 326-9837

Email: Crystal.Tafoya@conocophillips.com

District I 1625 N. French Dr., Hobbs, NM 88240

State of New Mexico Energy, Minerals & Natural Resources Department

Form C-102 Revised October 12, 2005 Instructions on back Submit to Appropriate District Office State Lease - 4 Copies Fee Lease - 3 Copies

District II 1301 W Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe. NM 87505

District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

AMENDED REPORT

			WELL	LOCAT	ION AND A	CREAGE DED:		AT		
۸'	PI Numb	er	,	Pool Code		7.4.	³Pool Name	,		
	72359 - 71629 BLANCO PICTURED CLIFFS - BASIN FRUITLAND COAL									
'Property	Coce				Property	/ Name		`	*We	11 Number
, .					MCDURMI	•		1		00s
700070	1-									
OGRID N		ŀ			*Operator		<u>.</u>	1		levation
14538	3		BURLIN	IGTON F	RESOURCES (DIL & GAS CO	MPANY, LP	. 1		5879
-				:	¹⁰ Surface	Location			,	
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/Wes	it line	County
Ε	6	31N	12W		1405	NORTH	1125	WES	ST,	SAN JUAN
		11 E	ottom	Hole L	ocation I	f Different	From Surf	ace		
UL or lot no	Section.	Township	Range	Lat Idn	Feet from the	North/South line	Feet from the	East/Wes	t line	County
			2							<u></u>
¹² Dedicated Acres	153.9	31 Acres	(NW/4)	- PC	¹³ Joint or Infall	¹⁴ Conspladataon Code	¹⁵ Order No.	<u> </u>		<u> </u>
312.76 Acres (N/2) - FC										
NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED										
NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION										
1278 /	12.1	136	3 56'		.àea	Λ ΛΛ '	17 OPER	ATOR (CERTÍ	FÍCATION
12/0.2	1278.42 1363.56 2640.00 17 OPERATOR CERTIFICATION I hereby certify that the information contained thereby is true and complete to the pest of my									

herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased maneral interest in the land including the proposed bottom-hole location or has a right to drill this well at this location prisuant to a contract with an owner of such a maneral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. LOT LOT LOT LEASE LO:T ξį FEE 2 1 ത 1125 1505 Signature Date 7 .34 LAT: 36:93170 'N LONG: 108:14196 'W Virgil E. Chavez LEASE USA. 220 LOT 1319. DATUM: NADB3 NM-019413 Pranted Name LAT: 36 55 9022 N LONG: 108 0B 4799 W DATUM: NAD27 5 "SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or undemy supervision, and that the same is true and correct to the best of my belief. Date of Survey: MARCH 16, 2007 Signature and Seal of Professional Surveyor LOT SON C. EDWARD 6 AN MEXIC 9 8 PROFESSIONAL PROFESSIONAL SAN EYOH 2640. 2612. LOT DWARDS 2630.76 1243.44 1315.38 Certificate Number

BURLINGTON RESOURCES OIL & GAS COMPANY McDURMITT COM #100° 1405' FNL & 1125' FWL, SECTION 6, T31N, R12W, NMPM SAN JUAN COUNTY, NEW MEXICO ELEVATION: 5879'

HORIZONTAL SCALE I"=40' C/L				VERTICAL SCALE ("=30"			
A-A'							
58891							
5879'						-	
5869'			, .				
					,		
C/L							
B-B'				· · · · · · ·			
5889'			, , ,				
58791		~ ~	7/			<u> </u>	
5869'					;		
							, . ,
C/L							
C-C'							
5889'						i	
5879'		/~			,	ZZ.,	
5869'			:				

NCE SURVEYS IS NOT LIABLE FOR LOCATION OF UNDERGROUND UTILITIES OF PIPELINES.

CONTRACTOR SHOULD CONTACT ONE-CALL FOR LOCATION OF ANY MARKED OR UNMARKED UNDERGROUND UTILITIES OR PIPELINES ON WELLPAD AND/OR ACCESS ROAD AT LEAST TWO WORKING DAYS PRIOR TO CONSTRUCTION.

Burlington Resources Oil & Gas Company, LP San Juan Basin Closure Plan

In accordance with Rule 19.15.17.12 NMAC the following information describes the closure requirements of temporary pits on Burlington Resources Oil & Gas Company, LP (BR) locations. This is BR's standard procedure for all temporary pits. A separate plan will be submitted for any temporary pit which does not conform to this plan.

All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of pit closure. Closure report will be filed on C-144 and incorporate the following:

- Details on Capping and Covering, where applicable.
- Plot Plan (Pit Diagram)
- Inspection Reports
- Sampling Results
- C-105
- Copy of Deed Notice will be filed with County Clerk

General Plan:

- All free standing liquids will be removed at the start of the pit closure process from the pit and disposed of in a division-approved facility or recycle, reuse or reclaim the liquids in a manner that the appropriate division district office approves. The facilities to be used will be Basin Disposal (Permit #NM-01-005) and Envirotech Land Farm (Permit #NM-01-011).
- 2. The preferred method of closure for all temporary pits will be on-site burial, assuming that all the criteria listed in sub-section (B) of 19.15.17.13 are met.
- 3. The surface owner shall be notified of BR's closing of the temporary pit prior to closure as per the approved closure plan via certified mail, return receipt requested.
- 4. Within 6 months of the Rig Off status occurring BR will ensure that temporary pits are closed, re-contoured, and reseeded.
- 5. Notice of Closure will be given prior to closure to the Aztec Division office between 72 hours and one week via email, or verbally. The notification of closure will include the following:
 - i. Operator's name
 - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.
- 6. Liner of temporary pit shall be removed above "mud level" after stabilization. Removal of liner will consist of manually or mechanically cutting liner at mud level and removing all remaining liner. Care will be taken to remove "All" of the liner i.e., edges of liner entrenched or buried. All excessive liner will be disposed of at the San Juan County Landfill located on CR 3100.
- 7. Pit contents shall be mixed with non-waste containing, earthen material in order to achieve the solidification process. The solidification process will be accomplished using a combination of natural drying and mechanically mixing. Pit contents will be mixed with non-waste, earthen material to a consistency that is deemed a safe and stable. The mixing ratio shall not exceed 3 parts clean soil to 1 part pit contents.
- 8. A five point composite sample will be taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.13(B)(1)(b). In the event that the criteria are not met, all contents will be handled per Subparagraph (a) of Paragraph (1) of Subsection B of 19.15.17.13 i.e., Dig and haul.

Components	Tests Method	Limit (mg/Kg)
Benzene	EPA SW-846 8021B or 8260B	0.2
BTEX	EPA SW-846 8021B or 8260B	50
TPH	EPA SW-846 418.1	2500
GRO/DRO	EPA SW-846 8015M	-5 Q0
Chlorides	EPA 300.1	(1000/500
		·

- 9. Upon completion of solidification and testing standards being passed, the pit area will be backfilled with compacted, non-waste containing, earthen material. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater. If standard testing fails BR will dig and haul all contents pursuant to 19.15.17.13.i.a. After doing such, confirmation sampling will be conducted to ensure a release has not occurred.
- 10. During the stabilization process if the liner is ripped by equipment the Aztec OCD office will be notified within 48 hours and the liner will be repaired if possible. If the liner can not be repaired then all contents will be excavated and removed.
- 11. Dig and Haul Material will be transported to the Envirotech Land Farm located 16 miles south of Bloomfield on Angel Peak Road, CR 7175. Permit # NM010011
- 12. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Reshaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.
- 13. Notification will be sent to OCD when the reclaimed area is seeded.
- 14. BR shall seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM stipulated seed mixes will used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

Туре	Variety or Cultivator	PLS/A
Western wheatgrass	Arriba	3.0
Indian ricegrass	Paloma or Rimrock	3.0
Slender wheatgrass	San Luis	2.0
Crested wheatgrass	Hy-crest	3.0
Bottlebrush Squirreltail	Unknown	2.0
Four-wing Saltbrush	Delar	.25

Species shall be planted in pounds of pure live seed per acre: Present Pure Live Seed (PLS) = Purity X Germination/100 Two lots of seed can be compared on the basis of PLS as follows:

Source No. One (poor quality)

Purity

50 percent

Germination

40 percent

Percent PLS

20 percent

Source No. two (better quality)

Purity

80 percent

Germination

63 percent

Percent PLS

50 percent

5 lb. bulk seed required to make 2 lb. bulk seed required to make

1 lb. PLS

15. The temporary pit will be located with a steel marker, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial upon the abandonment of all the wells on the pad. The marker will be flush with the ground to allow access of the active well pad and for safety concerns. The marker will include a threaded collar to be used for future abandonment. The top of the marker will contain a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the operator's information at the time of all wells on the pad are abandoned. The operator's information will include the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.