

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENTFORM APPROVED  
OMB No. 1004-0136  
Expires November 30, 2000

## APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work: ☒ DRILL ☐ REENTER1b. Type of Well: ☐ Oil Well ☒ Gas Well ☐ Other ☒ Single Zone ☐ Multiple Zone2. Name of Operator  
CONOCOPHILLIPS COMPANYContact: PATSY CLUGSTON  
E-Mail: pclugs@ppco.com3a. Address  
5525 HWY.  
FARMINGTON, NM 874013b. Phone No. (include area code)  
Ph: 505.599.3454  
Fx: 505-599-3442

4. Location of Well (Report location clearly and in accordance with any State requirements.)\*

At surface NWNE 717FNL 1975FEL

At proposed prod. zone

14. Distance in miles and direction from nearest town or post office\*  
19 MILES E NE OF BLANCO, NM15. Distance from proposed location to nearest property or  
lease line, ft. (Also to nearest drig. unit line, if any)  
71716. No. of Acres in Lease  
2557.0018. Distance from proposed location to nearest well, drilling,  
completed, applied for, on this lease, ft.19. Proposed Depth  
6222 MD  
6222 TVD21. Elevations (Show whether DF, KB, RT, GL, etc.)  
6840 GL22. Approximate date work will start  
11/15/20035. Lease Serial No.  
NMSF080379

6. If Indian, Allottee or Tribe Name

7. If Unit or CA Agreement, Name and No.

8. Lease Name and Well No.  
SAN JUAN 29-6 UNIT 12B

9. API Well No.

10. Field and Pool, or Exploratory  
BLANCO MESAVERDE

11. Sec., T., R., M., or Blk. and Survey or Area

Sec 6 T29N R6W Mer NMP

12. County or Parish  
RIO ARRIBA13. State  
NM

17. Spacing Unit dedicated to this well

318.95 E/2

20. BLM/BIA Bond No. on file

ES0085

23. Estimated duration  
20 DAYS

## 24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).

4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification
6. Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature  
(Electronic Submission)Name (Printed/Typed)  
PATSY CLUGSTONDate  
10/14/2003Title  
AUTHORIZED REPRESENTATIVE

Approved by (Signature)

/s/ Charlie Beecham

Name (Printed/Typed)

Date  
NOV - 5 2003

Title

Office

Application approval does not warrant or certify the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

## Additional Operator Remarks (see next page)

Electronic Submission #24182 verified by the BLM Well Information System  
For CONOCOPHILLIPS COMPANY, sent to the FarmingtonThis form is subject to technical and  
regulatory review pursuant to 43 CFR 3165.3  
and appeal pursuant to 43 CFR 3165.4DRILLING OPERATIONS AUTHORIZED ARE  
SUBJECT TO COMPLIANCE WITH ATTACHED  
"GENERAL REQUIREMENTS".

\*\* OPERATOR-SUBMITTED \*\* OPERATOR-SUBMITTED \*\* OPERATOR-SUBMITTED \*\*

NMOCD

District I  
141 Box 1980, Hobbs, NM 88241-1980  
District II  
811 South First, Artesia, NM 88210  
District III  
1000 Rio Hondo Rd., Aztec, NM 87410  
District IV  
2040 South Pacheco, Santa Fe, NM 87505

State of New Mexico  
Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION  
2040 South Pacheco  
Santa Fe, NM 87505

Form C-10:  
Revised October 18, 199-  
Instructions on back  
Submit to Appropriate District Office  
State Lease - 4 Copies  
Fee Lease - 3 Copies

2001 MAY -2 PM 2:21 ☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

APL Number <b>30-037-27521</b>		Pool Code <b>72319</b>	Pool Name <b>Blanco Mesa Verde</b>
Property Code <b>009257</b>	Property Name <b>SAN JUAN 29-6 UNIT</b>		Well Number <b>12B</b>
OGRII No. <b>017654</b>	Operator Name <b>PHILLIPS PETROLEUM COMPANY</b>		Elevation <b>6840'</b>

10 Surface Location

UL or lot no.	Section	Township	Range	Lot Ida	Feet from the	North/South line	Feet from the	East/West line	County
B	6	29N	6W		717'	NORTH	1975'	EAST	RIO ARriba

11 Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Ida	Feet from the	North/South line	Feet from the	East/West line	County
B									
Dedicated Acres 318.60 E/2		Joint or Infill Y	Consolidation Code U	Order No.					

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

16	S89°58'W	5280.00'	11	10	9	8	1975'	5256.90'	5280.00'	North	Section 6	SF-080379 2557.0 acres	N89°53'E	5272.08'	17 OPERATOR CERTIFICATION	
															I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief	
														Signature <i>Patsy Clugston</i>		
														Printed Name Patsy Clugston		
														Title Sr. Regulatory/Proration Clerk		
														Date April 6, 2001		
														18 SURVEYOR CERTIFICATION		
														I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.		
														Date of Survey 03/22/01		
														Signature and Seal of Registered Surveyor: <i>[Signature]</i> HENRY P. BROADBENT, JR. NEW MEXICO 11393 REGISTERED SURVEYOR		

## CONOCOPHILLIPS COMPANY

WELL NAME: San Juan 29-6 Unit #12B (MV)

### DRILLING PROGNOSIS

1. Location of Proposed Well: Unit B, 717' FNL & 1975' FEL  
Section 6, T29N, R6W
2. Unprepared Ground Elevation: @ 6840' (unprepared)
3. The geological name of the surface formation is San Jose.
4. Type of drilling tools will be rotary.
5. Proposed drilling depth is 6344'.
6. The estimated tops of important geologic markers are as follows:

<u>Nacimiento - 1352'</u>	<u>Cliffhouse - 5437'</u>
<u>Ojo Alamo - 2852'</u>	<u>Menefee - 5642'</u>
<u>Kirtland Sh - 2977'</u>	<u>Pt. Lookout - 5922'</u>
<u>Fruitland Fm. - 3457'</u>	<u>Intermediate Casing - 4042'</u>
<u>Pictured Cliffs - 3742'</u>	<u>TD - 6222'</u>
<u>Lewis Shale - 3942'</u>	
7. The estimated depths at which anticipated water, oil, gas or other mineral bearing formations are expected to be encountered are as follows:

Water:	<u>Ojo Alamo - 2852' - 2852'</u>
Gas & Water:	<u>Fruitland - 3457' - 3742'</u>
Gas:	<u>Mesaverde - 5437' - 6222'</u>
8. The proposed casing program is as follows:

Surface String: 9-5/8", 32.3# H-40 @ 200' \*

Intermediate String: 7", 20#, J-55 @ 4042' (J-55 will be used, unless the K-55 is the only casing available)

Production String: 4-1/2", 11.6#, J-55 LTC @ 6222' (TD)

\* The surface casing will be set at a minimum of 200', but could be set deeper if required to maintain hole stability.

## 9. Cement Program:

Surface String: 130 sx 50/50 POZ, + 2% Bentonite, 3% CaCl<sub>2</sub>, 5#/sx Gilsonite, 0.25#/sx Cellophane flakes, & 0.2% CFR-3 Friction Reducer (1.34 yield = 174 cf); Cement density – 13.5 ppg. Water required 5.39 gal/sx. Compressive Strength – Sample cured at 70 deg F for 8 hours; 3 hrs 05 min. 50 psi; 7 hrs 45 min 500 psi; cement to surface w/150% excess of casing/hole annulus volume.

Intermediate String: Lead Cement: 409 sx Standard cement + 3% Econolite (extender) + 10#/sx Pheno-seal; (2.88 yield = 1179 cf). Cement Density 11.5 ppg; Water required – 16.91 gal/sx. Compressive strength – Sample cured at 130 deg F for 24 hrs – 1 hr 47 min – 50 psi; 12 hrs – 350 psi; 24 hrs – 450 psi; Cement to surface with 150% excess of casing/hole annulus volume.

Tail Cement: 236 sx 50/50 POZ – Standard cement + 2% Bentonite + 6#/sx Pheno Seal; (1.33 yield = 313.5 cf); Cement Density – 13.5 ppg; Water required – 5.52 gal/sx; Compressive strength – Sample cured at 130 deg F for 24 hrs – 2 hrs 5 min – 50 psi; 2 hr 6 min – 500 psi; 12 hr – 1250 psi; 24 hrs – 1819 Cement to surface with 150% excess of casing/hole annulus volume.

Production String \*: Cement: 248 sx 50/50 POZ – Standard cement + 3% Bentonite + 5#/sx PhenoSeal + 0.2% CFR-3 Friction Reducer + 0.1% HR-5 Retarder + 0.8% Halad-9 Fluid Loss Additive (1.45 Yield – 359 cf) Cement density – 13.1 ppg; Water required 6.47 gal/sx; Compressive Strength – Sample cured at 200 de F for 23 hrs; 9 hr 50 min – 50 psi; 13 hrs 45 min – 500 psi; 16 hrs – 1500 psi; 23 hrs 2525 psi.

\*The production casing cement is calculated to cover the openhole interval with 50% excess and annular volume 200' within intermediate shoe. Depending on hole conditions, the well may be cemented in a single stage or two staged.

Centralizer Program:

Surface: Total four (4) - 1<sup>st</sup> joint - 10' above the shoe & 1 at the top of the 2<sup>nd</sup>, 3<sup>rd</sup> and 4<sup>th</sup> joints latched over the casing collar


Intermediate: Total seven (9) – 10' above shoe, top of 2<sup>nd</sup>, 4<sup>th</sup>, 6<sup>th</sup>, & 8<sup>th</sup>, 10<sup>th</sup> jts & 10<sup>th</sup> 1 jt. above surface casing, and on first two casing collars below the wellhead.

Production: None planned.

Turbulators: Total Three (3) – on intermediate casing at 1<sup>st</sup> jt. below the Ojo Alamo and next 2 jts up.

# BLOWOUT PREVENTER ARRANGEMENT & PROGRAM

For Drilling to Intermediate Casing Point & Setting 7" Intermediate Casing

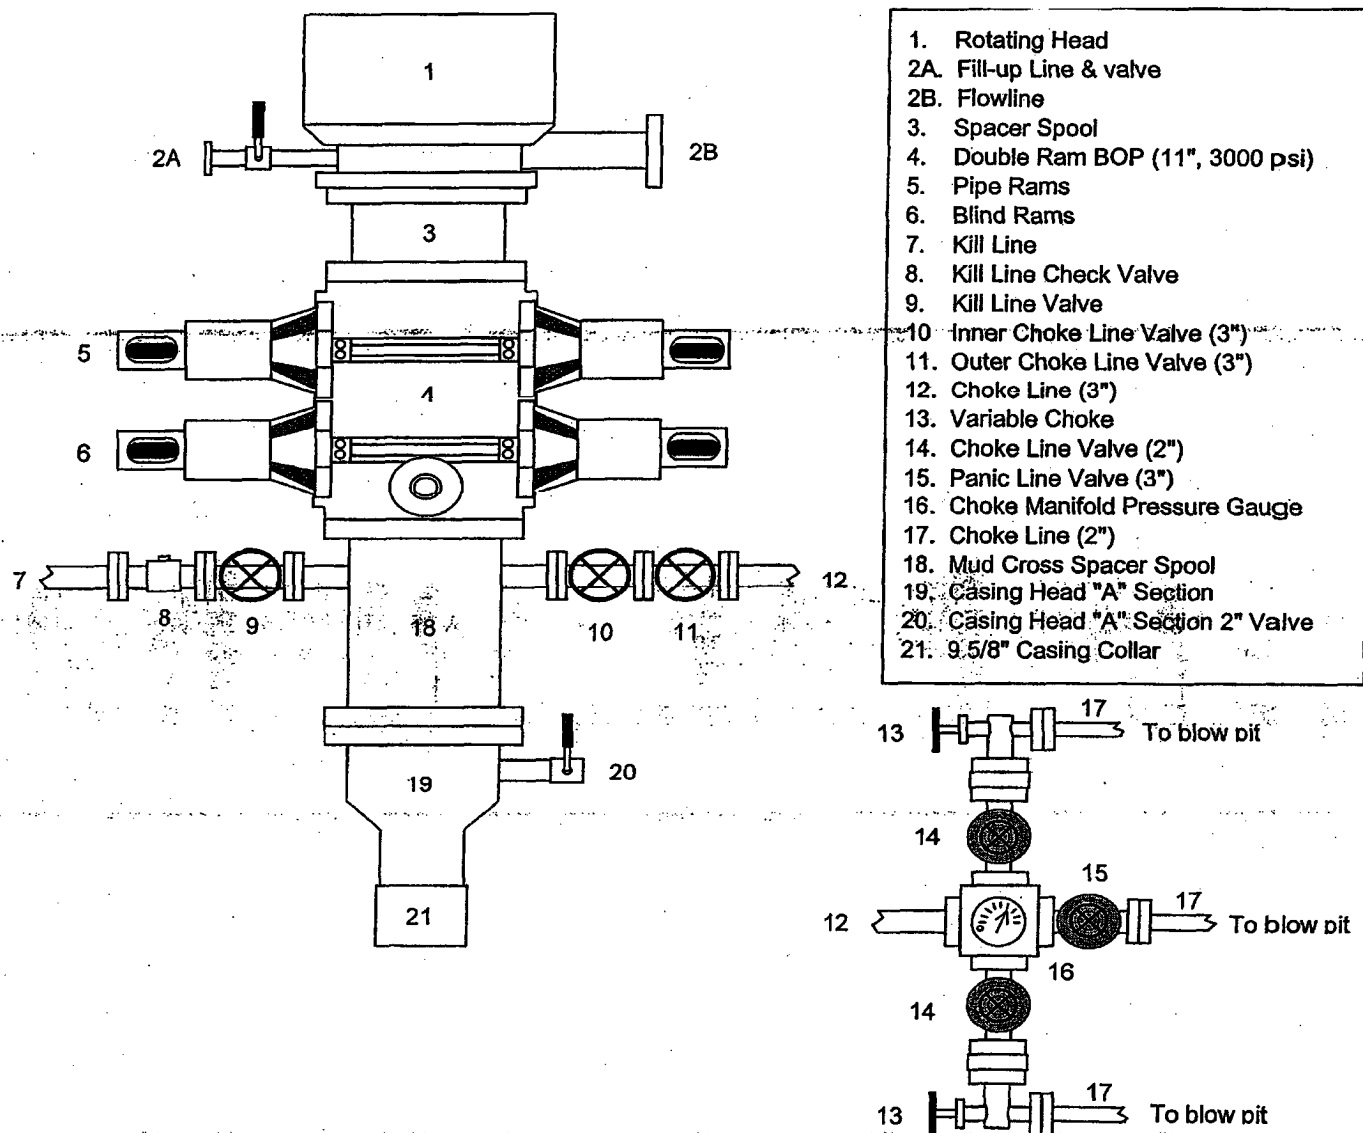

1. Rotating Head
- 2A. Fill-up Line & valve
- 2B. Flowline
3. Spacer Spool
4. Double Ram BOP (11", 3000 psi)
5. Pipe Rams
6. Blind Rams
7. Kill Line
8. Kill Line Check Valve
9. Kill Line Valve
10. Inner Choke Line Valve (3")
11. Outer Choke Line Valve (3")
12. Choke Line (3")
13. Variable Choke
14. Choke Line Valve (2")
15. Panic Line Valve (3")
16. Choke Manifold Pressure Gauge
17. Choke Line (2")
18. Mud Cross Spacer Spool
19. Casing Head "A" Section
20. Casing Head "A" Section 2" Valve
21. 9.5/8" Casing Collar


A 12-1/4" hole will be drilled to approximately 220' and the 9-5/8" surface casing will be run and cemented. The Casing Head "A" Section will be screwed onto the 9-5/8" surface casing stub. The BOP will be installed on the Casing Head "A" Section. A test plug will be set in the wellhead and the pipe rams and choke manifold will be tested to 200 psi to 300 psi (low pressure test) for 2-3 minutes and to 1000 psi (high pressure test) for 10 minutes. Then the test plug will be removed and the 9-5/8" casing will be pressure tested against closed blind rams to 200 psi to 300 psi for 2-3 minutes and to 1000 psi for 30 minutes (this value is one 44% of the minimum internal yield pressure of the 9-5/8" casing). An 8-3/4" hole will be drilled to intermediate casing point and 7" casing will be run and cemented.

In addition to the equipment in the above diagram the following equipment will comprise the BOP system:


1. Upper Kelly cock Valve with handle
2. Stab-in TIW valve for all drillstrings in use

## BLOWOUT PREVENTER ARRANGEMENT & PROGRAM

For Drilling to TD and Setting 4.5 inch Casing

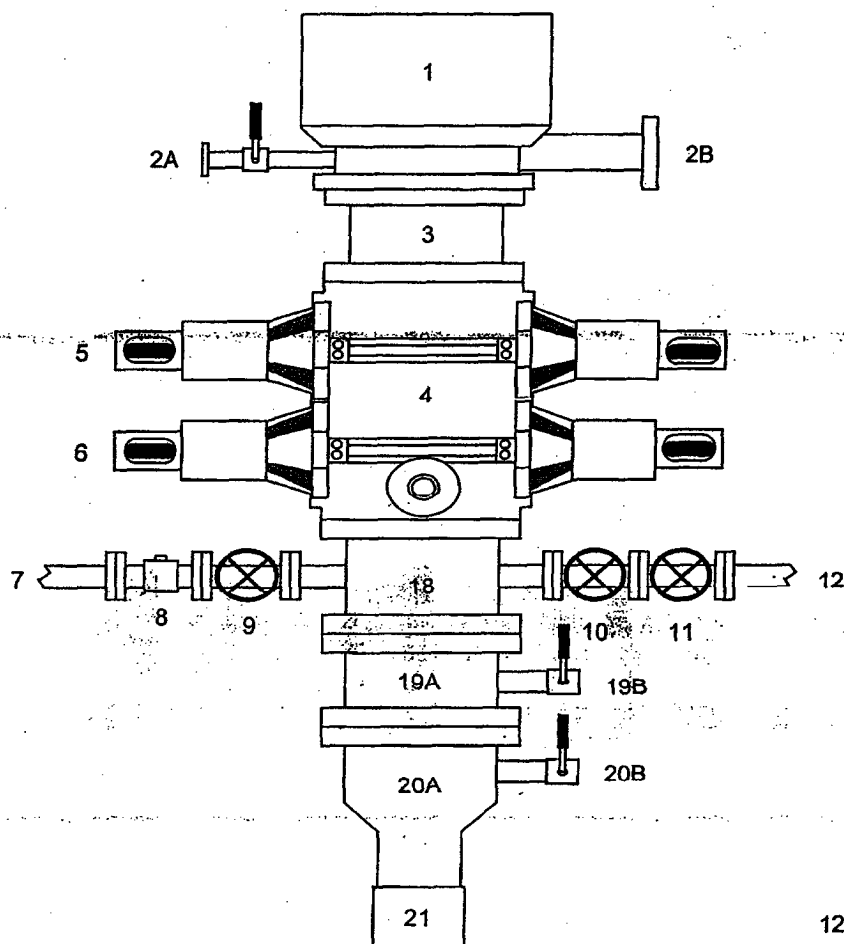

1. Rotating Head
- 2A. Fill-up Line & valve
- 2B. Bleeie Line (for Air Drilling)
3. Spacer Spool
4. Double Ram BOP (11", 3000 psi)
5. Pipe Rams
6. Blind Rams
7. Kill Line
8. Kill Line Check Valve
9. Kill Line Valve
10. Inner Choke Line Valve (3")
11. Outer Choke Line Valve (3")
12. Choke Line (3")
13. Variable Choke
14. Choke Line Valve (2")
15. Panic Line Valve (3")
16. Choke Manifold Pressure Gauge
17. Choke Line (2")
18. Mud Cross Spacer Spool
- 19A Csg Spool "B" Section (11", 3M)
- 19B "B" Section Csg Valve (2", 3M)
- 20A Csg-Head "A" Section (11", 3M)
- 20B "A" Section Csg Valve (2", 3M)
21. 9 5/8" Casing Collar

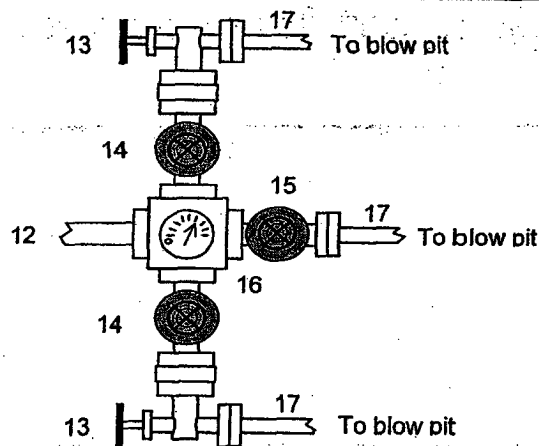

After the 7" intermediate casing has been run and cemented, the Casing Spool ("B" Section) will be installed on the wellhead ("A" Section) and the BOP will be installed on the Casing Spool. A test plug will be set in the wellhead and the pipe rams, blind rams, and choke manifold will be tested to 200 psi to 300 psi (low pressure test) for 2-3 minutes and to 3000 psi (high pressure test) for 10 minutes. Then the test plug will be removed and the 7" casing will be pressure tested against closed blind rams to 200 psi to 300 psi for 2-3 minutes and to 1800 psi for 30 minutes - this test pressure is 48% of the minimum internal yield strength of 3740 psi for the 7", 20#, J-55, STC casing. Then we will air drill the 6-1/4" hole to TD and run and cement the 4-1/2" casing.

In addition to the equipment in the above diagram the following equipment will comprise the BOP system:

1. Upper Kelly cock Valve with handle
2. Stab-in TIW valve for all drillstrings in use

**San Juan 29-6 Unit #12B**  
**SF-080379; Unit B, 717' FNL & 1975' FEL**  
**Section 6, T29N, R6W; Rio Arriba County, NM**

**Cathodic Protection**

Phillips proposes to drill a cathodic protection deep well groundbed for the subject well. Will drill a 6-7/8" hole to an anticipated minimum depth of 300' (maximum depth of 500'). Cement plugs will not be used unless more than one water zone is encountered. Prior drilling history for the area indicates only one zone to that depth. If more than one water zone is encountered, notification will be made and details of cement and casing will be provided.

All drilling activity will remain on existing well pad and a Farmington based company will be doing the drilling for Phillips.