District 1 1625 N. French Dr., Hobbs, NM 88240

State of New Mexico
Energy Minerals and Natural Resources

Form C-144 July 21, 2008

District II

1301 W Grand Ave , Artesia, NM 88210

District III

1000 Rio Brazos Rd, Aztec, NM 87410

District IV 1220 S St. Francis Dr., Santa Fe, NM 87505 Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

For temporary pits, closed-loop sytems, and below-grade tanks, submit to the appropriate NMOCD District Office

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office

\bigcirc	-	9
0	20	ノー

Pit, Closed-Loop System, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application

Type of action:	Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method
	Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method
	Modification to an existing permit
	X Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop systems below-grade tank, or proposed alternative method

Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request

Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances

Operator: Burlington Resources Oil & Gas Company, LP OGRID#: 14538	
Address: PO Box 4289, Farmington, NM 87499	
Facility or well name: Wood 3M	
API Number: 30-045-34632 OCD Permit Number	
U/L or Qtr/Qtr: I(NESE) Section: 17 Township: 29N Range: 10W County: San Ju	uan
Center of Proposed Design: Latitude: 36.72359' N Longitude: 107.90281' W	NAD: 1927 X 1983
Surface Owner: X Federal State Private Tribal Trust or Indian Allotment	
X Pit: Subsection F or G of 19.15.17.11 NMAC Temporary: X Drilling Workover Permanent Emergency Cavitation P&A X Lined Unlined Liner type. Thickness 20 mil X LLDPE HDPE PVC Other X String-Reinforced Liner Seams. X Welded X Factory Other Volume: 4400 bbl Dimensions L 65'	
Closed-loop System: Subsection H of 19.15.17.11 NMAC Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior notice of intent) Drying Pad Above Ground Steel Tanks Haul-off Bins Other Lined Unlined Liner type Thickness mil LLDPE HDPE PVD Other Liner Seams: Welded Factory Other	MOV 200
Below-grade tank: Subsection I of 19.15.17.11 NMAC Volume bbl Type of fluid: Tank Construction material: Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off Visible sidewalls and liner Visible sidewalls only Other Liner Type. Thickness mil HDPE PVC Other	OF OIL CONS. DIV. DIST
5 Alternative Method: Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for cons	ideration of approval

Fencing: Subsection D of 19 15.17 11 NMAC (Applies to permanent pit, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church) Four foot height, four strands of barbed wire evenly spaced between one and four feet Alternate Please specify 4' hogwire fence with a single strand of barbed wire on top.						
Netting: Subsection E of 19 15.17.11 NMAC (Applies to permanent pits and permanent open top tanks) Screen Netting Other Monthly inspections (If netting or screening is not physically feasible)						
Signs: Subsection C of 19.15.17.11 NMAC 12" X 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers X Signed in compliance with 19 15.3.103 NMAC						
Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required Please refer to 19.15.17 NMAC for guidance Please check a box if one or more of the following is requested, if not leave blank: Administrative approval(s). Requests must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for cons (Fencing/BGT Liner) Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	ideration of ap	proval.				
Siting Criteria (regarding permitting): 19 15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above grade-tanks associated with a closed-loop system.						
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes	No				
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	Yes	∏No				
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes	No				
(Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	│ ∐ ^{NA}					
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applied to permanent pits) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applied to permanent pits) NA					
Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.	Yes	No				
- NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site.						
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended - Written confirmation or verification from the municipality; Written approval obtained from the municipality						
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	Yes	□No				
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division	Yes	□No				
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society: Topographic map	Yes	No				
Society; Topographic map Within a 100-year floodplain - FEMA map						

Hydrogoslogic Report (Rebovegrade Tailsts) - based upon the requirements of Paugapah (2) of Subsection B of 19.15.17.9 NNAC	Temporary Pits, Emergency Pits and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19 15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.				
Hydrogeologic Data (Temporary and Emergency Phis) - based upon the repatements of Panagaph (2 of Subsection B of 19.15.17.9					
Sturg Criteria Compiluace Demonstrations - Pased upon the appropriate requirements of 19.15.17.10 NMAC					
Design Plan - hood upon the appropriate requirements of 19.15.17.11 NNAC					
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC					
Consure Plan (Pleans complete Bross 14 through 18, of applicable) - based upon the appropriate requirements of Subsection C of 19 15 17 9 NMAC and 19 15.17 13 NMAC and 19 15.17 13 NMAC previously Approved Design distants copy of design) API or Permit Previously Approved Design distants copy of design)	l				
19.13.17.9 NNAC and 19.15.17.13 NNAC Previously Approved Design (attack copy of design) API					
Consel-loop Systems Permit Application Attachment Checklist: Subsection is of 19.15.17 9 NMAC					
Closed-Joop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17 9 NMAC	Previously Approved Design (attach copy of design) API or Permit				
Previously Approved Design (attach copy of design) API	Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17 9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15 17 10 NMAC Design Plan - based upon the appropriate requirements of 19 15.17.11 NMAC				
Previously Approved Operating and Maintenance Plan					
Previously Approved Operating and Maintenance Plan					
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Critified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design: based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Lieak Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Preeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H2S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Ensoise Control Plan Closure Plan - based upon the appropriate requirements of 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type Drilling Workover Emergency Cavitation P&A Permanent Pt Below-grade Tank Closed-loop System Alternative Proposed Closure: Method (only for temporary pits and closed-loop systems) Non-set Closure Method (only for temporary pits and closed-loop systems) Non-set Closure Method (only for temporary pits and closed-loop systems) Non-set Closure Method (only for temporary pits and closed-loop systems) Non-set Closure Method (only for temporary pits and closed-loop systems) Non-set Closure Method (only for temporary pits and closed-loop systems					
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NNAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.19 NNAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Control Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design: based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Precboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H2S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Emostor Control Plan Emostor Control Plan Emostor Control Plan Emostor Control Plan Proposed Closure: 19.15.17.13 NMAC Proposed Closure: 19.15.17.13 NMAC Proposed Closure: 19.15.17.13 NMAC Proposed Closure: 19.15.17.13 NMAC Proposed Closure Method: Waste Excavation and Removal (Relow-Grade Tank) Master Excavation and Removal Closed-loop systems only) Sign-sate Closure Method (only for temporary pits and closed-loop systems) Sin-place Burial On-site Trench Alternative Closure Plan Checklist; (19.15.17.13 NMAC) Protocological Plan Checklist; (19.15.17.13 NMAC) Protocological Plan Checklist; (19.15.17.13 NMAC) Protocol					
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: \[\textbf{X} \] Drilling \[\text{Workover} \] Emergency \[\text{Cavitation} \] P&A \[\text{Permanent Pit} \] Below-grade Tank \[\text{Closed-loop System} \] Alternative Proposed Closure Method: \[\text{Waste Excavation and Removal} \] (Below-Grade Tank) \[\text{Waste Removal (Closed-loop systems only)} \] \[\text{X} \] On-site Closure Method (only for temporary pits and closed-loop systems)} \] \[\text{X} \] In-place Burial \[\text{On-site Trench} \] \[\text{Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)} \] 15 \[\text{Waste Excavation and Removal Closure Plan Checklist:} \((19.15.17.13 \) NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. \[\text{Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC} \] \[\text{Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)} \] \[\text{Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15 17.13 NMAC} \] \[\text{Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19 15.17.13 NMAC} \]	Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design: based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H2S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan				
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15 17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19 15.17.13 NMAC	Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: XDrilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative Proposed Closure Method: Waste Excavation and Removal (Below-Grade Tank) Waste Removal (Closed-loop systems only) X On-site Closure Method (only for temporary pits and closed-loop systems) X In-place Burial On-site Trench				
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15 17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19 15.17.13 NMAC					
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC	Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15 17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19 15.17.13 NMAC				

Form C-144 Oil Conservation Division Page 3 of 5

16 <u>Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only:</u> (19.15.17 13.D N Instructions: Please identify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if more th	MAC)				
are required.	un iwo jacumes				
Disposal Facility Name Disposal Facility Permit #:					
Disposal Facility Name Disposal Facility Permit #					
Will any of the proposed closed-loop system operations and associated activities occur on or in areas that will not be used for Yes (If yes, please provide the information No	future service and operations?				
Required for impacted areas which will not be used for future service and operations: Soil Backfill and Cover Design Specification - based upon the appropriate requirements of Subsection H of 19.15.17.13 Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC	3 NMAC				
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17 13 NMAC					
Siting Criteria (Regarding on-site closure methods only: 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source material are provertum siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submit for consideration of approval. Justifications and/or demonstrations of equivalency are required. Please refer to 19 15.17.10 NMAC for guidance.	ted to the Santa Fe Environmental Bureau office				
Ground water is less than 50 feet below the bottom of the buried waste.	Yes X No				
- NM Office of the State Engineer - tWATERS database search; USGS Data obtained from nearby wells	∐N/A				
Ground water is between 50 and 100 feet below the bottom of the buried waste	Yes X No				
NM Office of the State Engineer - 1WATERS database search; USGS; Data obtained from nearby wells	□N/A				
Ground water is more than 100 feet below the bottom of the buried waste.	X Yes No				
- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	□N/A				
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).	Yes X No				
- Topographic map, Visual inspection (certification) of the proposed site					
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application - Visual inspection (certification) of the proposed site; Aerial photo; satellite image	Yes X No				
	Yes X No				
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal fee of any other fresh water well or spring, in existence at the time of the initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site					
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.					
Written confirmation or verification from the municipality; Written approval obtained from the municipality Within 500 feet of a wetland US Fig. and Weldiff. Westerd Ideas Fig. 1 are a real to a real Visual page 2 feet of the purposed site.	Yes XNo				
 US Fish and Wildlife Wetland Identification map; Topographic map, Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine. 	Yes XNo				
- Written confirantion or verification or map from the NM EMNRD-Mining and Mineral Division	103 24110				
Within an unstable area.	Yes X No				
- Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map					
Within a 100-year floodplain FEMA map	Yes X No				
18 On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must bee attached to the by a check mark in the box, that the documents are attached.	e closure plan. Please indicate,				
X Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC					
X Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17 13 NMAC					
Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17 11 NM	AC				
Construction/Design Plan of Temporary Pit (for in place burial of a drying pad) - based upon the appropriate requirement	ents of 19.15.17.11 NMAC				
Y Protocols and Procedures - based upon the appropriate requirements of 19 15.17 13 NMAC					
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17 13 I	NMAC				
Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC					
X Disposal Faculity Name and Permit Number (for liquids, drılling fluids and drill cuttings or in case on-site closure stand	lards cannot be achieved)				
Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC					
X Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC X Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19 15.17.13 NMAC					

19				
Operator Applicatio				
	information submitted with this application is	-	•	
Name (Print):	Crystal Tafoya	Title:	Regulatory Technician	
Signature	Cupital Talas	ya Date:	11/7/08	
e-mail address	crystal.tafoya@conocophillus con	Telephone:	505-326-9837	
20	.	. 🗀 👵 💀		
<i>-</i>	Permit Application (including closure pla	an) Closure Plan (only)	OCD Conditions (see attachme	nt)
OCD Representative	Signature:	-//.	Approval Date:	7- 10-25
		TWO		<u> </u>
Title:	ns:ro/spec	OCD Peri	nit Number:	
21 Cl. D. (
	uired within 60 days of closure complet are required to obtain an approved closure pl			enort. The closure
	submitted to the division within 60 days of the			•
approved closure plan h	as been obtained and the closure activities ha	ive been completed.		
		Closur	e Completion Date:	
22 Closure Method:				
Waste Excavation	on and Removal On-site Closure N	Method Alternative Closure	Method Waste Removal (Closed-	loon (witoms only)
	—	Method Miteriative Closure	waste Kemovai (Closed-	100p systems omy)
I different from	approved plan, please explain.			
23				
	ding Waste Removal Closure For Closed-loo			
Instructions: Please ide were utilized.	entify the facility or facilities for where the liq	quids, drilling fluids and drill cutt	ings were disposed. Use attachment if m	ore than two facilities
Disposal Facility Na	me:	Disposal Facility	Permit Number:	
Disposal Facility Na			Permit Number:	
•	s system operations and associated activities p			ne?
	se demonstrate compliant to the items below	_	or used for ratare service and opeartion	13.
	·	_		
	ed areas which will not be used for future serv n (Photo Documentation)	ice and operations		
=	and Cover Installation			
=	pplication Rates and Seeding Technique			
Closure Report A	ttachment Checklist: Instructions: Each	of the following items must be att	schod to the closure report. Plages indic	ata by a chack mark in
	cuments are attached.	oj ine jouowing uems musi ve uu	ichea to the closure report. I tease thatch	uie, vy a check mark in
Proof of Closu	re Notice (surface owner and division)			
Proof of Deed	Notice (required for on-site closure)			
Plot Plan (for o	on-site closures and temporary pits)			
Confirmation S	Sampling Analytical Results (if applicable))		
=	l Sampling Analytical Results (if applicable			
 	ity Name and Permit Number	ic,		
<u></u>	g and Cover Installation			
	Application Rates and Seeding Technique			
	on (Photo Documentation)	Y	NAB 🗆 .co-	1092
On-site Closur	e Location Latitude	Longitude:	NAD	1983
25				
Operator Closure Co				
	information and attachments submitted with the			e and belief. I also certify that
те стоите compues wii	th all applicable closure requirements and con	шисть эресцієй ін те approved (лозите рин.	
Name (Print):		Title:		
			-	
Signature.		Date:		
e-mail address:		Telephone [.]		
		Loophone		


New Mexico Office of the State Engineer POD Reports and Downloads


Township: 29	N Range: 10W	Sections:	7,8,9,18,17	,16,19,20,21	
NAD27 X:	Y:	Zone:		Search Radius:	t i
County:	Basin:	1		Number:	Suffix:
Owner Name: (First)	(I	Last) ② All		○ Non-Domestic	O Domestic
POD	/ Surface Data Repo	nt [to Water Report	3.
Clear Form iWATERS Menu Help					

WATER COLUMN REPORT 11/07/2008

(qu	arter	s are	1=1	WK	2=	=NE	3=SW 4=SE					
(qu	arter	s are	e big	gge	est	to:	smallest)			Depth	Depth	Wat∈
POD Number	Tws	Rng	Sec	q	đ	đ	Zone	X	Y	Well	Water	Colum
SJ 03023	29N	10W	18	1	3	1				90	65	2
SJ 03502	29N	10W	18	1	3	1				150		
SJ 03081	29N	10W	18	3	1	4				20		
SJ 02078	29N	10W	19	3	1	1				40	9	3
SJ 00303	29N	10W	19	3	3					20	5	1
SJ 02860	29N	10W	19	4	4	4				21	2	1
SJ 02900	29N	10W	20	3	1	2				70		
SJ 01140	29N	10W	20	3	2	2				25	6	1
SJ 01990	29N	10W	20	4	1					40	12	2
SJ 02547	29N	10W	20	4	4					12	2	1
SJ 02548	29N	10W	20	4	4					12	2	1
SJ 03535	29N	10W	21	3	2	3				15		
SJ 03455	29N	10W	21	3	3	1				20	17	
SJ 03456	29N	10W	21	3	3	2				20	17	
SJ 03441	29N	10W	21	4	3	3				40	30	1
SJ 03470	29N	10W	21	4	3	4				20	7	1
SJ 01474	29N	10W	21	4	4					25		
SJ 03180	29N	10W	21	4	4	4				50	15	3

Record Count: 18

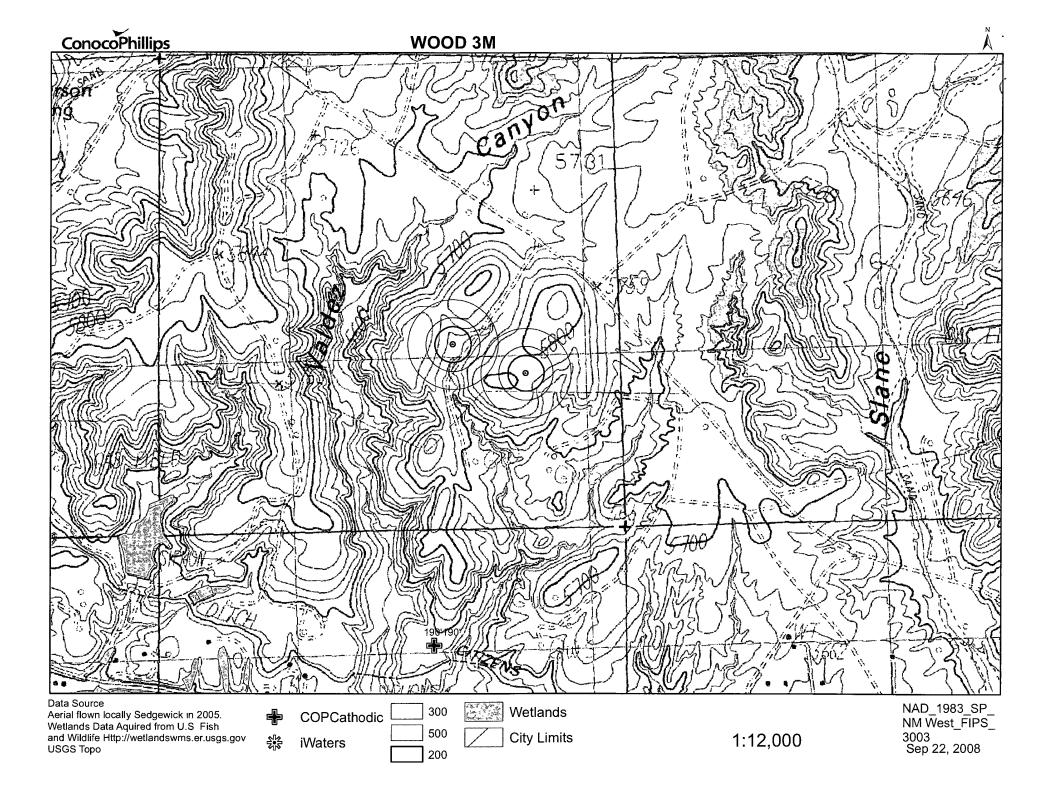

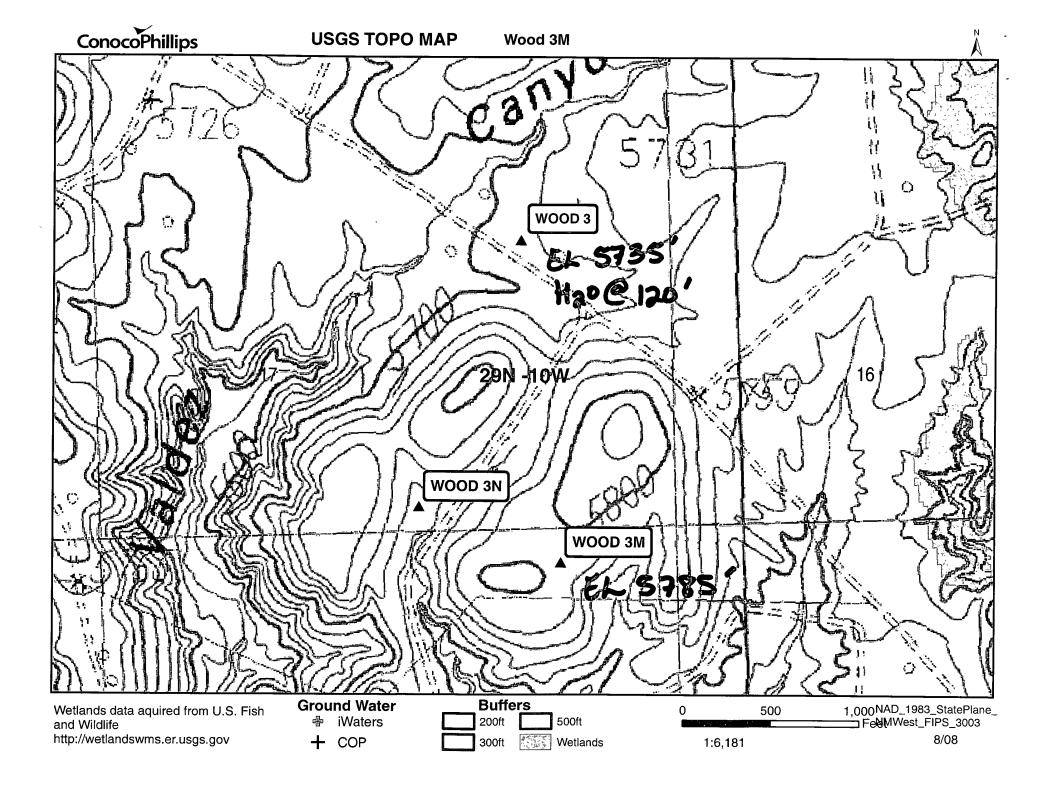



DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS NORTHWESTERN NEW MEXICO (Submit 3 copies to OCD Aztec Office)

Operator MERIDAIN OIL Location: Unit NE Sec. 17 Twp 29 Rng 10
Name of Well/Wells or Pipeline Serviced FEUILLE A #1, WOOD #3,
SAN JACINTO #10 cps 750w
Elevation 5701' Completion Date 11/29/73 Total Depth 300' Land Type* N/A
Casing, Sizes, Types & Depths N/A
If Casing is cemented, show amounts & types used N/A
If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A
Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 120'
Depths gas encountered: N/A
Type & amount of coke breeze used: 4700 lbs.
Depths anodes placed: 270', 260', 250', 240', 230', 220', 210', 200', 190', 180'
Depths vent pipes placed: N/A
Vent pipe perforations: 165'
Remarks: qb #3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

^{*}Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee. If Federal or Indian, add Lease Number.

NEW MEXICO OIL CONSERVATION COMMISSION Santa Fe. New Mexico


(Form C-104) Revised 7/1/57

REQUEST FOR (GAS) ALLOWABLE


New Well


This form shall be submitted by the operator before an initial allowable will be assigned to any completed Oil or Gas well. Form C-104 is to be submitted in QUADRUPLICATE to the same District Office to which Form C-101 was sent. The allowable will be assigned effective 7:00 A.M. on date of completion or recompletion, provided this form is filed during calendar month of completion or recompletion. The completion date shall be that date in the case of an oil well when new oil is delivered into the stock tanks. Gas must be reported on 15.025 psia at 60° Fahrenheit.

		•	Farmington, New Mexico February 13, 1961 (Place) (Date)
WE ARE	HEREBY F	EQUESTI	NG AN ALLOWABLE FOR A WELL KNOWN AS:
			Wood , Well No. 17-2 , in SE 1/4 NE
(C	ompany or O	perator)	(Lease)
Unit H	Sec	17	T 29-N R 10-W NMPM, Besin Dakota Pool
Sen Ju	an.		County Date Spudded Nov. 13, 1960 Date Drilling Completed Dec. 19, 1960
	se indicate		Elevation 5,735 Total Depth 6,740 FBTD 6,708
			Top 1/Gas Pay 6,574 Name of Frod. Form. Dekota
D	C B	A	PRODUCING INTERVAL -
			Perforations 6612-6668 end 6535-6574
E	F G	Н	Open Hole Depth Casing Shoe 6,739 Tubing 6,595
]		35%	OIL WELL TEST -
L	K J	I	Chaire
			Natural Prod. Test: bbls.oil, bbls water in hrs, min. Size
м	N O	P	Test After Acid or Fracture Treatment (after recovery of volume of oil equal to volume of Choke
			load oil used):bbls.oil,bbls water inhrs,min. Size
	L		GAS NELL TEST -
			Natural Prod. Test: MCF/Day; Hours flowed Choke Size
-	sing and Cem		Method of Testing (pitot, back pressure, etc.):
Size	Fret	Sax	Test After Acid or Fracture Treatment: 3,021 MCF/Day; Hours flowed
8-5/8	348	225	Choke Size .75 Method of Testing: Open Flow (Tested by EFIG)
F 2/2	(====	450 4	Acid or Fracture Treatment (Give amounts of materials used, such as acid, water, oir, and
5-1/2	6,739		sand): 500 gal. MCA. 88.350 gal. water 80.0004 cand.
2-3/8 Tubing	6,595	Discel None	Casing Tubing Date first new Press. 2076 Press. 2042 oil run to tanks
-	-1777		
	1		Oil Transporter None
Damada	will tak	e one fr	Gas Transporter El Paso Hatural Gas Company om this well when pipe line connections completed.
Kemarks			1 -
	·····		
I horal			mation given above is true and complete to the best of my knowledge
	FEB 1 4 19		mation given above is true and complete to the best of my knowledge.
Approved	1.64.1.39	×	(Company of Operator
OI	L CONSER	VATION	COMMISSION By: Soluffea
3.	_ 55.1021		(Signature)
By: .Origi	nal Signe	d Emers	C. Arnold Title C. Beeson Neal, Agent in Farmington
			Send Communications regarding well to:
i itie <u>Supe</u> r	visor Uist. 3	Ŧ. .3	Name. C. Beason Neal
•			Address Box 728 - Farmington, New Mexico

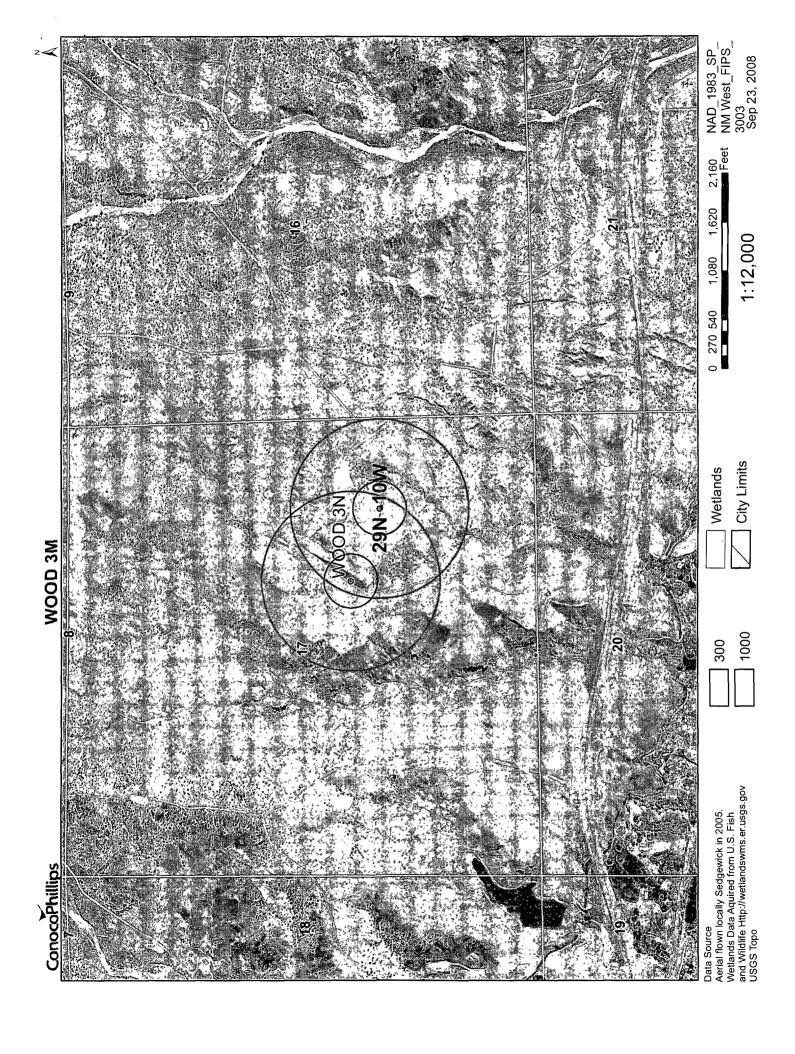


Wood 3M Mines, Mills and Quarries Web Map

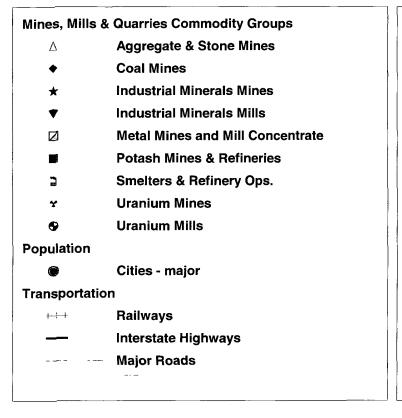

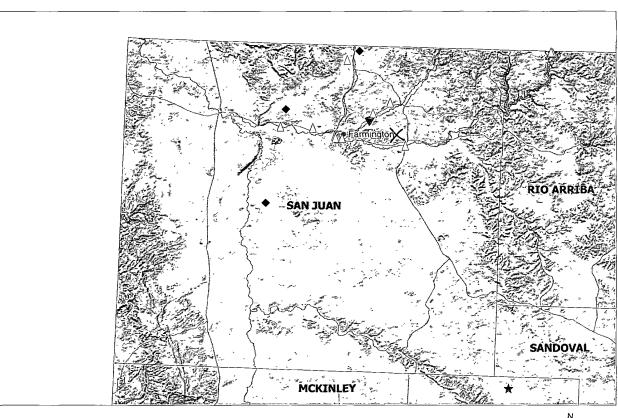





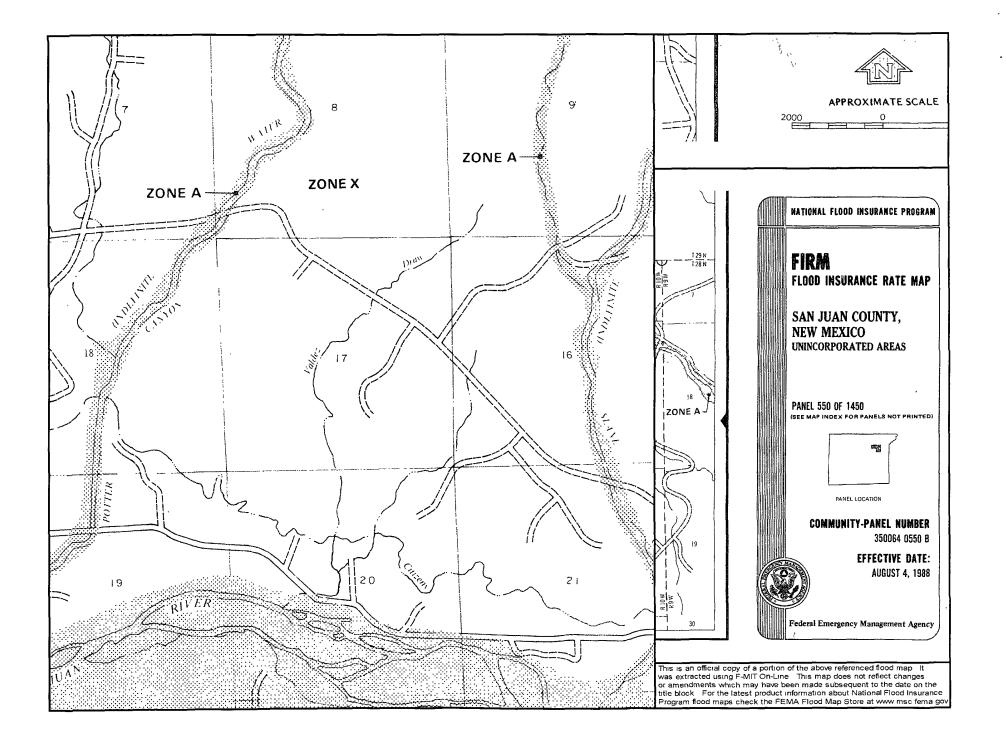

Hydrogeological Report for Wood 3M

Regional Geological context:

The Nacimiento Formation is of Paleocene age (Baltz, 1967, p. 35). It crops out in a broad band inside the southern and western margins of the central basin and in a narrow band along the west face of the Nacimiento Uplift. The Nacimiento is a nonresistant unit and typically erodes to low, rounded hills or forms badland topography.

The Nacimiento Formation occurs in approximately only the southern two-thirds of the San Juan Basin where it commformably overlies and intertongues with the Ojo Alamo Sandstone (Fassett, 1974, p. 229). The Nacimiento Formation grades laterally into the main part of the Animas Formation (Fassett and Hinds, 1971, p. 34); thus, in this area, the two formations occupy the same stratigraphic interval.

Strata of the Nacimiento Formation were deposited in lakebeds in the central basin area with lesser deposition in stream channels (Brimhall, 1973, p. 201). In general, the Nacimiento consists of drab, interbedded black and gray shale with discontinuous, white, medium- to very coarse grained arkosic sandstone (Stone e al., 1983, p.30). Stone et al. indicated that the formation may contain more sandstone than commonly reported because some investigators assume the slope-forming strata in the unit area shales, whereas in many places the strata actually are poorly consolidated sandstones. Total thickness of the Nacimiento Formation ranges from about 500 to 1,300 feet. The unit generally thickens from the basin margins toward the basin center (Steven et al., 1974). The sandstone deposits within the Nacimiento Formation are much thinner than the total thickness of the formation because their environment of deposition was localized stream channels (Brimhall, 1973, p. 201). The thickness of the combined San Jose, Animas, and Nacimiento Formations ranges from 500 to more than 3.500 feet.

Hydraulic Properties:

Reported well yields for 53 wells completed in either the Animas or Nacimiento Formations range from 2 to 90 gallons per minute and the median yield is 7.5 gallons per minute. The primary use of water from Nacimiento and Animas Formations is domestic and livestock supplies. There are no known aquifer tests for the Animas or Nacimiento Formations, but specific capacities reported for six wells range from 0.24 to 2.30 gallons per minute per foot of drawdown (Levings et al., 1990).

The Animas and Nacimiento Formations are in many ways hydrologically similar to the San Jose Formation because sands in both units produce approximately the same quantities of water. However, the greater percentage of fine materials in the Animas and Nacimiento Formations may restrict downward vertical leakage to the Ojo Alamo Sandstone or Kirtland Shale. The poorly cemented fine material is highly erodible, forms a badland terrain, and supports only spotty vegetation. These conditions are more conductive to runoff than retention of precipitation.

References:

Baltz, E.H., 1967, Stratigraphy and regional tectonic implications of part of Upper Cretaceous rocks, east-central San Juan Basin, New Mexico: USGS Professional Paper

552, 101 p.

Brimhall, R.M., 1973, Ground-water hydrology of Tertiary rocks of the San Juan Basin, New Mexico, in Fassett, J.E., ed., Cretaceous and Tertiary rocks of the Southern Colorado Plateau: Four Corners Geological Society Memoir, p. 197-207.

Fassett, J.E., 1974, Cretaceous and Tertiary rocks of the eastern San Juan Basin, New Mexico and Colorado, in Guidebook of Ghost Ranch, central-northern New Mexico: New Mexico Geological Society, 25th Field Conference, p. 225-230.

Fassett, J.E., and Hinds, J.S., 1971, Geology and fuel resources of the Fruitland Formation and Kirtland Shale of the San Juan Basin, New Mexico and Colorado: USGS Professional Paper 676, 76 p.

Levings, G.W., Craigg, S.d., Dam, W.L., Kernodle, J.M., and Thorn, C.R., 1990, Hydrogeology of the San Jose, Nacimiento, and Animas Formations in the San Juan structural basin, New Mexico, Colorado, Arizona, and Utah: USGS Hydrologic Investigations Atlas HA-720-A, 2 sheets.

Stone, W.J., Lyford, F.P., Frenzel, P.F., Mizell, N.H., and Padgett, E.T., 1983, Hydrogeology and water resources of San Juan Basin, New Mexico: New Mexico Bureau of Mines and Mineral Resources, Hydrologic Report 6.

Siting Criteria Compliance Demonstration & Hydro Geologic Analysis

The Wood 3M is not located in an unstable area. The location is not over a mine and is not on the side of a hill as indicated on the Mines, Mills and Quarries Map and Topographic Map. The location of the excavated pit material will not be located within 300' of any continuously flowing watercourse or 200' from any other watercourse as indicated on the Topographic Map. The location is not within a 100-year floodplain area as indicated on the FEMA Map. The Cathodic well data from the Wood 3 has an elevation of 5735' and groundwater depth of 120'. The subject well has an elevation of 5785' which is 50' greater than the Wood 3, therefore the groundwater depth is greater than 120'. There are no iWATERS data points located in the area as indicated on the TOPO Map. The hydro geologic analysis indicates the groundwater depth and the Nacimiento formation will create a stable area for this new location.

Tafoya, Crystal

From:

Tafoya, Crystal

- Sent:

Thursday, July 10, 2008 8:16 AM

To: Subject: 'mark_kelly@nm.blm.gov'
OCD Pit Closure Notification

The following temporary pits will be closed on-site. The new OCD Pit Rule 17 requires the surface owner be notified. Please feel free to contact me at any time if you have any questions. Thank you!

Allison Unit 2B

Allison Unit 40N

Angel Peak B 27E

Ballard 11F

Cain 725S

Canyon Largo Unit 250N

Canyon Largo Unit 279E

Canyon Largo Unit 288E

Canyon largo Unit 297E

Canyon Largo Unit 465E

Carson SRC 4E

Day B 4P

Day B 5A

East 17S

EPNG A 1B

EPNG B 1M

Federal A 1E

Filan 5M

Filan 5N

Fogelson 4 100

Fogelson 4 100S

Grambling C 202S

Hagood 19

Hamner 9S

Hardie 4P

Hare 295

Heaton Com 100

Helms Federal 1G

Howell 12

Huerfanito Unit 103F

Huerfanito Unit 29S

Huerfanito Unit 39S

Huerfanito Unit 47S

Huerfanito Unit 50E

Huerfanito Unit 75E

Huerfanito Unit 83E

Huerfanito Unit 87E

Huerfanito Unit 90E

Huerfanito Unit 90M

Huerfanito Unit 98S

Huerfano Unit 108F

Huerfano Unit 282E

Huerfano unit 305

Huerfano unit 307

Huerfano Unit 554

Johnston Federal 24S

King 3

Lackey A Com 100S

Lambe 1C

Lambe 7S

Lively 8M

Lloyd A 100

Lloyd A 100S

Martin 100

McCord B 1F

McDurmitt Com 100S

McManus 13R

Mitchell 1S

Morris A 14

Newberry B 1N

Newsom B 503

Newsom B 8N

Pierce A 210S

Roelofs 1N

San Juan 27-4 Unit 132G

San Juan 27-4 Unit 132M

San Juan 27-4 Unit 139N

San Juan 27-4 Unit 140B

San Juan 27-4 Unit 141M

San Juan 27-4 Unit 147Y

San Juan 27-4 Unit 153B

San Juan 27-4 Unit 22M

San Juan 27-4 Unit 38P

San Juan 27-4 Unit 41N

San Juan 27-4 Unit 42N

San Suan 27-4 Unit 4219

San Juan 27-4 Unit 569N

San Juan 27-4 Unit 59N

San Juan 27-4 Unit 60M

San Juan 27-5 Unit 113F

San Juan 27-5 Unit 59N

San Juan 27-5 Unit 84N

San Juan 27-5 unit 901

San Juan 27-5 Unit 902

San Juan 27-5 Unit 903

San Juan 27-5 Unit 904

San Juan 27-5 Unit 905 San Juan 27-5 Unit 906

San Juan 27-5 Unit 907

O ... 1 ... 07 5 11-14 000

San Juan 27-5 Unit 908

San Juan 27-5 Unit 909

San Juan 27-5 Unit 910

San Juan 27-5 Unit 912

San Juan 27-5 Unit 913

San Juan 27-5 Unit 914

San Juan 27-5 Unit 915

San Juan 27-5 Unit POW 916

San Juan 28-4 Unit 27M

San Juan 28-5 Unit 54F

San Juan 28-5 Unit 62E

San Juan 28-5 Unit 63M

San Juan 28-5 Unit 76N

San Juan 28-5 Unit 77N

San Juan 28-6 Unit 113N

San Juan 28-6 Unit 459S

San Juan 28-7 Unit 151E

San Juan 28-7 Unit 195P

San Juan 29-6 Unit 22N

San Juan 29-6 Unit 8M

San Juan 29-7 Unit 30N

San Juan 29-7 Unit 57E

San Juan 29-7 unit 587

San Juan 29-7 Unit 588

San Juan 29-7 unit 589

San Juan 29-7 Unit 60N

San Juan 29-7 unit 67M

San Juan 29-7 Unit 70M

San Juan 30-5 Unit 27F

San Juan 30-5 Unit 71F

San Juan 30-5 Unit 73N

San Juan 30-6 Unit 441S

San Juan 31-6 Unit 24F

San Juan 31-6 Unit 27M

San Juan 31-6 Unit 31P

San Juan 31-6 Unit 39M

San Juan 31-6 Unit 3M

San Juan 31-6 Unit 45N

San Juan 31-6 Unit 49P

San Juan 31-6 Unit 4N

San Juan 51-0 Onit 41

San Juan 31-6 Unit 4P

San Juan 31-6 Unit 6F

San Juan 31-6 Unit 7M

San Juan 31-6 Unit 8N

San Juan 32-7 Unit 18M

San Juan 32-7 Unit 19A

San Juan 32-7 Unit 71A

San Juan 32-7 Unit Com 20.

San Juan 32-8 Unit 18N

San Juan 32-8 Unit 30M

San Juan 32-8 Unit 49M

Storey B LS 100

Storey B LS 100S

Sunray E 221S

Sunray G 2C

Vaughn 15N

Wood 3M

Wood 3N

Crystal L. Tafoya
Regulatory Technician
ConocoPhillips Company
Son Juan Business Unit

San Juan Business Unit Phone: (505) 326-9837

Email: Crystal.Tafoya@conocophillips.com

State of New Mexico Energy, Minerals & Natural Resources Department

Form C-102 Revised October 12, 2005

<u>DISTRICT II</u> 1301 W. Grand Avenue, Artesia, N.M. 88210

DISTRICT III 1000 Rio Brazos Rd., Aztec, N.M. 87410 1220 South St. Francis Dr. Santa Fe, NM 87505

OIL CONSERVATION DIVISION Submit to Appropriate District Office

Submit to Appropriate District Office

State Lease - 4 Copies
Fee Lease - 3 Copies

MAR 1 2 2008

☐ AMENDED REPORT


1220 S. St. Francis Dr., Santa Fe, NM 87505

305.68 Acres - (E/2)

WELL LOCATION AND ACREAGE DEDICATION FIRE Affice Pool Code Pool Name API Number BASIN DAKOTA, BLANCO MESA VERDE 30-045- 34632 71599/72319 ⁶Property Name ⁶ Well Number ⁴Property Code WOOD 727616, 725977-3 M Operator Name OGRID No. **Elevation** BURLINGTON RESOURCES OIL AND GAS COMPANY LP 5785' 14538

10 Surface Location Feet from the North/South line UL or lot no. Section Township Range Lqt\ldn Feet from the East/West line County 9 1675' SOUTH 1075 17 29N 10W **EAST** SAN JUAN 11 Bottom Hole Location If Different From Surface UL or lot no. Lot idn Feet from the North/South line Feet from the Section Township Range East/West line County T Dedicated Acres 18 Joint or Infill 14 Consolidation Code 15 Order No.

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

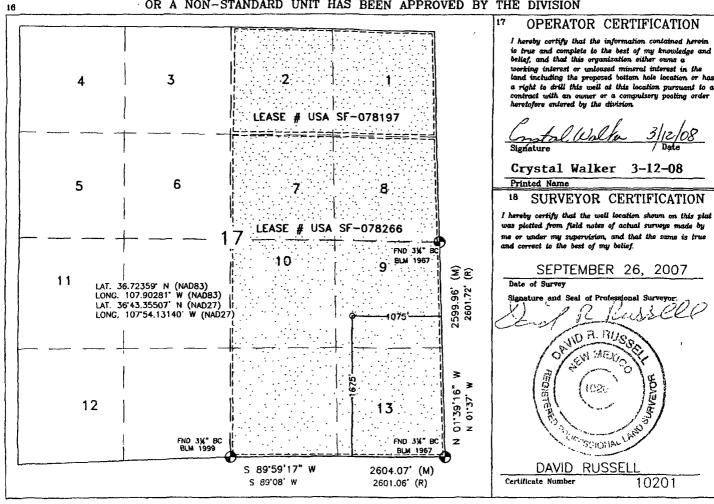

LATITUDE: 36.72359°N LONGITUDE: 107.90281°W DATUM: NAD 83'

SLOPES TO BE CONSTRUCTED TO MATCH THE ORIGINAL CONTOURS AS CLOSE AS POSSIBLE.


BURLINGTON RESOURCES O&G CO LP

WOOD #3 M 1675' FSL & 1075' FEL

LOCATED IN THE NE/4 SE/4 OF SECTION 17,

T29N; R10W, N.M.P.M.,

SAN JUAN COUNTY, NEW MEXICO GROUND ELEVATION: 5785', NAVD 88 30' 0 30' 60' SCALE = 60'

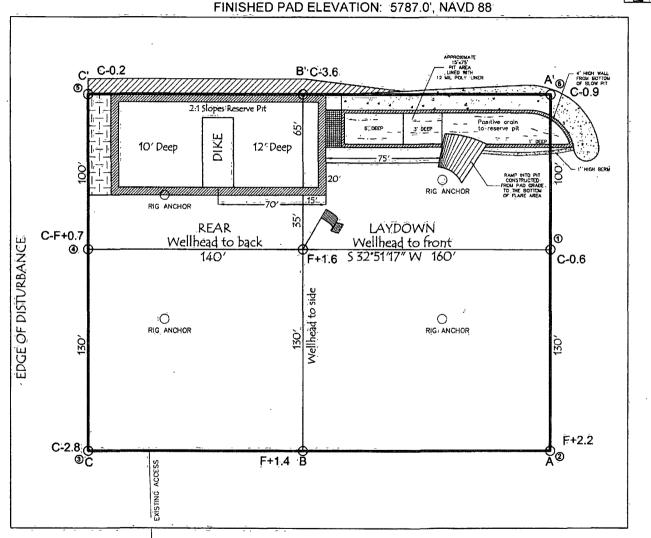

330' x 400' = 3.03 ACRES OF DISTURBANCE


SCALE: 1" = 60' JOB No.: COPC113 DATE: 10/04/07 RESERVE PIT DIKE: TO BE 8' ABOVE DEEP SIDE (OVERFLOW — 3' WIDE AND 1' ABOVE SHALLOW SIDE).
RUSSELL SURVEYING, INC. IS NOT LIABLE FOR UNDERGROUND UTILITIES OR PIPELINES.
CONTRACTOR SHOULD CALL ONE—CALL FOR LOCATION OF ANY MARKED OR UNMARKED, BURIED PIPELINES OR CABLES ON WELL PAD, IN CONSTRUCTION ZONE AND/OR ACCESS ROAD AT LEAST TWO (2) WORKING DAYS PRIOR TO CONSTRUCTION.





Russell Surveying 1409 W. Aztec Blvd. #2 Aztec, New Mexico 87410 (505) 334-8637 LATITUDE: 36.72359°N LONGITUDE: 107.90281°W DATUM: NAD 83

BURLINGTON RESOURCES 0&G CO LP

WOOD #3 M
1675' FSL & 1075' FEL
LOCATED IN THE NE/4 SE/4 OF SECTION 1.7,
T29N, R10W, N.M.P.M,
SAN JUAN COUNTY, NEW MEXICO
GROUND ELEVATION: 5785', NAVD 88
FINISHED PAD ELEVATION: 5787.0', NAVD 88

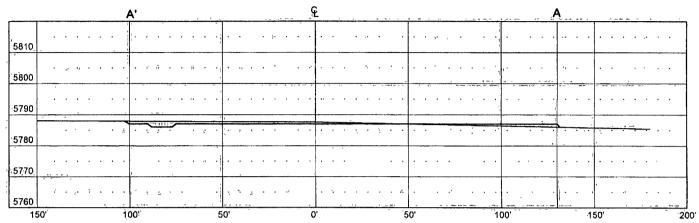

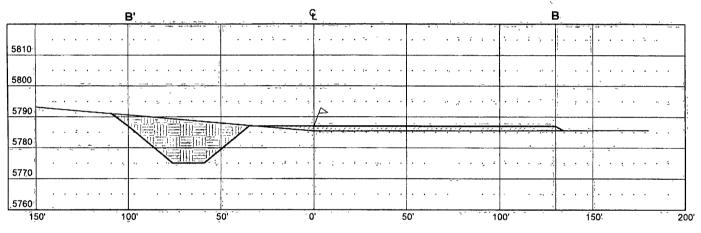

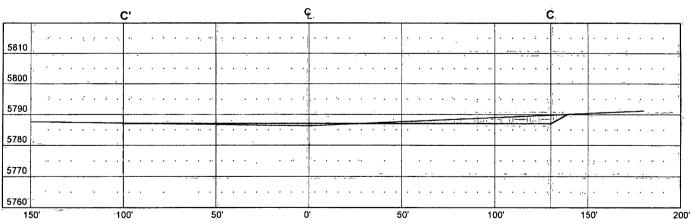

THIS DIAGRAM IS AN ESTIMATE OF DIRT BALANCE AND IS NOT INTENDED TO BE AN EXACT MEASURE OF VOLUME

VERT. SCALE: 1"='30' HORZ. SCALE: 1"='50' JOB No.: COPC113 DATE: 10/04/07





Russell Surveying 1409 W. Aztec Blvd. #2 Aztec, New Mexico 87410 (505) 334-8637

Burlington Resources Oil & Gas Company, LP San Juan Basin Closure Plan

In accordance with Rule 19.15.17.12 NMAC the following information describes the closure requirements of temporary pits on Burlington Resources Oil & Gas Company, LP (BR) locations. This is BR's standard procedure for all temporary pits. A separate plan will be submitted for any temporary pit which does not conform to this plan.

All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of pit closure. Closure report will be filed on C-144 and incorporate the following:

- Details on Capping and Covering, where applicable.
- Plot Plan (Pit Diagram)
- Inspection Reports
- · Sampling Results
- C-105
- Copy of Deed Notice will be filed with County Clerk

General Plan:

- All free standing liquids will be removed at the start of the pit closure process from the pit and disposed of in a division-approved facility or recycle, reuse or reclaim the liquids in a manner that the appropriate division district office approves. The facilities to be used will be Basin Disposal (Permit #NM-01-005) and Envirotech Land Farm (Permit #NM-01-011).
- 2. The preferred method of closure for all temporary pits will be on-site burial, assuming that all the criteria listed in sub-section (B) of 19.15.17.13 are met.
- 3. The surface owner shall be notified of BR's closing of the temporary pit prior to closure as per the approved closure plan via certified mail, return receipt requested.
- 4. Within 6 months of the Rig Off status occurring BR will ensure that temporary pits are closed, re-contoured, and reseeded.
- 5. Notice of Closure will be given prior to closure to the Aztec Division office between 72 hours and one week via email, or verbally. The notification of closure will include the following:
 - i. Operator's name
 - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.
- 6. Liner of temporary pit shall be removed above "mud level" after stabilization. Removal of liner will consist of manually or mechanically cutting liner at mud level and removing all remaining liner. Care will be taken to remove "All" of the liner i.e., edges of liner entrenched or buried. All excessive liner will be disposed of at the San Juan County Landfill located on CR 3100.
- 7. Pit contents shall be mixed with non-waste containing, earthen material in order to achieve the solidification process. The solidification process will be accomplished using a combination of natural drying and mechanically mixing. Pit contents will be mixed with non-waste, earthen material to a consistency that is deemed a safe and stable. The mixing ratio shall not exceed 3 parts clean soil to 1 part pit contents.
- 8. A five point composite sample will be taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.13(B)(1)(b). In the event that the criteria are not met, all contents will be handled per Subparagraph (a) of Paragraph (1) of Subsection B of 19.15.17.13 i.e., Dig and haul.

Components	Tests Method	Limit (mg/Kg)
Benzene	EPA SW-846 8021B or 8260B	0.2
BTEX	EPA SW-846 8021B or 8260B	50
TPH	EPA SW-846 418.1	2500
GRO/DRO	EPA SW-846 8015M	500
Chlorides	EPA 300.1	(1000)500

- 9. Upon completion of solidification and testing standards being passed, the pit area will be backfilled with compacted, non-waste containing, earthen material. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater. If standard testing fails BR will dig and haul all contents pursuant to 19.15.17.13.i.a. After doing such, confirmation sampling will be conducted to ensure a release has not occurred.
- 10. During the stabilization process if the liner is ripped by equipment the Aztec OCD office will be notified within 48 hours and the liner will be repaired if possible. If the liner can not be repaired then all contents will be excavated and removed.
- 11. Dig and Haul Material will be transported to the Envirotech Land Farm located 16 miles south of Bloomfield on Angel Peak Road, CR 7175. Permit # NM010011
- 12. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Reshaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.
- 13. Notification will be sent to OCD when the reclaimed area is seeded.
- 14. BR shall seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM stipulated seed mixes will used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

Туре	Variety or Cultivator	PLS/A
Western wheatgrass	Arriba	3.0
Indian ricegrass	Paloma or Rimrock	3.0
Slender wheatgrass	San Luis	2.0
Crested wheatgrass	Hy-crest	3.0
Bottlebrush Squirreltail	Unknown	2.0
Four-wing Saltbrush	Delar	.25

Species shall be planted in pounds of pure live seed per acre: Present Pure Live Seed (PLS) = Purity X Germination/100 Two lots of seed can be compared on the basis of PLS as follows:

Source No. One (poor quality)

Purity

50 percent

Germination

40 percent

Percent PLS

20 percent

Source No. two (better quality)

Purity

80 percent

Germination

63 percent

Percent PLS

50 percent

5 lb. bulk seed required to make 2 lb. bulk seed required to make

1 lb. PLS 1 lb. PLS

15. The temporary pit will be located with a steel marker, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial upon the abandonment of all the wells on the pad. The marker will be flush with the ground to allow access of the active well pad and for safety concerns. The marker will include a threaded collar to be used for future abandonment. The top of the marker will contain a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the operator's information at the time of all wells on the pad are abandoned. The operator's information will include the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.