#### District I

1625 N French Dr , Hobbs, NM 88240

District II

1301 W Grand Ave., Artesia, NM 88210

District III

1000 Rio Brazos Rd, Aztec, NM 87410

District IV

1220 S St Francis Dr , Santa Fe, NM 87505

#### State of New Mexico Energy Minerals and Natural Resources

Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

Form C-144 July 21, 2008

For temporary pits, closed-loop sytems, and below-grade tanks, submit to the appropriate NMOCD District Office

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Pit, Closed-Loop System, Below-Grade Tank, or
Proposed Alternative Method Permit or Closure Plan Application
Type of action:  Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method
Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method  Modification to an existing permit
X Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system,
below-grade tank, or proposed alternative method
Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request
Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.
OCDID# 14520
Operator: Burlington Resources Oil & Gas Company, LP OGRID#: 14538  Address: PO Box 4289, Farmington, NM 87499
Facility or well name: Luthy 3S
API Number: 30-045-34485 OCD Permit Number:
U/L or Qtr/Qtr: B(NW/NE) Section: 12 Township: 26N Range: 8W County: San Juan
Center of Proposed Design: Latitude: 36.50637 °N Longitude: 107.63254 °W NAD: 1927 X 1983
Surface Owner: X Federal State Private Tribal Trust or Indian Allotment
2   X   Pit: Subsection F or G of 19 15.17.11 NMAC   Temporary:   X   Drilling   Workover   Workover   Permanent   Emergency   Cavitation   P&A     X   Lined   Unlined   Liner type. Thickness   12   mil   X   LLDPE   HDPE   PVC   Other     X   String-Reinforced   Liner Seams:   X   Welded   X   Factory   Other   Volume.   4400   bbl   Dimensions   L   65'   x   W   45'   x   D   10'
4 RECEIVED  Below-grade tank: Subsection I of 19.15.17.11 NMAC  Volume: bbl Type of fluid:  Tank Construction material: OIL CONS DIV DIST.
Below-grade tank: Subsection I of 19.15.17.11 NMAC  Volume: bbl Type of fluid:  Tank Construction material:  Secondary containment with leak detection
5 Alternative Method:

Fencing: Subsection D of 19.15 17 11 NMAC (Applies to permanent pit, temporary pits, and below-grade tanks)								
Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church)								
Four foot height, four strands of baibed wire evenly spaced between one and four feet								
X Alternate. Please specify 4' hogwire fence with a single strand of barbed wire on top.								
7								
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent puts and permanent open top tanks)								
Screen Netting Other								
Monthly inspections (If netting or screening is not physically feasible)								
8 Signs: Subsection C of 19 15.17.11 NMAC								
12" X 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers								
X Signed in compliance with 19.15.3 103 NMAC								
9								
Administrative Approvals and Exceptions:								
Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance								
Please check a box if one or more of the following is requested, if not leave blank:  Administrative approval(s): Requests must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for consi	idaration of an	provid						
(Fencing/BGT Liner)	defation of app	ргочат.						
Exception(s). Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.								
10								
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable								
source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above grade-tanks associated with a closed-loop system.								
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes	□No						
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site	Yes	□No						
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes	□No						
(Applies to temporary, emergency, or cavitation pits and below-grade tanks)	∏NA							
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	<u>.                                    </u>							
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes	No						
(Applied to permanent pits)  Visual impossion (partification) of the proposed sites April photos Satellite image	│ ∐NA							
<ul> <li>Visual inspection (certification) of the proposed site; Aerial photo; Satellite image</li> <li>Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering</li> </ul>	□Yes	□No						
purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.								
- NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site.								
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended  - Written confirmation or verification from the municipality; Written approval obtained from the municipality	Yes	□No						
Within 500 feet of a wetland US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	Yes	□No						
Within the area overlying a subsurface mine Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division	Yes	□No						
Within an unstable area.  - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological	Yes	No						
Society; Topographic map  Within a 100-year floodplain  - FEMA map	Yes	□No						

Temporary Pits, Emergency Pits and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17 9 NMAC
Instructions Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC
Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15 17.9
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17 10 NMAC
Design Plan - based upon the appropriate requirements of 19.15 17.11 NMAC  Operating and Maintenance Plan - based upon the appropriate requirements of 19 15.17.12 NMAC
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 15.17.9 NMAC and 19.15 17.13 NMAC
Previously Approved Design (attach copy of design)  API or Permit
12
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19 15.17.9 NMAC  Instructions. Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.  Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9
Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15 17.10 NMAC  Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17 12 NMAC
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9  NMAC and 19.15 17.13 NMAC
Previously Approved Design (attach copy of design)  API
Previously Approved Operating and Maintenance Plan API
13
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17 9 NMAC
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
Hydrogeologic Report - based upon the requirements of Paragraph (I) of Subsection B of 19.15 17.9 NMAC
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC
Climatological Factors Assessment  Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC
Dike Protection and Structural Integrity Design: based upon the appropriate requirements of 19.15.17.11 NMAC
Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC
Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19 15.17.11 NMAC
Quality Control/Quality Assurance Construction and Installation Plan
Operating and Maintenance Plan - based upon the appropriate requirements of 19 15.17.12 NMAC
Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
Nuisance or Hazardous Odors, including H2S, Prevention Plan
Emergency Response Plan
Oil Field Waste Stream Characterization
Monitoring and Inspection Plan   Erosion Control Plan
Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17 13 NMAC
Proposed Closure: 19.15.17.13 NMAC
Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.
Type. X Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System
Alternative Proposed Closure Method. Waste Excavation and Removal
Waste Removal (Closed-loop systems only)
X On-site Closure Method (only for temporary pits and closed-loop systems)
X In-place Burial On-site Trench
Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
15
Waste Excavation and Removal Closure Plan Checklist: (19 15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan.
Please indicate, by a check mark in the box, that the documents are attached.  Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC
Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)
1 — 1 · · · · · · · · · · · · · · · · ·
Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC
Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC  Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC

16 Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Ste	eel Tanks or Haul-off Bins Only: (19.15.17.13.D NMAC)	
Instructions: Please identify the facility or facilities for the disposal of liquids, drilling are required.	g fluids and drill cuttings. Use attachment if more than two f	acilities
Disposal Facility Name	Disposal Facility Permit #.	
Disposal Facility Name:	Disposal Facility Permit #.	
Will any of the proposed closed-loop system operations and associated activity  Yes (If yes, please provide the information No		ervice and operations?
Required for impacted areas which will not be used for future service and operations  Soil Backfill and Cover Design Specification - based upon the appropriate Re-vegetation Plan - based upon the appropriate requirements of Substantial Site Reclamation Plan - based upon the appropriate requirements of Substantial Site Reclamation Plan - based upon the appropriate requirements of Substantial Site Reclamation Plan - based upon the appropriate requirements of Substantial Site Reclamation Plan - based upon the appropriate requirements of Substantial Site Reclamation Plan - based upon the appropriate requirements of Substantial Site Reclamation Plan - based upon the appropriate requirements of Substantial Site Reclamation Plan - based upon the appropriate requirements of Substantial Site Reclamation Plan - based upon the appropriate requirements of Substantial Site Reclamation Plan - based upon the appropriate requirements of Substantial Site Reclamation Plan - based upon the appropriate requirements of Substantial Site Reclamation Plan - based upon the appropriate requirements of Substantial Site Reclamation Plan - based upon the appropriate requirements of Substantial Site Reclamation Plan - based upon the appropriate requirements of Substantial Site Reclamation Plan - based upon the appropriate requirements of Substantial Site Reclamation Plan - based upon the appropriate requirements of Substantial Site Reclamation Plan - based upon the appropriate requirements of Substantial Site Reclamation Plan - based upon the appropriate requirements of Substantial Site Reclamation Plan - based upon the appropriate requirements of Substantial Site Reclamation Plan - based upon the appropriate requirements of Substantial Site Reclamation Plan - based upon the appropriate requirements of Substantial Site Reclamation Plan - based upon the appropriate requirements of Substantial Site Reclamation Plan - based upon the appropriate Plan - based upon the appropriate Plan - based upon the appropriate Plan - based upon the appropriat	nate requirements of Subsection H of 19.15.17.13 NMA ection I of 19.15.17.13 NMAC	С
17  Siting Criteria (Regarding on-site closure methods only: 19 15.17.10 NMA Instructions Each string criteria requires a demonstration of compliance in the closure plan. certain siting criteria may require administrative approval from the appropriate district office for consideration of approval Justifications and/or demonstrations of equivalency are required.	Recommendations of acceptable source material are provided belover or may be considered an exception which must be submitted to the	
Ground water is less than 50 feet below the bottom of the buried waste.		Yes X No
- NM Office of the State Engineer - iWATERS database search; USGS: Data ob	tained from nearby wells	∐N/A
Ground water is between 50 and 100 feet below the bottom of the buried was		Yes X No
- NM Office of the State Engineer - iWATERS database search; USGS, Data obt	ained from nearby wells	∐N/A
Ground water is more than 100 feet below the bottom of the buried waste.		X Yes No
- NM Office of the State Engineer - tWATERS database search, USGS; Data obt	ained from nearby wells	∐N/A
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other signif (measured from the ordinary high-water mark).	icant watercourse or lakebed, sinkhole, or playa lake	Yes X No
- Topographic map; Visual inspection (certification) of the proposed site		
Within 300 feet from a permanent residence, school, hospital, institution, or church ir - Visual inspection (certification) of the proposed site; Aerial photo; satellite imag		Yes X No
Within 500 horizontal feet of a private, domestic fresh water well or spring that less the purposes, or within 1000 horizontal fee of any other fresh water well or spring, in exist - NM Office of the State Engineer - iWATERS database; Visual inspection (certification within incorporated municipal boundaries or within a defined municipal fresh water pursuant to NMSA 1978, Section 3-27-3, as amended.	stence at the time of the initial application. Teation) of the proposed site	Yes XNo
<ul> <li>Written confirmation or verification from the municipality; Written approval ob</li> </ul>	tained from the municipality	
Within 500 feet of a wetland - US Fish and Wildlife Wetland Identification map, Topographic map; Visual ins	spection (certification) of the proposed site	Yes X No
Within the area overlying a subsurface mine - Written confirantion or verification or map from the NM EMNRD-Mining and	Mineral Duusien	Yes X No
Within an unstable area  - Engineering measures incorporated into the design; NM Bureau of Geology & M		Yes X No
Topographic map	micrai resources, 0000, rim Geological Society,	
Within a 100-year floodplain FEMA map		Yes X No
18 On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each	h of the following items must be attached to the closur	re plan Plages indicate
by a check mark in the box, that the documents are attached.	y yourg must be amuenca to the citizen	
X Siting Criteria Compliance Demonstrations - based upon the appropria	•	
X Proof of Surface Owner Notice - based upon the appropriate requirement		
Construction/Design Plan of Burial Trench (if applicable) based upon		0.15.15.11.19.41.0
Construction/Design Plan of Temporary Pit (for in place burial of a dry X) Protocols and Procedures - based upon the appropriate requirements of		9.15.17 11 NMAC
X Protocols and Procedures - based upon the appropriate requirements of Confirmation Sampling Plan (if applicable) - based upon the appropria		
X Waste Material Sampling Plan - based upon the appropriate requireme	•	
X   Disposal Facility Name and Permit Number (for liquids, drilling fluids		nnot be achieved)
X Soil Cover Design - based upon the appropriate requirements of Subse		,
X Re-vegetation Plan - based upon the appropriate requirements of Subse		
X Site Reclamation Plan - based upon the appropriate requirements of Su	ibsection G of 19.15.17.13 NMAC	

19			
	ttion Certification: the information submitted with this application is true, a	ccurate and complete to the l	best of my knowledge and belief.
Name (Print):	Tamra Sessions	Title:	Staff Regulatory Technician
Signature:	Tamphain	Date:	4-15-09
e-mail address:	sessitd@conocophillips.com	Telephone:	505-326-9834
20 OCD Ammoriale	Permit Application (including closure plan)	Closure Plan (only)	COCD Conditions (constraints)
OCD Approval:		Closure Plan (only)	OCD Conditions (see attachment)
OCD Representat	tive Signature:	<u> </u>	Approval Date: 4-23-09
   Title:	Envirolspec	OCD Perm	uit Number:
Clasura Ranget (v	aggrined within 60 days of degree completion).		
	equired within 60 days of closure completion): so ors are required to obtain an approved closure plan pro		re activities and submitting the closure report. The closure
	be submitted to the division within 60 days of the compl an has been obtained and the closure activities have bee		s. Please do not complete this section of the form until an
аррточей сполите ри	an mas veen voramen und me civalite activities nuve nee.	<i>,</i> =	Completion Date:
			Completion Date.
22 Closure Method:			
	vation and Removal On-site Closure Method	Alternative Closure	Method Waste Removal (Closed-loop systems only)
1 =	rom approved plan, please explain.		Truste Removal (Closed Toop systems only)
	Transfer of the second		
23 Closure Report Reg	garding Waste Removal Closure For Closed-loop Syst	ems That Utilize Above Gr	ound Steel Tanks or Haul-off Bins Only:
Instructions: Please			ngs were disposed. Use attachment if more than two facilities
were utilized.	Nama	Dunanal Families	Downst Musekan
Disposal Facility Disposal Facility		Disposal Facility Disposal Facility	
	loop system operations and associated activities perform		
· —	please demonstrate complilane to the items below)	No	·
Required for imp	acted areas which will not be used for future service and	l operations:	
	ation (Photo Documentation)		
=	ling and Cover Installation on Application Rates and Seeding Technique		
	m Application Rates and Seeding Technique		
Closure Repor	t Attachment Checklist: Instructions: Each of the	following items must be atta	ched to the closure report. Please indicate, by a check mark in
	documents are attached.		
, <u> </u>	osure Notice (surface owner and division)		
	red Notice (required for on-site closure)		
	or on-site closures and temporary pits)		
	on Sampling Analytical Results (if applicable)		
\ ⊨	erial Sampling Analytical Results (if applicable) acility Name and Permit Number		
l 🛁 .	lling and Cover Installation		
_	on Application Rates and Seeding Technique		
_	nation (Photo Documentation)		
. —	sure Location: Latitude	Longitude:	NAD [] 1927 [] 1983
25			
Operator Closure	<del></del>		
	the information and attachments submitted with this closs with all applicable closure requirements and condition.	•	and complete to the best of my knowledge and belief. I also certify that losure plan.
	, , , , , , , , , , , , , , , , , , , ,		•
Name (Print):		Title:	
Signature:		Date:	
e-mail address:		Telephone:	



# New Mexico Office of the State Engineer Water Column/Average Depth to Water


(quarters are 1=NW 2=NE 3=SW 4=SE)


(quarters are smallest to largest) (NAD83 UTM in meters)

(In feet)


	POD Number	County	15, 367	of alight,	100	Sec	Tws	Rng	X		Depth Depth W Well Water Co	
(	SJ 02405	San Juan	3	4	3	01	26N	08W	263754	4043631	180 (100	80
	SJ 02407	San Juan	1	4	4	01	26N	W80	264553	4043817	2200	
	SJ 02411	San Juan	1	4	4	01	26N	W80	264553	4043817	6000	
	Record Count: 3								,	Average Dept	h to Water: 100 fee	et .


Minimum Depth: 100 feet Maximum Depth: 100 feet

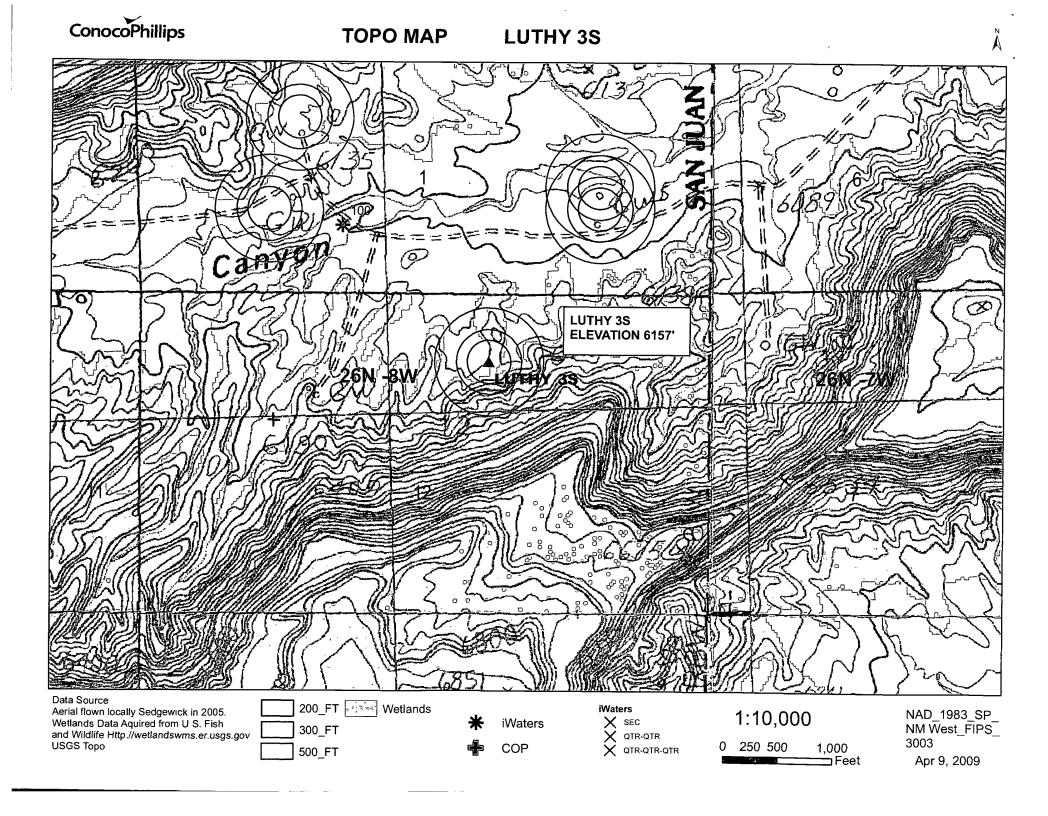


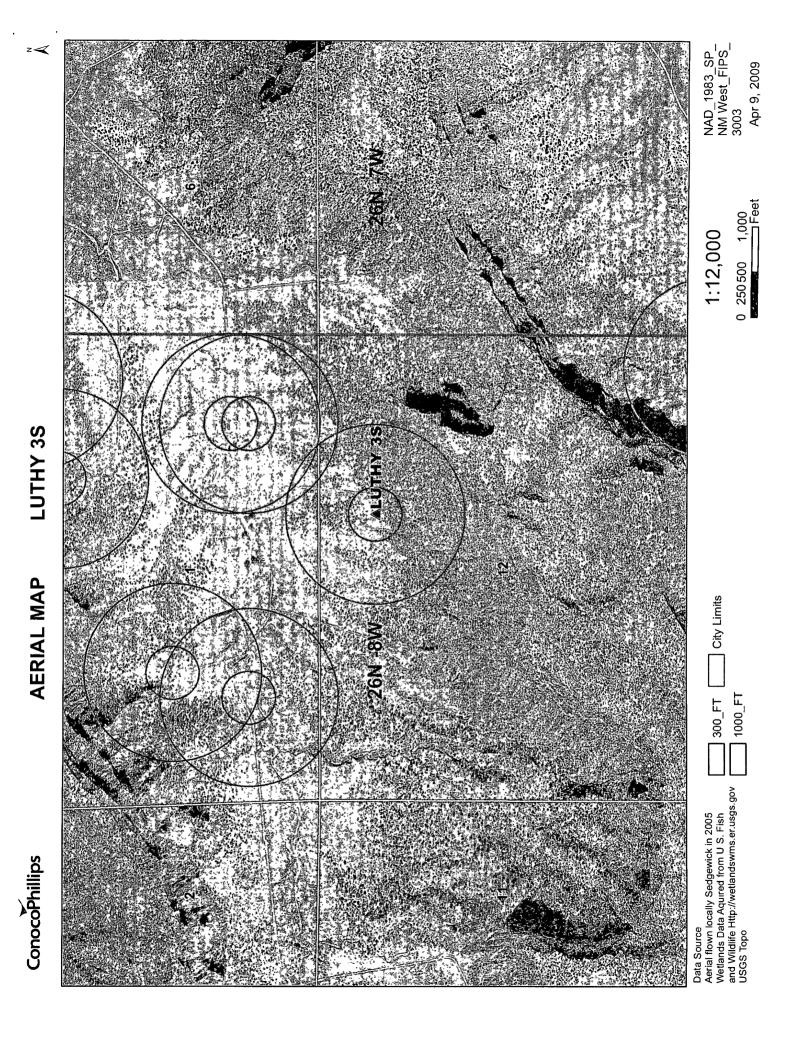


# LUTHY 3S Mines, Mills & Quarries

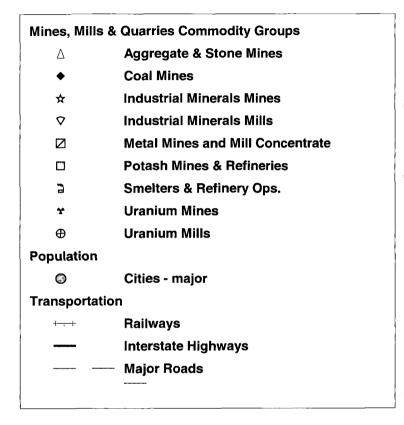

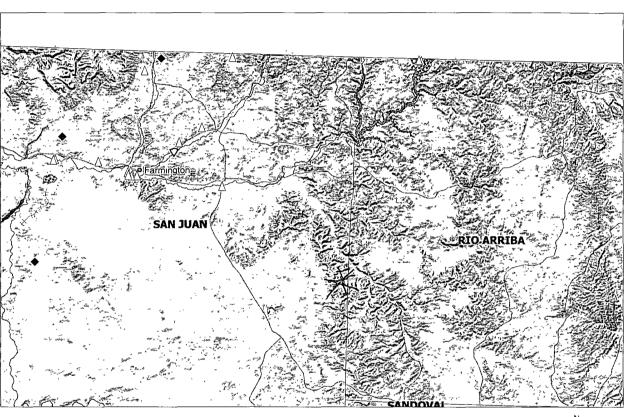





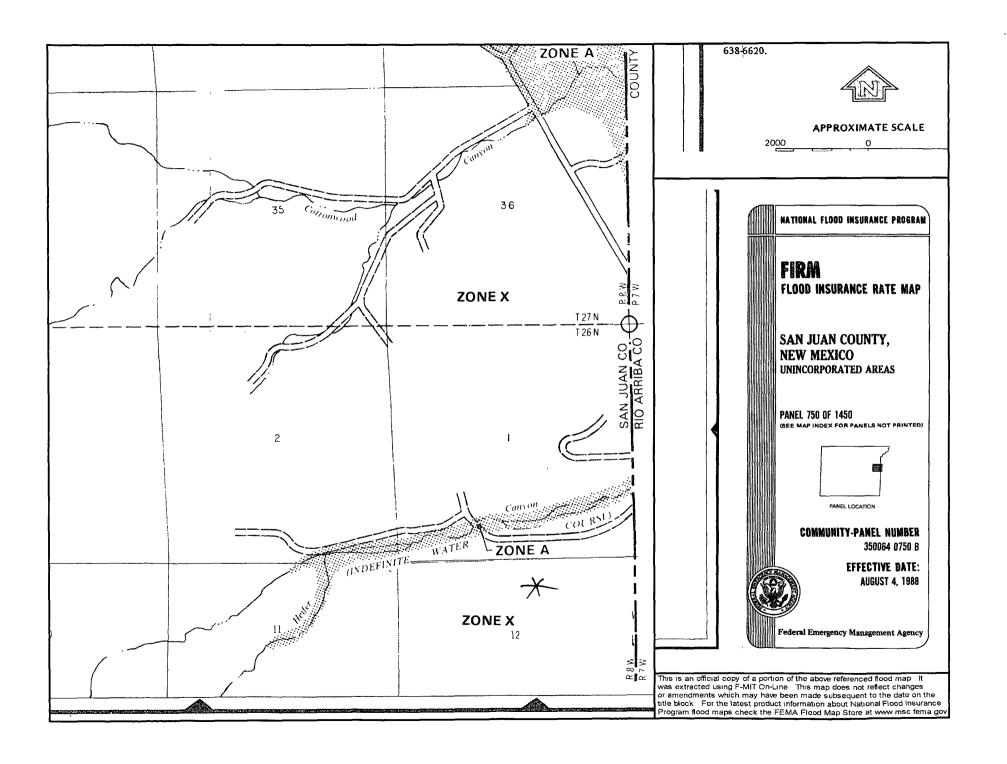

# Siting Criteria Compliance Demonstration & Hydro Geologic Analysis

The Luthy 3S is not located in an unstable area. The location is not over a mine and is not on the side of a hill as indicated on the Mines, Mills and Quarries Map and Topographic Map. The location of the excavated pit material will not be located within 300' of any continuously flowing watercourse or 200' from any other watercourse as indicated on the Topographic Map. The location is not within a 100-year floodplain area as indicated on the FEMA Map. There are iWATERS data points located in Section 1, per SJ 02405 with groundwater depth of 100' and approximate elevation of 6135', as indicated on the TOPO Map. The subject well has an elevation of 6157', therefore the groundwater depth is greater than 100'. The hydro geologic analysis indicates the groundwater depth and the San Jose formation will create a stable area for this new location.

### Hydrogeological report for Luthy 3S

#### Regional Hydrogeological context:

The San Jose Formation of Eocene age occurs in New Mexico and Colorado, and its outcrop forms the land surface over much of the eastern half of the central basin. It overlies the Nacimiento Formation in the area generally south of the Colorado-New Mexico State line and overlies the Animas Formation in the area generally north of the State line.

The San Jose Formation was deposited in various fluvial-type environments. In general, the unit consists of an interbedded sequence of sandstone, siltstone, and variegated shale. Thickness of the San Jose Formation generally increases from west to east (200 feet in the west and south to almost 2,700 feet in the center of the structural basin). Ground water is associated with alluvial and fluvial sandstone aquifers. Thus, the occurrence of ground water is mainly controlled by the distribution of sandstone in the formation. The distribution of such sandstone is the result of original depositional extent plus any post-depositional modifications, namely erosion and structural deformation. Transmissivity data for San Jose Formation are minimal. Values of 40 and 120 feet squared per day were determined from two aquifer tests (Stone et al, 1983, table 5). The reported or measured discharge from 46 water wells completed in San Jose Formation ranges from 0.15 to 61 gallons per minute and the median is 5 gallons per minute. Most of the wells provide water for livestock and domestic use.

The San Jose Formation is a very suitable unit for recharge from precipitation because soils that form on the unit are sandy and highly permeable and therefore readily adsorb precipitation. However, low annual precipitation, relatively high transpiration and evaporation rates, and deep dissection of the San Jose Formation by the San Juan River and its tributaries all tend to reduce the effective recharge to the unit.

Stone et al., 1983, Hydrogeology and Water Resources of the San Juan Basin, New Mexico: Socorro, New Mexico Bureau of Mines and Mineral Resources Hydrologic Report 6, 70 p.

# Sessions, Tamra D

From:

Sessions, Tamra D

Sent:

Wednesday, April 15, 2009 10:02 AM 'mark\_kelly@nm.blm.gov'

To:

Surface Owner Notification Subject:

The following wells have a temporary pit that will be closed on-site. Please let me know if you have any questions.

Ballard 11F Day B 5A Luthy 3S

Thank you,

Tamra Sessions Staff Regulatory Technician CONOCOPHILLIPS COMPANY / SJBU 505-326-9834 Tamra.D.Sessions@conocophillips.com

District I 1625 N. French Dr., Hobbs, NM 88240

State of New Mexico Energy, Minerals & Natural Resources Department

1301 W. Grand Avenue, Artesia, NM 88210

District III 1000 Rio Brazos Rd., Aztec, NM 87410

District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe. NM 87505

Revised October 12, 2005 Instructions on back Submit to Appropriate District Office State Lease - 4 Copies Fee Lease - 3 Copies

Form C-102

AMENDED REPORT


#### WELL LOCATION AND ACREAGE DEDICATION PLAT


¹API Number	Pool Code	'Pool Name					
	71629 / 72359	BASIN FRUITLAND COAL / BLANCO I	PICTURED CLIFFS				
*Property Code	<u> </u>	Property Name LUTHY	*Well Number 3S				
'0GRID No 14538	BURLINGTON RESOU	*Elevation 6157					
10.5							

<sup>10</sup> Surface Location

UL or lot no	Sect 100	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
В	12	26N	8W		615	NORTH	2010	EAST	SAN JUAN
<sup>11</sup> Bottom Hole Location If Different From Surface									
UL or lot no.	Sect 100	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
12 Dedicated Acres	320.0	Acres Acres		(FC)	<sup>13</sup> Joint or Infill	<sup>14</sup> Consolidation Code	<sup>15</sup> Order No		

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

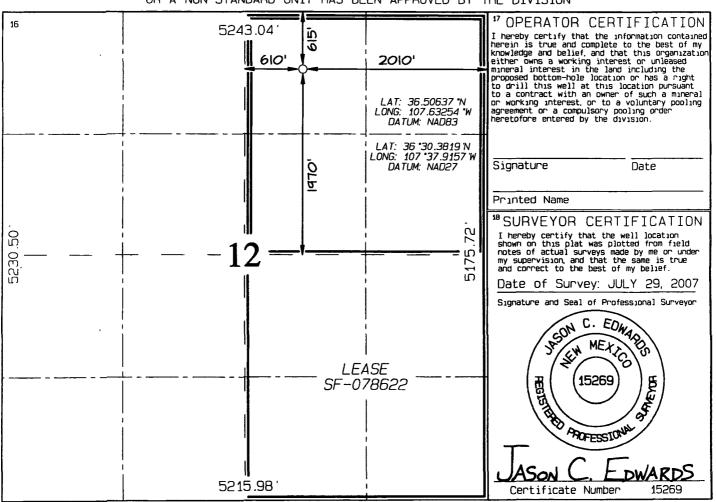

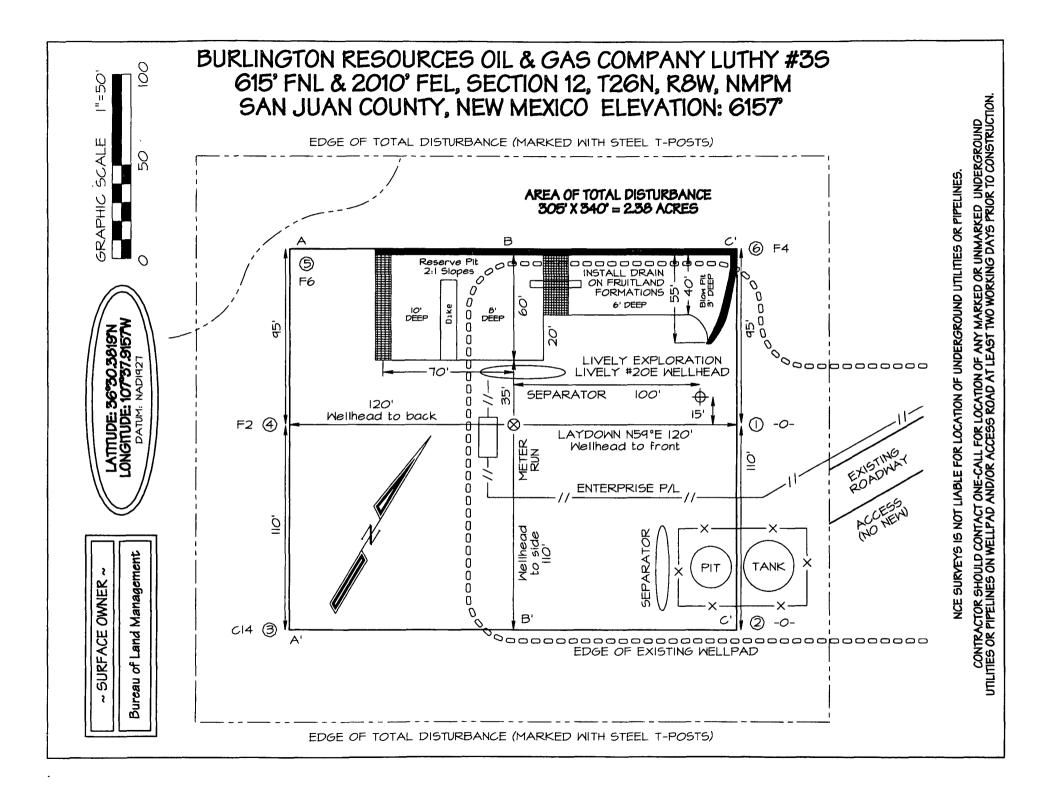

# BURLINGTON RESOURCES OIL & GAS COMPANY LUTHY #35 615' FNL & 2010' FEL, SECTION 12, T26N, R8W, NMPM SAN JUAN COUNTY, NEW MEXICO ELEVATION: 6157'

	HORIZONTAL	SCALE I"=40	· C	/L ·	VERTICAL SO	CALE 1"=30"	
A-A'							
6167'							
6157'		/0 ~	_ ~ =				
6 47'							
			C	/L ·			
B-B'							
6167'							
6157'		~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~				<i></i>	
6147'			<b>.</b>				
			C	/L			
C-C'							
6:167'							
6157'		0=					
6147'							

NCE SURVEYS IS NOT LIABLE FOR LOCATION OF UNDERGROUND UTILITIES OR PIPELINES.

CONTRACTOR SHOULD CONTACT ONE-CALL FOR LOCATION OF ANY MARKED OR UNMARKED UNDERGROUND UTILITIES OR PIPELINES ON WELLPAD AND/OR ACCESS ROAD AT LEAST TWO WORKING DAYS PRIOR TO CONSTRUCTION.

## Burlington Resources Oil & Gas Company, LP San Juan Basin Closure Plan

In accordance with Rule 19.15.17.12 NMAC the following information describes the closure requirements of temporary pits on Burlington Resources Oil & Gas Company, LP (BR) locations. This is BR's standard procedure for all temporary pits. A separate plan will be submitted for any temporary pit which does not conform to this plan.

All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of pit closure. Closure report will be filed on C-144 and incorporate the following:

- Details on Capping and Covering, where applicable.
- Plot Plan (Pit Diagram)
- Inspection Reports
- Sampling Results
- C-105
- Copy of Deed Notice will be filed with County Clerk

#### General Plan:

- 1. All free standing liquids will be removed at the start of the pit closure process from the pit and disposed of in a division—approved facility or recycle, reuse or reclaim the liquids in a manner that the appropriate division district office approves. The facilities to be used will be Basin Disposal (Permit #NM-01-005) and Envirotech Land Farm (Permit #NM-01-011).
- 2. The preferred method of closure for all temporary pits will be on-site burial, assuming that all the criteria listed in sub-section (B) of 19.15.17.13 are met.
- 3. The surface owner shall be notified of BR's closing of the temporary pit prior to closure as per the approved closure plan via certified mail, return receipt requested.
- 4. Within 6 months of the Rig Off status occurring BR will ensure that temporary pits are closed, re-contoured, and reseeded.
- 5. Notice of Closure will be given prior to closure to the Aztec Division office between 72 hours and one week via email, or verbally. The notification of closure will include the following:
  - i. Operator's name
  - Location by Unit Letter, Section, Township, and Range. Well name and API number.
- 6. Liner of temporary pit shall be removed above "mud level" after stabilization. Removal of liner will consist of manually or mechanically cutting liner at mud level and removing all remaining liner. Care will be taken to remove "All" of the liner i.e., edges of liner entrenched or buried. All excessive liner will be disposed of at the San Juan County Landfill located on CR 3100.
- 7. Pit contents shall be mixed with non-waste containing, earthen material in order to achieve the solidification process. The solidification process will be accomplished using a combination of natural drying and mechanically mixing. Pit contents will be mixed with non-waste, earthen material to a consistency that is deemed a safe and stable. The mixing ratio shall not exceed 3 parts clean soil to 1 part pit contents.
- 8. A five point composite sample will be taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.13(B)(1)(b). In the event that the criteria are not met, all contents will be handled per Subparagraph (a) of Paragraph (1) of Subsection B of 19.15.17.13 i.e., Dig and haul.

Components	Tests Method	Limit (mg/Kg)
Benzene	EPA SW-846 8021B or 8260B	0.2
BTEX	EPA SW-846 8021B or 8260B	50
TPH	EPA SW-846 418.1	2500
GRO/DRO	EPA SW-846 8015M	500
Chlorides	EPA 300.1	(1000/500

- 9. Upon completion of solidification and testing standards being passed, the pit area will be backfilled with compacted, non-waste containing, earthen material. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater. If standard testing fails BR will dig and haul all contents pursuant to 19.15.17.13.i.a. After doing such, confirmation sampling will be conducted to ensure a release has not occurred.
- 10. During the stabilization process if the liner is ripped by equipment the Aztec OCD office will be notified within 48 hours and the liner will be repaired if possible. If the liner can not be repaired then all contents will be excavated and removed.
- 11. Dig and Haul Material will be transported to the Envirotech Land Farm located 16 miles south of Bloomfield on Angel Peak Road, CR 7175. Permit # NM010011
- 12. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Reshaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.
- 13. Notification will be sent to OCD when the reclaimed area is seeded.
- 14. BR shall seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM stipulated seed mixes will used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

Туре	Variety or Cultivator	PLS/A
Western wheatgrass	Arriba	3.0
Indian ricegrass	Paloma or Rimrock	3.0
Slender wheatgrass	San Luis	2.0
Crested wheatgrass	Hy-crest	3.0
Bottlebrush Squirreltail	Unknown	2.0
Four-wing Saltbrush	Delar	.25

Species shall be planted in pounds of pure live seed per acre: Present Pure Live Seed (PLS) = Purity X Germination/100 Two lots of seed can be compared on the basis of PLS as follows:

Source No. One (poor quality)

Purity

50 percent

Germination

40 percent

Percent PLS

20 percent

Source No. two (better quality)

Purity

80 percent

Germination

63 percent

Percent PLS

50 percent

5 lb. bulk seed required to make 2 lb. bulk seed required to make

1 lb. PLS 1 lb. PLS

15. The temporary pit will be located with a steel marker, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial upon the abandonment of all the wells on the pad. The marker will be flush with the ground to allow access of the active well pad and for safety concerns. The marker will include a threaded collar to be used for future abandonment. The top of the marker will contain a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the operator's information at the time of all wells on the pad are abandoned. The operator's information will include the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.