第二年 曹 書 日本書を日本機の間のは 時、衛ののからなった、内でも、中の書で、へてき、 いい

FORM APPROVED OMB No. 1004-0137 Expires March 31, 2007

# UNITED STATES

⊿ ໑ *Ջ∩∩*7

5. Lease Serial No.

BUREAU OF LAND MAN	ACEMENT UEC 1		
APPLICATION FOR PERMIT TO	DDUL OF DESIGNA	Manage (16) (16) Indian, Allotee or Tribe Name	
a. Type of work: XDRILL REENTE	3 60	7 If Unit or CA Agreement, Name and No.	
o. Type of Well: Oil Well X Gas Well Other	Single Zone Multip	8. Lease Name and Well No. HOSS Com #95	
Name of Operator Dugan Production Corp.		9. API Well No. 30-045-34537	
A. Addres 709 East Murray Drive Farmington, NM 87401	30. Phone No. (Include area code)   10. Field and Pool, or Exploratory   505-325-1821   Basin Fruitlan		
Location of Well (Report Irration clearly and in accordance with an	y State requirements.")	11. Sec., T. R. M. or Blk and Survey or Area	
Atsurace 1700' FSL and 1700' FEL La	t. 36.23841 N	Sec. 12, T23N, R11W	
At proposed prod. zone Same as above. Los			
Distance is miles and direction from nearest town or post office.  Approx. 35-miles SE of Farmington	on, New Mexico 874	12. County or Parish 13. State San JUan NM	
Distance from proposed 1700 Feet property or lessel line, ft. (Also to nearest firm, unit line, if any)	16. No. of acres in lesse 1200.0 acres	17. Spacing Unit dedicated to this well	
Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft.	19. Proposed Depth 840 Feet	20. BELM/BIA Bond No. On File	
Elevations (Show whether DF, KDB, RT, CL, etc.) GL-6388'	22. Approximate date work will star ASAP	nt 23. Estimated duration 5-Days	
	24. Attachments		
e following, completed in accordance with the requirements of Ousboo Well plat certified by a registered surveyor.		trached to this form: We operations unless covered by an existing bond on file (st	
A Drilling Plan.  A Surface Use Plan (if the location is on National Forest System SUPO shall be filed with the appropriate Forest Service Office).		specific information and/or plans as may be required by the	
5. Signature / +	Name (Printed/Typed)	Date	
Geologist Square	Kurt Fagrel	ius   12/12/2007	
pproved by (Signature) / Marleo Co	Name (Printed/Typed)	Date 4/20/0	
tie AFM	Office FF0		
pplication approval does not warrant or certify that the applicant hold	s legal or equitable title to those right	ts in the subject lease which would entitle the applicant to	
nduct operations thereon. orditions of approval, if any, are attached.			

Title IB U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\*(Instructions on page 2)

NOTIFY AZTEC OCD 24 HRS.

A water based gel-mud will be used to drill surPace and production taking note. CEMENT

Standard 2,000 psi BOP will be used to drill production hole. The Fruitland Coal will be completed from approximately 645' - 690'. The interval will be fracture stimulated.

BLM'S APPROVAL OR ACCEPTANCE OF THIS ACTION DOES NOT RELIEVE THE LESSEE AND OPERATOR FROM OBTAINING ANY OTHER **AUTHORIZATION REQUIRED FOR OPERATIONS** ON FEDERAL AND INDIAN LANDS



DRILLING OPERATIONS AUTHORIZED ARE SUBJECT TO COMPLIANCE WITH ATTACHED "GENERAL REQUIREMENTS".

This action is subject to technical and procedural review pursuant to 43 CFR 3165.\$ and appeal pursuant to 43 CFR 3165.4



DuganFax

District I 1625 N. French Dr., Hobbs, NM 88240

District II 1301 W. Grand Avenue, Artesia, NM 88210

District III 1000 Rio Brazos Rd., Aztec, NM 87410

District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

320.0 Acres - (E/2)

State of New Mexico Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe, NM 87505


Form C-102
Revised October 12, 2005
Instructions on back
Submit to Appropriate District Office
State Lesse - 4 Copies
Fee Lesse - 3 Copies

AMENDED REPORT

### WELL LOCATION AND ACREAGE DEDICATION PLAT

	PI Numbe	_		Pool Coo	le		Pool Nam	e	
30.045	5.3	453	)  	71629	) [	BA	SIN FRUITL	AND COAL	
Property	Code			······································	Property	Name			Hell Number
3/98	0 ,				HOSS	COM			95
OGRID 1	<b>N</b> O		<del></del>		*Operator	Name			Elevation
00651	5			DUGAN	PRODUCTIO	ON CORPORATI	ON		63 <b>88</b> ·
					<sup>10</sup> Surface	Location			
U. or lot no.	Bection	Township	Renge	Lot Ide	Fact from the	North/South Tare	Feet from the	East/Mout   1/10	County
J	12	23N	11W		1700	SOUTH	1700	EAST	SAN JUAN
		11 B	ottom	Hole L	ocation I	f Different	From Surf	ace	
ul or lot no.	Section	Township	Range	Let Idn	Feet from the	North/South line	Fast from the	East/West line	County
<sup>td</sup> Deducated Acres	l			<u> </u>	Solat or Infill	M Commolidation Code	S Order No.		

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

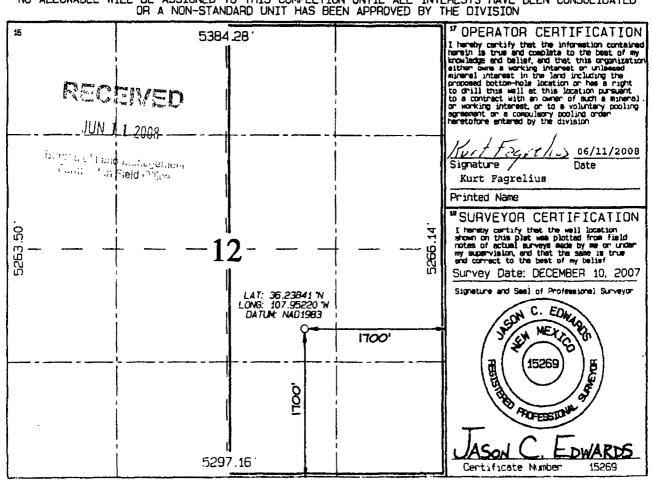

04-22-2009

DuganFax DUGAN

**UNITED STATES** Form 3160-5 FORM APPROVED (June\_1990) DEPARTMENT OF THE INTERIOR Budgel Bureau No 1004-0135 JUN 1 1 2008 **BUREAU OF LAND MANAGEMENT** Expires March 31,1993 5. Lease Designation and Serial No. SUNDRY NOTICES AND REPORTS ON WELLOS Land Warner from NM-96800 Do not use this form for proposals to drill or to deepen or reentity to a different reservoir. 6. If Indian, Allotted or Tribe Name Use "APPLICATION FOR PERMIT -" for such proposals SUBMIT IN TRIPLICATE 1 Type of Well 7. If Unit or CA, Agreement Designation X Well 2 Name of Operator 8. Well Name and No. Hoss Com #95 Dugan Production Corp. 3. Address and Telephone No. 30-045-P.O. Box 420, Farmington, NM 87499 (505) 325 - 1821 Location of Well (Footage, Sec., T., R., M., or Survey Description) 10. Field and Pool, or Exploratory Area 1700' FSL and 1700' FEL NMPM Basin Fruitland Coal Sec. 12, T23N, R11W 11. County or Paneh, State San Juan, NM 12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA TYPE OF SUBMISSION TYPE OF ACTION X Notice of Intent Abandonment Change of Plans Recompletion **New Construction** Subsequent Report Plugging Back Non-Routine Fracturing Casing Repair Water Shut-Off Final Abandonment Notice Altering Casing Conversion to Injection Other Change spacing unit Dispose Water on or Recompletion Report and Log form.) 13. Describe Proposed or Completed Operations (Clearly state at pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally diffied give subsurface locations and measured and true verticel depths for all merkers and zones pertinent to this work.)\*

An offset, proposed well pad and pipeline were re-located to minimize archaeologic impact in the area.

The new well pad would be at an unorthodox location unless the spacing units in subject section were changed from lay-down to stand-up.

The spacing unit for the Hoss Com #95 was changed from a lay-down to a stand-up orientation. All other information and material provided in the original APD dated 12/12/2007 will remain the same.

14 I hereby certify that the foregoing is true and correct

Signed Surf Fig. 1. Trile Geology Date June 11, 2008

(This space for Federal or State office used)

Approved by Houn Real Title ATM Date Date

Conditions of approval of any

Tale 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United Stares any false, factious or fraudident statements or representations as to any matter within its jurisdiction.

# EXHIBIT B OPERATIONS PLAN

Hoss Com #95

## APPROXIMATE FORMATION TOPS:

Total Depth		840′
Pictured Cliffs		690 <b>'</b>
Fruitland		325 <b>′</b>
Kirtland	t	Surface

Catch samples every 10 feet from 600 feet to total depth.

### LOGGING PROGRAM:

Run cased hole GR-CCL-CNL from total depth to surface.

#### CASING PROGRAM:

Hole	Casing		Setting	Grade and
Size	Size	Wt./ft.	Depth	Condition
12-1/4"	8-5/8"	24#	120'	J-55
7 <b>"</b>	5-1/2"	14#	840 <b>′</b>	J <b>-</b> 55

Plan to drill a 12-1/4" hole and set 120' of 8-5/8" OD, 24#, J-55 surface casing. Then plan to drill a 7" hole to total depth with gel-water mud program to test the Fruitland Coal. 5-1/2", 14#, J-55 production casing will be run and cemented. Cased hole GR-CCL-CNL log will be run. Productive zone will be perforated and fractured. After frac, the well will be cleaned out and production equipment will be installed.

# CEMENTING PROGRAM:

Surface: Cement to surface with 70 cf Class B + 2% CaCl<sub>2</sub>. Circulate to surface.

Production Stage-Cement with 90 cf 2%lodense with

4# celloflake/sx followed by 50 cf Class "B" with

4# celloflake/sx.

Total cement slurry for production stage is 140 cf

Circulate cement to surface.

An adequate spacer will be pumped ahead of the cement slurry to help prevent mud contamination of the cement. An adequate number of casing centralizers will be run through usable water zones to ensure that casing is centralized through these zones. The adequate number of centralizers will be determined based on API standards. Centralizers to impart a swirling action around

the casing will be used just below and into the base of the lowest usable water zone. These devices will assist mud displacement, increase cement bonding potential and create an effective hydraulic seal. A chronological log will be kept which records the pump rate, pump pressure, slurry density, and slurry volume for the cement job. The log will be sent to the BLM after completion of the job.

Maximum Anticipated Bottom Hole Pressure - 300 psi.

Drilling Fluid - will be fresh water with bentonite (8.9#/gal).

# WELLHEAD EQUIPMENT:

Huber 8-5/8"x5-1/2" casing head, 1000# WP, tested to 2000#. Huber 5-1/2"x2-7/8" tubing head, 1000# WP, tested to 2000#.

# BOP and Related Equipment will include for a 2000 psi system:

(Exhibit D)

Annular preventer, double ram, or 2 rams with one being blind and one being a pipe ram.

Kill line (2" minimum)

1 kill line valve (2" minimum)

1 choke line valve

2 chokes

Upper kelly cock valve with handle available Safety valve and subs to fit all drill string connections in use.

Pressure gauge on choke manifold.


2" minimum choke line.


Fill-up line.

#### Contacts:

Dugan Prod.Corp. Office & Radio Dispatch: 325-1821

Mark Brown	327 <b>-</b> 3632 320-8247	• •
Kurt Fagrelius	325-4327 320-8248	•
John Alexander	325-6927 320-1935	

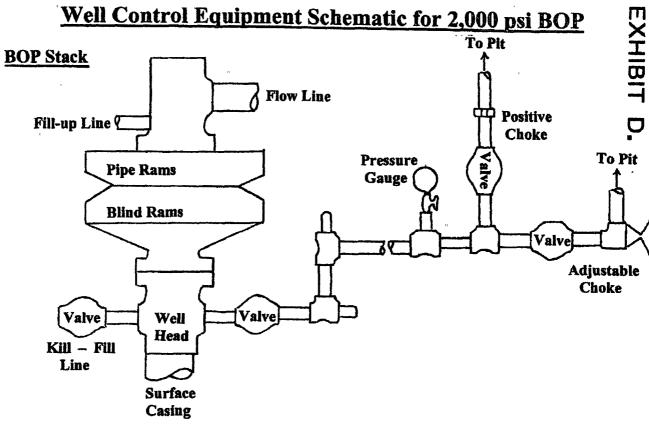

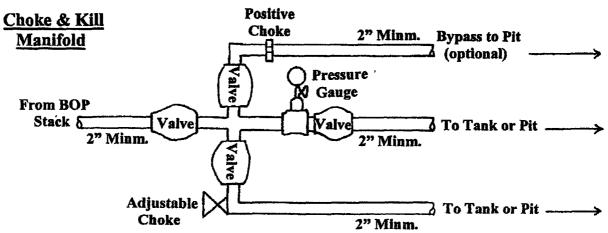

Working Pressure for all equipment is 2,000 psi or greater

**DUGAN PRODUCTION CORP.** 

Hoss Com #95