

**GW -** 308

**PERMITS,  
RENEWALS,  
& MODS  
Application**

ATTACHMENT TO THE DISCHARGE PERMIT GW-308  
WILLIAMS FIELD SERVICES COMPANY  
MARTINEZ DRAW COMPRESSOR STATION  
DISCHARGE PERMIT APPROVAL CONDITIONS  
(October 29, 2003)


1. Payment of Discharge Permit Fees: The \$100.00 filing fee has been received by the OCD. The \$1,700.00 required flat fee may be paid in a single payment due at the time of approval, or in equal annual installments over the duration of the permit, with the first payment due upon receipt of this approval.
2. Williams Field Services Company Commitments: Williams Field Services Company will abide by all commitments submitted in the Discharge Permit application dated October 21, 2003.
3. Waste Disposal: All wastes will be disposed of at an OCD approved facility. Only oilfield exempt wastes shall be disposed of down Class II injection wells. Non-exempt oilfield wastes that are non-hazardous may be disposed of at an OCD approved facility upon proper waste characterization per 40 CFR Part 261.
4. Drum Storage: All drums containing materials other than fresh water must be stored on an impermeable pad with curbing. All empty drums will be stored on their sides with the bungs in and lined up on a horizontal plane. Chemicals in other containers such as sacks or buckets will also be stored on an impermeable pad and curb type containment.
5. Process Areas: All process and maintenance areas which show evidence that leaks and spills are reaching the ground surface must be either paved and curbed or have some type of spill collection device incorporated into the design.
6. Above Ground Tanks: All above ground tanks which contain fluids other than fresh water must be bermed to contain a volume of one-third more than the total volume of the largest tank or of all interconnected tanks. All new tanks or existing tanks that undergo a major modification, as determined by the Division, must be placed within an impermeable bermed enclosure.
7. Above Ground Saddle Tanks: Above ground saddle tanks must have impermeable pad and curb type containment unless they contain fresh water or fluids that are gases at atmospheric temperature and pressure.
8. Labeling: All tanks, drums and containers will be clearly labeled to identify their contents and other emergency notification information.

9. Below Grade Tanks/Sumps: All below grade tanks, sumps, and pits must be approved by the OCD prior to installation or upon modification and must incorporate secondary containment and leak-detection into the design. All pre-existing sumps and below-grade tanks must demonstrate integrity on an annual basis. Integrity tests include pressure testing to 3 pounds per square inch above normal operating pressure and/or visual inspection of cleaned out tanks and/or sumps, or other OCD approved methods. The OCD will be notified at least 72 hours prior to all testing.
10. Underground Process/Wastewater Lines: All underground process/wastewater pipelines must be tested to demonstrate their mechanical integrity at present and then every 5 years thereafter, or prior to Discharge Permit. Permittees may propose various methods for testing such as pressure testing to 3 pounds per square inch above normal operating pressure or other means acceptable to the OCD. The OCD will be notified at least 72 hours prior to all testing.
11. Class V Wells: Leach fields and other wastewater disposal systems at OCD regulated facilities which inject non-hazardous fluid into or above an underground source of drinking water are considered Class V injection wells under the EPA UIC program. All Class V wells that inject non-hazardous industrial wastes or a mixture of industrial wastes and domestic wastes will be closed unless it can be demonstrated that groundwater will not be impacted in the reasonably foreseeable future. Closure of Class V wells must be in accordance with a plan approved by the Division's Santa Fe Office. The OCD allows industry to submit closure plans that are protective of human health, the environment and groundwater as defined by the WQCC, and are cost effective. Class V wells that inject domestic waste only must be permitted by the New Mexico Environment Department.
12. Housekeeping: All systems designed for spill collection/prevention will be inspected weekly and after each storm event to ensure proper operation and to prevent overtopping or system failure. A record of inspections will be retained on site for a period of five years.
13. Spill Reporting: All spills/releases will be reported pursuant to OCD Rule 116 and WQCC 1203 to the OCD Aztec District Office.
14. Transfer of Discharge Permit: The OCD will be notified prior to any transfer of ownership, control, or possession of a facility with an approved discharge permit. A written commitment to comply with the terms and conditions of the previously approved discharge permit must be submitted by the purchaser and approved by the OCD prior to transfer.
15. Storm Water Plan: Williams Field Services Company shall maintain storm water runoff controls. As a result of Williams Field Services Company's operations any water contaminant that exceeds the WQCC standards listed in 20 NMAC 6.2.3101 is discharged in any storm water runoff then Williams Field Services Company shall notify the OCD within 24 hours, modify the plan within 15 days and submit for OCD approval. Williams Field Services Company shall also take immediate corrective actions pursuant to Item 12 of these conditions.

16. Closure: The OCD will be notified when operations of the Martinez Draw Compressor Station are discontinued for a period in excess of six months. Prior to closure of the Martinez Draw Compressor Station a closure plan will be submitted for approval by the Director. Closure and waste disposal will be in accordance with the statutes, rules and regulations in effect at the time of closure.
17. Certification: Williams Field Services Company, by the officer whose signature appears below, accepts this permit and agrees to comply with all terms and conditions contained herein. Williams Field Services Company further acknowledges that these conditions and requirements of this permit may be changed administratively by the Division for good cause shown as necessary to protect fresh water, human health and the environment.

Accepted:

WILLIAMS FIELD SERVICES COMPANY

by 

Title

ENVIRONMENTAL SPECIALIST



# NEW MEXICO ENERGY, MINERALS and NATURAL RESOURCES DEPARTMENT

**BILL RICHARDSON**

Governor

Joanna Prukop  
Cabinet Secretary

October 29, 2003

Lori Wrotenbery

Director

Oil Conservation Division

Mr. Michael K. Lane  
Williams Field Services Company  
118 County Road 4900  
Bloomfield, New Mexico 87413

**RE: Discharge Permit Renewal GW-308  
Williams Field Services Company  
Martinez Draw Compressor Station  
Rio Arriba County, New Mexico**

Dear Mr. Lane:

The ground water Discharge Permit GW-308 for the Williams Field Services Company Martinez Draw Compressor Station located in the NW/4 NE/4 of Section 17, Township 31 North, Range 5 West, NMPM, Rio Arriba County, New Mexico, **is hereby approved** under the conditions contained in the enclosed attachment. The discharge plan consists of the original application dated September 15, 1998 approved January 20, 1999, the renewal application dated October 21, 2003 and the attached stipulations of approval. Enclosed are two copies of the conditions of approval. **Please sign and return one copy to the New Mexico Oil Conservation Division (OCD) Santa Fe Office within 30 days of receipt of this letter.**

The Discharge Permit application was submitted pursuant to 20 NMAC 3106 of the New Mexico Water Quality Control Commission (WQCC) Regulations. It is approved pursuant to 20 NMAC 3109.A. Please note 20 NMAC 3109.E and 20 NMAC 3109.F, which provide for possible future amendments or modifications of the permit. Please be advised that approval of this permit does not relieve Williams Field Services Company of liability should operations result in pollution of surface water, ground water, or the environment.

Please be advised that all exposed pits, including lined pits and open tanks (tanks exceeding 16 feet in diameter), shall be screened, netted, or otherwise rendered nonhazardous to wildlife including migratory birds.

Please note that 20 NMAC 3104 of the regulations provides: "When a permit has been approved, discharges must be consistent with the terms and conditions of the permit." Pursuant to 20 NMAC 3107.C., Williams Field Services Company is required to notify the Director of any facility expansion, production increase, or process modification that would result in any change in the discharge of water quality or volume.

Mr. Michael K. Lane  
GW-308 Martinez Draw Compressor Station  
October 29, 2003  
Page 2

Pursuant to 20 NMAC 3109.G.4., this permit is for a period of five years. This approval will expire on **January 20, 2009**, and Williams Field Services Company should submit an application in ample time before this date. Note that under 20 NMAC 3106.F. of the regulations, if a discharger submits a Discharge Permit application at least 120 days before the discharge permit expires and is in compliance with the approved permit, then the existing discharge permit will not expire until the application for renewal has been approved or disapproved. It should be noted that all discharge permit facilities will be required to submit the results of an underground drainage testing program as a requirement for Discharge Permit.

The Discharge Permit application for the Williams Field Services Company Martinez Draw Compressor Station is subject to WQCC Regulation 3114. Every billable facility submitting a discharge permit application will be assessed a fee equal to the filing fee of \$100 plus a flat fee of \$1,700.00 for compressor station with greater than 1,001 horsepower rating. The OCD has received the filing fee.

**Please make all checks payable to: Water Management Quality Management Fund  
C/o: Oil Conservation Division  
1220 South St. Francis Drive  
Santa Fe, New Mexico 87505.**

If you have any questions please contact Mr. W. Jack Ford at (505) 476-3489. On behalf of the staff of the OCD, I wish to thank you and your staff for your cooperation during this discharge permit review.

Sincerely,



Roger C. Anderson  
Chief, Environmental Bureau  
Oil Conservation Division

RCA/wjf  
Attachment

xc: OCD Aztec Office

ATTACHMENT TO THE DISCHARGE PERMIT GW-308  
WILLIAMS FIELD SERVICES COMPANY  
MARTINEZ DRAW COMPRESSOR STATION  
DISCHARGE PERMIT APPROVAL CONDITIONS  
(October 29, 2003)

1. Payment of Discharge Permit Fees: The \$100.00 filing fee has been received by the OCD. The \$1,700.00 required flat fee may be paid in a single payment due at the time of approval, or in equal annual installments over the duration of the permit, with the first payment due upon receipt of this approval.
2. Williams Field Services Company Commitments: Williams Field Services Company will abide by all commitments submitted in the Discharge Permit application dated October 21, 2003.
3. Waste Disposal: All wastes will be disposed of at an OCD approved facility. Only oilfield exempt wastes shall be disposed of down Class II injection wells. Non-exempt oilfield wastes that are non-hazardous may be disposed of at an OCD approved facility upon proper waste characterization per 40 CFR Part 261.
4. Drum Storage: All drums containing materials other than fresh water must be stored on an impermeable pad with curbing. All empty drums will be stored on their sides with the bungs in and lined up on a horizontal plane. Chemicals in other containers such as sacks or buckets will also be stored on an impermeable pad and curb type containment.
5. Process Areas: All process and maintenance areas which show evidence that leaks and spills are reaching the ground surface must be either paved and curbed or have some type of spill collection device incorporated into the design.
6. Above Ground Tanks: All above ground tanks which contain fluids other than fresh water must be bermed to contain a volume of one-third more than the total volume of the largest tank or of all interconnected tanks. All new tanks or existing tanks that undergo a major modification, as determined by the Division, must be placed within an impermeable bermed enclosure.
7. Above Ground Saddle Tanks: Above ground saddle tanks must have impermeable pad and curb type containment unless they contain fresh water or fluids that are gases at atmospheric temperature and pressure.
8. Labeling: All tanks, drums and containers will be clearly labeled to identify their contents and other emergency notification information.

9. Below Grade Tanks/Sumps: All below grade tanks, sumps, and pits must be approved by the OCD prior to installation or upon modification and must incorporate secondary containment and leak-detection into the design. All pre-existing sumps and below-grade tanks must demonstrate integrity on an annual basis. Integrity tests include pressure testing to 3 pounds per square inch above normal operating pressure and/or visual inspection of cleaned out tanks and/or sumps, or other OCD approved methods. The OCD will be notified at least 72 hours prior to all testing.
10. Underground Process/Wastewater Lines: All underground process/wastewater pipelines must be tested to demonstrate their mechanical integrity at present and then every 5 years thereafter, or prior to Discharge Permit. Permittees may propose various methods for testing such as pressure testing to 3 pounds per square inch above normal operating pressure or other means acceptable to the OCD. The OCD will be notified at least 72 hours prior to all testing.
11. Class V Wells: Leach fields and other wastewater disposal systems at OCD regulated facilities which inject non-hazardous fluid into or above an underground source of drinking water are considered Class V injection wells under the EPA UIC program. All Class V wells that inject non-hazardous industrial wastes or a mixture of industrial wastes and domestic wastes will be closed unless it can be demonstrated that groundwater will not be impacted in the reasonably foreseeable future. Closure of Class V wells must be in accordance with a plan approved by the Division's Santa Fe Office. The OCD allows industry to submit closure plans that are protective of human health, the environment and groundwater as defined by the WQCC, and are cost effective. Class V wells that inject domestic waste only must be permitted by the New Mexico Environment Department.
12. Housekeeping: All systems designed for spill collection/prevention will be inspected weekly and after each storm event to ensure proper operation and to prevent overtopping or system failure. A record of inspections will be retained on site for a period of five years.
13. Spill Reporting: All spills/releases will be reported pursuant to OCD Rule 116 and WQCC 1203 to the OCD Aztec District Office.
14. Transfer of Discharge Permit: The OCD will be notified prior to any transfer of ownership, control, or possession of a facility with an approved discharge permit. A written commitment to comply with the terms and conditions of the previously approved discharge permit must be submitted by the purchaser and approved by the OCD prior to transfer.
15. Storm Water Plan: Williams Field Services Company shall maintain storm water runoff controls. As a result of Williams Field Services Company's operations any water contaminant that exceeds the WQCC standards listed in 20 NMAC 6.2.3101 is discharged in any storm water runoff then Williams Field Services Company shall notify the OCD within 24 hours, modify the plan within 15 days and submit for OCD approval. Williams Field Services Company shall also take immediate corrective actions pursuant to Item 12 of these conditions.

16. Closure: The OCD will be notified when operations of the Martinez Draw Compressor Station are discontinued for a period in excess of six months. Prior to closure of the Martinez Draw Compressor Station a closure plan will be submitted for approval by the Director. Closure and waste disposal will be in accordance with the statutes, rules and regulations in effect at the time of closure.

17. Certification: Williams Field Services Company, by the officer whose signature appears below, accepts this permit and agrees to comply with all terms and conditions contained herein. Williams Field Services Company further acknowledges that these conditions and requirements of this permit may be changed administratively by the Division for good cause shown as necessary to protect fresh water, human health and the environment.

Accepted:

WILLIAMS FIELD SERVICES COMPANY

by \_\_\_\_\_  
Title

ATTACHMENT TO THE DISCHARGE PLAN GW-308  
Williams Martinez Draw Compressor Station Facility located in NW/4 NE/4 Sec 17-Ts31N-R5W  
Rio Arriba County, New Mexico  
DISCHARGE PLAN APPROVAL CONDITIONS  
(January 20, 1999)

1. Payment of Discharge Plan Fees: The \$50.00 filing fee has been submitted. The \$690.00 required flat fee may be paid in a single payment due at the time of approval, or in equal annual installments over the duration of the plan, with the first payment due upon receipt of this approval.
2. Commitments: Williams Field Services will abide by all commitments submitted in the discharge plan application dated September 15, 1998.
3. Waste Disposal: All wastes will be disposed of at an OCD approved facility. Only oilfield exempt wastes shall be disposed of down Class II injection wells. Non-exempt oilfield wastes that are non-hazardous may be disposed of at an OCD approved facility upon proper waste characterization per 40 CFR Part 261.
4. Drum Storage: All drums containing materials other than fresh water must be stored on an impermeable pad with curbing. All empty drums will be stored on their sides with the bungs in and lined up on a horizontal plane. Chemicals in other containers such as sacks or buckets will also be stored on an impermeable pad and curb type containment.
5. Process Areas: All process and maintenance areas which show evidence that leaks and spills are reaching the ground surface must be either paved and curbed or have some type of spill collection device incorporated into the design.
6. Above Ground Tanks: All above ground tanks which contain fluids other than fresh water must be bermed to contain a volume of one-third more than the total volume of the largest tank or of all interconnected tanks. All new tanks or existing tanks that undergo a major modification, as determined by the Division, must be placed within an impermeable bermed enclosure.
7. Above Ground Saddle Tanks: Above ground saddle tanks must have impermeable pad and curb type containment unless they contain fresh water or fluids that are gases at atmospheric temperature and pressure.
8. Labeling: All tanks, drums and containers will be clearly labeled to identify their contents and other emergency notification information.

9. **Below Grade Tanks/Sumps:** All below grade tanks, sumps, and pits must be approved by the OCD prior to installation or upon modification and must incorporate secondary containment and leak-detection into the design. All pre-existing sumps and below-grade tanks must demonstrate integrity on an annual basis. Integrity tests include pressure testing to 3 pounds per square inch above normal operating pressure and/or visual inspection of cleaned out tanks and/or sumps, or other OCD approved methods. The OCD will be notified at least 72 hours prior to all testing.
10. **Underground Process/Wastewater Lines:** All underground process/wastewater pipelines must be tested to demonstrate their mechanical integrity at present and then every 5 years thereafter, or prior to discharge plan renewal. Permittees may propose various methods for testing such as pressure testing to 3 pounds per square inch above normal operating pressure or other means acceptable to the OCD. The OCD will be notified at least 72 hours prior to all testing.
11. **Class V Wells:** Leach fields and other wastewater disposal systems at OCD regulated facilities which inject non-hazardous fluid into or above an underground source of drinking water are considered Class V injection wells under the EPA UIC program. All Class V wells that inject non-hazardous industrial wastes or a mixture of industrial wastes and domestic wastes will be closed unless it can be demonstrated that groundwater will not be impacted in the reasonably foreseeable future. Closure of Class V wells must be in accordance with a plan approved by the Division's Santa Fe Office. The OCD allows industry to submit closure plans which are protective of human health, the environment and groundwater as defined by the WQCC, and are cost effective. Class V wells that inject domestic waste only must be permitted by the New Mexico Environment Department.
12. **Housekeeping:** All systems designed for spill collection/prevention will be inspected weekly and after each storm event to ensure proper operation and to prevent overtopping or system failure. A record of inspections will be retained on site for a period of five years.
13. **Spill Reporting:** All spills/releases will be reported pursuant to OCD Rule 116 and WQCC 1203 to the OCD Aztec District Office.
14. **Transfer of Discharge Plan:** The OCD will be notified prior to any transfer of ownership, control, or possession of a facility with an approved discharge plan. A written commitment to comply with the terms and conditions of the previously approved discharge plan must be submitted by the purchaser and approved by the OCD prior to transfer.
15. **Closure:** The OCD will be notified when operations of the facility are discontinued for a period in excess of six months. Prior to closure of the facility a closure plan will be submitted for approval by the Director. Closure and waste disposal will be in accordance with the statutes, rules and regulations in effect at the time of closure.

16. **Certification:** Williams Field Services by the officer whose signature appears below, accepts this permit and agrees to comply with all terms and conditions contained herein and further acknowledges that these conditions and requirements of this permit may be changed administratively by the Division for good cause shown as necessary to protect fresh water, human health and the environment.

Accepted:

**Williams Field Services**

Print Name: Ignat Deklan

Signature: 

Title: Envtl Spec

Date: 1/22/99



NEW MEXICO ENERGY, MINERALS  
& NATURAL RESOURCES DEPARTMENT

OIL CONSERVATION DIVISION  
2040 South Pacheco Street  
Santa Fe, New Mexico 87505  
(505) 827-7131

January 20, 1999

**CERTIFIED MAIL**  
**RETURN RECEIPT NO. P 288 259 091**

Ingrid Deklau  
Environmental Specialist  
Williams Field Services  
P.O. Box 58900  
Salt Lake City, UT 84108

**RE: Discharge Plan GW-308**  
**Williams Martinez Draw Compressor Station**  
**NW/4 NE/4 Sec 17-Ts 31N-R5W Rio Arriba County, New Mexico**

**Dear Ms. Deklau:**

The ground water discharge plan GW-308 for the Williams Martinez Draw Compressor Station Facility located in the Northwest quarter/Northeast quarter of Section 17, Township 31 North, Range 5 West, NMPM, Rio Arriba County, New Mexico, is hereby approved under the conditions contained in the enclosed attachment. The discharge plan consists of the application dated September 15, 1998, and the attached discharge plan approval conditions. Enclosed are two copies of the conditions of approval, please sign and return one copy to the New Mexico Oil Conservation Division (OCD) Santa Fe Office within 10 working days of receipt of this letter.

The discharge plan was submitted pursuant to Section 3106 of the New Mexico Water Quality Control Commission (WQCC) Regulations. It is approved pursuant to Section 3109.A. Please note Sections 3109.E and 3109.F, which provide for possible future amendments or modifications of the plan. Please be advised that approval of this plan does not relieve Williams Field Services of liability should operations result in pollution of surface water, ground water, or the environment.

Please be advised that all exposed pits, including lined pits and open tanks (tanks exceeding 16 feet in diameter), shall be screened, netted, or otherwise rendered nonhazardous to wildlife including migratory birds.

Please note that Section 3104 of the regulations provides: "When a facility has been approved, discharges must be consistent with the terms and conditions of the plan." Pursuant to Section 3107.C., Williams Field Services is required to notify the Director of any facility expansion, production increase, or process modification that would result in any change in the discharge of water quality or volume.

Ms. Deklau  
January 20, 1999  
Page 2

Pursuant to Section 3109.G.4., this plan is for a period of five years. **This approval will expire on January 19, 2005** and **Williams Field Services** should submit an application in ample time before this date. Note that under Section 3106.F. of the regulations, if a discharger submits a discharge plan renewal application at least 120 days before the discharge plan expires and is in compliance with the approved plan, then the existing discharge plan will not expire until the application for renewal has been approved or disapproved. It should be noted that all discharge plan facilities will be required to submit the results of an underground drainage testing program as a requirement for discharge plan renewal.

The discharge plan application for the **Williams Field Services** facility is subject to WQCC Regulation 3114 discharge plan fees. Every billable facility submitting a discharge plan will be assessed a fee equal to the filing fee of \$50 plus a flat fee of **\$690.00 for Gas Compressor Stations with total horsepower (HP) ratings ranging between 1001 HP to 3000 HP**. The OCD has received the filing fee. The flat fee may be paid in a single payment due on the date of the discharge plan approval or in five equal installments over the expected duration of the discharge plan. Installment payments shall be remitted yearly, with the first installment due on the date of the discharge plan approval.

Please make all checks payable to **NMED-Water Quality Management** and addressed to the OCD Santa Fe Office.

If you have any questions, please contact Wayne Price of my staff at (505-827-7155). On behalf of the staff of the OCD, I wish to thank you and your staff for your cooperation during this discharge plan review.

Sincerely,



Roger Anderson  
Environmental Bureau Chief

RA/lwp  
Attachment-1

xc: OCD Aztec Office

ATTACHMENT TO THE DISCHARGE PLAN GW-308  
Williams Martinez Draw Compressor Station Facility located in NW/4 NE/4 Sec 17-Ts31N-R5W  
Rio Arriba County, New Mexico  
DISCHARGE PLAN APPROVAL CONDITIONS  
(January 20, 1999)

1. **Payment of Discharge Plan Fees:** The \$50.00 filing fee has been submitted. The \$690.00 required flat fee may be paid in a single payment due at the time of approval, or in equal annual installments over the duration of the plan, with the first payment due upon receipt of this approval.
2. **Commitments:** Williams Field Services will abide by all commitments submitted in the discharge plan application dated September 15, 1998.
3. **Waste Disposal:** All wastes will be disposed of at an OCD approved facility. Only oilfield exempt wastes shall be disposed of down Class II injection wells. Non-exempt oilfield wastes that are non-hazardous may be disposed of at an OCD approved facility upon proper waste characterization per 40 CFR Part 261.
4. **Drum Storage:** All drums containing materials other than fresh water must be stored on an impermeable pad with curbing. All empty drums will be stored on their sides with the bungs in and lined up on a horizontal plane. Chemicals in other containers such as sacks or buckets will also be stored on an impermeable pad and curb type containment.
5. **Process Areas:** All process and maintenance areas which show evidence that leaks and spills are reaching the ground surface must be either paved and curbed or have some type of spill collection device incorporated into the design.
6. **Above Ground Tanks:** All above ground tanks which contain fluids other than fresh water must be bermed to contain a volume of one-third more than the total volume of the largest tank or of all interconnected tanks. All new tanks or existing tanks that undergo a major modification, as determined by the Division, must be placed within an impermeable bermed enclosure.
7. **Above Ground Saddle Tanks:** Above ground saddle tanks must have impermeable pad and curb type containment unless they contain fresh water or fluids that are gases at atmospheric temperature and pressure.
8. **Labeling:** All tanks, drums and containers will be clearly labeled to identify their contents and other emergency notification information.

9. Below Grade Tanks/Sumps: All below grade tanks, sumps, and pits must be approved by the OCD prior to installation or upon modification and must incorporate secondary containment and leak-detection into the design. All pre-existing sumps and below-grade tanks must demonstrate integrity on an annual basis. Integrity tests include pressure testing to 3 pounds per square inch above normal operating pressure and/or visual inspection of cleaned out tanks and/or sumps, or other OCD approved methods. The OCD will be notified at least 72 hours prior to all testing.
10. Underground Process/Wastewater Lines: All underground process/wastewater pipelines must be tested to demonstrate their mechanical integrity at present and then every 5 years thereafter, or prior to discharge plan renewal. Permittees may propose various methods for testing such as pressure testing to 3 pounds per square inch above normal operating pressure or other means acceptable to the OCD. The OCD will be notified at least 72 hours prior to all testing.
11. Class V Wells: Leach fields and other wastewater disposal systems at OCD regulated facilities which inject non-hazardous fluid into or above an underground source of drinking water are considered Class V injection wells under the EPA UIC program. All Class V wells that inject non-hazardous industrial wastes or a mixture of industrial wastes and domestic wastes will be closed unless it can be demonstrated that groundwater will not be impacted in the reasonably foreseeable future. Closure of Class V wells must be in accordance with a plan approved by the Division's Santa Fe Office. The OCD allows industry to submit closure plans which are protective of human health, the environment and groundwater as defined by the WQCC, and are cost effective. Class V wells that inject domestic waste only must be permitted by the New Mexico Environment Department.
12. Housekeeping: All systems designed for spill collection/prevention will be inspected weekly and after each storm event to ensure proper operation and to prevent overtopping or system failure. A record of inspections will be retained on site for a period of five years.
13. Spill Reporting: All spills/releases will be reported pursuant to OCD Rule 116 and WQCC 1203 to the OCD Aztec District Office.
14. Transfer of Discharge Plan: The OCD will be notified prior to any transfer of ownership, control, or possession of a facility with an approved discharge plan. A written commitment to comply with the terms and conditions of the previously approved discharge plan must be submitted by the purchaser and approved by the OCD prior to transfer.
15. Closure: The OCD will be notified when operations of the facility are discontinued for a period in excess of six months. Prior to closure of the facility a closure plan will be submitted for approval by the Director. Closure and waste disposal will be in accordance with the statutes, rules and regulations in effect at the time of closure.

16. **Certification:** Williams Field Services by the officer whose signature appears below, accepts this permit and agrees to comply with all terms and conditions contained herein and further acknowledges that these conditions and requirements of this permit may be changed administratively by the Division for good cause shown as necessary to protect fresh water, human health and the environment.

Accepted:

**Williams Field Services**

Print Name: \_\_\_\_\_

Signature: \_\_\_\_\_

Title: \_\_\_\_\_

Date: \_\_\_\_\_

District I  
1625 N. French Dr., Hobbs, NM 88240  
District II  
1301 W. Grand Avenue, Artesia, NM 88210  
District III  
1000 Rio Brazos Road, Aztec, NM 87410  
District IV  
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico  
Energy Minerals and Natural Resources  
Oil Conservation Division  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

Revised June 10, 2003

Submit Original  
Plus 1 Copy  
to Santa Fe  
1 Copy to Appropriate  
District Office

**DISCHARGE PLAN APPLICATION FOR SERVICE COMPANIES, GAS PLANTS,  
REFINERIES, COMPRESSOR, GEOTHERMAL FACILITIES  
AND CRUDE OIL PUMP STATIONS**

(Refer to the OCD Guidelines for assistance in completing the application)

New  Renewal  Modification

1. Type: Compressor Station (Martinez Draw Compressor Station)

2. Operator: Williams Field Services Company

Address: 188 CR 4900, Bloomfield, New Mexico 87413

Contact Person: Michael K. Lane Phone: (505) 632-4625

3. Location: NW /4 NE /4 Section 17 Township 31N Range 5W  
Submit large scale topographic map showing exact location.

4. Attach the name, telephone number and address of the landowner of the facility site.
5. Attach the description of the facility with a diagram indicating location of fences, pits, dikes and tanks on the facility.
6. Attach a description of all materials stored or used at the facility.
7. Attach a description of present sources of effluent and waste solids. Average quality and daily volume of waste water must be included.
8. Attach a description of current liquid and solid waste collection/treatment/disposal procedures.
9. Attach a description of proposed modifications to existing collection/treatment/disposal systems.
10. Attach a routine inspection and maintenance plan to ensure permit compliance.
11. Attach a contingency plan for reporting and clean-up of spills or releases.
12. Attach geological/hydrological information for the facility. Depth to and quality of ground water must be included.
13. Attach a facility closure plan, and other information as is necessary to demonstrate compliance with any other OCD rules, regulations and/or orders.
14. CERTIFICATION: I hereby certify that the information submitted with this application is true and correct to the best of my knowledge and belief.

Name: Michael K. Lane

Title: Environmental Specialist

Signature: 

Date: 10/21/2003

E-mail Address: Michael.K.Lane@Williams.com



Martinez Draw  
Compressor Station

NMOCD  
Discharge Plan

Williams Field Services  
188 CR 4900  
Bloomfield, NM 87413



### Table of Contents

1.0	Type of Operation-----	3
2.0	Legally Responsible Party -----	3
3.0	Location of Facility-----	3
4.0	Landowner-----	3
5.0	Facility Description-----	3
6.0	Source, Quantity and Quality of Effluents and Waste Solids -----	3
7.0	Transfer, Storage and Disposal of Process Fluids, Effluents and Waste Solids -----	4
8.0	Storm Water Plan -----	4
9.0	Inspection, Maintenance, and Reporting -----	5
10.0	Spill/Leak Prevention and Reporting (Contingency Plans)-----	5
11.0	Site Characteristics-----	6
12.0	Facility Closure Plan -----	6

### List of Tables

Table 1 – Source, Quantity and Quality of Effluent and Waste Solids

Table 2 – Transfer, Storage and Disposal of Process Fluids, Effluents, and Waste Solids

### List of Figures

Figure 1 - Site Vicinity / Topographic Map

Figure 2 - Facility Plot Plan

### List of Appendices

Appendix A – WFS Spill Control Procedures

Appendix B – NMOCD Notification of Fire, Breaks, Spills, Leaks, and Blowouts

Appendix C – Public Notice



### 1.0 TYPE OF OPERATION

The Martinez Draw Compressor Station was constructed in 1998 to provide metering and compression services to various producers for the gathering of natural gas for treatment and delivery through the Williams Field Services (WFS) system.

### 2.0 LEGALLY RESPONSIBLE PARTY

Williams Field Services  
188 CR 4900  
Bloomfield, NM 87413  
(505) 632-4625

Contact Person:  
Michael K. Lane, Senior Environmental Specialist  
Phone and Address, Same as Above

### 3.0 LOCATION OF FACILITY

The facility is located in Section 17, Township 31 North, Range 5 West, in Rio Arriba County, New Mexico, approximately 34 miles east of Aztec, New Mexico. The facility latitude and longitude are North 36° 54.301,14' and West 107° 23.256,66'. A site location map is attached (USGS 7.5 Min. Quadrangle: Bancos Mesa NW, New Mexico) as Figure 1.

### 4.0 LANDOWNER

Williams Field Services is leasing the subject property from:

Bureau of Land Management  
1235 N. La Plata Highway  
Farmington, NM 87401  
(505) 599-8900

### 5.0 FACILITY DESCRIPTION

This facility is a field compressor station and is un-manned. The site has been permitted to allow operation of one (1) 1478-hp engine, one (1) 1232-hp engine, and one (1) dehydrator. Currently, one (1) engine and one (1) dehydrator exist at the site. Compressors and dehydrators may be installed or removed to meet demand. The facility layout is illustrated in Figure 2.

### 6.0 SOURCE, QUANTITY AND QUALITY OF EFFLUENTS AND WASTE SOLIDS

The source, quantity, and quality of effluent and waste solids generated at the compressor station are summarized in Table 1.



## 7.0 TRANSFER, STORAGE AND DISPOSAL OF PROCESS FLUIDS, EFFLUENTS AND WASTE SOLIDS

Wastes generated at this facility fall into two categories: exempt and non-exempt. Exempt wastes include, but may not be limited to, used process filters, condensate spill cleanups (spill residue), certain absorbents, and produced water with or without de minimus quantities of non-hazardous liquids. Non-exempt wastes include, but may not be limited to, used oil, used oil filters, and engine coolant. Table 2 describes the transfer, storage and disposal of exempt and non-exempt process fluids, effluents, and waste solids expected to be generated at the site.

Non-exempt waste management will be conducted in accordance with NMOCD requirements including the preparation of a Certificate of Waste Status for each non-exempt waste stream. Non-exempt wastes will be analyzed at a minimum for BTEX, TPH, RCRA D-List metals, ignitability, corrosivity, and reactivity to initially determine if such waste are hazardous as defined in 40 CFR Part 261. All wastes at the facility will be periodically surveyed for naturally occurring radioactive material (NORM) to determine if the concentrations of radium 226 exceed 30 picocuries per gram or if radiation exposure exceeds 50 microroentgens per hour. If affirmed, such materials will be handled and disposed in accordance with NMOCD NORM Regulations.

Barring facility modification and/or process changes, the classification of non-exempt wastes by laboratory analyses will be made once during the approval period of this plan. Subsequent laboratory analyses will be performed at the generator's discretion (minimum of once every five years), or more frequently to comply with waste acceptance procedures of the disposal facility.

## 8.0 STORM WATER PLAN

This storm water section was developed to provide a plan to monitor and mitigate impact to storm water runoff from the facility. It serves to satisfy storm water management concerns of the NMOCD. It is not intended to comply with 40 CFR Part 122, Storm Water Discharges as this facility is excluded in 122.26 (c) (1) (iii).

This section concentrates on the identification of potential pollutants, inspection and maintenance of the pollutant controls, and gives a description of structural controls to prevent storm water pollution.

### 8.1 Site Assessment and Facility Controls

An evaluation of the material used and stored on this site that may be exposed to storm water indicates that no materials would routinely be exposed to precipitation. There are no engineered storm water controls or conveyances; all storm water leaves the site by overland flow.

Any leakage or spill from the identified potential pollutant sources, if uncontained by existing berms, curbs, or emergency response actions, could flow overland to open off-site drainage ditches (arroyos) and thus impact storm water. In such an event, containment would occur by blocking the ditch or culvert downstream of the pollutant. Cleanup of the substance and implementation of mitigation measures could be conducted while protecting downstream storm watercourses.



## 8.2 Best Management Practices

Following are Best Management Practices (BMPs) to be implemented to prevent or mitigate pollution to storm water from facility operations:

- All waste materials and debris will be properly disposed of on an on-going basis in appropriate containers and locations for collection and removal from the site.
- Temporary storage of potential pollutant sources will be located in areas with appropriate controls for storm water protection. This would include ensuring all containers are sealed/covered and otherwise protected from contact with precipitation.
- Periodic inspection of channels and culverts shall be performed at least twice annually and after any major precipitation event.
- Sediment deposits and debris will be removed from the channels and culverts as necessary and any erosion damage at the outfall (if any) will be repaired or controlled.
- Conduct inspections of the facility on a regular basis as part of the preventive maintenance site check. Such inspections will include the visual assessment of corroded or damaged drums and tanks, broken or breached containment structures, collapsed or clogged drainages or drain lines.

Implementation of the BMPs will prevent or mitigate impact to storm water runoff from this facility.

## 9.0 INSPECTION, MAINTENANCE AND REPORTING

Williams personnel will operate and maintain the compression unit at the facility. The facility will be remotely monitored for equipment malfunctions through Gas Dispatch. The facility will be visited several times per week at a minimum, and an operator will be on call 24 hours per day, 7 days per week, 52 weeks per year. The above ground and below-grade tanks will be gauged regularly, and monitored for leak detection.

In the event of a release of a reportable quantity, the operator reports the release to a contracted spill notification service. The service immediately notifies the Williams Environmental Department and all appropriate agencies.

## 10.0 SPILL/LEAK PREVENTION AND REPORTING (CONTINGENCY PLANS)

Spill containment berms around above ground storage tanks will be designed to contain 133% of the tank capacity. The below-grade tanks will be constructed with a means of leak detection, and will either be double-walled tanks, double-bottomed tanks or a tank set on an impermeable pad.

Williams corporate policy and procedure for the controlling and reporting of Discharges or Spills of Oil or Hazardous Substances is provided in Appendix A. Significant spills and leaks are reported to the NMOCD pursuant to NMOCD Rule 116 and WQCC 1-203 using the NMOCD form (see Appendix B).



## 11.0 SITE CHARACTERISTICS

The Martinez Draw Compressor Station is located in Cabresto Canyon. The site elevation is approximately 6,200 feet above mean sea level. The natural ground surface topography slopes downward toward the northeast. The maximum relief over the site is approximately 10 feet. Site drainage is to the northeast. Intermittent flow from the site will follow Cabresto Canyon drainage to the west to Navajo Lake. The Navajo lake, approximately 0.25 miles to the west of the site, is nearest down-gradient perennial source of surface water at an elevation of approximately 6,100 feet.

A review of the available hydrologic data<sup>1,2</sup> for this area revealed that there are no water wells within a 1/4-mile radius of Martinez Draw Compressor Station. The water-bearing unit in this area is the San Jose Formation. The San Jose Formation is the youngest Tertiary bedrock unit. This formation consists of a sequence of interbedded sandstone and mudstone. The estimated ground water depth at the site is 50 to 200 feet. The total dissolved solids concentration of area ground water is expected to range from 200 to 2,000 parts per million.

The 100-year 24-hour precipitation event at a regional weather station is 2.8 inches. This small amount of rainfall for the area should pose no flood hazards. Vegetation in the area consists predominantly of sagebrush and native grasses

Flood Protection: Surface water runoff from the area surrounding the site will be diverted around the facility into the natural drainage path.

### References

<sup>1</sup>Stone, W.J., Lyford, F.P., Frenzel, P.F., Mizell, N.H., Padgett, E.T., 1983, Hydrology and Water Resources of San Juan Basin, New Mexico Bureau of Mines and Mineral Resources, Hydrologic Report 6.

<sup>2</sup>Online Well Reports and Downloads, New Mexico Office of the State Engineer, 2000.

## 12.0 FACILITY CLOSURE PLAN

All reasonable and necessary measures will be taken to prevent the exceedence of WCQQ Section 3103 water quality standards should Williams choose to permanently close the facility. Williams will submit a detailed closure plan to the NMOCD prior to closure.

Generally, closure measures will include removal or closure in place of underground piping and other equipment. All wastes will be removed from the site and properly disposed in accordance with the rules and regulations in place at the time of closure. When all fluids, contaminants, and equipment have been removed from the site, the site will be graded as close to the original contour as possible.

Should contaminated soil be discovered, any necessary reporting under NMOCD Rule 116 and WQCC Section 1203 will be made and clean-up activities will commence. Post-closure maintenance and monitoring plans would not be necessary unless contamination is encountered.

# Tables


**TABLE 1**  
**SOURCE, QUANTITY AND QUALITY OF EFFLUENT AND WASTE SOLIDS**  
**MARTINEZ DRAW COMPRESSOR**

PROCESS FLUID / WASTE	SOURCE	QUANTITY (Ranges)	QUALITY
Used Oil	Compressor	1,000-1,500 gallons/year/engine	Used Motor Oil w/ No Additives
Used Oil Filters	Compressor	50-100 gallons/year/engine	No Additives
Natural Gas Condensate	Scrubber	0-1,500 barrels/year	No Additives
Produced Water	Gas Inlet Separator and Scrubber	2,000-9,000 barrels/year	No Additives
Waste Water	Compressor Skid	500-1,500 gallons/year/engine	Biodegradable soap and tap water w/ traces of oil and glycol.
Used Process Filters	Air, Inlet and Fuel Gas	75-100/year	No Additives
Empty Drums/Containers	Liquid Containers	10-40/year	No Additives
Spill Residue ( i.e. soil, gravel, etc)	Incident Spill	Incident Dependent	Incident Dependent
Used Adsorbents	Incident Spill/Leak Equipment Wipe-down	Incident Dependent	No Additives


**TABLE 2**  
**TRANSFER, STORAGE AND DISPOSAL OF PROCESS FLUIDS, EFFLUENT AND WASTE SOLIDS**  
**MARTINEZ DRAW COMPRESSOR**

PROCESS FLUID / WASTE	STORAGE	STORAGE CAPACITY	CONTAINMENT / SPILL PREVENTION	RCRA STATUS	DESCRIPTION OF FINAL DISPOSITION
Used Oil	Above Ground Storage Tank	500 gallons	Waste Water System	Non-Exempt	Transported to a Williams or contractor consolidation point before transport to an EPA-registered used oil marketer for recycling.
Used Oil Filters	Drum or Other Container	Varies	Transported to a Williams or Contractor Facility in Drum or Other Container	Non-Exempt	Transported to a Williams or contractor consolidation point, drained, and ultimately transported for disposal at an approved disposal facility. A Waste Acceptance Profile will be filed with the disposal facility. Recycling options may be considered when available.
Produced Liquids	Above Ground Storage Tank	100 barrels	Lined Berm	Exempt	Saleable liquids may be sold to a refinery. The remaining liquids may be transported to a Williams evaporation facility or a NMOCCD-approved disposal facility.
Waste Water	Above Ground Storage Tank	740 gallons	Dual-Walled Tank	Non-Exempt	Water may be transported to a Williams evaporation facility or a NMOCCD-approved disposal facility.
Used Process Filters	Drum or Other Container	Varies	Transported to a Williams or Contractor Facility in Drum or Other Container	Exempt	Transported to a Williams or contractor consolidation point, drained, and ultimately transported for disposal at an approved disposal facility. A Waste Acceptance Profile will be filed with the disposal facility. Recycling options may be considered when available.
Empty Drums/Containers	N/A	N/A	Transported to a Williams or Contractor Facility	Non-Exempt	Barrels are returned to supplier or transported to a Williams or Contractor consolidation point and ultimately recycled/discharged consistent with applicable regulations.
Spill Residue (i.e. soil, gravel, etc)	N/A	N/A	In Situ Treatment, Land Farm, or Alternate Method	Incident Dependent	Per Section VI, Remediation, in the 8/13/93 NMOCCD Guidelines for Remediation of Leaks, Spills, and Releases.
Used Adsorbents	Drum or Other Container	Varies	Transported to a Williams or Contractor Facility in Drum or Other Container	Incident Dependent	Transported to a Williams or contractor consolidation point, drained, and ultimately transported for disposal at an approved disposal facility. A Waste Acceptance Profile will be filed with the disposal facility. Recycling options may be considered when available.
Compressor Oil	Above Ground Storage Tank	500 gallons	Waste Water System	N/A	Off-spec material is recycled or disposed consistent with applicable regulations.
Glycol	Above Ground Storage Tank	500 gallons 125 gallons 100 gallons	Metal Containment Fiberglass Containment Waste Water System	N/A	Off-spec material is recycled or disposed consistent with applicable regulations.
Antifreeze	Above Ground Storage Tank	500 gallons	Steel Containment	N/A	Off-spec material is recycled or disposed consistent with applicable regulations.

# Figures

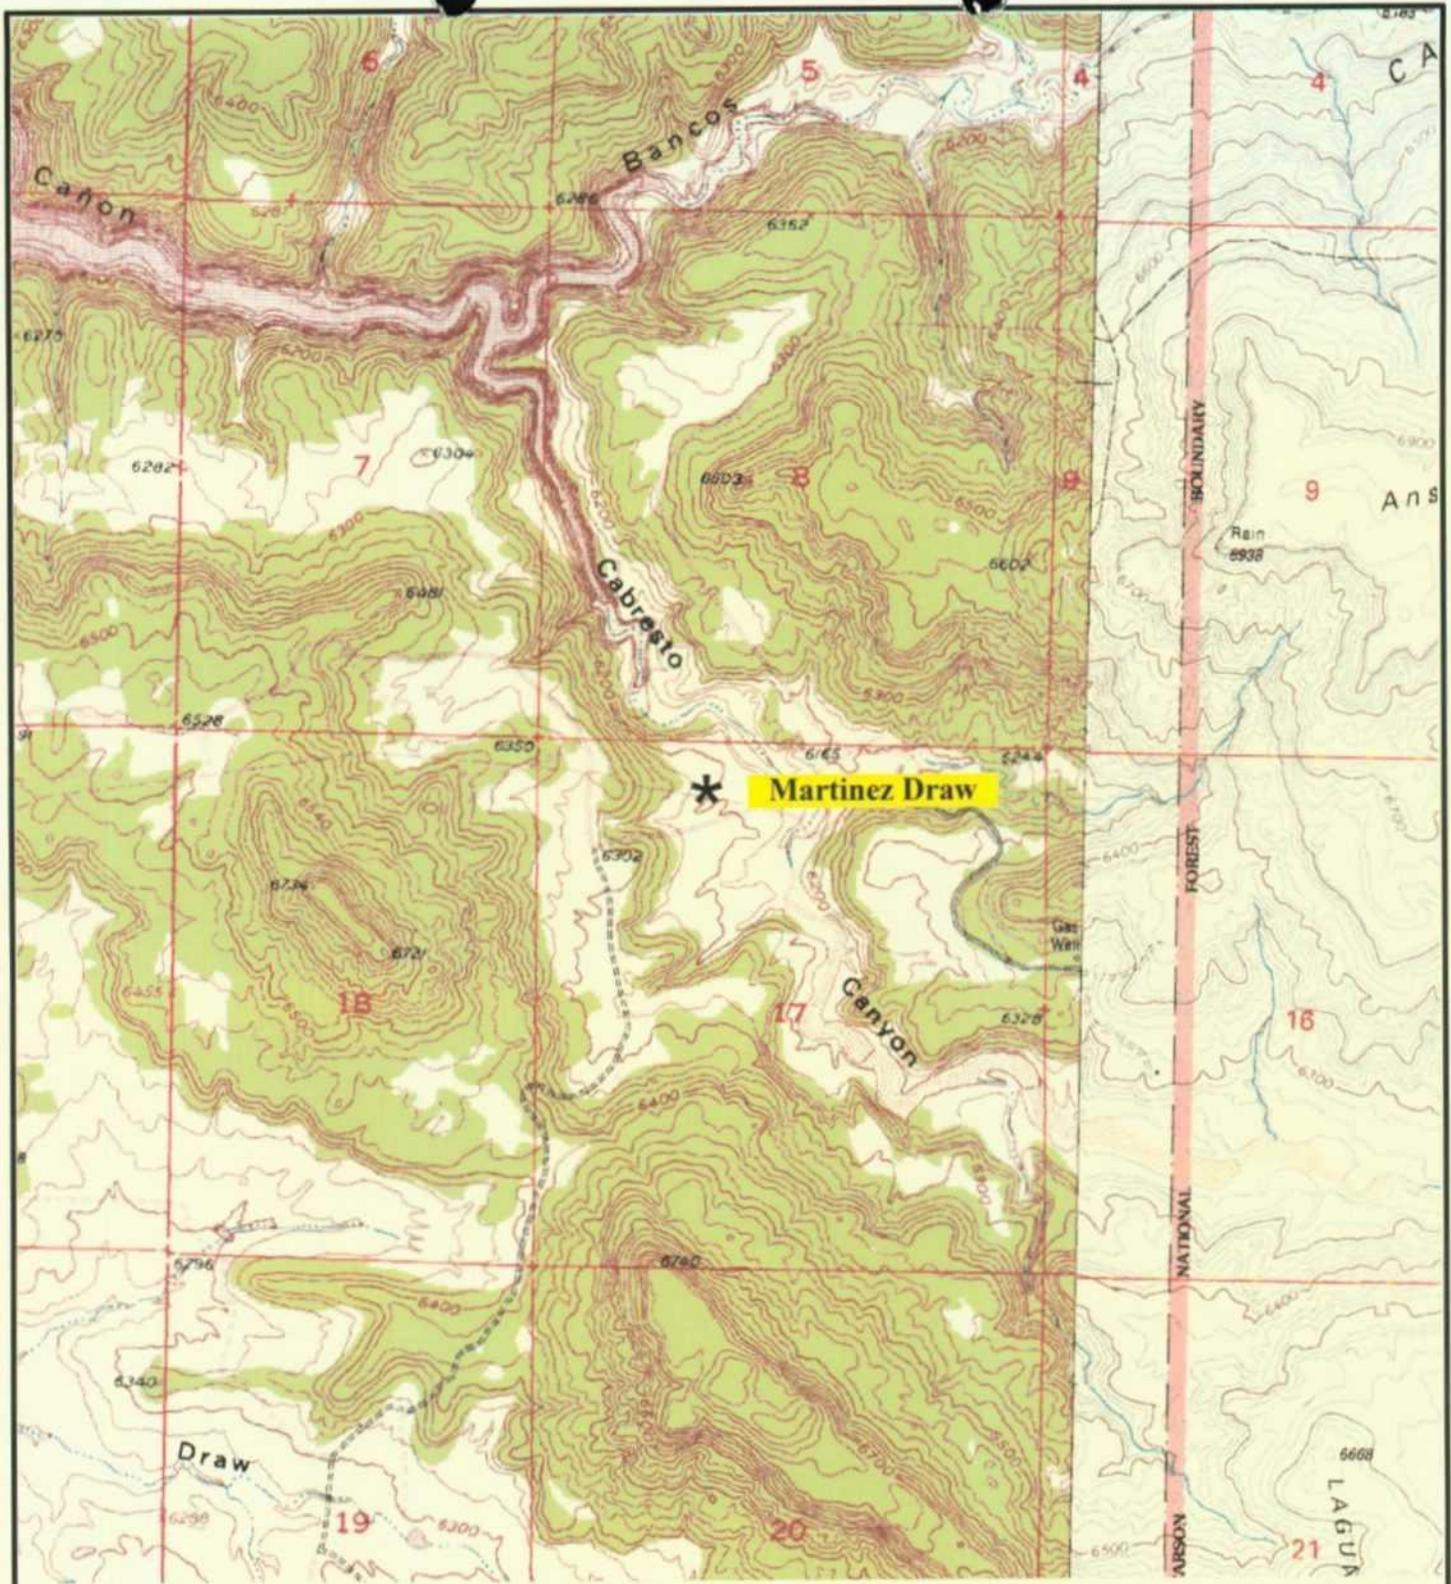

Source: USGS Bancos Mesa and Bancos Mesa NW, NM Quadrangles



**Figure 1 Site Vicinity / Topographic Map**  
**Martinez Draw Compressor Station**  
 Section 17, Township 31N Range 5W  
 Rio Arriba County, New Mexico

Subject or Title:


**SPILL PREVENTION CONTROL AND COUNTERMEASURE PLAN**

**ATTACHMENT 'A' PRODUCT & WASTE STORAGE LOCATIONS**

OPERATIONS		
Manual	MARTINEZ DRAW COMPRESSOR STATION	Document No. 42.13.001
Section	SPILL PREVENTION CONTROL	Tab 13
Effective Date	6-2-99	Issue No. 01
		Page No. 5 of 8



**PLANT BENCH MARK**  
 REFERENCE POINT 0'-0"  
 ALL EQUIPMENT LOCATIONS  
 FROM THIS POINT, FOR CONSTRUCTION  
 PAD ELEVATION WILL BE CALLED 100'-0"

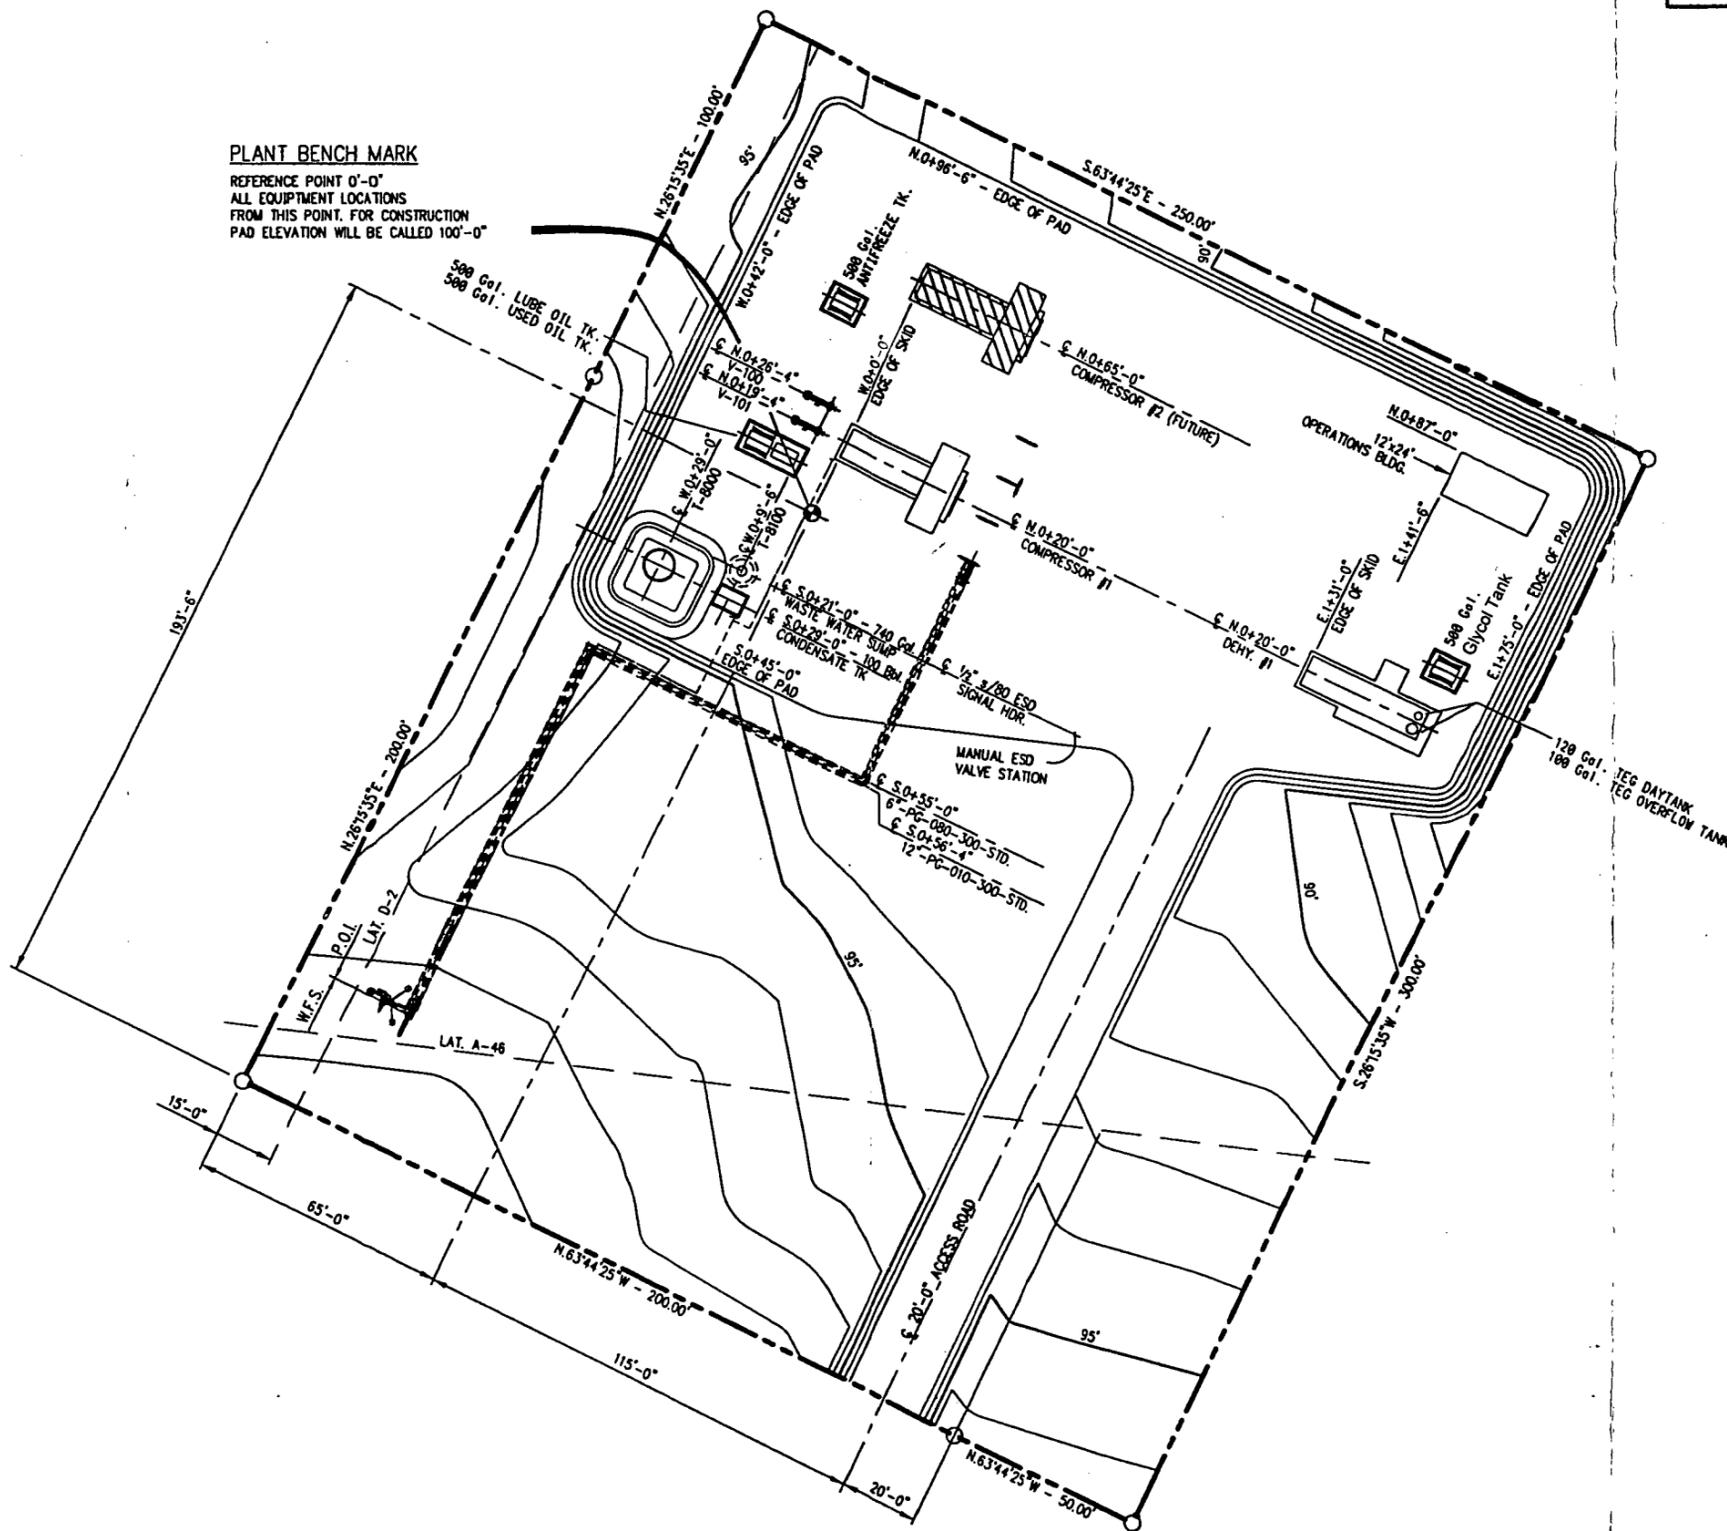

PRELIMINARY

REFERENCE DRAWINGS										REFERENCE DRAWINGS										REVISIONS										DRAFTING BY DATE DRAWN BY PHM 6-2-99 CHECKED BY APPROVED BY ENGINEER BY DATE DESIGNED BY PROJ. APPROVED		STATE: NEW MEXICO COUNTY: RIO ARriba		WILLIAMS GAS PROCESSING ONE OF THE WILLIAMS COMPANIES		MARTINEZ DRAW COMPRESSOR STATION SPILL PREVENTION CONTROL AND COUNTERMEASURE PLAN PLOT PLAN		SCALE: 1" = 20' V.D. NO. 98408		DWG. NO. MRD-1-P4		REV 01	
--------------------	--	--	--	--	--	--	--	--	--	--------------------	--	--	--	--	--	--	--	--	--	-----------	--	--	--	--	--	--	--	--	--	---	--	---	--	--	--	---	--	-----------------------------------	--	-------------------	--	--------	--

T:\Ds\PM\_EI\Drawings\_Work-in-Progress\San\_Juan\Martinez\_Draw\_(MDR)\EOD\00040101.dwg

# Appendices

# Appendix A

## Spill Control Procedures

**RELEASE/SPILL REPORTING**

**MATERIAL SAFETY DATA SHEETS**

**CHEMICAL EXPOSURES/POISONINGS**

**Dial**

**24HRS/DAY - 7DAYS/WEEK**

**1-888-677-2370**

Info you should have when calling:

- Time of Release/Spill
- Location of the Release
- Asset where Release Occurred
- Amount Released
- Name of Chemical or Product Released



**3E COMPANY**

1905 Aston Avenue, Carlsbad, CA 92008

Telephone: 760-602-8700

Fax: 760-602-8888

	Reference (Book Title) Operations/Maintenance Field Services	Task/Document No. 21.10.020
	Section General/Safety	Regulation No./Reference
	Subject Discharges or Spills of Oil or Hazardous Substances; Preventing, Controlling and Reporting of	Effective Date 12/15/99

[Back](#) | [Feedback](#) | [Index](#) | [Search Library](#)  
 Hit "CTRL-F" to find text on this page.

▶ **Document History (ISO9001)**

▼ **Document Body**

**1.0 PURPOSE AND SCOPE**

- 1.1 To establish the policy and procedure for preventing, controlling and reporting of discharges or spills of oil or hazardous substances to the environment in accordance with Company practices and federal, state and local requirements, including Title 40 of the Code of Federal Regulations - Part 112 (Oil Pollution Prevention).
- 1.2 This document pertains to Company personnel, Company and non-company facilities. The spill prevention and control requirements in this Policy and Procedure are Federally mandated guidelines for oil pollution prevention. The Company policy is to also apply these standards, where appropriate, to facilities containing hazardous substances. This is a discretionary application of the standards; however, variations from the standards should be approved by the responsible Director.

**2.0 CONTENTS**

**3.0 POLICY**

**3.1 GENERAL**

- 3.1.1 All Company facilities which could discharge or spill, oil or hazardous substances which may affect natural resources or present an imminent and substantial danger to the public health or welfare including, but not limited to, fish, shellfish, wildlife, shorelines and beaches are subject to the provisions of this document.
- 3.1.2 Oil, for purpose of this document, means oil of any kind or in any form, including but not limited to petroleum hydrocarbon, fuel oil, Y grade, natural gas liquids, condensate, mixed products, sludge, oil refuse and oil mixed with wastes other than dredged spoil (earth and rock). LPG (propane, butane, ethane) is not considered to be oil.
- 3.1.3 Hazardous Substance, for purposes of this procedure, is defined as any chemical or

material that has or should have a Material Safety Data Sheet (MSDS); however, hazardous substances are further defined by the following environmental statutes:

- a. Section 101(N) and Section 102 of the Comprehensive Environmental Response, Compensation and Liability Act (CERCLA)
- b. Section 307(a) and Section 311(b)(2)(A) of the Clean Water Act
- c. Section 3001 of the Solid Waste Act (excluding items suspended by Congress)
- d. Section 112 of the Clean Air Act
- e. Section 7 of the Toxic Substance Control Act

3.1.4 The term hazardous substance does not include petroleum hydrocarbon, including crude oil or any fraction thereof and the term does not include natural gas, natural gas liquids (including condensate), liquefied natural gas or synthetic gas usable for fuel (or mixtures of natural gas and such synthetic gas).

3.1.5 Facilities which could discharge or spill, oil or hazardous substances into a watercourse must comply with the applicable federal, state or local laws and regulations. A discharge includes but is not limited to any spilling, leaking, pumping, pouring, emitting, emptying or dumping. A watercourse is any perennial or intermittent river, stream, gully, wash, lake or standing body of water capable of collecting or transporting an oil or hazardous substance.

3.1.6 Facilities which are subject to the requirements stated in this policy are as follows:

a. Non-Transportation Related Facilities

(1) Storage or drip tanks and other aboveground containers (excluding pressurized or inline process vessels) having a capacity in excess of 660 gallons for each single container or an aggregate capacity of 1,321 gallons or more for multiple containers.

(2) Underground storage facilities having a total capacity in excess of 42,000 gallons.

b. Transportation Related Facilities

(1) All vehicles, pipeline facilities, loading/unloading facilities and other mobile facilities which transport oil or hazardous substances.

3.1.7 Each Company location which has facilities subject to paragraph C.1.1 shall have a site specific Spill Prevention Control and Countermeasure Plan (SPCC Plan) which identifies all facilities subject to 40 CFR 112. The plan shall identify all oil and hazardous substance storage vessels (as defined in a.(1) above) at the facility and the spill prevention measures in place to control discharges or spills. This plan shall also identify all regulatory agencies that must be notified in case of a spill.

3.1.8 The facility superintendent is responsible for spill prevention. His/her duties include,

but are not limited to, the following:

a. Instructing personnel in the operation and maintenance of equipment to prevent the discharge of oil.

b. Conduct annual briefings for operating personnel at intervals frequent enough to assure adequate understanding of the Spill Plan at that facility.

c. Briefings should highlight and describe known discharges or spills and recently developed precautionary measures.

3.1.9 Each individual facility is checked annually by the superintendent or designee to determine the potential for discharges or spills of oil or hazardous substances in harmful quantities that violate water quality standards or which may cause a film, sheen or discoloration on the surface of water. All facilities which have the potential for discharging or spilling harmful quantities of oil or hazardous substances into a watercourse are required to have the following preventive measures:

a. Examination of all tanks, valves and fittings, at least annually, to determine any maintenance requirements.

b. All tank batteries should, as far as practicable, have a secondary means of containment for the entire contents of the largest single tank plus sufficient freeboard in the containment facility to allow for precipitation.

c. An annual monitoring and inspection program to prevent accidental spills or discharges into watercourses. This includes annual inspection for faulty systems and monitoring line valves and liquid pipelines for leaks or blowouts.

3.1.10 Any field drainage ditches, road ditches, traps, sumps or skimmers should be inspected at regular scheduled intervals for accumulation of oil or other hazardous substances which may have escaped from small leaks. Any such accumulations should be removed.

## 3.2 BULK STORAGE TANKS

3.2.1 A tank should not be used for storage of oil or hazardous substances unless the material and construction of the tank is compatible with the oil or substance stored and conditions of storage such as pressure and temperature. Buried storage tanks must be protected from corrosion by coatings, cathodic protection or other methods compatible with local soil conditions. Aboveground tanks should be subject to visual inspection for system integrity.

3.2.2 The facility superintendent should evaluate tank level monitoring requirements to prevent tank overflow.

3.2.3 Leaks which result in loss of oil or hazardous substances from tank seams, gaskets, rivets and bolts sufficiently large to cause accumulation of oil or hazardous substances in diked areas should be promptly corrected.

3.2.4 Mobile or portable oil or hazardous substances storage tanks should be positioned or located to prevent the contents from reaching a watercourse. The mobile facilities should be located so their support structure will not be undermined by periodic flooding or washout.

### **3.3 FACILITY DRAINAGE**

**3.3.1** Make provisions for drainage from diked storage areas where necessary in areas with high precipitation levels. Drainage from diked areas should be restrained by valves or other means to prevent a discharge or spill. Diked areas should be emptied by pumps or ejectors which are manually activated. Valves used for the drainage of diked areas should be of manual, open-and-closed design.

**3.3.2** Rain water may be drained from diked areas providing drainage water does not contain oil or hazardous substances that may cause a harmful discharge. Drain valves must be closed following drainage of diked areas.

**3.3.3** When possible, drainage systems from undiked areas should flow into ponds, lagoons or catchment basins designed to retain oil or hazardous substances or return the substances to the facility. Any drainage system which is not designed to allow flow into ponds, lagoons or catchment basins should be equipped with a diversion system that could, in the event of a discharge or spill, contain the oil or hazardous substances on the Site.

**3.3.4** The principal means of containing discharges or spills is the use of dikes which are constructed wherever regulated quantities of oil or hazardous substances have the potential of reaching a watercourse. The construction of dikes must meet the following requirements:

a. Capacity must be at least equivalent to the storage capacity of the largest tank of the battery plus sufficient freeboard to allow for precipitation or displacement by foreign materials.

b. Small dikes for temporary containment are constructed at valves where potential leaking of oil or hazardous substances may occur.

c. Any dike three feet or higher should have a minimum cross section of two feet at the top.

Other means of containment or spill control include, but are not limited to:

**3.3.5**

a. Berms or retaining walls

b. Curbing

c. Culverting, gutters or other drainage systems

d. Weirs, booms or other barriers

e. Spill diversion ponds or retention ponds

f. Sorbent materials

### **3.4 TRANSFER OPERATIONS, PUMPING and IN-PLANT/STATION PROCESS**

**3.4.1** Aboveground valves and pipelines should be examined regularly by operating

personnel to determine whether there are any leaks from flange joints, expansion joints, valve glands and bodies, catch pans, pipeline supports, valve locks and metal surfaces.

### **3.5 FACILITY TANK CAR AND TANK TRUCK LOADING/UNLOADING RACK**

- 3.5.1 Rack area drainage which does not flow into a catchment basin or treatment facility designed to handle spills should have a quick drainage system for use in tank truck loading and unloading areas. The containment system should have a maximum capacity of any single compartment of a truck loaded or unloaded in the station.
- 3.5.2 Aboveground piping that has potential for damage by vehicles entering the Site should be protected by logically placed warning signs or by concrete-filled pipe barriers.
- 3.5.3 Loading and unloading areas should be provided with an interlocked warning light, grounding shutdown, physical barrier system or warning signs to prevent vehicular departure before complete disconnect of flexible or fixed transfer lines. All drains and outlets of any truck should be closely examined for leakage prior to filling and departure. All drains and outlets that may allow leakage should be tightened, adjusted or replaced to prevent liquid leakage while in transit.

NOTE: LPG loading facilities and remote field loading of condensate are exempt from the C.5 requirements of this document.

### **4.0 PROCEDURE**

#### **4.1 Identifying, Containing and Initial Reporting of a Discharge or Spill of Oil or Hazardous Substance Any Employee**

- 4.1.1 Upon noticing a discharge or spill of an oil or hazardous substance in any quantity shall immediately contain the release (if safe to do so) and notify the facility superintendent, dispatcher or other designee. Releases must be reported to gas control in the following three circumstances:

#### **I. The Following Situations Always Require IMMEDIATE Reporting to Gas Control:**

1. Release reaches or may reach surface water: (pond, lake, wash or ground water)
2. Release leaves Williams property
3. Release is of questionable nature (i.e., unknown product, unknown hazards)

#### **II. Onsite Releases of Certain Common Industrial Materials Above 10 Gallon Threshold Are Reportable.**

Releases that do not migrate off-site or reach surface water may require reporting as well. All releases of 10 gallons or greater of the following materials should be contained and promptly reported to Gas Control:

- Ammonia
- Antifreeze
- Amine

- Chromate Mixtures
- Condensate
- Glycol
- Lube Oil
- Methanol
- Sulfuric Acid
- Sodium Hydroxide
- Natural Gas Liquids
- Other Hydrocarbon Products
- Natural Gas (1 MMSCF)

### III. Releases of Certain Other Materials Reportable:

Releases of the following materials above the indicated amount should be reported to gas control:

- PCB's (Concentration > 50 ppm) - any amount
- Mercaptan (Ethyl Mercaptan) - 1 lb.
- Mercury - 1 lb.
- Hydrogen Sulfide - 100 lbs.
- Pesticides - 1 lb.
- Other Material Not Listed - 1 lb.

**NOTE 1:** A release includes material released (intentionally or unintentionally) to air, water or soil. When notifying Gas Control of a Release, be prepared to provide information on the type of material spilled, amount released, weather conditions, time and date of release, person discovering release and measures taken to control the release.

**NOTE 2:** Refer to Attachment A for containment procedures.  
**Facility Superintendent, Controller or Designee**

4.1.2 Contacts Gas Control immediately by telephone and provides the following information:

- a. Name of company facility and/or location of facility and nature of discharge or spill
- b. Description and quantity of emission or substance discharged
- c. Description of the circumstances causing the discharge or spill
- d. Name, title and telephone number of person initially reporting the discharge or spill and person reporting to Gas Control
- e. Action taken or being taken to mitigate and correct discharge or spill
- f. Water bodies or streams involved
- g. Time and duration of discharge or spill

**h. Outside involvement during discharge or spill (public government agencies, etc. See Emergency Operating Procedure Manuals)  
Gas Control Personnel**

- 4.1.3** Advises Environmental Affairs departments immediately by telephone concerning the incident including any incidents reported by persons not employed with the Company.

**NOTE:** If Gas Control is contacted by a person not employed with the Company, the necessary information is obtained as indicated in D.1.2 and the Superintendent and Environmental Affairs are immediately contacted to begin containment and clean-up of the discharge or spill.

- 4.1.4** If Environmental Affairs cannot be contacted, notifies Director over Environmental Affairs.  
**Facility Superintendent**
- 4.1.5** Coordinates containment and clean-up of discharge or spill, keeping the responsible Director Informed.
- 4.1.6** Coordinates containment and clean-up of discharge or spill, keeping the responsible Director Informed. If the discharge or spill is too large for Company personnel to contain, contacts qualified local contractors for assistance. (See Emergency Operating Procedure Manuals tab #11, contractors with available equipment and services).
- 4.1.7** Advises Environmental Affairs by telephone if emergency containment or clean-up assistance from a state agency or a response team from the U.S. Coast Guard is required.  
**Environmental Affairs**
- 4.1.8** Assesses reporting requirements to state and federal agencies (contacts Legal Department and Right-of-Way Department, if appropriate). (See Emergency Operating Procedure Manuals).
- 4.1.9** Makes appropriate contacts with National Response Center and state and local agencies, when necessary.
- 4.1.10** If spill is significant, dispatches Environmental Specialist to scene to oversee cleanup and reporting responsibilities.
- 4.2 SUBMITTING WRITTEN NOTIFICATION OF A DISCHARGE OR SPILL  
Facility Superintendent or Designee**
- 4.2.1** Completes a written description of the incident as soon as possible after initial notification is given, which should include the following:
- a. Time and date of discharge or spill
  - b. Facility name and location
  - c. Type of material spilled
  - d. Quantity of material spilled

e. Area affected

f. Cause of spill

g. Special circumstances

h. Corrective measures taken

i. Description of repairs made

j. Preventative measures taken to prevent recurrence.

4.2.2 Forwards the completed written description to Environmental Affairs. Retains a copy for future reference.

**NOTE:** Environmental Affairs, in coordination with the Legal Department, if necessary, submits written reports to government agencies.

**ATTACHMENT A  
DISCHARGE OR SPILL CONTAINMENT PROCEDURES AND MATERIALS**

TYPE OF FACILITY WHERE THE DISCHARGE OR SPILL OCCURS	CONTAINMENT PROCEDURES	MATERIALS USED FOR CONTAINMENT
A. Oil Pipeline (as defined in C.1.4)	1. Closes appropriate block valves.  2. Contains Discharge or spill by: Ditching covering, applying sorbents, constructing an earthen dam or burning.  3. If burning is required, obtains approval from the appropriate state air quality control government agencies before burning.	1.Straw  2.Loose Earth  3.Oil Sorbent 3M Brand  4.Plain Wood chips  5.Sorb-Oil Chips Banta Co.  6.Sorb-Oil Swabs Banta Co.  7.Sorb-Oil Mats Banta Co.  8.Or Equivalent Materials
B. Vehicle	1. Contains discharge or spill by: ditching, covering surface with dirt, constructing earthen dams, apply sorbents or burning.  2. Notifies immediately Environmental Affairs and if there is any imminent danger to local residents; notifies immediately the highway patrol or local police officials.	

	<p>3. If burning is required, obtains approval from the appropriate state air quality control government agencies before burning.</p> <p>Note: Any vehicle carrying any hazardous or toxic substance will carry a shovel or other ditching device to contain a spill. If the vehicle has sufficient room, sorbent materials should also be carried.</p>
<p>C. Bulk Storage Tanks or any other Facilities</p>	<p>1. Contains discharge or spill by: ditching, covering, applying sorbents, constructing an earthen dam or burning.</p> <p>2. If burning is required, obtains approval from the appropriate state air quality control government agencies before burning.</p>

---

[Back](#) | [Feedback](#) | [Index](#) | [Search Library](#)

If you have questions, suggestions, comments or concerns regarding the SETS Library, please contact [Documentation Services](#).

**Release/Spill Report Form**

Month  Day  Year   
 Release Verification Time:  Release Stop Time:   
 Region  District  Area   
 Location Name  Location Identifier   
 Mainline Name  Mainline Identifier   
 Area Manager  Company Asset  State   
 Address  County  Zip Code   
 Release Discovered by:  Time   
 Release Reported by:  Time   
 Section  Township  Range  Milepost  Tract #   
 Offshore  Latitude  Longitude   
 Release Reportable?  Waterway Affected?  Name

Report	Date	Number	Time	Name	Title	City	State
NRC <input type="checkbox"/>							
SERC <input type="checkbox"/>							
LEPC <input type="checkbox"/>							
TRRC <input type="checkbox"/>							
EPA <input type="checkbox"/>							
Other <input type="checkbox"/>							

Product Released:  Total BBL's Released  0  
 Cause of Release:  BBL's Recovered Wet  0  
 Released To:  Other:  BBL's Recovered Soil  0  
 BBL's Not Recovered  0  
 BBL's Total Recovered  0

Remarks:

Origin Of Release:

Temperature  Relative Humidity  Precipitation   
 Cloud Cover  Wind Speed  Wind Direction   
 Injury  Death  Fire  Explosion   
 Unconsciousness  Hospitalization   
 Loss/Damage Estimate   
 Incident Investigator:   
 Environmental Contact for this Release:   
 Safety Contact for this Release:   
 Compliance Administrator for this area:   
 Form completed by:   
 Completion Date:   
 Form was e-mailed to Williams on:

# Appendix B

## NMOCD Notification Of Fire, Breaks, Spills, Leaks, and Blowouts

District I  
1625 N. French Dr., Hobbs, NM 88240  
District II  
1301 W. Grand Avenue, Artesia, NM 88210  
District III  
1000 Rio Brazos Road, Aztec, NM 87410  
District IV  
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico  
Energy Minerals and Natural Resources

Oil Conservation Division  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

Form C-141  
Revised March 17, 1999

Submit 2 Copies to appropriate  
District Office in accordance  
with Rule 116 on back  
side of form

**Release Notification and Corrective Action**

**OPERATOR**

Initial Report  Final Report

Name of Company	Contact <input type="checkbox"/>
Address	Telephone No. <input type="checkbox"/>
Facility Name	Facility Type <input type="checkbox"/>
Surface Owner	Mineral Owner
Lease No. <input type="checkbox"/>	

**LOCATION OF RELEASE**

Unit Letter	Section	Township	Range	Feet from the	North/South Line	Feet from the	East/West Line	County <input type="checkbox"/>
-------------	---------	----------	-------	---------------	------------------	---------------	----------------	---------------------------------

**NATURE OF RELEASE**

Type of Release	Volume of Release	Volume Recovered <input type="checkbox"/>
Source of Release	Date and Hour of Occurrence	Date and Hour of Discovery <input type="checkbox"/>
Was Immediate Notice Given? <input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> Not Required	If YES, To Whom?	
By Whom? <input type="checkbox"/>	Date and Hour <input type="checkbox"/>	
Was a Watercourse Reached? <input type="checkbox"/> Yes <input type="checkbox"/> No	If YES, Volume Impacting the Watercourse.	

If a Watercourse was Impacted, Describe Fully.\*

Describe Cause of Problem and Remedial Action Taken.\*

Describe Area Affected and Cleanup Action Taken.\*

I hereby certify that the information given above is true and complete to the best of my knowledge and understand that pursuant to NMOCD rules and regulations all operators are required to report and/or file certain release notifications and perform corrective actions for releases which may endanger public health or the environment. The acceptance of a C-141 report by the NMOCD marked as "Final Report" does not relieve the operator of liability should their operations have failed to adequately investigate and remediate contamination that pose a threat to ground water, surface water, human health or the environment. In addition, NMOCD acceptance of a C-141 report does not relieve the operator of responsibility for compliance with any other federal, state, or local laws and/or regulations.

**OIL CONSERVATION DIVISION**

Signature:	Approved by <input type="checkbox"/> District Supervisor:		
Printed Name:	Approval Date:	Expiration Date:	
Title:	Conditions of Approval:		Attached <input type="checkbox"/>
Date:	Phone:		

\* Attach Additional Sheets If Necessary

Appendix C

Public Notice



Four Corners Area  
Environmental Department  
#188 County Road 4900  
Bloomfield, N.M. 87413  
Phone: (505) 632-4606  
Fax: (505) 632-4781

September 12, 2003

**CERTIFIED MAIL – RETURN RECEIPT REQUESTED #70022410000008038214**

Bureau of Land Management  
1235 N. La Plata Highway  
Farmington, NM 87401

Dear Madam/Sir:

This letter is to advise you that Williams Field Services Company is preparing to submit to the Oil Conservation Division a Discharge Plan Renewal application for the permitted Martinez Draw Compressor Station (GW-308). This notice is a requirement pursuant to New Mexico Water Quality Control Commission Regulations. We expect to submit the Discharge Plan Renewal application to the Oil Conservation Division during October 2003.

The facility, located in Section 17, Township 31 North, Range 5 West, NMPM, Rio Arriba County, New Mexico, provides natural gas compression and conditioning services.

The discharge permit addresses how spills, leaks, and other accidental discharges to the surface will be managed. The facility does not discharge wastewater to surface or subsurface waters. All wastes generated will be temporarily stored in tanks or containers with secondary containment. Waste shipped offsite will be disposed or recycled at an OCD approved site. In the event of an accidental discharge, ground water most likely will not be affected because the estimated ground water depth at the site is 50-200 feet. The total dissolved solids concentration of area ground water is expected to range from 200 to 2,000 parts per million.

Comments or inquiries regarding this permit or the permitting process may be directed to:

Director of the Oil Conservation Division  
1220 South Saint Francis Dr.  
Santa Fe NM 87505

Respectfully submitted,

Clara M. Garcia  
Environmental Compliance

COPY

**SENDER: COMPLETE THIS SECTION**

- Complete items 1, 2, and 3. Also complete item 4 if Restricted Delivery is desired.
- Print your name and address on the reverse so that we can return the card to you.
- Attach this card to the back of the mailpiece, or on the front if space permits.

1. Article Addressed to:

BLM  
1235 N La Plata Hwy.  
Farmington NM 87401

**COMPLETE THIS SECTION ON DELIVERY**

A. Received by (Please Print Clearly) B. Date of Delivery

Virginia Barber, BLM 7/15/03

C. Signature

X *Virginia Barber*  Agent  Addressee

D. Is delivery address different from item 1?  Yes

If YES, enter delivery address below:  No

3. Service Type

- Certified Mail  Express Mail
- Registered  Return Receipt for Merchandise
- Insured Mail  C.O.D.

4. Restricted Delivery? (Extra Fee)  Yes

2. Article Number (C) .7002 2410 0000 0803 8214