Form 3160-3 (August 1999)

UNITED STATES DEPARTMENT OF THE INTERIOR **BUREAU OF LAND MANAGEMENT**

FORM APPROVED OMB No. 1004-0136 Expires November 30, 2000

5.	Lease Serial No.
	SF-078091

APPLICATION FOR PERMIT	TO DRILL OR REENTER 17 111 3	D If Indian, Allottee or Tribe Name	3
Ia. Type of Work: 🛛 DRILL 🔲 REENTER	070 Farmington, I	If Unit or CA Agreement, Name	and No.
1b. Type of Well: ☐ Oil Well ☐ Gas Well 🗵 Ot	ner: CBM Single Zone Multiple Zone	Lease Name and Well No. PATRIOT 91-S	
2. Name of Operator Contact: DUGAN PRODUCTION CORP.	KURT FAGRELIUS E-Mail: kfagrelius@duganproduction.com	9. API Well No. 30045 313	348
3a. Address 709 EAST MURRAY DRIVE FARMINGTON, NM 87401	3b. Phone No. (include area code) Ph: 505.325.1821 Fx: 505.327.4613	10. Field and Pool, or Exploratory BASIN FRUITLAND COAL	•
4. Location of Well (Report location clearly and in accorda	nce with any State requirements.*)	11. Sec., T., R., M., or Blk. and Sur	vey or Area
At surface SESE 660FSL 660FEL 36. At proposed prod. zone	Sec 27 T26N R13W Mer N	IMP	
 Distance in miles and direction from nearest town or post of APPROX. 10 MILES NW OF CARSON TRADIN 	G POST	12. County or Parish SAN JUAN	13. State NM
 Distance from proposed location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 660' 	16. No. of Acres in Lease	17. Spacing Unit dedicated to this w	vell
 Distance from proposed location to nearest well, drilling, completed, applied for, on this lease, ft. 1300' 	19. Proposed Depth 1395 MD	20. BLM/BIA Bond No. on file	
21 Flevations (Show whether DE KB RT GL etc.	22 Approximate date work will start	23 Estimated duration	

24. Attachments

06/01/2003

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- 1. Well plat certified by a registered surveyor.

6218 GL

- A Drilling Plan.
 A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).

5-DAYS

- Operator certification
- Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature Kurt Tegroliu	Name (Printed/Typed) KURT FAGRELIUS	Date 01/13/2003
Title GEOLOGIST		
Approved by (Signature)	Name (Printed/Typed) /a/ David J. Markiewicz	PDEC 16 2003
Title	Office	
Application approval does not warrant or certify operations thereon. Conditions of approval, if any, are attached.	the applicant holds legal or equitable title to those rights in the subject lease which would	d entitle the applicant to conduct

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Additional Operator Remarks:

A water based gel-mud will be used to drill surface and production casing hole. Standare 2,000 psi BOP will be used to drill production hole. The Fruitland Coal will be completed from approximately 1218'-1262'. The interval will be fractured.

This action is subject to technical and procedural review pursuant to 43 CFR 3185.3 and appeal pursuant to 43 CFR 3185.4

DRILLING OPERATIONS AUTHORIZED ARE SUBJECT TO COMPLIANCE WITH ATTACHED "GENERAL REQUIREMENTS".



District I PO Box 1980, Hobbs, NM 88241-1980

District II PO Drawer DD, Artesia, NM 88211-0719

1000 Rio Brazos Ad., Aztec, NM 87410

District IV PO Box 2088, Santa Fe. NM 87504-2088

State of New Mexico Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION PO Box 2088 Santa Fe, NM 87504-2088

Revised February 21, 1994 Instructions on back Submit to Appropriate District Office State Lease - 4 Copies Fee Lease - 3 Copies

AMENDED REPORT

Form C-1

ţ

WELL LOCATION AND ACREAGE DEDICATION PLAT

'API Number		·	'Pool Code 'Pool Name						
30-045-31348 71629				9	ВА	SIN FRUITLA	AND COAL		
Çede				³Property Name				*Well Number	
8			PATRIOT					915	
√ 0.				*Operator Name				*Elevation	
.5	DUGAN PRODUCTION CORPORATION						6218'		
				¹⁰ Surface	Location				
Section	Township	Pange	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County	
27	26N	13W		660	SOUTH	660	EAST	SAN JUAN	
¹¹ Bottom Hole Location If Different From Surface									
Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County	
320	.O Acres	- (E,	/2)	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.			
	Cade No5 Section 27	Code Section Township 27 26N 11 Botton Township Section Township Sectio	Cade No. 5 Section Township Range 27 26N 13W 11 Bottom Section Township Range	71629 Cade Social Township Range Lot Ion 27 26N 13W 11 Bottom Hole L	Code Code Propert PATR Operator DUGAN PRODUCTIO Section Township Range Lot Ion Feet from the 27 26N 13W 660 11 Bottom Hole Location I Section Township Range Lot Ion Feet from the	Code Code Property Name PATRIOT No. Operator Name DUGAN PRODUCTION CORPORAT Section Township Range Lot Idn Feet from the North/South line 27 26N 13W 660 SOUTH 11 Bottom Hole Location If Different Section Township Range Lot Idn Feet from the North/South line 12 Dint or Infill Consolidation Code	Township Range Lot Ion Feet from the North/South line Feet from the Section Township Range Lot Ion Feet from the North/South line Feet from the Section Township Range Lot Ion Feet from the North/South line Feet from the Section Township Range Lot Ion Feet from the North/South line Feet from the Section Township Range Lot Ion Feet from the North/South line Feet from the Section Township Range Lot Ion Feet from the North/South line Feet from the Section Township Range Lot Ion Feet from the North/South line Feet from the Section Township Range Lot Ion Feet from the North/South line Feet from the Section Township Range Lot Ion Feet from the North/South line Feet from the Section Township Range Lot Ion Feet from the North/South line Feet from the Section Township Range Lot Ion Feet from the North/South line Feet from the Section Township Range Lot Ion Feet from the North/South line Feet from	Township Range Lot Idn Feet from the North/South line Feet from the East/West line Section Township Range Lot Idn Feet from the North/South line Feet from the East/West line 11 Bottom Hole Location If Different From Surface Section Township Range Lot Idn Feet from the North/South line Feet from the East/West line 13 Joint or Infill 14 Consolidation Code 15 Order No.	

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

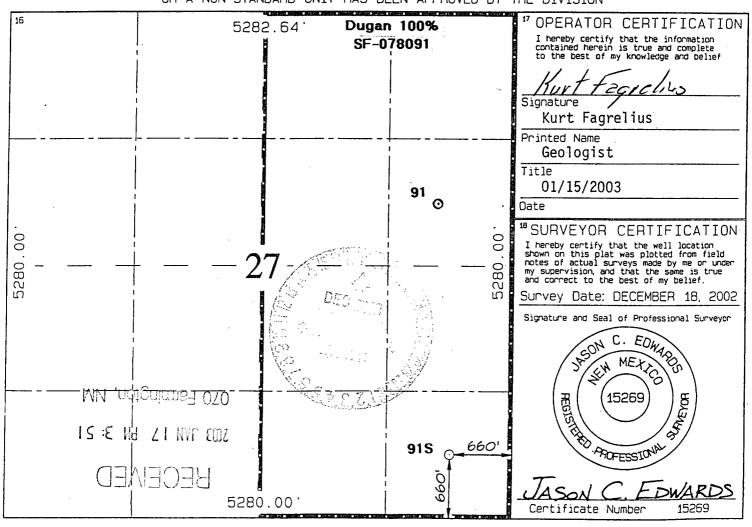


EXHIBIT B OPERATIONS PLAN

Patriot #91-S

APPROXIMATE FORMATION TOPS:

Ojo Alamo	20 ′	Pictured Cliffs	1268 ′
Kirtland	115'		
Fruitland	875 ′	Total Depth	1395′

Catch samples every 10 feet from 1200 feet to total depth.

LOGGING PROGRAM:

Run cased hole GR-CCL-CNL from total depth to surface.

CASING PROGRAM:

Hole	Casing		Setting	Grade and
<u>Size</u>	<u>Size</u>	Wt./ft.	<u>Depth</u>	<u>Condition</u>
9-7/8''	711	20#	120	J-55
6-1/4''	4-1/2''	10.5#	1.395	J-55

Plan to drill a 9-7/8'' hole and set 120' of 7'' OD, 20#, J-55 surface casing. Then plan to drill a 6-1/4'' hole to total depth with gel-water mud program to test the Fruitland Coal. 4-1/2'', 10.5#, J-55 production casing will be run and cemented. Cased hole GR-CCL-CNL log will be run. Productive zone will be perforated and fractured. After frac, the well will be cleaned out and production equipment will be installed.

CEMENTING PROGRAM:

<u>Surface</u>: Cement to surface with 70 cf Class B + 2% CaCl₂. Circulate to surface.

Production Stage-Cement with 150 cf 2%Lodense with

'a# celloflake/sx followed by 90 cf Class "B" with

'a# celloflake/sx.

Total cement slurry for production stage is 240 cf.

Circulate cement to surface.

An adequate spacer will be pumped ahead of the cement slurry to help prevent mud contamination of the cement. An adequate number of casing centralizers will be run through usable water zones to ensure that casing is centralized through these zones. The adequate number of centralizers will be determined based on API standards. Centralizers to impart a swirling action around the casing will be used just below and into the base of the lowest usable water zone. These devices will assist mud

displacement, increase cement bonding potential and create an effective hydraulic seal. A chronological log will be kept which records the pump rate, pump pressure, slurry density, and slurry volume for the cement job. The log will be sent to the BLM after completion of the job.

WELLHEAD EQUIPMENT:

Huber 7"x4-1/2" casing head, 1000# WP, tested to 2000#. Huber 4-1/2"x2-7/8" tubing head, 1000# WP, tested to 2000#.

BOP and Related Equipment will include for a 2000 psi system:

(Exhibit D)

Annular preventer, double ram, or 2 rams with one being blind and one being a pipe ram.

Kill line (2" minimum)

1 kill line valve (2" minimum)

1 choke line valve

2 chokes

Upper kelly cock valve with handle available Safety valve and subs to fit all drill string connections in use.

Pressure gauge on choke manifold.

2" minimum choke line.

Fill-up line.

Contacts:

Dugan Prod.Corp. Office & Radio Dispatch: 325-1821

Mark	Brown	327-3632 320-8247	
Kurt	Fagrelius	325-4327 320-8248	
John	Alexander	325-6927 320-1935	