Form 3160-3 (Äugust 1999)

\*(Instructions on Reverse)

# UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

FORM APPROVED OMB NO. 1004-0136 Expires: November 30, 2000

APPLICATION FOR PERMIT TO DRILL OR REENTER CEVEL		5. Lease Serial No. SF - 081181	
a. Type of Work X DRILL I	7002 DEC 20 PM 2: 58	6. If Indian, Allotee or Tribe Name	
b. Type of Well Oil Well Gas Well Other		277	
		7. Unit or CA Agreement Name and No.	
Name of Operator		San Juan 32-5 Unit 8. Lease Name and Well No	
Energen Resources Corporation  a. Address		San Juan 32-5 Unit 104S	
	3b. Phone No. (include area code)	9. API Well No.	
2198 Bloomfield Highway Farmington, New Mex Location of Well (Report location clearly and in accordance with	xico 87401 (505)325-6800	30-039-27267	
At surface 1105' FNL, 1215' FWL - NWNW		0. Field and Pool, or Exploratory Basin Fruitland Coal	
At proposed prod. zone		1. Sec., T., R., M., or Blk. and Survey or Ard Sec. 25, T32N, R06W, N.M.P.M	
4. Distance in miles and direction from nearest town or post office*	11	2. County or Parish 13. State	
•		Rio Arriba NM	
5. Distance from proposed*		cing Unit dedicated to this well	
location to nearest		ong one dedicated to this wen	
property or lease line, ft. 1105 (Also to nearest drg. unit line, if any)	M680 2003	320 W/2	
8. Distance from proposed location*	19 Proposed Depth 20 BLM	M/BIA Bond No. on file	
to nearest well, drilling, completed, applied for, on this lease, ft.	CLOSE OF COM		
50"	3096		
l. Elevations (Show whether DF, KDB, RT, GL, etc.	22. Approximate date work will start*	23. Estimated duration	
6291' GL	05/2003	10 days	
This action is subject to technical and procedural review pursuant to 43 CFR 3165.3		LING OPERATIONS AUTHORIZED ARE	
he following, completed in accordance with the requirements of Onsh			
	1		
Well plat certified by a registered surveyor.  A Drilling Plan		ss covered by an existing bond on file (see	
A Drilling Plan A Surface Use Plan (if the location is on National Forest System L	Item 20 above).		
SUPO shall be filed with the appropriate Forest Service Office).		n and/or plans as may be required by the	
-	authorized officer.	randor plans as may be required by the	
5. Signuature	Name (Printed/Typed)	l Date	
	· · · · · · · · · · · · · · · · · · ·		
itle long thomas	Doug Thomas	12/20/02	
Drilling & Completion Foreman			
pproved by (Signautre)	Name (Printed/Typed)	Date	
/e/ David J. Menklewicz		MAR 2 7 2003	
tle	Office	MAN 2 / 2000	
	, and		
pplication approval does not warrant or certify that the applicant ho	olds legal or equitable title to those rights in the subject	of large which would entitle the englished	
onduct operations thereon.	orse regulation time to mose rights in the subject	to lease which would entitle the applicant to	
onditions of approval, if any, are attached.			
tle 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make i	it a saine Co. and a saine Co.		
ates any false, fictitious or fraudulent statements or representations as	s to any matter within its jurisdiction.	ke to any department or agency of the United	

District I PO Box 1980, Hobbs, NM 88241-1980

PO Drawer DD. Artesia. NM 88211-0719

District III 1000 Rio Brazos Rd., Aztec, NM 87410

District IV PO Box 2088, Santa Fe, NM 87504-2088

State of New Mexico Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION P0 Box 2088 Santa Fe, NM 87504-2088

Form C-132 Revised February 21, 1994 Instructions on back Submit to Appropriate District Office

State Lease - 4 Copies Fee Lease - 3 Copies


AMENDED REPORT

# WELL LOCATION AND ACREAGE DEDICATION PLAT

30-039-Z	7267 *Pool Code 71629	7001 Code Pool Name 71629 Basin Fruitland Coal	
Property Code		roperty Name IAN 32-5 UNIT	*Well Number 1045
'OGRID No. 162928		perator Name DURCES CORPORATION	*Elevation 6291
	<sup>10</sup> Surf	ace Location	

UL or lat no. Range Lot Idn Feet from the North/South line Feet from the East/West line D 25 35N RIO 6W 1105 NORTH 1215 WEST ARRIBA · . \_ <sup>11</sup>Bottom Hole Different Location From Surface UL or lot no. Sect ion Township Feet from the North/South line Feet from the East/West line County 12 Dedicated Acres 33 Joint or Infill 14 Consolidation Code 15 Order No 320.0 Acres -(M/S)

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

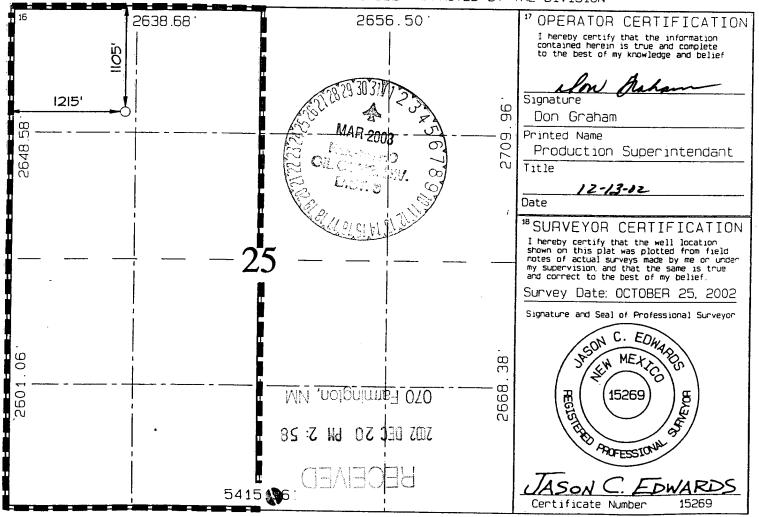

## **OPERATIONS PLAN**

WELL NAME: San Juan 32-5 #104S

LOCATION: 1105' FNL, 1215' FWL, Section 25, T32N, R6W, Rio Arriba County, NM

FIELD: Basin Fruitland Coal

ELEVATION: 6291' GL

# FORMATION TOPS:

San Jose Surface
Nacimiento 1101
Ojo Alamo 2256
Kirtland 2386
Fruitland 2856

Total Depth

3096

# **LOGGING PROGRAM:**

Open Hole Logs:

Surface to intermediate: None Inter TD to total depth: None

Mud Logs:

Intermediate to total depth

Coring:

None

Natural Gauges:

Every 500' from intermediate TD to total depth

<u>MUD PROGRAM</u>: Fresh water low solids mud from surface to intermediate TD (9.0 PPG). Air/mist from intermediate casing point to total depth.

#### CASING PROGRAM:

<b>HOLE SIZE</b>	<u>DEPTH</u>	<b>CSG SIZE</b>	<u>WT.</u>	GRADE
12 1/4"	200'	9 5/8"	32.3#	H-401-55-ST&C
8 3/4"	2921'	7"	20#	J-55 – ST&C
6 1/4"	3821'-3096'	5 ½"	15.5#	J-55 – LT&C

# **TUBING PROGRAM:**

3200'

2 3/8"

4.7#

J-55

WELLHEAD: 11" 3000 x 9 5/8" casing head. 11" 3000 x 7 1/16" 3000 xmas tree.

## **BOP SPECIFICATIONS:**

An 11" 2000 psi minimum double gate BOP stack (Figure 1) will be used following nipple up of casing head. During air drilling operations, a Shaffer Type 50 or equivalent rotating head will be installed on top of the stack. A 2" nominal, 2000 psi minimum choke manifold will be used. An upper Kelly Cock valve with handle available and drill string valve to fit each drill string will be available on the rig floor during drilling operations.

#### **CEMENTING:**

9 5/8" surface casing - cement with 110 sks Class B Cement with ¼" flocele/sk and 2% calcium chloride (130 cu. ft. of slurry, 100% excess to circulate to surface). WOC 12 hrs. Test casing to 600# for 30 minutes.

Texas Pattern Guide Shoe on bottom. 3 bow type centralizers spaced throughout the string.

7" intermediate casing – cement with 345 sks 65/35 Class B Poz with 6% gel, 2% calcium chloride, 10% gilsonite, and 1/4# flocele/sk. Tail with 100 sks Class B w/2% calcium chloride, 10% gilsonite and 1/4# flocele/sk. (658 cu. ft. of slurry, 50% excess to circulate to surface). WOC 12 hrs. If cement does not circulate, run temperature survey in 8 hrs. to determine TOC. Test casing to 1200 psi for 30 minutes.

Cement nose guide shoe on bottom with a self-fill insert float valve on top of shoe joint. 10 bow spring centralizers spaced every 2nd joint off bottom. Two turbolating centralizers at the base of the Ojo Alamo.

5 1/2" liner - NO CEMENT

#### **OTHER INFORMATION:**

- 1) The Basin Fruitland Coal will be completed.
- 2) No abnormal temperatures or pressures are anticipated.
- 3) If lost circulation is encountered sufficient LCM will be added to the mud system to maintain well control.
- 4) This gas is dedicated.
- 5) Anticipated pore pressure for the Fruitland is 700 psi.