

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENTFORM APPROVED
OMB NO. 1004-0137
Expires July 31, 2010

RECEIVED

APPLICATION FOR PERMIT TO DRILL OR REENTER

| | | |
|---|--|---|
| 1a. Type of Work <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER | | 5. Lease Serial No. USA NMNM 29342 |
| 1b. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone | | 6. If Indian, Allottee or Tribe Name |
| 2. Name of Operator Energen Resources Corporation | | 7. Unit or CA Agreement Name and No. |
| 3a. Address 2010 Afton Place Farmington, New Mexico 87401 | 3b. Phone No. (include area code) (505)325-6800 | 8. Lease Name and Well No. Carracas 12 A #1 H |
| 4. Location of Well (Report location clearly and in accordance with any State requirements)* At surface 1900 FSL, 350 FEL At proposed prod. zone 760 FSL, 760 FWL | | 9. API Well No. 3003930825 |
| 14. Distance in miles and direction from nearest town or post office* Approx 36.5 miles NE of Gobernador, NM | | 10. Field and Pool, or Exploratory Basin Fruitland Coal |
| 15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drg. unit line, if any) 350' | 16. No. of Acres in lease 1350.36 | 11. Sec., T., R., M., or Blk. and Survey or Area (I) Sec. 12, T32N, 5W NMMPM |
| 18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 50' | 19. Proposed Depth 8363' MD | 12. County or Parish Rio Arriba |
| 21. Elevations (Show whether DF, KDB, RT, GL, etc.) 7438' GL | 22. Approximate date work will start* April 1, 2010 | 13. State NM |
| 17. Spacing Unit dedicated to this well 318.15 320.00 acres S/2 | | |
| 20. BLM/BIA Bond No. on file | | |
| 23. Estimated duration 25 | | |

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, must be attached to this form:

- | | |
|--|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification. |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the BLM |

RCVD FEB 2 '10

OIL CONS. DIV.

DIST. 3

| | | |
|-----------------------------|---------------------------------------|--------------------|
| 25. Signature | Name (Printed/Typed) Stephen Byers | Date 10/20/2009 |
| Title DRILLING ENGINEER | | |
| Approved by (Signature) | Name (Printed/Typed) | Date 1/27/2010 |
| Title AFM | Office FFO | |

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

BLM'S APPROVAL OR ACCEPTANCE OF THIS ACTION DOES NOT RELIEVE THE LESSEE AND OPERATOR FROM OBTAINING ANY OTHER AUTHORIZATION REQUIRED FOR OPERATIONS ON FEDERAL AND INDIAN LANDS

*(Instructions on page 2)

Hold C104

for Directional Survey
and "As Drilled" plat

DRILLING OPERATIONS AUTHORIZED ARE
SUBJECT TO COMPLIANCE WITH ATTACHED
"GENERAL REQUIREMENTS".

FEB 12 2010

Hold C104

for Directional Survey
and "As Drilled" plat
NMCCD

NOTIFY AZTEC OGD 24 HRS.
BEFORE CASING & CEMENT
This action is subject to 43 CFR 3165.4

DISTRICT I
1825 N. French Dr., Hobbs, N.M. 88240

State of New Mexico
Energy, Minerals & Natural Resources Department

Form C-102
Revised October 12, 2005

DISTRICT II
1301 W. Grand Avenue, Artesia, N.M. 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, N.M. 87410

DISTRICT IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.
Santa Fe, NM 87505

RECEIVED

Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

OCT 21 2009

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

| | | |
|--|--|---|
| ¹ API Number 30-039-30825 | ² Pool Code 71629 | ³ Pool Name BASIN FRUITLAND COAL |
| ⁴ Property Code 38024 | ⁵ Property Name CARRACAS 12A | ⁶ Well Number 11 |
| ⁷ GRID No. 162928 | ⁸ Operator Name ENERGEN RESOURCES CORPORATION | ⁹ Elevation 7438' |

¹⁰ Surface Location

| UL or lot no. | Section | Township | Range | Lot Idn | Feet from the | North/South line | Feet from the | East/West line | County |
|---------------|---------|----------|-------|---------|---------------|------------------|---------------|----------------|------------|
| 1 | 12 | 32N | 5W | 6 | 1900' | SOUTH | 350' | EAST | RIO ARriba |


¹¹ Bottom Hole Location If Different From Surface

| UL or lot no. | Section | Township | Range | Lot Idn | Feet from the | North/South line | Feet from the | East/West line | County |
|---------------|---------|----------|-------|---------|---------------|------------------|---------------|----------------|------------|
| M | 12 | 32N | 5W | | 760' | SOUTH | 760' | WEST | RIO ARriba |

| | | | |
|-------------------------------|-------------------------------|----------------------------------|-------------------------|
| ¹² Dedicated Acres | ¹³ Joint or Infill | ¹⁴ Consolidation Code | ¹⁵ Order No. |
| | | | |

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

16

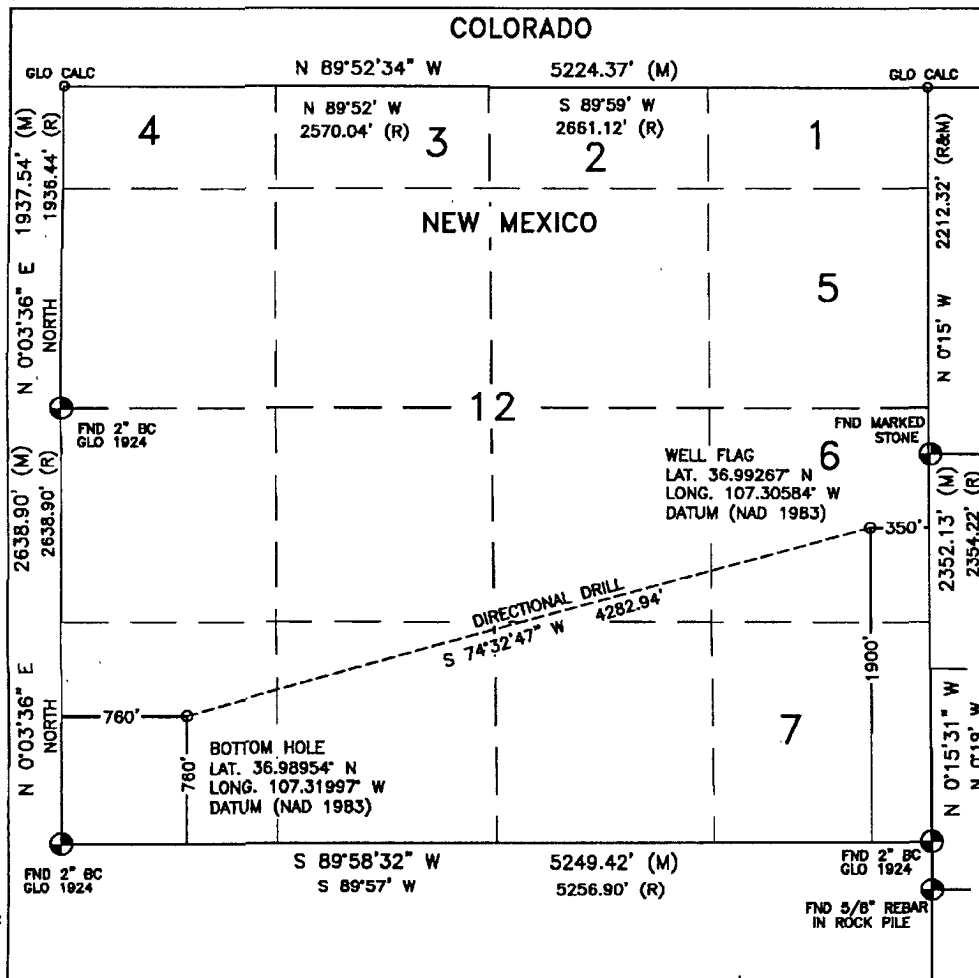

¹⁷ OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner or a compulsory pooling order heretofore entered by the division.

Stephen Byers 10/20/09
Signature Date

Stephen Byers
Printed Name

¹⁸ SURVEYOR CERTIFICATION


I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

OCTOBER 2, 2008

Date of Survey

Signature and Seal of Professional Surveyor:

David R. Russell



DAVID RUSSELL

Certificate Number

10201



OPERATIONS PLAN

WELL NAME.....Carracas 12A #1
JOB TYPE.....Horizontal OPE FTC
DEPT.....Drilling and Completions
PREPARED BY.....Stephen Byers

GENERAL INFORMATION

| | |
|----------------------|-----------------------------|
| Surface Location | 1900 FSL 350 FEL |
| S-T-R | (I) Sec.12, T32N, R05W |
| Bottom Hole Location | 760 FSL 760 FWL |
| S-T-R | (M) Sec.12, T32N, R05W |
| County, State | Rio Arriba, New Mexico |
| Elevations | 7438' GL |
| Total Depth | 8363' +/- (MD); 4185' (TVD) |
| Formation Objective | Basin Fruitland Coal |

FORMATION TOPS

| | |
|------------------|-------------------------|
| San Jose | Surface |
| Nacimiento | 2253' (TVD) |
| Ojo Alamo Ss | 3453' (TVD) |
| Kirtland Sh | 3600' (TVD) |
| Fruitland Fm | 4058' (TVD) 4954'MD |
| Top Target Coal | 4168' (TVD) 5134'MD |
| Base Target Coal | 4201' (TVD) |
| Total Depth | 4185' (TVD), 8363' (MD) |

DRILLING

Surface: 12-1/4" wellbore will be drilled with a fresh water mud system (spud mud).

Intermediate: 8-3/4" wellbore will be drilled with a LSND mud system. Weighting materials will be drill cuttings and if needed barite. Mud density is expected to range from 8.4 ppg to 9.0 ppg.

Production: 6-1/4" wellbore will be drilled with a fresh water or brine water system depending on reservoir characteristics. Anticipated BHP can be as high as 1100 psi.

Projected KOP is 2200' TVD with 5.61°/100' doglegs.

Blowout Control Specifications:

A 3000 psi minimum double ram or annulus BOP stack will be used following nipple up of casing head. A 2" nominal, 2000 psi minimum choke manifold will also be used. An upper Kelly Cock valve handle and drill string valve should be available to fit each drill string and be available on the rig floor during drilling operations. **Pressure test BOP to 250 psi for 15 min and 2000 psi for 15 min.**

Logging Program:

Open hole logs: None

Mudlogs: 3992' TVD, 4800' MD to TD

Surveys: Surface to KOP every 500' and a minimum of every 200' for directional.

CASING, TUBING & CASING EQUIPMENT

| String | Start Depth | End Depth | Wellbore | Size | Wt | Grade |
|---------------------|--------------|--------------|----------|--------|------------|-----------|
| Surface | 0 | 200 | 12-1/4" | 9-5/8" | 32.3 lb/ft | H-40 ST&C |
| Intermediate TVD | 0 0 | 5134 4185 | 8-3/4" | 7" | 23 lb/ft | J-55 LT&C |
| Prod. Liner TVD | 5034 4185 | 8363 4185 | 6-1/4" | 4-1/2" | 11.6 lb/ft | J-55 LT&C |
| Tubing | 0 | 5600 | none | 2-3/8" | 4.7 lb/ft | J-55 |

Surface Casing: Texas Pattern Guide Shoe on bottom of first joint and an insert float valve on top of first joint. Casing centralization with a minimum of 3 standard bow spring centralizers to achieve optimal standoff.

Intermediate Casing: Self fill float shoe with self fill float collar on bottom and top of first joint. Casing centralization with double bow spring and centralizers to optimize standoff.

Production Liner: Bull nose guide shoe on bottom of first joint, H-Latch liner drop off tool on top of last joint.

WELLHEAD

11" 3000 x 9 5/8" weld/slip on casing head. 9 5/8" x 7"x 2 3/8" 3000 psi Flanged Wellhead .

CEMENTING

Surface Casing: 125 sks Type V with 2.0 % CaCl₂ and ¼ #/sk Flocele (15.6 ppg, 1.18 ft³/sk 148 ft³ of slurry, 100% excess to circulate to surface). WOC 12 hours. Pressure test surface casing to 750 psi for 30 min.

Intermediate Casing: Depending on wellbore conditions, cement may consist of 625 sks 65/35 with 6.0 % Bentonite, 2.0 % CaCl₂, 10 #/sk Gilsonite, and ½ #/sk Flocele (12.3 ppg, 1.93 ft³/sk) and a tail of 150 sks Class G with ¼ #/sk Flocele (15.6 ppg, 1.18 ft³/sk). (1,383 ft³ of slurry, 100% excess to circulate to surface). WOC 12 hours. Test casing to 1200 psi for 30 min.

Production Liner: NO CEMENT, Open Hole Completion

Set slips with full string weight

If cement does not circulate, run temperature survey in 8 hrs. to determine TOC.

OTHER INFORMATION

- 1) This well will be an open hole completion lined with an uncemented pre-drilled liner.
- 2) If lost circulation is encountered, sufficient LCM will be added to the mud system to maintain well control. The intermediate string may need to be cemented in multiple stages with a slurry design deviated from that listed above.
- 3) If high reservoir pressures or water flows are encountered slurry design may need to be deviated to from those listed above to satisfy wellbore and formation conditions.
- 4) No abnormal temperatures or pressures are anticipated.
- 5) This gas is dedicated.


Project: Carson National Forest Sec. 12-T32N-R05W
Site: Carracas Mesa
Well: Carracas 12A #1
Wellbore: Horizontal OPE FTC

PROJECT DETAILS:

Geodetic System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone: New Mexico Central Zone

SECTION DETAILS

| Sec | MD | Inc | Azi | TVD | +N-S | +E-W | DLeg | TFace | VSec | Target |
|-----|--------|-------|--------|--------|---------|--------|------|---------|--------|------------|
| 1 | 0.0 | 0.00 | 0.00 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.0 | |
| 2 | 2200.0 | 0.00 | 0.00 | 2200.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.0 | KOP |
| 3 | 3318.2 | 39.98 | 194.14 | 3229.6 | -363.2 | -91.5 | 3.58 | 194.14 | 8.2 | |
| 4 | 3367.8 | 39.98 | 194.14 | 3267.7 | -394.1 | -99.3 | 0.00 | 0.00 | 8.9 | |
| 5 | 5134.1 | 90.00 | 90.00 | 4185.0 | -1140.0 | 910.0 | 5.61 | -100.92 | 1180.0 | Land Curve |
| 6 | 8363.5 | 90.00 | 90.00 | 4185.0 | -1140.0 | 4139.4 | 0.00 | 0.00 | 4293.5 | TD Lateral |

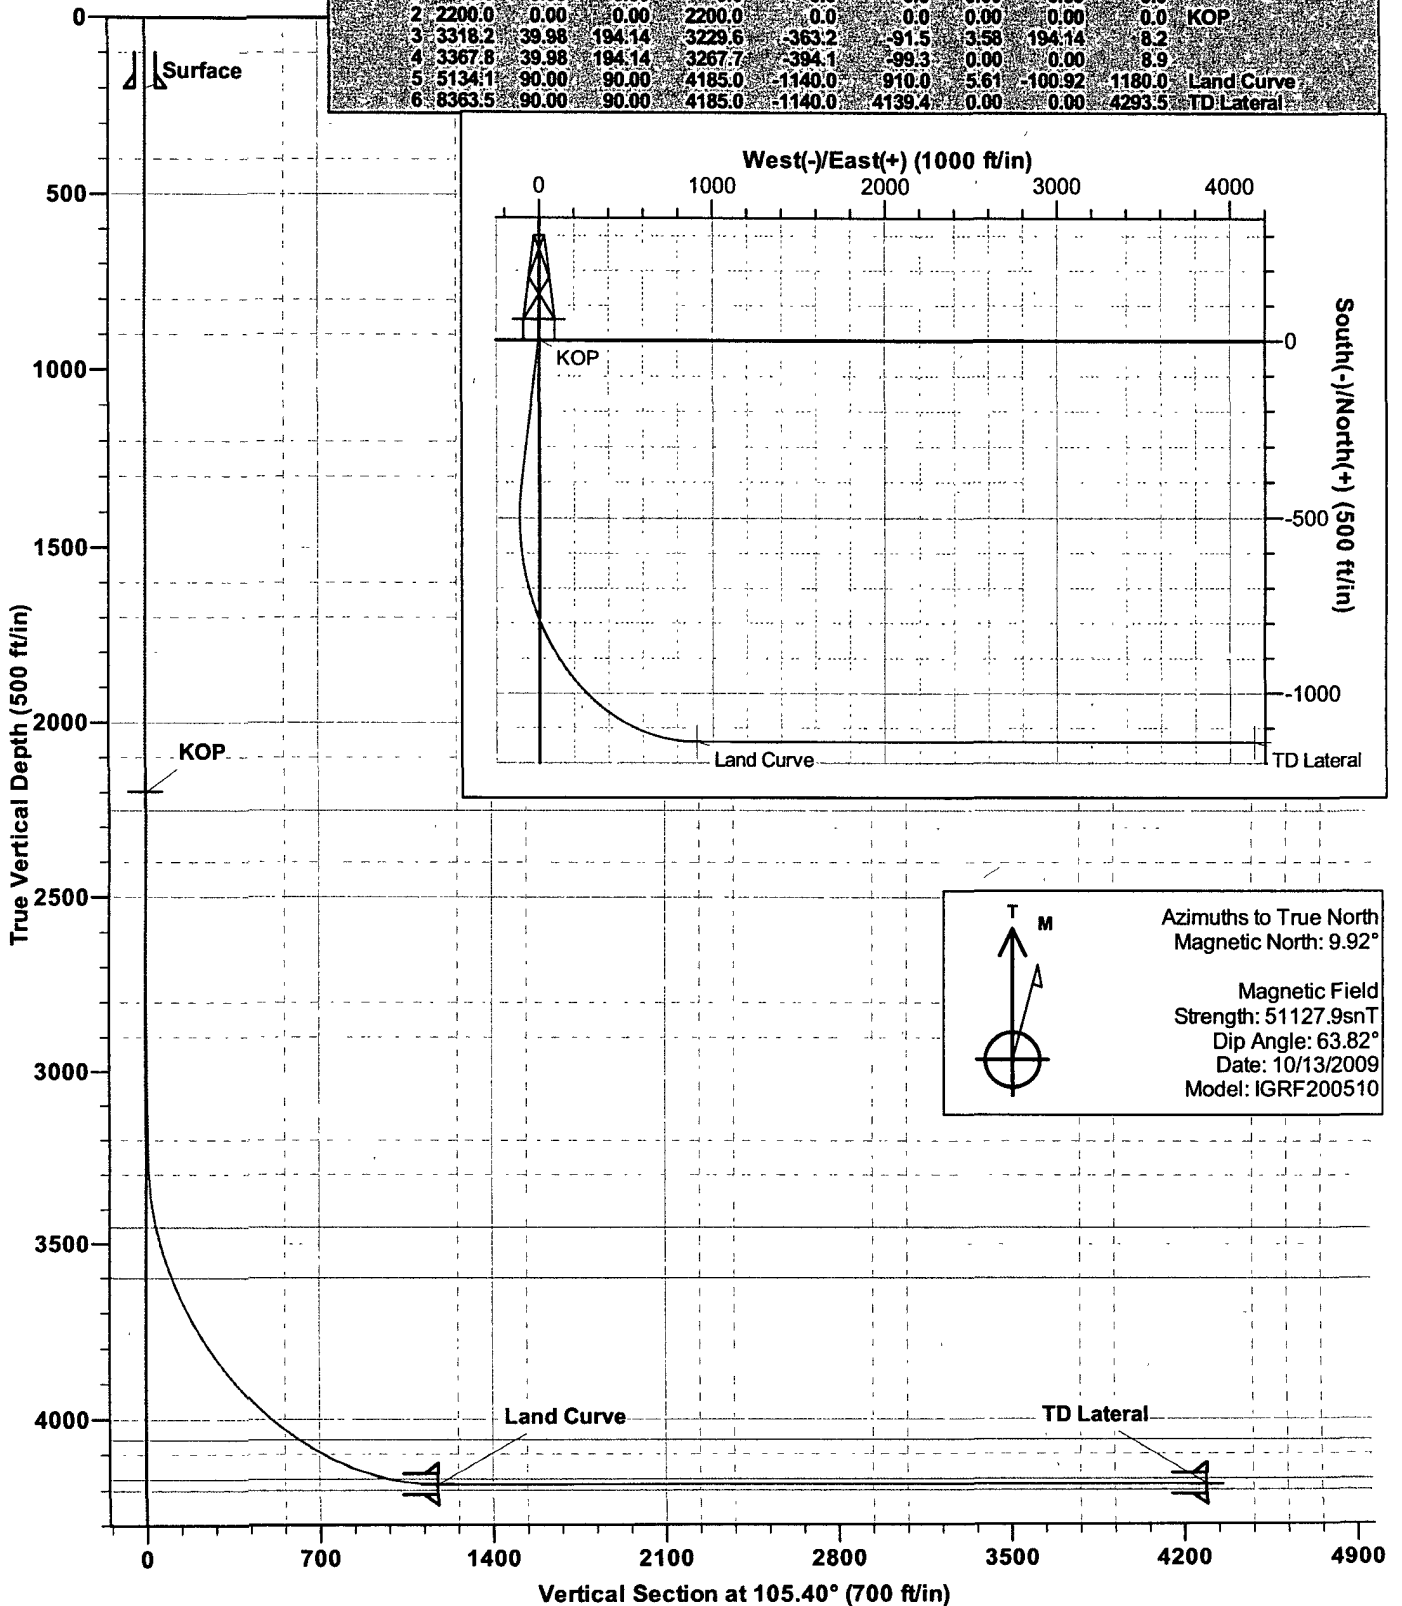

Energen DIRECTIONAL PLAN

Company: Energen Resources
Project: Carson National Forest Sec. 12-T32N-R05W
Site: Carracas Mesa
Well: Carracas 12A #1
Wellbore: Horizontal OPE FTC
Design: Preliminary Plan #1

Local Co-ordinate Reference: Well Carracas 12A #1
TVD Reference: KB @ 7453.0ft (KB)
MD Reference: KB @ 7453.0ft (KB)
North Reference: True
Survey Calculation Method: Minimum Curvature
Database: EDM 2003.16 Single User Db

Targets

| Target Name - hit/miss target - Shape | Dip Angle (°) | Dip Dir. (°) | TVD (ft) | +N/-S (ft) | +E/-W (ft) | Northing (ft) | Easting (ft) | Latitude | Longitude |
|---|------------------|-----------------|-------------|---------------|---------------|------------------|-----------------|------------------|-------------------|
| KOP - plan hits target - Point | 0.00 | 0.00 | 2,200.0 | 0.0 | 0.0 | 2,182,337.51 | 1,332,073.49 | 36° 59' 33.612 N | 107° 18' 21.024 W |
| TD Lateral - plan hits target - Point | 0.00 | 0.00 | 4,185.0 | -1,140.0 | 4,139.4 | 2,181,151.68 | 1,336,200.00 | 36° 59' 22.337 N | 107° 17' 30.003 W |
| Land Curve - plan hits target - Point | 0.00 | 0.00 | 4,185.0 | -1,140.0 | 910.0 | 2,181,187.49 | 1,332,970.80 | 36° 59' 22.340 N | 107° 18' 9.808 W |

Casing Points


| Measured Depth (ft) | Vertical Depth (ft) | Name | Casing Diameter (") | Hole Diameter (") |
|------------------------|------------------------|--------------|------------------------|----------------------|
| 200.0 | 200.0 | Surface | 9-5/8 | 12-1/4 |
| 5,134.0 | 4,185.0 | Intermediate | 7 | 8-3/4 |
| 8,363.0 | 4,185.0 | Liner | 4-1/2 | 6-1/4 |

Formations

| Measured Depth (ft) | Vertical Depth (ft) | Name | Lithology | Dip (°) | Dip Direction (°) |
|------------------------|------------------------|------------------|-----------|------------|----------------------|
| 2,253.0 | 2,253.0 | Nacimiento | | 0.00 | |
| | 4,201.0 | Base Target Coal | | 0.00 | |
| 3,800.0 | 3,600.0 | Kirtland Sh | | 0.00 | |
| 3,607.4 | 3,453.0 | Ojo Alamo SS | | 0.00 | |
| 4,922.1 | 4,168.0 | Top Target Coal | | 0.00 | |
| 4,547.7 | 4,058.0 | Fruitland Fm | | 0.00 | |

Checked By: _____ Approved By: _____ Date: _____

Energen Resources Corporation
Typical 2000 psi Choke Manifold Configuration

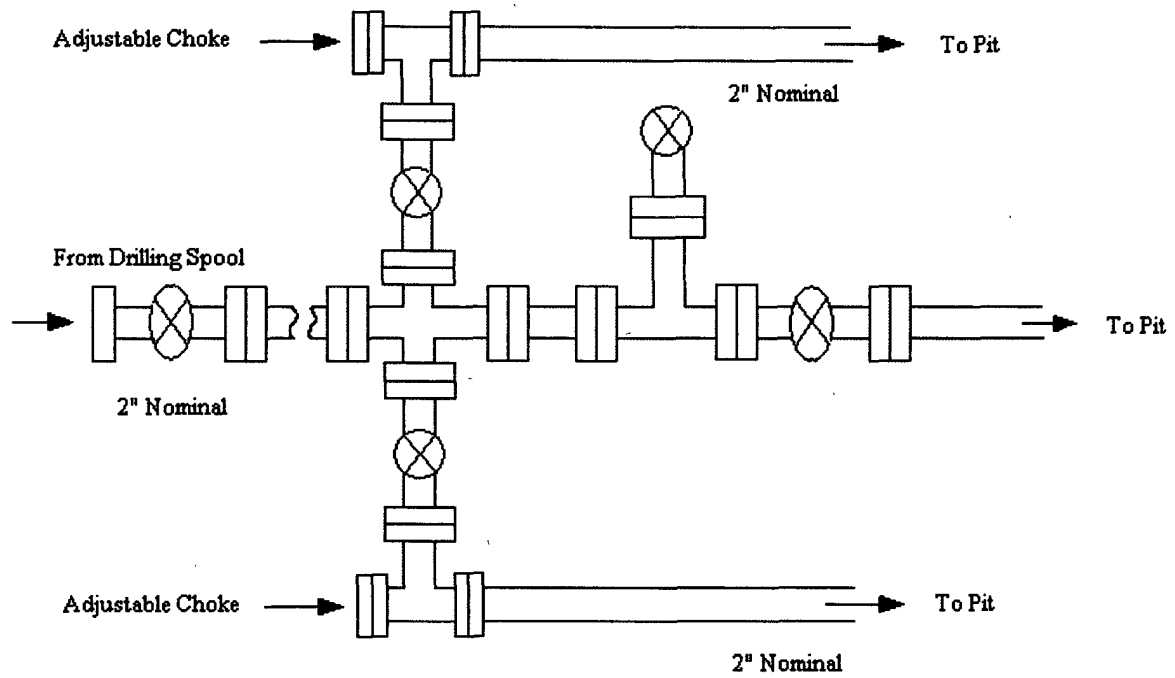

Choke manifold installed from surface to TD

Energen Resources Corporation

Typical BOP Configuration for Gas Drilling

