OCD-ARTESIA

Form 3160-3 (April 2004)	FORM APPROVED OMB No 1004-0137 Expires March 31, 2007	
UNITED STATE DEPARTMENT OF THE BUREAU OF LAND MA	5 Lease Serial No. NMNM-83591	
APPLICATION FOR PERMIT TO	DRILL OR REENTER	6 If Indian, Allotee or Tribe Name N/A
la. Type of work DRILL REENTER		7 If Unit or CA Agreement, Name and No N/A
1b. Type of Well Onl Well Gas Well Other	Single Zone Multip	le Zone 8 Lease Name and Well No. GISSLER FEDERAL #42
2. Name of Operator COG Operating LLC	3b Phone No. (include area code)	30-015- 39689
3a. Address 550 W. Texas, Suite 1300 Midland TX 79701	(432) 685-4384	10 Field and Pool or Exploratory 978 Loco Hills; Glorieta Yeso 96748
4. Location of Well (Report location clearly and in accordance with a At surface 2310' FNL & 990' FWL, UL E	any State requirements *)	11. Sec, TRM or Blk and Survey or Area Sec 5, T17S, R30E
At proposed prod zone 14 Distance in miles and direction from nearest town or post office* 2.5 miles Northeast of Loco Hil	ls, NM	12 County or Parish 13 State Eddy NM
15 Distance from proposed* location to nearest property or lease line, ft (Also to nearest drig unit line, if any) 990'	16. No. of acres in lease	17 Spacing Unit dedicated to this well 40
18 Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft 676'	19. Proposed Depth 5900'	20 BLM/BIA Bond No on file NMB000215 & NMB000740
21 Elevations (Show whether DF, KDB, RT, GL, etc.) 3693' GL	22. Approximate date work will star 08/31/2011	t* 23 Estimated duration 10 days
	24. Attachments	
The following, completed in accordance with the requirements of Onsh. 1. Well plat certified by a registered surveyor 2. A Drilling Plan 3. A Surface Use Plan (if the location is on National Forest Syster SUPO shall be filed with the appropriate Forest Service Office)	4 Bond to cover the Item 20 above) n Lands, the 5 Operator certific	ne operations unless covered by an existing bond on file (see ation specific information and/or plans as may be required by the
25 Signature	Name (Printed Typed) Kelly J. Holly	Date 07/27/2011
Title Permitting Tech		देश कर्म न
Approved by (Signature) /s/ W. W. Ingram Title FIELD MANAGER	Name (Printed/Typed) Office	WUV 152
	F CARLSBAL	OFIELD OFFICE
Application approval does not warrant or certify that the applicant ho conduct operations thereon. Conditions of approval, if any, are attached	lds legal or equitable title to those right	s in the subject lease which would entitle the applicant to APPROVAL FOR TWO YEAF
Title 18 USC Section 1001 and Title 43 USC. Section 1212, make it a States any false, fictitious or fraudulent statements or representations a	crime for any person knowingly and w s to any matter within its jurisdiction	ullfully to make to any department or agency of the United
*(Instructions on page 2)	RECEIVED	
vell Controlled Water Basin	NOV 17 2011	
	NMOCD ARTESIA	

EE ATTACHED FOR ONDITIONS OF APPROVAL

Approval Subject to General Requirements & Special Stipulations Attached

coft

MASTER DRILLING PROGRAM

1. Geologic Name of Surface Formation

Quaternary

2. Estimated Tops of Important Geologic Markers:

Quaternary	Surface
Rustler	300'
Top of Salt	500'
Base of Salt	1000'
Yates	1200'
Seven Rivers	1490'
Queen	2100'
Grayburg	2510'
San Andres	2820'
Glorietta	4250'
Paddock	4330'
Blinebry	4760'
Tubb	5750'

3. Estimated Depths of Anticipated Fresh Water, Oil and Gas

Water Sand	150'	Fresh Water
Grayburg	2510'	Oil/Gas
San Andres	2820'	Oil/Gas
Glorietta	4250'	Oil/Gas
Paddock	4330'	Oil/Gas
Blinebry	4760'	Oil/Gas
Tubb	5750'	Oil/Gas

quantities. Setting 13 3/8" casing to 425 and circulating cement back to the surface will protect the surface fresh water sand. The Salt Section will be protected by setting 8 5/8" casing to 1300 and circulating cement, in a single or multi-stage job and/or with an ECP, back to the surface. Any shallower zones above TD, which contain commercial quantities of oil and/or gas, will have cement circulated across them. This will be achieved by cementing, with a single or multi-stage job, the 5 1/2" production casing back 200' into the intermediate casing, (but calculated to surface) to be run at TD. If wellbore conditions arise

that require immediate action and/or a change to this program, COG Operating

No other formations are expected to give up oil, gas or fresh water in measurable

COA.

LLC personnel will always react to protect the wellbore and/or the environment.

4. Casing Program

600	
Sep	
1 1	
COH	
Un	

		OD					
Hole Size	Interval	Casing	Weight	Grade	Jt., Condition	Jt.	brst/clps/ten
17 1/2" 440	0-425	13 3/8"	48#	H-40orJ-55	ST&C/New	ST&C	9.22/3.943/15.8
11" 1330	0-1300	8 5/8"	24or32#	J-55	ST&C/New	ST&C	3.03/2.029/7.82
7 7/8"	0-TD	5 1/2"	15.5or17#	J-55orL-80	LT&C/New	LT&C	1.88/1.731/2.42

5. Cement Program

13 3/8" Surface Casing:

450 Class C w/ 2% Cacl2 + 0.25 pps CF, yield 1.32, back to surface. 101% excess

8 5/8" Intermediate Casing:

5 1/2" Production Casing:

11" Hole:

Single Stage: LEAD: 300 sx 50:50:10 C:Poz:Gel w/ 5% Salt +0.25% CF, yield-2.45 + TAIL: 200 sx Class C w/2% CaCl2, yield-1.32, back to surface. 202% excess Multi-Stage: Stage 1: 200 Class C w/2% CaCl2, yield - 1.32; 26% excess. Stage 2: 300 sx 50:50:10 C:Poz:Gel w/ 5% Salt +0.25% CF, yield - 2.45, back to surface, 509% excess; assumption for tool is lost circulation. Multi stage tool to be set at approximately, depending on hole conditions, 475' (50' below the surface casing). Cement volumes will be adjusted proportionately for depth changes of multi stage tool.

SEC

Single Stage: LEAD 500 sx 35:65:6

C:Poz:Gel w/ 5% Salt + 5 pps LCM + 0.2% . SMS + 0.3% FL-52A + 0.125 pps CF, yield-2.05; + TAIL 400 sx 50:50:2 C:Poz:Gel w/ 5% Salt + 3 pps LCM + 0.6% SMS + 1% FL-25 + 1% BA-58 + 0.3% FL-52A + 0.125

pps CF, yield-1.37, 62.4% open hole excess,

cement calculated back to surface.

Multi-Stage: Stage 1: (Assumed TD of 6000') 500 sx 50:50:2 C:Poz:Gel w/ 5% Salt + 3 pps LCM + 0.6% SMS + 1% FL-25 + 1% BA-58 + 0.3% FL-52A + 0.125 pps CF, yield - 1.37, 31.8% excess; Stage 2: LEAD

> 450 sx 50:50:2 C:Poz:Gel w/ 5% Salt + 3 pps LCM + 0.6% SMS + 1% FL-25 + 1% BA-58 + 0.3% FL-52A + 0.125 pps CF, yield - 1.37, + TAIL 250 sx Class C w/ 0.3% R-3 + 1.5% CD-32, yield - 1.02 110.8% open hole excess, cement calculated back to surface. Multi stage tool to be set at approximately, depending on hole conditions, 3000'. Cement volumes will be adjusted proportionately for depth changes of multi stage tool, assumption for tool is water flow.

6. **Minimum Specifications for Pressure Control**

The blowout preventer equipment (BOP) shown in Exhibit #9 will consist of a double ram-type (2000 psi WP) preventer, and in some cases possibly a 2000 psi Hydril type annular preventer as provided for in Onshore Order #2. This unit will be hydraulically operated and the ram type preventer will be equipped with blind rams on top of 4 1/2" drill pipe rams on the bottom. A 13-5/8" or 11" BOP will be used, depending on the rig selected, during the drilling of the well. The BOP will be nippled up on the 13 3/8" surface casing with BOP equipment and tested to 2000 psi. When 11" BOP is used the special drilling flange will be utilized on the 13-3/8" head to allow testing the BOP with a retrievable test plug. After setting 8-5/8" the BOP will then be nippled up on the 8 5/8" intermediate casing and tested by a third party to 2000 psi and used continuously until total depth is reached. Pipe rams will be operationally checked each 24-hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment (Exhibit #10) will include a Kelly cock and floor safety valve, choke lines and a choke manifold (Exhibit #11) with a 2000 psi WP rating.

The majority of the rigs currently in use have a 13-5/8" BOP, so no special provision is needed for most wells in the area for conventionally testing the BOP with a test plug. However, due to the vagaries of rig scheduling, it might be that one of the few rigs with 11" BOP's might be called upon to drill any specific well in the area. Note that intermediate hole size is always 11". Therefore, COG Operating LLC respectfully requests a variance to the requirement of 13-5/8" See Coft BOP on 13-3/8" casing. When that circumstance is encountered the special flange will be utilized to allow testing the entire BOP with a test plug, without subjecting the casing to test pressure. The special flange also allows the return to full-open capability if desired.

7. Types and Characteristics of the Proposed Mud System

The well will be drilled to TD with a combination of brine, cut brine and polymer mud system. The applicable depths and properties of this system are as follows:

DEPTH	TYPE	WEIGHT	VISCOSITY	WATERLOSS
0-425 440	Fresh Water	8.5	28	N.C.
425-1300'/330	Brine	10	30	N.C.
13,00'-TD	Cut Brine	8.7-9.1	29	N.C.

Sufficient mud materials will be kept at the well site to maintain mud properties and meet minimum lost circulation and weight increase requirements at all times.

8. Auxiliary Well Control and Monitoring Equipment

- A. Kelly cock will be kept in the drill string at all times.
- B. A full opening drill pipe-stabbing valve with proper drill pipe connections will be on the rig floor at all times.

9. Logging, Testing and Coring Program See COA

- A. The electric logging program will consist of GR-Dual Laterolog, Spectral Density, Dual Spaced Neutron, CSNG Log and will be run from TD to 8 5/8" casing shoe.
- B. Drill Stem test is not anticipated.
- C. No conventional coring is anticipated.
- D. Further testing procedures will be determined after the 5 ½" production casing has been cemented at TD, based on drill shows and log evaluation.

10. Abnormal Conditions, Pressure, Temperatures and Potential Hazards


No abnormal pressures or temperatures are anticipated. The estimated bottom hole at TD is 110 degrees and the estimated maximum bottom hold pressure is 2300 psig. Measurable gas volumes or Hydrogen Sulfide levels have not been encountered during drilling operations in this area, although a Hydrogen Sulfide Drilling Operation Plan is attached to this program. No major loss of circulation zones has been reported in offsetting wells.

11. Anticipated Starting Date and Duration of Operations

Road and location work will not begin until approval has been received from the BLM. As this is a Master Drilling plan, please refer to the Form 3160-3 for the anticipated start date. Once commenced, drilling operations should be finished in approximately 12 days. If the well is productive, an additional 30 days will be required for completion and testing before a decision is made to install permanent facilities.

COG Operating LLC


Exhibit #9 BOPE and Choke Schematic

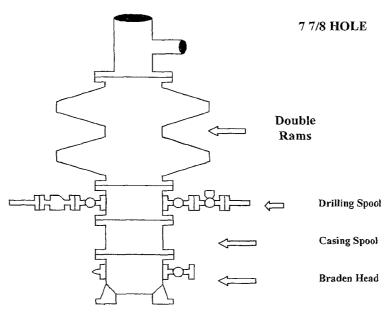

Minimum 4" Nominal choke and kill lines

Choke Manifold Requirement (2000 psi WP) No Annular Required

Adiustable Choke

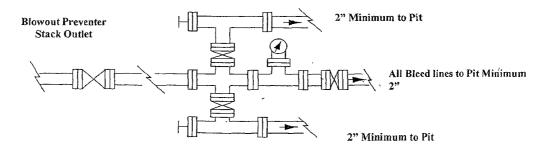


Adjustable Choke (or Positive)

NOTES REGARDING THE BLOWOUT PREVENTERS Master Drilling Plan Eddy County, New Mexico

- 1. Drilling nipple to be so constructed that it can be removed without use of a welder through rotary table opening, with minimum I.D. equal to preventer bore.
- 2. Wear ring to be properly installed in head.
- 3. Blow out preventer and all fittings must be in good condition, 2000 psi WP minimum.
- 4. All fittings to be flanged.
- 5. Safety valve must be available on rig floor at all times with proper connections, valve to be full 2000 psi WP minimum.
- 6. All choke and fill lines to be securely anchored especially ends of choke lines.
- 7. Equipment through which bit must pass shall be at least as large as the diameter of the casing being drilled through.
- 8. Kelly cock on Kelly.
- 9. Extension wrenches and hands wheels to be properly installed.
- 10. Blow out preventer control to be located as close to driller's position as feasible.
- 11. Blow out preventer closing equipment to include minimum 40-gallon accumulator, two independent sources of pump power on each closing unit installation all API specifications.

Blowout Preventers Page 2

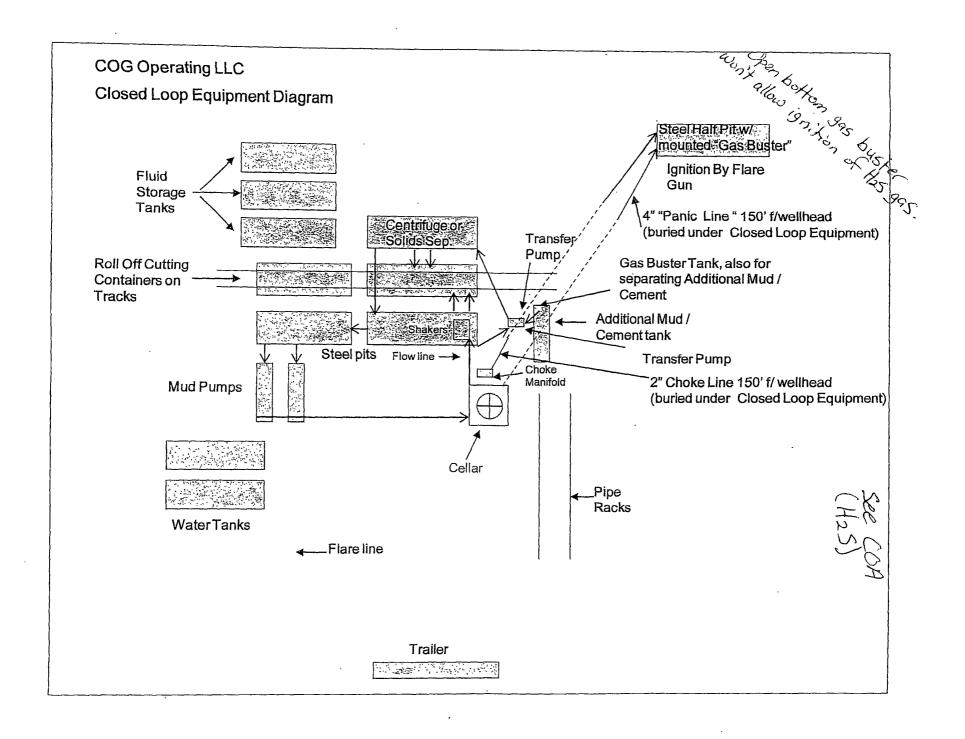

Closed Loop Operation & Maintenance Procedure

All drilling fluid circulated over shaker(s) with cuttings discharged into roll off container.

Fluid and fines below shaker(s) are circulated with transfer pump through centrifuge(s) or solids separator with cuttings and fines discharged into roll off container.

Fluid is continuously re-circulated through equipment with polymer added to aid separation of cutting fines.

Roll off containers are lined and de-watered with fluids re-circulated into system.


Additional tank is used to capture unused drilling fluid or cement returns from casing jobs.

This equipment will be maintained 24 hrs./day by solids control personnel and or rig crews that stay on location.

Cuttings will be hauled to either:

CRI (permit number R9166) or GMI (permit number 711-019-001)

dependent upon which rig is available to drill this well.

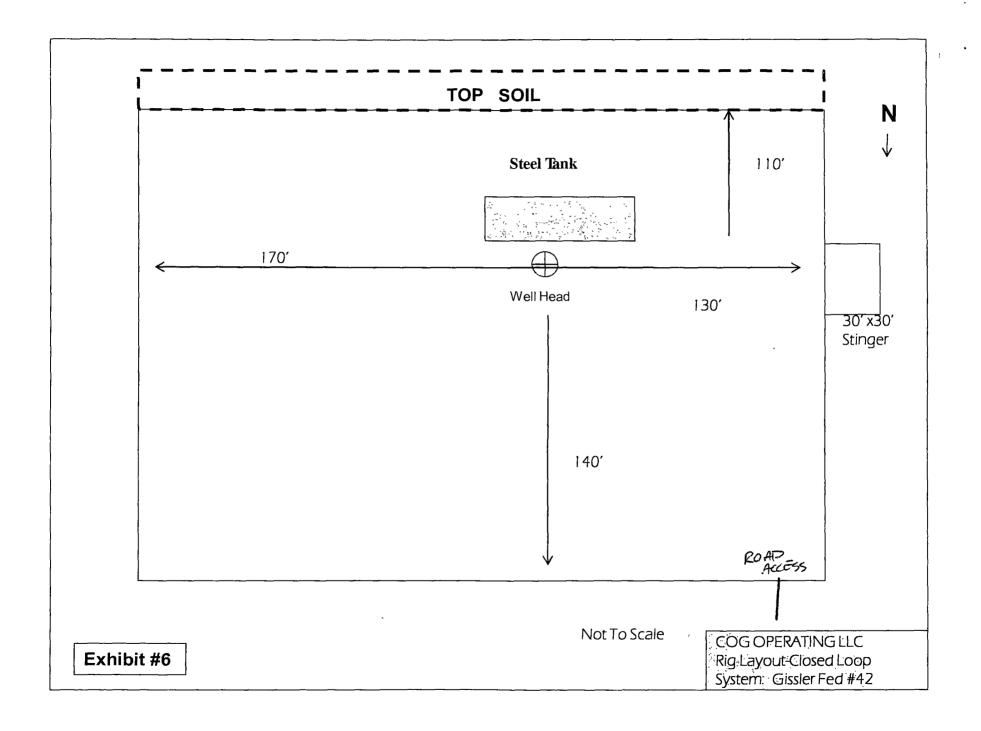

	DISTRICT CHECKLIST FOR INTENTS TO DRILL
	Operator
302499	
30011	A. Date C101 rec'd
-	b. Bottomhole Location Standard, Non-Standard Bottomhole4. Downhole Commingle: Yes, No
	a. Pool #2, Code, Acres
	Pool #3, Code, Acres
	Pool #4
	5. POTASH Area Yes
	7. OCD Approval Date 11 12312011 API #30-0/8 91689