




XTO Energy Inc.

Commission Expires:
S:\Forms\Deviation Tests



9-1-2004

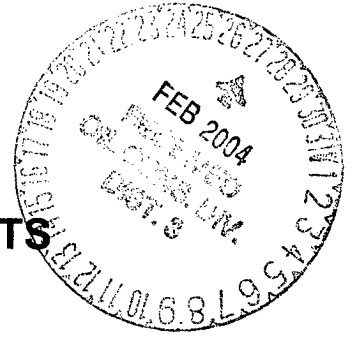

Scientific
Drilling

XTO Energy Inc.

Field: San Juan County, NM
Site: State Gas Com BP #1G
Well: #1G
Wellpath: OH
Survey: Survey #1

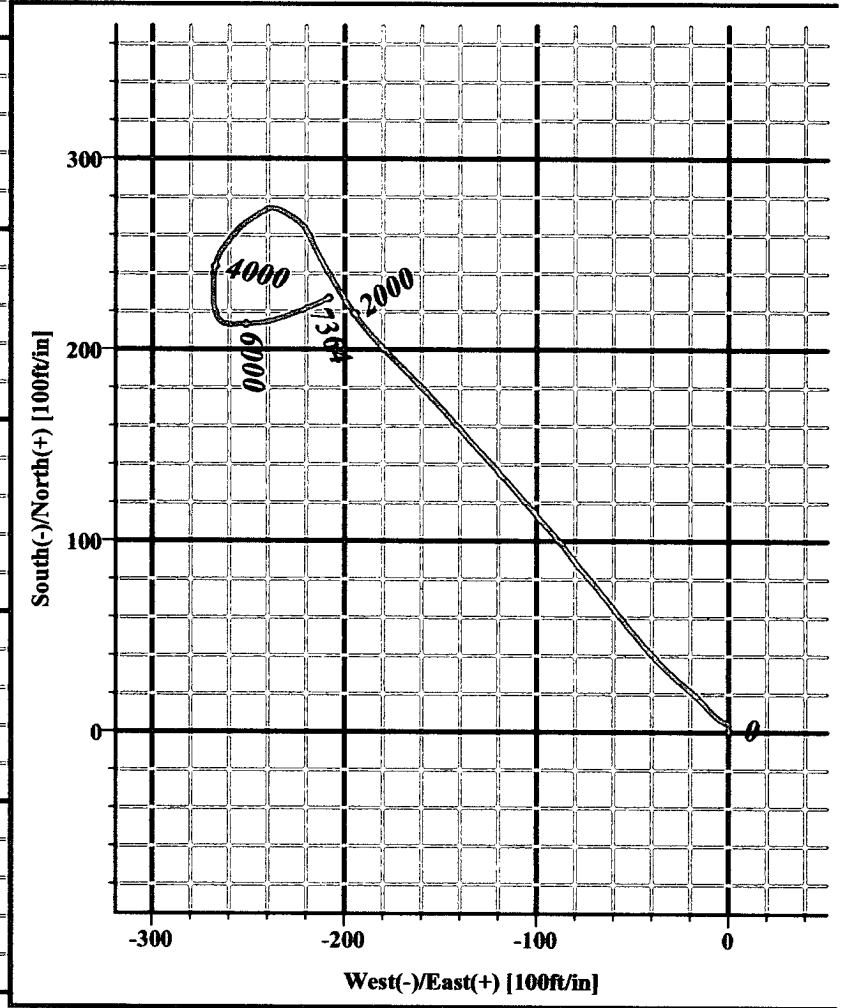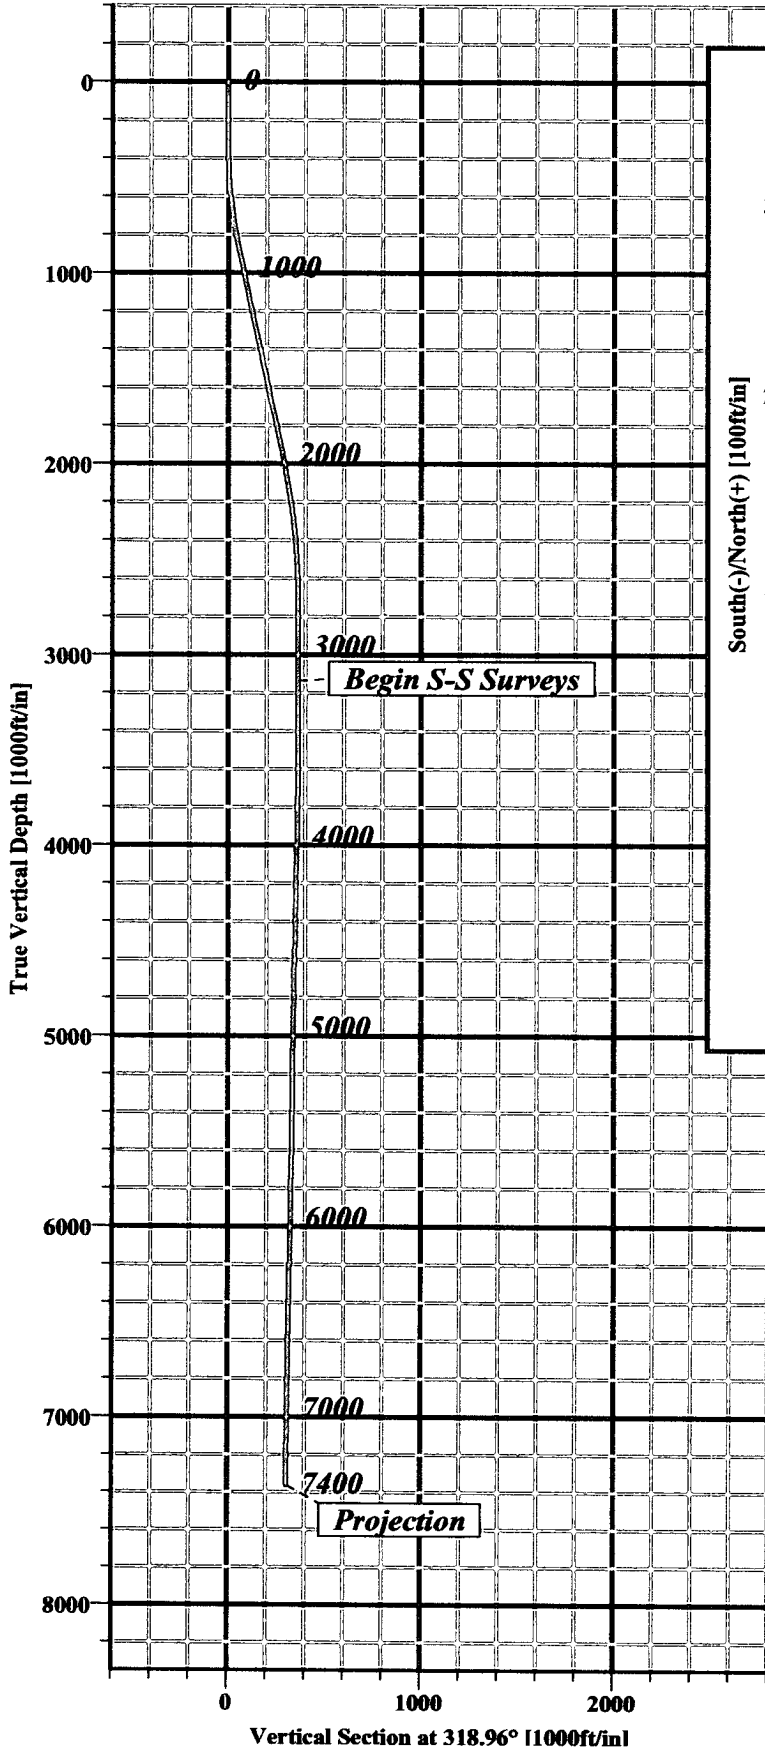

BOTTOM HOLE CLOSURE

310.4 ft. 316.16° Azimuth

Survey: Survey #1 (#1G/OH)

Created By: Summer Whitehouse

Date: 2/26/2004



Scientific Drilling International

SURVEY REPORT

Company: XTO Energy Inc.	Date: 2/26/2004	Time: 14:21:51	Page: 1
Field: San Juan County, NM	Co-ordinate(NE) Reference:	Site: State Gas Com BP #1G, True North	
Site: State Gas Com BP #1G	Vertical (TVD) Reference:	System: Mean Sea Level	
Well: #1G	Section (VS) Reference:	Well (0.00N,0.00E,318.96Azi)	
Wellpath: OH	Survey Calculation Method: Minimum Curvature	Db: Sybase	

Survey: Survey #1	Start Date: 2/1/2004
Company: Scientific Drilling	Engineer: J.J.Bayer/Eiserman
Tool: MWD,	Tied-to: From Surface

Survey

MD ft	Incl deg	Azim deg	TVD ft	VS ft	N/S ft	E/W ft	DLS deg/100ft	CLen ft	ClsD ft	ClsA deg
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.0	0.0	0.00
328.0	0.97	8.00	328.0	1.8	2.7	0.4	0.30	328.0	2.8	8.00
358.0	0.70	352.00	358.0	2.1	3.2	0.4	1.18	30.0	3.2	7.10
388.0	0.88	8.90	388.0	2.4	3.6	0.4	0.98	30.0	3.6	6.46
418.0	0.88	327.00	418.0	2.8	4.0	0.3	2.10	30.0	4.0	4.51
448.0	1.40	301.00	448.0	3.4	4.4	-0.1	2.40	30.0	4.4	358.40
478.0	2.29	294.60	478.0	4.3	4.8	-1.0	3.04	30.0	4.9	348.51
508.0	3.43	294.10	507.9	5.7	5.4	-2.3	3.80	30.0	5.9	336.70
538.0	4.20	302.70	537.8	7.5	6.4	-4.1	3.19	30.0	7.6	327.45
598.0	6.90	315.00	597.6	13.2	10.1	-8.5	4.89	60.0	13.2	320.08
629.0	7.00	317.80	628.3	17.0	12.9	-11.1	1.14	31.0	17.0	319.27
659.0	7.30	317.50	658.1	20.7	15.6	-13.6	1.01	30.0	20.7	318.98
689.0	7.60	313.20	687.9	24.6	18.4	-16.3	2.11	30.0	24.6	318.40
719.0	8.30	312.20	717.6	28.7	21.2	-19.4	2.38	30.0	28.7	317.57
750.0	9.00	310.10	748.2	33.3	24.3	-22.9	2.48	31.0	33.4	316.67
811.0	11.00	313.50	808.3	43.8	31.3	-30.8	3.42	61.0	43.9	315.54
871.0	11.70	317.00	867.1	55.6	39.7	-39.1	1.64	60.0	55.7	315.49
931.0	11.80	319.60	925.8	67.8	48.9	-47.2	0.90	60.0	67.9	315.99
992.0	11.60	321.30	985.6	80.2	58.4	-55.1	0.65	61.0	80.3	316.68
1052.0	11.70	322.50	1044.3	92.3	67.9	-62.5	0.44	60.0	92.3	317.36
1113.0	11.70	319.30	1104.1	104.6	77.5	-70.3	1.06	61.0	104.7	317.78
1204.0	12.10	323.20	1193.1	123.4	92.2	-82.1	0.99	91.0	123.4	318.31
1264.0	12.00	319.20	1251.8	135.9	101.9	-89.9	1.40	60.0	135.9	318.58
1447.0	11.80	318.70	1430.9	173.6	130.4	-114.7	0.12	183.0	173.6	318.66
1538.0	11.70	317.50	1520.0	192.2	144.2	-127.1	0.29	91.0	192.2	318.61
1631.0	11.70	318.80	1611.0	211.0	158.2	-139.6	0.28	93.0	211.0	318.57
1757.0	12.40	316.60	1734.3	237.3	177.6	-157.4	0.66	126.0	237.3	318.47
1852.0	12.40	314.90	1827.0	257.7	192.3	-171.6	0.38	95.0	257.7	318.25
1950.0	11.70	318.30	1922.9	278.1	207.1	-185.7	1.02	98.0	278.1	318.13
1978.0	10.90	321.90	1950.3	283.6	211.3	-189.2	3.81	28.0	283.6	318.16
2042.0	10.00	325.30	2013.3	295.2	220.6	-196.1	1.70	64.0	295.2	318.37
2074.0	10.30	327.20	2044.8	300.7	225.3	-199.2	1.40	32.0	300.8	318.52
2137.0	10.20	329.50	2106.8	311.8	234.9	-205.1	0.67	63.0	311.8	318.87
2200.0	9.10	330.10	2168.9	322.2	244.0	-210.4	1.75	63.0	322.2	319.23
2264.0	8.70	334.10	2232.1	331.8	252.7	-215.0	1.15	64.0	331.8	319.61
2295.0	8.40	336.20	2262.8	336.2	256.9	-217.0	1.40	31.0	336.3	319.82
2327.0	6.90	332.90	2294.5	340.3	260.8	-218.8	4.88	32.0	340.4	320.00
2390.0	6.00	312.40	2357.1	347.3	266.4	-223.0	3.90	63.0	347.4	320.07
2453.0	4.30	300.70	2419.8	352.8	269.8	-227.4	3.16	63.0	352.8	319.87
2517.0	3.90	299.10	2483.7	357.1	272.1	-231.4	0.65	64.0	357.2	319.62
2580.0	3.50	289.10	2546.5	360.8	273.7	-235.1	1.20	63.0	360.8	319.35
2644.0	2.50	268.20	2610.5	363.4	274.3	-238.3	2.29	64.0	363.4	319.02
2707.0	2.20	235.00	2673.4	364.4	273.6	-240.7	2.18	63.0	364.4	318.66
2774.0	2.40	238.20	2740.3	364.7	272.1	-242.9	0.35	67.0	364.8	318.25
3172.0	1.00	230.00	3138.2	366.1	265.5	-252.7	0.36	398.0	366.5	316.42
3672.0	2.25	217.00	3638.0	364.2	254.9	-261.9	0.26	500.0	365.4	314.22
4168.0	1.75	180.00	4133.7	356.5	239.5	-267.8	0.27	496.0	359.3	311.81
4672.0	1.25	181.00	4637.5	346.6	226.3	-267.9	0.10	504.0	350.7	310.19
5172.0	1.00	152.00	5137.4	338.3	217.0	-265.9	0.12	500.0	343.2	309.22



Scientific Drilling International

SURVEY REPORT

Company: XTO Energy Inc.
Field: San Juan County, NM
Site: State Gas Com BP #1G
Well: #1G
Wellpath: OH

Date: 2/26/2004 **Time:** 14:21:51 **Page:** 2
Co-ordinate(NE) Reference: Site: State Gas Com BP #1G, True North
Vertical (TVD) Reference: System: Mean Sea Level
Section (VS) Reference: Well (0.00N,0.00E,318.96Azi)
Survey Calculation Method: Minimum Curvature **Db:** Sybase

Survey

MD ft	Incl deg	Azim deg	TVD ft	VS ft	N/S ft	E/W ft	DLS deg/100ft	CLen ft	CLSD ft	CLSA deg
5664.0	1.00	91.00	5629.3	331.2	213.1	-259.6	0.21	492.0	335.9	309.39
6172.0	1.75	86.00	6137.2	323.6	213.6	-247.4	0.15	508.0	326.9	310.80
6668.0	2.25	70.00	6632.9	315.5	217.5	-230.7	0.15	496.0	317.1	313.30
7172.0	1.75	65.00	7136.6	309.8	224.1	-214.5	0.10	504.0	310.2	316.26
7400.0	1.75	65.00	7364.5	307.9	227.0	-208.1	0.00	228.0	308.0	317.49

Annotation

MD ft	TVD ft	
3172.0	3138.2	Begin Single Shot Surveys
7400.0	7364.5	Projection