

12-446
EA-12-727

RECEIVED

JUL 20 2012

Form 3160-3
(February 2005)

OCD Artesia

FORM APPROVED
OMB No 1004-0137
Expires March 31, 2007

NM OCD ARTESIA

UNITED STATES

DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: ☒ DRILL ☐ REENTER		5 Lease Serial No. SL: L-6322 BHL: LC062254-A	
1b. Type of Well: ☒ Oil Well ☐ Gas Well ☐ Other ☒ Single Zone ☐ Multiple Zone		6 If Indian, Allottee or Tribe Name	
2 Name of Operator Devon Energy Production Co., LP		7 If Unit or CA Agreement, Name and No Burton Flat Deep Unit NM70798X	
3a Address 20 North Broadway OKC, OK 73102		8 Lease Name and Well No Burton Flat Deep Unit 47H	
3b. Phone No. (include area code) (405)-552-7802		9 API Well No. 30-015-40517	
4 Location of Well (Report location clearly and in accordance with any State requirements *) At surface NWSE 1980' FSL & 1650' FEL UL J of Sec 28 At proposed prod zone SWSE 330' FSL & 2275' FEL UL O of Sec 33		10 Field and Pool, or Exploratory Burton Flat, Bone Spring, EAST	
11 Sec, T R M or Blk and Survey or Area Sec 28-T20S-R28E		12 County or Parish Eddy	
13 State NM		14 Distance in miles and direction from nearest town or post office* Approximately 14 miles southeast of Loco Hills, NM.	
15 Distance from proposed* location to nearest property or lease line, ft (Also to nearest drig unit line, if any) 330'		16 No. of acres in lease See Land Plat	
17 Spacing Unit dedicated to this well 240 acres		18 Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft See Plat	
19 Proposed Depth MTVD 6485' MD 13295'		20 BLM/BIA Bond No on file CO-1104	
21 Elevations (Show whether DF, KDB, RT, GL, etc) 3224' GL		22 Approximate date work will start* 04/01/2012	
23 Estimated duration 45 days		24 Attachments	

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No 1, must be attached to this form.

- | | |
|--|---|
| 1 Well plat certified by a registered surveyor | 4 Bond to cover the operations unless covered by an existing bond on file (see Item 20 above) |
| 2 A Drilling Plan | 5 Operator certification |
| 3 A Surface Use Plan (If the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office) | 6 Such other site specific information and/or plans as may be required by the BLM. |

25. Signature 	Name (Printed/Typed) Stephanie A. Ysasaga	Date 02/15/2012
Title Sr. Staff Engineering Technician		

Approved by (Signature) 	Name (Printed/Typed) James A. Ames	Date JUL 18 2012
Title FIELD MANAGER		
Office CARLSBAD FIELD OFFICE		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

APPROVAL FOR TWO YEARS

Title 18 USC Section 1001 and Title 43 USC Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction

*(Instructions on page 2)

Capitan Controlled Water Basin

SEE ATTACHED
CONDITIONS OF APPROVAL

Approval Subject to General Requirements
& Special Stipulations Attached

Operators Representative:

The Devon Energy Production Company, L.P. representatives responsible for ensuring compliance of the surface use plan are listed below.

James Allbee
Operations Engineer Advisor

Don Mayberry
Superintendent

Devon Energy Production Company, L.P.
20 North Broadway, Suite 1500
Oklahoma City, OK 73102-8260

Devon Energy Production Company, L.P.
Post Office Box 250
Artesia, NM 88211-0250

(405) 228-8698 (office)
(405) 820-8682 (cell)

(575) 748-0164 (office)
(575) 748-5235 (cell)

Certification

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access road proposed herein; that I am familiar with the conditions that presently exist; that I have full knowledge of State and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or Devon Energy Production Company, L.P. am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

I hereby also certify that I, or Devon Energy Production Company, L.P. have made a good faith effort to provide the surface owner with a copy of the Surface Use Plan of Operations and any Conditions of Approval that are attached to the APD.

Executed this 20th day of February, 2012.

Printed Name: Stephanie A. Ysasaga

Signed Name: [Signature]

Position Title: Sr. Staff Engineering Technician

Address: 20 North Broadway, OKC OK 73102

Telephone: (405)-552-7802

Field Representative (if not above signatory): Don Mayberry (see above)

Address (if different from above):

Telephone (if different from above):

E-mail (optional):

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised October 15, 2009
Submit one copy to appropriate
District Office
☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-015-40517	² Pool Code 3713	³ Pool Name AVALON
⁴ Property Code 302209	⁵ Property Name BURTON FLAT DEEP UNIT	⁶ Well Number 47H
⁷ OGRID No. 6137	⁸ Operator Name DEVON ENERGY PRODUCTION COMPANY, L.P.	⁹ Elevation 3224.0

¹⁰ Surface Location

UL or lot no	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
J	28	20 S	28 E		1980	SOUTH	1650	EAST	EDDY

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
O	33	20 S	28 E		330	SOUTH	2275	EAST	EDDY

¹² Dedicated Acres 240	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.
--------------------------------------	-------------------------------	----------------------------------	-------------------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

NW CORNER SEC. 28 LAT. = 32.5517492°N LONG. = 104.1914581°W NMSP EAST (FT) N = 564486.16 E = 585051.76 SECTION CORNER LAT. = 32.5372081°N LONG. = 104.1916043°W NMSP EAST (FT) N = 559196.05 E = 585013.73 SW CORNER SEC. 33 LAT. = 32.5226679°N LONG. = 104.1915322°W NMSP EAST (FT) N = 553906.37 E = 585042.99	BURTON FLAT DEEP UNIT #47H ELEV. = 3224.0' LAT. = 32.5426701°N (NAD83) LONG. = 104.1796413°W NMSP EAST (FT) N = 561188.23 E = 588697.47 SURFACE LOCATION 1650' BOTTOM OF HOLE LAT. = 32.5035942°N LONG. = 104.1817600°W NMSP EAST (FT) N = 554247.50 E = 588054.46 BOTTOM OF HOLE 2275' S-O CORNER SEC. 33 LAT. = 32.5226879°N LONG. = 104.1829592°W NMSP EAST (FT) N = 553917.28 E = 587685.35	NE CORNER SEC. 28 LAT. = 32.5517890°N LONG. = 104.1741945°W NMSP EAST (FT) N = 564508.14 E = 590370.94 SECTION CORNER LAT. = 32.5372383°N LONG. = 104.1743422°W NMSP EAST (FT) N = 559214.54 E = 590333.33 SE CORNER SEC. 33 LAT. = 32.5226834°N LONG. = 104.1743831°W NMSP EAST (FT) N = 553919.45 E = 590328.62	¹⁷ OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division <i>[Signature]</i> 6/3/12 Signature Date Printed Name STEPHANIE A. YSASAGA ¹⁸ SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. February 2, 2012 Date of Survey <i>[Signature]</i> Signature and Seal of Professional Surveyor Certificate Number FELMON F. JARAMILLO, PLS 42797 SURVEY NO 770
--	--	--	---

FIRST PERFORATION POINT: 1130' FSL & 1720' FEL OF SEC 28

- ☒ PROJECT AREA
☐ PRODUCING AREA

DRILLING PROGRAM

Devon Energy Production Company, LP

Burton Flat Deep Unit 47H

Surface Location: 1980' FSL & 1650' FEL, Unit J, Sec 28 T20S R28E, Eddy, NM

Bottom hole Location: 330' FSL & 2275' FEL, Unit O, Sec 33 T20S R28E, Eddy, NM

1. Geologic Name of Surface Formation

- a. Quaternary Alluvium

2. Estimated Tops of Geological Markers & Depths of Anticipated Fresh Water, Oil or Gas:

a. Rustler Alluvium	50'	Fresh Water
b. Salado	425'	Barren
c. Base Salado	540'	Barren
d. Tansil	625'	Barren
e. Yates	805'	Barren
f. Capitan	1080'	Barren
g. B/Capitan	2755'	Barren
h. Delaware	2910'	Oil
i. Lower Brush Canyon	4995'	Oil
j. Bone Spring Lime	5165'	Oil
k. Avalon Ss Marker	5300'	Oil
l. 1 st Bone Spring Ss	6470'	Oil
m. 2 nd Bone Spring Lime	6670'	Oil
n. Total Depth	MTVD 6535' MD 13259'	

No other formations are expected to yield oil, gas or fresh water in measurable volumes. The surface fresh water sands will be protected by setting 20" casing at ~~300'~~ and 13 3/8" casing at 900' and circulating cement back to surface. The fresh water sands will be protected by setting 9 5/8" casing at 2900' and circulating cement to surface. The Delaware intervals will be isolated by setting 5 1/2" casing to total depth and circulating cement above the base of the 9 5/8" casing. All casing is new and API approved.

3. Casing Program:

<u>Hole Size</u>	<u>Hole Interval</u>	<u>OD Csg</u>	<u>Casing Interval</u>	<u>Weight</u>	<u>Collar</u>	<u>Grade</u>
see COA 26"	0-300' 245	20"	0'-300' 245	94#	BTC	J/K-55
17 1/2"	300'-900'	13 3/8"	0'-900'	68#	BTC	J/K-55
12 1/4"	900'-2900'	9 5/8"	0'-2900'	40#	LTC	J-55
8 3/4"	2900'-5700'	5 1/2"	0'-5700'	17#	LTC	HCP-110
8 3/4"	5700'-13295'	5 1/2"	5700'-13259'	17#	BTC	HCP-110

Max TVD: 6,535'

~~An 8 3/4" pilot hole will be drilled to 9,455', and plugged back to KOP with approximately 385 sxs Class H, 15.6 ppg, 1.18 cf/sk cement. Not Approved~~

Design Parameter Factors:

<u>Casing Size</u>	<u>Collapse Design Factor</u>	<u>Burst Design Factor</u>	<u>Tension Design Factor</u>
20"	3.7	15.0	32
13 3/8"	1.83	4.11	7.45
9 5/8"	1.89	2.91	1.80
5 1/2" LTC	1.20	1.71	1.97
5 1/2" BTC	2.66	3.79	4.58

While running the intermediate casing, the casing will never be completely evacuated. There is no potential for the intermediate casing to be used as a production string. All casing strings utilized are new.

4. Cement Program: (Note: All cement volumes are calculated with 25% excesses.)

- a. 20" Surface

Lead: 335 sacks Class C Cement + 2% bwoc Calcium Chloride + 0.125 lbs/sack Cello Flake + 4% bwoc Bentonite + 81.4% Fresh Water. 13.5 ppg. Yield: 1.75 cf/sk

Tail: 300 sacks Class C Cement + 2% bwoc Calcium Chloride + 0.125 lbs/sack Cello Flake + 56.3% Fresh Water. 14.8 ppg. Yield 1.35. **TOC @ surface.**
- b. 13 3/8" Intermediate 1

Lead: 485 sacks Class C Cement + 0.125 lbs/sack Cello Flake + 4% bwoc Bentonite + 81.4% Fresh Water, 13.5 ppg, 1.75 cf/sk.

Tail: 250 sacks Class C Cement + 2% bwoc Calcium Chloride + 0.125 lbs/sack Cello Flake + 56.3% Fresh Water, 14.8 ppg, 1.35 cf/sk
TOC @ surface
- c. 9 5/8" Intermediate 2

Lead: 800 sacks (60:40) Poz (Fly Ash):Class C Cement + 5% bwow Sodium Chloride + 0.125 lbs/sack Cello Flake + 3 lbs/sack LCM-1 + 1% bwoc Metasilicate + 89.7% Fresh Water, 12.6 ppg, 1.73 cf/sk

Tail: 300 sacks (60:40)Poz Class C Cement + 5% bwow Sodium Chloride + 0.125 lbs/sack Cello Flake + 0.4% bwoc Sodium Metasilicate + 4% bwoc MPA-5 + 65.5% Water, 13.8 ppg, 1.38 cf/sk
TOC @ surface
- c. 5 1/2" Production

1st Lead: 590 sacks (50:50) Poz (Fly Ash):Class H Cement + 0.5% bwoc FL-52 + 0.15% bwoc ASA-301 + 10% bwoc Bentonite, 11.8 ppg. Yield: 2.30 cf/sk

2nd Lead: 380 sacks (35:65) Poz (Fly Ash):Class H Cement + 3% bwow Sodium Chloride + 0.125 lbs/sack Cello Flake + 0.7% bwoc FL-52 + 6% bwoc Bentonite + 105.4% Fresh Water, 12.5 ppg. Yield: 2.0 cf/sk. TOC @ 800-ft

Tail: 1875 sacks (50:50) Poz (Fly Ash):Class H Cement + 5% bwow Sodium Chloride + 0.3% bwoc CD-32 + 0.5% bwoc FL-25 + 0.5% bwoc FL-52 + 0.5% bwoc Sodium Metasilicate + 57.3% Fresh Water, 14.2 ppg. Yield: 1.28 cf/sk

TOC for All Strings:

Surface: 0'
Intermediate 1: 0'
Production: 800' (approx. 200' above reef top)

The above cement volumes could be revised pending the caliper measurement from the open hole logs. Actual cement volumes will be adjusted bases on fluid caliper and caliper log data.

5. **Pressure Control Equipment:**

BOP DESIGN: The BOP system used to drill the 17-1/2" hole will consist of a **20" 2M Annular preventer**. The BOP system will be tested as per BLM Onshore Oil and Gas Order No. 2 as a **2M system** prior to drilling out the casing shoe.

The BOP system used to drill the 12-1/4" and 8-3/4" holes will consist of a **13-5/8" 3M Triple Ram and Annular preventer**. The BOP system will be tested as per BLM Onshore Oil and Gas Order No. 2 as a **3M system** prior to drilling out the casing shoe.

The pipe rams will be operated and checked as per Onshore Order No 2. A 2" kill line and 3" choke line will be incorporated into the drilling spool below the ram BOP. In addition to the rams and annular preventer, additional BOP accessories include a kelly cock, floor safety valve, choke lines, and choke manifold rated at **3,000 psi WP**.

Devon requests a variance to use a flexible line with flanged ends between the BOP and the choke manifold (choke line). The line will be kept as straight as possible with minimal turns.

6. **Proposed Mud Circulation System**

<u>Depth</u>	<u>Mud Wt.</u>	<u>Visc</u>	<u>Fluid Loss</u>	<u>Type System</u>
0' - 300', 245	8.4-9.0	30-34	N/C	Fresh Water
300'-900'	9.8-10.2	28-32	N/C	Brine
900'-2900'	8.4-9.0	28-30	N/C	Fresh Water
2900'-13259'	8.6-9.0	28-32	N/C-12	Fresh Water

The necessary mud products for weight addition and fluid loss control will be on location at all times.

7. Auxiliary Well Control and Monitoring Equipment:

- a. A Kelly cock will be in the drill string at all times.
- b. A full opening drill pipe stabbing valve having the appropriate connections will be on the rig floor at all times.
- c. Hydrogen Sulfide detection equipment will be in operation after drilling out the 20" casing shoe until the 5 1/2" casing is cemented. Breathing equipment will be on location upon drilling the 20" shoe until total depth is reached.

8. Logging, Coring, and Testing Program: *See COA*

- a. Drill stem tests will be based on geological sample shows.
- b. If a drill stem test is anticipated; a procedure, equipment to be used and safety measures will be provided via sundry notice to the BLM.
- c. The open hole electrical logging program will be:
 - i. Total Depth to Intermediate Casing Dual Laterolog-Micro Laterolog with SP and Gamma Ray. Compensated Neutron – Z Density log with Gamma Ray and Caliper.
 - ii. Total Depth to Surface Compensated Neutron with Gamma Ray
 - iii. No coring program is planned
 - iv. Additional testing will be initiated subsequent to setting the 5 1/2" production casing. Specific intervals will be targeted based on log evaluation, geological sample shows and drill stem tests.

9. Potential Hazards:

- a. No abnormal pressures or temperatures are expected. There is no known presence of H₂S in this area. If H₂S is encountered the operator will comply with the provisions of Onshore Oil and Gas Order No. 6. Possible lost circulation is expected to occur. All personnel will be familiar with all aspects of safe operation of equipment being used to drill this well. Estimated BHP 3600 psi and Estimated BHT 110°. No H₂S is anticipated to be encountered.

10. Anticipated Starting Date and Duration of Operations:

- a. Road and location construction will begin after the BLM has approved the APD. Anticipated spud date will be as soon after BLM approval and as soon as a rig will be available. Move in operations and drilling is expected to take 32 days. If production casing is run then an additional 30 days will be needed to complete well and construct surface facilities and/or lay flow lines in order to place well on production.

Devon Energy Corporation

Eddy County, NM (NAD 83)

Burton Flat Deep Unit

Burton Flat Deep Unit 47H

Wellbore #1

Plan: Plan #2

Sperry Drilling Services Proposal Report

08 March, 2012

Well Coordinates 561,188 23 N, 588,697 47 E (32° 32' 33 61" N, 104° 10' 46 71" W)
Ground Level 3,224 00 ft

Local Coordinate Origin	Centered on Well Burton Flat Deep Unit 47H
Viewing Datum	GL 3224' + KB 25' @ 3249 00ft (H&P 223)
TVDs to System	N
North Reference	Grid
Unit System	API - US Survey Feet

Version 2003 16 Build 43I

HALLIBURTON

Plan Report for Burton Flat Deep Unit 47H - Plan #2

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	Tooface Azimuth (°)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,100.00	0.00	0.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,200.00	0.00	0.00	2,200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,300.00	0.00	0.00	2,300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,400.00	0.00	0.00	2,400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,500.00	0.00	0.00	2,500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,600.00	0.00	0.00	2,600.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,700.00	0.00	0.00	2,700.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,800.00	0.00	0.00	2,800.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,900.00	0.00	0.00	2,900.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,000.00	0.00	0.00	3,000.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,100.00	0.00	0.00	3,100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,200.00	0.00	0.00	3,200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,300.00	0.00	0.00	3,300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,400.00	0.00	0.00	3,400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,500.00	0.00	0.00	3,500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,600.00	0.00	0.00	3,600.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,700.00	0.00	0.00	3,700.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,800.00	0.00	0.00	3,800.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,900.00	0.00	0.00	3,900.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,000.00	0.00	0.00	4,000.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,100.00	0.00	0.00	4,100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,200.00	0.00	0.00	4,200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,300.00	0.00	0.00	4,300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,400.00	0.00	0.00	4,400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,500.00	0.00	0.00	4,500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,600.00	0.00	0.00	4,600.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,700.00	0.00	0.00	4,700.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,800.00	0.00	0.00	4,800.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,900.00	0.00	0.00	4,900.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5,000.00	0.00	0.00	5,000.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5,100.00	0.00	0.00	5,100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5,200.00	0.00	0.00	5,200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5,300.00	0.00	0.00	5,300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5,400.00	0.00	0.00	5,400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5,500.00	0.00	0.00	5,500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5,600.00	0.00	0.00	5,600.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5,700.00	0.00	0.00	5,700.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5,800.00	0.00	0.00	5,800.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

HALLIBURTON**Plan Report for Burton Flat Deep Unit 47H - Plan #2**

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	Toolface Azimuth (°)
5,900.00	0 00	0.00	5,900.00	0 00	0 00	0.00	0.00	0.00	0.00	0 00
5,962.05	0 00	0 00	5,962.05	0 00	0 00	0.00	0.00	0.00	0.00	0 00
KOP/Start Build @ 5962.05' MD - Build Rate = 10.00°/100'										
6,000.00	3 80	185.29	5,999.97	-1.25	-0 12	1 26	10.00	10.00	0.00	185.29
6,050.00	8 80	185.29	6,049.66	-6.71	-0 62	6 74	10.00	10.00	0.00	0 00
6,100.00	13.80	185.29	6,098.67	-16.46	-1 52	16 53	10.00	10.00	0.00	0.00
6,150.00	18 80	185.29	6,146.65	-30.42	-2 82	30 55	10.00	10.00	0.00	0.00
6,200.00	23 80	185.29	6,193.22	-48.50	-4 49	48.70	10.00	10.00	0.00	0.00
6,250.00	28 80	185.29	6,238.03	-70.55	-6 54	70.85	10.00	10.00	0.00	0.00
6,300.00	33 80	185.29	6,280.74	-96.40	-8 93	96.81	10.00	10.00	0.00	0.00
6,350.00	38 80	185.29	6,321.03	-125.86	-11 66	126.40	10.00	10.00	0.00	0.00
6,400.00	43 80	185.29	6,358.58	-158.71	-14 70	159.39	10.00	10.00	0.00	0.00
6,450.00	48 80	185.29	6,393.12	-194.69	-18 04	195.52	10.00	10.00	0.00	0.00
6,500.00	53 80	185.29	6,424.37	-233.53	-21 63	234.53	10.00	10.00	0.00	0.00
6,550.00	58 80	185.29	6,452.11	-274.93	-25 47	276.11	10.00	10.00	0.00	0.00
6,600.00	63 80	185.29	6,476.12	-318.58	-29 51	319.95	10.00	10.00	0.00	0.00
6,650.00	68.80	185.29	6,496.21	-364.16	-33 74	365.72	10.00	10.00	0.00	0.00
6,700.00	73.80	185.29	6,512.24	-411.30	-38 10	413.06	10.00	10.00	0.00	0.00
6,750.00	78 80	185.29	6,524.09	-459.65	-42 58	461.62	10.00	10.00	0.00	0.00
6,800.00	83 80	185.29	6,531.65	-508.85	-47 14	511.03	10.00	10.00	0.00	0.00
6,850.00	88 80	185.29	6,534.88	-558.52	-51 74	560.91	10.00	10.00	0.00	0.00
6,864.74	90 27	185.29	6,535.00	-573.19	-53 10	575.65	10.00	10.00	0.00	0.00
End Build @ 6864.74' MD - Hold Angle = 90.27°										
6,900.00	90 27	185.29	6,534.84	-608.30	-56.36	610.91	0.00	0.00	0.00	0.00
7,000.00	90 27	185.29	6,534.37	-707.88	-65.58	710.91	0.00	0.00	0.00	0.00
7,100.00	90 27	185.29	6,533.90	-807.45	-74.80	810.91	0.00	0.00	0.00	0.00
7,200.00	90 27	185.29	6,533.43	-907.02	-84.03	910.90	0.00	0.00	0.00	0.00
7,300.00	90 27	185.29	6,532.96	-1,006.59	-93.25	1,010.90	0.00	0.00	0.00	0.00
7,400.00	90.27	185.29	6,532.49	-1,106.17	-102.48	1,110.90	0.00	0.00	0.00	0.00
7,500.00	90 27	185.29	6,532.02	-1,205.74	-111.70	1,210.90	0.00	0.00	0.00	0.00
7,600.00	90 27	185.29	6,531.55	-1,305.31	-120.93	1,310.90	0.00	0.00	0.00	0.00
7,700.00	90 27	185.29	6,531.08	-1,404.88	-130.15	1,410.90	0.00	0.00	0.00	0.00
7,800.00	90 27	185.29	6,530.61	-1,504.46	-139.38	1,510.90	0.00	0.00	0.00	0.00
7,900.00	90 27	185.29	6,530.14	-1,604.03	-148.60	1,610.90	0.00	0.00	0.00	0.00
8,000.00	90 27	185.29	6,529.68	-1,703.60	-157.83	1,710.90	0.00	0.00	0.00	0.00
8,100.00	90 27	185.29	6,529.21	-1,803.17	-167.05	1,810.89	0.00	0.00	0.00	0.00
8,200.00	90 27	185.29	6,528.74	-1,902.75	-176.28	1,910.89	0.00	0.00	0.00	0.00
8,300.00	90 27	185.29	6,528.27	-2,002.32	-185.50	2,010.89	0.00	0.00	0.00	0.00
8,400.00	90 27	185.29	6,527.80	-2,101.89	-194.73	2,110.89	0.00	0.00	0.00	0.00
8,500.00	90 27	185.29	6,527.33	-2,201.46	-203.95	2,210.89	0.00	0.00	0.00	0.00
8,600.00	90 27	185.29	6,526.86	-2,301.04	-213.17	2,310.89	0.00	0.00	0.00	0.00
8,700.00	90 27	185.29	6,526.39	-2,400.61	-222.40	2,410.89	0.00	0.00	0.00	0.00
8,800.00	90 27	185.29	6,525.92	-2,500.18	-231.62	2,510.89	0.00	0.00	0.00	0.00
8,900.00	90 27	185.29	6,525.45	-2,599.75	-240.85	2,610.89	0.00	0.00	0.00	0.00
9,000.00	90 27	185.29	6,524.98	-2,699.33	-250.07	2,710.88	0.00	0.00	0.00	0.00
9,100.00	90 27	185.29	6,524.51	-2,798.90	-259.30	2,810.88	0.00	0.00	0.00	0.00
9,200.00	90 27	185.29	6,524.05	-2,898.47	-268.52	2,910.88	0.00	0.00	0.00	0.00
9,300.00	90 27	185.29	6,523.58	-2,998.04	-277.75	3,010.88	0.00	0.00	0.00	0.00
9,400.00	90 27	185.29	6,523.11	-3,097.62	-286.97	3,110.88	0.00	0.00	0.00	0.00
9,500.00	90 27	185.29	6,522.64	-3,197.19	-296.20	3,210.88	0.00	0.00	0.00	0.00
9,600.00	90 27	185.29	6,522.17	-3,296.76	-305.42	3,310.88	0.00	0.00	0.00	0.00
9,700.00	90 27	185.29	6,521.70	-3,396.33	-314.65	3,410.88	0.00	0.00	0.00	0.00
9,800.00	90 27	185.29	6,521.23	-3,495.91	-323.87	3,510.88	0.00	0.00	0.00	0.00
9,900.00	90 27	185.29	6,520.76	-3,595.48	-333.10	3,610.87	0.00	0.00	0.00	0.00
10,000.00	90 27	185.29	6,520.29	-3,695.05	-342.32	3,710.87	0.00	0.00	0.00	0.00
10,100.00	90 27	185.29	6,519.82	-3,794.62	-351.55	3,810.87	0.00	0.00	0.00	0.00
10,200.00	90 27	185.29	6,519.35	-3,894.20	-360.77	3,910.87	0.00	0.00	0.00	0.00
10,300.00	90 27	185.29	6,518.88	-3,993.77	-369.99	4,010.87	0.00	0.00	0.00	0.00
10,400.00	90 27	185.29	6,518.42	-4,093.34	-379.22	4,110.87	0.00	0.00	0.00	0.00

Plan Report for Burton Flat Deep Unit 47H - Plan #2

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	Toolface Azimuth (°)
10,500.00	90 27	185 29	6,517.95	-4,192.91	-388.44	4,210.87	0.00	0.00	0.00	0.00
10,600.00	90 27	185 29	6,517.48	-4,292.49	-397.67	4,310.87	0.00	0.00	0.00	0.00
10,700.00	90 27	185 29	6,517.01	-4,392.06	-406.89	4,410.87	0.00	0.00	0.00	0.00
10,800.00	90 27	185 29	6,516.54	-4,491.63	-416.12	4,510.86	0.00	0.00	0.00	0.00
10,900.00	90 27	185 29	6,516.07	-4,591.20	-425.34	4,610.86	0.00	0.00	0.00	0.00
11,000.00	90 27	185 29	6,515.60	-4,690.78	-434.57	4,710.86	0.00	0.00	0.00	0.00
11,100.00	90 27	185 29	6,515.13	-4,790.35	-443.79	4,810.86	0.00	0.00	0.00	0.00
11,200.00	90 27	185 29	6,514.66	-4,889.92	-453.02	4,910.86	0.00	0.00	0.00	0.00
11,300.00	90 27	185 29	6,514.19	-4,989.49	-462.24	5,010.86	0.00	0.00	0.00	0.00
11,400.00	90 27	185 29	6,513.72	-5,089.07	-471.47	5,110.86	0.00	0.00	0.00	0.00
11,500.00	90 27	185 29	6,513.26	-5,188.64	-480.69	5,210.86	0.00	0.00	0.00	0.00
11,600.00	90 27	185 29	6,512.79	-5,288.21	-489.92	5,310.86	0.00	0.00	0.00	0.00
11,700.00	90 27	185 29	6,512.32	-5,387.78	-499.14	5,410.85	0.00	0.00	0.00	0.00
11,800.00	90 27	185 29	6,511.85	-5,487.36	-508.37	5,510.85	0.00	0.00	0.00	0.00
11,900.00	90 27	185 29	6,511.38	-5,586.93	-517.59	5,610.85	0.00	0.00	0.00	0.00
12,000.00	90 27	185 29	6,510.91	-5,686.50	-526.81	5,710.85	0.00	0.00	0.00	0.00
12,100.00	90 27	185 29	6,510.44	-5,786.07	-536.04	5,810.85	0.00	0.00	0.00	0.00
12,200.00	90 27	185 29	6,509.97	-5,885.65	-545.26	5,910.85	0.00	0.00	0.00	0.00
12,300.00	90 27	185 29	6,509.50	-5,985.22	-554.49	6,010.85	0.00	0.00	0.00	0.00
12,400.00	90 27	185 29	6,509.03	-6,084.79	-563.71	6,110.85	0.00	0.00	0.00	0.00
12,500.00	90 27	185 29	6,508.56	-6,184.36	-572.94	6,210.85	0.00	0.00	0.00	0.00
12,600.00	90 27	185 29	6,508.09	-6,283.94	-582.16	6,310.85	0.00	0.00	0.00	0.00
12,700.00	90 27	185 29	6,507.63	-6,383.51	-591.39	6,410.84	0.00	0.00	0.00	0.00
12,800.00	90 27	185 29	6,507.16	-6,483.08	-600.61	6,510.84	0.00	0.00	0.00	0.00
12,900.00	90 27	185 29	6,506.69	-6,582.65	-609.84	6,610.84	0.00	0.00	0.00	0.00
13,000.00	90 27	185 29	6,506.22	-6,682.23	-619.06	6,710.84	0.00	0.00	0.00	0.00
13,100.00	90 27	185 29	6,505.75	-6,781.80	-628.29	6,810.84	0.00	0.00	0.00	0.00
13,200.00	90 27	185 29	6,505.28	-6,881.37	-637.51	6,910.84	0.00	0.00	0.00	0.00
13,259.61	90 27	185 29	6,505.00	-6,940.73	-643.01	6,970.45	0.00	0.00	0.00	0.00

TD @ 13259.61' MD - Burton Flat Deep Unit 47H / BHL

Plan Annotations

Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates		Comment
		+N/-S (ft)	+E/-W (ft)	
5,962.05	5,962.05	0.00	0.00	KOP/Start Build @ 5962.05' MD
5,962.05	5,962.05	0.00	0.00	Build Rate = 10.00°/100'
6,864.74	6,535.00	-573.19	-53.10	End Build @ 6864.74' MD
6,864.74	6,535.00	-573.19	-53.10	Hold Angle = 90.27°
13,259.61	6,505.00	-6,940.73	-643.01	TD @ 13259.61' MD

Vertical Section Information

Angle Type	Target	Azimuth (°)	Origin Type	Origin +N/-S (ft)	Origin +E/-W (ft)	Start TVD (ft)
TD	No Target (Freehand)	185.29	Slot	0.00	0.00	0.00

Survey tool program

From (ft)	To (ft)	Survey/Plan	Survey Tool
0.00	13,259.52	Plan #2	MWD

Plan Report for Burton Flat Deep Unit 47H - Plan #2

Formation Details

Measured Depth (ft)	Vertical Depth (ft)	Name	Lithology	Dip (°)	Dip Direction (°)
	6,537.85	Target Line		-0.27	185.29

Targets associated with this wellbore

Target Name	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Shape
Burton Flat Deep Unit 47H / BHL	6,505.00	-6,940.73	-643.01	Point

**North Reference Sheet for Burton Flat Deep Unit - Burton Flat Deep Unit 47H -
Wellbore #1**

All data is in US Feet unless otherwise stated. Directions and Coordinates are relative to Grid North Reference.

Vertical Depths are relative to GL 3224' + KB 25' @ 3249.00ft (H&P 223). Northing and Easting are relative to Burton Flat Deep Unit 47H.

Coordinate System is US State Plane 1983, New Mexico Eastern Zone using datum North American Datum 1983, ellipsoid GRS 1980.

Projection method is Transverse Mercator (Gauss-Kruger).

Central Meridian is -104.33°, Longitude Origin 0° 0' 0.000 E°, Latitude Origin: 0° 0' 0.000 N°.

False Easting: 541,337.50ft, False Northing: 0.00ft, Scale Reduction: 0.99991166.

Grid Coordinates of Well: 561,188.23 ft N, 588,697.47 ft E.


Geographical Coordinates of Well: 32° 32' 33.61" N, 104° 10' 46.71" W.

Grid Convergence at Surface is: 0.08°.

Based upon Minimum Curvature type calculations, at a Measured Depth of 13,259.61ft.

the Bottom Hole Displacement is 6,970.45ft in the Direction of 185.29° (Grid).

Magnetic Convergence at surface is -7.81° (13 February 2012, BGGM2011).

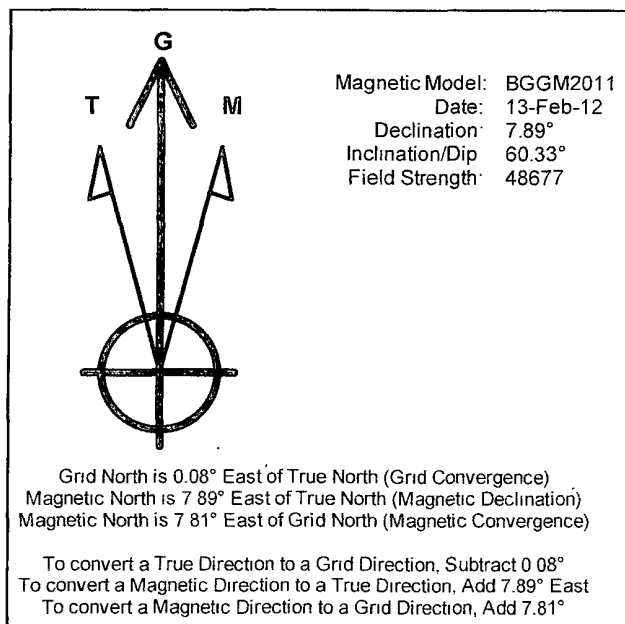

Project: Eddy County, NM (NAD 83)
Site: Burton Flat Deep Unit
Well: Burton Flat Deep Unit 47H
Wellbore: Wellbore #1
Plan: Plan #2
Rig: H&P 223

SURFACE LOCATION

US State Plane 1983
 New Mexico Eastern Zone
 Elevation: GL 3224' + KB 25' @ 3249.00ft (H&P 223)
 Northing Easting Latitude Longitude
 561188.23 588697.47 32° 32' 33.612 N 104° 10' 46.709 W

SECTION DETAILS

MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Annotation
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
5962.05	0.00	0.00	5962.05	0.00	0.00	0.00	0.00	0.00	KOP/Start Build
6864.74	90.27	185.29	6535.00	-573.19	-53.10	10.00	185.29	575.65	End Build
13259.61	90.27	185.29	6505.00	-6940.73	-643.01	0.00	0.00	6970.45	TD


WELLBORE TARGET DETAILS (MAP CO-ORDINATES)

Name	TVD	+N/-S	+E/-W	Northing	Easting	Shape
Burton Flat Deep Unit 47H / BHL	6505.00	-6940.73	-643.01	554247.50	588054.46	Point

devon

To convert a Magnetic Direction to a Grid Direction, Add 7.81°

Magnetic Model: BGGM2011 Date: 13-Feb-12
 Azimuths to Grid North

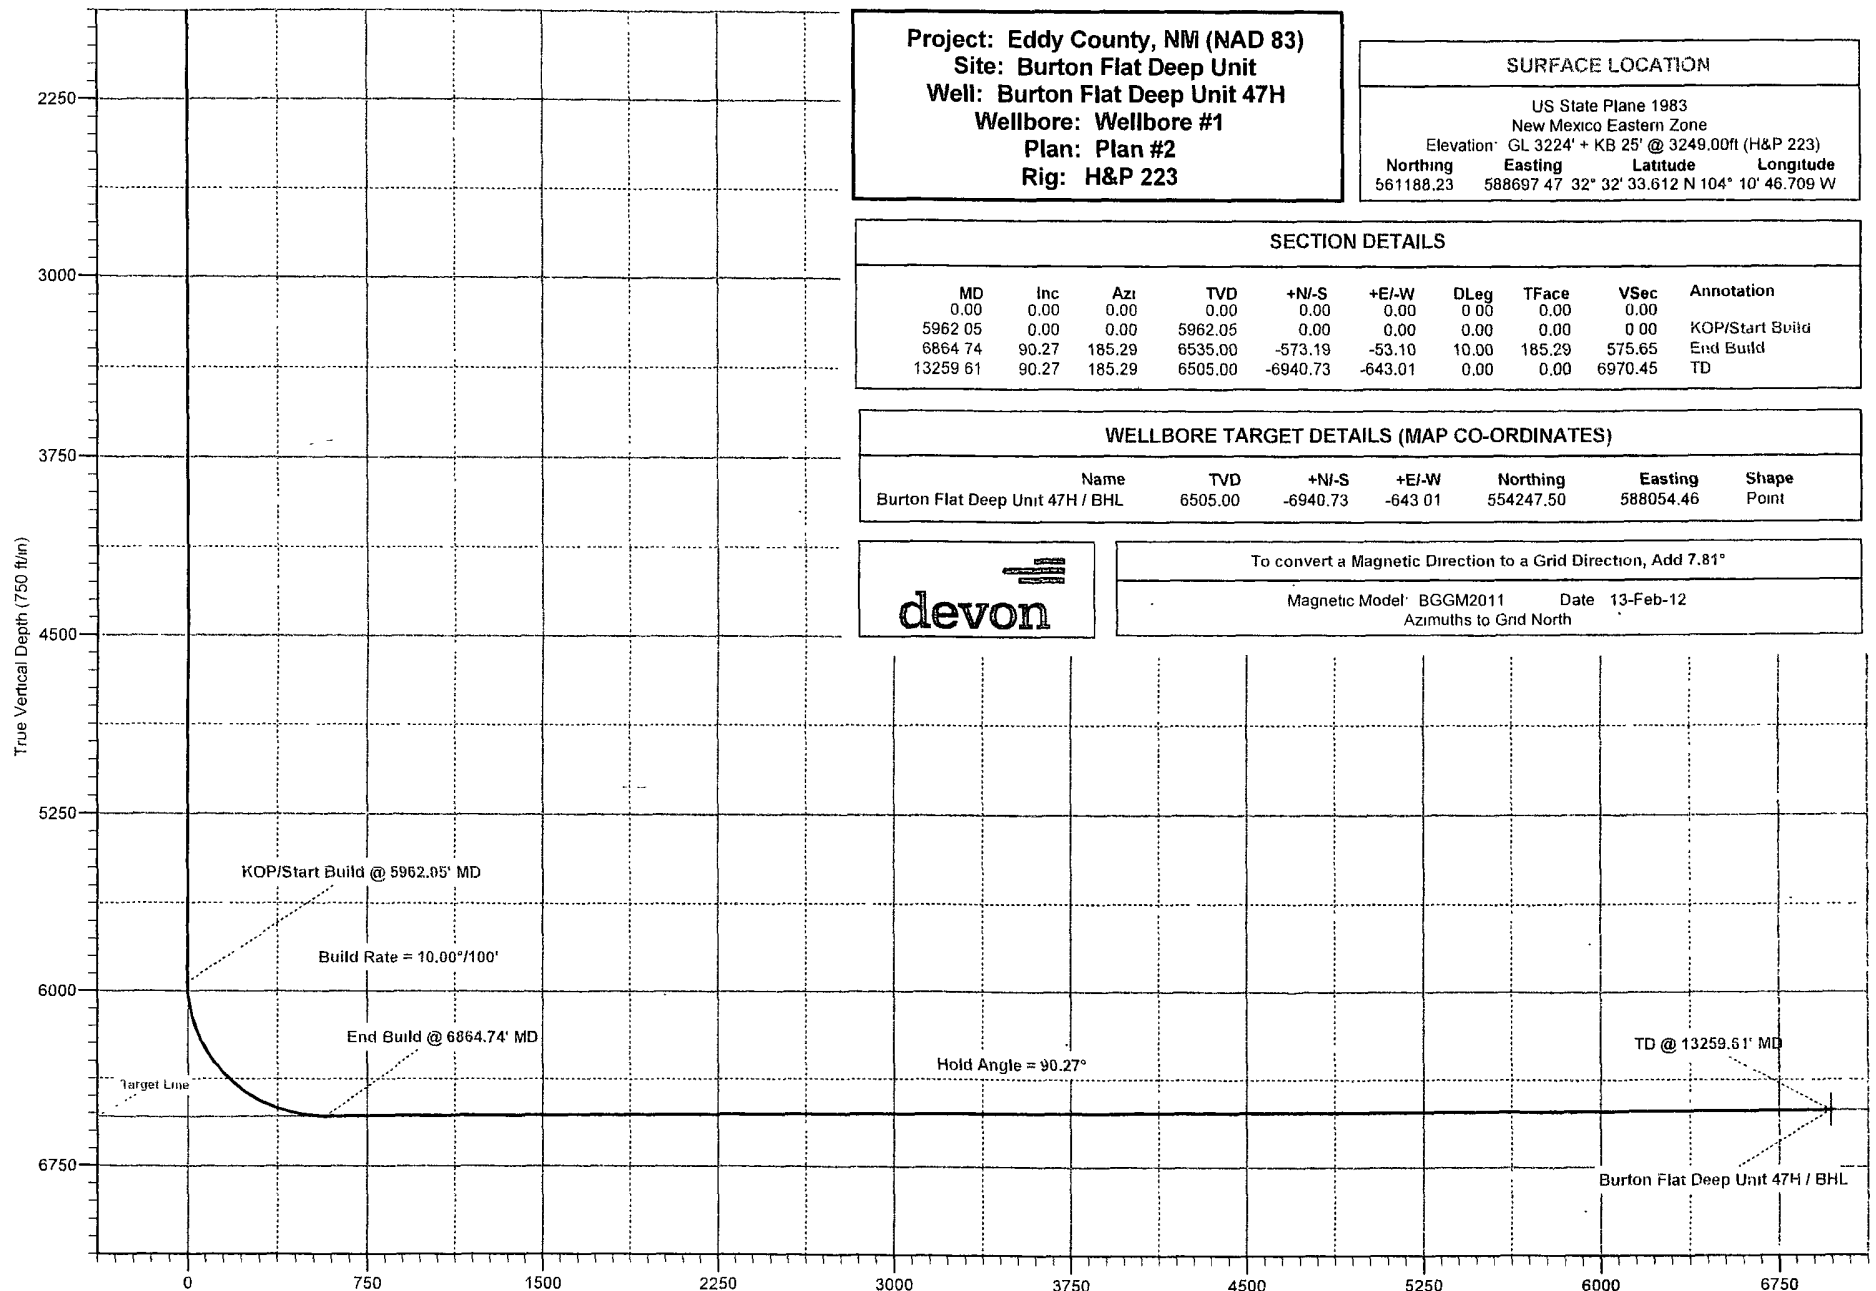



Project: Eddy County, NM (NAD 83)
Site: Burton Flat Deep Unit
Well: Burton Flat Deep Unit 47H
Wellbore: Wellbore #1
Plan: Plan #2
Rig: H&P 223

SURFACE LOCATION

US State Plane 1983
 New Mexico Eastern Zone
 Elevation GL 3224' + KB 25' @ 3249 00ft (H&P 223)
 Northing Easting Latitude Longitude
 561188 23 588697 47 32° 32' 33 612 N 104° 10' 46 709 W

To convert a Magnetic Direction to a Grid Direction, Add 7.81°

Magnetic Model BGGM2011 Date 13-Feb-12
 Azimuths to Grid North

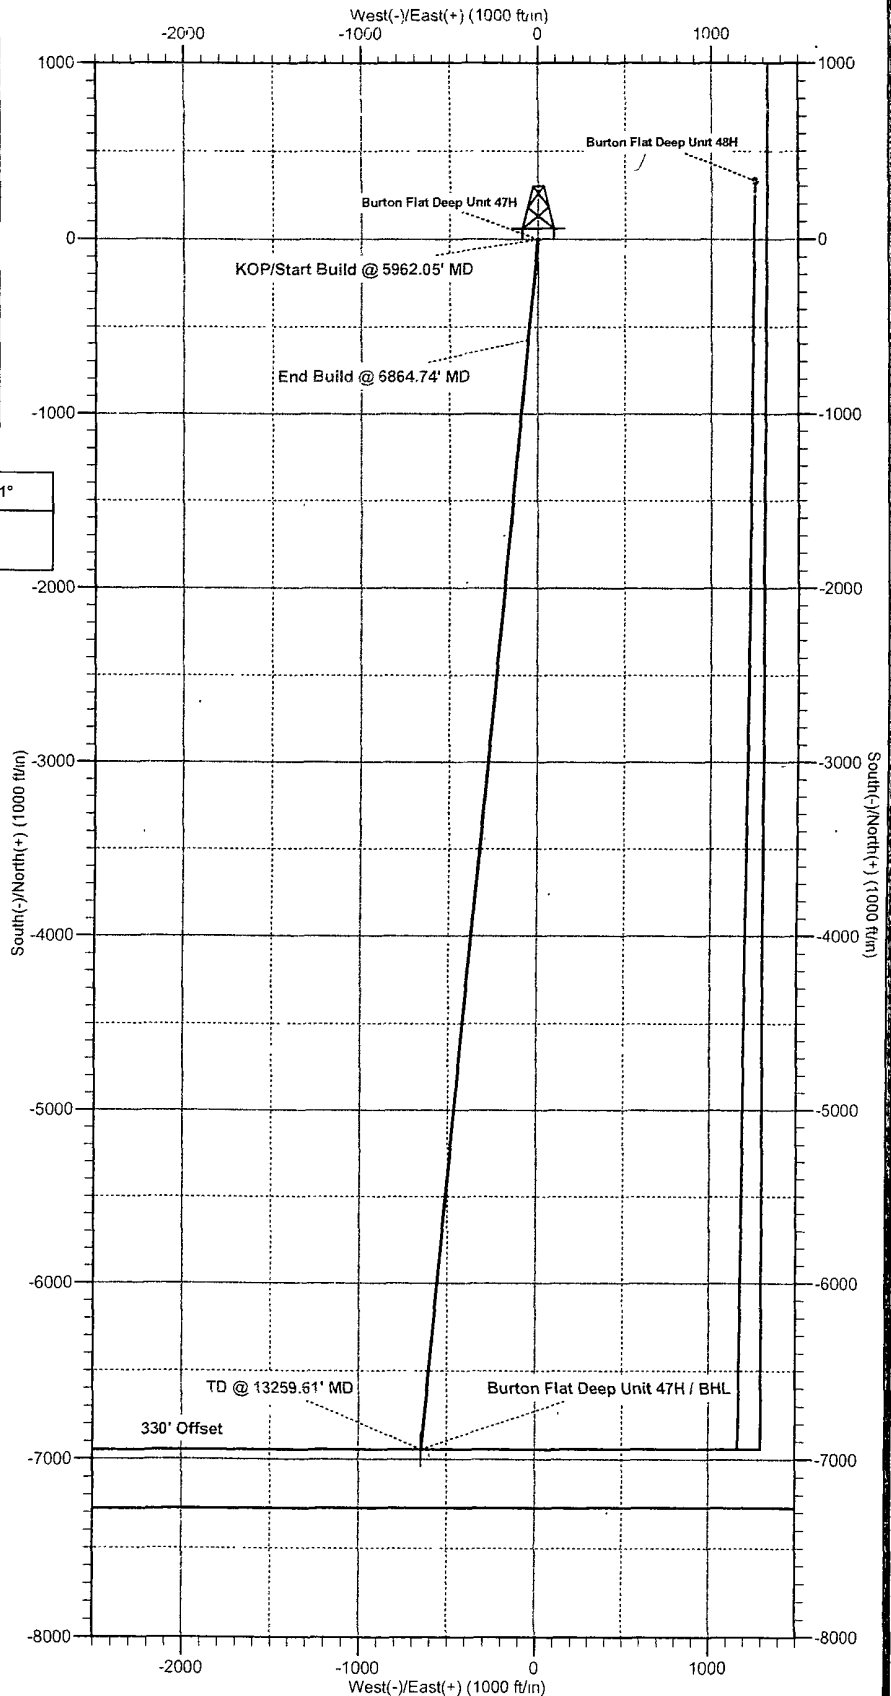


Standard Survey

Company: Devon Energy Corporation
 Project: Eddy County
 Site: Burton Flat Deep Unit
 Well: Burton Flat Deep Unit 47H
 Wellbore: Wellbore #1
 Design/Survey: Plan #2
 North Reference Gnd


MD ft	Inc °	Azi (Gnd) °	TVDSS ft	TVD ft	N/S ft	E/W ft	Northings ft	Eastings ft	DLS °/100ft	V Sec ft
0 00	0 00	0 00	-3249 00	0 00	0 00	0.00	561188 23	588697.47	0 00	0 00
100 00	0 00	0 00	-3149 00	100 00	0 00	0 00	561188 23	588697 47	0 00	0 00
200 00	0 00	0 00	-3049 00	200 00	0 00	0 00	561188 23	588697 47	0 00	0 00
300 00	0 00	0 00	-2949 00	300 00	0 00	0 00	561188 23	588697 47	0 00	0 00
400 00	0 00	0 00	-2849 00	400 00	0 00	0 00	561188 23	588697 47	0 00	0 00
500 00	0 00	0 00	-2749 00	500 00	0 00	0 00	561188 23	588697 47	0 00	0 00
600 00	0 00	0 00	-2649 00	600 00	0 00	0 00	561188 23	588697.47	0 00	0 00
700 00	0 00	0 00	-2549 00	700 00	0 00	0 00	561188 23	588697 47	0 00	0 00
800 00	0 00	0 00	-2449 00	800 00	0 00	0 00	561188 23	588697 47	0 00	0 00
900 00	0 00	0 00	-2349 00	900 00	0 00	0 00	561188 23	588697 47	0 00	0 00
1000 00	0 00	0 00	-2249 00	1000 00	0 00	0 00	561188 23	588697 47	0 00	0 00
1100 00	0 00	0 00	-2149 00	1100 00	0 00	0 00	561188 23	588697 47	0 00	0 00
1200 00	0 00	0 00	-2049 00	1200 00	0 00	0 00	561188 23	588697.47	0 00	0 00
1300 00	0 00	0 00	-1949 00	1300 00	0 00	0 00	561188 23	588697 47	0 00	0 00
1400 00	0 00	0 00	-1849 00	1400 00	0 00	0 00	561188 23	588697 47	0 00	0 00
1500 00	0 00	0 00	-1749 00	1500 00	0 00	0 00	561188 23	588697 47	0 00	0 00
1600 00	0 00	0 00	-1649 00	1600 00	0 00	0 00	561188 23	588697 47	0 00	0 00
1700 00	0 00	0 00	-1549 00	1700 00	0 00	0 00	561188 23	588697 47	0 00	0 00
1800 00	0 00	0 00	-1449 00	1800 00	0 00	0 00	561188 23	588697 47	0 00	0 00
1900 00	0 00	0 00	-1349 00	1900 00	0 00	0 00	561188 23	588697 47	0 00	0 00
2000 00	0 00	0 00	-1249 00	2000 00	0 00	0 00	561188 23	588697 47	0 00	0 00
2100 00	0 00	0 00	-1149 00	2100 00	0 00	0 00	561188 23	588697 47	0 00	0 00
2200 00	0 00	0 00	-1049 00	2200 00	0 00	0 00	561188 23	588697 47	0 00	0 00
2300 00	0 00	0 00	-949 00	2300 00	0 00	0 00	561188 23	588697 47	0 00	0 00
2400 00	0 00	0 00	-849 00	2400 00	0 00	0 00	561188 23	588697 47	0 00	0 00
2500 00	0 00	0 00	-749 00	2500 00	0 00	0 00	561188 23	588697.47	0 00	0 00
2600 00	0 00	0 00	-649 00	2600 00	0 00	0 00	561188 23	588697 47	0 00	0 00
2700 00	0 00	0 00	-549 00	2700 00	0 00	0 00	561188 23	588697 47	0 00	0 00
2800 00	0 00	0 00	-449 00	2800 00	0 00	0 00	561188 23	588697 47	0 00	0 00
2900 00	0 00	0 00	-349 00	2900 00	0 00	0 00	561188 23	588697 47	0 00	0 00
3000 00	0 00	0 00	-249 00	3000 00	0 00	0 00	561188 23	588697 47	0 00	0 00
3100 00	0 00	0 00	-149 00	3100 00	0 00	0 00	561188 23	588697 47	0 00	0 00
3200 00	0 00	0 00	-49 00	3200 00	0 00	0 00	561188 23	588697 47	0 00	0 00
3300 00	0 00	0 00	51 00	3300 00	0 00	0 00	561188 23	588697 47	0 00	0 00
3400 00	0 00	0 00	151 00	3400 00	0 00	0 00	561188 23	588697 47	0 00	0 00
3500 00	0 00	0 00	251 00	3500 00	0 00	0 00	561188 23	588697 47	0 00	0 00
3600 00	0 00	0 00	351 00	3600 00	0 00	0 00	561188 23	588697 47	0 00	0 00
3700 00	0 00	0 00	451 00	3700 00	0 00	0 00	561188 23	588697 47	0 00	0 00
3800 00	0 00	0 00	551 00	3800 00	0 00	0 00	561188 23	588697 47	0 00	0 00
3900 00	0 00	0 00	651 00	3900 00	0 00	0 00	561188 23	588697 47	0 00	0 00
4000 00	0 00	0 00	751 00	4000 00	0 00	0 00	561188 23	588697.47	0 00	0 00
4100 00	0 00	0 00	851 00	4100 00	0 00	0 00	561188 23	588697 47	0 00	0 00
4200 00	0 00	0 00	951 00	4200 00	0 00	0 00	561188 23	588697 47	0 00	0 00
4300 00	0 00	0 00	1051 00	4300 00	0 00	0 00	561188 23	588697 47	0 00	0 00
4400 00	0 00	0 00	1151 00	4400 00	0 00	0 00	561188 23	588697.47	0 00	0 00
4500 00	0 00	0 00	1251 00	4500 00	0 00	0 00	561188 23	588697 47	0 00	0 00
4600 00	0 00	0 00	1351 00	4600 00	0 00	0 00	561188 23	588697 47	0 00	0 00
4700 00	0 00	0 00	1451 00	4700 00	0 00	0 00	561188 23	588697 47	0 00	0 00
4800 00	0 00	0 00	1551 00	4800 00	0 00	0 00	561188 23	588697 47	0 00	0 00
4900 00	0 00	0 00	1651 00	4900 00	0 00	0 00	561188 23	588697 47	0 00	0 00
5000 00	0 00	0 00	1751 00	5000 00	0 00	0 00	561188 23	588697 47	0 00	0 00
5100 00	0 00	0 00	1851 00	5100 00	0 00	0 00	561188 23	588697 47	0 00	0 00
5200 00	0 00	0 00	1951 00	5200 00	0 00	0 00	561188 23	588697 47	0 00	0 00
5300 00	0 00	0 00	2051 00	5300 00	0 00	0 00	561188 23	588697 47	0 00	0 00
5400 00	0 00	0 00	2151 00	5400 00	0 00	0 00	561188 23	588697 47	0 00	0 00
5500 00	0 00	0 00	2251 00	5500 00	0 00	0 00	561188 23	588697 47	0 00	0 00
5600 00	0 00	0 00	2351 00	5600 00	0 00	0 00	561188 23	588697 47	0 00	0 00
5700 00	0 00	0 00	2451 00	5700 00	0 00	0 00	561188 23	588697 47	0 00	0 00
5800 00	0 00	0 00	2551 00	5800 00	0 00	0 00	561188 23	588697 47	0 00	0 00
5900 00	0 00	0 00	2651 00	5900 00	0 00	0 00	561188 23	588697 47	0 00	0 00
5962 05	0 00	0 00	2713 05	5962 05	0 00	0 00	561188 23	588697 47	0 00	0 00
6000 00	3 80	185 29	2750 97	5999 97	-1 25	-0 12	561186 98	588697 35	10 00	1 26
6050 00	8 80	185 29	2800 66	6049 66	-6 71	-0 62	561181 52	588696 85	10 00	6 74
6100 00	13 80	185 29	2849 67	6098 67	-16.46	-1 52	561171 77	588695 95	10 00	16 53
6150 00	18 80	185 29	2897 65	6146 65	-30 42	-2 82	561157 81	588694 65	10 00	30 55

6200 00	23 80	185 29	2944 22	6193 22	-48.50	-4 49	561139 73	588692 98	10 00	48 70
6250 00	28 80	185 29	2989.03	6238 03	-70 55	-6 54	561117 69	588690 93	10 00	70 85
6300 00	33 80	185 29	3031 74	6280 74	-96 40	-8 93	561091 83	588688 54	10 00	96 81
6350 00	38 80	185 29	3072 03	6321 03	-125 86	-11 66	561062 37	588685.81	10 00	126 40
6400 00	43 80	185 29	3109 58	6358 58	-158 71	-14 70	561029 52	588682 77	10 00	159 39
6450.00	48.80	185 29	3144 12	6393 12	-194 69	-18 04	560993 54	588679 43	10 00	195 52
6500 00	53 80	185 29	3175 37	6424 37	-233 53	-21 63	560954 70	588675 84	10 00	234 53
6550 00	58.80	185 29	3203 11	6452 11	-274.93	-25 47	560913.30	588672 00	10 00	276.11
6600 00	63 80	185.29	3227.12	6476 12	-318 58	-29 51	560869.65	588667 96	10 00	319 95
6650 00	68.80	185 29	3247.21	6496 21	-364.16	-33 74	560824 07	588663.73	10 00	365.72
6700 00	73.80	185.29	3263.24	6512 24	-411.30	-38 10	560776 93	588659 37	10 00	413 06
6750 00	78 80	185 29	3275 09	6524 09	-459 65	-42 58	560728 58	588654 89	10 00	461 62
6800 00	83 80	185 29	3282 65	6531 65	-508 85	-47 14	560679 38	588650.33	10.00	511 03
6850.00	88 80	185 29	3285 88	6534.88	-558.52	-51 74	560629 71	588645 73	10 00	560 91
6864 74	90 27	185 29	3286 00	6535 00	-573.19	-53.10	560615 04	588644 37	10 00	575 65
6900 00	90 27	185 29	3285 84	6534 84	-608 30	-56.36	560579 93	588641 12	0.00	610 91
7000 00	90 27	185 29	3285 37	6534 37	-707 88	-65 58	560480 36	588631 89	0 00	710 91
7100 00	90 27	185 29	3284 90	6533 90	-807.45	-74 80	560380 78	588622 67	0 00	810 91
7200 00	90 27	185.29	3284 43	6533 43	-907 02	-84 03	560281 21	588613 44	0 00	910 90
7300 00	90 27	185.29	3283.96	6532 96	-1006.59	-93 25	560181 64	588604 22	0 00	1010 90
7400.00	90 27	185 29	3283 49	6532 49	-1106 17	-102 48	560082.07	588594 99	0 00	1110 90
7500 00	90 27	185 29	3283 02	6532 02	-1205 74	-111 70	559982 49	588585.77	0.00	1210 90
7600 00	90 27	185 29	3282 55	6531 55	-1305 31	-120 93	559882 92	588576.54	0 00	1310 90
7700 00	90 27	185 29	3282 08	6531 08	-1404 88	-130 15	559783 35	588567 32	0 00	1410 90
7800 00	90 27	185 29	3281 61	6530 61	-1504 46	-139 38	559683 77	588558 09	0 00	1510 90
7900 00	90 27	185 29	3281.14	6530 14	-1604.03	-148 60	559584.20	588548 87	0 00	1610 90
8000 00	90.27	185 29	3280 68	6529 68	-1703 60	-157 83	559484 63	588539 64	0 00	1710 90
8100 00	90 27	185 29	3280 21	6529 21	-1803 17	-167 05	559385 06	588530.42	0 00	1810.89
8200 00	90 27	185 29	3279.74	6528 74	-1902 75	-176 28	559285.48	588521 19	0 00	1910 89
8300 00	90.27	185 29	3279.27	6528 27	-2002 32	-185 50	559185 91	588511 97	0 00	2010 89
8400.00	90 27	185.29	3278 80	6527 80	-2101.89	-194 73	559086.34	588502 75	0 00	2110 89
8500 00	90 27	185 29	3278 33	6527 33	-2201 46	-203 95	558986 77	588493 52	0 00	2210 89
8600 00	90 27	185 29	3277.86	6526 86	-2301 04	-213 17	558887 19	588484 30	0 00	2310 89
8700 00	90 27	185 29	3277 39	6526 39	-2400 61	-222 40	558787 62	588475 07	0 00	2410 89
8800 00	90 27	185 29	3276 92	6525 92	-2500.18	-231 62	558688.05	588465 85	0 00	2510 89
8900 00	90 27	185 29	3276 45	6525 45	-2599.75	-240 85	558588 48	588456 62	0 00	2610 89
9000 00	90 27	185 29	3275.98	6524 98	-2699 33	-250 07	558488 90	588447 40	0 00	2710 88
9100 00	90 27	185 29	3275.51	6524 51	-2798 90	-259 30	558389 33	588438.17	0 00	2810 88
9200 00	90.27	185 29	3275 05	6524 05	-2898 47	-268 52	558289 76	588428 95	0 00	2910 88
9300 00	90 27	185 29	3274 58	6523 58	-2998 04	-277 75	558190 19	588419 72	0 00	3010 88
9400 00	90 27	185 29	3274.11	6523 11	-3097 62	-286 97	558090 61	588410 50	0 00	3110 88
9500 00	90 27	185 29	3273 64	6522 64	-3197 19	-296 20	557991.04	588401 27	0 00	3210 88
9600 00	90 27	185 29	3273 17	6522 17	-3296 76	-305 42	557891 47	588392.05	0 00	3310 88
9700 00	90.27	185 29	3272 70	6521 70	-3396 33	-314 65	557791 90	588382 82	0 00	3410 88
9800 00	90 27	185 29	3272 23	6521 23	-3495 91	-323 87	557692 32	588373 60	0 00	3510 88
9900 00	90 27	185.29	3271 76	6520 76	-3595 48	-333 10	557592.75	588364 37	0 00	3610 87
10000 00	90 27	185 29	3271 29	6520 29	-3695 05	-342 32	557493.18	588355 15	0 00	3710 87
10100 00	90.27	185 29	3270 82	6519 82	-3794 62	-351 55	557393 61	588345 93	0 00	3810 87
10200 00	90 27	185 29	3270 35	6519 35	-3894 20	-360 77	557294 03	588336 70	0 00	3910 87
10300 00	90 27	185 29	3269 88	6518 88	-3993 77	-369 99	557194.46	588327 48	0 00	4010 87
10400 00	90 27	185 29	3269 42	6518 42	-4093 34	-379 22	557094.89	588318.25	0 00	4110 87
10500 00	90 27	185 29	3268 95	6517 95	-4192.91	-388 44	556995 32	588309 03	0 00	4210 87
10600 00	90 27	185 29	3268.48	6517 48	-4292 49	-397 67	556895 74	588299 80	0 00	4310 87
10700 00	90 27	185 29	3268 01	6517 01	-4392 06	-406 89	556796 17	588290 58	0 00	4410 87
10800 00	90 27	185 29	3267 54	6516 54	-4491.63	-416 12	556696 60	588281 35	0 00	4510 86
10900 00	90 27	185 29	3267 07	6516 07	-4591 20	-425 34	556597 03	588272 13	0 00	4610 86
11000 00	90 27	185 29	3266 60	6515 60	-4690 78	-434 57	556497 45	588262 90	0 00	4710 86
11100 00	90 27	185 29	3266 13	6515 13	-4790.35	-443 79	556397.88	588253 68	0 00	4810 86
11200 00	90 27	185 29	3265 66	6514.66	-4889 92	-453 02	556298 31	588244 45	0 00	4910 86
11300 00	90 27	185 29	3265 19	6514 19	-4989 49	-462 24	556198 74	588235.23	0 00	5010 86
11400 00	90 27	185 29	3264 72	6513.72	-5089 07	-471 47	556099.16	588226 00	0 00	5110 86
11500 00	90 27	185 29	3264 26	6513 26	-5188.64	-480 69	555999 59	588216 78	0 00	5210 86
11600 00	90 27	185 29	3263 79	6512 79	-5288 21	-489 92	555900 02	588207 55	0 00	5310 86
11700 00	90 27	185 29	3263 32	6512 32	-5387 78	-499 14	555800 45	588198 33	0 00	5410 85
11800 00	90 27	185 29	3262 85	6511 85	-5487 36	-508 37	555700 87	588189 11	0 00	5510 85
11900 00	90 27	185 29	3262 38	6511 38	-5586 93	-517 59	555601 30	588179 88	0 00	5610 85
12000 00	90 27	185 29	3261 91	6510 91	-5686 50	-526 81	555501.73	588170 66	0 00	5710 85
12100 00	90 27	185 29	3261 44	6510 44	-5786 07	-536 04	555402.16	588161 43	0 00	5810 85
12200 00	90 27	185 29	3260 97	6509 97	-5885 65	-545 26	555302 58	588152 21	0 00	5910.85
12300 00	90.27	185 29	3260 50	6509 50	-5985 22	-554 49	555203 01	588142 98	0 00	6010 85
12400 00	90 27	185 29	3260 03	6509.03	-6084 79	-563 71	555103.44	588133 76	0 00	6110 85
12500 00	90 27	185 29	3259.56	6508 56	-6184 36	-572 94	555003.87	588124 53	0 00	6210 85
12600 00	90.27	185 29	3259.09	6508 09	-6283 94	-582 16	554904 29	588115 31	0 00	6310 85
12700 00	90 27	185 29	3258 63	6507 63	-6383 51	-591 39	554804.72	588106 08	0 00	6410 84
12800 00	90 27	185 29	3258 16	6507 16	-6483 08	-600 61	554705.15	588096 86	0 00	6510 84
12900 00	90 27	185 29	3257 69	6506 69	-6582 65	-609 84	554605 58	588087 63	0 00	6610 84
13000 00	90 27	185 29	3257 22	6506 22	-6682 23	-619 06	554506 00	588078 41	0 00	6710 84
13100 00	90 27	185 29	3256 75	6505 75	-6781 80	-628 29	554406 43	588069 18	0 00	6810 84
13200 00	90 27	185 29	3256 28	6505 28	-6881 37	-637 51	554306.86	588059 96	0 00	6910 84
13259 61	90 27	185 29	3256 00	6505 00	-6940 73	-643 01	554247 50	588054.46	0 00	6970 45

20" 2K Annular

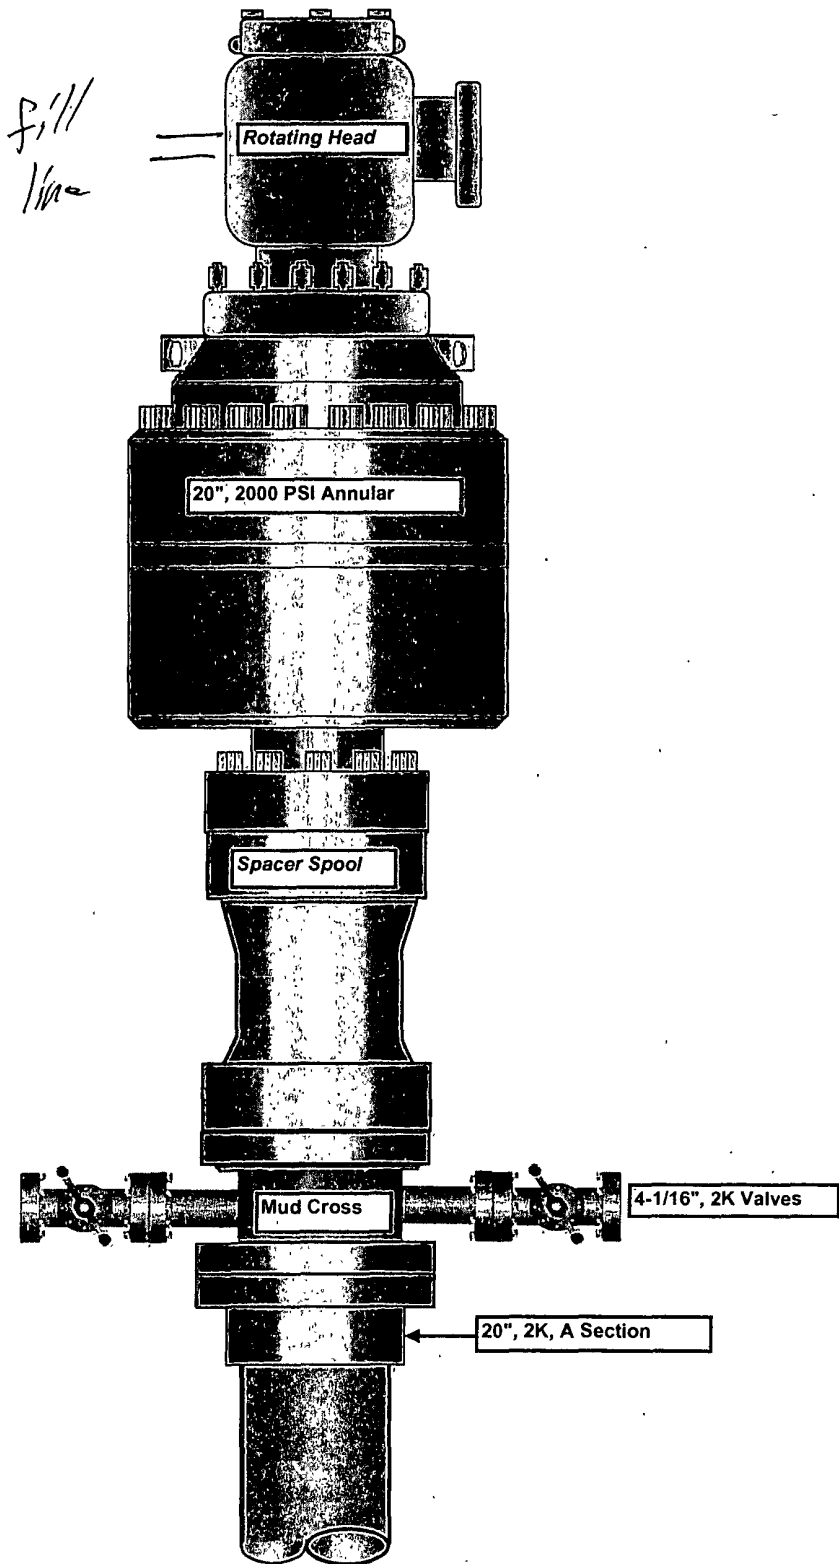

13-5/8" x 3,000 psi BOP Stack

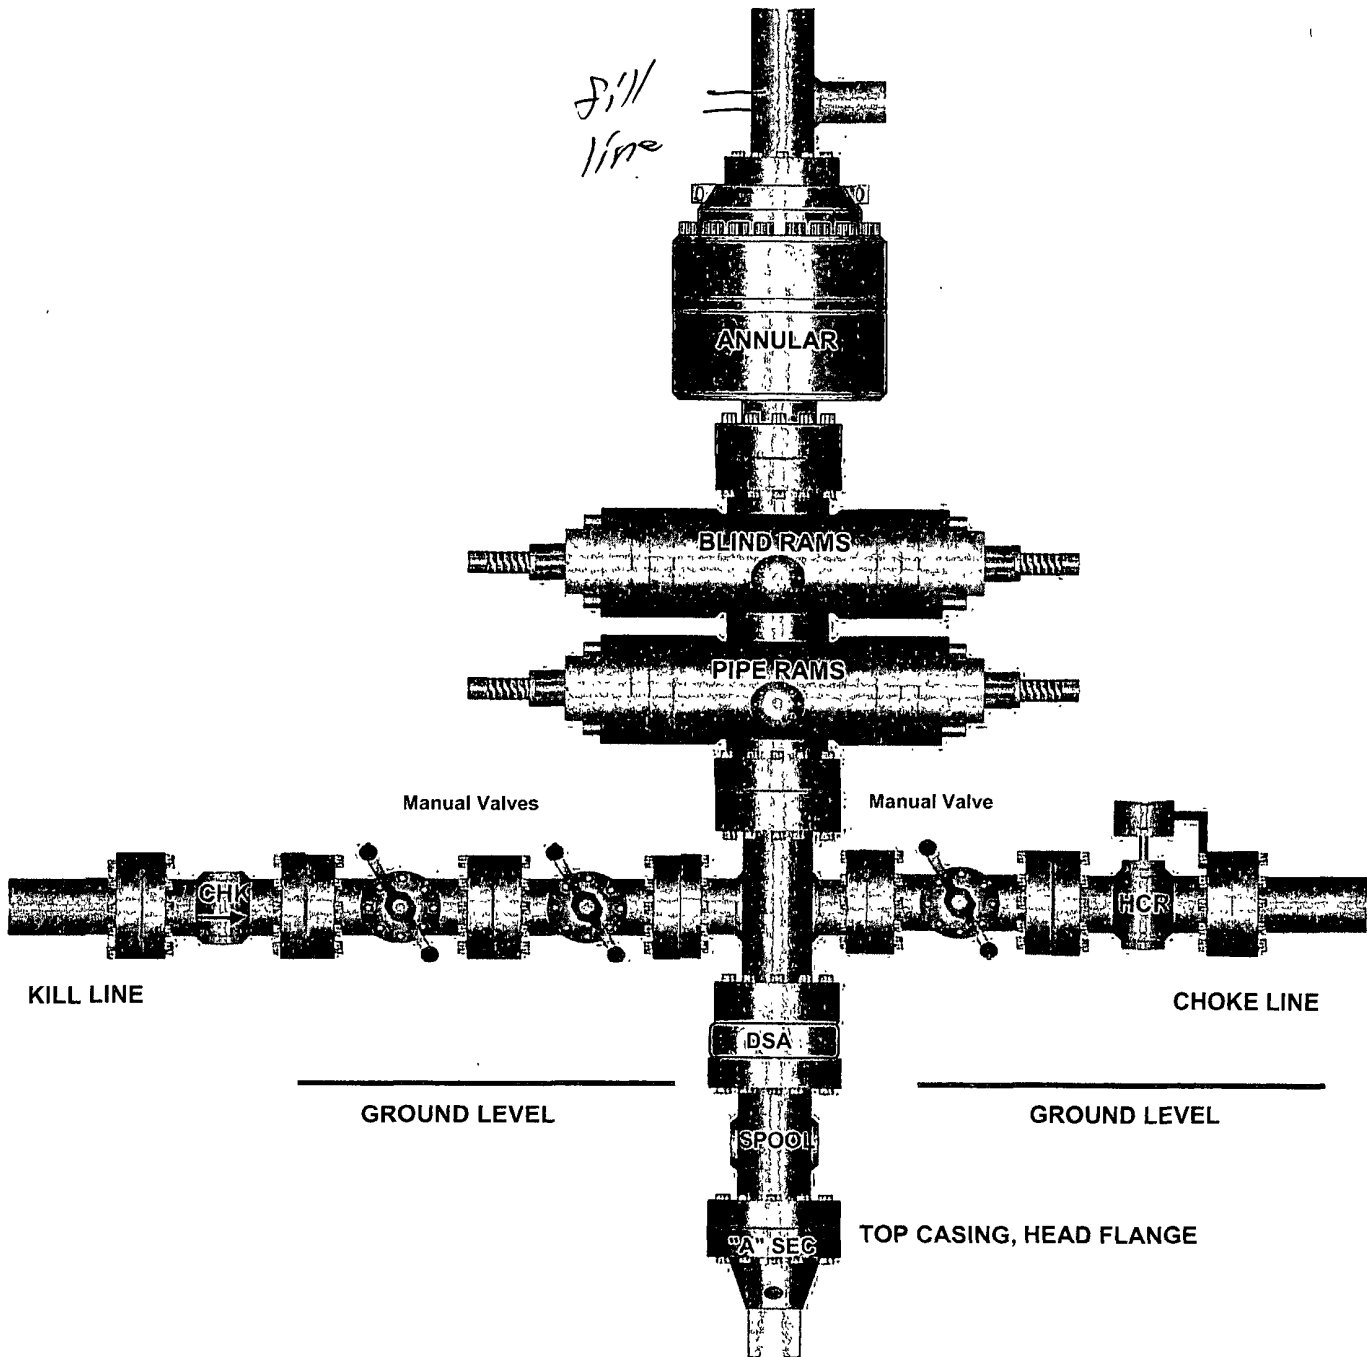


Attachment to Exhibit #1
NOTES REGARDING BLOWOUT PREVENTERS
Devon Energy Production Company, LP
Burton Flat Deep Unit 47H

Surface Location: 1980' FSL & 1650' FEL, Unit J, Sec 28 T20S R28E, Eddy, NM
Bottom hole Location: 330' FSL & 2275' FEL, Unit O, Sec 33 T20S R28E, Eddy, NM

1. Drilling nipple will be constructed so it can be removed mechanically without the aid of a welder. The minimum internal diameter will equal BOP bore.
2. Wear ring will be properly installed in head.
3. Blowout preventer and all associated fittings will be in operable condition to withstand a minimum 3000 psi working pressure.
4. All fittings will be flanged.
5. A full bore safety valve tested to a minimum 3000 psi WP with proper thread connections will be available on the rotary rig floor at all times.
6. All choke lines will be anchored to prevent movement.
7. All BOP equipment will be equal to or larger in bore than the internal diameter of the last casing string.
8. Will maintain a kelly cock attached to the kelly.
9. Hand wheels and wrenches will be properly installed and tested for safe operation.
10. Hydraulic floor control for blowout preventer will be located as near in proximity to driller's controls as possible.
11. All BOP equipment will meet API standards and include a minimum 40 gallon accumulator having two independent means of power to initiate closing operation.

13-5/8" 3M BOPE & Closed Loop Equipment Schematic

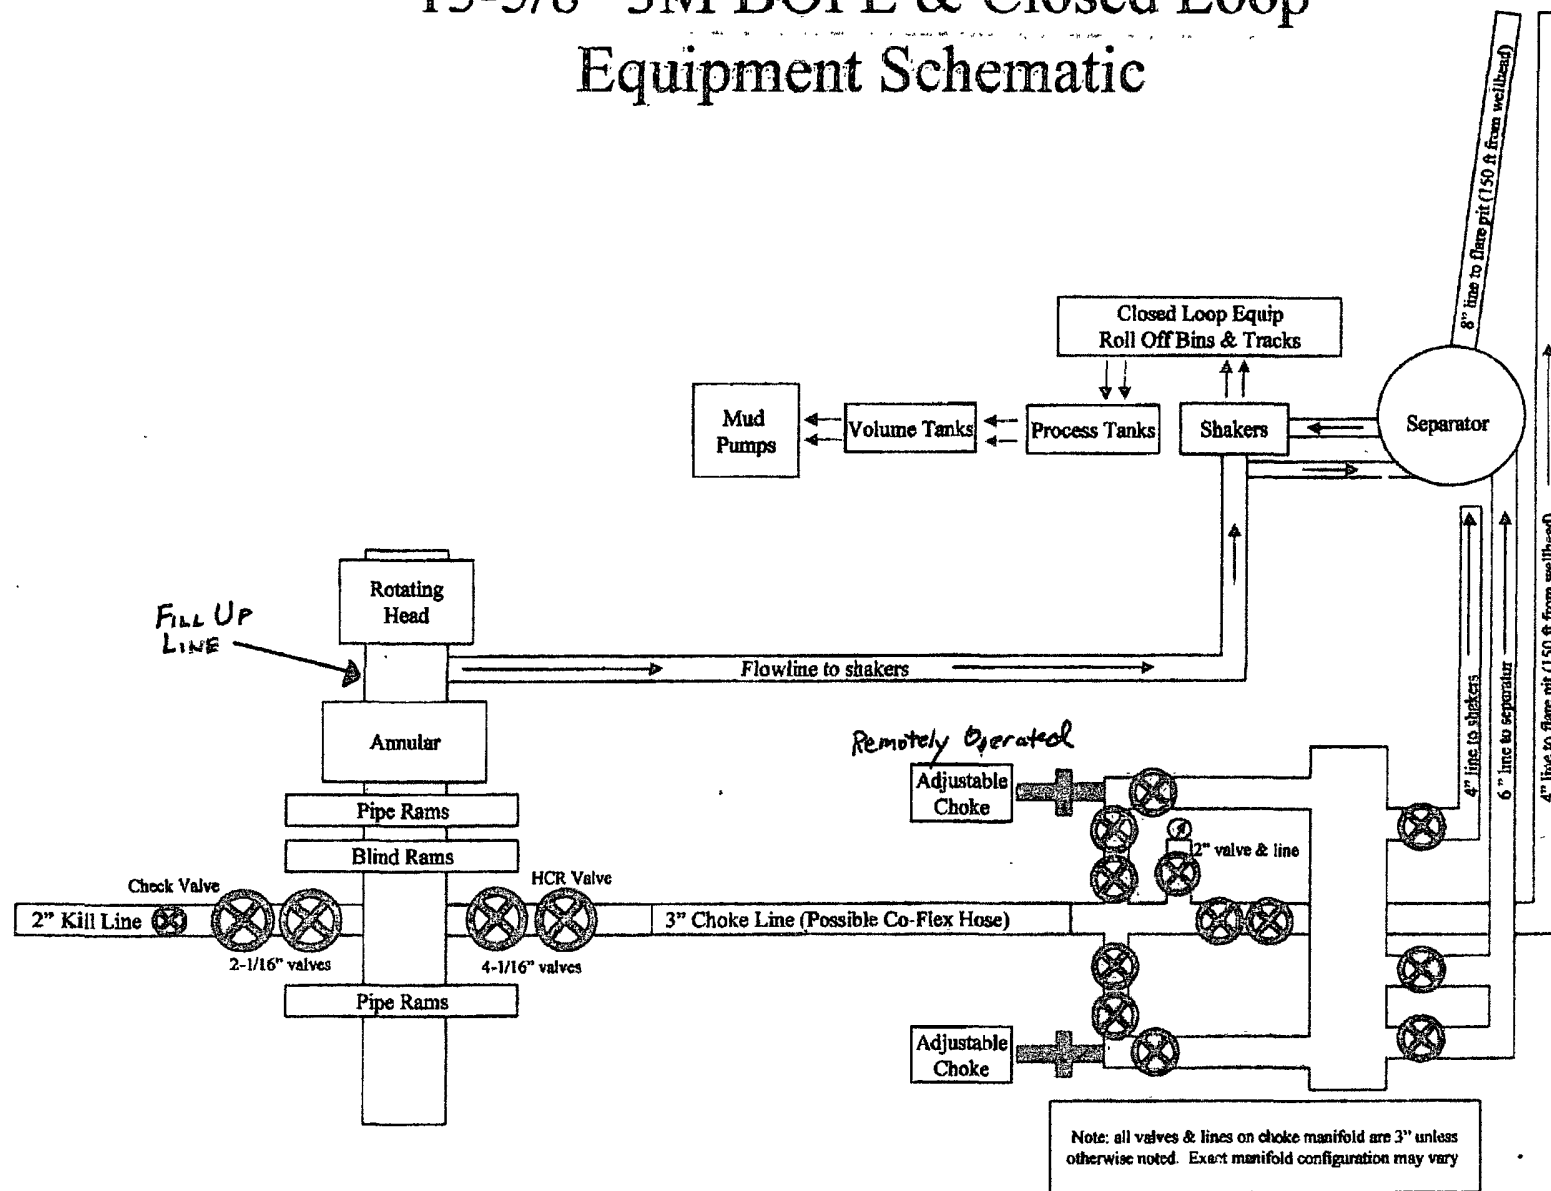



QUALITY DOCUMENT

**PHOENIX RUBBER
INDUSTRIAL LTD.**

H-6728 Szeged, Budapesti út 10. Hungary • H-6701 Szeged, P. O. Box 152
Phone: (3662) 568-737 • Fax: (3662) 568-738

SALES & MARKETING: H-1092 Budapest, Ráday u. 42-44. Hungary • H-1440 Budapest, P. O. Box 26
Phone: (361) 456-4200 • Fax: (361) 217-2972, 456-4273 • www.taurusermerge.hu

QUALITY CONTROL INSPECTION AND TEST CERTIFICATE				CERT N° 890	
PURCHASER: Phoenix Beattie Co				P.O. N° 1520FA-872	
PHOENIX ORDER N° 172232		HOSE TYPE: 3" ID Choke and Kill Hose			
HOSE SERIAL N° 34403		NOMINAL / ACTUAL LENGTH: 11,43 m			
W.P. 68,96 MPa 10000 psi		T.P. 103,4 MPa 15000 psi		Duration: 60 min.	
Pressure test with water at ambient temperature					
See attachment. (1 page)					
↑ 10 mm = 10 Min. → 10 mm = 16 MPa					
COUPLINGS					
Type	Serial N°		Quality	Heat N°	
3" coupling with 4 1/16" Flange end	1231/a 1228		AISI 4130	80751	
			AISI 4130	47438	
API Spec 16 C Temperature rate: "B"					
All metal parts are flawless					
WE CERTIFY THAT THE ABOVE HOSE HAS BEEN MANUFACTURED IN ACCORDANCE WITH THE TERMS OF THE ORDER AND PRESSURE TESTED AS ABOVE WITH SATISFACTORY RESULT.					
Date: 20. June. 2002.	Inspector		Quality Control PHOENIX RUBBER Industrial Ltd. Hose Inspection and Certification Dept.		

VERIFIED TRUE COPY
PHOENIX RUBBER O.C.

[illegible]

PHOENIX RUBBER
Industrial Ltd.
Hose Inspection and
Certification Dept.

VERIFIED TRUE COPY
PHOENIX RUBBER Q.C.



Fluid Technology

ContiTech Beattie Corp.
Website: www.contitechbeattie.com

Monday, June 14, 2010

RE: Drilling & Production Hoses
Lifting & Safety Equipment

To Helmerich & Payne,

A Continental ContiTech hose assembly can perform as intended and suitable for the application regardless of whether the hose is secured or unsecured in its configuration. As a manufacturer of High Pressure Hose Assemblies for use in Drilling & Production, we do offer the corresponding lifting and safety equipment, this has the added benefit of easing the lifting and handling of each hose assembly whilst affording hose longevity by ensuring correct handling methods and procedures as well as securing the hose in the unlikely event of a failure; but in no way does the lifting and safety equipment affect the performance of the hoses providing the hoses have been handled and installed correctly. It is good practice to use lifting & safety equipment but not mandatory.


Should you have any questions or require any additional information/clarifications then please do not hesitate to contact us.

ContiTech Beattie is part of the Continental AG Corporation and can offer the full support resources associated with a global organization.

Best regards,

Robin Hodgson
Sales Manager
ContiTech Beattie Corp

ContiTech Beattie Corp,
11535 Brittmoore Park Drive,
Houston, TX 77041
Phone: +1 (832) 327-0141
Fax: +1 (832) 327-0148
www.contitechbeattie.com



I. Design Plan

Devon uses various high efficient closed loop systems (CLS). The CLS shown is designed to maintain drill solids at or below 5%. The equipment is arranged to progressively remove solids from the largest to the smallest size. Drilling fluids can thus be reused and savings is realized on mud and disposal costs. Dewatering may be required with the centrifuges to insure removal of ultra fine solids.

The drilling location is constructed to allow storm water to flow to a central sump normally the cellar. This insures no contamination leaves the drilling pad in the event of a spill. Storm water is reused in the mud system or stored in a reserve fluid tank farm until it can be reused. All lubricants, oils, or chemicals are removed immediately from the ground to prevent the contamination of storm water. An oil trap is normally installed on the sump if an oil spill occurs during a storm.

A tank farm is utilized to store drilling fluids including fresh water and brine fluids. The tank farm is constructed on a 20 ml plastic lined, bermed pad to prevent the contamination of the drilling site during a spill. Fluids from other sites may be stored in these tanks for processing by the solids control equipment and reused in the mud system. At the end of the well the fluids are transported from the tank farm to an adjoining well or to the next well for the rig.

Prior to installing a closed-loop system on site, the topsoil, if present, will be stripped and stockpiled for use as the final cover or fill at the time of closure.

Signs will be posted on the fence surrounding the closed-loop system unless the closed-loop system is located on a site where there is an existing well, that is operated by Devon.


II. Operations and Maintenance Plan

Primary Shakers: The primary shakers make the first removal of drill solids from the drilling mud as it leaves the well bore. The shakers are sized to handle maximum drilling rate at optimal screen size. The shakers normally remove solids down to 74 microns.

Mud Cleaner: The Mud Cleaner cleans the fluid after it leaves the shakers. A set of hydrocyclones are sized to handle 1.25 to 1.5 times the maximum circulating rate. This ensures all the fluid is being processed to an average cut point of 25 microns. The wet discharged is dewatered on a shaker equipped with ultra fine mesh screens and generally cut at 40 microns.



Closed Loop Schematic

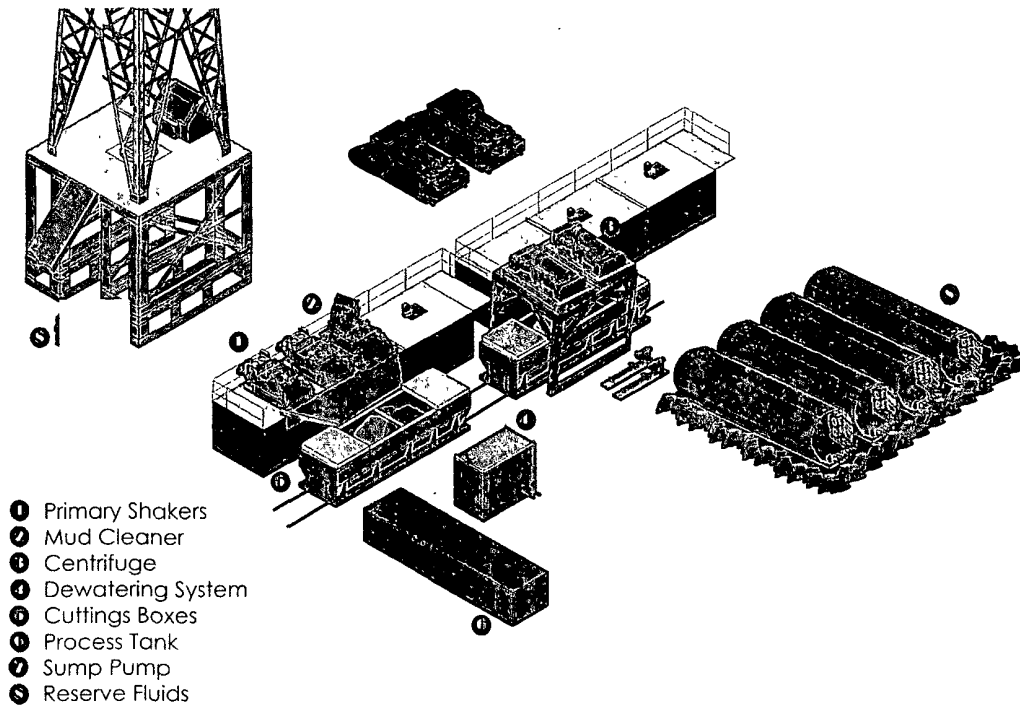

Centrifuges: The centrifuges can be utilized depending on the well's anticipated solids volume. One or two centrifuges can be used depending on the well geometry or depth of well. The centrifuges are sized to maintain low gravity solids at 5% or below. They may or may not need a dewatering system to enhance the removal rates. The centrifuges can make a cut point of 8-10 microns depending on bowl speed, feed rate, solids loading and other factors.

The centrifuge system is designed to work on the active system and be flexible to process incoming fluids from other locations. This set-up is also dependant on well factors.

Dewatering System: The dewatering system is a chemical mixing and dosing system designed to enhance the solids removal of the centrifuge. Not commonly used in shallow wells. It may contain pH adjustment, coagulant mixing and dosing, and polymer mixing and dosing. Chemical flocculation binds

ultra fine solids into a mass that is within the centrifuge operating design. The dewatering system improves the centrifuge cut point to infinity or allows for the return of clear water or brine fluid. This ability allows for the ultimate control of low gravity solids.

Cuttings Boxes: Cuttings boxes are utilized to capture drill solids that are discarded from the solids control equipment. These boxes are set upon a rail system that allows for the removal and replacement of a full box of cuttings with an empty one. They are equipped with a cover that insures no product is spilled into the environment during the transportation phase.

Process Tank: (Optional) The process tank allows for the holding and process of fluids that are being transferred into the mud system. Additionally, during times of lost circulation the process tank may hold active fluids that are removed for additional treatment. It can further be used as a mixing tank during well control conditions.

Sump and Sump Pump: The sump is used to collect storm water and the pump is used to transfer this fluid to the active system or to the tank for to hold in reserve. It can also be used to collect fluids that may escape during spills. The location contains drainage ditches that allow the location fluids to drain to the sump.

Reserve Fluids (Tank Farm): A series of frac tanks are used to replace the reserve pit. These are steel tanks that are equipped with a manifold system and a transfer pump. These tanks can contain any number of fluids used during the drilling process. These can include fresh water, cut brine, and saturated salt fluid. The fluid can be from the active well or reclaimed fluid from other locations. A 20 ml liner and berm system is employed to ensure the fluids do not migrate to the environment during a spill.

If a leak develops, the appropriate division district office will be notified within 48 hours of the discovery and the leak will be addressed. Spill prevention is accomplished by maintaining pump packing, hoses, and pipe fittings to insure no leaks are occurring. During an upset condition the source of the spill is isolated and repaired as soon as it is discovered. Free liquid is removed by a diaphragm pump and returned to the mud system. Loose topsoil may be used to stabilize the spill and the contaminated soil is excavated and placed in the cuttings boxes. After the well is finished and the rig has moved, the entire location is scrapped and testing will be performed to determine if a release has occurred.

All trash is kept in a wire mesh enclosure and removed to an approved landfill when full. All spent motor oils are kept in separate containers and they are removed and sent to an approved recycling center. Any spilled lubricants, pipe

dope, or regulated chemicals are removed from soil and sent to landfills approved for these products.

These operations are monitored by Solids Control service technicians. Daily logs are maintained to ensure optimal equipment operation and maintenance. Screen and chemical use is logged to maintain inventory control. Fluid properties are monitored and recorded and drilling mud volumes are accounted for in the mud storage farm. This data is kept for end of well review to insure performance goals are met. Lessons learned are logged and used to help with continuous improvement.

III. Closure Plan

A maximum 170' X 170' caliche pad is built per well. All of the trucks and steel tanks fit on this pad. All fluid cuttings go to the steel tanks to be hauled by various trucking companies to an agency approved disposal.



**Devon Energy Corporation
20 North Broadway
Oklahoma City, Oklahoma 73102-8260**

Hydrogen Sulfide (H₂S) Contingency Plan

For

Burton Flat Deep Unit 47H



**Sec-28, T-20S R-28E
1980' FSL & 1650' FEL,
LAT. = 32.5426701°N (NAD83)
LONG = 104.1796413°W**

Eddy County NM

RECEIVED
2012 MAR 11 PM 2:27
BUREAU OF LAND MGMT
CARLSBAD FIELD OFFICE

Burton Flat Deep Unit 47H

This is an open drilling site. H₂S monitoring equipment and emergency response equipment will be used within 500' of zones known to contain H₂S, including warning signs, wind indicators and H₂S monitor.

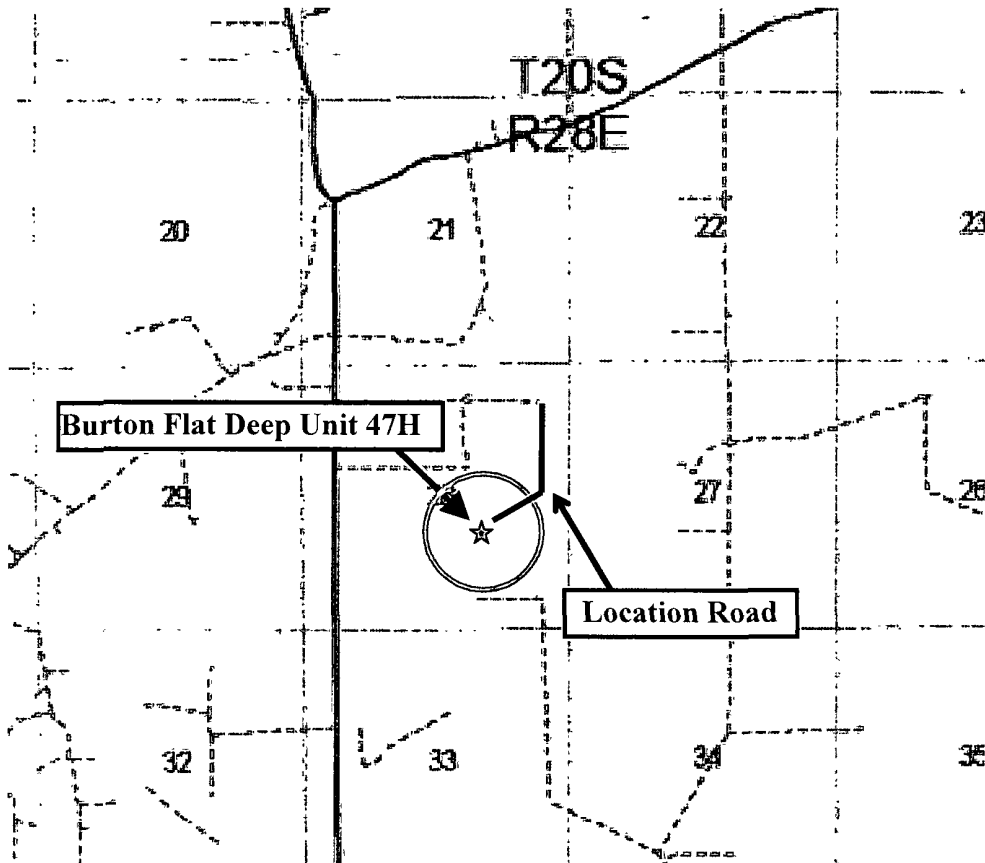

**Assumed 100 ppm ROE = 3000' (Radius of Exposure)
100 ppm H₂S concentration shall trigger activation of this plan.**

Escape

Crews shall escape upwind of escaping gas in the event of an emergency release of gas. Escape can be facilitated from the location entrance road, North on lease road. Crews should then block entrance to the location from the lease road so as not to allow anyone traversing into a hazardous area. The blockade should be at a safe distance outside of the ROE. There are no homes or buildings in or near the ROE. There are dwellings approximately two miles South from the wellsite. Steps should be taken, in the case of a gas release, to warn and protect those properties.

Assumed 100 ppm ROE = 3000'

100 ppm H₂S concentration shall trigger activation of this plan.

Emergency Procedures

In the event of a release of gas containing H₂S, the first responder(s) must

- Isolate the area and prevent entry by other persons into the 100 ppm ROE.
- Evacuate any public places encompassed by the 100 ppm ROE.
- Be equipped with H₂S monitors and air packs in order to control the release.
- Use the “buddy system” to ensure no injuries occur during the response
- Take precautions to avoid personal injury during this operation.
- Contact operator and/or local officials to aid in operation. See list of phone numbers attached.
- Have received training in the
 - Detection of H₂S, and
 - Measures for protection against the gas,
 - Equipment used for protection and emergency response.

Ignition of Gas Source

Should control of the well be considered lost and ignition considered, take care to protect against exposure to Sulfur Dioxide (SO₂). Intentional ignition must be coordinated with the NMOCD and local officials. Additionally the NM State Police may become involved. NM State Police shall be the Incident Command on scene of any major release. Take care to protect downwind whenever there is an ignition of the gas

Characteristics of H₂S and SO₂

Common Name	Chemical Formula	Specific Gravity	Threshold Limit	Hazardous Limit	Lethal Concentration
Hydrogen Sulfide	H ₂ S	1.189 Air = 1	10 ppm	100 ppm/hr	600 ppm
Sulfur Dioxide	SO ₂	2.21 Air = 1	2 ppm	N/A	1000 ppm

Contacting Authorities

Devon Energy Corp. personnel must liaison with local and state agencies to ensure a proper response to a major release. Additionally, the OCD must be notified of the release as soon as possible but no later than 4 hours. Agencies will ask for information such as type and volume of release, wind direction, location of release, etc. Be prepared with all information available. The following call list of essential and potential responders has been prepared for use during a release. Devon Energy Corp. Company response must be in coordination with the State of New Mexico’s ‘Hazardous Materials Emergency Response Plan’ (HMER)

Hydrogen Sulfide Drilling Operation Plan

I. HYDROGEN SULFIDE (H₂S) TRAINING

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on this well:

1. The hazards and characteristics of hydrogen sulfide (H₂S)
2. The proper use and maintenance of personal protective equipment and life support systems.
3. The proper use of H₂S detectors, alarms, warning systems, briefing areas, evacuation procedures, and prevailing winds.
4. The proper techniques for first aid and rescue procedures.

In addition, supervisory personnel will be trained in the following areas:

1. The effects of H₂S metal components. If high tensile tubular are to be used, personnel will be trained in their special maintenance requirements.
2. Corrective action and shut-in procedures when drilling or reworking a well and blowout prevention and well control procedures.
3. The contents and requirements of the H₂S Drilling Operations Plan and Public Protection Plan.

There will be an initial training session just prior to encountering a known or probable H₂S zone (within 3 days or 500 feet) and weekly H₂S and well control drills for all personnel in each crew. The initial training session shall include a review of the site specific H₂S Drilling Operations Plan and the Public Protection Plan.

II. HYDROGEN SULFIDE TRAINING

Note: All H₂S safety equipment and systems will be installed, tested, and operational when drilling reaches a depth of 500 feet above, or three days prior to penetrating the first zone containing or reasonable expected to contain H₂S.

1. Well Control Equipment

- A. Flare line
- B. Choke manifold
- C. Blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit
- D. Auxiliary equipment may include if applicable: annular preventer and rotating head.

2. Protective equipment for essential personnel:

- A. 30-minute SCBA units located in the doghouse and at briefing areas, as indicated on well site diagram. As it may be difficult to communicate audibly while wearing these units, hand signals shall be utilized.

3. H₂S detection and monitoring equipment:

- A. Portable H₂S monitors positioned on location for best coverage and response. These units have warning lights and audible sirens when H₂S levels of 20 PPM are reached. These units are usually capable of detecting SO₂, which is a byproduct of burning H₂S.

4. Visual warning systems:

- A. Wind direction indicators as shown on well site diagram
- B. Caution/ Danger signs shall be posted on roads providing direct access to locations. Signs will be painted a high visibility yellow with black lettering of sufficient size to be reasonable distance from the immediate location. Bilingual signs will be used when appropriate..

5. Mud program:

- A. The mud program has been designed to minimize the volume of H₂S circulated to surface. Proper mud weight, safe drilling practices and the use of H₂S scavengers will minimize hazards when penetrating H₂S bearing zones.

6. Metallurgy:

- A. All drill strings, casings, tubing, wellhead, blowout preventer, drilling spool, kill lines, choke manifold lines, and valves shall be H₂S trim.
- B. All elastomers used for packing and seals shall be H₂S trim.

7. Communication:

- A. Radio communications in company vehicles including cellular telephones and 2-way radio
- B. Land line (telephone) communications at Office

8. Well testing:

- A. Drill stem testing will be performed with a minimum number of personnel in the immediate vicinity, which are necessary to safety and adequately conduct the test. The drill stem testing will be conducted during daylight hours and formation fluids will not be flowed to the surface. All drill-stem-testing operations conducted in an H₂S environment will use the closed chamber method of testing.
- B. There will be no drill stem testing.

Devon Energy Corp. Company Call List

<u>Artesia (575)</u>	<u>Cellular</u>	<u>Office</u>	<u>Home</u>
Foreman – Robert Bell.....	748-7448	748-0178.....	746-2991
Asst. Foreman –Tommy Polly.....	748-5290.....	748-0165.....	748-2846
Don Mayberry.....	748-5235	748-0164.....	746-4945
Montral Walker.....	390-5182	748-0193.....	936-414-6246
Engineer – Marcos Ortiz.....	(405) 317-0666....	(405) 552-8152....	(405) 381-4350

Agency Call List

<u>Lea</u>	<u>Hobbs</u>
<u>County</u>	State Police
<u>(575)</u>	City Police
	Sheriff's Office.....
	Ambulance.....
	Fire Department.....
	LEPC (Local Emergency Planning Committee)
	NMOCD
	US Bureau of Land Management

<u>Eddy</u>	<u>Carlsbad</u>
<u>County</u>	State Police
<u>(575)</u>	City Police
	Sheriff's Office.....
	Ambulance.....
	Fire Department.....
	LEPC (Local Emergency Planning Committee).....
	US Bureau of Land Management
	New Mexico Emergency Response Commission (Santa Fe) ...
	24 HR
	National Emergency Response Center (Washington, DC) ..



Emergency Services

	Boots & Coots IWC
	Cudd Pressure Control.....
	Halliburton
	B. J. Services.....
<i>Give</i>	Flight For Life - Lubbock, TX
<i>GPS</i>	Aerocare - Lubbock, TX
<i>position:</i>	Med Flight Air Amb - Albuquerque, NM
	Lifeguard Air Med Svc. Albuquerque, NM

Prepared in conjunction with
Wade Rohloff



Devon Energy - Well Pad Rig Location Layout Safety Equipment Location

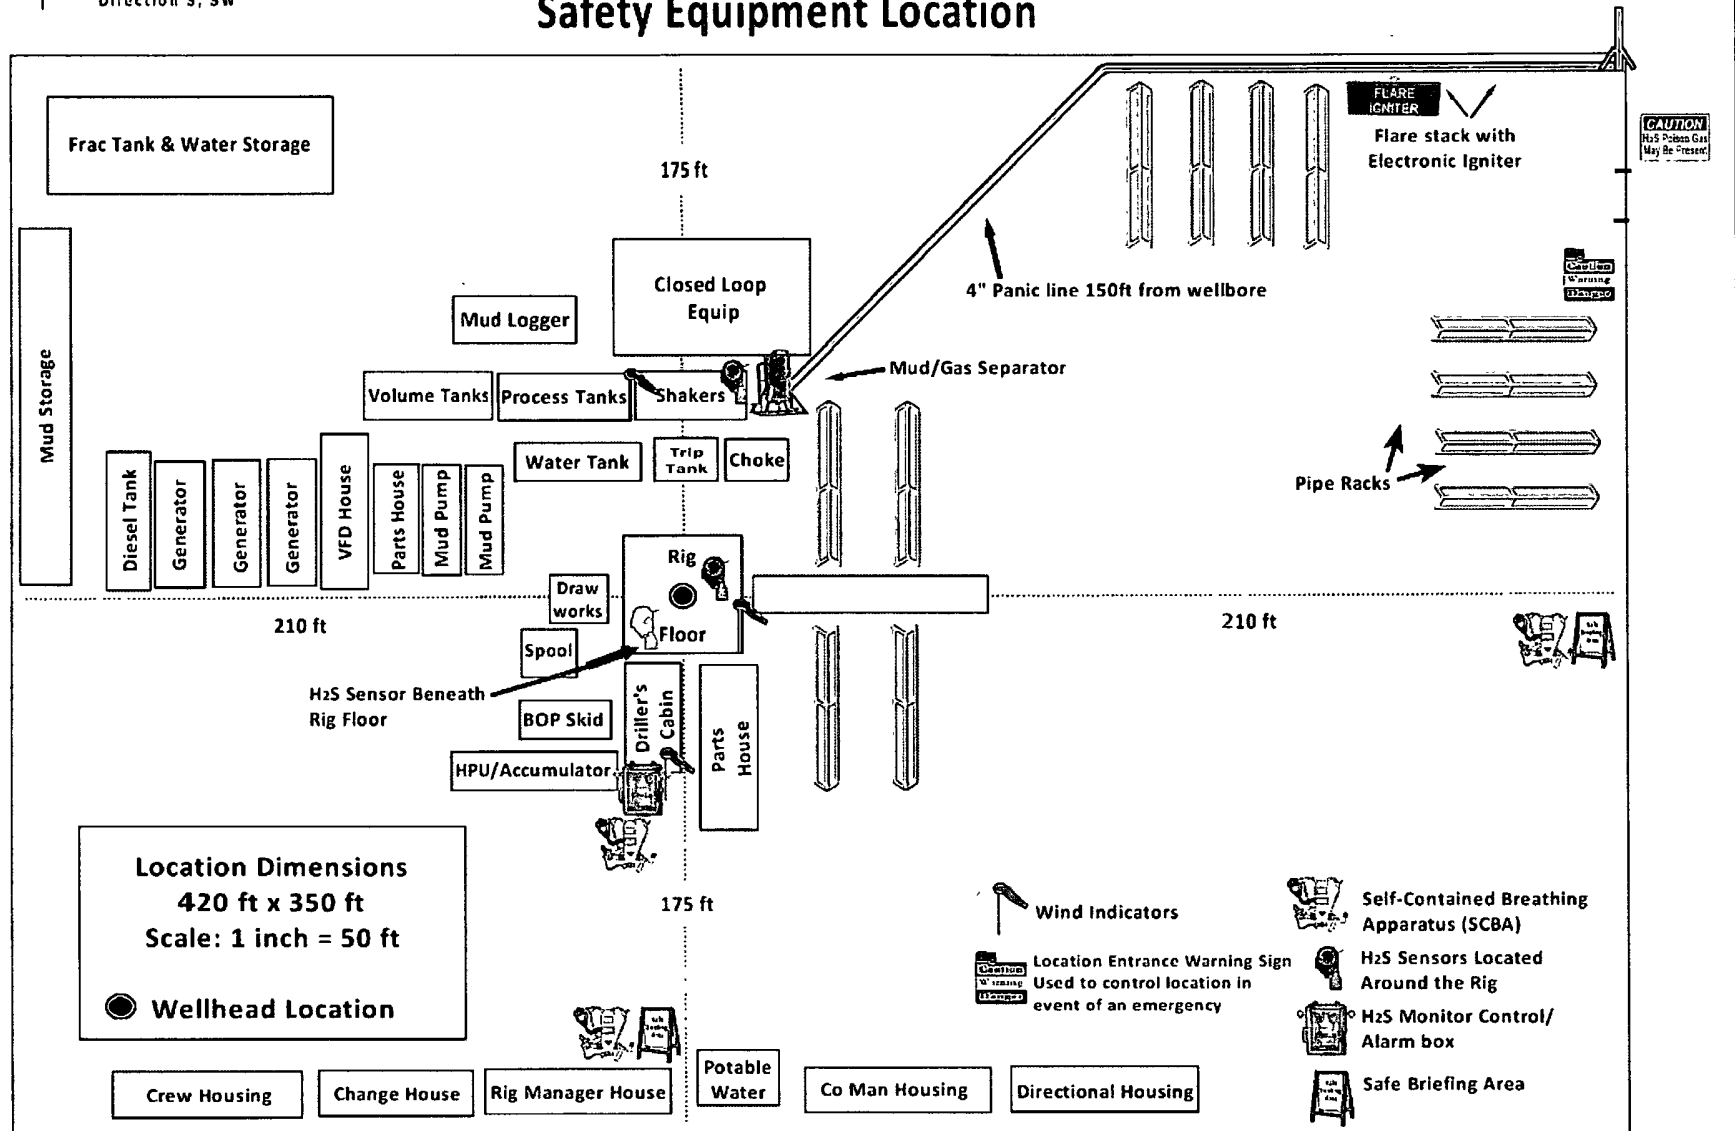



Proposed Interim Site Reclamation


Devon Energy Production Co.
Burton Flat Deep Unit #47
1980' FSL & 1650' FEL
Sec. 28-T20S-R28E
Eddy County, NM



Proposed
Reclamation
Area



Scale: 1in = 60ft.

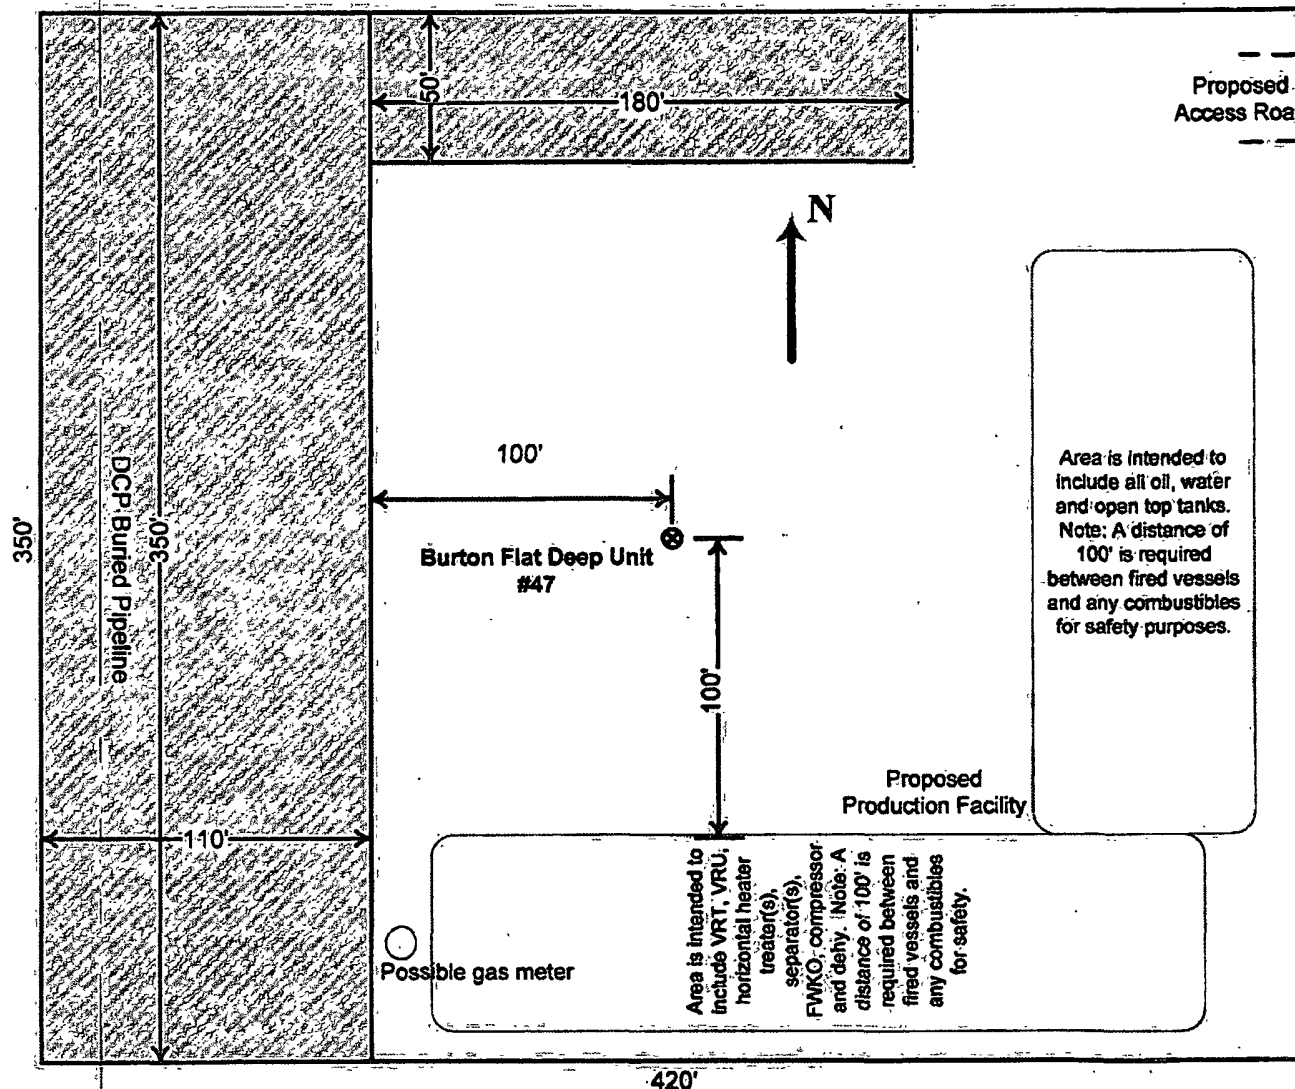

PECOS DISTRICT CONDITIONS OF APPROVAL

OPERATOR'S NAME:	DEVON ENERGY PRODUCTION COMPANY
LEASE NO.:	LC062254A
WELL NAME & NO.:	47H BURTON FLAT DEEP UNIT
SURFACE HOLE FOOTAGE:	1980' FSL & 1650' FEL
BOTTOM HOLE FOOTAGE:	330' FSL & 2275' FEL
LOCATION:	Section 28, T.20 S., R.28 E., NMPM
COUNTY:	Eddy County, New Mexico

TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

- ☐ **General Provisions**
- ☐ **Permit Expiration**
- ☐ **Archaeology, Paleontology, and Historical Sites**
- ☐ **Noxious Weeds**
- ☒ **Special Requirements**
 - Cave/Karst
 - Commercial Well Determination
- ☒ **Construction**
 - Notification
 - Topsoil
 - Closed Loop System
 - Federal Mineral Material Pits
 - Well Pads
 - Roads
- ☐ **Road Section Diagram**
- ☒ **Drilling**
 - High Cave/Karst
 - Logging Requirements
 - Waste Material and Fluids
- ☐ **Production (Post Drilling)**
 - Well Structures & Facilities
 - Pipelines
 - Electric Lines
- ☐ **Interim Reclamation**
- ☐ **Final Abandonment & Reclamation**