


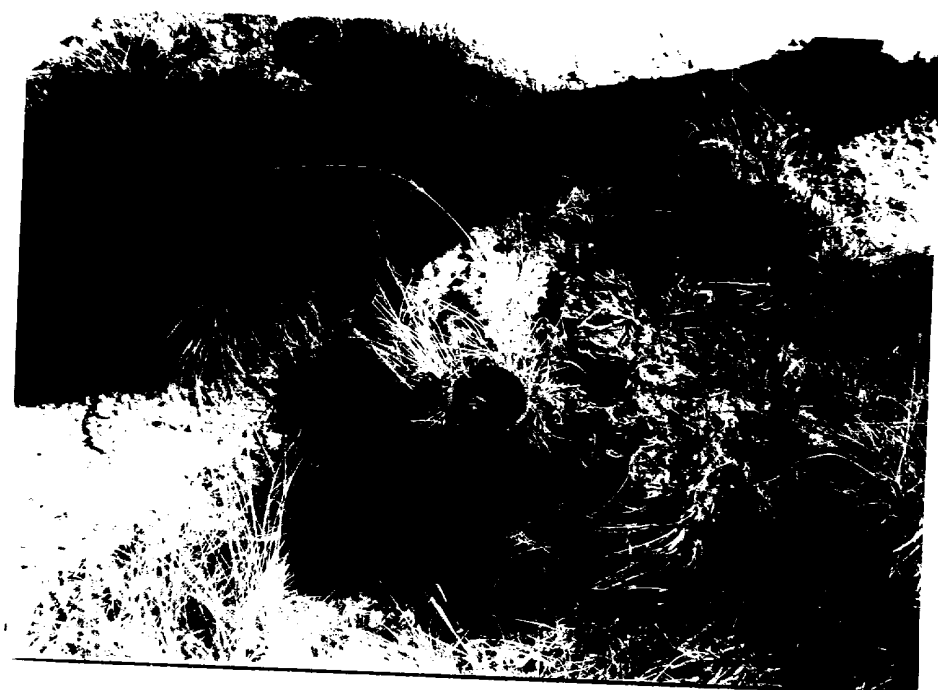

field bk

API NUMBER	30-031-05089	SUR CSG OD	8	cmt			cmt
OPERATOR NAME	Elmer L. White	SUR CSG TD	50	cmt			cmt
PROPERTY NAME	Walker Dome	SURF CSG WT	19	cmt			cmt
WELL NUMBER	2,	TOP OF CMT	0	cmt			cmt
SECTION	19,	ACTUAL		cmt			cmt
TOWNSHIP	16N	CACULATED	20sx	cmt			cmt
RANGE	09W			cmt	cmt	cmt	cmt
FOOTAGE	415' FNL 1040' FWL			cmt	cmt	cmt	cmt
FORMATION, TOP	TOPS TO ISOLATE	PROD CSG OD	4.5	cmt			cmt
		PROD CSG TD	812	cmt			cmt
		PROD CSG WT		cmt			cmt
		TOP OF CMT	330	cmt			cmt
		ACTUAL		cmt			cmt
		CACULATED	50sx	cmt			cmt
		PACKER		cmt			cmt
		PERF TOP	808	cmt			cmt
		PERF BOTTOM		cmt			cmt
TYPE OF PLUG	PLUG SET AT	OPEN HOLE	826				

PROPOSED PLUGGING OPERATION

Move in, Rig up Well Service Unit, Nipple down well head, Nipple up BOPE

PICK UP WORK STRING, Run in hole tag bottom

Load hole with fluid, spot 150' cement plug, woc and tag

pooh and perforate at 125'

Circulate cement to surface

INSTALL P&A MARKER

CLOSE PITS ACCORDING TO NMOCD GUIDELINES

CLEAN AND LEVEL LOCATION