**AFCullough**
CASING INSPECTION CO.

| | |
|---|---|
| Company | Pennzoil Co. |
| Well | Mesquite Ranch #1 |
| Field | Wildcat |
| County | Ector |
| State | Texas |
| Date | 10-2-84 |
| Run No. | One |
| Depth Driller | 1600' |
| Depth Logger | 1596' |
| Bottom Log Interval | 1596' |
| Top Log Interval | Surface |
| Casing Driller | 13 3/8" @ 1600' |
| Casing Logger | 1596' |
| Bit Size | 17 1/2" |
| Type Fluid in Hole | Brine |
| Dens. / Visc. | 10.0 / 28 |
| Max. Rec. Temp. | 90° F |
| Operating Rig Time | 5 Hrs. |
| Recorded By | Ray Gibbs |
| Witnessed By | Mr. Jim Ferguson |

| Equipment Data | | | | |
|---|---|---|---|---|
| | 1 | 2 | 3 | 4 |
| Main Cable | | | | |
| Tool Serial No. | 22-A-2-A | | | |
| Wall Thickness | 0.25" | | | |
| Body Length | 5'11" | | | |
| Max. Diameter | 4.5" | | | |
| Joint Length | 2'6" | | | |
| Max. Press. | 2000 | | | |
| Log Scale | 1:200 | | | |

Casing Data

| Size | Weight | Grade | Joints | Measured Depth | Wall Thickness Values Set |
|---|---|---|---|---|---|
| 9 5/8" | 43.5# | N-80 | 55 | 0 - 1596' | .0.395" 9 5/8" DSR CASING |

Mechanical Information

Remarks: Minimum Wall Thickness for 9 5/8" DSR Casing .395"

Main Gear
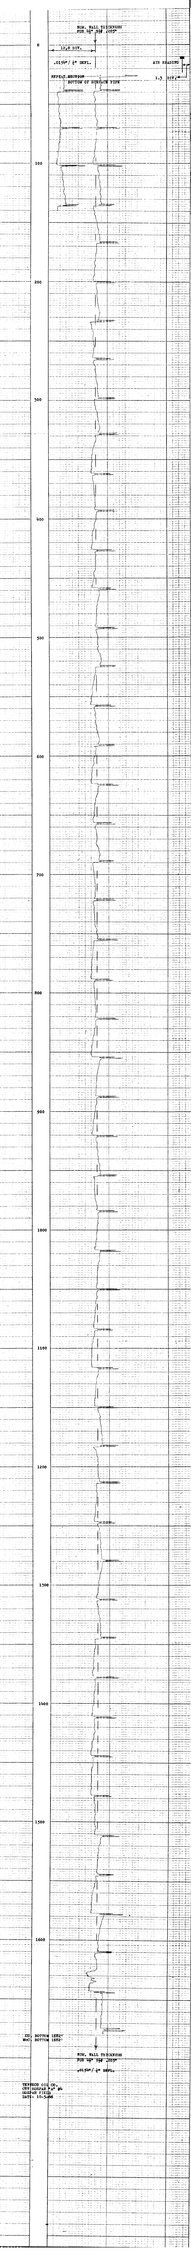
Casing Thickness