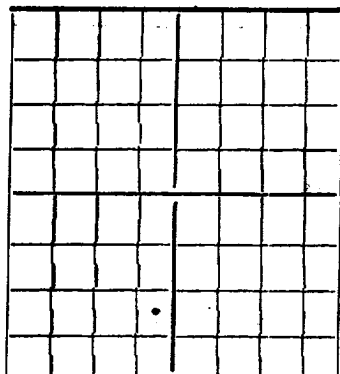


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

WELL RECORD

PETROLEUM PRODUCTS RFG. AND PRODUCING CO.

PREWITT, N.M.

Company or Operator

Address

SANTA FE
Lease

Well No.

46

in SE SW

of Sec. 1

T. 17N

R. 9W, N. M. P. M., Hesperia Field, McKinley County.

Well is 330 feet north of the Northline and 990 feet west of the Westline of SE SW

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is SANTA FE PACIFIC RR. CO. Address ALBUQUERQUE, N.M.

If Government land the permittee is Address

The Lessee is PETROLEUM PRODUCTS RFG. AND PRODUCING CO. Address PREWITT, N.M.

Drilling commenced December 8, 1945 Drilling was completed April 30, 1947

Name of drilling contractor PPR&PI Address Prewitt, N.M.

Elevation above sea level at top of casing 6690 feet.

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from to No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
5 1/2"	14 1/2	H 40	Hall	1642				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing April 20, 1947

The production of the first 24 hours was 100 barrels of fluid of which 100 % was oil; %

emulsion; 100 % water; and 100 % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

Clan Brooks, Driller, Driller

Cecil Romine, Driller, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Prewitt, N.M.

4/30/47

Subscribed and sworn to before me this 5th

day of April, 1947

Clarence Bellah

Notary Public.

Name PETROLEUM PRODUCTS RFG. AND PRODUCING CO.

Name

Position

President

Representing

PPR&PI

Company or Operator

My Commission expires May 7, 1950

Address

Prewitt, N.M.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	10	10	Top soil
10	47	37	Sand
47	101	54	Sand and shale
101	286	185	Sand and shale with coal beds
286	325	39	Shale and sand
325	332	7	Coal
332	430	98	Sandy shale
430	523	93	Shale - sand with coal streaks of iron
523	535	12	Sand
535	665	130	Shale - coal streaks
665	705	40	Sand and shale
705	741	36	Shale
741	863	122	Sandy Shale
863	924	61	Sand and shale
924	985	61	Shale
985	996	11	Shale
996	1065	69	Sandy shale
1065	1080	15	Sand
1080	1201	121	Sand - hard
1201	1218	17	Hard sand
1218	1223	5	Hard sand
1223	1242	19	Shale and sand
1242	1340	68	Sandy shale
1340	1406	66	Shale and sand
1406	1448	42	Shale
1448	1490	42	Shale
1490	1568	78	Shale
1568	1632	64	Shale
1632	1642	10	Shale
1642			Total Depth.