


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

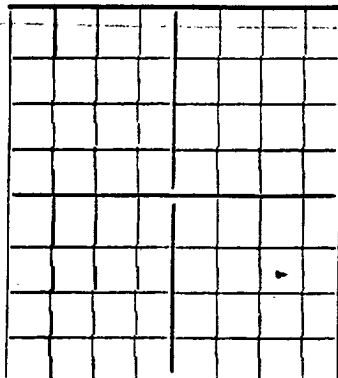

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). **SUBMIT IN TRIPPLICATE. FORM C-105 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.**

PETROLEUM PRODUCTS RFG. AND PRODUCING CO.

Company or Operator

PREWITT, NEW MEXICO

Address

State
Lease

Well No. 37 in SW 1/4 of Sec. 36, T. 18N

R. 9W, N. M. P. M., Hopah Field, McKinley County.

Well is 990 feet south of the Center line and 990 feet west of the East line of 1/4 Sec. 36

If State land the oil and gas lease is No. 1-662 Assignment No.

If patented land the owner is Address

If Government land the permittee is Address

The Lessee is PETROLEUM PRODS. RFG. AND PRODUCING CO., Address PREWITT, NEW MEXICO

Drilling commenced July 15, 1944 Drilling was completed August 13, 1944

Name of drilling contractor PETROLEUM PRODUCTS RFG. AND PRODUCING CO. PREWITT, N.M.

Elevation above sea level at top of casing 6772 feet.

The information given is to be kept confidential until August 31, 1944

OIL SANDS OR ZONES

No. 1, from to 1713 No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
5 1/2"	144	8-round	J & L	1710	Halliburton			

10117

MUDGING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED

PLUGS AND ADAPTERS

Heaving plug—Material..... Length..... Depth Set.....

Adapters—Material..... Size.....

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment.....

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 1718 feet, and from..... feet to..... feet

Cable tools were used from 1718 feet to 1730 feet, and from..... feet to..... feet

PRODUCTION

Put to producing August 13,....., 19 44.

The production of the first 24 hours was 33.05 barrels of fluid of which 93 % was oil;..... % emulsion; 7 % water; and..... % sediment. Gravity, Be 28

If gas well, cu. ft. per 24 hours..... Gallons gasoline per 1,000 cu. ft. of gas.....

Rock pressure, lbs. per sq. in.

EMPLOYEES

H. L. Thompson....., Driller....., Driller
....., Driller....., Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Prewitt, New Mexico 8-15-44
Place Date

Subscribed and sworn to before me this 15th
day of August, 19 44

Name.....
Position.....

Notary Public.

Representing PETROLEUM PRODUCTS MFG. AND PRODUCING CO.
Company or Operator

My Commission expires May 7, 1946

Address Prewitt, New Mexico

2142

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	75	75	Sand rock and shale
75	191	116	Sand rock and shale
191	425	234	Sandy shale
425	445	20	Broken shale
445	502	57	Sand
502	638	136	Sand and shale
638	822	184	Sand and shale
822	956	134	Sand and shale
956	1100	144	Sand and shale
1100	1213	113	Sand and shale
1213	1340	127	Sand and shale
1340	1440	100	Shale
1440	1497	57	Shale
1497	1568	71	Shale
1568	1635	67	Shale
1635	1713	78	Sandy shale -
1713	1718	5	Oil sand
1718	1730	12	Oil sand