

**NM OIL CONSERVATION**  
ARTESIA DISTRICT

**OCD Artesia**

**JUL 10 2017**

Form 3160-3  
(March 2012)

**SECRETARY'S POTASH**

**RECEIVED STATES**  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0137  
Expires October 31, 2014

**APPLICATION FOR PERMIT TO DRILL OR REENTER**

|   |  |   |
|---|--|---|
| 1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER  |  | 5. Lease Serial No.<br>NMNM89819  |
| 1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone  |  | 6. If Indian, Allottee or Tribe Name  |
| 2. Name of Operator<br>OXY USA INC 16696  |  | 7. If Unit or CA Agreement, Name and No.                                    |
| 3a. Address<br>5 Greenway Plaza, Suite 110 Houston TX 770   |  | 8. Lease Name and Well No. 317687<br>PALLADIUM MDP1-7-6 FEDERAL 4H          |
| 3b. Phone No. (include area code)<br>(713)366-5716  |  | 9. API Well No.<br>30-015-44295   |
| 4. Location of Well (Report location clearly and in accordance with any State requirements. *)<br>At surface NENW / 169 FNL / 2285 FWL / LAT 32.2241283 / LONG -103.8182774<br>At proposed prod. zone LOT 2 / 180 FNL / 2200 FEL / LAT 32.2531604 / LONG -103.8154618 |  | 10. Field and Pool, or Exploratory<br>COTTON DRAW BONE SPRING / 2ND I       |
| 14. Distance in miles and direction from nearest town or post office*<br>15 miles   |  | 11. Sec., T. R. M. or Blk. and Survey or Area<br>SEC 18 / T24S / R31E / NMP |
| 15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any)<br>50 feet  | 16. No. of acres in lease<br>647.88            | 12. County or Parish<br>EDDY  |
| 18. Distance from proposed location* to nearest well, drilling, completed, 30 feet applied for, on this lease, ft.  | 19. Proposed Depth<br>10048 feet / 20200 feet  | 13. State<br>NM   |
| 21. Elevations (Show whether DF, KDB, RT, GL, etc.)<br>3534 feet  | 20. BLM/BIA Bond No. on file<br>FED: ESB000226 |   |
| 22. Approximate date work will start*<br>01/13/2018   | 23. Estimated duration<br>25 days              |   |

**24. Attachments**

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, must be attached to this form:

- |  |   |
|--|---|
| 1. Well plat certified by a registered surveyor.   | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan.  | 5. Operator certification   |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the BLM.             |

|  |   |                    |
|--|---|--------------------|
| 25. Signature<br>(Electronic Submission)           | Name (Printed/Typed)<br>David Stewart / Ph: (713)366-5716 | Date<br>02/02/2017 |
| Title<br>Sr. Regulatory Advisor                    |   |                    |
| Approved by (Signature)<br>(Electronic Submission) | Name (Printed/Typed)<br>Cody Layton / Ph: (575)234-5959   | Date<br>07/03/2017 |
| Title<br>Supervisor Multiple Resources             |   |                    |
| Office<br>CARLSBAD                                 |   |                    |

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

\*(Instructions on page 2)

**APPROVED WITH CONDITIONS**

Rev 7.12.17

APD ID: 10400010929

Submission Date: 02/02/2017

Highlight

Operator Name: OXY USA INC

Federal/Indian APD: FED

All Changes

Well Name: PALLADIUM MDP1-7-6 FEDERAL COM

Well Number: 4H

Well Type: OIL WELL

Well Work Type: Drill

### Section 1 - General

APD ID: 10400010929

Tie to previous NOS?

Submission Date: 02/02/2017

BLM Office: CARLSBAD

User: David Stewart

Title: Sr. Regulatory Advisor

Federal/Indian APD: FED

Is the first lease penetrated for production Federal or Indian? FED

Lease number: NMNM89819

Lease Acres: 647.88

Surface access agreement in place?

Allotted?

Reservation:

Agreement in place? NO

Federal or Indian agreement:

Agreement number:

Agreement name:

Keep application confidential? NO

Permitting Agent? NO

APD Operator: OXY USA INC

Operator letter of designation:

Keep application confidential? NO

### Operator Info

Operator Organization Name: OXY USA INC

Operator Address: 5 Greenway Plaza, Suite 110

Zip: 77046

Operator PO Box:

Operator City: Houston

State: TX

Operator Phone: (713)366-5716

Operator Internet Address:

### Section 2 - Well Information

Well in Master Development Plan? EXISTING

Mater Development Plan name: Sand Dunes Area

Well in Master SUPO? NO

Master SUPO name:

Well in Master Drilling Plan? NO

Master Drilling Plan name:

Operator Name: OXY USA INC

Well Name: PALLADIUM MDP1-7-6 FEDERAL COM

Well Number: 4H

Well Name: PALLADIUM MDP1-7-6 FEDERAL COM

Well Number: 4H

Well API Number:

Field/Pool or Exploratory? Field and Pool

Field Name: COTTON DRAW  
BONE SPRING

Pool Name: 2ND BONE  
SPRING

Is the proposed well in an area containing other mineral resources? POTASH

Describe other minerals:

Is the proposed well in a Helium production area? N

Use Existing Well Pad? NO

New surface disturbance?

Type of Well Pad: MULTIPLE WELL

Multiple Well Pad Name:

Number: 3H

PALLADIUM MDP1-7-6

Well Class: HORIZONTAL

FEDERAL COM

Number of Legs:

Well Work Type: Drill

Well Type: OIL WELL

Describe Well Type:

Well sub-Type: INFILL

Describe sub-type:

Distance to town: 15 Miles

Distance to nearest well: 30 FT

Distance to lease line: 50 FT

Reservoir well spacing assigned acres Measurement: 320 Acres

Well plat: PalladiumMDP1-7-6FdCom4H\_C102\_02-02-2017.pdf

Well work start Date: 01/13/2018

Duration: 25 DAYS

### Section 3 - Well Location Table

Survey Type: RECTANGULAR

Describe Survey Type:

Datum: NAD83

Vertical Datum: NAVD88

Survey number:

|                  | NS-Foot | NS Indicator | EW-Foot  | EW Indicator | Twsp | Range | Section | Aliquot/Lot/Tract | Latitude       | Longitude            | County   | State             | Meridian          | Lease Type | Lease Number  | Elevation     | MD        | TVD       |
|------------------|---------|--------------|----------|--------------|------|-------|---------|-------------------|----------------|----------------------|----------|-------------------|-------------------|------------|---------------|---------------|-----------|-----------|
| SHL<br>Leg<br>#1 | 169     | FNL          | 228<br>5 | FWL          | 24S  | 31E   | 18      | Aliquot<br>NENW   | 32.22412<br>83 | -<br>103.8182<br>774 | EDD<br>Y | NEW<br>MEXI<br>CO | NEW<br>MEXI<br>CO | F          | NMNM<br>89819 | 353<br>4      | 0         | 0         |
| KOP<br>Leg<br>#1 | 50      | FSL          | 220<br>0 | FEL          | 24S  | 31E   | 7       | Aliquot<br>SWSE   | 32.22472<br>95 | -<br>103.8155<br>047 | EDD<br>Y | NEW<br>MEXI<br>CO | NEW<br>MEXI<br>CO | F          | NMNM<br>57273 | -<br>601<br>0 | 962<br>1  | 954<br>4  |
| PPP<br>Leg<br>#1 | 340     | FSL          | 220<br>0 | FEL          | 24S  | 31E   | 7       | Aliquot<br>SWSE   | 32.22552<br>67 | -<br>103.8155<br>035 | EDD<br>Y | NEW<br>MEXI<br>CO | NEW<br>MEXI<br>CO | F          | NMNM<br>57273 | -<br>648<br>3 | 104<br>19 | 100<br>17 |

Operator Name: OXY USA INC  
Well Name: PALLADIUM MDP1-7-6 FEDERAL COM

Well Number: 4H

| Operator Name: OXY USA INC                |         |              |         |              |      |       |         |                   |            |              |        |             |             |            |              |           |       |       |
|---|---------|--------------|---------|--------------|------|-------|---------|-------------------|------------|--------------|--------|-------------|-------------|------------|--------------|-----------|-------|-------|
| Well Name: PALLADIUM MDP1-7-6 FEDERAL COM |         |              |         |              |      |       |         |                   |            |              |        |             |             |            |              |           |       |       |
| Well Number: 4H                           |         |              |         |              |      |       |         |                   |            |              |        |             |             |            |              |           |       |       |
| EXIT Leg #1                               | NS-Foot | NS Indicator | EW-Foot | EW Indicator | Twsp | Range | Section | Aliquot/Lot/Tract | Latitude   | Longitude    | County | State       | Meridian    | Lease Type | Lease Number | Elevation | MD    | TVD   |
| BHL Leg #1                                | 180     | FNL          | 2200    | FEL          | 24S  | 31E   | 6       | Lot 2             | 32.2527205 | -103.8154624 | EDD Y  | NEW MEXI CO | NEW MEXI CO | F          | NMNM 82904   | -6513     | 20040 | 10047 |
| EXIT Leg #1                               | 340     | FNL          | 2200    | FEL          | 24S  | 31E   | 6       | Lot 2             | 32.2531604 | -103.8154618 | EDD Y  | NEW MEXI CO | NEW MEXI CO | F          | NMNM 82904   | -6514     | 20200 | 10048 |

## Section 1 - Geologic Formations

| Formation ID | Formation Name  | Elevation | True Vertical Depth | Measured Depth | Lithologies                        | Mineral Resources             |
|--------------|-----------------|-----------|---------------------|----------------|------------------------------------|-------------------------------|
| 17746        | RUSTLER         | 3534      | 591                 | 591            | SHALE, DOLOMITE, ANHYDRITE         | USEABLE WATER                 |
| 18574        | SALADO          | 2583      | 951                 | 951            | SHALE, DOLOMITE, HALITE, ANHYDRITE | OTHER : SALT                  |
| 17762        | CASTILE         | 673       | 2861                | 2861           | ANHYDRITE                          | OTHER : salt                  |
| 17719        | LAMAR           | -753      | 4287                | 4287           | LIMESTONE, SANDSTONE, SILTSTONE    | NATURAL GAS, OIL, OTHER BRINE |
| 15332        | BELL CANYON     | -799      | 4333                | 4333           | SANDSTONE, SILTSTONE               | NATURAL GAS, OIL, OTHER BRINE |
| 15316        | CHERRY CANYON   | -1580     | 5114                | 5124           | SANDSTONE, SILTSTONE               | NATURAL GAS, OIL, OTHER BRINE |
| 17713        | BRUSHY CANYON   | -2896     | 6430                | 6461           | LIMESTONE, SANDSTONE, SILTSTONE    | NATURAL GAS, OIL, OTHER BRINE |
| 17688        | BONE SPRING     | -4576     | 8110                | 8166           | LIMESTONE, SANDSTONE, SILTSTONE    | NATURAL GAS, OIL, OTHER BRINE |
| 15338        | BONE SPRING 1ST | -5612     | 9146                | 9218           | LIMESTONE, SANDSTONE, SILTSTONE    | NATURAL GAS, OIL, OTHER BRINE |
| 17737        | BONE SPRING 2ND | -5900     | 9434                | 9509           | LIMESTONE, SANDSTONE, SILTSTONE    | NATURAL GAS, OIL, OTHER BRINE |

## Section 2 - Blowout Prevention

Operator Name: OXY USA INC

Well Name: PALLADIUM MDP1-7-6 FEDERAL COM

Well Number: 4H

Pressure Rating (PSI): 5M

Rating Depth: 10048

Equipment: 13-5/8" 5M Annular, Blind Ram, Double Ram

Requesting Variance? YES

Variance request: Request for the use of a flexible choke line from the BOP to Choke Manifold.

**Testing Procedure:** BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested. Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. A multibowl wellhead is being used. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system will be tested. We will test the flange connection of the wellhead with a test port that is directly in the flange. We are proposing that we will run the wellhead through the rotary prior to cementing surface casing as discussed with the BLM on October 8, 2015.

**Choke Diagram Attachment:**

PalladiumMDP1-7-6FdCom4H\_ChokeMan(5M)\_02-02-2017.pdf

**BOP Diagram Attachment:**

PalladiumMDP1-7-6FdCom4H\_BOP(5M13-58)\_02-02-2017.pdf

PalladiumMDP1-7-6FdCom4H\_FlexHoseCert\_02-02-2017.pdf

### Section 3 - Casing

| Casing ID | String Type  | Hole Size | Csg Size | Condition | Standard | Tapered String | Top Set MD | Bottom Set MD | Top Set TVD | Bottom Set TVD | Top Set MSL | Bottom Set MSL | Calculated casing length MD | Grade | Weight | Joint Type | Collapse SF | Burst SF | Joint SF Type | Joint SF | Body SF Type | Body SF |
|-----------|--------------|-----------|----------|-----------|----------|----------------|------------|---------------|-------------|----------------|-------------|----------------|-----------------------------|-------|--------|------------|-------------|----------|---------------|----------|--------------|---------|
| 1         | SURFACE      | 17.5      | 13.375   | NEW       | API      | N              | 0          | 641           | 0           | 641            | -6514       | -7155          | 641                         | J-55  | 54.5   | BUTT       | 5.44        | 1.34     | BUOY          | 2.64     | BUOY         | 2.64    |
| 2         | INTERMEDIATE | 12.25     | 9.625    | NEW       | API      | N              | 0          | 4337          | 0           | 4337           |             |                | 4337                        | J-55  | 36     | BUTT       | 3.09        | 1.28     | BUOY          | 2.56     | BUOY         | 2.56    |
| 3         | PRODUCTION   | 8.5       | 5.5      | NEW       | API      | N              | 0          | 20200         | 0           | 10048          |             |                | 20200                       | P-110 | 17     | OTHER      | 2.11        | 1.21     | BUOY          | 2.48     | BUOY         | 2.48    |

Casing Attachments

**Operator Name:** OXY USA INC

**Well Name:** PALLADIUM MDP1-7-6 FEDERAL COM

**Well Number:** 4H

---

**Casing Attachments**

---

**Casing ID:** 1      **String Type:** SURFACE

**Inspection Document:**

**Spec Document:**

**Taperd String Spec:**

**Casing Design Assumptions and Worksheet(s):**

PalladiumMDP1-7-6FdCom4H\_CsgCriteria\_02-02-2017.pdf

---

**Casing ID:** 2      **String Type:** INTERMEDIATE

**Inspection Document:**

**Spec Document:**

**Taperd String Spec:**

**Casing Design Assumptions and Worksheet(s):**

PalladiumMDP1-7-6FdCom4H\_CsgCriteria\_02-02-2017.pdf

---

**Casing ID:** 3      **String Type:** PRODUCTION

**Inspection Document:**

**Spec Document:**

**Taperd String Spec:**

**Casing Design Assumptions and Worksheet(s):**

PalladiumMDP1-7-6FdCom4H\_CsgCriteria\_02-02-2017.pdf

PalladiumMDP1-7-6FdCom4H\_5.5-17-P110DQX\_02-02-2017.pdf

---

**Section 4 - Cement**

Operator Name: OXY USA INC

Well Name: PALLADIUM MDP1-7-6 FEDERAL COM

Well Number: 4H

| String Type  | Lead/Tail | Stage Tool Depth | Top MD | Bottom MD | Quantity(sx) | Yield | Density | Cu Ft | Excess% | Cement type    | Additives                                    |
|--------------|-----------|------------------|--------|-----------|--------------|-------|---------|-------|---------|----------------|--|
| SURFACE      | Lead      |                  | 0      | 641       | 522          | 1.35  | 14.8    | 704   | 50      | Class C Cement | Accelerator                                  |
| INTERMEDIATE | Lead      |                  | 0      | 3837      | 1141         | 1.74  | 12.9    | 1985  | 75      | Class C Cement | Retarder                                     |
| INTERMEDIATE | Tail      |                  | 3837   | 4337      | 156          | 1.33  | 14.8    | 207   | 20      | Class C Cement | Retarder, Dispersant, Salt                   |
| PRODUCTION   | Lead      |                  | 3837   | 9121      | 672          | 3.06  | 10.2    | 2056  |         | Class C Cement | Retarder, Low Fluid Loss Control, Lost       |
| PRODUCTION   | Tail      |                  | 9121   | 2020<br>0 | 3505         | 1.63  | 13.2    | 5713  | 125     | Class H Cement | Retarder, Disperant, Low Fluid Loss Control, |

## Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with Onshore Order #2:

Diagram of the equipment for the circulating system in accordance with Onshore Order #2:

**Describe what will be on location to control well or mitigate other conditions:** Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements. The following is a general list of products: Barite, Bentonite, Gypsum, Lime, Soda Ash, Caustic Soda, Nut Plug, Cedar Fiber, Cotton Seed Hulls, Drilling Paper, Salt Water Clay, CaCl<sub>2</sub>. OXY proposes to drill out the 13-3/8" surface casing shoe with a saturated brine system from 641-4337', which is the base of the salt system. At this point we will swap fluid systems to a high viscosity mixed metal hydroxide system. We will drill with this system to the KOP @ 9621'.

**Describe the mud monitoring system utilized:** PVT/MD Totco/Visual Monitoring

## Circulating Medium Table

| Top Depth | Bottom Depth | Mud Type        | Min Weight (lbs/gal) | Max Weight (lbs/gal) | Density (lbs/cu ft) | Gel Strength (lbs/100 sqft) | PH | Viscosity (CP) | Salinity (ppm) | Filtration (cc) | Additional Characteristics |
|-----------|--------------|-----------------|----------------------|----------------------|---------------------|-----------------------------|----|----------------|----------------|-----------------|----------------------------|
| 641       | 4337         | OTHER : Brine   | 9.8                  | 10                   |                     |                             |    |                |                |                 |                            |
| 0         | 641          | WATER-BASED MUD | 8.4                  | 8.6                  |                     |                             |    |                |                |                 |                            |

**Operator Name:** OXY USA INC

**Well Name:** PALLADIUM MDP1-7-6 FEDERAL COM

**Well Number:** 4H

| Top Depth | Bottom Depth | Mud Type        | Min Weight (lbs/gal) | Max Weight (lbs/gal) | Density (lbs/cu ft) | Gel Strength (lbs/100 sqft) | PH | Viscosity (CP) | Salinity (ppm) | Filtration (cc) | Additional Characteristics |
|-----------|--------------|-----------------|----------------------|----------------------|---------------------|-----------------------------|----|----------------|----------------|-----------------|----------------------------|
| 4337      | 9421         | WATER-BASED MUD | 8.8                  | 9.6                  |                     |                             |    |                |                |                 |                            |
| 9421      | 20200        | OIL-BASED MUD   | 8.8                  | 9.6                  |                     |                             |    |                |                |                 |                            |

## Section 6 - Test, Logging, Coring

**List of production tests including testing procedures, equipment and safety measures:**

GR from TD to surface (horizontal well – vertical portion of hole). Mud Log from Surface shoe to TD.

**List of open and cased hole logs run in the well:**

GR,MUDLOG

**Coring operation description for the well:**

No coring is planned at this time.

## Section 7 - Pressure

**Anticipated Bottom Hole Pressure:** 4912

**Anticipated Surface Pressure:** 2701.44

**Anticipated Bottom Hole Temperature(F):** 161

**Anticipated abnormal pressures, temperatures, or potential geologic hazards?** NO

**Describe:**

**Contingency Plans geohazards description:**

**Contingency Plans geohazards attachment:**

**Hydrogen Sulfide drilling operations plan required?** YES

**Hydrogen sulfide drilling operations plan:**

PalladiumMDP1-7-6FdCom4H\_H2S1\_02-02-2017.pdf

PalladiumMDP1-7-6FdCom4H\_H2S2\_02-02-2017.pdf



**Operator Name:** OXY USA INC

**Well Name:** PALLADIUM MDP1-7-6 FEDERAL COM

**Well Number:** 4H

## Section 8 - Other Information

### Proposed horizontal/directional/multi-lateral plan submission:

PalladiumMDP1-7-6FdCom4H\_DirectPlan\_02-02-2017.pdf

PalladiumMDP1-7-6FdCom4H\_DirectPlot\_02-02-2017.pdf

### Other proposed operations facets description:

Well will be drilled with a walking/skidding operation. Plan to drill the two well pad in batch by section: all surface sections, intermediate sections and production sections. The wellhead will be secured with a night cap whenever the rig is not over the well.

OXY requests the option to contract a Surface Rig to drill, set surface casing, and cement for this well. If the timing between rigs is such that OXY would not be able to preset surface, the Primary Rig will MIRU and drill the well in its entirety per the APD. See attached for additional spudder rig information.

### Other proposed operations facets attachment:

PalladiumMDP1-7-6FdCom4H\_DrillPlan\_02-02-2017.pdf

PalladiumMDP1\_7\_6FdCom4H\_SpudRigData\_06-02-2017.pdf

### Other Variance attachment:

## Section 1 - Existing Roads

**Will existing roads be used?** YES

### Existing Road Map:

PalladiumMDP1-7-6FdCom4H\_ExistRoads\_02-02-2017.pdf

**Existing Road Purpose:** FLUID TRANSPORT

**Row(s) Exist?** NO

### ROW ID(s)

**ID:**

**Do the existing roads need to be improved?** NO

### Existing Road Improvement Description:

### Existing Road Improvement Attachment:

**Operator Name:** OXY USA INC

**Well Name:** PALLADIUM MDP1-7-6 FEDERAL COM

**Well Number:** 4H

## Section 2 - New or Reconstructed Access Roads

**Will new roads be needed?** YES

**New Road Map:**

PalladiumMDP1-7-6FdCom4H\_NewRoad\_02-02-2017.pdf

**New road type:** LOCAL

**Length:** 80.4

Feet

**Width (ft.):** 25

**Max slope (%):** 0

**Max grade (%):** 0

**Army Corp of Engineers (ACOE) permit required?** NO

**ACOE Permit Number(s):**

**New road travel width:** 14

**New road access erosion control:** Watershed Diversion every 200' if needed.

**New road access plan or profile prepared?** YES

**New road access plan attachment:**

PalladiumMDP1-7-6FdCom4H\_NewRoad\_02-02-2017.pdf

**Access road engineering design?** NO

**Access road engineering design attachment:**

**Access surfacing type:** OTHER

**Access topsoil source:** ONSITE

**Access surfacing type description:** Caliche

**Access onsite topsoil source depth:** 0

**Offsite topsoil source description:**

**Onsite topsoil removal process:** If available

**Access other construction information:** None

**Access miscellaneous information:** The access road will begin at an existing caliche road and will go south for 80.4' through a pasture to the northeast corner of pad.

**Number of access turnouts:**

**Access turnout map:**

## Drainage Control

**New road drainage crossing:** CULVERT

**Drainage Control comments:** Watershed Diversion every 200' if needed.

**Road Drainage Control Structures (DCS) description:** Watershed Diversion every 200' if needed.

**Road Drainage Control Structures (DCS) attachment:**

## Access Additional Attachments

**Operator Name:** OXY USA INC

**Well Name:** PALLADIUM MDP1-7-6 FEDERAL COM

**Well Number:** 4H

**Additional Attachment(s):**

### Section 3 - Location of Existing Wells

**Existing Wells Map?** YES

**Attach Well map:**

PalladiumMDP1-7-6FdCom4H\_ExistWells\_02-02-2017.pdf

**Existing Wells description:**

### Section 4 - Location of Existing and/or Proposed Production Facilities

**Submit or defer a Proposed Production Facilities plan?** SUBMIT

**Estimated Production Facilities description:**

**Production Facilities description:** a. In the event the well is found productive, the Sand Dunes South Corridor central tank battery would be utilized and the necessary production equipment will be installed at the well site. See proposed facilities layout diagram. b. All flow lines will adhere to API standards. They will consist of 2 – 4" composite flowlines operating 75% MAWP, surface and 1 – 6" steel gas lift supply line operating 1500 psig, buried, lines to follow surveyed route. Survey of a strip of land 30' wide and 2106.1' in length crossing USA Land in Sections 7 & 18 T24S R31E NMPM, Eddy County, NM and being 15' left and 15' right of the centerline survey, see attached. c. Electric line will follow a route approved by the BLM. Survey of a strip of land 30' wide and 250.6' in length crossing USA Land in Section 7 T24S R31E NMPM, Eddy County, NM and being 15' left and 15' right of the centerline survey, see attached. d. All of the Palladium MDP1 7-6 Fed Com #1H-#6H will be routed to the Sand Dunes South Corridor CTB. Each well will have (2) surface laid flowlines operating at less than 75% of the MAWP of the flowline. The Sand Dunes South Corridor will be supported by centralized gas lift. The main gas lift compressors will be located on the pad of the Patton 18-3, directly adjacent to the Sand Dunes South Corridor CTB, and will be fed by a buried suction line from the Sand Dunes South Corridor CTB at low pressure. The discharge of the compressors at the Patton 18-3 will go into a common trunk line running the length of the South Corridor that will consist of (2) 12" high pressure gas lines. From the trunk line, there will be (1) 6" high pressure line running to each well. Additional gas lift compressors may be needed at the wellhead if higher injection pressures are required. See Attached.

**Production Facilities map:**

PalladiumMDP1-7-6FdCom4H\_FacilityPLEL\_02-02-2017.pdf

PalladiumMDP1\_7\_6FdCom4H\_MasterFacGLLAmd\_06-08-2017.pdf

### Section 5 - Location and Types of Water Supply

#### Water Source Table

**Water source use type:** INTERMEDIATE/PRODUCTION CASING,  
OTHER, SURFACE CASING

**Water source type:** GW WELL

**Describe type:**

**Source latitude:**

**Source longitude:**

**Source datum:**

**Water source permit type:** WATER WELL

**Source land ownership:** COMMERCIAL

**Water source transport method:** PIPELINE,TRUCKING

**Operator Name:** OXY USA INC

**Well Name:** PALLADIUM MDP1-7-6 FEDERAL COM

**Well Number:** 4H

**Source transportation land ownership:** COMMERCIAL

**Water source volume (barrels):** 2000

**Source volume (acre-feet):** 0.25778618

**Source volume (gal):** 84000

**Water source and transportation map:**

PalladiumMDP1-7-6FdCom4H\_GRRWtrSrc\_02-02-2017.pdf

PalladiumMDP1-7-6FdCom4H\_MesqWtrSrc\_02-02-2017.pdf

**Water source comments:** This well will be drilled using a combination of water mud systems. It will be obtained from commercial water stations (Gregory Rockhouse, Mesquite) in the area and will be hauled to location by transport truck using existing and proposed roads.

**New water well?** NO

## **New Water Well Info**

**Well latitude:**

**Well Longitude:**

**Well datum:**

**Well target aquifer:**

**Est. depth to top of aquifer(ft):**

**Est thickness of aquifer:**

**Aquifer comments:**

**Aquifer documentation:**

**Well depth (ft):**

**Well casing type:**

**Well casing outside diameter (in.):**

**Well casing inside diameter (in.):**

**New water well casing?**

**Used casing source:**

**Drilling method:**

**Drill material:**

**Grout material:**

**Grout depth:**

**Casing length (ft.):**

**Casing top depth (ft.):**

**Well Production type:**

**Completion Method:**

**Water well additional information:**

**State appropriation permit:**

**Additional information attachment:**

## **Section 6 - Construction Materials**

**Construction Materials description:** Primary - All caliche utilized for the drilling pad and proposed access road will be obtained from an existing BLM/State/Fee approved pit or from prevailing deposits found on the location. Will use BLM recommended extra caliche from other locations close by for roads, if available. Secondary - The secondary way of obtaining caliche to build locations and roads will be by "turning over" the location. This means, caliche will be obtained from the actual well site. A caliche permit will be obtained from BLM prior to pushing up any caliche. 2400 cubic yards is max amount of caliche needed for pad and roads. Amount will vary for each pad. The procedure below has been approved by BLM personnel: a. The top 6" of topsoil is pushed off and stockpiled along the side of the location. b. An approximate 120' X 120' area is used within the proposed well site to remove caliche. c. Subsoil is removed and piled alongside the 120' X 120' within the pad site. d. When caliche is found, material will be stockpiled within the pad site to build the location and road. e. Then subsoil is pushed back in the hole and caliche is spread accordingly across entire location and road. f. Once the well is drilled the stockpiled top soil will be used for interim reclamation and spread along areas where caliche is picked up and the location

**Operator Name:** OXY USA INC

**Well Name:** PALLADIUM MDP1-7-6 FEDERAL COM

**Well Number:** 4H

size is reduced. Neither caliche nor subsoil will be stockpiled outside of the well pad. Topsoil will be stockpiled along the edge of the pad. Caliche will be provided from a pit located in Section 7 T24S R31E. Water will be provided from a frac pond located in Sections 7 T24S R31E.

**Construction Materials source location attachment:**

## Section 7 - Methods for Handling Waste

**Waste type:** DRILLING

**Waste content description:** Water-Based Cuttings, Water-Based Mud, Oil-Based Cuttings, Oil-Based Mud, Produced Water

**Amount of waste:** 1842.9 barrels

**Waste disposal frequency :** Daily

**Safe containment description:** Haul-Off Bins

**Safe containmant attachment:**

**Waste disposal type:** HAUL TO COMMERCIAL FACILITY **Disposal location ownership:** COMMERCIAL

**Disposal type description:**

**Disposal location description:** An approved facility that can process drill cuttings, drill fluids, flowback water, produced water, contaminated soils, and other non-hazardous wastes.

## Reserve Pit

**Reserve Pit being used?** NO

**Temporary disposal of produced water into reserve pit?**

**Reserve pit length (ft.)** **Reserve pit width (ft.)**

**Reserve pit depth (ft.)** **Reserve pit volume (cu. yd.)**

**Is at least 50% of the reserve pit in cut?**

**Reserve pit liner**

**Reserve pit liner specifications and installation description**

## Cuttings Area

**Cuttings Area being used?** NO

**Are you storing cuttings on location?** YES

**Description of cuttings location** A closed loop system will be utilized consisting of above ground steel tanks and haul-off bins. Disposal of liquids, drilling fluids and cuttings will be disposed of at an approved facility.

**Cuttings area length (ft.)** **Cuttings area width (ft.)**

**Cuttings area depth (ft.)** **Cuttings area volume (cu. yd.)**

**Is at least 50% of the cuttings area in cut?**

**WCuttings area liner**

**Operator Name:** OXY USA INC

**Well Name:** PALLADIUM MDP1-7-6 FEDERAL COM

**Well Number:** 4H

## Cuttings area liner specifications and installation description

### Section 8 - Ancillary Facilities

**Are you requesting any Ancillary Facilities?:** NO

**Ancillary Facilities attachment:**

**Comments:**

### Section 9 - Well Site Layout

**Well Site Layout Diagram:**

PalladiumMDP1-7-6FdCom4H\_WellsiteCL\_02-02-2017.pdf

**Comments:** V-Door-West - CL Tanks-South - 330' X 440' – 2 Well Pad

### Section 10 - Plans for Surface Reclamation

**Type of disturbance:** NEW

**Recontouring attachment:**

**Drainage/Erosion control construction:** Reclamation to be wind rowed as needed to control erosion

**Drainage/Erosion control reclamation:** Reclamation to be wind rowed as needed to control erosion

**Wellpad long term disturbance (acres):** 2.12

**Wellpad short term disturbance (acres):** 3.33

**Access road long term disturbance (acres):** 0.03

**Access road short term disturbance (acres):** 0.05

**Pipeline long term disturbance (acres):** 0.48349404

**Pipeline short term disturbance (acres):** 1.4504821

**Other long term disturbance (acres):** 0

**Other short term disturbance (acres):** 0.17

**Total long term disturbance:** 2.6334941

**Total short term disturbance:** 5.000482

**Reconstruction method:** If the well is deemed commercially productive, caliche from the areas of the pad site not required for operations will be reclaimed. The original topsoil will be returned to the area of the drill pad not necessary to operate the well. These unused areas of the drill pad will be contoured, as close as possible, to match the original topography, and the area will be seeded with an approved BLM mixture to re-establish vegetation. After concluding the drilling and/or completion operations, if the well is found non-commercial, the caliche will be removed from the pad and transported to the original caliche pit or used for other drilling locations. The road will be reclaimed as directed by the BLM. The original topsoil will again be returned to the pad and contoured, as close as possible, to the original topography, and the area will be seeded with an approved BLM mixture to re-establish vegetation.

**Topsoil redistribution:** The original topsoil will be returned to the area of the drill pad not necessary to operate the well.

**Soil treatment:** To be determined by the BLM.

**Existing Vegetation at the well pad:** To be determined by the BLM at Onsite.

**Existing Vegetation at the well pad attachment:**

**Existing Vegetation Community at the road:** To be determined by the BLM at Onsite.

**Operator Name:** OXY USA INC

**Well Name:** PALLADIUM MDP1-7-6 FEDERAL COM

**Well Number:** 4H

**Existing Vegetation Community at the road attachment:**

**Existing Vegetation Community at the pipeline:** To be determined by the BLM at Onsite.

**Existing Vegetation Community at the pipeline attachment:**

**Existing Vegetation Community at other disturbances:** To be determined by the BLM at Onsite.

**Existing Vegetation Community at other disturbances attachment:**

**Non native seed used?** NO

**Non native seed description:**

**Seedling transplant description:**

**Will seedlings be transplanted for this project?** NO

**Seedling transplant description attachment:**

**Will seed be harvested for use in site reclamation?** NO

**Seed harvest description:**

**Seed harvest description attachment:**

## **Seed Management**

### **Seed Table**

**Seed type:**

**Seed source:**

**Seed name:**

**Source name:**

**Source address:**

**Source phone:**

**Seed cultivar:**

**Seed use location:**

**PLS pounds per acre:**

**Proposed seeding season:**

### **Seed Summary**

**Total pounds/Acre:**

| <b>Seed Type</b> | <b>Pounds/Acre</b> |
|------------------|--------------------|
|------------------|--------------------|

**Seed reclamation attachment:**

### **Operator Contact/Responsible Official Contact Info**

**First Name:** JIM

**Last Name:** WILSON

**Phone:** (575)631-2442

**Email:** jim\_wilson@oxy.com

**Seedbed prep:**

**Seed BMP:**

**Operator Name:** OXY USA INC

**Well Name:** PALLADIUM MDP1-7-6 FEDERAL COM

**Well Number:** 4H

**Seed method:**

**Existing invasive species?** NO

**Existing invasive species treatment description:**

**Existing invasive species treatment attachment:**

**Weed treatment plan description:** To be determined by the BLM.

**Weed treatment plan attachment:**

**Monitoring plan description:** To be determined by the BLM.

**Monitoring plan attachment:**

**Success standards:** To be determined by the BLM.

**Pit closure description:** NA

**Pit closure attachment:**

## **Section 11 - Surface Ownership**

**Disturbance type:** WELL PAD

**Describe:**

**Surface Owner:** BUREAU OF LAND MANAGEMENT

**Other surface owner description:**

**BIA Local Office:**

**BOR Local Office:**

**COE Local Office:**

**DOD Local Office:**

**NPS Local Office:**

**State Local Office:**

**Military Local Office:**

**USFWS Local Office:**

**Other Local Office:**

**USFS Region:**

**USFS Forest/Grassland:**

**USFS Ranger District:**



**Operator Name:** OXY USA INC

**Well Name:** PALLADIUM MDP1-7-6 FEDERAL COM

**Well Number:** 4H

**Disturbance type:** PIPELINE

**Describe:**

**Surface Owner:** BUREAU OF LAND MANAGEMENT

**Other surface owner description:**

**BIA Local Office:**

**BOR Local Office:**

**COE Local Office:**

**DOD Local Office:**

**NPS Local Office:**

**State Local Office:**

**Military Local Office:**

**USFWS Local Office:**

**Other Local Office:**

**USFS Region:**

**USFS Forest/Grassland:**

**USFS Ranger District:**

**Disturbance type:** OTHER

**Describe:** Electric Line

**Surface Owner:** BUREAU OF LAND MANAGEMENT

**Other surface owner description:**

**BIA Local Office:**

**BOR Local Office:**

**COE Local Office:**

**DOD Local Office:**

**NPS Local Office:**

**State Local Office:**

**Military Local Office:**

**USFWS Local Office:**

**Other Local Office:**

**USFS Region:**

**USFS Forest/Grassland:**

**USFS Ranger District:**

**Operator Name:** OXY USA INC

**Well Name:** PALLADIUM MDP1-7-6 FEDERAL COM

**Well Number:** 4H

**Disturbance type:** NEW ACCESS ROAD

**Describe:**

**Surface Owner:** BUREAU OF LAND MANAGEMENT

**Other surface owner description:**

**BIA Local Office:**

**BOR Local Office:**

**COE Local Office:**

**DOD Local Office:**

**NPS Local Office:**

**State Local Office:**

**Military Local Office:**

**USFWS Local Office:**

**Other Local Office:**

**USFS Region:**

**USFS Forest/Grassland:**

**USFS Ranger District:**

## Section 12 - Other Information

**Right of Way needed?** YES

**Use APD as ROW?** YES

**ROW Type(s):** 281001 ROW - ROADS,285003 ROW – POWER TRANS,288100 ROW – O&G Pipeline,289001 ROW- O&G Well Pad

### ROW Applications

**SUPO Additional Information:** Permian Basin MOA - see attached SUPO and to be determined by BLM GIS Shapefiles furnished upon requested

**Use a previously conducted onsite?** NO

**Previous Onsite information:**

### Other SUPO Attachment

PalladiumMDP1-7-6FdCom4H\_GasCapPlan\_02-02-2017.pdf

PalladiumMDP1-7-6FdCom4H\_MiscSvyPlats\_02-02-2017.pdf

PalladiumMDP1-7-6FdCom4H\_StakeNotice\_02-02-2017.pdf

PalladiumMDP1-7-6FdCom4H\_SUPO\_02-02-2017.pdf

**Operator Name:** OXY USA INC

**Well Name:** PALLADIUM MDP1-7-6 FEDERAL COM

**Well Number:** 4H

PWD

## Section 1 - General

Would you like to address long-term produced water disposal? NO

## Section 2 - Lined Pits

Would you like to utilize Lined Pit PWD options? NO

**Produced Water Disposal (PWD) Location:**

**PWD surface owner:**

**PWD disturbance (acres):**

**Lined pit PWD on or off channel:**

**Lined pit PWD discharge volume (bbl/day):**

**Lined pit specifications:**

**Pit liner description:**

**Pit liner manufacturers information:**

**Precipitated solids disposal:**

**Describe precipitated solids disposal:**

**Precipitated solids disposal permit:**

**Lined pit precipitated solids disposal schedule:**

**Lined pit precipitated solids disposal schedule attachment:**

**Lined pit reclamation description:**

**Lined pit reclamation attachment:**

**Leak detection system description:**

**Leak detection system attachment:**

**Lined pit Monitor description:**

**Lined pit Monitor attachment:**

**Lined pit: do you have a reclamation bond for the pit?**

**Is the reclamation bond a rider under the BLM bond?**

**Operator Name:** OXY USA INC

**Well Name:** PALLADIUM MDP1-7-6 FEDERAL COM

**Well Number:** 4H

**Lined pit bond number:**

**Lined pit bond amount:**

**Additional bond information attachment:**

### **Section 3 - Unlined Pits**

**Would you like to utilize Unlined Pit PWD options?** NO

**Produced Water Disposal (PWD) Location:**

**PWD surface owner:**

**PWD disturbance (acres):**

**Unlined pit PWD on or off channel:**

**Unlined pit PWD discharge volume (bbl/day):**

**Unlined pit specifications:**

**Precipitated solids disposal:**

**Describe precipitated solids disposal:**

**Precipitated solids disposal permit:**

**Unlined pit precipitated solids disposal schedule:**

**Unlined pit precipitated solids disposal schedule attachment:**

**Unlined pit reclamation description:**

**Unlined pit reclamation attachment:**

**Unlined pit Monitor description:**

**Unlined pit Monitor attachment:**

**Do you propose to put the produced water to beneficial use?**

**Beneficial use user confirmation:**

**Estimated depth of the shallowest aquifer (feet):**

**Does the produced water have an annual average Total Dissolved Solids (TDS) concentration equal to or less than that of the existing water to be protected?**

**TDS lab results:**

**Geologic and hydrologic evidence:**

**State authorization:**

**Unlined Produced Water Pit Estimated percolation:**

**Unlined pit: do you have a reclamation bond for the pit?**

**Is the reclamation bond a rider under the BLM bond?**

**Unlined pit bond number:**

**Unlined pit bond amount:**

**Additional bond information attachment:**

**Operator Name:** OXY USA INC

**Well Name:** PALLADIUM MDP1-7-6 FEDERAL COM

**Well Number:** 4H

## Section 4 - Injection

**Would you like to utilize Injection PWD options?** NO

**Produced Water Disposal (PWD) Location:**

**PWD surface owner:**

**PWD disturbance (acres):**

**Injection PWD discharge volume (bbl/day):**

**Injection well mineral owner:**

**Injection well type:**

**Injection well number:**

**Injection well name:**

**Assigned injection well API number?**

**Injection well API number:**

**Injection well new surface disturbance (acres):**

**Minerals protection information:**

**Mineral protection attachment:**

**Underground Injection Control (UIC) Permit?**

**UIC Permit attachment:**

## Section 5 - Surface Discharge

**Would you like to utilize Surface Discharge PWD options?** NO

**Produced Water Disposal (PWD) Location:**

**PWD surface owner:**

**PWD disturbance (acres):**

**Surface discharge PWD discharge volume (bbl/day):**

**Surface Discharge NPDES Permit?**

**Surface Discharge NPDES Permit attachment:**

**Surface Discharge site facilities information:**

**Surface discharge site facilities map:**

## Section 6 - Other

**Would you like to utilize Other PWD options?** NO

**Produced Water Disposal (PWD) Location:**

**PWD surface owner:**

**PWD disturbance (acres):**

**Other PWD discharge volume (bbl/day):**

**Other PWD type description:**

**Other PWD type attachment:**

**Have other regulatory requirements been met?**

**Operator Name:** OXY USA INC

**Well Name:** PALLADIUM MDP1-7-6 FEDERAL COM

**Well Number:** 4H

**Other regulatory requirements attachment:**

## Bond Information

**Federal/Indian APD:** FED

**BLM Bond number:** ESB000226

**BIA Bond number:**

**Do you have a reclamation bond?** NO

**Is the reclamation bond a rider under the BLM bond?**

**Is the reclamation bond BLM or Forest Service?**

**BLM reclamation bond number:**

**Forest Service reclamation bond number:**

**Forest Service reclamation bond attachment:**

**Reclamation bond number:**

**Reclamation bond amount:**

**Reclamation bond rider amount:**

**Additional reclamation bond information attachment:**

## Operator Certification

*I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.*

**NAME:** David Stewart

**Signed on:** 02/02/2017

**Title:** Sr. Regulatory Advisor

**Street Address:** 5 Greenway Plaza, Suite 110

**City:** Houston

**State:** TX

**Zip:** 77046

**Phone:** (713)366-5716

**Email address:** David\_stewart@oxy.com

## Field Representative

**Representative Name:** Jim Wilson

**Street Address:** P.O. Box 50250

**Operator Name:** OXY USA INC

**Well Name:** PALLADIUM MDP1-7-6 FEDERAL COM

**Well Number:** 4H

**City:** Midland

**State:** TX

**Zip:** 79710

**Phone:** (575)631-2442

**Email address:** jim\_wilson@oxy.com

## Payment

**APD Fee Payment Method:** PAY.GOV

**pay.gov Tracking ID:** 260F7L9U

[illegible]

SAT 2

## Aseel Surveying


PO BOX 1000 NEW YORK NY 10001  
JOHN REYNOLDS 212 691 1000



DIRECTIONS: BEGINNING AT THE INTERSECTION OF N.M. STATE HWY #136 AND E. DYER AVE. (R.A. #787 (TWIN WELLS ROAD)), GO SOUTH ON COUNTY ROAD #787 FOR 1.3 MILES, TURN RIGHT ON CALICHE ROAD AND GO WEST FOR 0.4 MILES, TURN LEFT ON PROPOSED ROAD AND GO SOUTH FOR 60.4 FEET TO LOCATION.



## LOCATION VERIFICATION MAP

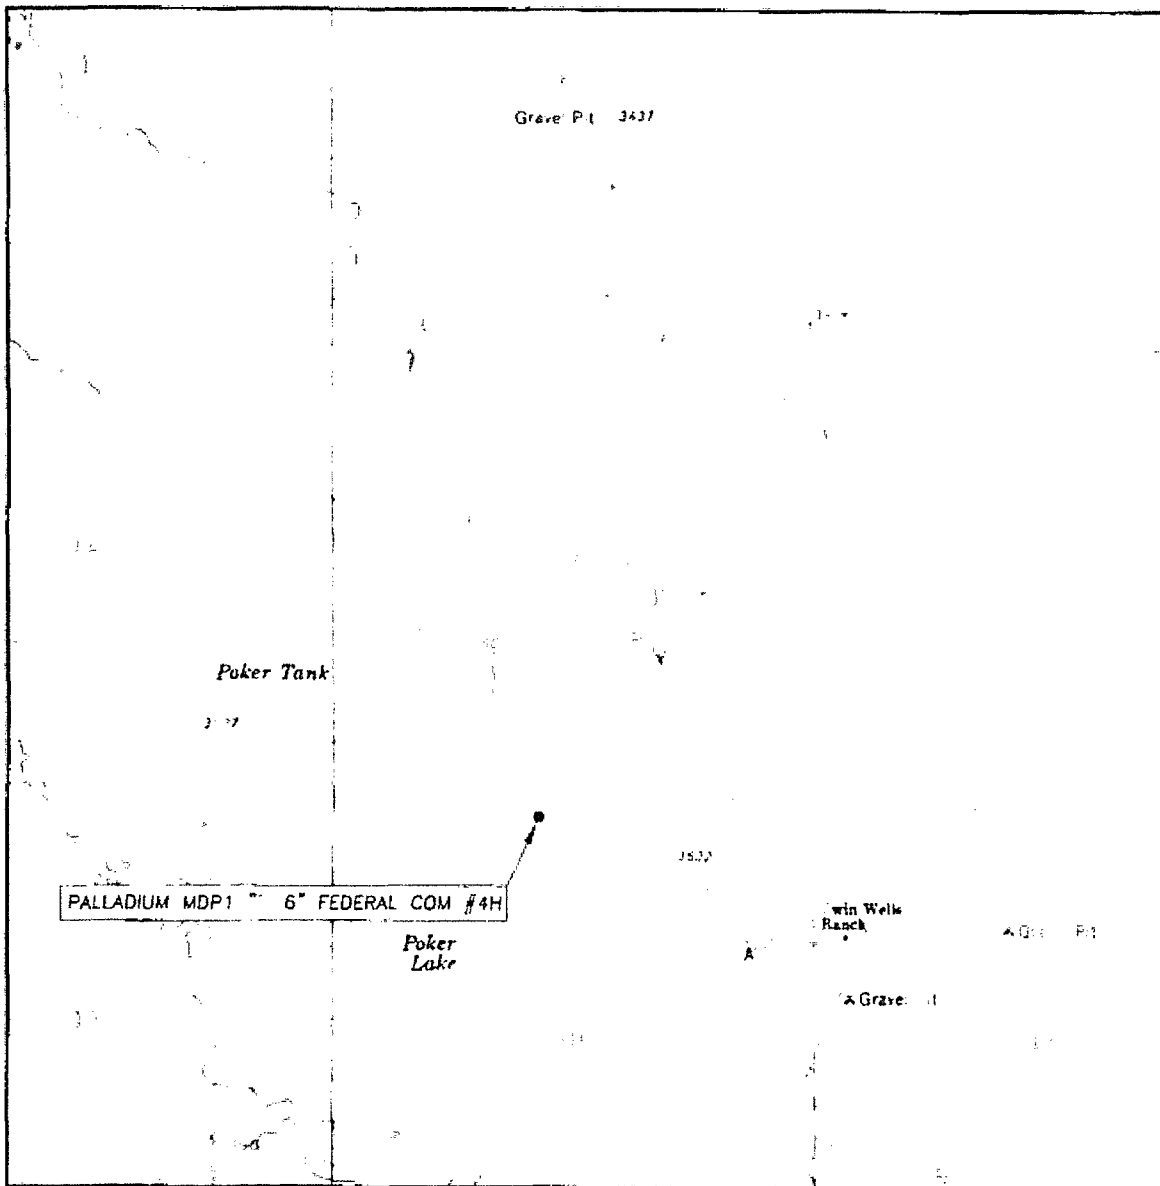


urveying

4



# AERIAL MAP

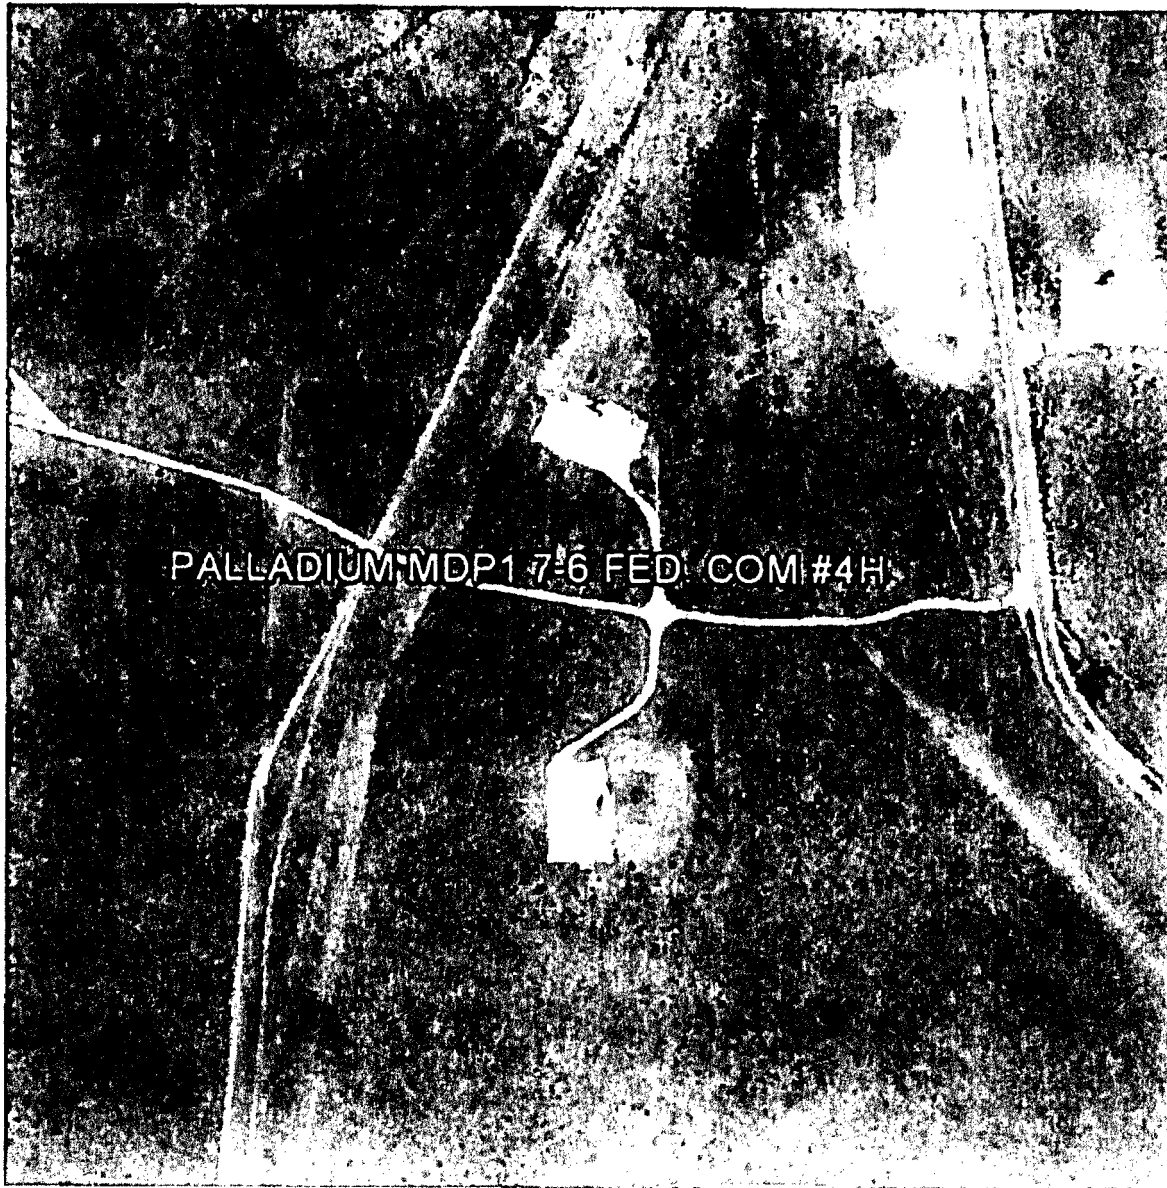

SCALE NOT TO SCALE


ASSEL SURVEYING  
P.O. BOX 393 - 310 W TAYLOR  
HOBBS NEW MEXICO - 575-393-9146

Asel Surveying  
P.O. BOX 393 - 310 W TAYLOR  
HOBBS NEW MEXICO - 575-393-9146



# OXY USA INC. PALLADIUM MDP1 "7-6" FEDERAL COM #4H SITE PLAN

FAA PERMIT: NO

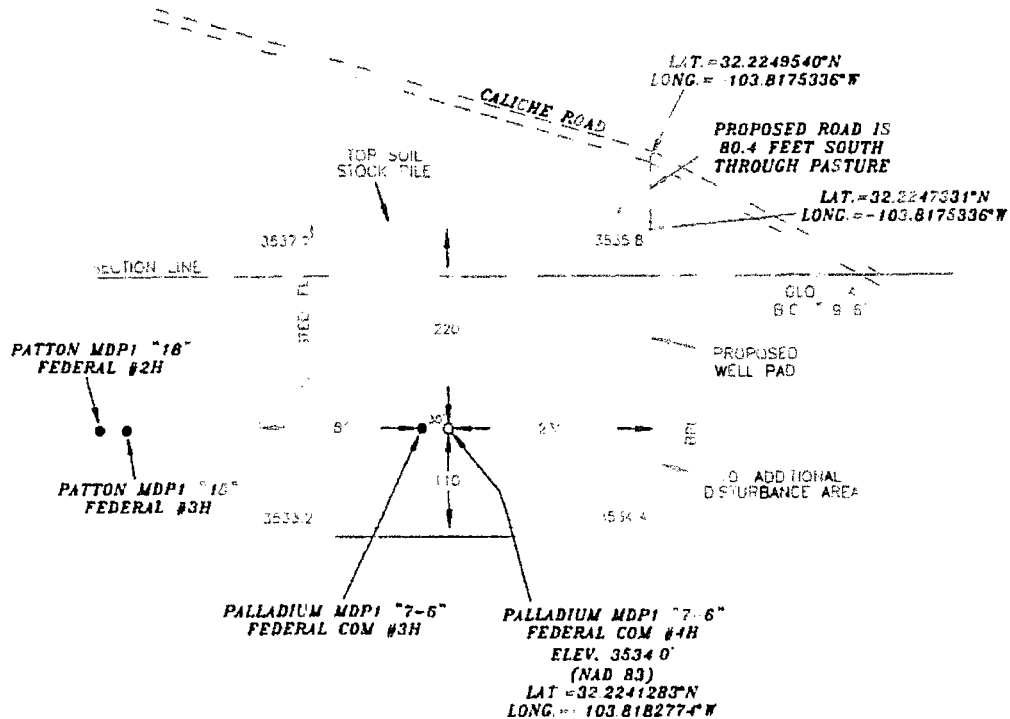

## SURVEYORS CERTIFICATE

I, TERRY J. ASEL, NEW MEXICO PROFESSIONAL SURVEYOR NO. 15079, DO HEREBY CERTIFY THAT I CONDUCTED AND AM RESPONSIBLE FOR THIS SURVEY, THAT THIS SURVEY IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF, AND MEETS THE "MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO" AS ADOPTED BY THE NEW MEXICO STATE BOARD OF REGISTRATION FOR PROFESSIONAL ENGINEERS AND SURVEYORS.

*Terry J. Asel* 9/23/2016  
Terry J. Asel N.M. R.P.L.S. No. 15079

Asel Surveying

311 W. RAYOR  
HOURS, 914-914-9146



## LEGEND

NOTES PROPOSED WELL PAD  
NOTES PROPOSED ROAD  
NOTES STOCK PILE AREA



OXY USA INC


PALLADIUM MDP1 "7-6" FEDERAL COM #4H  
LOCATED AT 169' FNL & 2285' FW  
SECTION 18, TOWNSHIP 24 SOUTH, RANGE  
EAST, N.M.P.M., EDDY COUNTY, N.M.

|                                  |                           |
|----------------------------------|---------------------------|
| Survey Date: 06/02/16            | Sheet 1 of 1 Sheets       |
| W.O. Number: 160602WL-b (Rev. A) | Drawn By: KA, Rev. A      |
| Date: 09/22/16                   | 160602WL-b Scale: 1"=200' |

# OXY USA INC.

## PALLADIUM MDP1 "7-6" FEDERAL COM #4H SITE PLAN

FAA PERMIT: NO

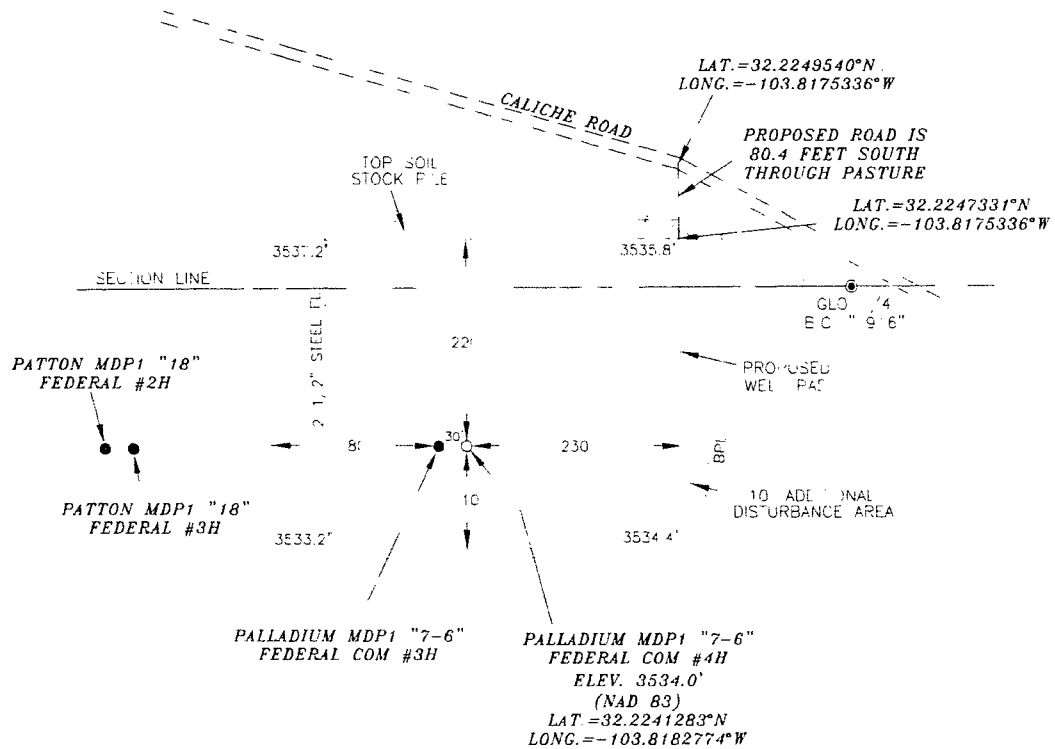


### SURVEYORS CERTIFICATE

I, TERRY J. ASEL, NEW MEXICO PROFESSIONAL SURVEYOR NO. 15079, DO HEREBY CERTIFY THAT I CONDUCTED AND AM RESPONSIBLE FOR THIS SURVEY, THAT THIS SURVEY IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF, AND MEETS THE "MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO" AS ADOPTED BY THE NEW MEXICO STATE BOARD OF REGISTRATION FOR PROFESSIONAL ENGINEERS AND SURVEYORS.

*Terry J. Asel* 9/23/2016  
Terry J. Asel N.M. R.P.L.S. No. 15079


Asel Surveying

P. Box 393 W. TAYLOR  
HOBBS NEW MEXICO 575 393-9146



### LEGEND

- DENOTES PROPOSED WELL PILE
- DENOTES PROPOSED ROAD
- DENOTES STOCK PILE AREA




## OXY USA INC.

PALLADIUM MDP1 "7-6" FEDERAL COM #4H  
LOCATED AT 169° ENE & 2285' FW IN  
SECTION 8, TOWNSHIP 24 SOUTH, RANGE 31  
EAST, N.M.P.M., EDDY COUNTY, NEW MEXICO

|                                  |                             |
|----------------------------------|-----------------------------|
| Survey Date: 06/12/16            | Sheet 1 of 1 Sheets         |
| W.O. Number: 160602WL-b (Rev. A) | Drawn By: KA Rev: A         |
| Date: 09/22/16                   | 160602WL-b Scale: 1" = 200' |



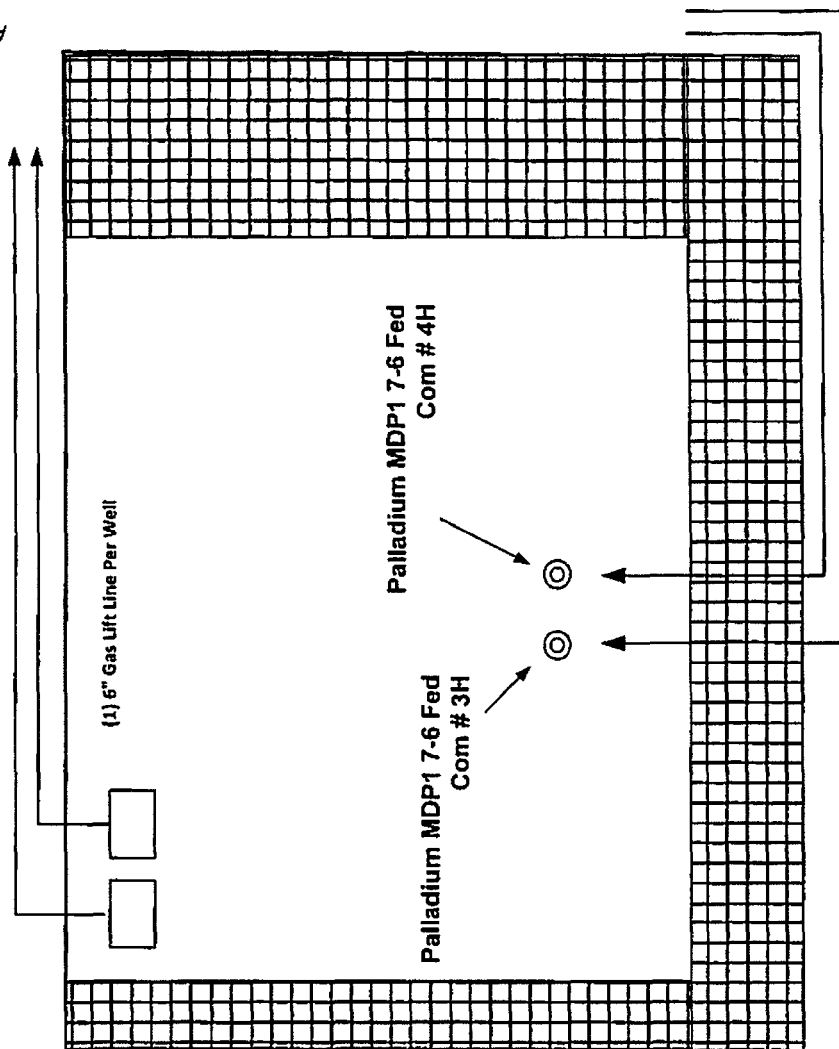


**(2) 4" FLOWLINES PER WELL TO Sand Dunes South Corridor CTB**

NORTH

| NO. |  | DATE | REVISION BLOCK |  |    |     | ENGINEERING RECORD |     |         |  |
|-----|--|------|----------------|--|----|-----|--------------------|-----|---------|--|
|     |  |      | DESCRIPTION    |  | BY | CHK | APP                | BY  | DATE    |  |
|     |  |      |                |  |    |     |                    |     |         |  |
|     |  |      |                |  |    |     |                    | CJW | 1/23/17 |  |



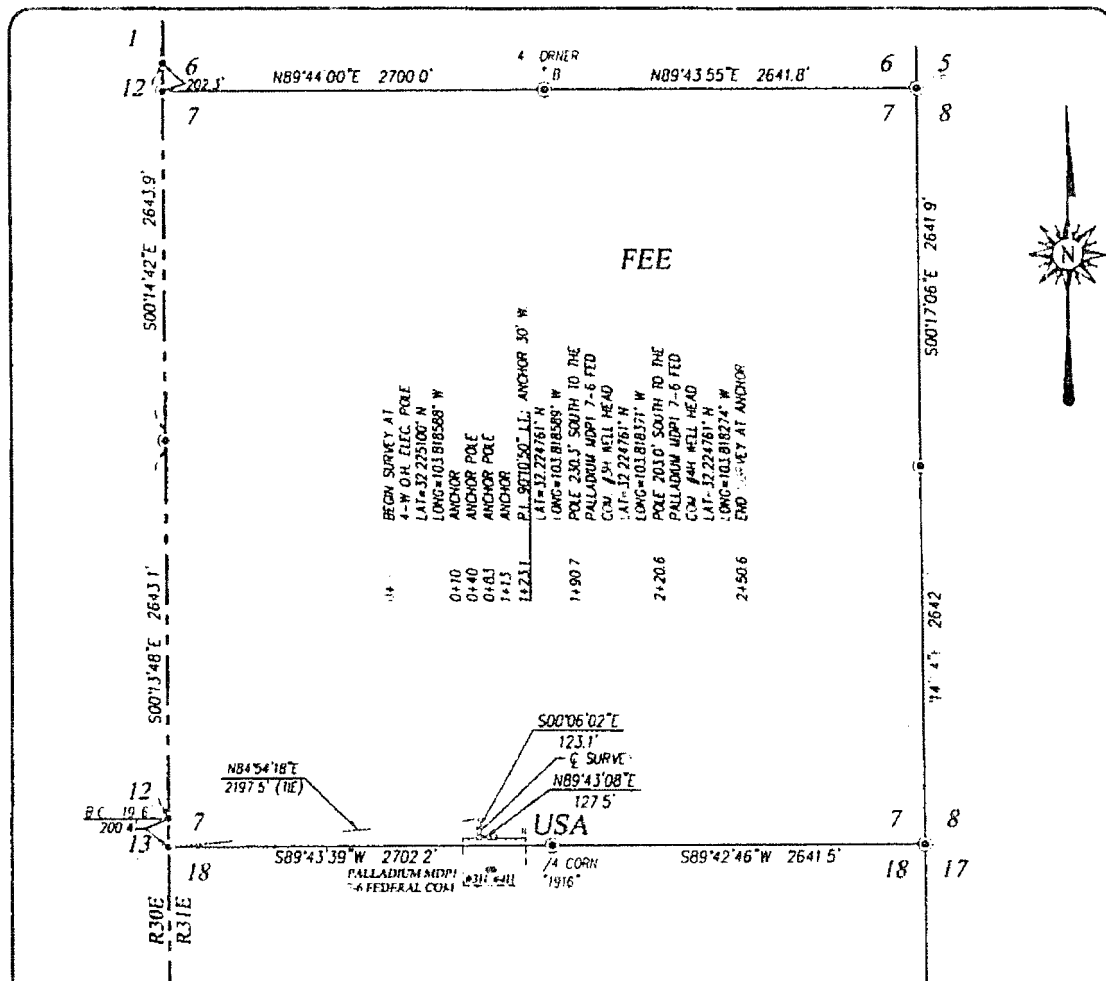

#### DESCRIPTION

SURVEY OF A STRIP OF LAND 30.0 FEET WIDE AND 250.6 FEET OR 0.047 MILES IN LENGTH CROSSING USA LAND IN SECTION 7, TOWNSHIP 24 SOUTH, RANGE 31 EAST, N.M.P.M., EDDY COUNTY, NEW MEXICO, AND BEING 15.0 FEET LEFT AND 15.0 FEET RIGHT OF THE ABOVE PLATTED CENTERLINE SURVEY

#### NOTE

- 1) BEARINGS SHOWN HEREON ARE MERCATOR GRID AND CONFORM TO THE NEW MEXICO COORDINATE SYSTEM "NEW MEXICO EAST ZONE" NORTH AMERICAN DATUM 1983. DISTANCES ARE SURFACE VALUES.
- 2) LATITUDE AND LONGITUDE VALUES SHOWN HEREON ARE RELATIVE TO THE NORTH AMERICAN DATUM 1983 (NAD83)


I, RONALD J. EIDSON, NEW MEXICO, PROFESSIONAL SURVEYOR No. 3239, DO HEREBY CERTIFY THAT THIS SURVEY WAS THE ACTUAL SURVEY ON THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY DIRECT SUPERVISION; THAT I AM RESPONSIBLE FOR THIS SURVEY; THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO; AND THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

RONALD J. EIDSON

DATE: 7/12/2016

#### LEGEND

⊙ DENOTES FOUND CORNER AS NOTED



**OXY U.S.A. INC.**

SURVEY FOR AN ELECTRIC LINE TO THE  
PALLADIUM MDP1 7-6 FEDERAL COM  
#3H & #4H WELLS CROSSING SECTION 7,  
TOWNSHIP 24 SOUTH, RANGE 31 EAST, N.M.P.M.  
EDDY COUNTY, NEW MEXICO




PROVIDING SURVEYING SERVICES  
SINCE 1946  
**JOHN WEST SURVEYING COMPANY**  
412 N. DAL PASO HOBBS, N.M. 88240  
(575) 393-3117 www.jwsc.biz  
TBPLS# 10021000

|                      |                   |               |
|----------------------|-------------------|---------------|
| Survey Date: 6/29/16 | CAD Date: 7/12/16 | Drawn By: ACK |
| W.O. No. 16110477    | Rev.              | Rel. W.O.     |

Sheet 1 of 1

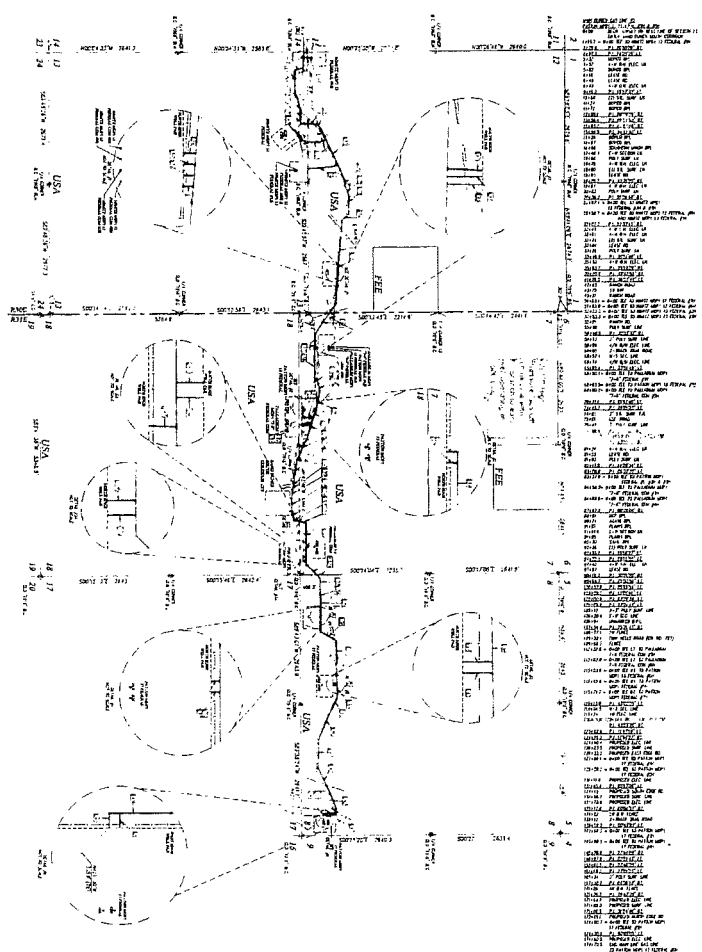

[illegible]

All of the Palladium (NDP) 7-6 Fed Com #11-46H will be routed to the Sand Dunes South Corridor CTB. Each well will have (2) surface and blowlines operating at less than 75% of the MAWP of the flowline. The Sand Dunes South Corridor will be supported by centralized gas lift. The main gas lift compressors will be located on the pad of the Patton 18-3, directly adjacent to the Sand Dunes South Corridor CTB, and will be fed by a buried suction line from the Sand Dunes South Corridor CTB at low pressure. The discharge of the compressors at the Patton 18-3 will go into a common trunk line running the length of the South Corridor that will consist of (2) 12" high pressure gas lines. From the trunk line, there will be (1) 6" high pressure line running to each well. Additional gas lift compressors may be needed at the wellhead if higher injection pressures are required.

**NOTE:**  
EAGLES, SCOW HEATHS, AND WETLAND OWLS AND COWBIRDS IN  
THE NEW WOODS GOODWILL SYSTEM ARE MISSING LAST FOUR  
WINTER WOODCOCK BIRDS THIS SPRING ARE REPORT MISSING

LEGEND

[illegible]

**SURVEYOR'S CERTIFICATE:**

I, RONALD J. DEGEN, of the State of MISSISSIPPI, do hereby certify that this SALE was conducted in accordance with the provisions of the MISSISSIPPI SALE ACT of 1964, and that the same was conducted in accordance with the provisions of the MISSISSIPPI SALE ACT of 1964, and that the same was conducted in accordance with the provisions of the MISSISSIPPI SALE ACT of 1964.



FOR THE STATE OF MISSISSIPPI, I, RONALD J. DEGEN, Surveyor General, do hereby certify that the same was conducted in accordance with the provisions of the MISSISSIPPI SALE ACT of 1964, and that the same was conducted in accordance with the provisions of the MISSISSIPPI SALE ACT of 1964.


**OXY U.S.A. INC.**

**SURVEY FOR BURIED GAS PIPELINES IN THE DUNDUNES SOUTH CORRIDOR TO  
CONNECT THE NIMTZ MDPI 12 FEDERAL #11, #21, #31 & #311, THE NIMTZ MDPI 13  
FEDERAL #11, THE NIMTZ MDPI 12 FEDERAL, COM #61 & #11, AND THE NIMTZ MDPI 13  
FEDERAL COM #211 & #11 CROSSING SECTIONS 12 & 13, TOWNSHIP 24 SOUTH, RANGE 36  
EAST, AND THE PALLADUM MDPI 17 & 18 FEDERAL #11, THE PALLADUM MDPI 17 & 18  
FEDERAL COM #21, #31 & #11, THE PATTON MDPI 18 FEDERAL #11, #21, #31, #311, & #1  
& #11, THE PATTON MDPI 17 FEDERAL #11, #21, #31, #41, & #61 CROSSING SECTIONS  
7, 8 & 18, TOWNSHIP 24 SOUTH, RANGE 31 EAST N.M.P.M., EDDY COUNTY, NEW MEXICO**



PROVIDING SURVEYING SERVICES  
SINCE 1946  
JOHN WEST SURVEYING COMPANY  
412 N. DAL PASO  
HOERS, NEW MEXICO 88240  
(575) 393-3117 [www.jwsc.biz](http://www.jwsc.biz)  
TELEFAX 10022000

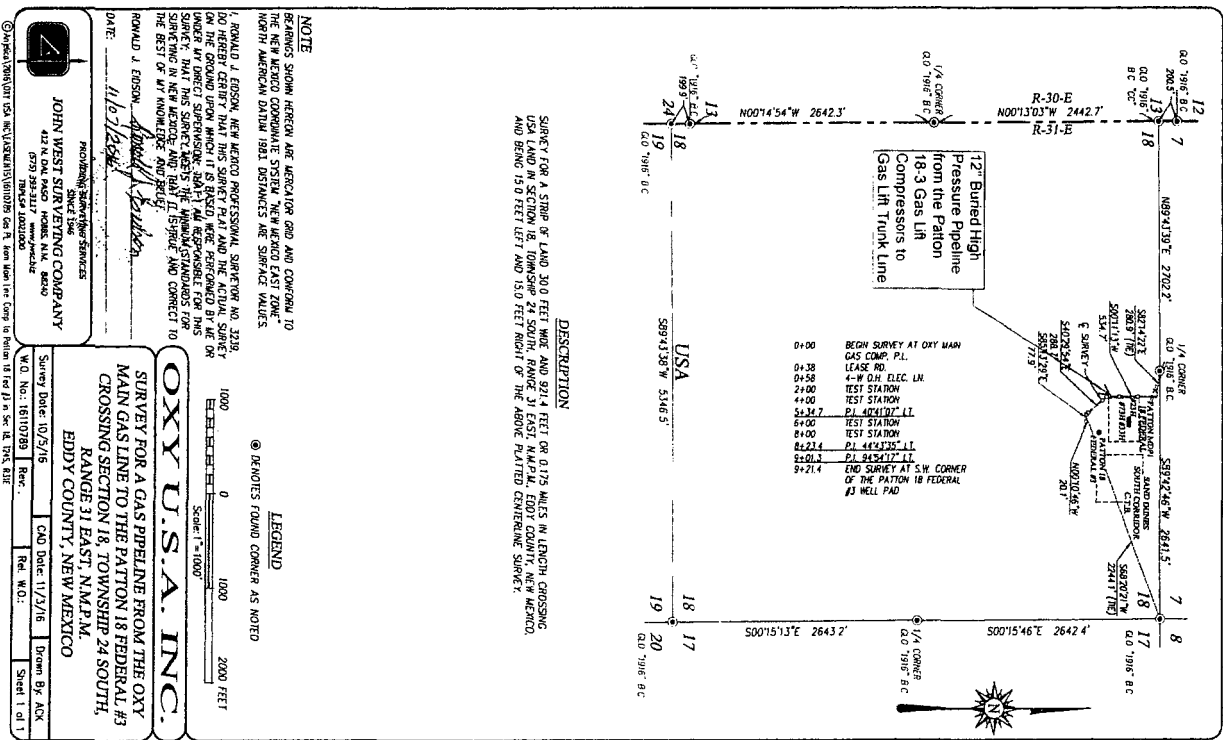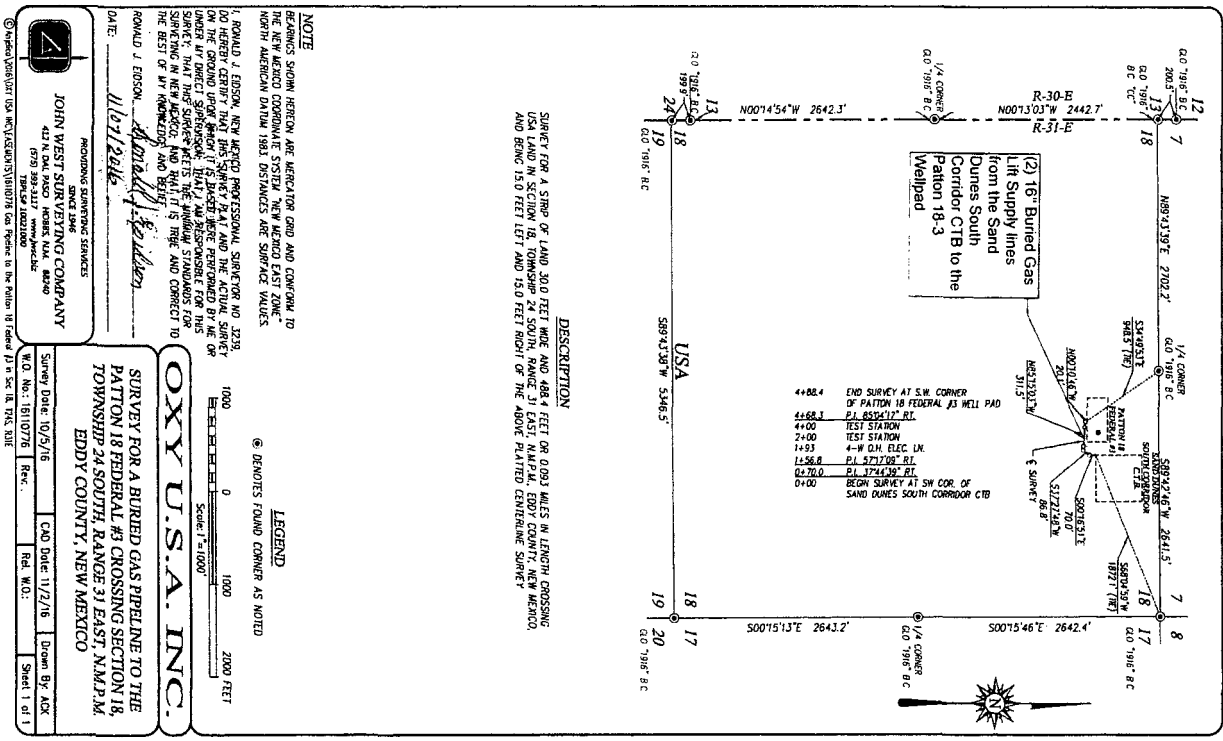

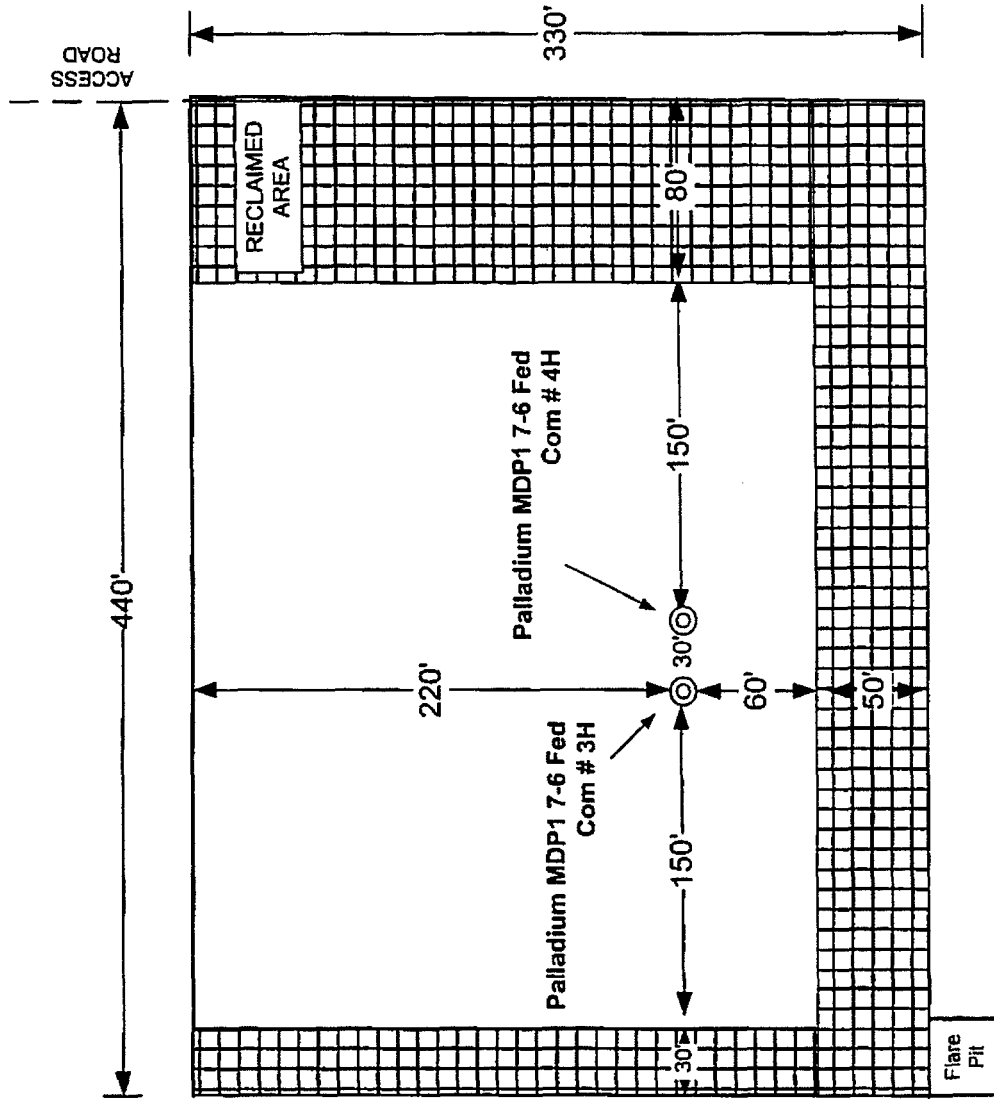

NORTH

8' Diameter x 8' Deep Tinhorn  
Cellar

FLEX 3 RIG DIAGRAM

Palladium MDP1 7-6 Fed Com # 3H &  
4H

EDDY COUNTY, NEW MEXICO

ENGINEERING RECORD

REVISION BLOCK

DESCRIPTION

NO. DATE

BY DATE


APP

CHK

BY

# OXY USA INC. PALLADIUM MDP1 "7-6" FEDERAL COM #4H SITE PLAN

FAA PERMIT: NO

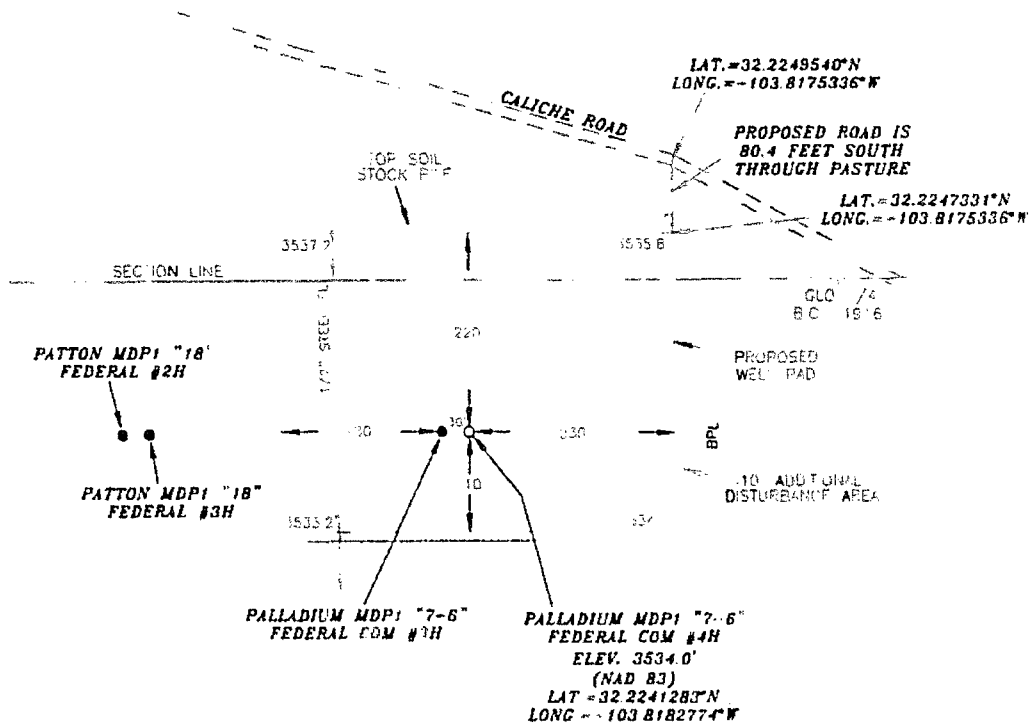

## SURVEYORS CERTIFICATE

I, TERRY J. ASEL, NEW MEXICO PROFESSIONAL SURVEYOR NO. 15079, DO HEREBY CERTIFY THAT I CONDUCTED AND AM RESPONSIBLE FOR THIS SURVEY. THAT THIS SURVEY IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF, AND MEETS THE "MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO" AS ADOPTED BY THE NEW MEXICO STATE BOARD OF REGISTRATION FOR PROFESSIONAL ENGINEERS AND SURVEYORS.


*Terry J. Asel* 9/23/2016  
Terry J. Asel N.M. R.P.L.S. No. 15079

Asel Surveying

P.O. BOX 393 10 W. RYLAND  
HOBBS, NEW MEXICO 88240-0393 9146



**LEGEND**  
 - DENOTES PROPOSED WELL PAD  
 - DENOTES PROPOSED ROAD  
 - DENOTES STOCK PILE AREA




OXY USA INC.


PALLADIUM MDP1 "7-6" FEDERAL COM #4  
LOCATED AT 169' FNL & 2285' FW  
SECTION 18, TOWNSHIP 24 SOUTH, RANGE 1  
EAST, N.M.P.M., EDDY COUNTY, NEW MEXICO

|                                  |              |                |
|----------------------------------|--------------|----------------|
| Survey Date: 06/02/16            | Sheet 1 of   | Sheets         |
| W.O. Number: 160602WL-b (Rev. A) | Drawn By: KA | Rev: A         |
| Date: 09/22/16                   | 160602WL-b   | Scale: 1"=200' |


**Pad Site Overall Rig Layout  
2 Well Pad Site**

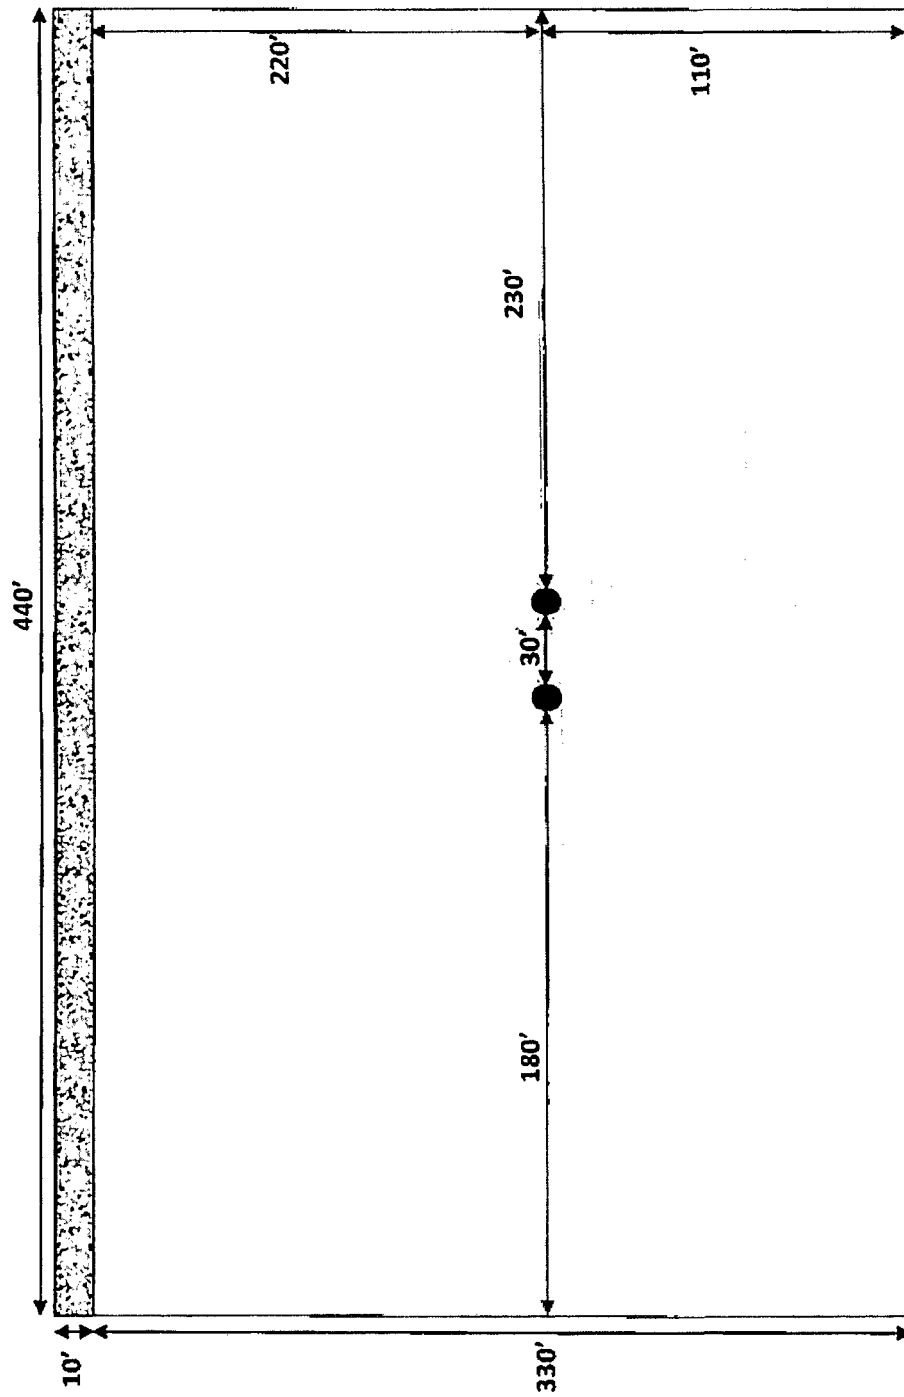

# Oxy Single Centrifuge Closed Loop System – New Mexico Flex III May 28, 2013

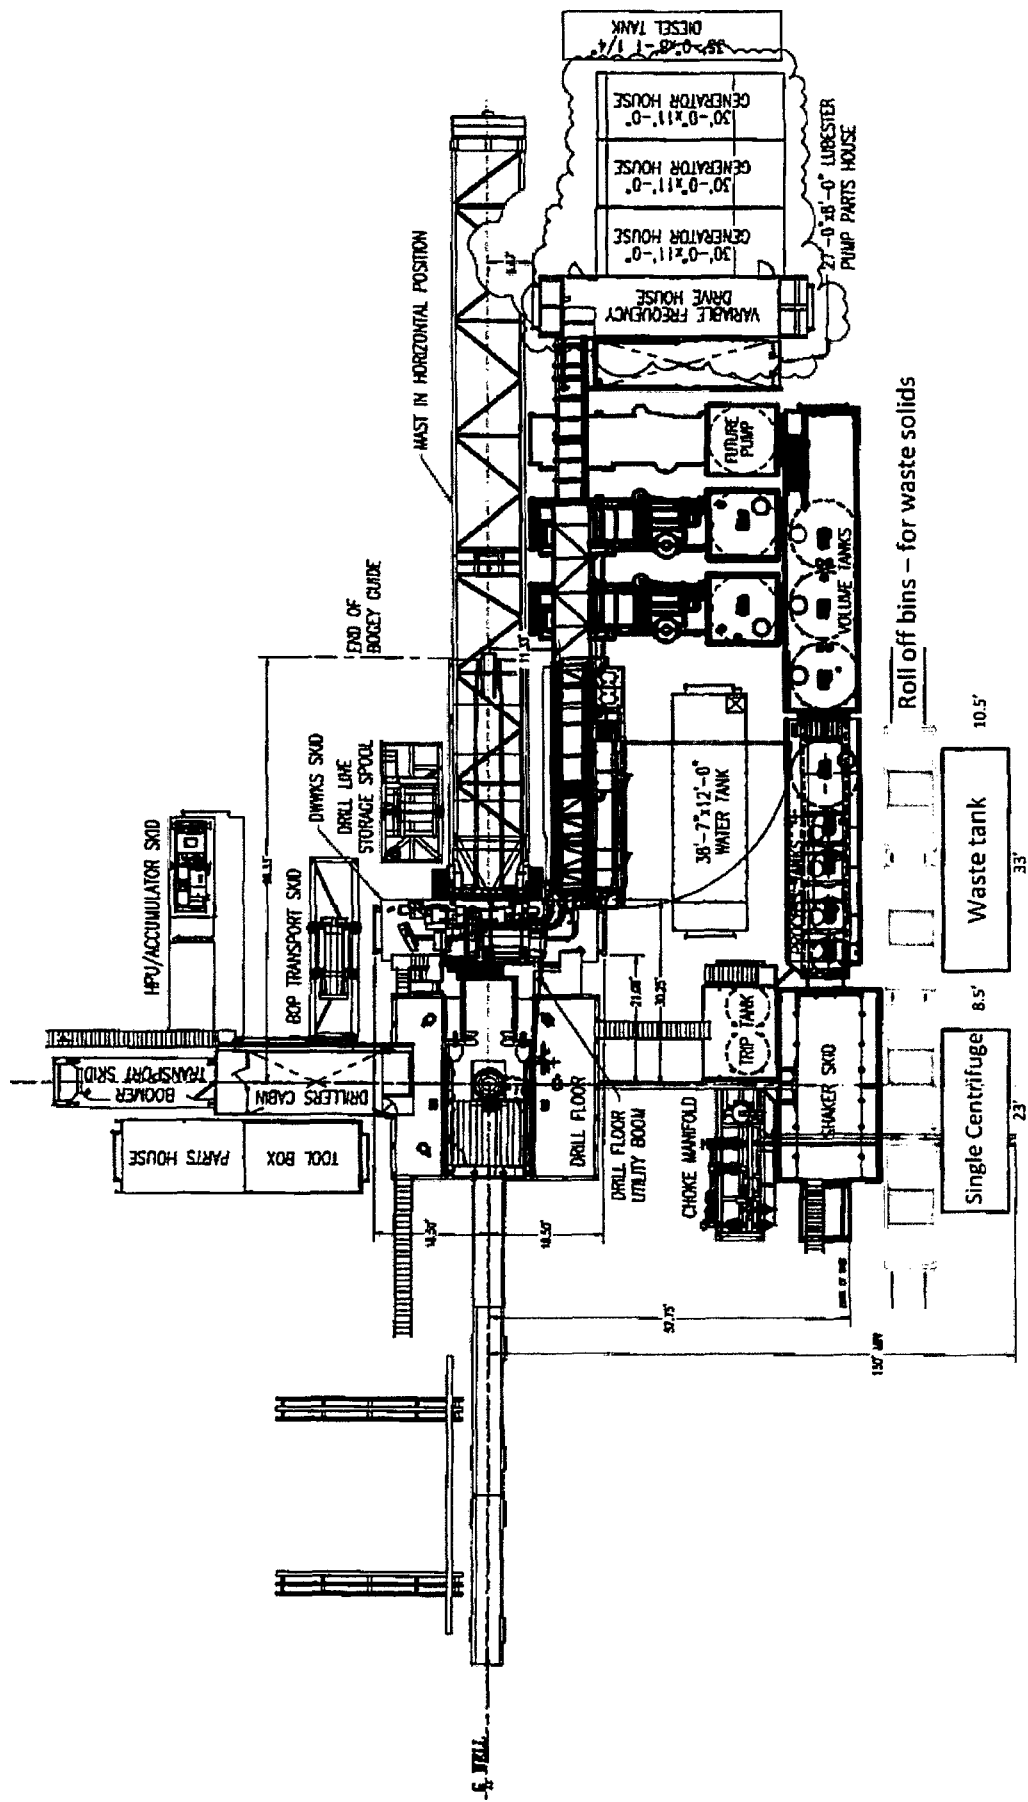


Oxy

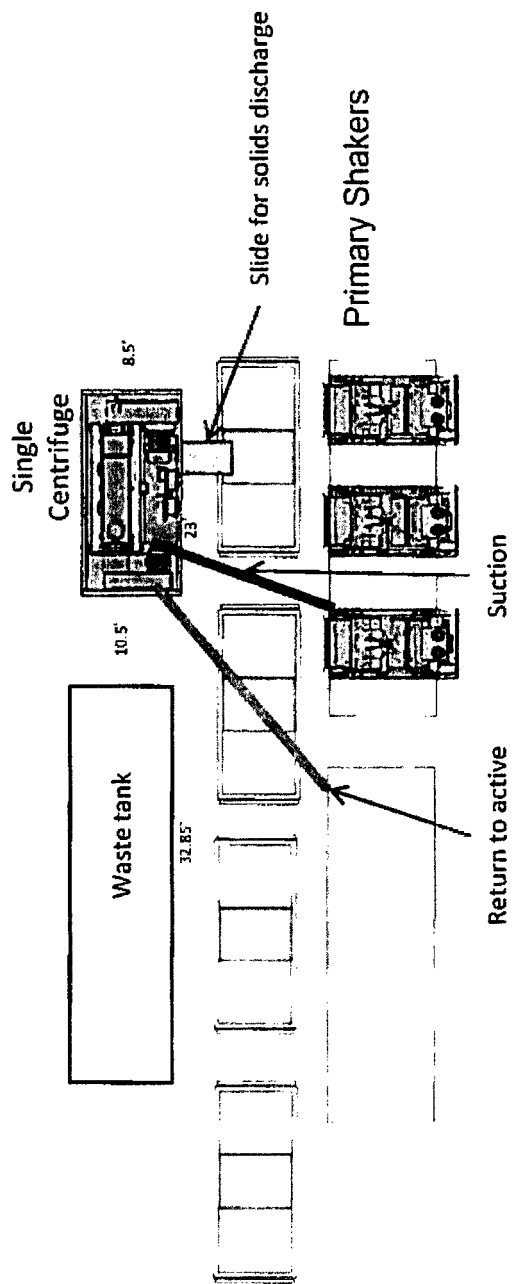

Oxy Single Centrifuge  
Closed Loop System – New  
Mexico Flex III  
May 28, 2013

SECTIONS 18, 7 & 6, TOWNSHIP 24 SOUTH, RANGE 31 EAST, N.M.P.M.,  
EDDY COUNTY NEW MEX.

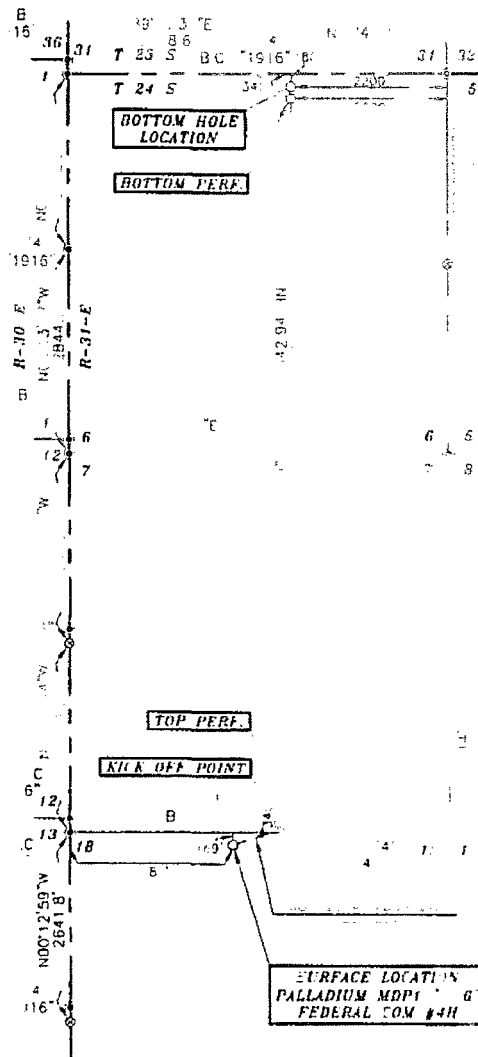

**SURVEYORS CERTIFICATE**

I, TERRY J. ASE, NEW MEXICO PROFESSIONAL SURVEYOR NO. 15079, DO HEREBY CERTIFY THAT I CONDUCTED AND AM RESPONSIBLE FOR THIS SURVEY, THAT THIS SURVEY IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF AND MEETS THE "MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO" AS ADOPTED BY THE NEW MEXICO STATE BOARD OF REGISTRATION FOR PROFESSIONAL ENGINEERS AND SURVEYORS

*Terry J. Ase* 7/25/2016  
Terry J. Ase, N.M. R.P.L.S. No. 15079

As: Surveying

93 31' W 14' 14'  
E: 0 - 75-39' 14'



|                       |  |  |                       |  |  |
|-----------------------|--|--|-----------------------|--|--|
| Survey Date: 08/02/16 |  |  | Sheet: 1 of 1         |  |  |
| W.O. Number: 15079    |  |  | Drawn By: [Signature] |  |  |
| Date: 07/31/16        |  |  | Scale: 1" = 200'      |  |  |



## OXY's Minimum Design Criteria

Burst, Collapse, and Tensile SF are calculated using Landmark's Stress Check (Casing Design) software. A sundry will be requested if any lesser grade or different size casing is substituted.

### 1) Casing Design Assumptions

#### a) Burst Loads

##### CSG Test (Surface)

- Internal: Displacement fluid + pressure required to comply with regulatory casing test pressures. This will comply with both Onshore Oil and Gas Order No. 2 and 19.15.16 of the OCD Rules.
- External: Pore pressure in open hole.

##### CSG Test (Intermediate)

- Internal: Displacement fluid + pressure required to comply with regulatory casing test pressures. This will comply with both Onshore Oil and Gas Order No. 2 and 19.15.16 of the OCD Rules.
- External: Mud Weight to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

##### CSG Test (Production)

- Internal:
  - For Drilling: Displacement fluid + pressure required to comply with regulatory casing test pressures. This will comply with both Onshore Oil and Gas Order No. 2 and 19.15.16 of the OCD Rules.
  - For Production: The design pressure test should be the greater of (1) the planned test pressure prior to stimulation down the casing. (2) the regulatory test pressure, and (3) the expected gas lift system pressure. The design test fluid should be the fluid associated with pressure test having the greatest pressure.
- External:
  - For Drilling: Mud Weight to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.
  - For Production: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

##### Gas Column (Surface)

- Internal: Assumes a full column of gas in the casing with a Gas/Oil Gradient of 0.1 psi/ft in the absence of better information. It is limited to the controlling pressure based on the fracture pressure at the shoe or the maximum expected pore pressure within the next drilling interval, whichever results in a lower surface pressure.
- External: Fluid gradient below TOC, pore pressure from the TOC to the Intermediate CSG shoe (if applicable), and MW of the drilling mud that was in the hole when the CSG was run from Intermediate CSG shoe to surface.

##### Bullheading (Surface / Intermediate)

- Internal: The string must be designed to withstand a pressure profile based on the fracture pressure at the casing shoe with a column of water above the shoe plus an additional surface pressure (in psi) of  $0.02 \times \text{MD of the shoe}$  to account for pumping friction pressure.
- External: Mud weight to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

#### Gas Kick (Intermediate)

- The string must be designed to at least a gas kick load case unless the rig is unable to detect a kick. For the gas kick load case, the internal pressure profile must be based on a minimum volume of 50 bbl or the minimum kick detection capability of the rig, whichever is greater, and a kick intensity of 2.0 ppg for Class 1, 1.0 ppg of Class 2, and 0.5 ppg for Class 3 and 4 wells.
- Internal: Influx depth of the maximum pore pressure of 0.55 "gas kick gravity" of gas to surface while drilling the next hole section.
- External: Mud weight to the TOC, cement mix water gradient below TOC, and pore pressure in open hole.

#### Tubing Leak Near Surface While Producing (Production)

- Internal: SITP plus a packer fluid gradient to the shoe or top of packer.
- External: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

#### Tubing Leak Near Surface While Stimulating (Production)

- Internal: Surface pressure or pressure-relief system pressure, whichever is lower plus packer fluid gradient.
- External: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

#### Injection / Stimulation Down Casing (Production)

- Internal: Surface pressure plus injection fluid gradient.
- External: Mud base-fluid density to TOC, cement mix water gradient (8.4 ppg) below TOC, and pore pressure in open hole.

### **b) Collapse Loads**

#### Lost Circulation (Surface / Intermediate)

- Internal: Lost circulation at the TD of the next hole section, and the fluid level falls to a depth where the hydrostatic of the mud equals pore pressure at the depth of the lost circulation zone.
- External: MW of the drilling mud that was in the hole when the casing was run.

#### Cementing (Surface / Intermediate / Production)

- Internal: Displacement fluid density.
- External: Mud weight from TOC to surface and cement slurry weight from TOC to casing shoe.

#### Full Evacuation (Production)

- Internal: Full void pipe.
- External: MW of drilling mud in the hole when the casing was run.

### **c) Tension Loads**

#### Running Casing (Surface / Intermediate / Production)

- Axial: Buoyant weight of the string plus the lesser of 100,000 lb or the string weight in air.

#### Green Cement (Surface / Intermediate / Production)

- Axial: Buoyant weight of the string plus cement plug bump pressure load.

# OXY USA Inc. - Palladium MDP1 7-6 Federal Com #4H

## 1. Geologic Formations

|               |        |                               |      |
|---------------|--------|-------------------------------|------|
| TVD of target | 10048' | Pilot Hole Depth              | N/A  |
| MD at TD:     | 20200' | Deepest Expected fresh water: | 591' |

## Delaware Basin

| Formation              | TVD - RKB   | Expected Fluids |
|------------------------|-------------|-----------------|
| Rustler                | 591         |                 |
| Salado                 | 951         |                 |
| Castile                | 2861        |                 |
| Lamar/Delaware         | 4287        | Oil/Gas         |
| Bell Canyon*           | 4333        | Water/Oil/Gas   |
| Cherry Canyon*         | 5114        | Oil/Gas         |
| Brushy Canyon*         | 6430        | Oil/Gas         |
| 1st Bone Spring        | 8110        | Oil/Gas         |
| <b>2nd Bone Spring</b> | <b>9434</b> | <b>Oil/Gas</b>  |

\*H2S, water flows, loss of circulation, abnormal pressures, etc.

## 2. Casing Program

| Hole Size (in) | Casing Interval |         | Csg. Size (in) | Weight (lbs) | Grade | Conn. | Buoyant    Buoyant |          |                 |                  |
|----------------|-----------------|---------|----------------|--------------|-------|-------|--------------------|----------|-----------------|------------------|
|                | From (ft)       | To (ft) |                |              |       |       | SF Collapse        | SF Burst | Body SF Tension | Joint SF Tension |
| 17.5           | 0               | 641     | 13.375         | 54.5         | J55   | BTC   | 5.44               | 1.34     | 2.47            | 2.64             |
| 12.25          | 0               | 4337    | 9.625          | 36           | J55   | BTC   | 3.09               | 1.28     | 2.24            | 2.56             |
| 8.5            | 0               | 20200   | 5.5            | 17           | P-110 | DQX   | 2.11               | 1.21     | 2.23            | 2.48             |

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

\*Oxy requests the option to set casing shallower yet still below the salts if losses or hole conditions require this. Cement volumes may be adjusted if casing is set shallower.

|  | Y or N |
|--|--------|
| Is casing new? If used, attach certification as required in Onshore Order #1   | Y      |
| Does casing meet API specifications? If no, attach casing specification sheet.   | Y      |
| Is premium or uncommon casing planned? If yes attach casing specification sheet.   | Y      |
| Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria). | Y      |
| Will the intermediate pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?                | Y      |
| Is well located within Capitan Reef?   | N      |
| If yes, does production casing cement tie back a minimum of 50' above the Reef?  |        |
| Is well within the designated 4 string boundary.   |        |

## OXY USA Inc. - Palladium MDP1 7-6 Federal Com #4H

|  |   |
|--|---|
| Is well located in SOPA but not in R-111-P?  | Y |
| If yes, are the first 2 strings cemented to surface and 3 <sup>rd</sup> string cement tied back 500' into previous casing? | Y |
| Is well located in R-111-P and SOPA?   | N |
| If yes, are the first three strings cemented to surface?   |   |
| Is 2 <sup>nd</sup> string set 100' to 600' below the base of salt?   |   |
| Is well located in high Cave/Karst?  | N |
| If yes, are there two strings cemented to surface?   |   |
| (For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?                                     |   |
| Is well located in critical Cave/Karst?  | N |
| If yes, are there three strings cemented to surface?   |   |

### 3. Cementing Program

| Casing       | # Sks | Wt. lb/<br>gal | Yld ft3/<br>sack | H2O gal/sk | 500# Comp.<br>Strength<br>(hours) | Slurry Description                         |
|--------------|-------|----------------|------------------|------------|-----------------------------------|--|
| Surface      | 522   | 14.8           | 1.35             | 6.53       | 6:50                              | Class C Cement, Accelerator                |
| Intermediate | 1141  | 12.9           | 1.74             | 8.67       | 15:07                             | Pozzolan Cement, retarder                  |
| Casing       | 156   | 14.8           | 1.326            | 6.34       | 6:31                              | Class H Cement, Retarder, Dispersant, Salt |
| Production   | 672   | 10.2           | 3.057            | 15.65      | 19:09                             | Class H cement                             |
| Casing       | 3505  | 13.2           | 1.631            | 8.37       | 15:15                             | Class H Cement, Retarder, Dispersant, Salt |

| Casing String          | Top of<br>Lead (ft) | Bottom of<br>Lead (ft) | Top of<br>Tail (ft) | Bottom of<br>Tail (ft) | % Excess<br>Lead | % Excess Tail |
|------------------------|---------------------|------------------------|---------------------|------------------------|------------------|---------------|
| Surface                | N/A                 | N/A                    | 0                   | 641                    | N/A              | 50%           |
| Intermediate<br>Casing | 0                   | 3837                   | 3837                | 4337                   | 75%              | 20%           |
| Production<br>Casing   | 3837                | 9121                   | 9121                | 20200                  | 75%              | 125%          |

### 4. Pressure Control Equipment

| BOP installed and<br>tested before drilling<br>which hole? | Size?   | Min.<br>Required<br>WP | Type       | ✓ | Tested to:                 |
|--|---------|------------------------|------------|---|----------------------------|
| 12.25" Intermediate  | 13-5/8" | 5M                     | Annular    | ✓ | 70% of working<br>pressure |
|  |         |                        | Blind Ram  | ✓ | 250/5000psi                |
|  |         |                        | Pipe Ram   |   |                            |
|  |         |                        | Double Ram | ✓ |                            |
|  |         |                        | Other*     |   |                            |

\*Specify if additional ram is utilized.

## OXY USA Inc. - Palladium MDP1 7-6 Federal Com #4H

BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested.

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. See attached schematics.

|   |   |
|---|---|
|   | Formation integrity test will be performed per Onshore Order #2.<br>On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.i.   |
|   | A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs and hydrostatic test chart.   |
| Y | Are anchors required by manufacturer?   |
|   | A multibowl wellhead is being used. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested. We will test the flange connection of the wellhead with a test port that is directly in the flange. We are proposing that we will run the wellhead through the rotary prior to cementing surface casing as discussed with the BLM on October 8, 2015.<br>See attached schematic. |

### 5. Mud Program

| Depth     |         | Type           | Weight (ppg) | Viscosity | Water Loss |
|-----------|---------|----------------|--------------|-----------|------------|
| From (ft) | To (ft) |                |              |           |            |
| 0         | 641     | EnerSeal (MMH) | 8.4-8.6      | 40-60     | N/C        |
| 641       | 4337    | Brine          | 9.8-10.0     | 35-45     | N/C        |
| 4337      | 9421    | EnerSeal (MMH) | 8.8-9.6      | 38-50     | N/C        |
| 9421      | 20200   | Oil-Based Mud  | 8.8-9.6      | 35-50     | N/C        |

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times. The following is a general list of products: Barite, Bentonite, Gypsum, Lime, Soda Ash, Caustic Soda, Nut Plug, Cedar Fiber, Cotton Seed Hulls, Drilling Paper, Salt Water Clay, CACL2. Oxy will use a closed mud system.

Oxy proposes to drill out the 13.375" surface casing shoe with a saturated brine system from 641' - 4337', which is the base of the salt system. At this point we will swap fluid systems to a high viscosity mixed metal hydroxide system. We will drill with this system to the KOP @ 9621'.

|   |                                |
|---|--------------------------------|
| What will be used to monitor the loss or gain of fluid? | PVT/MD Totco/Visual Monitoring |
|---|--------------------------------|

**6. Logging and Testing Procedures**

| <b>Logging, Coring and Testing.</b> |   |
|-------------------------------------|---|
| Yes                                 | Will run GR from TD to surface (horizontal well – vertical portion of hole). Stated logs run will be in the Completion Report and submitted to the BLM. |
| No                                  | Logs are planned based on well control or offset log information.   |
| No                                  | Drill stem test? If yes, explain  |
| No                                  | Coring? If yes, explain   |

| <b>Additional logs planned</b> | <b>Interval</b> |
|--------------------------------|-----------------|
| No                             | Resistivity     |
| No                             | Density         |
| No                             | CBL             |
| Yes                            | Mud log         |
| No                             | PEX             |

**7. Drilling Conditions**

| <b>Condition</b>              | <b>Specify what type and where?</b> |
|-------------------------------|-------------------------------------|
| BH Pressure at deepest TVD    | 4912 psi                            |
| Abnormal Temperature          | No                                  |
| BH Temperature at deepest TVD | 161°F                               |

Pump high viscosity sweeps as needed for hole cleaning. The mud system will be monitored visually/manually as well as with an electronic PVT. The necessary mud products for additional weight and fluid loss control will be on location at all times. Appropriately weighted mud will be used to isolate potential gas, oil, and water zones until such time as casing can be cemented into place for zonal isolation.

|  |                   |
|--|-------------------|
| Hydrogen Sulfide (H2S) monitors will be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of Onshore Oil and Gas Order #6. If Hydrogen Sulfide is encountered, measured values and formations will be provided to the BLM. |                   |
| N  | H2S is present    |
| Y  | H2S Plan attached |

**OXY USA Inc. - Palladium MDP1 7-6 Federal Com #4H**

**8. Other facets of operation**

|  | <b>Yes/No</b> |
|--|---------------|
| Will the well be drilled with a walking/skidding operation? If yes, describe. <ul style="list-style-type: none"><li>We plan to drill the two well pad in batch by section: all surface sections, intermediate sections and production sections. The wellhead will be secured with a night cap whenever the rig is not over the well.</li></ul> | Yes           |
| Will more than one drilling rig be used for drilling operations? If yes, describe.   | No            |

**Total estimated cuttings volume:** 1842.9 bbls.

**9. Company Personnel**


| <b>Name</b>     | <b>Title</b>                 | <b>Office Phone</b> | <b>Mobile Phone</b> |
|-----------------|------------------------------|---------------------|---------------------|
| Ludwing Franco  | Drilling Engineer            | 713-366-5174        | 832-523-6392        |
| Tim Barnard     | Drilling Engineer Team Lead  | 713-366-5706        | 281-740-3084        |
| Amrut Athavale  | Drilling Engineer Supervisor | 713-350-4747        | 281-740-4448        |
| Simon Benavides | Drilling Superintendent      | 713-522-8652        | 281-684-6897        |
| John Willis     | Drilling Manager             | 713-366-5556        | 713-259-1417        |



Project: PRD NM DIRECTIONAL PLANS (NAD 1983)  
Site: Palladium 7/6  
Well: Palladium MDP1 7/6 Federal Com 4H  
Wellbore: WB00  
Design: Permitting Plan

### WELL DETAILS: Palladium MDP1 7/6 Federal Com 4H

Ground Level: 3534.00 RFE @ 3560.50ft (Original Well Elev)  
+N/-S +E/-W Northing Easting Latitude Longitude  
0.00 0.00 445653.44 700610.02 32° 13' 26.861951 N 103° 49' 5.798622 W

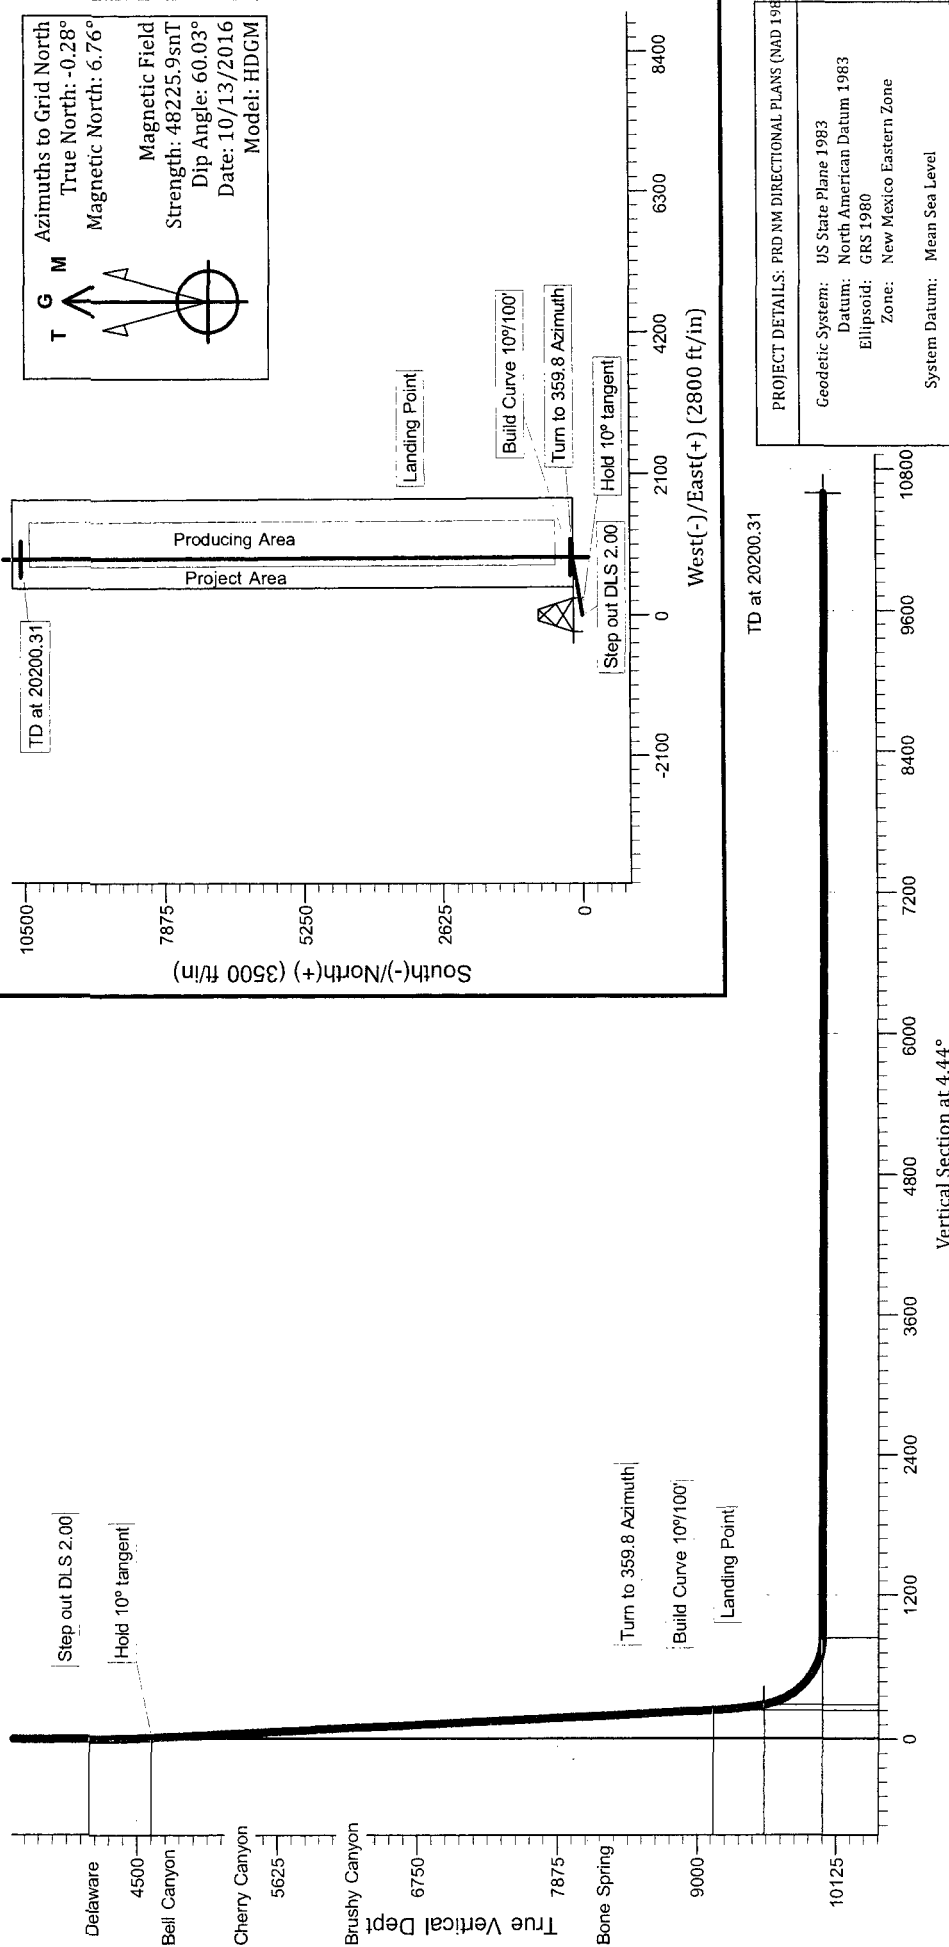

### ANNOTATIONS

| TVD      | MD       | Inc   | Azi    | +N/-S    | +E/-W  | Vsect    | Departure | Annotation            |
|----------|----------|-------|--------|----------|--------|----------|-----------|-----------------------|
| 4114.00  | 4114.00  | 0.00  | 0.00   | 0.00     | 0.00   | 0.00     | 0.00      | Step out DLS 2.00     |
| 4611.33  | 4613.86  | 10.00 | 77.72  | 9.25     | 42.50  | 12.51    | 43.50     | Hold 10° tangent      |
| 9130.84  | 9203.05  | 10.00 | 77.72  | 178.66   | 820.97 | 241.64   | 840.19    | Turn to 359.8 Azimuth |
| 9544.00  | 9620.91  | 10.00 | 359.79 | 222.83   | 856.42 | 288.42   | 902.99    | Build Curve 10°/100'  |
| 10017.46 | 10418.71 | 89.78 | 359.79 | 784.88   | 854.41 | 848.62   | 1465.05   | Landing Point         |
| 10048.00 | 20200.31 | 89.82 | 359.80 | 10566.37 | 819.82 | 10598.13 | 11246.60  | TD at 20200.31        |



**OXY**

**PRD NM DIRECTIONAL PLANS (NAD 1983)**

**Palladium 7/6**

**Palladium MDP1 7/6 Federal Com 4H**

**WB00**

**Plan: Permitting Plan**

# **Standard Planning Report**

**07 November, 2016**

# Oxy

## Planning Report

**Database:** HOPSPP  
**Company:** OXY  
**Project:** PRD NM DIRECTIONAL PLANS (NAD 1983)  
**Site:** Palladium 7/6  
**Well:** Palladium MDP1 7/6 Federal Com 4H  
**Wellbore:** WB00  
**Design:** Permitting Plan

**Local Co-ordinate Reference:** Well Palladium MDP1 7/6 Federal Com 4H  
**TVD Reference:** RFE @ 3560.50ft (Original Well Elev)  
**MD Reference:** RFE @ 3560.50ft (Original Well Elev)  
**North Reference:** Grid  
**Survey Calculation Method:** Minimum Curvature

|                    |                                     |                             |                |
|--------------------|-------------------------------------|-----------------------------|----------------|
| <b>Project</b>     | PRD NM DIRECTIONAL PLANS (NAD 1983) |                             |                |
| <b>Map System:</b> | US State Plane 1983                 | <b>System Datum:</b>        | Mean Sea Level |
| <b>Geo Datum:</b>  | North American Datum 1983           |                             |                |
| <b>Map Zone:</b>   | New Mexico Eastern Zone             | Using geodetic scale factor |                |

|                       |     |               |                 |            |                      |        |
|-----------------------|-----|---------------|-----------------|------------|----------------------|--------|
| Site                  |     | Palladium 7/6 |                 |            |                      |        |
| Site Position:        |     | Northing:     | 446,423.41 usft | Latitude:  | 32° 13' 34.557131 N  |        |
| From:                 | Map | Easting:      | 699,003.75 usft | Longitude: | 103° 49' 24.455146 W |        |
| Position Uncertainty: |     | 0.00 ft       | Slot Radius:    | 13.200 in  | Grid Convergence:    | 0.27 ° |

|                      |                                   |                     |             |                 |             |                     |
|----------------------|-----------------------------------|---------------------|-------------|-----------------|-------------|---------------------|
| Well                 | Palladium MDP1 7/6 Federal Com 4H |                     |             |                 |             |                     |
| Well Position        | +N/-S                             | -770.02 ft          | Northing:   | 445,653.44 usft | Latitude:   | 32° 13' 26.861951 N |
|                      | +E/-W                             | 1,606.37 ft         | Easting:    | 700,610.02 usft | Longitude:  | 103° 49' 5.798622 W |
| Position Uncertainty | 0.00 ft                           | Wellhead Elevation: | 3,534.00 ft | Ground Level:   | 3,534.00 ft |                     |

|                  |                   |                    |                        |                      |                            |
|------------------|-------------------|--------------------|------------------------|----------------------|----------------------------|
| <b>Wellbore</b>  | WB00              |                    |                        |                      |                            |
| <b>Magnetics</b> | <b>Model Name</b> | <b>Sample Date</b> | <b>Declination (°)</b> | <b>Dip Angle (°)</b> | <b>Field Strength (nT)</b> |
|                  | HDGM              | 10/13/2016         | 7.03                   | 60.03                | 48,226                     |

|                          |                              |                   |                      |                      |  |
|--------------------------|------------------------------|-------------------|----------------------|----------------------|--|
| <b>Design</b>            | Permitting Plan              |                   |                      |                      |  |
| <b>Audit Notes:</b>      |                              |                   |                      |                      |  |
| <b>Version:</b>          | <b>Phase:</b>                | PLAN              | <b>Tie On Depth:</b> | 0.00                 |  |
| <b>Vertical Section:</b> | <b>Depth From (TVD) (ft)</b> | <b>+N/-S (ft)</b> | <b>+E/-W (ft)</b>    | <b>Direction (°)</b> |  |
|                          | 0.00                         | 0.00              | 0.00                 | 4.44                 |  |

| Plan Sections       |                 |             |                     |            |            |                       |                      |                     |         |                |
|---------------------|-----------------|-------------|---------------------|------------|------------|-----------------------|----------------------|---------------------|---------|----------------|
| Measured Depth (ft) | Inclination (°) | Azimuth (°) | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Turn Rate (°/100ft) | TFO (°) | Target         |
| 0.00                | 0.00            | 0.00        | 0.00                | 0.00       | 0.00       | 0.00                  | 0.00                 | 0.00                | 0.00    |                |
| 4,114.00            | 0.00            | 0.00        | 4,114.00            | 0.00       | 0.00       | 0.00                  | 0.00                 | 0.00                | 0.00    |                |
| 4,613.86            | 10.00           | 77.72       | 4,611.33            | 9.25       | 42.50      | 2.00                  | 2.00                 | 0.00                | 77.72   |                |
| 9,203.04            | 10.00           | 77.72       | 9,130.82            | 178.66     | 820.97     | 0.00                  | 0.00                 | 0.00                | 0.00    |                |
| 9,620.91            | 10.00           | 359.79      | 9,544.00            | 222.83     | 856.42     | 3.00                  | 0.00                 | -18.65              | -128.53 | Pal_7-6_4H-KOP |
| 10,419.11           | 89.82           | 359.79      | 10,017.46           | 785.28     | 854.41     | 10.00                 | 10.00                | 0.00                | 0.00    |                |
| 20,200.31           | 89.82           | 359.80      | 10,048.00           | 10,566.37  | 819.82     | 0.00                  | 0.00                 | 0.00                | 69.00   | Pal_7-6_4H_BHL |

# Oxy

## Planning Report

**Database:** HOPSPP  
**Company:** OXY  
**Project:** PRD NM DIRECTIONAL PLANS (NAD 1983)  
**Site:** Palladium 7/6  
**Well:** Palladium MDP1 7/6 Federal Com 4H  
**Wellbore:** WB00  
**Design:** Permitting Plan

**Local Co-ordinate Reference:** Well Palladium MDP1 7/6 Federal Com 4H  
**TVD Reference:** RFE @ 3560.50ft (Original Well Elev)  
**MD Reference:** RFE @ 3560.50ft (Original Well Elev)  
**North Reference:** Grid  
**Survey Calculation Method:** Minimum Curvature

| Planned Survey           |                 |             |                     |            |            |                       |                       |                      |                     |
|--------------------------|-----------------|-------------|---------------------|------------|------------|-----------------------|-----------------------|----------------------|---------------------|
| Measured Depth (ft)      | Inclination (°) | Azimuth (°) | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Vertical Section (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Turn Rate (°/100ft) |
| 0.00                     | 0.00            | 0.00        | 0.00                | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| 591.00                   | 0.00            | 0.00        | 591.00              | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| <b>Rustler</b>           |                 |             |                     |            |            |                       |                       |                      |                     |
| 951.00                   | 0.00            | 0.00        | 951.00              | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| <b>Salado</b>            |                 |             |                     |            |            |                       |                       |                      |                     |
| 2,861.00                 | 0.00            | 0.00        | 2,861.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| <b>Castile</b>           |                 |             |                     |            |            |                       |                       |                      |                     |
| 4,114.00                 | 0.00            | 0.00        | 4,114.00            | 0.00       | 0.00       | 0.00                  | 0.00                  | 0.00                 | 0.00                |
| <b>Step out DLS 2.00</b> |                 |             |                     |            |            |                       |                       |                      |                     |
| 4,200.00                 | 1.72            | 77.72       | 4,199.99            | 0.27       | 1.26       | 0.37                  | 2.00                  | 2.00                 | 0.00                |
| 4,287.11                 | 3.46            | 77.72       | 4,287.00            | 1.11       | 5.11       | 1.50                  | 2.00                  | 2.00                 | 0.00                |
| <b>Delaware</b>          |                 |             |                     |            |            |                       |                       |                      |                     |
| 4,300.00                 | 3.72            | 77.72       | 4,299.87            | 1.28       | 5.90       | 1.74                  | 2.00                  | 2.00                 | 0.00                |
| 4,333.21                 | 4.38            | 77.72       | 4,333.00            | 1.78       | 8.19       | 2.41                  | 2.00                  | 2.00                 | 0.00                |
| <b>Bell Canyon</b>       |                 |             |                     |            |            |                       |                       |                      |                     |
| 4,400.00                 | 5.72            | 77.72       | 4,399.53            | 3.03       | 13.94      | 4.10                  | 2.00                  | 2.00                 | 0.00                |
| 4,500.00                 | 7.72            | 77.72       | 4,498.83            | 5.52       | 25.37      | 7.47                  | 2.00                  | 2.00                 | 0.00                |
| 4,600.00                 | 9.72            | 77.72       | 4,597.67            | 8.75       | 40.18      | 11.83                 | 2.00                  | 2.00                 | 0.00                |
| 4,613.86                 | 10.00           | 77.72       | 4,611.33            | 9.25       | 42.50      | 12.51                 | 2.00                  | 2.00                 | 0.00                |
| <b>Hold 10° tangent</b>  |                 |             |                     |            |            |                       |                       |                      |                     |
| 4,700.00                 | 10.00           | 77.72       | 4,696.16            | 12.43      | 57.12      | 16.81                 | 0.00                  | 0.00                 | 0.00                |
| 4,800.00                 | 10.00           | 77.72       | 4,794.64            | 16.12      | 74.08      | 21.80                 | 0.00                  | 0.00                 | 0.00                |
| 4,900.00                 | 10.00           | 77.72       | 4,893.12            | 19.81      | 91.04      | 26.80                 | 0.00                  | 0.00                 | 0.00                |
| 5,000.00                 | 10.00           | 77.72       | 4,991.60            | 23.50      | 108.00     | 31.79                 | 0.00                  | 0.00                 | 0.00                |
| 5,100.00                 | 10.00           | 77.72       | 5,090.09            | 27.20      | 124.97     | 36.78                 | 0.00                  | 0.00                 | 0.00                |
| 5,124.28                 | 10.00           | 77.72       | 5,114.00            | 28.09      | 129.09     | 37.99                 | 0.00                  | 0.00                 | 0.00                |
| <b>Cherry Canyon</b>     |                 |             |                     |            |            |                       |                       |                      |                     |
| 5,200.00                 | 10.00           | 77.72       | 5,188.57            | 30.89      | 141.93     | 41.77                 | 0.00                  | 0.00                 | 0.00                |
| 5,300.00                 | 10.00           | 77.72       | 5,287.05            | 34.58      | 158.89     | 46.77                 | 0.00                  | 0.00                 | 0.00                |
| 5,400.00                 | 10.00           | 77.72       | 5,385.53            | 38.27      | 175.86     | 51.76                 | 0.00                  | 0.00                 | 0.00                |
| 5,500.00                 | 10.00           | 77.72       | 5,484.01            | 41.96      | 192.82     | 56.75                 | 0.00                  | 0.00                 | 0.00                |
| 5,600.00                 | 10.00           | 77.72       | 5,582.49            | 45.65      | 209.78     | 61.75                 | 0.00                  | 0.00                 | 0.00                |
| 5,700.00                 | 10.00           | 77.72       | 5,680.98            | 49.35      | 226.75     | 66.74                 | 0.00                  | 0.00                 | 0.00                |
| 5,800.00                 | 10.00           | 77.72       | 5,779.46            | 53.04      | 243.71     | 71.73                 | 0.00                  | 0.00                 | 0.00                |
| 5,900.00                 | 10.00           | 77.72       | 5,877.94            | 56.73      | 260.67     | 76.72                 | 0.00                  | 0.00                 | 0.00                |
| 6,000.00                 | 10.00           | 77.72       | 5,976.42            | 60.42      | 277.64     | 81.72                 | 0.00                  | 0.00                 | 0.00                |
| 6,100.00                 | 10.00           | 77.72       | 6,074.90            | 64.11      | 294.60     | 86.71                 | 0.00                  | 0.00                 | 0.00                |
| 6,200.00                 | 10.00           | 77.72       | 6,173.38            | 67.80      | 311.56     | 91.70                 | 0.00                  | 0.00                 | 0.00                |
| 6,300.00                 | 10.00           | 77.72       | 6,271.87            | 71.50      | 328.53     | 96.69                 | 0.00                  | 0.00                 | 0.00                |
| 6,400.00                 | 10.00           | 77.72       | 6,370.35            | 75.19      | 345.49     | 101.69                | 0.00                  | 0.00                 | 0.00                |
| 6,460.57                 | 10.00           | 77.72       | 6,430.00            | 77.42      | 355.76     | 104.71                | 0.00                  | 0.00                 | 0.00                |
| <b>Brushy Canyon</b>     |                 |             |                     |            |            |                       |                       |                      |                     |
| 6,500.00                 | 10.00           | 77.72       | 6,468.83            | 78.88      | 362.45     | 106.68                | 0.00                  | 0.00                 | 0.00                |
| 6,600.00                 | 10.00           | 77.72       | 6,567.31            | 82.57      | 379.41     | 111.67                | 0.00                  | 0.00                 | 0.00                |
| 6,700.00                 | 10.00           | 77.72       | 6,665.79            | 86.26      | 396.38     | 116.67                | 0.00                  | 0.00                 | 0.00                |
| 6,800.00                 | 10.00           | 77.72       | 6,764.27            | 89.95      | 413.34     | 121.66                | 0.00                  | 0.00                 | 0.00                |
| 6,900.00                 | 10.00           | 77.72       | 6,862.75            | 93.64      | 430.30     | 126.65                | 0.00                  | 0.00                 | 0.00                |
| 7,000.00                 | 10.00           | 77.72       | 6,961.24            | 97.34      | 447.27     | 131.64                | 0.00                  | 0.00                 | 0.00                |
| 7,100.00                 | 10.00           | 77.72       | 7,059.72            | 101.03     | 464.23     | 136.64                | 0.00                  | 0.00                 | 0.00                |
| 7,200.00                 | 10.00           | 77.72       | 7,158.20            | 104.72     | 481.19     | 141.63                | 0.00                  | 0.00                 | 0.00                |
| 7,300.00                 | 10.00           | 77.72       | 7,256.68            | 108.41     | 498.16     | 146.62                | 0.00                  | 0.00                 | 0.00                |
| 7,400.00                 | 10.00           | 77.72       | 7,355.16            | 112.10     | 515.12     | 151.61                | 0.00                  | 0.00                 | 0.00                |
| 7,500.00                 | 10.00           | 77.72       | 7,453.64            | 115.79     | 532.08     | 156.61                | 0.00                  | 0.00                 | 0.00                |

# Oxy

## Planning Report

**Database:** HOPSP  
**Company:** OXY  
**Project:** PRD NM DIRECTIONAL PLANS (NAD 1983)  
**Site:** Palladium 7/6  
**Well:** Palladium MDP1 7/6 Federal Com 4H  
**Wellbore:** WB00  
**Design:** Permitting Plan

**Local Co-ordinate Reference:** Well Palladium MDP1 7/6 Federal Com 4H  
**TVD Reference:** RFE @ 3560.50ft (Original Well Elev)  
**MD Reference:** RFE @ 3560.50ft (Original Well Elev)  
**North Reference:** Grid  
**Survey Calculation Method:** Minimum Curvature

### Planned Survey

| Measured Depth (ft)                          | Inclination (°) | Azimuth (°) | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Vertical Section (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Turn Rate (°/100ft) |
|--|-----------------|-------------|---------------------|------------|------------|-----------------------|-----------------------|----------------------|---------------------|
| 7,600.00                                     | 10.00           | 77.72       | 7,552.13            | 119.49     | 549.05     | 161.60                | 0.00                  | 0.00                 | 0.00                |
| 7,700.00                                     | 10.00           | 77.72       | 7,650.61            | 123.18     | 566.01     | 166.59                | 0.00                  | 0.00                 | 0.00                |
| 7,800.00                                     | 10.00           | 77.72       | 7,749.09            | 126.87     | 582.97     | 171.58                | 0.00                  | 0.00                 | 0.00                |
| 7,900.00                                     | 10.00           | 77.72       | 7,847.57            | 130.56     | 599.94     | 176.58                | 0.00                  | 0.00                 | 0.00                |
| 8,000.00                                     | 10.00           | 77.72       | 7,946.05            | 134.25     | 616.90     | 181.57                | 0.00                  | 0.00                 | 0.00                |
| 8,100.00                                     | 10.00           | 77.72       | 8,044.53            | 137.94     | 633.86     | 186.56                | 0.00                  | 0.00                 | 0.00                |
| 8,166.48                                     | 10.00           | 77.72       | 8,110.00            | 140.40     | 645.14     | 189.88                | 0.00                  | 0.00                 | 0.00                |
| <b>Bone Spring</b>                           |                 |             |                     |            |            |                       |                       |                      |                     |
| 8,200.00                                     | 10.00           | 77.72       | 8,143.02            | 141.64     | 650.82     | 191.56                | 0.00                  | 0.00                 | 0.00                |
| 8,300.00                                     | 10.00           | 77.72       | 8,241.50            | 145.33     | 667.79     | 196.55                | 0.00                  | 0.00                 | 0.00                |
| 8,400.00                                     | 10.00           | 77.72       | 8,339.98            | 149.02     | 684.75     | 201.54                | 0.00                  | 0.00                 | 0.00                |
| 8,500.00                                     | 10.00           | 77.72       | 8,438.46            | 152.71     | 701.71     | 206.53                | 0.00                  | 0.00                 | 0.00                |
| 8,600.00                                     | 10.00           | 77.72       | 8,536.94            | 156.40     | 718.68     | 211.53                | 0.00                  | 0.00                 | 0.00                |
| 8,700.00                                     | 10.00           | 77.72       | 8,635.42            | 160.09     | 735.64     | 216.52                | 0.00                  | 0.00                 | 0.00                |
| 8,800.00                                     | 10.00           | 77.72       | 8,733.91            | 163.79     | 752.60     | 221.51                | 0.00                  | 0.00                 | 0.00                |
| 8,900.00                                     | 10.00           | 77.72       | 8,832.39            | 167.48     | 769.57     | 226.50                | 0.00                  | 0.00                 | 0.00                |
| 9,000.00                                     | 10.00           | 77.72       | 8,930.87            | 171.17     | 786.53     | 231.50                | 0.00                  | 0.00                 | 0.00                |
| 9,100.00                                     | 10.00           | 77.72       | 9,029.35            | 174.86     | 803.49     | 236.49                | 0.00                  | 0.00                 | 0.00                |
| 9,200.00                                     | 10.00           | 77.72       | 9,127.83            | 178.55     | 820.46     | 241.48                | 0.00                  | 0.00                 | 0.00                |
| 9,203.04                                     | 10.00           | 77.72       | 9,130.82            | 178.66     | 820.97     | 241.63                | 0.00                  | 0.00                 | 0.00                |
| 9,203.05                                     | 10.00           | 77.72       | 9,130.84            | 178.66     | 820.97     | 241.64                | 0.00                  | 0.00                 | 0.00                |
| <b>Turn to 359.8 Azimuth</b>                 |                 |             |                     |            |            |                       |                       |                      |                     |
| 9,300.00                                     | 8.49            | 62.13       | 9,226.54            | 183.80     | 835.53     | 247.88                | 3.00                  | -1.55                | -16.08              |
| 9,400.00                                     | 7.81            | 41.40       | 9,325.55            | 192.35     | 846.55     | 257.26                | 3.00                  | -0.68                | -20.73              |
| 9,500.00                                     | 8.24            | 20.00       | 9,424.59            | 204.19     | 853.50     | 269.60                | 3.00                  | 0.42                 | -21.40              |
| 9,600.00                                     | 9.62            | 2.73        | 9,523.39            | 219.27     | 856.35     | 284.86                | 3.00                  | 1.38                 | -17.26              |
| 9,620.91                                     | 10.00           | 359.79      | 9,544.00            | 222.83     | 856.42     | 288.42                | 3.00                  | 1.81                 | -14.04              |
| <b>Build Curve 10°/100' - Pal_7-6_4H-KOP</b> |                 |             |                     |            |            |                       |                       |                      |                     |
| 9,700.00                                     | 17.91           | 359.79      | 9,620.69            | 241.89     | 856.36     | 307.41                | 10.00                 | 10.00                | 0.00                |
| 9,800.00                                     | 27.91           | 359.79      | 9,712.69            | 280.77     | 856.22     | 346.16                | 10.00                 | 10.00                | 0.00                |
| 9,900.00                                     | 37.91           | 359.79      | 9,796.54            | 335.03     | 856.02     | 400.24                | 10.00                 | 10.00                | 0.00                |
| 10,000.00                                    | 47.91           | 359.79      | 9,869.69            | 403.03     | 855.78     | 468.02                | 10.00                 | 10.00                | 0.00                |
| 10,100.00                                    | 57.91           | 359.79      | 9,929.92            | 482.69     | 855.49     | 547.42                | 10.00                 | 10.00                | 0.00                |
| 10,200.00                                    | 67.91           | 359.79      | 9,975.40            | 571.61     | 855.17     | 636.05                | 10.00                 | 10.00                | 0.00                |
| 10,300.00                                    | 77.91           | 359.79      | 10,004.75           | 667.07     | 854.83     | 731.20                | 10.00                 | 10.00                | 0.00                |
| 10,400.00                                    | 87.91           | 359.79      | 10,017.08           | 766.18     | 854.48     | 829.98                | 10.00                 | 10.00                | 0.00                |
| 10,418.71                                    | 89.78           | 359.79      | 10,017.46           | 784.88     | 854.41     | 848.62                | 10.00                 | 10.00                | 0.00                |
| <b>Landing Point</b>                         |                 |             |                     |            |            |                       |                       |                      |                     |
| 10,419.11                                    | 89.82           | 359.79      | 10,017.46           | 785.28     | 854.41     | 849.02                | 10.00                 | 10.00                | 0.00                |
| 10,500.00                                    | 89.82           | 359.79      | 10,017.72           | 866.17     | 854.12     | 929.65                | 0.00                  | 0.00                 | 0.00                |
| 10,600.00                                    | 89.82           | 359.79      | 10,018.03           | 966.17     | 853.76     | 1,029.32              | 0.00                  | 0.00                 | 0.00                |
| 10,700.00                                    | 89.82           | 359.79      | 10,018.34           | 1,066.17   | 853.40     | 1,128.99              | 0.00                  | 0.00                 | 0.00                |
| 10,800.00                                    | 89.82           | 359.79      | 10,018.66           | 1,166.17   | 853.04     | 1,228.66              | 0.00                  | 0.00                 | 0.00                |
| 10,900.00                                    | 89.82           | 359.79      | 10,018.97           | 1,266.17   | 852.68     | 1,328.33              | 0.00                  | 0.00                 | 0.00                |
| 11,000.00                                    | 89.82           | 359.79      | 10,019.29           | 1,366.17   | 852.33     | 1,428.00              | 0.00                  | 0.00                 | 0.00                |
| 11,100.00                                    | 89.82           | 359.79      | 10,019.60           | 1,466.16   | 851.97     | 1,527.68              | 0.00                  | 0.00                 | 0.00                |
| 11,200.00                                    | 89.82           | 359.79      | 10,019.91           | 1,566.16   | 851.61     | 1,627.35              | 0.00                  | 0.00                 | 0.00                |
| 11,300.00                                    | 89.82           | 359.80      | 10,020.23           | 1,666.16   | 851.25     | 1,727.02              | 0.00                  | 0.00                 | 0.00                |
| 11,400.00                                    | 89.82           | 359.80      | 10,020.54           | 1,766.16   | 850.89     | 1,826.69              | 0.00                  | 0.00                 | 0.00                |
| 11,500.00                                    | 89.82           | 359.80      | 10,020.86           | 1,866.16   | 850.54     | 1,926.36              | 0.00                  | 0.00                 | 0.00                |
| 11,600.00                                    | 89.82           | 359.80      | 10,021.17           | 1,966.16   | 850.18     | 2,026.03              | 0.00                  | 0.00                 | 0.00                |
| 11,700.00                                    | 89.82           | 359.80      | 10,021.48           | 2,066.16   | 849.82     | 2,125.70              | 0.00                  | 0.00                 | 0.00                |
| 11,800.00                                    | 89.82           | 359.80      | 10,021.80           | 2,166.16   | 849.46     | 2,225.38              | 0.00                  | 0.00                 | 0.00                |

# Oxy

## Planning Report

**Database:** HOPSP  
**Company:** OXY  
**Project:** PRD NM DIRECTIONAL PLANS (NAD 1983)  
**Site:** Palladium 7/6  
**Well:** Palladium MDP1 7/6 Federal Com 4H  
**Wellbore:** WB00  
**Design:** Permitting Plan

**Local Co-ordinate Reference:** Well Palladium MDP1 7/6 Federal Com 4H  
**TVD Reference:** RFE @ 3560.50ft (Original Well Elev)  
**MD Reference:** RFE @ 3560.50ft (Original Well Elev)  
**North Reference:** Grid  
**Survey Calculation Method:** Minimum Curvature

| Planned Survey      |                 |             |                     |            |            |                       |                       |                      |                     |
|---------------------|-----------------|-------------|---------------------|------------|------------|-----------------------|-----------------------|----------------------|---------------------|
| Measured Depth (ft) | Inclination (°) | Azimuth (°) | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Vertical Section (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Turn Rate (°/100ft) |
| 11,900.00           | 89.82           | 359.80      | 10,022.11           | 2,266.16   | 849.11     | 2,325.05              | 0.00                  | 0.00                 | 0.00                |
| 12,000.00           | 89.82           | 359.80      | 10,022.42           | 2,366.15   | 848.75     | 2,424.72              | 0.00                  | 0.00                 | 0.00                |
| 12,100.00           | 89.82           | 359.80      | 10,022.74           | 2,466.15   | 848.39     | 2,524.39              | 0.00                  | 0.00                 | 0.00                |
| 12,200.00           | 89.82           | 359.80      | 10,023.05           | 2,566.15   | 848.04     | 2,624.06              | 0.00                  | 0.00                 | 0.00                |
| 12,300.00           | 89.82           | 359.80      | 10,023.36           | 2,666.15   | 847.68     | 2,723.73              | 0.00                  | 0.00                 | 0.00                |
| 12,400.00           | 89.82           | 359.80      | 10,023.68           | 2,766.15   | 847.32     | 2,823.41              | 0.00                  | 0.00                 | 0.00                |
| 12,500.00           | 89.82           | 359.80      | 10,023.99           | 2,866.15   | 846.97     | 2,923.08              | 0.00                  | 0.00                 | 0.00                |
| 12,600.00           | 89.82           | 359.80      | 10,024.30           | 2,966.15   | 846.61     | 3,022.75              | 0.00                  | 0.00                 | 0.00                |
| 12,700.00           | 89.82           | 359.80      | 10,024.62           | 3,066.15   | 846.25     | 3,122.42              | 0.00                  | 0.00                 | 0.00                |
| 12,800.00           | 89.82           | 359.80      | 10,024.93           | 3,166.15   | 845.90     | 3,222.09              | 0.00                  | 0.00                 | 0.00                |
| 12,900.00           | 89.82           | 359.80      | 10,025.24           | 3,266.14   | 845.54     | 3,321.76              | 0.00                  | 0.00                 | 0.00                |
| 13,000.00           | 89.82           | 359.80      | 10,025.56           | 3,366.14   | 845.19     | 3,421.44              | 0.00                  | 0.00                 | 0.00                |
| 13,100.00           | 89.82           | 359.80      | 10,025.87           | 3,466.14   | 844.83     | 3,521.11              | 0.00                  | 0.00                 | 0.00                |
| 13,200.00           | 89.82           | 359.80      | 10,026.18           | 3,566.14   | 844.47     | 3,620.78              | 0.00                  | 0.00                 | 0.00                |
| 13,300.00           | 89.82           | 359.80      | 10,026.50           | 3,666.14   | 844.12     | 3,720.45              | 0.00                  | 0.00                 | 0.00                |
| 13,400.00           | 89.82           | 359.80      | 10,026.81           | 3,766.14   | 843.76     | 3,820.12              | 0.00                  | 0.00                 | 0.00                |
| 13,500.00           | 89.82           | 359.80      | 10,027.12           | 3,866.14   | 843.41     | 3,919.79              | 0.00                  | 0.00                 | 0.00                |
| 13,600.00           | 89.82           | 359.80      | 10,027.44           | 3,966.14   | 843.05     | 4,019.47              | 0.00                  | 0.00                 | 0.00                |
| 13,700.00           | 89.82           | 359.80      | 10,027.75           | 4,066.14   | 842.70     | 4,119.14              | 0.00                  | 0.00                 | 0.00                |
| 13,800.00           | 89.82           | 359.80      | 10,028.06           | 4,166.13   | 842.34     | 4,218.81              | 0.00                  | 0.00                 | 0.00                |
| 13,900.00           | 89.82           | 359.80      | 10,028.37           | 4,266.13   | 841.99     | 4,318.48              | 0.00                  | 0.00                 | 0.00                |
| 14,000.00           | 89.82           | 359.80      | 10,028.69           | 4,366.13   | 841.63     | 4,418.15              | 0.00                  | 0.00                 | 0.00                |
| 14,100.00           | 89.82           | 359.80      | 10,029.00           | 4,466.13   | 841.28     | 4,517.83              | 0.00                  | 0.00                 | 0.00                |
| 14,200.00           | 89.82           | 359.80      | 10,029.31           | 4,566.13   | 840.92     | 4,617.50              | 0.00                  | 0.00                 | 0.00                |
| 14,300.00           | 89.82           | 359.80      | 10,029.62           | 4,666.13   | 840.57     | 4,717.17              | 0.00                  | 0.00                 | 0.00                |
| 14,400.00           | 89.82           | 359.80      | 10,029.94           | 4,766.13   | 840.21     | 4,816.84              | 0.00                  | 0.00                 | 0.00                |
| 14,500.00           | 89.82           | 359.80      | 10,030.25           | 4,866.13   | 839.86     | 4,916.51              | 0.00                  | 0.00                 | 0.00                |
| 14,600.00           | 89.82           | 359.80      | 10,030.56           | 4,966.13   | 839.50     | 5,016.18              | 0.00                  | 0.00                 | 0.00                |
| 14,700.00           | 89.82           | 359.80      | 10,030.87           | 5,066.12   | 839.15     | 5,115.86              | 0.00                  | 0.00                 | 0.00                |
| 14,800.00           | 89.82           | 359.80      | 10,031.19           | 5,166.12   | 838.79     | 5,215.53              | 0.00                  | 0.00                 | 0.00                |
| 14,900.00           | 89.82           | 359.80      | 10,031.50           | 5,266.12   | 838.44     | 5,315.20              | 0.00                  | 0.00                 | 0.00                |
| 15,000.00           | 89.82           | 359.80      | 10,031.81           | 5,366.12   | 838.09     | 5,414.87              | 0.00                  | 0.00                 | 0.00                |
| 15,100.00           | 89.82           | 359.80      | 10,032.12           | 5,466.12   | 837.73     | 5,514.54              | 0.00                  | 0.00                 | 0.00                |
| 15,200.00           | 89.82           | 359.80      | 10,032.44           | 5,566.12   | 837.38     | 5,614.22              | 0.00                  | 0.00                 | 0.00                |
| 15,300.00           | 89.82           | 359.80      | 10,032.75           | 5,666.12   | 837.03     | 5,713.89              | 0.00                  | 0.00                 | 0.00                |
| 15,400.00           | 89.82           | 359.80      | 10,033.06           | 5,766.12   | 836.67     | 5,813.56              | 0.00                  | 0.00                 | 0.00                |
| 15,500.00           | 89.82           | 359.80      | 10,033.37           | 5,866.12   | 836.32     | 5,913.23              | 0.00                  | 0.00                 | 0.00                |
| 15,600.00           | 89.82           | 359.80      | 10,033.68           | 5,966.11   | 835.96     | 6,012.90              | 0.00                  | 0.00                 | 0.00                |
| 15,700.00           | 89.82           | 359.80      | 10,034.00           | 6,066.11   | 835.61     | 6,112.58              | 0.00                  | 0.00                 | 0.00                |
| 15,800.00           | 89.82           | 359.80      | 10,034.31           | 6,166.11   | 835.26     | 6,212.25              | 0.00                  | 0.00                 | 0.00                |
| 15,900.00           | 89.82           | 359.80      | 10,034.62           | 6,266.11   | 834.91     | 6,311.92              | 0.00                  | 0.00                 | 0.00                |
| 16,000.00           | 89.82           | 359.80      | 10,034.93           | 6,366.11   | 834.55     | 6,411.59              | 0.00                  | 0.00                 | 0.00                |
| 16,100.00           | 89.82           | 359.80      | 10,035.24           | 6,466.11   | 834.20     | 6,511.26              | 0.00                  | 0.00                 | 0.00                |
| 16,200.00           | 89.82           | 359.80      | 10,035.56           | 6,566.11   | 833.85     | 6,610.94              | 0.00                  | 0.00                 | 0.00                |
| 16,300.00           | 89.82           | 359.80      | 10,035.87           | 6,666.11   | 833.49     | 6,710.61              | 0.00                  | 0.00                 | 0.00                |
| 16,400.00           | 89.82           | 359.80      | 10,036.18           | 6,766.11   | 833.14     | 6,810.28              | 0.00                  | 0.00                 | 0.00                |
| 16,500.00           | 89.82           | 359.80      | 10,036.49           | 6,866.10   | 832.79     | 6,909.95              | 0.00                  | 0.00                 | 0.00                |
| 16,600.00           | 89.82           | 359.80      | 10,036.80           | 6,966.10   | 832.44     | 7,009.62              | 0.00                  | 0.00                 | 0.00                |
| 16,700.00           | 89.82           | 359.80      | 10,037.12           | 7,066.10   | 832.09     | 7,109.30              | 0.00                  | 0.00                 | 0.00                |
| 16,800.00           | 89.82           | 359.80      | 10,037.43           | 7,166.10   | 831.73     | 7,208.97              | 0.00                  | 0.00                 | 0.00                |
| 16,900.00           | 89.82           | 359.80      | 10,037.74           | 7,266.10   | 831.38     | 7,308.64              | 0.00                  | 0.00                 | 0.00                |
| 17,000.00           | 89.82           | 359.80      | 10,038.05           | 7,366.10   | 831.03     | 7,408.31              | 0.00                  | 0.00                 | 0.00                |
| 17,100.00           | 89.82           | 359.80      | 10,038.36           | 7,466.10   | 830.68     | 7,507.98              | 0.00                  | 0.00                 | 0.00                |
| 17,200.00           | 89.82           | 359.80      | 10,038.67           | 7,566.10   | 830.33     | 7,607.66              | 0.00                  | 0.00                 | 0.00                |

# Oxy

## Planning Report

**Database:** HOPSP  
**Company:** OXY  
**Project:** PRD NM DIRECTIONAL PLANS (NAD 1983)  
**Site:** Palladium 7/6  
**Well:** Palladium MDP1 7/6 Federal Com 4H  
**Wellbore:** WB00  
**Design:** Permitting Plan

**Local Co-ordinate Reference:** Well Palladium MDP1 7/6 Federal Com 4H  
**TVD Reference:** RFE @ 3560.50ft (Original Well Elev)  
**MD Reference:** RFE @ 3560.50ft (Original Well Elev)  
**North Reference:** Grid  
**Survey Calculation Method:** Minimum Curvature

### Planned Survey

| Measured Depth (ft) | Inclination (°) | Azimuth (°) | Vertical Depth (ft) | +N/-S (ft) | +E/-W (ft) | Vertical Section (ft) | Dogleg Rate (°/100ft) | Build Rate (°/100ft) | Turn Rate (°/100ft) |
|---------------------|-----------------|-------------|---------------------|------------|------------|-----------------------|-----------------------|----------------------|---------------------|
| 17,300.00           | 89.82           | 359.80      | 10,038.98           | 7,666.10   | 829.97     | 7,707.33              | 0.00                  | 0.00                 | 0.00                |
| 17,400.00           | 89.82           | 359.80      | 10,039.30           | 7,766.09   | 829.62     | 7,807.00              | 0.00                  | 0.00                 | 0.00                |
| 17,500.00           | 89.82           | 359.80      | 10,039.61           | 7,866.09   | 829.27     | 7,906.67              | 0.00                  | 0.00                 | 0.00                |
| 17,600.00           | 89.82           | 359.80      | 10,039.92           | 7,966.09   | 828.92     | 8,006.34              | 0.00                  | 0.00                 | 0.00                |
| 17,700.00           | 89.82           | 359.80      | 10,040.23           | 8,066.09   | 828.57     | 8,106.02              | 0.00                  | 0.00                 | 0.00                |
| 17,800.00           | 89.82           | 359.80      | 10,040.54           | 8,166.09   | 828.22     | 8,205.69              | 0.00                  | 0.00                 | 0.00                |
| 17,900.00           | 89.82           | 359.80      | 10,040.85           | 8,266.09   | 827.87     | 8,305.36              | 0.00                  | 0.00                 | 0.00                |
| 18,000.00           | 89.82           | 359.80      | 10,041.16           | 8,366.09   | 827.52     | 8,405.03              | 0.00                  | 0.00                 | 0.00                |
| 18,100.00           | 89.82           | 359.80      | 10,041.47           | 8,466.09   | 827.17     | 8,504.70              | 0.00                  | 0.00                 | 0.00                |
| 18,200.00           | 89.82           | 359.80      | 10,041.79           | 8,566.09   | 826.81     | 8,604.38              | 0.00                  | 0.00                 | 0.00                |
| 18,300.00           | 89.82           | 359.80      | 10,042.10           | 8,666.08   | 826.46     | 8,704.05              | 0.00                  | 0.00                 | 0.00                |
| 18,400.00           | 89.82           | 359.80      | 10,042.41           | 8,766.08   | 826.11     | 8,803.72              | 0.00                  | 0.00                 | 0.00                |
| 18,500.00           | 89.82           | 359.80      | 10,042.72           | 8,866.08   | 825.76     | 8,903.39              | 0.00                  | 0.00                 | 0.00                |
| 18,600.00           | 89.82           | 359.80      | 10,043.03           | 8,966.08   | 825.41     | 9,003.06              | 0.00                  | 0.00                 | 0.00                |
| 18,700.00           | 89.82           | 359.80      | 10,043.34           | 9,066.08   | 825.06     | 9,102.74              | 0.00                  | 0.00                 | 0.00                |
| 18,800.00           | 89.82           | 359.80      | 10,043.65           | 9,166.08   | 824.71     | 9,202.41              | 0.00                  | 0.00                 | 0.00                |
| 18,900.00           | 89.82           | 359.80      | 10,043.96           | 9,266.08   | 824.36     | 9,302.08              | 0.00                  | 0.00                 | 0.00                |
| 19,000.00           | 89.82           | 359.80      | 10,044.27           | 9,366.08   | 824.01     | 9,401.75              | 0.00                  | 0.00                 | 0.00                |
| 19,100.00           | 89.82           | 359.80      | 10,044.58           | 9,466.08   | 823.66     | 9,501.43              | 0.00                  | 0.00                 | 0.00                |
| 19,200.00           | 89.82           | 359.80      | 10,044.89           | 9,566.07   | 823.31     | 9,601.10              | 0.00                  | 0.00                 | 0.00                |
| 19,300.00           | 89.82           | 359.80      | 10,045.21           | 9,666.07   | 822.96     | 9,700.77              | 0.00                  | 0.00                 | 0.00                |
| 19,400.00           | 89.82           | 359.80      | 10,045.52           | 9,766.07   | 822.61     | 9,800.44              | 0.00                  | 0.00                 | 0.00                |
| 19,500.00           | 89.82           | 359.80      | 10,045.83           | 9,866.07   | 822.27     | 9,900.11              | 0.00                  | 0.00                 | 0.00                |
| 19,600.00           | 89.82           | 359.80      | 10,046.14           | 9,966.07   | 821.92     | 9,999.79              | 0.00                  | 0.00                 | 0.00                |
| 19,700.00           | 89.82           | 359.80      | 10,046.45           | 10,066.07  | 821.57     | 10,099.46             | 0.00                  | 0.00                 | 0.00                |
| 19,800.00           | 89.82           | 359.80      | 10,046.76           | 10,166.07  | 821.22     | 10,199.13             | 0.00                  | 0.00                 | 0.00                |
| 19,900.00           | 89.82           | 359.80      | 10,047.07           | 10,266.07  | 820.87     | 10,298.80             | 0.00                  | 0.00                 | 0.00                |
| 20,000.00           | 89.82           | 359.80      | 10,047.38           | 10,366.07  | 820.52     | 10,398.48             | 0.00                  | 0.00                 | 0.00                |
| 20,100.00           | 89.82           | 359.80      | 10,047.69           | 10,466.06  | 820.17     | 10,498.15             | 0.00                  | 0.00                 | 0.00                |
| 20,200.00           | 89.82           | 359.80      | 10,048.00           | 10,566.06  | 819.82     | 10,597.82             | 0.00                  | 0.00                 | 0.00                |
| 20,200.31           | 89.82           | 359.80      | 10,048.00           | 10,566.37  | 819.82     | 10,598.13             | 0.00                  | 0.00                 | 0.00                |

TD at 20200.31 - Pal\_7-6\_4H\_BHL

### Design Targets

| Target Name<br>- hit/miss target<br>- Shape            | Dip Angle (°) | Dip Dir. (°) | TVD (ft)  | +N/-S (ft) | +E/-W (ft) | Northing (usft) | Easting (usft) | Latitude            | Longitude          |
|--|---------------|--------------|-----------|------------|------------|-----------------|----------------|---------------------|--------------------|
| Pal_7-6_4H-KOP<br>- plan hits target center<br>- Point | 0.00          | 0.00         | 9,544.00  | 222.83     | 856.42     | 445,876.26      | 701,466.39     | 32° 13' 29.026170 N | 103° 48' 55.816876 |
| Pal_7-6_4H_BHL<br>- plan hits target center<br>- Point | 0.00          | 0.00         | 10,048.00 | 10,566.37  | 819.82     | 456,219.14      | 701,429.79     | 32° 15' 11.377294 N | 103° 48' 55.662384 |

# Oxy

## Planning Report

**Database:** HOPSPP  
**Company:** OXY  
**Project:** PRD NM DIRECTIONAL PLANS (NAD 1983)  
**Site:** Palladium 7/6  
**Well:** Palladium MDP1 7/6 Federal Com 4H  
**Wellbore:** WB00  
**Design:** Permitting Plan

**Local Co-ordinate Reference:** Well Palladium MDP1 7/6 Federal Com 4H  
**TVD Reference:** RFE @ 3560.50ft (Original Well Elev)  
**MD Reference:** RFE @ 3560.50ft (Original Well Elev)  
**North Reference:** Grid  
**Survey Calculation Method:** Minimum Curvature

### Formations

| Measured Depth (ft) | Vertical Depth (ft) | Name          | Lithology | Dip (°) | Dip Direction (°) |
|---------------------|---------------------|---------------|-----------|---------|-------------------|
| 591.00              | 591.00              | Rustler       |           |         |                   |
| 951.00              | 951.00              | Salado        |           |         |                   |
| 2,861.00            | 2,861.00            | Castile       |           |         |                   |
| 4,287.11            | 4,287.00            | Delaware      |           |         |                   |
| 4,333.21            | 4,333.00            | Bell Canyon   |           |         |                   |
| 5,124.28            | 5,114.00            | Cherry Canyon |           |         |                   |
| 6,460.57            | 6,430.00            | Brushy Canyon |           |         |                   |
| 8,166.48            | 8,110.00            | Bone Spring   |           |         |                   |

### Plan Annotations

| Measured Depth (ft) | Vertical Depth (ft) | Local Coordinates |            | Comment               |
|---------------------|---------------------|-------------------|------------|-----------------------|
|                     |                     | +N/-S (ft)        | +E/-W (ft) |                       |
| 4,114.00            | 4,114.00            | 0.00              | 0.00       | Step out DLS 2.00     |
| 4,613.86            | 4,611.33            | 9.25              | 42.50      | Hold 10° tangent      |
| 9,203.05            | 9,130.84            | 178.66            | 820.97     | Turn to 359.8 Azimuth |
| 9,620.91            | 9,544.00            | 222.83            | 856.42     | Build Curve 10°/100'  |
| 10,418.71           | 10,017.46           | 784.88            | 854.41     | Landing Point         |
| 20,200.31           | 10,048.00           | 10,566.37         | 819.82     | TD at 20200.31        |

| Pond Name | Water Source1 | Water Source2 | Water Source3 | Water Source4 |
|-----------|---------------|---------------|---------------|---------------|
|-----------|---------------|---------------|---------------|---------------|

|              |                        |               |  |               |
|--------------|------------------------|---------------|--|---------------|
| Cedar Canyon | <u>Mine Industrial</u> | <u>C-3478</u> | <u>C-2772</u>                          | <u>C-1360</u> |
| Corral Fly   | <u>C-1360</u>          | <u>C-1361</u> | <u>C-3358</u>                          | <u>C-3836</u> |
| Cypress      | <u>Mine Industrial</u> | <u>C-3478</u> | <u>C-2772</u>                          | <u>C-1361</u> |
| Mesa Verde   | <u>C-2571</u>          | <u>C-2574</u> | <u>J-27</u>                            | <u>J-5</u>    |
| Peaches      | <u>C-906</u>           | <u>C-3200</u> | <u>SP-55 &amp; SP-1279</u><br><u>A</u> | <u>C-100</u>  |



**GRR Inc.**

| <b>NMOSE WELL NUMBER</b> | <b>WELL COMMON NAME</b>                     | <b>LAND OWNERSHIP</b> | <b>GPS LOCATION</b>     |
|--------------------------|---|-----------------------|-------------------------|
| C-100                    | Tres Rios - Next to well shack              | PRIVATE               | 32.201921° -104.254317° |
| C-100-A                  | Tres Rios - Center of turnaround            | PRIVATE               | 32.201856° -104.254443° |
| C-272-B                  | Tres Rios - Northwest                       | PRIVATE               | 32.202315° -104.254812° |
| C-906                    | Whites City Commercial                      | PRIVATE               | 32.176949° -104.374371° |
| C-1246-AC & C-1246-AC-S  | Lackey                                      | PRIVATE               | 32.266978° -104.271212° |
| C-1886                   | 1886 Tank                                   | BLM                   | 32.229316° -104.312930° |
| C-1083                   | Petska                                      | PRIVATE               | 32.30904° -104.16979°   |
| C-1142                   | Winston West                                | BLM                   | 32.507845-104.177410    |
| C-1360                   | ENG#1                                       | PRIVATE               | 32.064922° -103.908818° |
| C-1361                   | ENG#2                                       | PRIVATE               | 32.064908° -103.906266° |
| C-1573                   | Cooksey                                     | PRIVATE               | 32.113463° -104.108092° |
| C-1575                   | ROCKHOUSE Ranch Well - Wildcat              | BLM                   | 32.493190° -104.444163° |
| C-2270                   | CW#1 (Oliver Kiehne)                        | PRIVATE               | 32.021440° -103.559208° |
| C-2242                   | Walterscheid                                | PRIVATE               | 32.39199° -104.17694°   |
| C-2492POD2               | Stacy Mills                                 | PRIVATE               | 32.324203° -103.812472° |
| C-2569                   | Paduca well #2                              | BLM                   | 32.160588 -103.742051   |
| C-2569POD2               | Paduca well replacement                     | BLM                   | 32.160588 -103.742051   |
| C-2570                   | Paduca (tank) well #4                       | BLM                   | 32.15668 -103.74114     |
| C-2571                   | Paduca (road) well                          | BLM                   | 32.163993° -103.745457° |
| C-2572                   | Paduca well #6                              | BLM                   | 32.163985 -103.7412     |
| C-2573                   | Paduca (in the bush) well                   | BLM                   | 32.16229 -103.74363     |
| C-2574                   | Paduca well (on grid power)                 | BLM                   | 32.165777° -103.747590° |
| C-2701                   | 401 Water Station                           | BLM                   | 32.458767° -104.528097° |
| C-2772                   | Mobley Alternate                            | BLM                   | 32.305220° -103.852360° |
| C-3011                   | ROCKY ARROYO - MIDDLE                       | BLM                   | 32.409046° -104.452045° |
| C-3060                   | Max Vasquez                                 | PRIVATE               | 32.31291° -104.17033°   |
| C-3095                   | ROCKHOUSE Ranch Well - North of Rockcrusher | PRIVATE               | 32.486794° -104.426227° |
| C-3200                   | Beard East                                  | PRIVATE               | 32.168720 -104.276600   |
| C-3260                   | Hayhurst                                    | PRIVATE               | 32.227110° -104.150925° |
| C-3350                   | Winston Barn                                | PRIVATE               | 32.511871° -104.139094° |
| C-3358                   | Branson                                     | PRIVATE               | 32.19214° -104.06201°   |
| C-3363                   | Watts#2                                     | PRIVATE               | 32.444637° -103.931313° |
| C-3453                   | ROCKY ARROYO - FIELD                        | PRIVATE               | 32.458657° -104.460804° |
| C-3478                   | Mobley Private                              | PRIVATE               | 32.294937° -103.888656° |
| C-3483pod1               | ENG#3                                       | BLM                   | 32.065556° -103.894722° |
| C-3483pod3               | ENG#5                                       | BLM                   | 32.06614° -103.89231°   |
| C-3483POD4               | CW#4 (Oliver Kiehne)                        | PRIVATE               | 32.021803° -103.559030° |
| C-3483POD5               | CW#5 (Oliver Kiehne)                        | PRIVATE               | 32.021692° -103.560158° |
| C-3554                   | Jesse Baker #1 well                         | PRIVATE               | 32.071937° -103.723030° |
| C-3577                   | CW#3 (Oliver Kiehne)                        | PRIVATE               | 32.021773° -103.559738° |
| C-3581                   | ENG#4                                       | BLM                   | 32.066083° -103.895024° |
| C-3595                   | Oliver Kiehne house well #2                 | PRIVATE               | 32.025484° -103.682529° |
| C-3596                   | CW#2 (Oliver Kiehne)                        | PRIVATE               | 32.021793° -103.559018° |

**GRR Inc.**

| <b>NMOSE WELL NUMBER</b> | <b>WELL COMMON NAME</b>               | <b>LAND OWNERSHIP</b> | <b>GPS LOCATION</b>     |
|--------------------------|---------------------------------------|-----------------------|-------------------------|
| C-3614                   | Dale Hood #2 well                     | PRIVATE               | 32.449290° -104.214500° |
| C-3639                   | Jesse Baker #2 well                   | PRIVATE               | 32.073692° -103.727121° |
| C-3679                   | McCloy-Batty                          | PRIVATE               | 32.215790° -103.537690° |
| C-3689                   | Winston Barn_South                    | PRIVATE               | 32.511504° -104.139073° |
| C-3731                   | Ballard Construction                  | PRIVATE               | 32.458551° -104.144219° |
| C-3764                   | Watts#4                               | PRIVATE               | 32.443360° -103.942890° |
| C-3795                   | Beckham#6                             | BLM                   | 32.023434° -103.321968° |
| C-3821                   | Three River Trucking                  | PRIVATE               | 32.34636° -104.21355    |
| C-3824                   | Collins                               | PRIVATE               | 32.224053° -104.090129° |
| C-3829                   | Jesse Baker #3 well                   | PRIVATE               | 32.072545° -103.722258° |
| C-3830                   | Paduca                                | BLM                   | 32.156400° -103.742060° |
| C-3836                   | Granger                               | PRIVATE               | 32.10073° -104.10284°   |
| C-384                    | ROCKHOUSE Ranch Well -<br>Rockcrusher | PRIVATE               | 32.481275° -104.420706° |
| C-459                    | Walker                                | PRIVATE               | 32.3379° -104.1498°     |
| C-496pod2                | Munoz #3 Trash Pit Well               | PRIVATE               | 32.34224° -104.15365°   |
| C-496pod3&4              | Munoz #2 Corner of Porter & Derrick   | PRIVATE               | 32.34182° -104.15272°   |
| C-552                    | Dale Hood #1 well                     | PRIVATE               | 32.448720° -104.214330° |
| C-764                    | Mike Vasquez                          | PRIVATE               | 32.230553° -104.083518° |
| C-766(old)               | Grandi                                | PRIVATE               | 32.32352° -104.16941°   |
| C-93-S                   | Don Kidd well                         | PRIVATE               | 32.344876 -104.151793   |
| C-987                    | ROCKY ARROYO - HOUSE                  | PRIVATE               | 32.457049° -104.461506° |
| C-98-A                   | Bindel well                           | PRIVATE               | 32.335125° -104.187255° |
| CP-1170POD1              | Beckham#1                             | PRIVATE               | 32.065889° -103.312583° |
| CP-1201                  | Winston Ballard                       | BLM                   | 32.580380° -104.115980° |
| CP-1202                  | Winston Ballard                       | BLM                   | 32.538178° -104.046024° |
| CP-1231                  | Winston Ballard                       | PRIVATE               | 32.618968° -104.122690° |
| CP-1263POD5              | Beckham#5                             | PRIVATE               | 32.065670° -103.307530° |
| CP-1414                  | Crawford #1                           | PRIVATE               | 32.238380° -103.260890° |
| CP-1414 POD 1            | RRR                                   | PRIVATE               | 32.23911° -103.25988°   |
| CP-1414 POD 2            | RRR                                   | PRIVATE               | 32.23914° -103.25981°   |
| CP-519                   | Bond_Private                          | PRIVATE               | 32.485546 -104.117583   |
| CP-556                   | Jimmy Mills (Stacy)                   | STATE                 | 32.317170° -103.495080° |
| CP-626                   | Oi Loco (W)                           | STATE                 | 32.692660° -104.068064° |
| CP-626-S                 | Beach Exploration/ Oi Loco (E)        | STATE                 | 32.694229° -104.064759° |
| CP-73                    | Laguna #1                             | BLM                   | 32.615015° -103.747615° |
| CP-74                    | Laguna #2                             | BLM                   | 32.615255° -103.747688° |
| CP-741                   | Jimmy Richardson                      | BLM                   | 32.61913° -104.06101°   |
| CP-742                   | Jimmy Richardson                      | BLM                   | 32.614061° -104.017211° |
| CP-742                   | Hidden Well                           | BLM                   | 32.614061 -104.017211   |
| CP-745                   | Leaning Tower of Pisa                 | BLM                   | 32.584619° -104.037179° |
| CP-75                    | Laguna #3                             | BLM                   | 32.615499° -103.747715° |
| CP-924                   | Winston Ballard                       | BLM                   | 32.545888° -104.110114° |
| CP-926                   | Winchester well (Winston)             | BLM                   | 32.601125° -104.128358° |

| NMOSE WELL NUMBER          | WELL COMMON NAME                                  | GRR Inc. |           | GPS LOCATION            |
|----------------------------|---|----------|-----------|-------------------------|
|                            |   | LAND     | OWNERSHIP |                         |
| J-27                       | Beckham   | PRIVATE  |           | 32.020403° -103.299333° |
| J-5                        | EPNG Jal Well                                     | PRIVATE  |           | 32.050232° -103.313117° |
| J-33                       | Beckham   | PRIVATE  |           | 32.016443° -103.297714° |
| J-34                       | Beckham   | PRIVATE  |           | 32.016443° -103.297714° |
| J-35                       | Beckham   | PRIVATE  |           | 32.016443° -103.297714° |
| L-10167                    | Angell Ranch well                                 | PRIVATE  |           | 32.785847° -103.644705° |
| L-10613                    | Northcutt3 (2nd House well)                       | PRIVATE  |           | 32.687922° -103.472452° |
| L-11281                    | Northcutt4  | PRIVATE  |           | 32.687675° -103.471512° |
| L-12459                    | Northcutt1 (House well)                           | PRIVATE  |           | 32.689498° -103.472697° |
| L-12462                    | Northcutt8 Private Well                           | PRIVATE  |           | 32.686238° -103.435409° |
| L-13049                    | EPNG Maljamar well                                | PRIVATE  |           | 32.81274° -103.67730°   |
| L-13129                    | Pearce State                                      | STATE    |           | 32.726305° -103.553172° |
| L-13179                    | Pearce Trust                                      | STATE    |           | 32.731304° -103.548461° |
| L-13384                    | Northcutt7 (State) CAZA                           | STATE    |           | 32.694651° -103.434997° |
| L-1880S-2                  | HB Intrepid well #7                               | PRIVATE  |           | 32.842212° -103.621299° |
| L-1880S-3                  | HB Intrepid well #8                               | PRIVATE  |           | 32.852415° -103.620405° |
| L-1881                     | HB Intrepid well #1                               | PRIVATE  |           | 32.829124° -103.624139° |
| L-1883                     | HB Intrepid well #4                               | PRIVATE  |           | 32.828041° -103.607654° |
| L-3887                     | Northcutt2 (Tower or Pond well)                   | PRIVATE  |           | 32.689036° -103.472437° |
| L-5434                     | Northcutt5 (State)                                | STATE    |           | 32.694074° -103.405111° |
| L-5434-S                   | Northcutt6 (State)                                | STATE    |           | 32.693355° -103.407004° |
| RA-14                      | Horner Can  | PRIVATE  |           | 32.89348° -104.37208°   |
| RA-1474                    | Irvin Smith                                       | PRIVATE  |           | 32.705773° -104.393043° |
| RA-1474-B                  | NLake WS / Jack Clayton                           | PRIVATE  |           | 32.561221° -104.293095° |
| RA-9193                    | Angell Ranch North Hummingbird                    | PRIVATE  |           | 32.885162° -103.676376° |
| SP-55 & SP-1279-A          | Blue Springs Surface POD                          | PRIVATE  |           | 32.181358° -104.294009° |
| SP-55 & SP-1279 (Bounds)   | Bounds Surface POD                                | PRIVATE  |           | 32.203875° -104.247076° |
| SP-55 & SP-1279 (Wilson)   | Wilson Surface POD                                | PRIVATE  |           | 32.243010° -104.052197° |
| City Treated Effluent      | City of Carlsbad Waste Treatment Plant            | PRIVATE  |           | 32.411122° -104.177030° |
| Mine Industrial            | Mosaic Industrial Water                           | PRIVATE  |           | 32.370286° -103.947839° |
| Mobley State Well (NO OSE) | Mobley Ranch                                      | STATE    |           | 32.308859° -103.891806° |
| EPNG Industrial            | Monument Water Well Pipeline (Oil Center, Eunice) | PRIVATE  |           | 32.512943° -103.290300° |
| MCOX Commercial            | Matt Cox Commercial                               | PRIVATE  |           | 32.529431° -104.188017° |
| AMAX Mine Industrial       | Mosaic Industrial Water                           | N/A      |           | VARIOUS TAPS            |
| WAG Mine Industrial        | Mosaic Industrial Water                           | N/A      |           | VARIOUS TAPS            |
| HB Mine Industrial         | Intrepid Industrial Water                         | N/A      |           | VARIOUS TAPS            |

## **Mesquite**

### **Cedar Canyon**

Major Source: C464 (McDonald) Sec. 13 T24S R28E

Secondary Source: C-00738 (McDonald/Faulk) Sec. 12 T24S R28E

### **Corral Fly – South of Cedar Canyon**

Major Source: C464 (McDonald) Sec. 13 T24S R28E

Secondary Source: C-00738 (McDonald/Faulk) Sec. 12 T24S R28E

### **Cypress – North of Cedar Canyon**

Major Source: Caviness B: C-501-AS2 Sec 23 T28S R15E

Secondary Source: George Arnis; C-1303

### **Sand Dunes – new frac pond**

Major Source: 128 Fresh Water Pond (Mesquite/Mosaic) – located at MM 4 on 128; 240,000 bbl pond

Secondary Source: George Arnis; C-1303

### **Mesa Verde – east of Sand Dunes**

Major Source: 128 Fresh Water Pond (Mesquite/Mosaic) – located at MM 4 on 128; 240,000 bbl pond

Secondary Source: Unknown at this time; needs coordinates to determine secondary source

### **Smokey Bits/Ivory/Misty – had posiden tanks before**

Major Source: Unknown at this time; need coordinates to determine major source

Secondary Source: Unknown at this time; needs coordinates to determine secondary source

### **Red Tank/Lost Tank**

Major Source: Unknown at this time; need coordinates to determine major source


Secondary Source: Unknown at this time; needs coordinates to determine secondary source

### **Peaches**

Major Source: Unknown at this time; need coordinates to determine major source

Secondary Source: Unknown at this time; needs coordinates to determine secondary source


# 5M Choke Panel

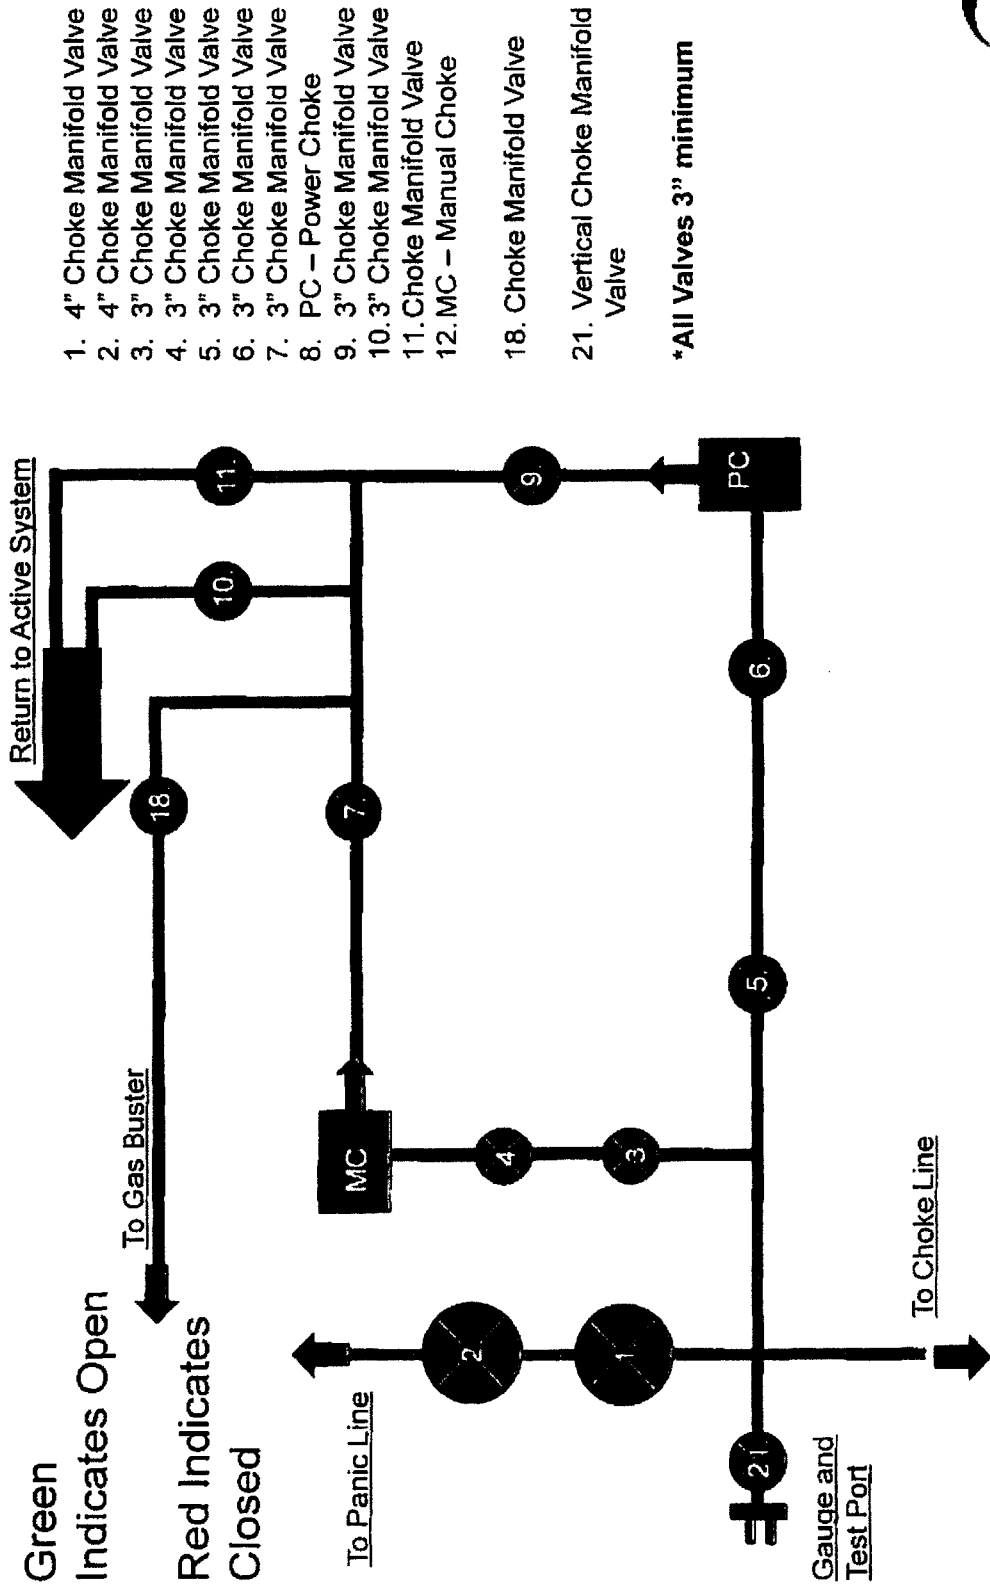


CM-1




# 10M REMOTE KILL LINE SCHEMATIC

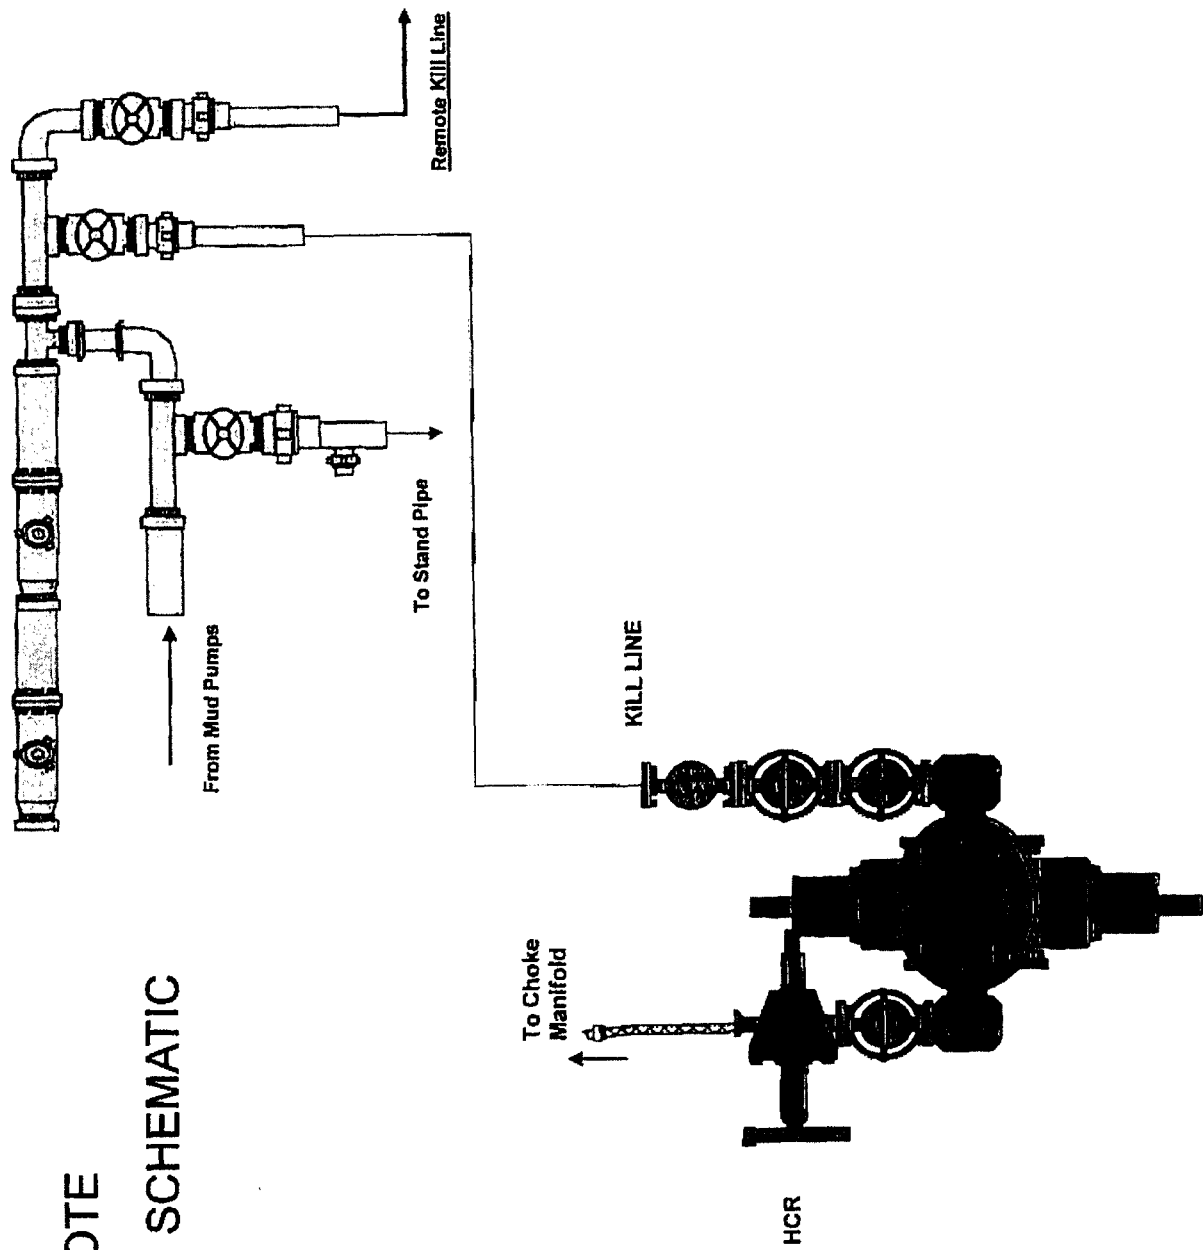


**Choke Manifold – Gas Separator (Top View)**

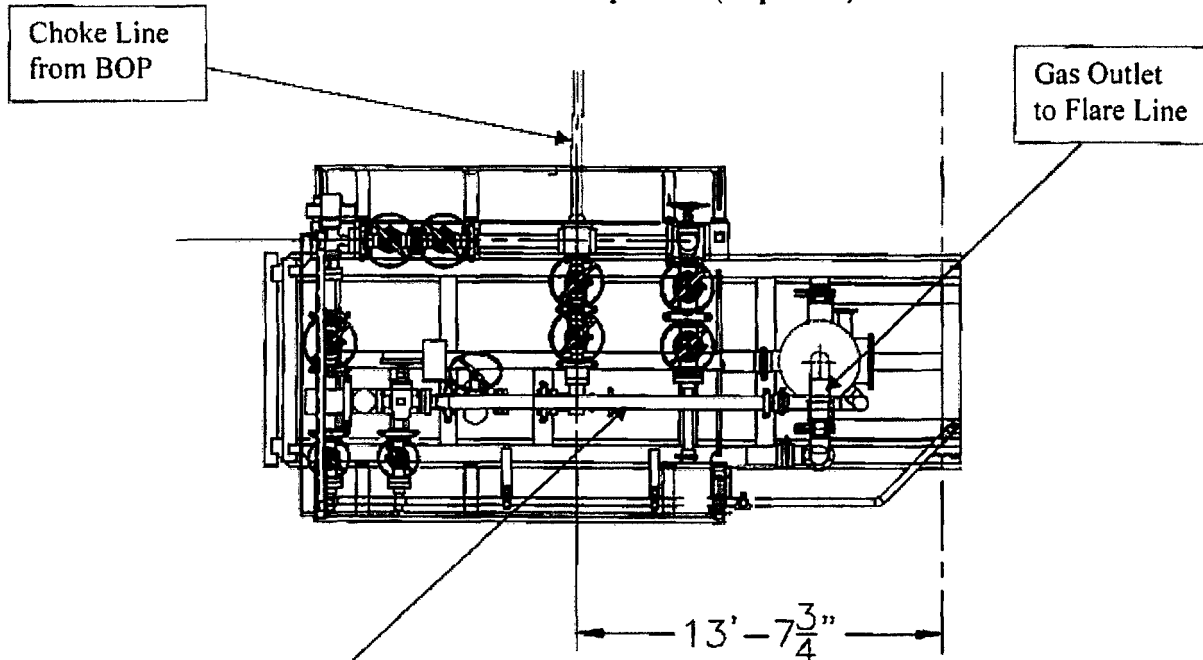

**Choke Manifold – Gas Separator (Side View)**

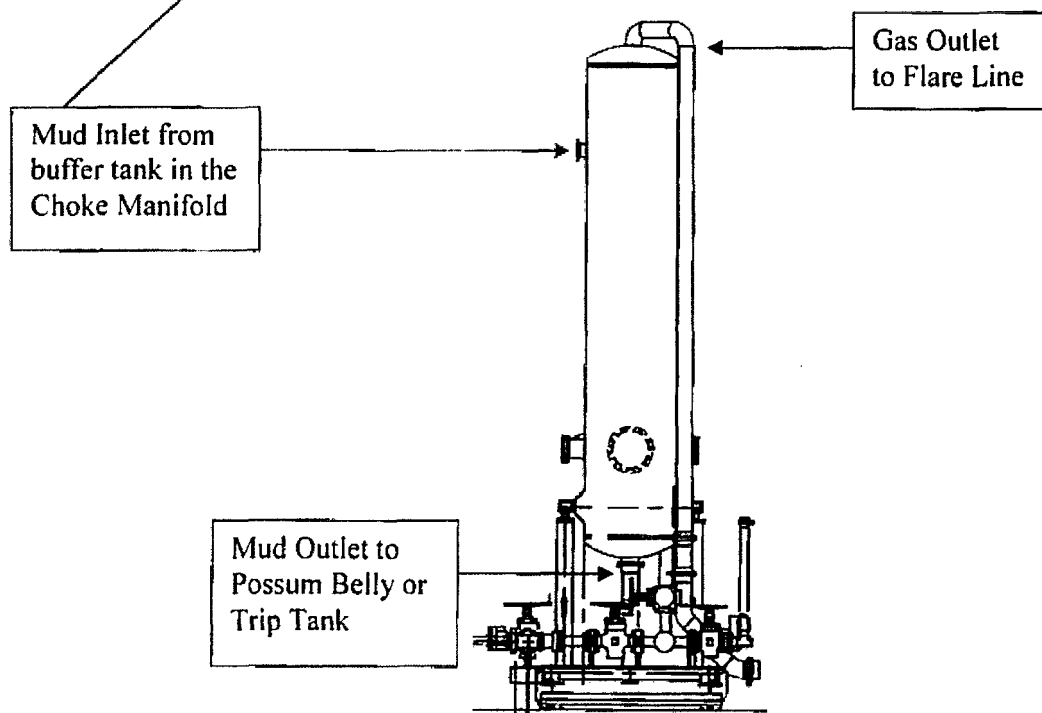

### Gas Separator Routing Flex III Rigs

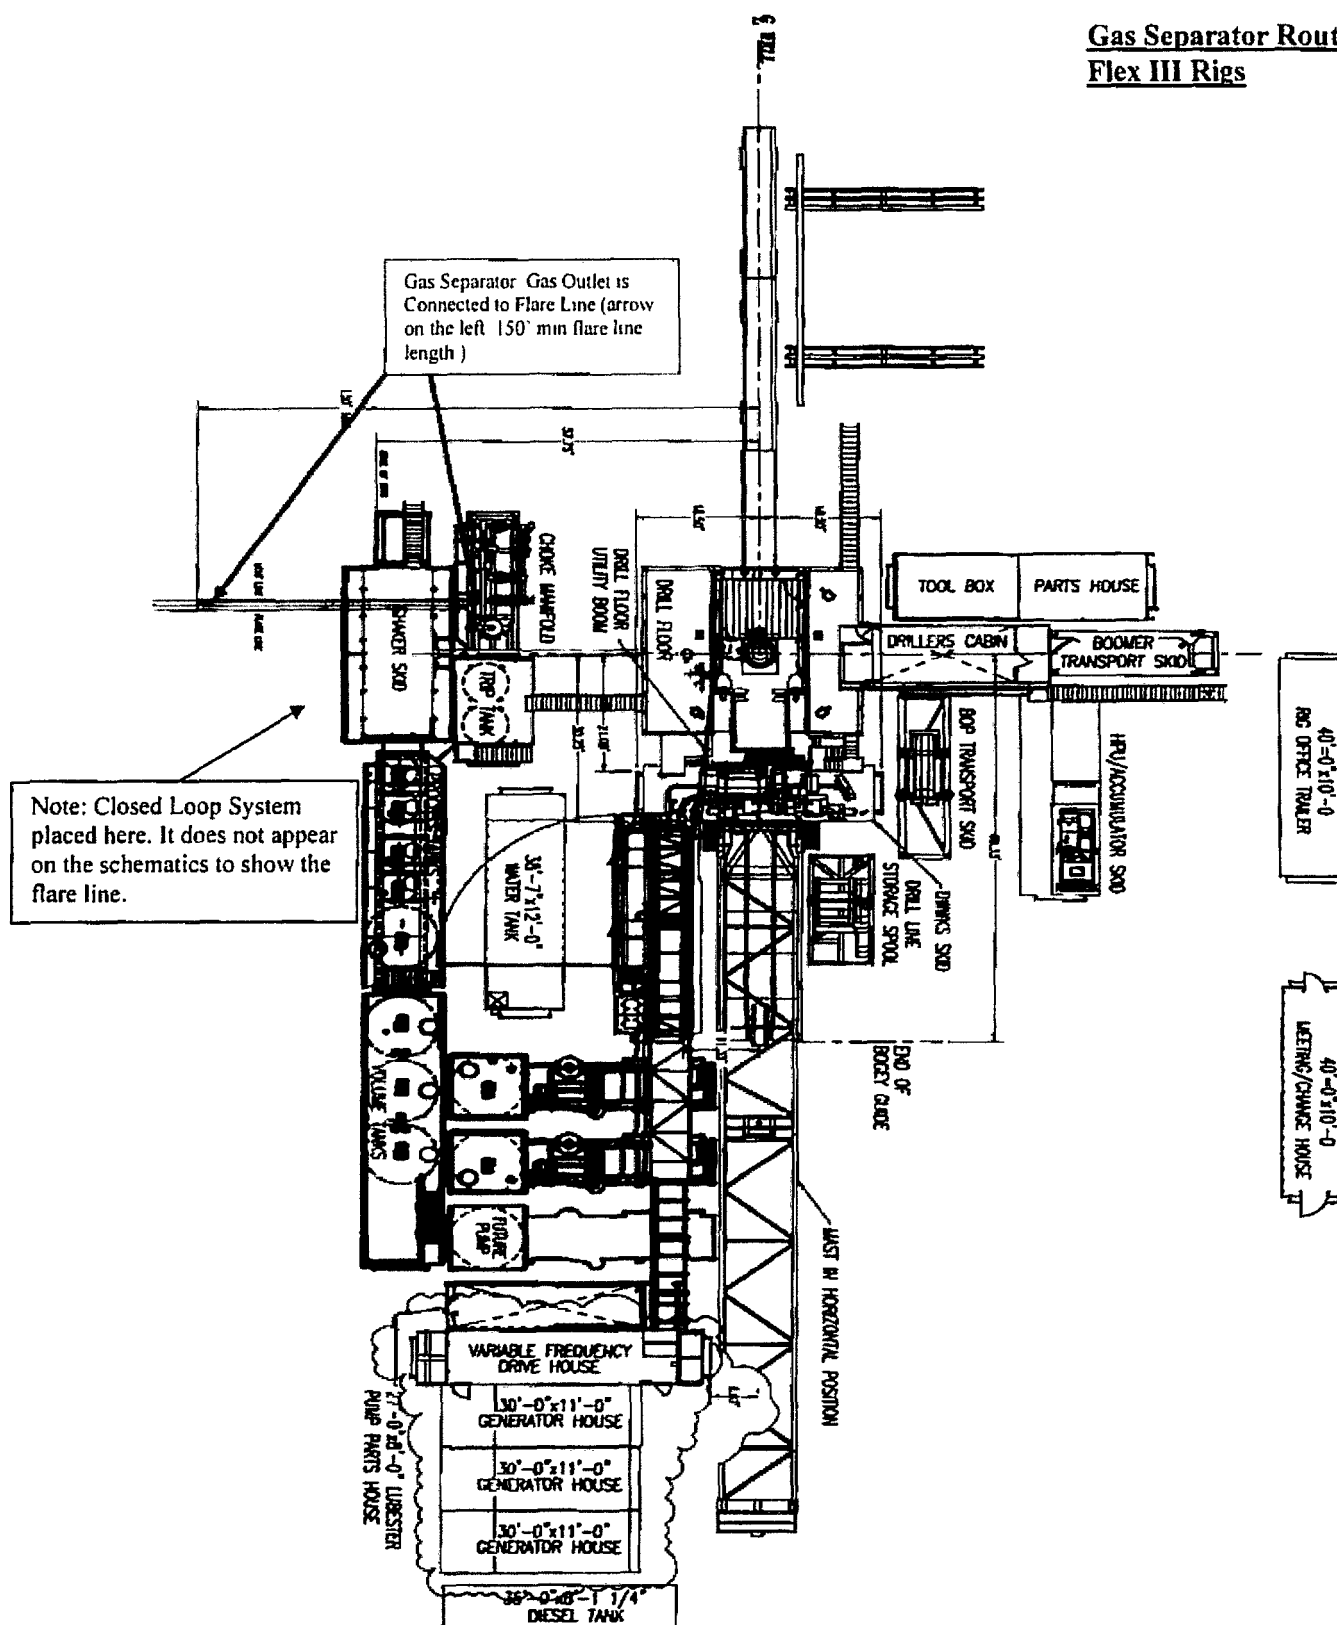





# 5M BOP Stack

## Mud Cross Valves:

5. 5M Check Valve
6. Outside 5M Kill Line Valve
7. Inside 5M Kill Line Valve
8. Outside 5M Kill Line Valve
9. 5M HCR Valve

\*Minimum ID = 2-1/16" on Kill Line side and 3" minimum ID on choke line side

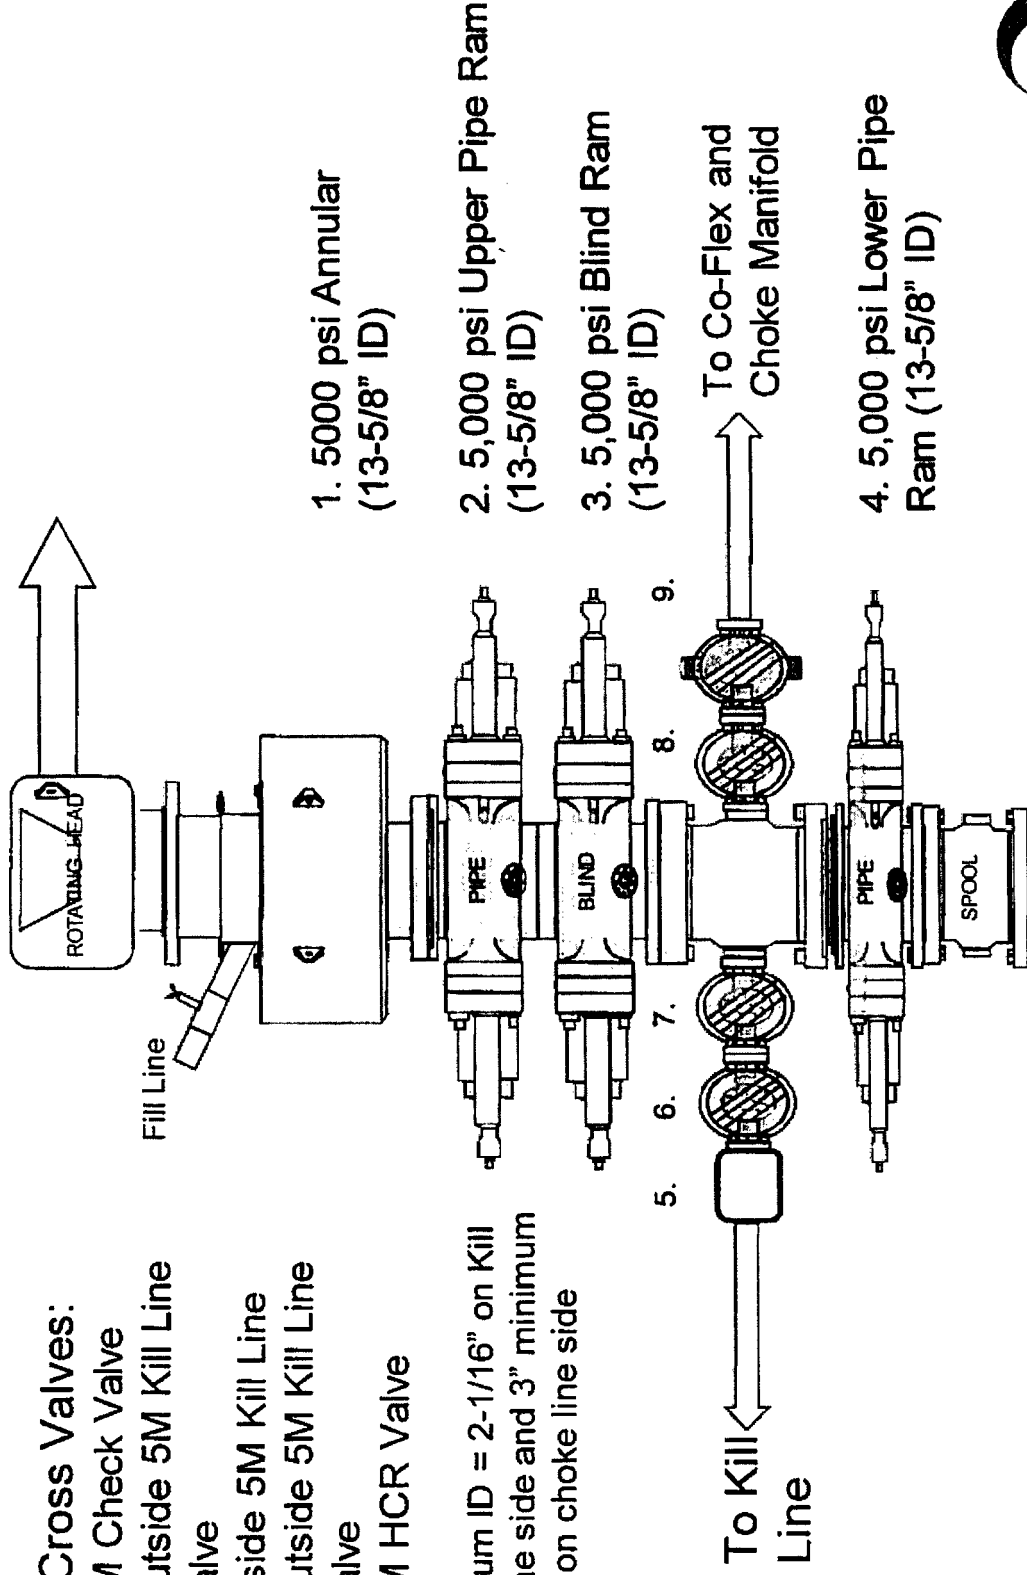

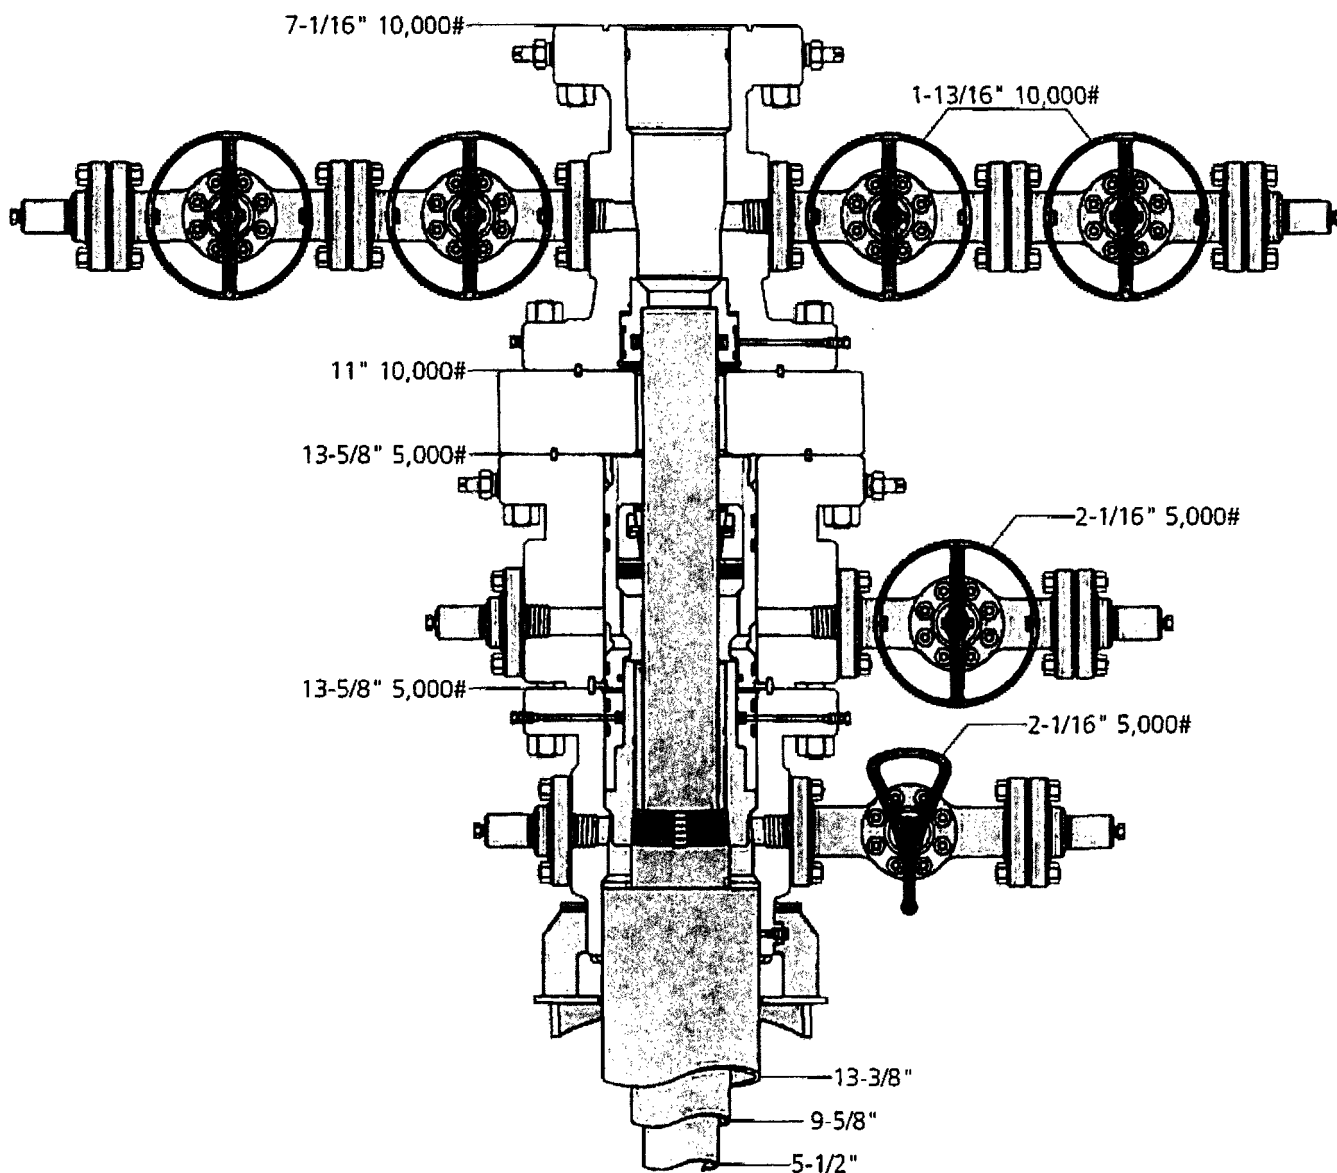

13" 5K MBS SL2 Wellhead



|           |         |   |          |
|-----------|---------|---|----------|
| Jeannette | 7-12-16 | # | J-9786-4 |
|-----------|---------|---|----------|



## **Permian Drilling Hydrogen Sulfide Drilling Operations Plan Palladium MDP1 7/6 Federal Com #4H**

Open drill site. No homes or buildings are near the proposed location.

### **1. Escape**

Personnel shall escape upwind of wellbore in the event of an emergency gas release. Escape can take place through the lease road on the Southeast side of the location. Personnel need to move to a safe distance and block the entrance to location. If the primary route is not an option due to the wind direction, then a secondary egress route should be taken.

▲ H2S Detectors. At least three detectors will be installed: bell nipple, rig floor and Shakers.


● Briefing Areas. At least two briefing areas will be placed, 90 deg off.

■ Wind direction indicators. Visible from rig floor and from the mud pits area.

A gas buster is connected to both the choke manifold and flowline outlets.

Secondary Briefing Area

Primary Briefing Area

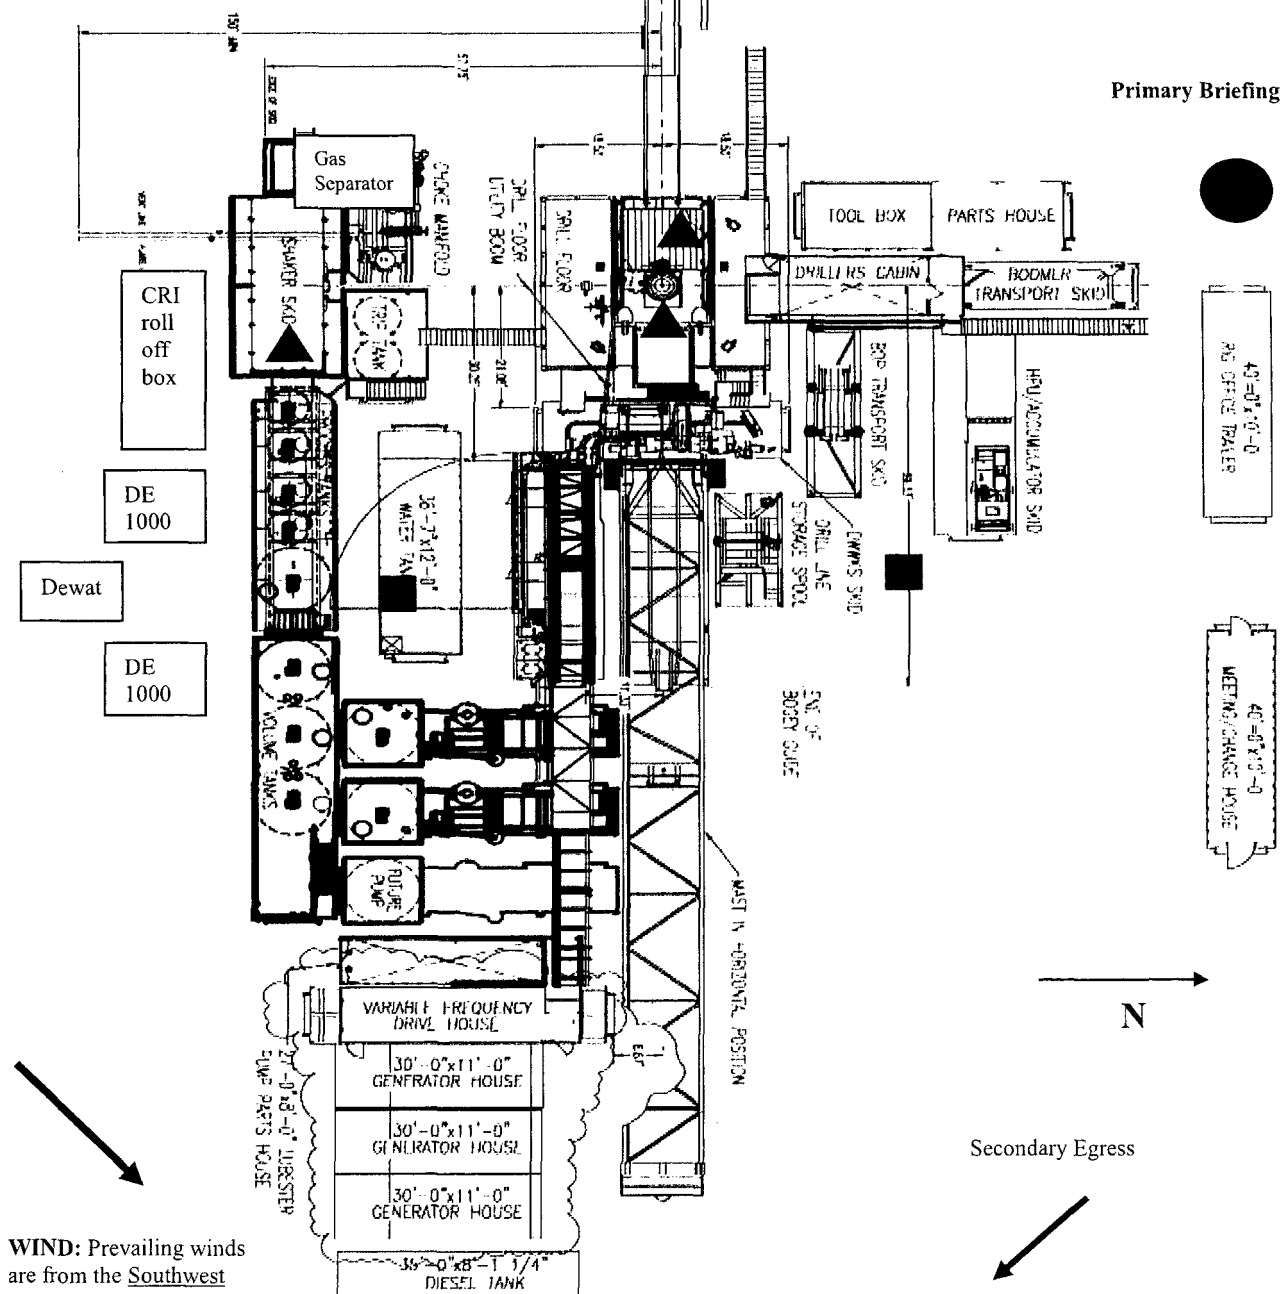

WIND: Prevailing winds are from the Southwest



## **Permian Drilling Hydrogen Sulfide Drilling Operations Plan New Mexico**

### **Scope**

This contingency plan establishes guidelines for the public, all company employees, and contract employees who's work activities may involve exposure to hydrogen sulfide (H<sub>2</sub>S) gas.

While drilling this well, it is possible to encounter H<sub>2</sub>S bearing formations. At all times, the first barrier to control H<sub>2</sub>S emissions will be the drilling fluid, which will have a density high enough to control influx.

### **Objective**

1. Provide an immediate and predetermined response plan to any condition when H<sub>2</sub>S is detected. All H<sub>2</sub>S detections in excess of 10 parts per million (ppm) concentration are considered an Emergency.
2. Prevent any and all accidents, and prevent the uncontrolled release of hydrogen sulfide into the atmosphere.
3. Provide proper evacuation procedures to cope with emergencies.
4. Provide immediate and adequate medical attention should an injury occur.

## **Discussion**

|                                |   |
|--------------------------------|---|
| Implementation:                | This plan with all details is to be fully implemented before drilling to <u>commence</u> .                    |
| Emergency response Procedure:  | This section outlines the conditions and denotes steps to be taken in the event of an emergency.              |
| Emergency equipment Procedure: | This section outlines the safety and emergency equipment that will be required for the drilling of this well. |
| Training provisions:           | This section outlines the training provisions that must be adhered to prior to drilling.                      |
| Drilling emergency call lists: | Included are the telephone numbers of all persons to be contacted should an emergency exist.                  |
| Briefing:                      | This section deals with the briefing of all people involved in the drilling operation.                        |
| Public safety:                 | Public safety personnel will be made aware of any potential evacuation and any additional support needed.     |
| Check lists:                   | Status check lists and procedural check lists have been included to insure adherence to the plan.             |
| General information:           | A general information section has been included to supply support information.                                |

### **Hydrogen Sulfide Training**

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on the well:

1. The hazards and characteristics of H<sub>2</sub>S.
2. Proper use and maintenance of personal protective equipment and life support systems.
3. H<sub>2</sub>S detection.
4. Proper use of H<sub>2</sub>S detectors, alarms, warning systems, briefing areas, evacuation procedures and prevailing winds.
5. Proper techniques for first aid and rescue procedures.
6. Physical effects of hydrogen sulfide on the human body.
7. Toxicity of hydrogen sulfide and sulfur dioxide.
8. Use of SCBA and supplied air equipment.
9. First aid and artificial respiration.
10. Emergency rescue.

In addition, supervisory personnel will be trained in the following areas:

1. The effects of H<sub>2</sub>S on metal components. If high tensile strength tubular is to be used, personnel will be trained in their special maintenance requirements.
2. Corrective action and shut-in procedures when drilling a well, blowout prevention and well control procedures.
3. The contents and requirements of the H<sub>2</sub>S Drilling Operations Plan.

H<sub>2</sub>S training refresher must have been taken within one year prior to drilling the well. Specifics on the well to be drilled will be discussed during the pre-spud meeting. H<sub>2</sub>S and well control (choke) drills will be performed while drilling the well, at least on a weekly basis. This plan shall be available in the well site. All personnel will be required to carry the documentation proving that the H<sub>2</sub>S training has been taken.

#### **Service company and visiting personnel**

- A. Each service company that will be on this well will be notified if the zone contains H<sub>2</sub>S.
- B. Each service company must provide for the training and equipment of their employees before they arrive at the well site.
- C. Each service company will be expected to attend a well site briefing

## **Emergency Equipment Requirements**

### 1. Well control equipment

The well shall have hydraulic BOP equipment for the anticipated pressures. Equipment is to be tested on installation and follow Oxy Well Control standard, as well as BLM Onshore Order #2.

*Special control equipment:*

- A. Hydraulic BOP equipment with remote control on ground. Remotely operated choke.
- B. Rotating head
- C. Gas buster equipment shall be installed before drilling out of surface pipe.

### 2. Protective equipment for personnel

- A. Four (4) 30-minute positive pressure air packs (2 at each briefing area) on location.
- B. Adequate fire extinguishers shall be located at strategic locations.
- C. Radio / cell telephone communication will be available at the rig.
  - Rig floor and trailers.
  - Vehicle.

### 3. Hydrogen sulfide sensors and alarms

- A. H<sub>2</sub>S sensor with alarms will be located on the rig floor, at the bell nipple, and at the flow line. These monitors will be set to alarm at 10 ppm with strobe light, and audible alarm.
- B. Hand operated detectors with tubes.
- C. H<sub>2</sub>S monitor tester (to be provided by contract Safety Company.)
- D. There shall be one combustible gas detector on location at all times.

### 4. Visual Warning Systems

- A. One sign located at each location entrance with the following language:

**Caution – potential poison gas  
Hydrogen sulfide  
No admittance without authorization**



*Wind sock – wind streamers:*

- A. One 36” (in length) wind sock located at protection center, at height visible from rig floor.
- B. One 36” (in length) wind sock located at height visible from pit areas.

*Condition flags*

- A. One each condition flag to be displayed to denote conditions.

**green – normal conditions**  
**yellow – potential danger**  
**red – danger, H2S present**

- B. Condition flag shall be posted at each location sign entrance.

5. Mud Program

The mud program is designed to minimize the risk of having H2S and other formation fluids at surface. Proper mud weight and safe drilling practices will be applied. H2S scavengers will be used to minimize the hazards while drilling. Below is a summary of the drilling program.

*Mud inspection devices:*

Garrett gas train or hatch tester for inspection of sulfide concentration in mud system.

6. Metallurgy

- A. Drill string, casing, tubing, wellhead, blowout preventers, drilling spools or adapters, kill lines, choke manifold, lines and valves shall be suitable for the H2S service.
- B. All the elastomers, packing, seals and ring gaskets shall be suitable for H2S service.

7. Well Testing

No drill stem test will be performed on this well.

8. Evacuation plan

Evacuation routes should be established prior to well spud for each well and discussed with all rig personnel.

9. Designated area

- A. Parking and visitor area: all vehicles are to be parked at a predetermined safe distance from the wellhead.
- B. There will be a designated smoking area.
- C. Two briefing areas on either side of the location at the maximum allowable distance from the well bore so they offset prevailing winds perpendicularly, or at a 45-degree angle if wind direction tends to shift in the area.

**Emergency procedures**

- A. In the event of any evidence of H<sub>2</sub>S level above 10 ppm, take the following steps:
  - 1. The Driller will pick up off bottom, shut down the pumps, slow down the pipe rotation.
  - 2. Secure and don escape breathing equipment, report to the upwind designated safe briefing / muster area.
  - 3. All personnel on location will be accounted for and emergency search should begin for any missing, the Buddy System will be implemented.
  - 4. Order non-essential personnel to leave the well site, order all essential personnel out of the danger zone and upwind to the nearest designated safe briefing / muster area.
  - 5. Entrance to the location will be secured to a higher level than our usual "Meet and Greet" requirement, and the proper condition flag will be displayed at the entrance to the location.
  - 6. Take steps to determine if the H<sub>2</sub>S level can be corrected or suppressed and, if so, proceed as required.
- B. If uncontrollable conditions occur:
  - 1. Take steps to protect and/or remove any public in the down-wind area from the rig – partial evacuation and isolation. Notify necessary public safety personnel and appropriate regulatory entities (i.e. BLM) of the situation.

2. Remove all personnel to the nearest upwind designated safe briefing / muster area or off location.
3. Notify public safety personnel of safe briefing / muster area.
4. An assigned crew member will blockade the entrance to the location. No unauthorized personnel will be allowed entry to the location.
5. Proceed with best plan (at the time) to regain control of the well. Maintain tight security and safety procedures.

C. Responsibility:

1. Designated personnel.
  - a. Shall be responsible for the total implementation of this plan.
  - b. Shall be in complete command during any emergency.
  - c. Shall designate a back-up.

- |                |  |
|----------------|--|
| All personnel: | <ol style="list-style-type: none"> <li>1. On alarm, don escape unit and report to the nearest upwind designated safe briefing / muster area upw</li> <li>2. Check status of personnel (buddy system).</li> <li>3. Secure breathing equipment.</li> <li>4. Await orders from supervisor.</li> </ol> |
|----------------|--|

- |                     |  |
|---------------------|--|
| Drill site manager: | <ol style="list-style-type: none"> <li>1. Don escape unit if necessary and report to nearest upwind designated safe briefing / muster area.</li> <li>2. Coordinate preparations of individuals to return to point of release with tool pusher and driller (using the buddy system).</li> <li>3. Determine H2S concentrations.</li> <li>4. Assess situation and take control measures.</li> </ol> |
|---------------------|--|

- |              |   |
|--------------|---|
| Tool pusher: | <ol style="list-style-type: none"> <li>1. Don escape unit Report to up nearest upwind designated safe briefing / muster area.</li> <li>2. Coordinate preparation of individuals to return to point of release with tool pusher drill site manager (using the buddy system).</li> <li>3. Determine H2S concentration.</li> <li>4. Assess situation and take control measures.</li> </ol> |
|--------------|---|

- |          |   |
|----------|---|
| Driller: | <ol style="list-style-type: none"> <li>1. Don escape unit, shut down pumps, continue</li> </ol> |
|----------|---|

- rotating DP.
  - 2. Check monitor for point of release.
  - 3. Report to nearest upwind designated safe briefing / muster area.
  - 4. Check status of personnel (in an attempt to rescue, use the buddy system).
  - 5. Assigns least essential person to notify Drill Site Manager and tool pusher by quickest means in case of their absence.
  - 6. Assumes the responsibilities of the Drill Site Manager and tool pusher until they arrive should they be absent.
- Derrick man  
Floor man #1  
Floor man #2
- 1. Will remain in briefing / muster area until instructed by supervisor.
- Mud engineer:
- 1. Report to nearest upwind designated safe briefing / muster area.
  - 2. When instructed, begin check of mud for ph and H2S level. (Garett gas train.)
- Safety personnel:
- 1. Mask up and check status of all personnel and secure operations as instructed by drill site manager.

### **Taking a kick**

When taking a kick during an H2S emergency, all personnel will follow standard Well control procedures after reporting to briefing area and masking up.

### **Open-hole logging**

All unnecessary personnel off floor. Drill Site Manager and safety personnel should monitor condition, advise status and determine need for use of air equipment.

### **Running casing or plugging**

Following the same “tripping” procedure as above. Drill Site Manager and safety personnel should determine if all personnel have access to protective equipment.

### **Ignition procedures**

The decision to ignite the well is the responsibility of the operator (Oxy Drilling Management). The decision should be made only as a last resort and in a situation where it is clear that:

1. Human life and property are endangered.
2. There is no hope controlling the blowout under the prevailing conditions at the well.

#### **Instructions for igniting the well**

1. Two people are required for the actual igniting operation. They must wear self-contained breathing units and have a safety rope attached. One man (tool pusher or safety engineer) will check the atmosphere for explosive gases with the gas monitor. The other man is responsible for igniting the well.
2. Primary method to ignite: 25 mm flare gun with range of approximately 500 feet.
3. Ignite upwind and do not approach any closer than is warranted.
4. Select the ignition site best for protection, and which offers an easy escape route.
5. Before firing, check for presence of combustible gas.
6. After lighting, continue emergency action and procedure as before.
7. All unassigned personnel will remain in briefing area until instructed by supervisor or directed by the Drill Site Manager.

**Remember:** After well is ignited, burning hydrogen sulfide will convert to sulfur dioxide, which is also highly toxic. **Do not assume the area is safe after the well is ignited.**

### **Status check list**

Note: All items on this list must be completed before drilling to production casing point.

1. H2S sign at location entrance.
2. Two (2) wind socks located as required.
3. Four (4) 30-minute positive pressure air packs (2 at each Briefing area) on location for all rig personnel and mud loggers.
4. Air packs inspected and ready for use.
5. Cascade system and hose line hook-up as needed.
6. Cascade system for refilling air bottles as needed.
7. Condition flag on location and ready for use.
8. H2S detection system hooked up and tested.
9. H2S alarm system hooked up and tested.
10. Hand operated H2S detector with tubes on location.
11. 1 – 100' length of nylon rope on location.
12. All rig crew and supervisors trained as required.
13. All outside service contractors advised of potential H2S hazard on well.
14. No smoking sign posted and a designated smoking area identified.
15. Calibration of all H2S equipment shall be noted on the IADC report.

Checked by: \_\_\_\_\_ Date: \_\_\_\_\_

### **Procedural check list during H2S events**

#### **Perform each tour:**

1. Check fire extinguishers to see that they have the proper charge.
2. Check breathing equipment to ensure that it is in proper working order.
3. Make sure all the H2S detection system is operative.

#### **Perform each week:**

1. Check each piece of breathing equipment to make sure that demand or forced air regulator is working. This requires that the bottle be opened and the mask assembly be put on tight enough so that when you inhale, you receive air or feel air flow.
2. BOP skills (well control drills).
3. Check supply pressure on BOP accumulator stand by source.
4. Check breathing equipment mask assembly to see that straps are loosened and turned back, ready to put on.
5. Check pressure on breathing equipment air bottles to make sure they are charged to full volume. ( Air quality checked for proper air grade "D" before bringing to location)
6. Confirm pressure on all supply air bottles.
7. Perform breathing equipment drills with on-site personnel.
8. Check the following supplies for availability.
  - A. Emergency telephone list.
  - B. Hand operated H2S detectors and tubes.

### **General evacuation plan**

1. When the company approved supervisor (Drill Site Manager, consultant, rig pusher, or driller) determines the H<sub>2</sub>S gas cannot be limited to the well location and the public will be involved, he will activate the evacuation plan.
2. Drill Site Manager or designee will notify local government agency that a hazardous condition exists and evacuation needs to be implemented.
3. Company or contractor safety personnel that have been trained in the use of H<sub>2</sub>S detection equipment and self-contained breathing equipment will monitor H<sub>2</sub>S concentrations, wind directions, and area of exposure. They will delineate the outer perimeter of the hazardous gas area. Extension to the evacuation area will be determined from information gathered.
4. Law enforcement personnel (state police, police dept., fire dept., and sheriff's dept.) Will be called to aid in setting up and maintaining road blocks. Also, they will aid in evacuation of the public if necessary.
5. After the discharge of gas has been controlled, company safety personnel will determine when the area is safe for re-entry.

**Important: Law enforcement personnel will not be asked to come into a contaminated area. Their assistance will be limited to uncontaminated areas. Constant radio contact will be maintained with them.**



### **Emergency actions**

#### **Well blowout – if emergency**

1. Evacuate all personnel to “Safe Briefing / Muster Areas” or off location if needed.
2. If sour gas – evacuate rig personnel.
3. If sour gas – evacuate public within 3000 ft radius of exposure.
4. Don SCBA and shut well in if possible using the buddy system.
5. Notify Drilling Superintendent and call 911 for emergency help (fire dept and ambulance) if needed.
6. Implement the Blowout Contingency Plan, and Drilling Emergency Action Plan.
6. Give first aid as needed.

#### **Person down location/facility**

1. If immediately possible, contact 911. Give location and wait for confirmation.
2. Don SCBA and perform rescue operation using buddy system.

### Toxic effects of hydrogen sulfide

Hydrogen sulfide is extremely toxic. The acceptable ceiling concentration for eight-hour exposure is 10 ppm, which is .001% by volume. Hydrogen sulfide is heavier than air (specific gravity – 1.192) and colorless. It forms an explosive mixture with air between 4.3 and 46.0 percent by volume. Hydrogen sulfide is almost as toxic as hydrogen cyanide and is between five and six times more toxic than carbon monoxide. Toxicity data for hydrogen sulfide and various other gases are compared in table i. Physical effects at various hydrogen sulfide exposure levels are shown in table ii.

Table i  
Toxicity of various gases

| Common name      | Chemical formula | Specific gravity (sc=1) | Threshold limit (1) | Hazardous limit (2)         | Lethal concentration (3) |
|------------------|------------------|-------------------------|---------------------|-----------------------------|--------------------------|
| Hydrogen Cyanide | Hcn              | 0.94                    | 10 ppm              | 150 ppm/hr                  | 300 ppm                  |
| Hydrogen Sulfide | H2S              | 1.18                    | 10 ppm              | 250 ppm/hr                  | 600 ppm                  |
| Sulfur Dioxide   | So2              | 2.21                    | 5 ppm               | -                           | 1000 ppm                 |
| Chlorine         | Cl2              | 2.45                    | 1 ppm               | 4 ppm/hr                    | 1000 ppm                 |
| Carbon Monoxide  | Co               | 0.97                    | 50 ppm              | 400 ppm/hr                  | 1000 ppm                 |
| Carbon Dioxide   | Co2              | 1.52                    | 5000 ppm            | 5%                          | 10%                      |
| Methane          | Ch4              | 0.55                    | 90,000 ppm          | Combustible above 5% in air |                          |

- 1) threshold limit – concentration at which it is believed that all workers may be repeatedly exposed day after day without adverse effects.
- 2) hazardous limit – concentration that will cause death with short-term exposure.
- 3) lethal concentration – concentration that will cause death with short-term exposure.

### Toxic effects of hydrogen sulfide

Table ii  
Physical effects of hydrogen sulfide

| <u>Percent (%)</u> | <u>Ppm</u> | <u>Concentration</u><br>Grains<br><u>100 std. Ft3*</u> | <u>Physical effects</u>      |
|--------------------|------------|--|------------------------------|
| 0.001              | <10        | 00.65  | Obvious and unpleasant odor. |

|       |      |       |  |
|-------|------|-------|--|
| 0.002 | 10   | 01.30 | Safe for 8 hours of exposure.  |
| 0.010 | 100  | 06.48 | Kill smell in 3 – 15 minutes. May sting eyes and throat.                           |
| 0.020 | 200  | 12.96 | Kills smell shortly; stings eyes and throat.                                       |
| 0.050 | 500  | 32.96 | Dizziness; breathing ceases in a few minutes; needs prompt artificial respiration. |
| 0.070 | 700  | 45.36 | Unconscious quickly; death will result if not rescued promptly.                    |
| 0.100 | 1000 | 64.30 | Unconscious at once; followed by death within minutes.                             |

\*at 15.00 psia and 60'f.

### **Use of self-contained breathing equipment (SCBA)**

1. Written procedures shall be prepared covering safe use of SCBA's in dangerous atmosphere, which might be encountered in normal operations or in emergencies. Personnel shall be familiar with these procedures and the available SCBA.
2. SCBA's shall be inspected frequently at random to insure that they are properly used, cleaned, and maintained.
3. Anyone who may use the SCBA's shall be trained in how to insure proper face-piece to face seal. They shall wear SCBA's in normal air and then wear them in a test atmosphere. (note: such items as facial hair {beard or sideburns} and eyeglasses will not allow proper seal.) Anyone that may be reasonably expected to wear SCBA's should have these items removed before entering a toxic atmosphere. A special mask must be obtained for anyone who must wear eyeglasses or contact lenses.
4. Maintenance and care of SCBA's:
  - a. A program for maintenance and care of SCBA's shall include the following:
    1. Inspection for defects, including leak checks.
    2. Cleaning and disinfecting.
    3. Repair.
    4. Storage.
  - b. Inspection, self-contained breathing apparatus for emergency use shall be inspected monthly.
    1. Fully charged cylinders.
    2. Regulator and warning device operation.
    3. Condition of face piece and connections.
    4. Rubber parts shall be maintained to keep them pliable and prevent deterioration.
  - c. Routinely used SCBA's shall be collected, cleaned and disinfected as frequently as necessary to insure proper protection is provided.
5. Persons assigned tasks that requires use of self-contained breathing equipment shall be certified physically fit (medically cleared) for breathing equipment usage at least annually.
6. SCBA's should be worn when:
  - A. Any employee works near the top or on top of any tank unless test reveals less than 10 ppm of H<sub>2</sub>S.

- B. When breaking out any line where H<sub>2</sub>S can reasonably be expected.
- C. When sampling air in areas to determine if toxic concentrations of H<sub>2</sub>S exists.
- D. When working in areas where over 10 ppm H<sub>2</sub>S has been detected.
- E. At any time there is a doubt as to the H<sub>2</sub>S level in the area to be entered.

**Rescue**  
**First aid for H<sub>2</sub>S poisoning**

Do not panic!

Remain calm – think!

1. Don SCBA breathing equipment.
2. Remove victim(s) utilizing buddy system to fresh air as quickly as possible. (go up-wind from source or at right angle to the wind. Not down wind.)
3. Briefly apply chest pressure – arm lift method of artificial respiration to clean the victim's lungs and to avoid inhaling any toxic gas directly from the victim's lungs.
4. Provide for prompt transportation to the hospital, and continue giving artificial respiration if needed.
5. Hospital(s) or medical facilities need to be informed, before-hand, of the possibility of H<sub>2</sub>S gas poisoning – no matter how remote the possibility is.
6. Notify emergency room personnel that the victim(s) has been exposed to H<sub>2</sub>S gas.

Besides basic first aid, everyone on location should have a good working knowledge of artificial respiration.

Revised CM 6/27/2012



Fluid Technology

Quality Document

| QUALITY CONTROL<br>INSPECTION AND TEST CERTIFICATE   |           |                                      |  | CERT. N°: 746       |  |
|--|-----------|--------------------------------------|--|---------------------|--|
| PURCHASER: Phoenix Beattie Co.   |           |                                      |  | P.O. N°: 002491     |  |
| CONTITECH ORDER N°: 412638   |           | HOSE TYPE: 3" ID Choke and Kill Hose |  |                     |  |
| HOSE SERIAL N°: 52777  |           | NOMINAL / ACTUAL LENGTH: 10,67 m     |  |                     |  |
| W.P. 68,96 MPa 10000 psi   |           | T.P. 103,4 MPa 15000 psi             |  | Duration: 60 ~ min. |  |
| <p>Pressure test with water at ambient temperature</p> <p style="text-align: center;">See attachment. (1 page)</p> <p>↑ 10 mm = 10 Min.<br/>→ 10 mm = 25 MPa</p> |           |                                      |  |                     |  |
| COUPLINGS  |           |                                      |  |                     |  |
| Type   | Serial N° |                                      | Quality                                | Heat N°             |  |
| 3" coupling with<br>4 1/16" Flange end   | 917       | 913                                  | AISI 4130                              | T7998A              |  |
|  |           |                                      | AISI 4130                              | 26984               |  |
| INFOCHIP INSTALLED   |           |                                      | API Spec 16 C<br>Temperature rate: "B" |                     |  |
| All metal parts are flawless   |           |                                      |  |                     |  |
| WE CERTIFY THAT THE ABOVE HOSE HAS BEEN MANUFACTURED IN ACCORDANCE WITH THE TERMS OF THE ORDER AND PRESSURE TESTED AS ABOVE WITH SATISFACTORY RESULT.            |           |                                      |  |                     |  |
| Date:  | Inspector |                                      | Quality Control                        |                     |  |
| 04. April. 2008  |           |                                      |  |                     |  |



FH-3

Coflex Hose Certification

Form No 100/12

**Phoenix Beattie Corp**

11535 Brittmoore Park Drive  
Houston, TX 77041  
Tel: (832) 327-0141  
Fax: (832) 327-0148  
E-mail: mail@phoenixbeattie.com  
www.phoenixbeattie.com

**Delivery Note**

|  |             |   |        |             |   |
|--|-------------|---|--------|-------------|---|
| <b>Customer Order Number</b>   | 370-369-001 | <b>Delivery Note Number</b>   | 003078 | <b>Page</b> | 1 |
| <b>Customer / Invoice Address</b><br>HELMERICH & PAYNE INT'L DRILLING CO<br>1437 SOUTH BOULDER<br>TULSA, OK<br>74119 |             | <b>Delivery / Address</b><br>HELMERICH & PAYNE IDC<br>ATTN: JOE STEPHENSON - RIG 370<br>13609 INDUSTRIAL ROAD<br>HOUSTON, TX<br>77015 |        |             |   |

|                        |   |                                  |             |
|------------------------|---|----------------------------------|-------------|
| <b>Customer Acc No</b> | <b>Phoenix Beattie Contract Manager</b> | <b>Phoenix Beattie Reference</b> | <b>Date</b> |
| H01                    | JJL                                     | 006330                           | 05/23/2008  |

| Item No | Beattie Part Number / Description  | Qty Ordered | Qty Sent | Qty To Follow |
|---------|--|-------------|----------|---------------|
| 1       | HP10CK3A-35-4F1<br>3" 10K 16C C&K HOSE x 35ft OAL CW 4.1/16" API SPEC FLANGE E/<br>End 1: 4.1/16" 10Kpsi API Spec 6A Type 6BX Flange<br>End 2: 4.1/16" 10Kpsi API Spec 6A Type 6BX Flange<br>c/w BX155 Standard ring groove at each end<br>Suitable for H2S Service<br>Working pressure: 10,000psi<br>Test pressure: 15,000psi<br>Standard: API 16C Full specification<br>Armor Guarding: Included<br>Fire Rating: Not Included<br>Temperature rating: -20 Deg C to +100 Deg C | 1           | 1        | 0             |
| 2       | SECK3-HPF3<br>LIFTING & SAFETY EQUIPMENT TO SUIT HP10CK3-35-F1<br>2 x 160mm ID Safety Clamps<br>2 x 244mm ID Lifting Collars & element C's<br>2 x 7ft Stainless Steel wire rope 3/4" OD<br>4 x 7.75t Shackles  | 1           | 1        | 0             |
| 3       | SC725-200CS<br>SAFETY CLAMP 200MM 7.25T C/S GALVANISED   | 1           | 1        | 0             |

Continued...

All goods remain the property of Phoenix Beattie until paid for in full. Any damage or shortage on this delivery must be advised within 5 days.  
Returns may be subject to a handling charge.





## Phoenix Beattie Corp

11535 Britton Park Drive  
Houston, TX 77041  
Tel: (832) 327-0141  
Fax: (832) 327-0148  
E-mail: mail@phoenixbeattie.com  
www.phoenixbeattie.com

## Delivery Note

|   |             |  |        |      |   |
|---|-------------|--|--------|------|---|
| Customer Order Number   | 370-369-001 | Delivery Note Number   | 003078 | Page | 2 |
| Customer / Invoice Address<br>HELMERICH & PAYNE INT'L DRILLING CO<br>1437 SOUTH BOULDER<br>TULSA, OK<br>74119 |             | Delivery / Address<br>HELMERICH & PAYNE IDC<br>ATTN: JOE STEPHENSON - RIG 370<br>13609 INDUSTRIAL ROAD<br>HOUSTON, TX<br>77015 |        |      |   |

|                 |                                  |                           |            |
|-----------------|----------------------------------|---------------------------|------------|
| Customer Acc No | Phoenix Beattie Contract Manager | Phoenix Beattie Reference | Date       |
| H01             | JJL                              | 005330                    | 05/23/2008 |

| Item No | Beattie Part Number / Description   | Qty Ordered | Qty Sent | Qty To Follow |
|---------|---|-------------|----------|---------------|
| 4       | SC725-132CS<br>SAFETY CLAMP 132MM 7.25T C/S GALVANIZED C/W BOLTS  | 1           | 1        | 0             |
| 5       | 00CERT-HYDRO<br>HYDROSTATIC PRESSURE TEST CERTIFICATE   | 1           | 1        | 0             |
| 6       | 00CERT-LOAD<br>LOAD TEST CERTIFICATES   | 1           | 1        | 0             |
| 7       | 00FREIGHT<br>INBOUND / OUTBOUND FREIGHT<br>PRE-PAY & ADD TO FINAL INVOICE<br>NOTE: MATERIAL MUST BE ACCOMPANIED BY PAPERWORK INCLUDING<br>THE PURCHASE ORDER, RIG NUMBER TO ENSURE PROPER PAYMENT | 1           | 1        | 0             |

Phoenix Beattie Inspection Signature :

Received In Good Condition : Signature

Print Name

Date

All goods remain the property of Phoenix Beattie until paid for in full. Any damage or shortage on this delivery must be advised within 5 days.  
Returns may be subject to a handling charge.

# PHOENIX Beattie

# Material Identification Certificate

[illegible]

We hereby certify that these goods have been inspected by our Quality Management System, and to the best of our knowledge are found to conform to relevant industry standards within the requirements of the purchase order as issued to Phoenix Beettle Corporation.

05/23/08

---


**CERTIFICATE OF CONFORMITY**

**Supplier** : CONTITECH RUBBER INDUSTRIAL KFT.  
**Equipment** : 6 pcs. Choke and Kill Hose with installed couplings  
**Type** : 3" x 10,67 m WP: 10000 psi  
**Supplier File Number** : 412638  
**Date of Shipment** : April. 2008  
**Customer** : Phoenix Beattie Co.  
**Customer P.o.** : 002491  
**Referenced Standards**  
**/ Codes / Specifications** : API Spec 16 C  
**Serial No.:** 52754,52755,52776,52777,52778,52782

**STATEMENT OF CONFORMITY**

We hereby certify that the above items/equipment supplied by us are in conformity with the terms, conditions and specifications of the above Purchaser Order and that these items/equipment were fabricated inspected and tested in accordance with the referenced standards, codes and specifications and meet the relevant acceptance criteria and design requirements.

**COUNTRY OF ORIGIN HUNGARY/EU**

Signed : 

**Position: Q.C. Manager**

ContiTech Rubber  
Industrial Kft.  
Quality Control Dept.  
(1)

**Date: 04. April. 2008**

District I  
1625 N. French Dr., Hobbs, NM 88240  
District II  
811 S. First St., Artesia, NM 88210  
District III  
1000 Rio Brazos Road, Aztec, NM 87410  
District IV  
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico  
Energy, Minerals and Natural Resources Department  
Oil Conservation Division  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

Submit Original  
to Appropriate  
District Office

### GAS CAPTURE PLAN

Date: 01-31-2017

☒ Original

Operator & OGRID No.: OXY USA INC. - 16696

☐ Amended - Reason for Amendment: \_\_\_\_\_

This Gas Capture Plan outlines actions to be taken by the Operator to reduce well/production facility flaring/venting for new completion (new drill, recomple to new zone, re-frac) activity.

*Note: Form C-129 must be submitted and approved prior to exceeding 60 days allowed by Rule (Subsection A of 19.15.18.12 NMAC).*

#### **Well(s)/Production Facility – Name of facility**

The well(s) that will be located at the production facility are shown in the table below.

| Well Name                            | API     | Well Location<br>(ULSTR)              | Footages            | Expected<br>MCF/D | Flared<br>or | Comments |
|--------------------------------------|---------|---------------------------------------|---------------------|-------------------|--------------|----------|
| Palladium MDP1 7/6<br>Federal Com 1H | Pending | Unit M / Lot 4, Sec. 7,<br>T24S, R31E | 609 FSL<br>682 FWL  | 3,229             | 0            |          |
| Palladium MDP1 7/6<br>Federal Com 2H | Pending | Unit M / Lot 4, Sec. 7,<br>T24S, R31E | 609 FSL<br>742 FWL  | 3,229             | 0            |          |
| Palladium MDP1 7/6<br>Federal Com 3H | Pending | Unit C, Sec. 18, T24S,<br>R31E        | 169 FNL<br>2255 FWL | 3,229             | 0            |          |
| Palladium MDP1 7/6<br>Federal Com 4H | Pending | Unit C, Sec. 18, T24S,<br>R31E        | 169 FNL<br>2285 FWL | 3,229             | 0            |          |
| Palladium MDP1 7/6<br>Federal Com 5H | Pending | Unit P, Sec. 7, T24S,<br>R31E         | 293 FSL<br>592 FEL  | 3,229             | 0            |          |
| Palladium MDP1 7/6<br>Federal Com 6H | Pending | Unit P, Sec. 7, T24S,<br>R31E         | 293 FSL<br>562 FEL  | 3,229             | 0            |          |

#### **Gathering System and Pipeline Notification**

Well(s) will be connected to a production facility after flowback operations are complete, where a gas transporter system is in place. The gas produced from production facility is dedicated to Enterprise Field Services, LLC ("Enterprise") and is connected to Enterprise gathering system located in Eddy County, New Mexico. OXY USA INC. ("OXY") provides (periodically) to Enterprise a drilling, completion and estimated first production date for wells that are scheduled to be drilled in the foreseeable future. In addition, OXY and Enterprise have periodic conference calls to discuss changes to drilling and completion schedules. Gas from these wells will be processed at Enterprise Processing Plant located in Sec. 36, Twn. 24S, Rng. 30E, Eddy County, New Mexico. The actual flow of the gas will be based on compression operating parameters and gathering system pressures.

#### **Flowback Strategy**

After the fracture treatment/completion operations, well(s) will be produced to temporary production tanks and gas will be flared or vented. During flowback, the fluids and sand content will be monitored. When the produced fluids contain minimal sand, the wells will be turned to production facilities. Gas sales should start as soon as the wells start flowing through the production facilities, unless there are operational issues on Enterprise system at that time. Based on current information, it is OXY's belief the system can take this gas upon completion of the well(s).

Safety requirements during cleanout operations from the use of underbalanced air cleanout systems may necessitate that sand and non-pipeline quality gas be vented and/or flared rather than sold on a temporary basis.

### **Alternatives to Reduce Flaring**

Below are alternatives considered from a conceptual standpoint to reduce the amount of gas flared.

- Power Generation – On lease
  - Only a portion of gas is consumed operating the generator, remainder of gas will be flared
- Compressed Natural Gas – On lease
  - Gas flared would be minimal, but might be uneconomical to operate when gas volume declines
- NGL Removal – On lease
  - Plants are expensive, residue gas is still flared, and uneconomical to operate when gas volume declines

**Surface Use Plan of Operations**

**Operator Name/Number:** OXY USA Inc. – 16696  
**Lease Name/Number:** Palladium MDP1-7-6 Federal Com #4H  
**Pool Name/Number:** Cotton Draw Bone Spring 13367  
**Surface Location:** 169 FNL 2285 FWL NENW (C) Sec 18 T24S R31E - NMNM089819  
**Bottom Hole Location:** 180 FNL 2200 FEL NWNE (2) Sec 6 T24S R31E – NMNM082904

**1. Existing Roads**

- a. A copy of the USGS “Big Sinks, NM” quadrangle map is attached showing the proposed location. The well location is spotted on the map, which shows the existing road system.
- b. The well was staked by Terry J Asel, Certificate No. 15079 on 6/2/16, certified 9/23/16.
- c. Directions to Location: From the intersection of USH 128 and CR 787 (Twin Wells Road), go south on CR 787 for 5.3 miles. Turn right on caliche road and go west for 0.4 miles. Turn left on proposed road and go south for 80.4’ to location.

**2. New or Reconstructed Access Roads:**

- a. A new access road will be built. The access road will run approximately 80.4’ south through pasture to the northeast corner of the pad.
- b. The maximum width of the road will be 14’. It will be crowned and made up of 6” of rolled and compacted caliche. Water will be deflected, as necessary, to avoid accumulation and prevent surface erosion.
- c. Surface material will be native caliche. This material will be obtained from a BLM approved pit nearest in proximity to the location. The average grade will be approximately 1%.
- d. No cattle guards, grates or fence cuts will be required. No turnouts are planned.
- e. Blade, water and repair existing caliche roads as needed.

**3. Location of Existing Wells:**

Existing wells within a one mile radius of the proposed well are shown on attached plat.

**4. Location of Existing and/or Proposed Facilities:**

- a. In the event the well is found productive, the Sand Dunes South Corridor central tank battery would be utilized and the necessary production equipment will be installed at the well site. See proposed facilities layout diagram.
- b. All flow lines will adhere to API standards. They will consist of 2 – 4” composite flowlines operating < 75% MAWP, surface and 1 – 6” steel gas lift supply line operating <1500 psig, buried, lines to follow surveyed route. Survey of a strip of land 30’ wide and 2106.1’ in length crossing USA Land in Sections 7 & 18 T24S R31E NMPM, Eddy County, NM and being 15’ left and 15’ right of the centerline survey, see attached.
- c. Electric line will follow a route approved by the BLM. Survey of a strip of land 30’ wide and 250.6’ in length crossing USA Land in Section 7 T24S R31E NMPM, Eddy County, NM and being 15’ left and 15’ right of the centerline survey, see attached.

- d. All of the Palladium MDP1 7-6 Fed Com #1H-#6H will be routed to the Sand Dunes South Corridor CTB. Each well will have (2) surface laid flowlines operating at less than 75% of the MAWP of the flowline. The Sand Dunes South Corridor will be supported by centralized gas lift. The main gas lift compressors will be located on the pad of the Patton 18-3, directly adjacent to the Sand Dunes South Corridor CTB, and will be fed by a buried suction line from the Sand Dunes South Corridor CTB at low pressure. The discharge of the compressors at the Patton 18-3 will go into a common trunk line running the length of the South Corridor that will consist of (2) 12" high pressure gas lines. From the trunk line, there will be (1) 6" high pressure line running to each well. Additional gas lift compressors may be needed at the wellhead if higher injection pressures are required. See Attached.

## **5. Location and types of Water Supply**

This well will be drilled using a combination of water mud systems. It will be obtained from commercial water stations in the area and will be hauled to location by transport truck using existing and proposed roads.

## **6. Construction Materials:**

### **Primary**

All caliche utilized for the drilling pad and proposed access road will be obtained from an existing BLM/State/Fee approved pit or from prevailing deposits found on the location. Will use BLM recommended extra caliche from other locations close by for roads, if available.

### **Secondary**

The secondary way of obtaining caliche to build locations and roads will be by "turning over" the location. This means, caliche will be obtained from the actual well site. A caliche permit will be obtained from BLM prior to pushing up any caliche. 2400 cubic yards is max amount of caliche needed for pad and roads. Amount will vary for each pad. The procedure below has been approved by BLM personnel:

- a. The top 6" of topsoil is pushed off and stockpiled along the side of the location.
- b. An approximate 120' X 120' area is used within the proposed well site to remove caliche.
- c. Subsoil is removed and piled alongside the 120' X 120' within the pad site.
- d. When caliche is found, material will be stockpiled within the pad site to build the location and road.
- e. Then subsoil is pushed back in the hole and caliche is spread accordingly across entire location and road.
- f. Once the well is drilled the stockpiled top soil will be used for interim reclamation and spread along areas where caliche is picked up and the location size is reduced. Neither caliche nor subsoil will be stockpiled outside of the well pad. Topsoil will be stockpiled along the edge of the pad as depicted in the attached plat.

## **7. Methods of Handling Waste Material:**

- a. A closed loop system will be utilized consisting of above ground steel tanks and haul-off bins. Disposal of liquids, drilling fluids and cuttings will be disposed of at an approved facility. Solids-CRI, Liquids-Laguna
- b. All trash, junk and other waste material will be contained in trash cages or bins to prevent scattering. When the job is completed, all contents will be removed and disposed of in an approved sanitary landfill.
- c. The supplier, including broken sacks, will pickup slats remaining after completion of well.
- d. A Porto-john will be provided for the rig crews. This equipment will be properly maintained during the drilling and completion operations and will be removed when all operations are complete.
- e. Disposal of fluids to be transported will be by the following companies. TFH Ltd, Laguna SWD Facility

## **8. Ancillary Facilities:** None needed.

**9. Well Site Layout:**

The proposed well site layout with dimensions of the pad layout and equipment location.

V-Door – West

CL Tanks – South

Pad – 330' X 440' – 2 well pad

**10. Plans for Surface Reclamation:**

- a. After concluding the drilling and/or completion operations, if the well is found non-commercial, the caliche will be removed from the pad and transported to the original caliche pit or used for other drilling locations. The road will be reclaimed as directed by the BLM. The original topsoil will again be returned to the pad and contoured, as close as possible, to the original topography, and the area will be seeded with an approved BLM mixture to re-establish vegetation.
- b. If the well is deemed commercially productive, caliche from the areas of the pad site not required for operations will be reclaimed. The original topsoil will be returned to the area of the drill pad not necessary to operate the well. These unused areas of the drill pad will be contoured, as close as possible, to match the original topography, and the area will be seeded with an approved BLM mixture to re-establish vegetation.

**11. Surface Ownership:**

The surface is owned by the U.S. Government and is administered by the BLM. The surface is multiple use with the primary uses of the region for the grazing of livestock and the production of oil and gas. The surface is leased to: Richardson Cattle Co./J&R Engineering, P.O. Box 487, Carlsbad, NM 88221. They will be notified of our intention to drill prior to any activity.

**12. Other Information:**

- a. The vegetation cover is generally sparse consisting of mesquite, yucca, shinnery oak, sandsage and perennial native range grass. The topsoil is sandy in nature. Wildlife in the area is also sparse consisting of deer, coyotes, rabbits, rodents, reptiles, dove and quail.
- b. There is no permanent or live water in the general proximity of the location.
- c. There are no dwellings within one mile of the proposed well site.
- d. Cultural Resources Examination—This well is located in the Permian Basin PA. Payment to be determined by BLM. This well shares the same pad as the Palladium MDP1-7-6 Federal Com #3H.

|                            |                  |                      |                |                  |
|----------------------------|------------------|----------------------|----------------|------------------|
| Pad + ¼ mile road          | <u>\$1518.00</u> | \$.21/ft over ¼ mile | <u>\$ 0.00</u> | <u>\$1518.00</u> |
| Pipeline-up to 1 mile      | <u>\$1402.00</u> | \$.26/ft over 1 mile | <u>\$ 0.00</u> | <u>\$1402.00</u> |
| Electric Line-up to 1 mile | <u>\$702.00</u>  | \$.23/ft over 1 mile | <u>\$ 0.00</u> | <u>\$ 702.00</u> |
| Total                      | <u>\$3622.00</u> |                      | <u>\$ 0.00</u> | <u>\$3622.00</u> |

- e. Copy of this application has been mailed to SWCA Environmental Consultants, 5647 Jefferson St. NE, Albuquerque, NM 87109. No Potash leases within one mile of surface location.

**13. Bond Coverage:**

Bond coverage is Individual-NMB000862, Nationwide-ESB00226.



**14. Operators Representatives:**

The OXY Permian representatives responsible for ensuring compliance of the surface use plan are listed below:

Victor Guadian  
Production Coordinator  
1502 West Commerce Dr.  
Carlsbad, NM 88220  
Office – 575-628-4006  
Cellular – 575-291-9905

Jim Wilson  
Operation Specialist  
P.O. Box 50250  
Midland, TX 79710  
Cellular – 575-631-2442

Charles Wagner  
Manager Field Operations  
1502 West Commerce Dr.  
Carlsbad, NM 88220  
Office – 575-628-4151  
Cellular – 575-725-8306

Omar Lisigurski  
RMT Leader  
P.O. Box 4294  
Houston, TX 77210  
Office – 713-215-7506  
Cellular – 281-222-7248

**PECOS DISTRICT  
DRILLING OPERATIONS  
CONDITIONS OF APPROVAL**

|                       |                                      |
|-----------------------|--------------------------------------|
| OPERATOR'S NAME:      | OXY USA Inc                          |
| LEASE NO.:            | NM89819                              |
| WELL NAME & NO.:      | Palladium MDP1 7 6 Federal – 4H      |
| SURFACE HOLE FOOTAGE: | 169'/N & 2285'/W                     |
| BOTTOM HOLE FOOTAGE:  | 180'/N & 2200'/W, sec. 6             |
| LOCATION:             | Section 18, T. 24 S., R. 31 E., NMPM |
| COUNTY:               | Eddy County, New Mexico              |

**A. DRILLING OPERATIONS REQUIREMENTS**

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ **Eddy County**

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,  
(575) 361-2822

1. **Although there are no measured amounts of Hydrogen Sulfide reported, it is always a potential hazard. It is recommended that monitoring equipment be onsite for potential Hydrogen Sulfide. If H<sub>2</sub>S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, report measured amounts and formations to the BLM.**
2. **The operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s)**
3. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works is located, this does not include the dog house or stairway area.

4. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

## **B. CASING**

Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.

Centralizers required on surface casing per Onshore Order 2.III.B.1.f.

### **Wait on cement (WOC) for Potash Areas:**

After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log.

No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.

### **Secretary's Potash**

**Possible water flows in the Castile and Salado.**

**Possible lost circulation in the Rustler, Red Beds, and Delaware.**

1. The 13-3/8 inch surface casing shall be set at approximately **662** feet (a minimum of 25 feet into the Rustler Anhydrite and above the salt) and cemented to the surface. **If salt is encountered, set casing at least 25 feet above the salt.**
  - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.

- b. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry.**
- c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
- d. If cement falls back, remedial cementing will be done prior to drilling out that string.

**Formation below the 13-3/8" shoe to be tested according to Onshore Order 2.III.B.1.i. Test to be done as a mud equivalency test using the mud weight necessary for the pore pressure of the formation below the shoe and the mud weight for the bottom of the hole. Report results to BLM office.**

**Intermediate casing shall be kept fluid filled while running into hole to meet BLM minimum collapse requirements.**

- 2. The minimum required fill of cement behind the **9-5/8** inch intermediate casing, is:

- ☒ Cement to surface. If cement does not circulate see B.1.a, c-d above. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to potash.**

**Formation below the 9-5/8" shoe to be tested according to Onshore Order 2.III.B.1.i. Test to be done as a mud equivalency test using the mud weight necessary for the pore pressure of the formation below the shoe (not the mud weight required to prevent dissolving the salt formation) and the mud weight for the bottom of the hole. Report results to BLM office.**

**Centralizers required on horizontal leg, must be type for horizontal service and a minimum of one every other joint.**

- 3. The minimum required fill of cement behind the **5-1/2** inch production casing is:

- ☒ Cement to surface. If cement does not circulate see B.1.a, c-d above.

- 4. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.

## **C. PRESSURE CONTROL**

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API 53.
2. Variance approved to use flex line from BOP to choke manifold. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. **Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.** If the BLM inspector questions the straightness of the hose, a BLM engineer will be contacted and will review in the field or via picture supplied by inspector to determine if changes are required (operator shall expect delays if this occurs).
3. **Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be 5000 (5M) psi.**
  - a. **Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.**
  - b. **If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.**
  - c. **Manufacturer representative shall install the test plug for the initial BOP test.**
  - d. **Operator shall perform the intermediate casing integrity test to 70% of the casing burst. This will test the multi-bowl seals.**
  - e. **If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.**

**5M system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.**

4. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.

- a. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time.
- b. The tests shall be done by an independent service company utilizing a test plug **not a cup or J-packer**.
- c. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- d. The results of the test shall be reported to the appropriate BLM office.
- e. All tests are required to be recorded on a calibrated test chart. **A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.**
- f. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.

#### **D. DRILL STEM TEST**

If drill stem tests are performed, Onshore Order 2.III.D shall be followed.

#### **E. WASTE MATERIAL AND FLUIDS**

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

### **Communitization Agreement**

- The operator will submit a Communitization Agreement to the Carlsbad Field Office, 620 E Greene St. Carlsbad, New Mexico 88220, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

**TMAK 06172017**

# PECOS DISTRICT SURFACE USE CONDITIONS OF APPROVAL

|                       |                                      |
|-----------------------|--------------------------------------|
| OPERATOR'S NAME:      | OXY USA Inc                          |
| LEASE NO.:            | NM89819                              |
| WELL NAME & NO.:      | Palladium MDP1 7 6 Federal – 4H      |
| SURFACE HOLE FOOTAGE: | 169'/N & 2285'/W                     |
| BOTTOM HOLE FOOTAGE:  | 180'/N & 2200'/W, sec. 6             |
| LOCATION:             | Section 18, T. 24 S., R. 31 E., NMPM |
| COUNTY:               | Eddy County, New Mexico              |

## TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

- ☐ **General Provisions**
- ☐ **Permit Expiration**
- ☐ **Archaeology, Paleontology, and Historical Sites**
- ☐ **Noxious Weeds**
- ☒ **Special Requirements**
  - Lesser Prairie-Chicken Timing Stipulations
  - Below Ground-level Abandoned Well Marker
  - Cave Karst
- ☐ **Construction**
  - Notification
  - Topsoil
  - Closed Loop System
  - Federal Mineral Material Pits
  - Well Pads
  - Roads
- ☐ **Road Section Diagram**
- ☒ **Production (Post Drilling)**
  - Well Structures & Facilities
  - Pipelines
  - Electric Lines
- ☐ **Interim Reclamation**
- ☐ **Final Abandonment & Reclamation**



## **I. GENERAL PROVISIONS**

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

## **II. PERMIT EXPIRATION**

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

## **III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES**

Any cultural and/or paleontological resource discovered by the operator or by any person working on the operator's behalf shall immediately report such findings to the Authorized Officer. The operator is fully accountable for the actions of their contractors and subcontractors. The operator shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery shall be made by the Authorized Officer to determine the appropriate actions that shall be required to prevent the loss of significant cultural or scientific values of the discovery. The operator shall be held responsible for the cost of the proper mitigation measures that the Authorized Officer assesses after consultation with the operator on the evaluation and decisions of the discovery. Any unauthorized collection or disturbance of cultural or paleontological resources may result in a shutdown order by the Authorized Officer.

## **IV. NOXIOUS WEEDS**

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

## **V. SPECIAL REQUIREMENT(S)**

### **Timing Limitation Stipulation / Condition of Approval for lesser prairie-chicken:**

Oil and gas activities including 3-D geophysical exploration, and drilling will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities, pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Additionally, no new drilling will be allowed within up to 200 meters of leks known at the time of permitting. Normal vehicle use on existing roads will not be restricted. Exhaust noise from pump jack engines must be muffled or otherwise controlled so as not to exceed 75 db measured at 30 feet from the source of the noise.

**Below Ground-level Abandoned Well Marker to avoid raptor perching:** Upon the plugging and subsequent abandonment of the well, the well marker will be installed at ground level on a plate containing the pertinent information for the plugged well. For more installation details, contact the Carlsbad Field Office at 575-234-5972.

## **Cave and Karst**

\*\* Depending on location, additional Drilling, Casing, and Cementing procedures may be required by engineering to protect critical karst groundwater recharge areas.

### **Cave/Karst Surface Mitigation**

The following stipulations will be applied to minimize impacts during construction, drilling and production.

#### **Construction:**

In the advent that any underground voids are opened up during construction activities, construction activities will be halted and the BLM will be notified immediately.

#### **No Blasting:**

No blasting will be utilized for pad construction. The pad will be constructed and leveled by adding the necessary fill and caliche.

#### **Pad Berming:**

The entire perimeter of the well pad will be bermed to prevent oil, salt, and other chemical contaminants from leaving the well pad.

- The compacted berm shall be constructed at a minimum of 12 inches high with impermeable mineral material (e.g. caliche).
- No water flow from the uphill side(s) of the pad shall be allowed to enter the well pad.

- The topsoil stockpile shall be located outside the bermed well pad.
- Topsoil, either from the well pad or surrounding area, shall not be used to construct the berm.
- No storm drains, tubing or openings shall be placed in the berm.
- If fluid collects within the bermed area, the fluid must be vacuumed into a safe container and disposed of properly at a state approved facility.
- The integrity of the berm shall be maintained around the surfaced pad throughout the life of the well and around the downsized pad after interim reclamation has been completed.
- Any access road entering the well pad shall be constructed so that the integrity of the berm height surrounding the well pad is not compromised. (Any access road crossing the berm cannot be lower than the berm height.)

#### **Tank Battery Liners and Berms:**

Tank battery locations and all facilities will be lined and bermed. A 20 mil permanent liner will be installed with a 4 oz. felt backing to prevent tears or punctures. Tank battery berms must be large enough to contain 1 ½ times the content of the largest tank.

#### **Leak Detection System:**

A method of detecting leaks is required. The method could incorporate gauges to measure loss, situating valves and lines so they can be visually inspected, or installing electronic sensors to alarm when a leak is present. Leak detection plan will be submitted to BLM for approval.

#### **Automatic Shut-off Systems:**

Automatic shut off, check valves, or similar systems will be installed for pipelines and tanks to minimize the effects of catastrophic line failures used in production or drilling.

#### **Cave/Karst Subsurface Mitigation**

The following stipulations will be applied to protect cave/karst and ground water concerns:

#### **Rotary Drilling with Fresh Water:**

Fresh water will be used as a circulating medium in zones where caves or karst features are expected. SEE ALSO: Drilling COAs for this well.

#### **Directional Drilling:**

Kick off for directional drilling will occur at least 100 feet below the bottom of the cave occurrence zone. SEE ALSO: Drilling COAs for this well.

#### **Lost Circulation:**

ALL lost circulation zones from the surface to the base of the cave occurrence zone will be logged and reported in the drilling report.

Regardless of the type of drilling machinery used, if a void of four feet or more and circulation losses greater than 70 percent occur simultaneously while drilling in any cave-

bearing zone, the BLM will be notified immediately by the operator. The BLM will assess the situation and work with the operator on corrective actions to resolve the problem.

**Abandonment Cementing:**

Upon well abandonment in high cave karst areas additional plugging conditions of approval may be required. The BLM will assess the situation and work with the operator to ensure proper plugging of the wellbore.

**Pressure Testing:**

Annual pressure monitoring will be performed by the operator on all casing annuli and reported in a sundry notice. If the test results indicated a casing failure has occurred, remedial action will be undertaken to correct the problem to the BLM's approval.

## **VI. CONSTRUCTION**

### **A. NOTIFICATION**

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-5909 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

### **B. TOPSOIL**

The operator shall strip the top portion of the soil (root zone) from the entire well pad area and stockpile the topsoil along the edge of the well pad as depicted in the APD. The root zone is typically six (6) inches in depth. All the stockpiled topsoil will be redistributed over the interim reclamation areas. Topsoil shall not be used for berming the pad or facilities. For final reclamation, the topsoil shall be spread over the entire pad area for seeding preparation.

Other subsoil (below six inches) stockpiles must be completely segregated from the topsoil stockpile. Large rocks or subsoil clods (not evident in the surrounding terrain) must be buried within the approved area for interim and final reclamation.

### **C. CLOSED LOOP SYSTEM**

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

### **D. FEDERAL MINERAL MATERIALS PIT**

Payment shall be made to the BLM prior to removal of any federal mineral materials. Call the Carlsbad Field Office at (575) 234-5972.

### **E. WELL PAD SURFACING**

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation. The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

### **F. EXCLOSURE FENCING (CELLARS & PITS)**

**Exclosure Fencing**

The operator will install and maintain exclosure fencing for all open well cellars to prevent access to public, livestock, and large forms of wildlife before and after drilling operations until the pit is free of fluids and the operator initiates backfilling. (For examples of exclosure fencing design, refer to BLM's Oil and Gas Gold Book, Exclosure Fence Illustrations, Figure 1, Page 18.)

**G. ON LEASE ACCESS ROADS****Road Width**

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed twenty-five (25) feet.

**Surfacing**

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

**Crowning**

Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.

**Ditching**

Ditching shall be required on both sides of the road.

**Turnouts**


Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall conform to Figure 1; cross section and plans for typical road construction.

**Drainage**

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill outslowing and insloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

#### **Cross Section of a Typical Lead-off Ditch**

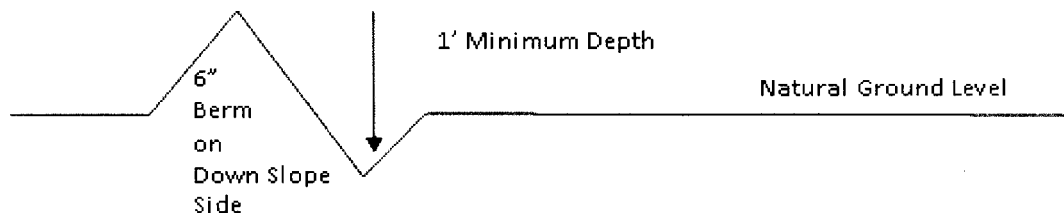

All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

#### **Formula for Spacing Interval of Lead-off Ditches**

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

$$400 \text{ foot road with } 4\% \text{ road slope: } \frac{400'}{4\%} + 100' = 200' \text{ lead-off ditch interval}$$

#### **Cattle guards**

An appropriately sized cattle guard sufficient to carry out the project shall be installed and maintained at fence/road crossings. Any existing cattle guards on the access road route shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattle guards that are in place and are utilized during lease operations.

#### **Fence Requirement**

Where entry is granted across a fence line, the fence shall be braced and tied off on both sides of the passageway prior to cutting. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fences.

#### **Public Access**

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.

### Construction Steps

1. Salvage topsoil
2. Construct road

3. Redistribute topsoil
4. Revegetate slopes

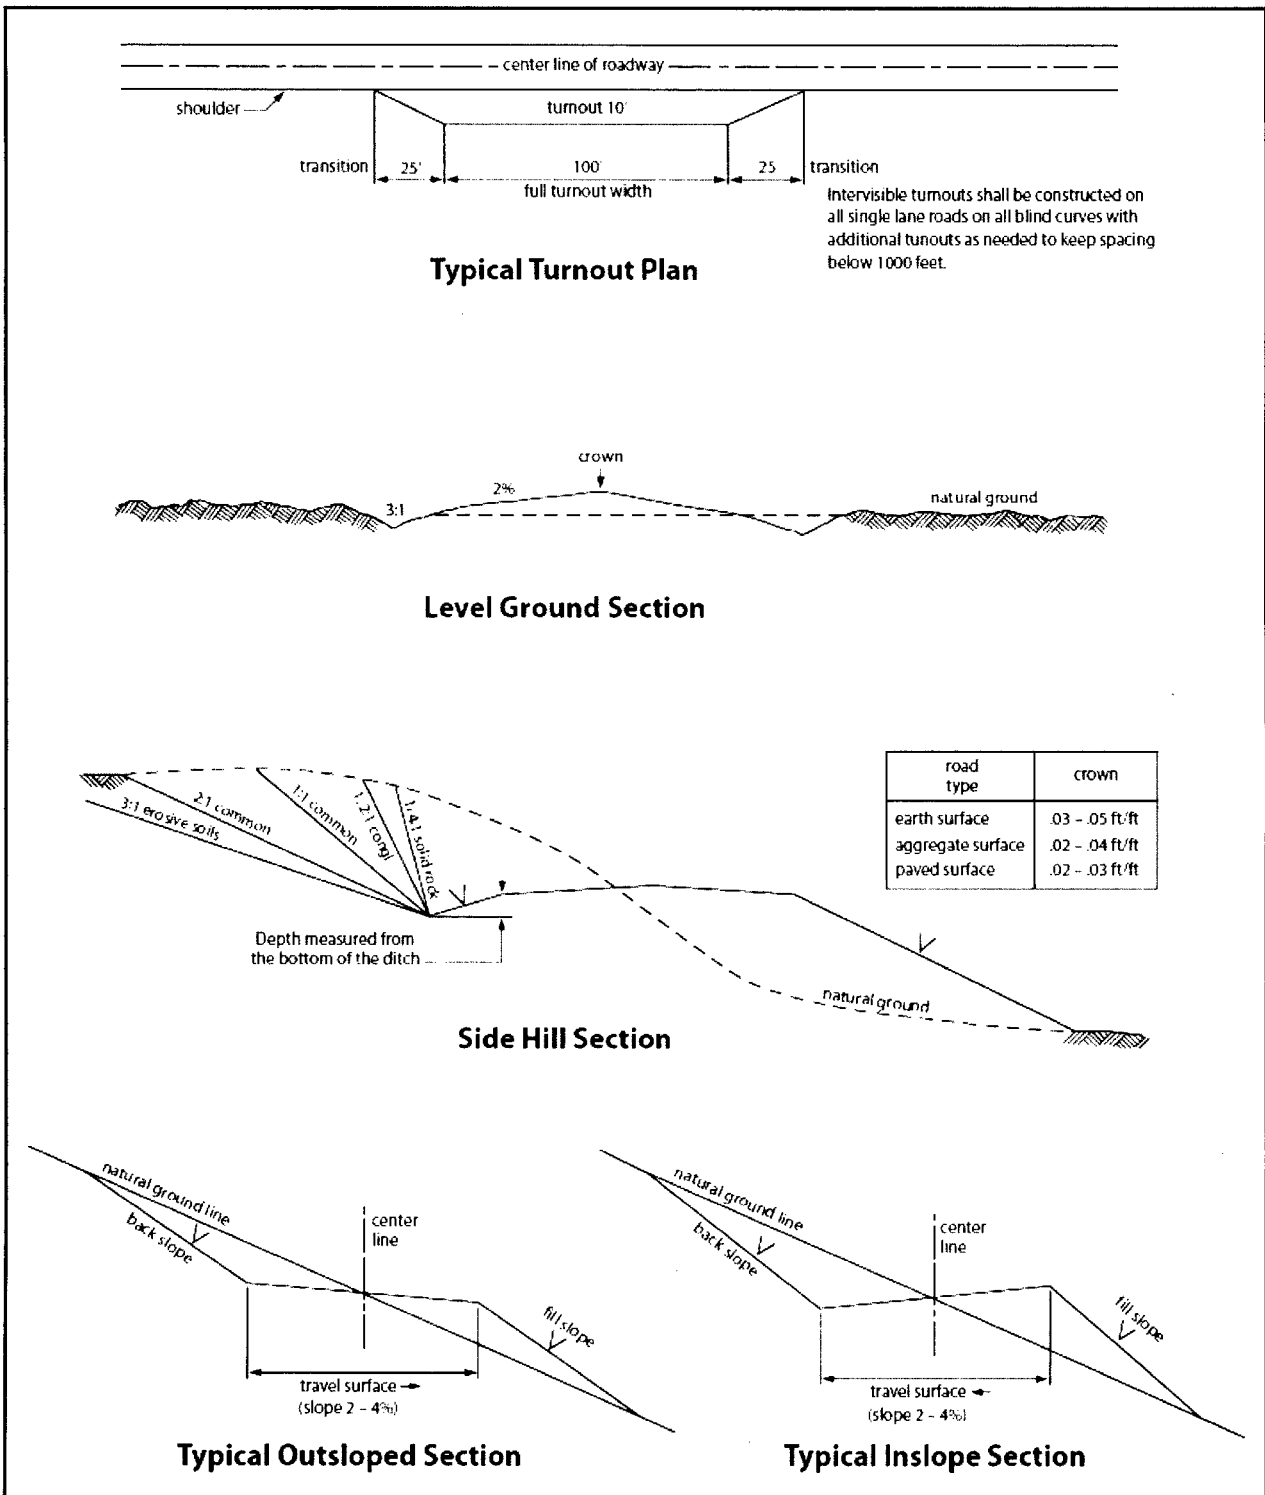


Figure 1. Cross-sections and plans for typical road sections representative of BLM resource or FS local and higher-class roads.



## **VII. PRODUCTION (POST DRILLING)**

### **A. WELL STRUCTURES & FACILITIES**

#### **Placement of Production Facilities**

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

#### **Exclosure Netting (Open-top Tanks)**

Immediately following active drilling or completion operations, the operator will take actions necessary to prevent wildlife and livestock access, including avian wildlife, to all open-topped tanks that contain or have the potential to contain salinity sufficient to cause harm to wildlife or livestock, hydrocarbons, or Resource Conservation and Recovery Act of 1976-exempt hazardous substances. At a minimum, the operator will net, screen, or cover open-topped tanks to exclude wildlife and livestock and prevent mortality. If the operator uses netting, the operator will cover and secure the open portion of the tank to prevent wildlife entry. The operator will net, screen, or cover the tanks until the operator removes the tanks from the location or the tanks no longer contain substances that could be harmful to wildlife or livestock. Use a maximum netting mesh size of 1 ½ inches. The netting must not be in contact with fluids and must not have holes or gaps.

#### **Chemical and Fuel Secondary Containment and Exclosure Screening**

The operator will prevent all hazardous, poisonous, flammable, and toxic substances from coming into contact with soil and water. At a minimum, the operator will install and maintain an impervious secondary containment system for any tank or barrel containing hazardous, poisonous, flammable, or toxic substances sufficient to contain the contents of the tank or barrel and any drips, leaks, and anticipated precipitation. The operator will dispose of fluids within the containment system that do not meet applicable state or U. S. Environmental Protection Agency livestock water standards in accordance with state law; the operator must not drain the fluids to the soil or ground. The operator will design, construct, and maintain all secondary containment systems to prevent wildlife and livestock exposure to harmful substances. At a minimum, the operator will install effective wildlife and livestock exclosure systems such as fencing, netting, expanded metal mesh, lids, and grate covers. Use a maximum netting mesh size of 1 ½ inches.

#### **Open-Vent Exhaust Stack Exclosures**

The operator will construct, modify, equip, and maintain all open-vent exhaust stacks on production equipment to prevent birds and bats from entering, and to discourage perching, roosting, and nesting. (*Recommended exclosure structures on open-vent exhaust stacks are in the shape of a cone.*) Production equipment includes, but may not be limited to, tanks, heater-treaters, separators, dehydrators, flare stacks, in-line units, and compressor mufflers.

#### **Containment Structures**

Proposed production facilities such as storage tanks and other vessels will have a secondary containment structure that is constructed to hold the capacity of 1.5 times the largest tank, plus freeboard to account for precipitation, unless more stringent protective requirements are deemed necessary.

#### **Painting Requirement**

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color, **Shale Green** from the BLM Standard Environmental Color Chart (CC-001: June 2008).

### **B. PIPELINES**

#### **STANDARD STIPULATIONS FOR SURFACE INSTALLED PIPELINES**

**A copy of the Grant and attachments, including stipulations, survey plat(s) and/or map(s), shall be on location during construction. BLM personnel may request to review a copy of your permit during construction to ensure compliance with all stipulations.**

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. Holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
2. Holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, Holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC § 2601 *et seq.* (1982) with regard to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant (*see* 40 CFR, Part 702-799 and in particular, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193). Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR, Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the Authorized Officer concurrent with the filing of the reports to the involved Federal agency or State government.
3. Holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. § 9601, *et seq.* or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, *et seq.*) on the Right-of-Way (unless the release or threatened release is wholly unrelated to activity of the Right-of-Way Holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way Holder on the Right-of-Way. This provision applies

without regard to whether a release is caused by Holder, its agent, or unrelated third parties.

4. Holder shall be liable for damage or injury to the United States to the extent provided by 43 CFR Sec. 2883.1-4. Holder shall be held to a standard of strict liability for damage or injury to the United States resulting from pipe rupture, fire, or spills caused or substantially aggravated by any of the following within the right-of-way or permit area:

- a. Activities of Holder including, but not limited to: construction, operation, maintenance, and termination of the facility;
- b. Activities of other parties including, but not limited to:
  - (1) Land clearing
  - (2) Earth-disturbing and earth-moving work
  - (3) Blasting
  - (4) Vandalism and sabotage;

c. Acts of God.

The maximum limitation for such strict liability damages shall not exceed one million dollars (\$1,000,000) for any one event, and any liability in excess of such amount shall be determined by the ordinary rules of negligence of the jurisdiction in which the damage or injury occurred.

This section shall not impose strict liability for damage or injury resulting primarily from an act of war or from the negligent acts or omissions of the United States.

5. If, during any phase of the construction, operation, maintenance, or termination of the pipeline, any oil, salt water, or other pollutant should be discharged from the pipeline system, impacting Federal lands, the control and total removal, disposal, and cleaning up of such oil, salt water, or other pollutant, wherever found, shall be the responsibility of Holder, regardless of fault. Upon failure of Holder to control, dispose of, or clean up such discharge on or affecting Federal lands, or to repair all damages resulting therefrom, on the Federal lands, the Authorized Officer may take such measures as he/she deems necessary to control and clean up the discharge and restore the area, including, where appropriate, the aquatic environment and fish and wildlife habitats, at the full expense of Holder. Such action by the Authorized Officer shall not relieve Holder of any responsibility as provided herein.

6. All construction and maintenance activity shall be confined to the authorized right-of-way width of 20 feet. If the pipeline route follows an existing road or buried pipeline right-of-way, the surface pipeline shall be installed no farther than 10 feet from the edge of the road or buried pipeline right-of-way. If existing surface pipelines prevent this distance, the proposed surface pipeline shall be installed immediately adjacent to the outer surface pipeline. All construction and maintenance activity shall be confined to existing roads or right-of-ways.

7. No blading or clearing of any vegetation shall be allowed unless approved in writing by the Authorized Officer.
8. Holder shall install the pipeline on the surface in such a manner that will minimize suspension of the pipeline across low areas in the terrain. In hummocky or dune areas, the pipeline shall be "snaked" around hummocks and dunes rather than suspended across these features.
9. The pipeline shall be buried with a minimum of 24 inches under all roads, "two-tracks," and trails. Burial of the pipe will continue for 20 feet on each side of each crossing. The condition of the road, upon completion of construction, shall be returned to at least its former state with no bumps or dips remaining in the road surface.
10. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting of the fence. No permanent gates will be allowed unless approved by the Authorized Officer.
11. In those areas where erosion control structures are required to stabilize soil conditions, the holder will install such structures as are suitable for the specific soil conditions being encountered and which are in accordance with sound resource management practices.
12. Excluding the pipe, all above-ground structures not subject to safety requirement shall be painted by the holder to blend with the natural color of the landscape. The paint used shall be a color which simulates "Standard Environmental Colors" – **Shale Green**, Munsell Soil Color No. 5Y 4/2; designated by the Rocky Mountain Five State Interagency Committee.
13. The pipeline will be identified by signs at the point of origin and completion of the right-of-way and at all road crossings. At a minimum, signs will state the holder's name, BLM serial number, and the product being transported. Signs will be maintained in a legible condition for the life of the pipeline.
14. The holder shall not use the pipeline route as a road for purposes other than routine maintenance as determined necessary by the Authorized Officer in consultation with the holder. The holder will take whatever steps are necessary to ensure that the pipeline route is not used as a roadway.
15. Any cultural and/or paleontological resource (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the authorized officer. Holder shall suspend all

operations in the immediate area of such discovery until written authorization to proceed is issued by the authorized officer. An evaluation of the discovery will be made by the authorized officer to determine appropriate cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the authorized officer after consulting with the holder.

16. The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, powerline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

17. Surface pipelines shall be less than or equal to 4 inches and a working pressure below 125 psi.

18. Special Stipulations:

- a. **Lesser Prairie-Chicken:** Oil and gas activities will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities and pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Normal vehicle use on existing roads will not be restricted.

### **C. ELECTRIC LINES**

#### **STANDARD STIPULATIONS FOR OVERHEAD ELECTRIC DISTRIBUTION LINES**

**A copy of the grant and attachments, including stipulations, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.**

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. The holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
2. The holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 et seq. (1982) with regards to

any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR, Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR, Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.

3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, et seq. or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, et seq.) on the Right-of-Way (unless the release or threatened release is wholly unrelated to the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way holder on the Right-of-Way. This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.

4. There will be no clearing or blading of the right-of-way unless otherwise agreed to in writing by the Authorized Officer.

5. Power lines shall be constructed and designed in accordance to standards outlined in "Suggested Practices for Avian Protection on Power lines: The State of the Art in 2006" Edison Electric Institute, APLIC, and the California Energy Commission 2006 . The holder shall assume the burden and expense of proving that pole designs not shown in the above publication deter raptor perching, roosting, and nesting. Such proof shall be provided by a raptor expert approved by the Authorized Officer. The BLM reserves the right to require modification or additions to all powerline structures placed on this right-of-way, should they be necessary to ensure the safety of large perching birds. Such modifications and/or additions shall be made by the holder without liability or expense to the United States.

Raptor deterrence will consist of but not limited to the following: triangle perch discouragers shall be placed on each side of the cross arms and a nonconductive perching deterrence shall be placed on all vertical poles that extend past the cross arms.

6. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting the fence. No permanent gates will be allowed unless approved by the Authorized Officer.

7. The BLM serial number assigned to this authorization shall be posted in a permanent, conspicuous manner where the power line crosses roads and at all serviced facilities. Numbers will be at least two inches high and will be affixed to the pole nearest the road crossing and at the facilities served.

8. Upon cancellation, relinquishment, or expiration of this grant, the holder shall comply with those abandonment procedures as prescribed by the Authorized Officer.

9. All surface structures (poles, lines, transformers, etc.) shall be removed within 180 days of abandonment, relinquishment, or termination of use of the serviced facility or facilities or within 180 days of abandonment, relinquishment, cancellation, or expiration of this grant, whichever comes first. This will not apply where the power line extends service to an active, adjoining facility or facilities.

10. Any cultural and/or paleontological resource (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the Authorized Officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery will be made by the Authorized Officer to determine appropriate actions to prevent the loss of significant cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the Authorized Officer after consulting with the holder.

11. Special Stipulations:

- For reclamation remove poles, lines, transformer, etc. and dispose of properly.
- Fill in any holes from the poles removed.

**Timing Limitation Stipulation/Condition of Approval for Lesser Prairie-Chicken:**

Oil and gas activities including 3-D geophysical exploration, and drilling will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities, geophysical exploration other than 3-D operations, and pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Additionally, no new drilling will be allowed within up to 200 meters of leks known at the time of permitting. Normal vehicle use on existing roads will not be restricted. Exhaust noise from pump jack engines must be muffled or otherwise controlled so as not to exceed 75 db measured at 30 ft. from the source of the noise.

## **VIII. INTERIM RECLAMATION**

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

Within six (6) months of well completion, operators should work with BLM surface management specialists (Jim Amos: 575-234-5909) to devise the best strategies to reduce the size of the location. Interim reclamation should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche that is free of contaminants may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

All disturbed areas after they have been satisfactorily prepared need to be reseeded with the seed mixture provided below.

Upon completion of interim reclamation, the operator shall submit a Sundry Notices and Reports on Wells, Subsequent Report of Reclamation (Form 3160-5).

## **IX. FINAL ABANDONMENT & RECLAMATION**

At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land are restored.

Earthwork for final reclamation must be completed within six (6) months of well plugging. All pads, pits, facility locations and roads must be reclaimed to a satisfactory revegetated, safe, and stable condition, unless an agreement is made with the landowner or BLM to keep the road and/or pad intact.

After all disturbed areas have been satisfactorily prepared, these areas need to be revegetated with the seed mixture provided below. Seeding should be accomplished by drilling on the contour whenever practical or by other approved methods. Seeding may need to be repeated until revegetation is successful, as determined by the BLM.

Operators shall contact a BLM surface protection specialist prior to surface abandonment operations for site specific objectives (Jim Amos: 575-234-5909).

Below Ground-level Abandoned Well Marker to avoid raptor perching: Upon the plugging and subsequent abandonment of the well, the well marker will be installed at ground level on a plate containing the pertinent information for the plugged well.



## Seed Mixture for LPC Sand/Shinnery Sites

Holder shall seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)\* per acre. There shall be no primary or secondary noxious weeds in the seed mixture. Seed will be tested and the viability testing of seed shall be done in accordance with State law(s) and within nine (9) months prior to purchase. Commercial seed shall be either certified or registered seed. The seed container shall be tagged in accordance with State law(s) and available for inspection by the Authorized Officer.

Seed will be planted using a drill equipped with a depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture will be evenly and uniformly planted over the disturbed area (smaller/heavier seeds have a tendency to drop the bottom of the drill and are planted first). Holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed will be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre are to be doubled. Seeding shall be repeated until a satisfactory stand is established as determined by the Authorized Officer. Evaluation of growth may not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed\* per acre:

| <u>Species</u>      | <u>lb/acre</u> |
|---------------------|----------------|
| Plains Bristlegrass | 5lbs/A         |
| Sand Bluestem       | 5lbs/A         |
| Little Bluestem     | 3lbs/A         |
| Big Bluestem        | 6lbs/A         |
| Plains Coreopsis    | 2lbs/A         |
| Sand Dropseed       | 1lbs/A         |

\*Pounds of pure live seed:

Pounds of seed x percent purity x percent germination = pounds pure live seed