

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well ☒ gas well ☐ other ☐

2. NAME OF OPERATOR
DOME PETROLEUM CORPORATION

3. ADDRESS OF OPERATOR 501 Airport Drive
Suite 107, Farmington, NM 87401

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 990' FNL, 330' FWL
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐

FRACTURE TREAT ☐

SHOOT OR ACIDIZE ☐

REPAIR WELL ☐

PULL OR ALTER CASING ☐

MULTIPLE COMPLETE ☐

CHANGE ZONES ☐

ABANDON* ☐

(other) ADDITIONS TO APD ☐

SUBSEQUENT REPORT OF:

☐
☐
☐
☐
☐
☐
☐
☐
☐
☐

RECEIVED

FEB 6 1980

U. S. GEOLOGICAL SURVEY
FARMINGTON, N. M.

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

1. A schematic diagram of the BOP equipment showing size & API series is attached. BOP will be tested to 500 psi before drilling out from under surface pipe. Pipe rams will be operationally checked daily. BOP rams will be checked on trips.
2. The grade of the proposed casing strings is H40 &
3. Cement & additives to be used on production casing string.
Stage #1- 65/35 Pozmix w/ 6% Gel & 10# Gilsonite/Stage 300sk
class "B" with 10% salt.
Stage #2- 65/35 Pozmix w/ 6% Gel & 10% Gilsonite/Stage 50 sks
class "B" cement with 10% salt.

Depth of stage collar will be approximately 2882

Subsurface Safety Valve: Manu. and Type _____

Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED H. D. Hollingsworth TITLE DRLG & PROD FOREMAN DATE February 4, 1980

(This space for Federal or State office use)


APPROVED BY _____
CONDITIONS OF APPROVAL, IF ANY:

TITLE _____

DATE _____

*See Instructions on Reverse Side

JAMES F. SIMS
DISTRICT ENGINEER

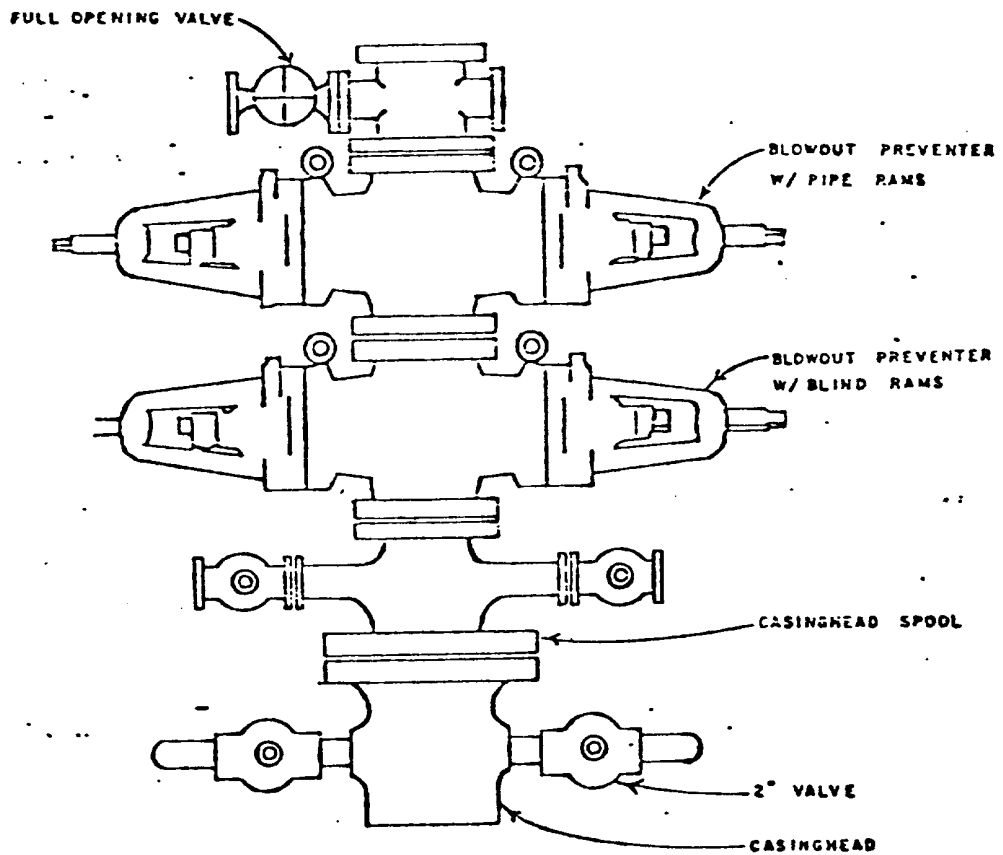

DOME PETROLEUM CORP.

SUITE 1500, COLORADO STATE BANK BLDG.

1600 BROADWAY

DENVER, COLORADO 80202

STANDARD BLOWOUT PREVENTER ASSEMBLY
 900 SERIES

10"