

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ well ☐ gas ☐ well ☐ other ☒ Injector

2. NAME OF OPERATOR

Tenneco Oil Company

3. ADDRESS OF OPERATOR

P. O. Box 3249, Englewood, CO 80155

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)

AT SURFACE: 1532' FNL 2718' FEL

AT TOP PROD. INTERVAL:

AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐

FRACTURE TREAT ☐

SHOOT OR ACIDIZE ☐

REPAIR WELL ☐

PULL OR ALTER CASING ☐

MULTIPLE COMPLETE ☐


CHANGE ZONES ☐

ABANDON\* ☐

(other) ☐

SUBSEQUENT REPORT OF:

☐  
☐  
☒  
☐  
☐  
☐  
☐  
☐

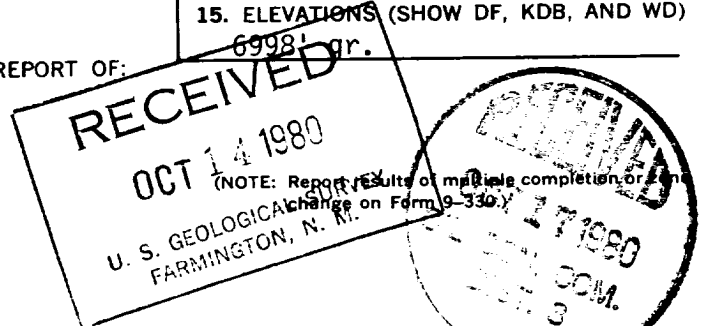

5. LEASE

NM 081208

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Hospah

9. WELL NO.

#67

10. FIELD OR WILDCAT NAME

Hospah USS

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

Sec. 12, T17N, R9W

12. COUNTY OR PARISH

McKinley

13. STATE

New Mexico

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)

6998' gr.

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

9/30/80

RIH w/ new bit, drill collars & tbg. Tagged cmt. @ 1288'. Drilled cmt. from 1288-1595'. Tagged bottom & circ'd clean. PT to 1000 PSI OK. Perf'd Lower Hospah, from 1620-1630' w/2 1/2" gun, 0° phasing, 4 JSPF using orienting tool. Perf'd Upper Hospah from 1555'-1564', 1570'-1592' in similar manner. RIH w/Baker Model E circulating washing tool in upper Hospah completion & acidize Upper Hospah perfs w/1 bbl./ft 7 1/2% MSR acid. POOH w/wash tool & RIH in Lower Hospah. Acidize in a like manner. RIH Lower Hospah w/heat shield and land tbg w/1.81" F nipple 1 jt. off bottom and land @ 1538' in Upper Hospah completion.

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Charles H. Hatt DATE October 7, 1980  
Asst. Div. Adm. Mgr.

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_  
CONDITIONS OF APPROVAL, IF ANY:

TITLE \_\_\_\_\_ DATE \_\_\_\_\_

BY