

Submit 1 Copy To Appropriate District Office
 District I - (575) 393-6161
 1625 N. French Dr., Hobbs, NM 88240
 District II - (575) 748-1283
 811 S. First St., Artesia, NM 88210
 District III - (505) 334-6178
 1000 Rio Brazos Rd., Aztec, NM 87410
 District IV - (505) 476-3460
 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
 Energy, Minerals and Natural Resources

Form C-103
 Revised July 18, 2013

OIL CONSERVATION AND GAS CONSERVATION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505
 ARTESIA DISTRICT
 JAN 17 2019

WELL API NO.	30-015-23242
5. Indicate Type of Lease	STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No.	L0-4857-2
7. Lease Name or Unit Agreement Name	Travis 24 St
8. Well Number	#1
9. OGRID Number	228937
10. Pool name or Wildcat	Loco Hills, Wolfcamp NW
11. Elevation (Show whether DR, RKB, RT, GR, etc.)	3524'

SUNDRY NOTICES AND REPORTS ON WELLS RECEIVED
 (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well Gas Well Other

2. Name of Operator: Matador Production Company

3. Address of Operator: 5400 LBJ Freeway Suite 1500
Dallas TX 75240

4. Well Location
 Unit Letter H : 1980 feet from the NORTH line and 660 feet from the EAST line
 Section 24 Township 18S Range 28E NMPM County Eddy

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO: PERFORM REMEDIAL WORK <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> TEMPORARILY ABANDON <input type="checkbox"/> CHANGE PLANS <input type="checkbox"/> PULL OR ALTER CASING <input type="checkbox"/> MULTIPLE COMPL <input type="checkbox"/> DOWNHOLE COMMINGLE <input type="checkbox"/> CLOSED-LOOP SYSTEM <input type="checkbox"/> OTHER: <input type="checkbox"/> Recomplete <input checked="" type="checkbox"/>		SUBSEQUENT REPORT OF: REMEDIAL WORK <input type="checkbox"/> ALTERING CASING <input type="checkbox"/> COMMENCE DRILLING OPNS <input type="checkbox"/> P AND A <input type="checkbox"/> CASING/CEMENT JOB <input type="checkbox"/> OTHER: <input type="checkbox"/>	
---	--	--	--

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

MIRU, Kill Well
 Set CIBP @ 8608 (current Wolfcamp perms: 8658-8722')
 Spot 35' Cl H cmt on top of CIBP. WOC. Tag. Pressure Test.
 Perf Wolfcamp +/- 8384-8540 & Acidize.
 Swab to test. If productive, RWTP.
 If unproductive, set CIBP 50' above top of perms & spot 35' Cl H cmt. WOC. Tag. Pressure Test.
 Perforate Bone Spring at +/- 8118-8140'. Acidize. Swab. RWTP.

Spud Date: Rig Release Date:


I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE *Chris Villarreal* TITLE Engineer DATE 9/6/18

Type or print name Chris Villarreal E-mail address: cvillarreal@matadorresources.com PHONE: (972) 371-5471

For State Use Only
 APPROVED BY: *Rusty Klen* TITLE Business Ops Spec A DATE 1-23-2019
 Conditions of Approval (if any): Verbal given to Ave Monroe to proceed with work on 1-23-2019

MATADOR PRODUCTION COMPANY
 Travis 24 State #1
 1980' FSL @ 1980' FEL Sec 24 - 18S - 28E
 Eddy County, NM
 API: 30-015-23242
 Proposed Recompletion WBD
 Spudded: 8/31/1980

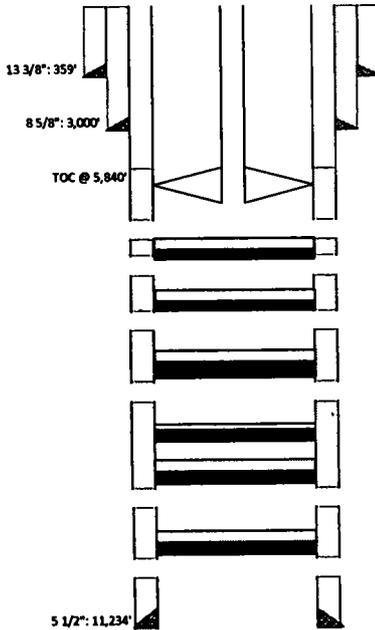

Perf: 8118-8140
 CIBP @ 8334' w/ 35' CI H cmt
 Perf: 8384-8540'

 CIBP @ 8608' w/ 35' CI H cmt
 Perfs: 8658-92', 8710-22', 6 spf (2018)

 Set CIBP @ 10554'. Dump ball CI H cmt. (2018)
 Top of cmt: 10,505' (49')
 (5/17/2008) 10604-10609 30 Holes

 (5/22/2008) CIBP set @ 10673 (10' cmt added 6/4/2008)

 (5/16/2008) CIBP set @ 10685 (Didn't hold)
 (12/30/1980) 10738-10784, 10790-10796,
 10842-10848 44 Holes

 (12/30/1980) CIBP set @ 10890
 (10/24/1980) 10900-10916 24 Holes