

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

070 FAIRBANKS, NM

1. Type of Well
☐ Oil Well ☐ Gas Well ☒ Other Dry hole in the Mesaverde

2. Name of Operator
High Plains Petroleum Corporation

3. Address and Telephone No.
3860 Carlock Dr., Boulder, CO 80303 303-494-4529

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
370' FNL & 710' FEL Sec. 10, T17N, R5W, NMPM

5. Lease Designation and Serial No.

NWNNM94825

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Red Dog Federal #1

9. API Well No.

30-031-20983

10. Field and Pool, or Exploratory Area

Wildcat-Torreón Area

11. County or Parish, State
McKinley County.
New Mexico

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent
☒ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- ☒ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☐ Other

- ☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Plugged 1/15/96 as follows: Set drill pipe @ 1152' & pmpd. 80 sx. std. cmt. containing 3%CaCl₂, 59 sx. to set a plug across the Pt. Lookout and 50' up into the Menefee plus 30% excess. Top of cmt. 890'; pulled and laid down d.p. & collars; set @ 180' and circ. cmt. to the surface, setting a plug from 52' below surf. csg. to the surface and using 85 sx. std. cmt. containing 3% CaCl₂. Approximately, 2 Bbls. circ. to the pit after pulling the remaining d.p. and topping off the 9 5/8" surface csg.. Fenced the pit and cleaned up the location, hauling the mud sacks, trash and a palate to the Torreón dump.

Borehole Profiles from logging attached.

RECEIVED
MAY 12 1998
OIL CON. DIV.
DIST. 3

14. I hereby certify that the foregoing is true and correct

Signed John B. Somers II

Title Petroleum Engineer & Pres. Date Jan. 18, 1996

(This space for Federal or State office use)

Approved by AS/ Duane W. Spencer

Title _____

Date MAY - 8 1998

Conditions of approval, if any:

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*See instruction on Reverse Side
NMOCD


Red Dog Federal #1


BOREHOLE PROFILE

MAIN SECTION 5" = 100'

GAMMA RAY			AHV	CASING SIZE			CASING SIZE		
0	API COUNTS	200	FT3	10	INCHES	0 0	10	INCHES	10
	CALIPER		BHV		BIT SIZE			BIT SIZE	
5	INCHES	15	FT3	10	INCHES	0 0	10	INCHES	10
					CALIPER			CALIPER	
				10	INCHES	0 0	10	INCHES	10

8 3/4" bit used

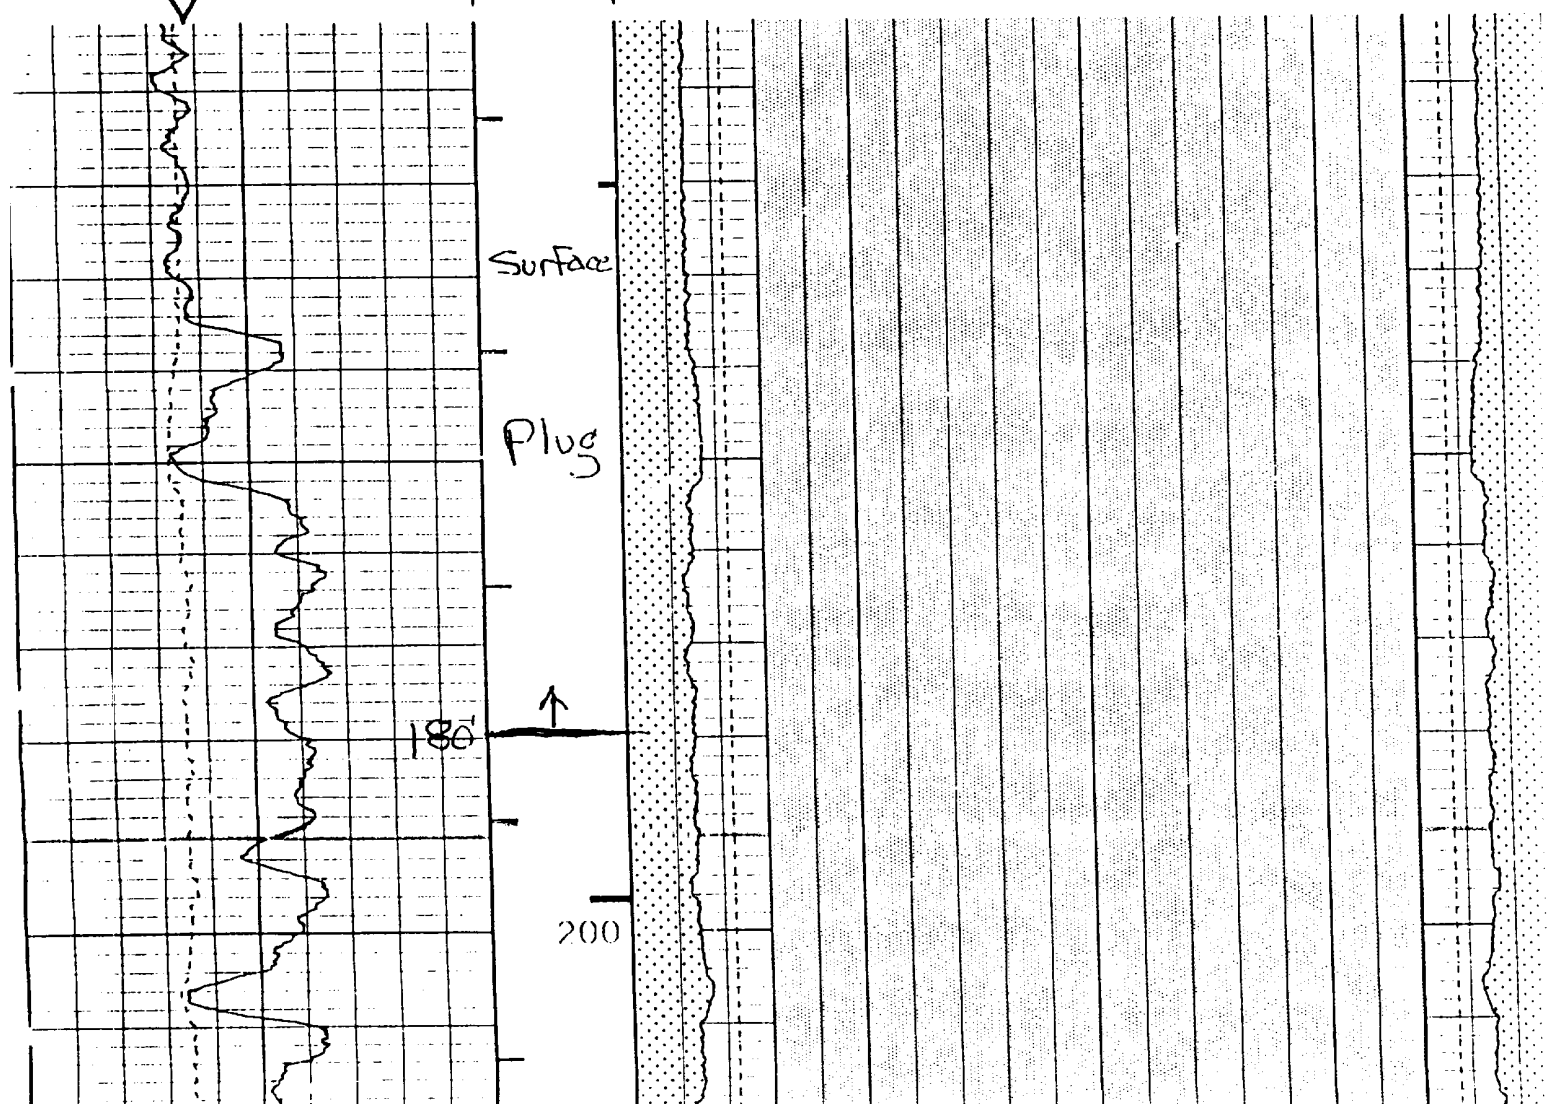

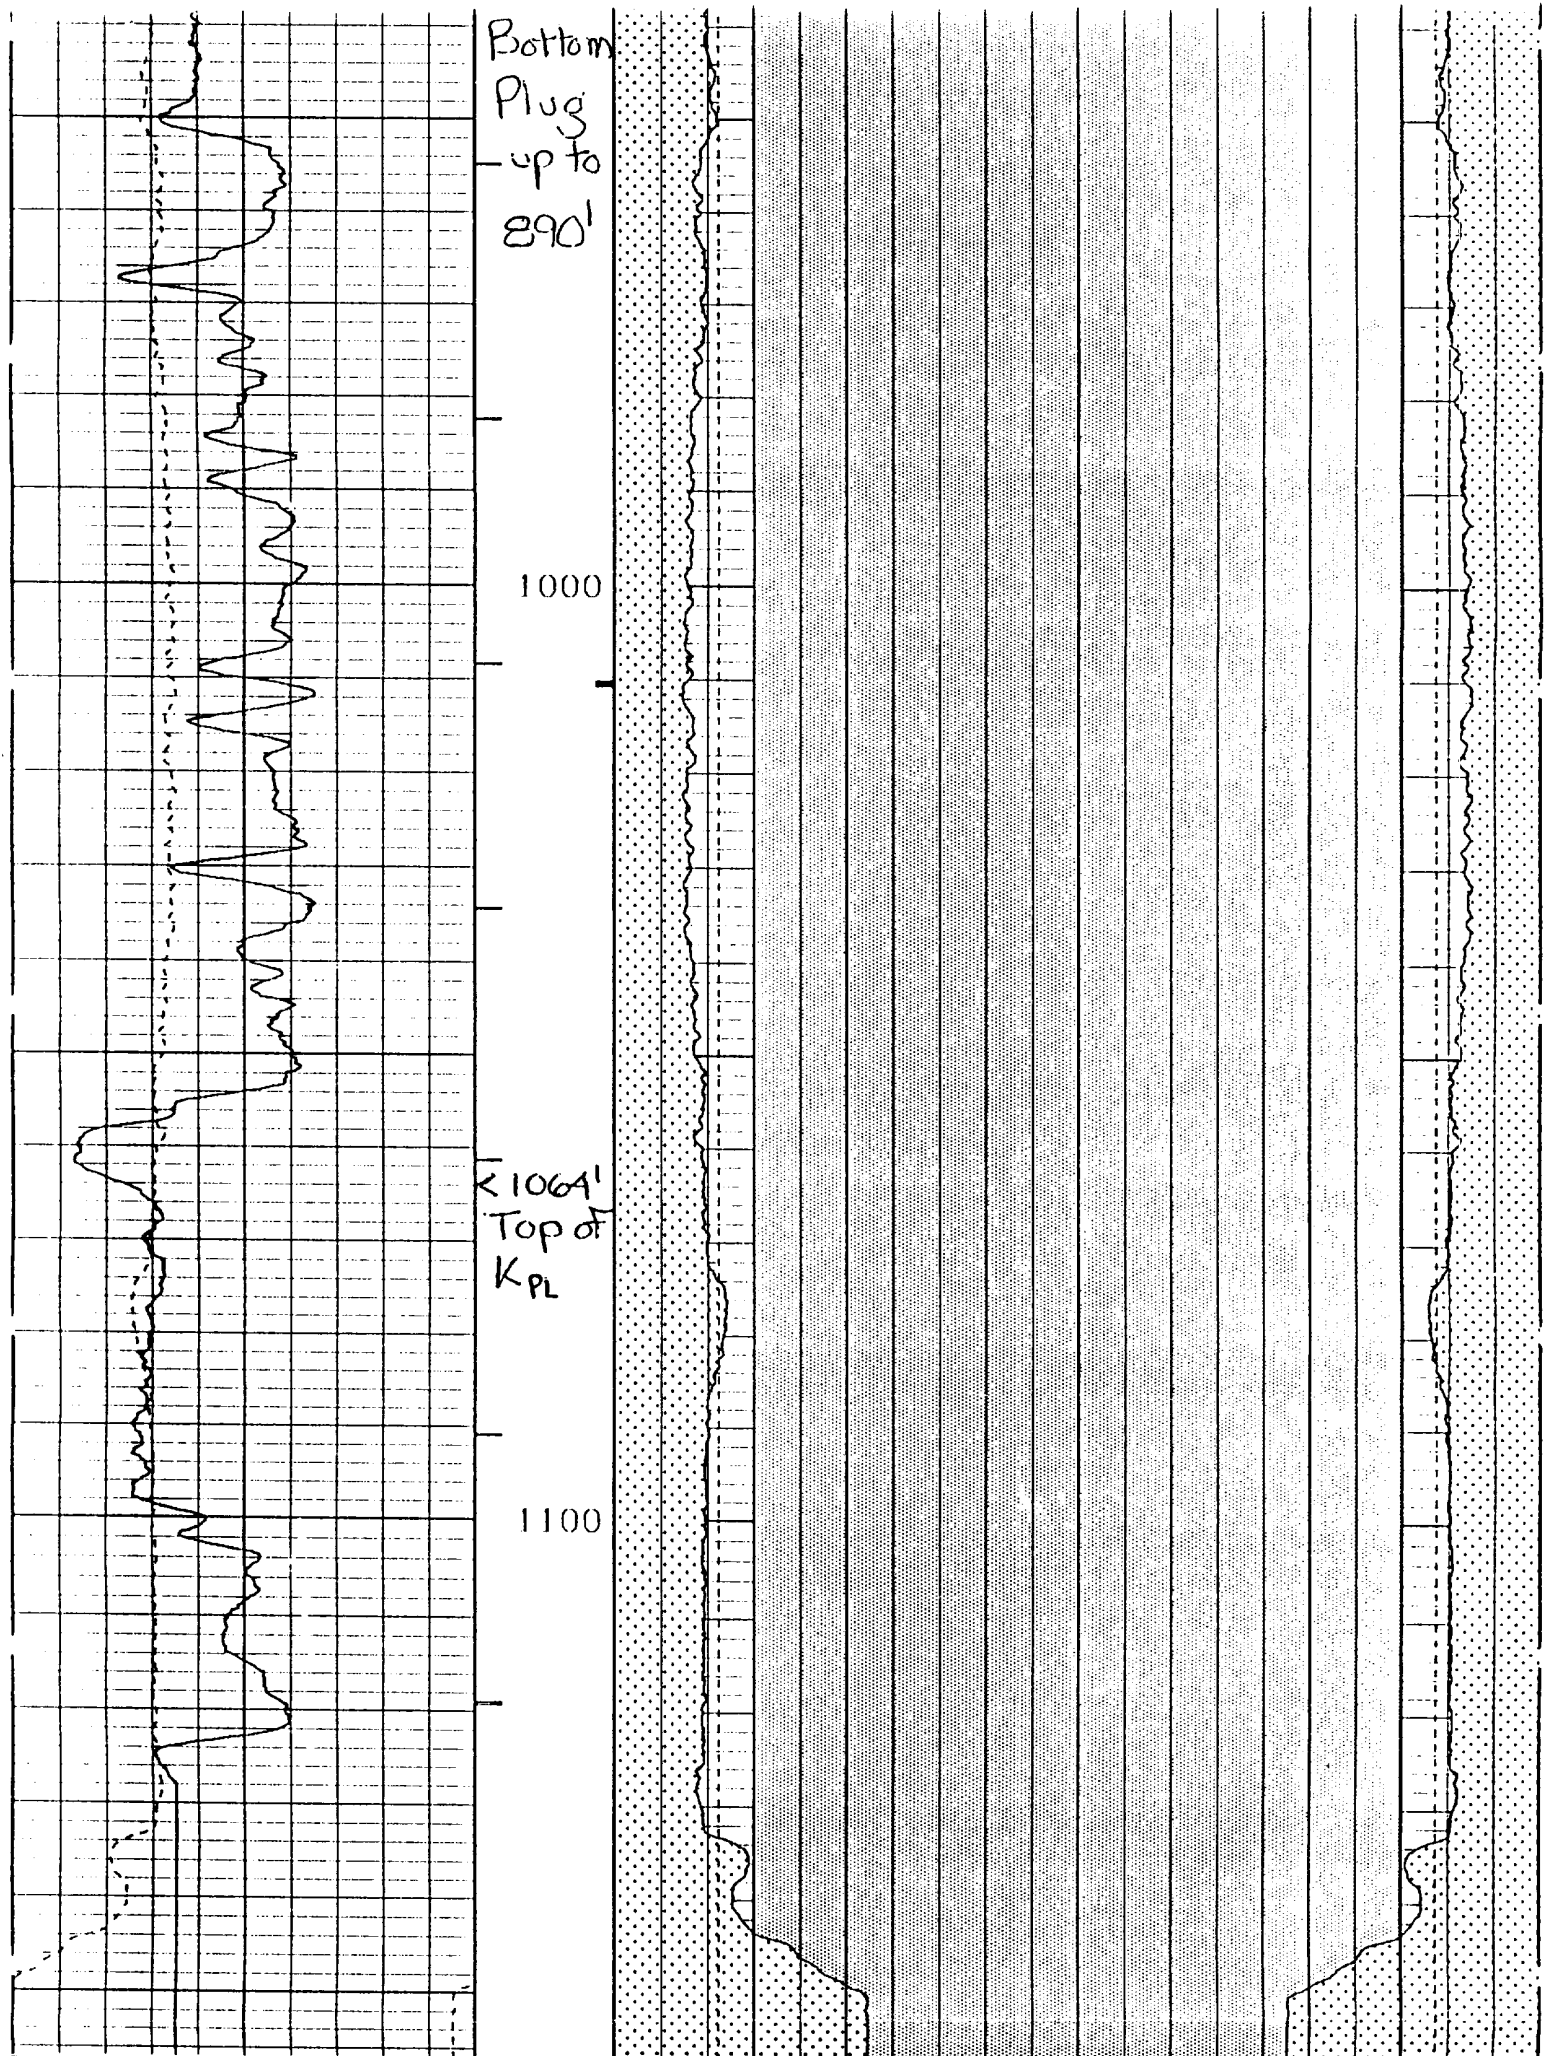

8 3/4" bit used				CALIPER		CALIPER		
			BHV	10	INCHES	0 0	INCHES	10
				BIT SIZE		BIT SIZE		
5	INCHES	15	FT3	10	INCHES	0 0	INCHES	10
GAMMA RAY			AHV	CASING SIZE		CASING SIZE		
0	API COUNTS	200	FT3	10	INCHES	0 0	INCHES	10