

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENTNMOCD
ArtesiaFORM APPROVED
OMB NO. 1004-0137
Expires: January 31, 2018**SUNDRY NOTICES AND REPORTS ON WELLS**
*Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.*5. Lease Serial No.
NMLC063079A

6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE - Other instructions on page 27. If Unit or CA/Agreement, Name and/or No.
891000303X

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other8. Well Name and No.
POKER LAKE UNIT 25 BD 701H.

2. Name of Operator

XTO PERMIAN OPERATING LLC

Contact: KELLY KARDOS

E-Mail: kelly_kardos@xtoenergy.com

9. API Well No.

30-015-45859-00-X1

3a. Address

6401 HOLIDAY HILL ROAD BLDG 5
MIDLAND, TX 79707

3b. Phone No. (include area code)

Ph: 432-620-4374

10. Field and Pool or Exploratory Area
WILDCAT - BONE SPRING

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

Sec 25 T25S R30E SWNW 2595FNL 772FWL
32.101379 N Lat, 103.840797 W Lon

11. County or Parish, State

EDDY COUNTY, NM

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
☒ Notice of Intent	☐ Acidize	☐ Deepen	☐ Production (Start/Resume)	☐ Water Shut-Off
☐ Subsequent Report	☐ Alter Casing	☐ Hydraulic Fracturing	☐ Reclamation	☐ Well Integrity
☐ Final Abandonment Notice	☐ Casing Repair	☐ New Construction	☐ Recomplete	☒ Other
	☐ Change Plans	☐ Plug and Abandon	☐ Temporarily Abandon	Change to Original APD
	☐ Convert to Injection	☐ Plug Back	☐ Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.

XTO Permian Operating, LLC requests permission to make the following changes to the original APD:

? Change formation from Wildcat Bone Spring (Oil) to Purple Sage; Wolfcamp (Gas).

? Change BHL from 3440'FNL & 345'FWL in Sec. 12-T26S-R30E to 200'FSL & 1170'FWL in Sec. 36-T25S-R30E.

? Change the casing and cement design from 3-string to a 4-string design per the attached procedure.

Request to batch drill this well was submitted with the Poker Lake Unit 25 BD 1024 (Sundry WIS 472164).

NM OIL CONSERVATION
ARTESIA DISTRICT

AUG 21 2019

RECEIVED
SEE ATTACHED FOR
CONDITIONS OF APPROVAL

14. I hereby certify that the foregoing is true and correct.	
Electronic Submission #472458 verified by the BLM Well Information System For XTO PERMIAN OPERATING LLC, sent to the Carlsbad Committed to AFMSS for processing by PRISCILLA PEREZ on 07/09/2019 (19PP2751SE)	
Name (Printed/Typed) KELLY KARDOS	Title REGULATORY COORDINATOR
Signature (Electronic Submission)	Date 07/08/2019
APPROVED	
THIS SPACE FOR FEDERAL OR STATE OFFICE USE	
Approved By	Title
BUREAU OF LAND MANAGEMENT ROSWELL FIELD OFFICE	
Date	
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	
Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.	

(Instructions on page 2)

** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED **

RW 10-29-19

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☒ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-015- 45859	² Pool Code 98220	³ Pool Name PURPLE SAGE; WOLFCAMP
⁴ Property Code	⁵ Property Name POKER LAKE UNIT 25 BD	⁶ Well Number 701H
⁷ OGRID No. 373075	⁸ Operator Name XTO PERMIAN OPERATING, LLC.	⁹ Elevation 3,343'

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
E	25	25 S	30 E		2,595	NORTH	772	WEST	EDDY

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
M	36	25 S	30 E		200	SOUTH	1,170	WEST	EDDY

¹² Dedicated Acres 480	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No. 171
--------------------------------------	-------------------------------	----------------------------------	--------------------------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

	GEODEIC COORDINATES NAD 27 NME SURFACE LOCATION Y= 400,909.6 X= 652,665.3 LAT.= 32.101257°N LONG.= 103.840316°W FIRST TAKE POINT NAD 27 NME Y= 400,494.6 X= 653,062.0 LAT.= 32.100111°N LONG.= 103.839041°W	GEODEIC COORDINATES NAD 83 NME SURFACE LOCATION Y= 400,967.5 X= 693,850.7 LAT.= 32.101381°N LONG.= 103.840796°W FIRST TAKE POINT NAD 83 NME Y= 400,552.5 X= 694,247.4 LAT.= 32.100235°N LONG.= 103.839521°W	17 OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. Kelly Kardos Signature 7/8/19 Date Kelly Kardos Printed Name kelly_kardos@xtoenergy.com E-mail Address
	CORNER COORDINATES TABLE NAD 27 NME A - Y= 400,845.0 N, X= 653,224.3 E B - Y= 400,838.4 N, X= 651,892.9 E C - Y= 398,185.5 N, X= 653,217.9 E D - Y= 398,177.1 N, X= 651,887.1 E E - Y= 395,525.4 N, X= 653,229.4 E F - Y= 395,514.7 N, X= 651,898.9 E G - Y= 392,863.6 N, X= 653,241.1 E H - Y= 392,853.4 N, X= 651,911.2 E	CORNER COORDINATES TABLE NAD 83 NME A - Y= 400,902.9 N, X= 694,409.7 E B - Y= 400,896.3 N, X= 693,078.2 E C - Y= 398,243.4 N, X= 694,403.4 E D - Y= 398,235.0 N, X= 693,072.5 E E - Y= 395,583.2 N, X= 694,415.0 E F - Y= 395,572.5 N, X= 693,084.4 E G - Y= 392,921.4 N, X= 694,426.7 E H - Y= 392,911.2 N, X= 693,096.8 E	18 SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.
	LAST TAKE POINT NAD 27 NME Y= 393,192.4 X= 653,079.6 LAT.= 32.080038°N LONG.= 103.839093°W BOTTOM HOLE LOCATION NAD 27 NME Y= 393,082.4 X= 653,080.2 LAT.= 32.079680°N LONG.= 103.839093°W	LAST TAKE POINT NAD 83 NME Y= 393,250.2 X= 694,265.2 LAT.= 32.080162°N LONG.= 103.839572°W BOTTOM HOLE LOCATION NAD 83 NME Y= 393,120.2 X= 694,265.8 LAT.= 32.079805°N LONG.= 103.839572°W	4-2-2019 Date of Survey Signature and Seal of Professional Surveyor: MARK DILLON HARP 23786 Certificate Number JC 2018010043
	PROJECTS\2018\2018010043.XTO-POKER LAKE UNIT 25 BD 122H-EDDY\DWG\2018010043.XTO-POKER LAKE UNIT 25 BD 122H-EDDY C:102.dwg 4/2/2019 12:17:32 PM Ardra PDF RWP 10-29-19		

Intent ☒ As Drilled ☐

API # 30-015-45859			
Operator Name: XTO Permian Operating, LLC		Property Name: Poker Lake Unit 25 BD	Well Number 701H

Kick Off Point (KOP)

UL E	Section 25	Township 25S	Range 30E	Lot	Feet 2595	From N/S North	Feet 772	From E/W West	County Eddy
Latitude 32.101381					Longitude -103.840796			NAD NAD83	

First Take Point (FTP)

UL L	Section 25	Township 25S	Range 30E	Lot	Feet 2310	From N/S South	Feet 1170	From E/W West	County Eddy
Latitude 32.100235					Longitude -103.839521			NAD NAD83	

Last Take Point (LTP)

UL M	Section 36	Township 25S	Range 30E	Lot	Feet 330	From N/S South	Feet 1170	From E/W West	County Eddy
Latitude 32.080162					Longitude -103.839572			NAD NAD83	

Is this well the defining well for the Horizontal Spacing Unit? ☐ N

Is this well an infill well? ☐ Y

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API #			
Operator Name: XTO Permian Operating, LLC		Property Name: Poker Lake Unit 25 BD	Well Number 202H

KZ 06/29/2018

DRILLING PLAN: BLM COMPLIANCE

(Supplement to BLM 3160-3)

XTO Energy Inc.

PLU 25 Brushy Draw 701H RSN 122H

Projected TD: 19304' MD / 11565' TVD

SHL: 2595' FNL & 772' FWL , Section 25, T25S, R30E

BHL: 200' FSL & 1170' FWL , Section 36, T25S, R30E

Eddy County, NM

1. Geologic Name of Surface Formation

A. Permian

2. Estimated Tops of Geological Markers & Depths of Anticipated Fresh Water, Oil or Gas:

Formation	Well Depth (TVD)	Water/Oil/Gas
Rustler	965'	Water
Top of Salt	1215'	Water
Base of Salt	3815'	Water
Delaware	4015'	Water
Bone Spring	7840'	Water/Oil/Gas
1st Bone Spring Ss	8865'	Water/Oil/Gas
2nd Bone Spring Ss	9565'	Water/Oil/Gas
3rd Bone Spring Ss	10765'	Water/Oil/Gas
Wolfcamp	11185'	Water/Oil/Gas
Wolfcamp A	11315'	Water/Oil/Gas
Target/Land Curve	11565'	Water/Oil/Gas

*** Hydrocarbons @ Brushy Canyon

*** Groundwater depth 40' (per NM State Engineers Office).

No other formations are expected to yield oil, gas or fresh water in measurable volumes. The surface fresh water sands will be protected by setting 13-3/8 inch casing @ 1090' (125' above the salt) and circulating cement back to surface. The salt will be isolated by setting 9-5/8 inch casing at 3870' and circulating cement to surface. An 8-3/4 inch vertical and curve hole will be drilled and 7 inch casing run and cemented 500' into the 9-5/8 inch casing. A 6 inch curve and lateral hole will be drilled to MD/TD and 4-1/2 inch liner will be set at TD and cemented back 250' into the 7 inch casing shoe.

3. Casing Design

Hole Size	Depth	OD Csg	Weight	Collar	Grade	New/Used	SF Burst	SF Collapse
17-1/2"	0' – 1090'	13-3/8"	54.5	BTC	J-55	New	2.27	2.27
12-1/4"	0' – 3870'	9-5/8"	40	BTC	J-55	New	1.33	2.11
8-3/4"	0' – 10895'	7"	32	BTC	P-110	New	1.31	1.97
6"	10595' – 19304'	4-1/2"	13.5	BTC	P-110	New	1.31	2.13

- XTO requests to utilize centralizers only in the curve after the KOP and only a minimum of one every other joint.
- 9-5/8" & 4-1/2" Collapse analyzed using 50% evacuation based on regional experience.
- 4-1/2" tension calculated using vertical hanging weight plus the lateral weight multiplied by a friction factor of 0.35

WELLHEAD:

A. Starting Head (RSH System): 13-3/8" SOW bottom x 13-5/8" 3M top flange

B. Tubing Head: 13-5/8" 5M bottom flange x 7-1/16" 15M top flange

- Wellhead will be installed by manufacturer's representatives.
- Manufacturer will monitor welding process to ensure appropriate temperature of seal.
- Operator will test the 9-5/8" casing to per Onshore Order 2.
- Wellhead manufacturer representative will not be present for BOP test plug installation

4. Cement Program

Surface Casing: 13-3/8", 54.5 New J-55, BTC casing to be set at +/- 1090'

Lead: 580 sxs EconoCem-HLTRRC (mixed at 12.9 ppg, 1.87 ft³/sx, 10.13 gal/sx water)
Tail: 300 sxs Halcem-C + 2% CaCl (mixed at 14.8 ppg, 1.35 ft³/sx, 6.39 gal/sx water)
Compressives: 12-hr = 900 psi 24 hr = 1500 psi

Intermediate Casing: 9-5/8", 40 New J-55, BTC casing to be set at +/- 3870'

Lead: 1120 sxs Halcem-C + 2% CaCl (mixed at 12.9 ppg, 1.88 ft³/sx, 9.61 gal/sx water)
Tail: 230 sxs Halcem-C + 2% CaCl (mixed at 14.8 ppg, 1.33 ft³/sx, 6.39 gal/sx water)
Compressives: 12-hr = 900 psi 24 hr = 1500 psi

2nd Intermediate Casing: 7", 32 New P-110, BTC casing to be set at +/- 10895'

Lead: 990 sxs Halcem-C + 2% CaCl (mixed at 12.9 ppg, 1.88 ft³/sx, 9.61 gal/sx water)
Tail: 60 sxs Halcem-C + 2% CaCl (mixed at 14.8 ppg, 1.33 ft³/sx, 6.39 gal/sx water)
Compressives: 12-hr = 900 psi 24 hr = 1500 psi

Production Casing: 4-1/2", 13.5 New P-110, BTC casing to be set at +/- 19304'

Tail: 640 sxs VersaCem (mixed at 13.2 ppg, 1.33 ft³/sx, 8.38 gal/sx water)
Compressives: 12-hr = 1375 psi 24 hr = 2285 psi

5. Pressure Control Equipment

The blow out preventer equipment (BOP) for this well consists of a 13-5/8" minimum 5M Hydril and a 13-5/8" minimum 5M Double Ram BOP. MASP should not exceed 4973 psi.

All BOP testing will be done by an independent service company. Annular pressure tests will be limited to 50% of the working pressure. When nipping up on the 13-5/8" 5M bradenhead and flange, the BOP test will be limited to 5000 psi. When the 9-5/8" and 7" casing is set, the packoff seals will be tested to a minimum of 5000 psi. All BOP tests will include a low pressure test as per BLM regulations. The 5M BOP diagrams are attached. Blind rams will be functioned tested each trip, pipe rams will be functioned tested each day.

A variance is requested to allow use of a flex hose as the choke line from the BOP to the Choke Manifold. If this hose is used, a copy of the manufacturer's certification and pressure test chart will be kept on the rig. Attached is an example of a certification and pressure test chart. The manufacturer does not require anchors.

6. Proposed Mud Circulation System

INTERVAL	Hole Size	Mud Type	MW (ppg)	Viscosity (sec/qt)	Fluid Loss (cc)
0' to 1090'	17-1/2"	FW/Native	8.4-8.8	35-40	NC
1090' to 3870'	12-1/4"	Brine/Gel Sweeps	9.8-10.2	30-32	NC
3870' to 10895'	8-3/4"	FW / Cut Brine	8.6-9.5	29-32	NC - 20
10895' to 19304'	6"	FW / Cut Brine / Polymer	12.2-12.5	32-50	20'

The necessary mud products for weight addition and fluid loss control will be on location at all times. Spud with fresh water/native mud. Drill out from under 13-3/8" surface casing with brine solution. A 9.8ppg-10.2ppg brine mud will be used while drilling through the salt formation. Use fibrous materials as needed to control seepage and lost circulation. Pump viscous sweeps as needed for hole cleaning. Pump speed will be recorded on a daily drilling report after mudding up. A Pason or Totco will be used to detect changes in loss or gain of mud volume. A mud test will be performed every 24 hours to determine: density, viscosity, strength, filtration and pH as necessary. Use available solids controls equipment to help keep mud weight down after mud up. Rig up solids control equipment to operate as a closed loop system.

7. Auxiliary Well Control and Monitoring Equipment

- A. A Kelly cock will be in the drill string at all times.
- B. A full opening drill pipe stabbing valve having appropriate connections will be on the rig floor at all times.
- C. H2S monitors will be on location when drilling below the 13-3/8" casing.

8. Logging, Coring and Testing Program

Mud Logger: Mud Logging Unit (2 man) below intermediate casing.

Open hole logging will not be done on this well.


9. Abnormal Pressures and Temperatures / Potential Hazards


None Anticipated. BHT of 150 to 170 F is anticipated. No H2S is expected but monitors will be in place to detect any H2S occurrences. Should these circumstances be encountered the operator and drilling contractor are prepared to take all necessary steps to ensure safety of all personnel and environment. Lost circulation could occur but is not expected to be a serious problem in this area and hole seepage will be compensated for by additions of small amounts of LCM in the drilling fluid. The maximum anticipated bottom hole pressure for this well is 7517 psi.


10. Anticipated Starting Date and Duration of Operations

Road and location construction will begin after Santa Fe and BLM have approved the APD. Anticipated spud date will be as soon after Santa Fe and BLM approval and as soon as a rig will be available. Move in operations and drilling is expected to take 40 days. If production casing is run, an additional 30 days will be needed to complete well and construct surface facilities and/or lay flow lines in order to place well on production.

XTO requests a variance to be able to batch drill this well if necessary. In doing so, XTO will set 7" casing and ensure that the well is cemented properly and the well is static. With floats holding, no pressure on the csg annulus, and the installation of a 10K TA cap as per GE recommendations, XTO will contact the BLM to skid the rig to drill the remaining wells on the pad. Once surface and both intermediate strings are all completed, XTO will begin drilling the production hole on each of the wells.

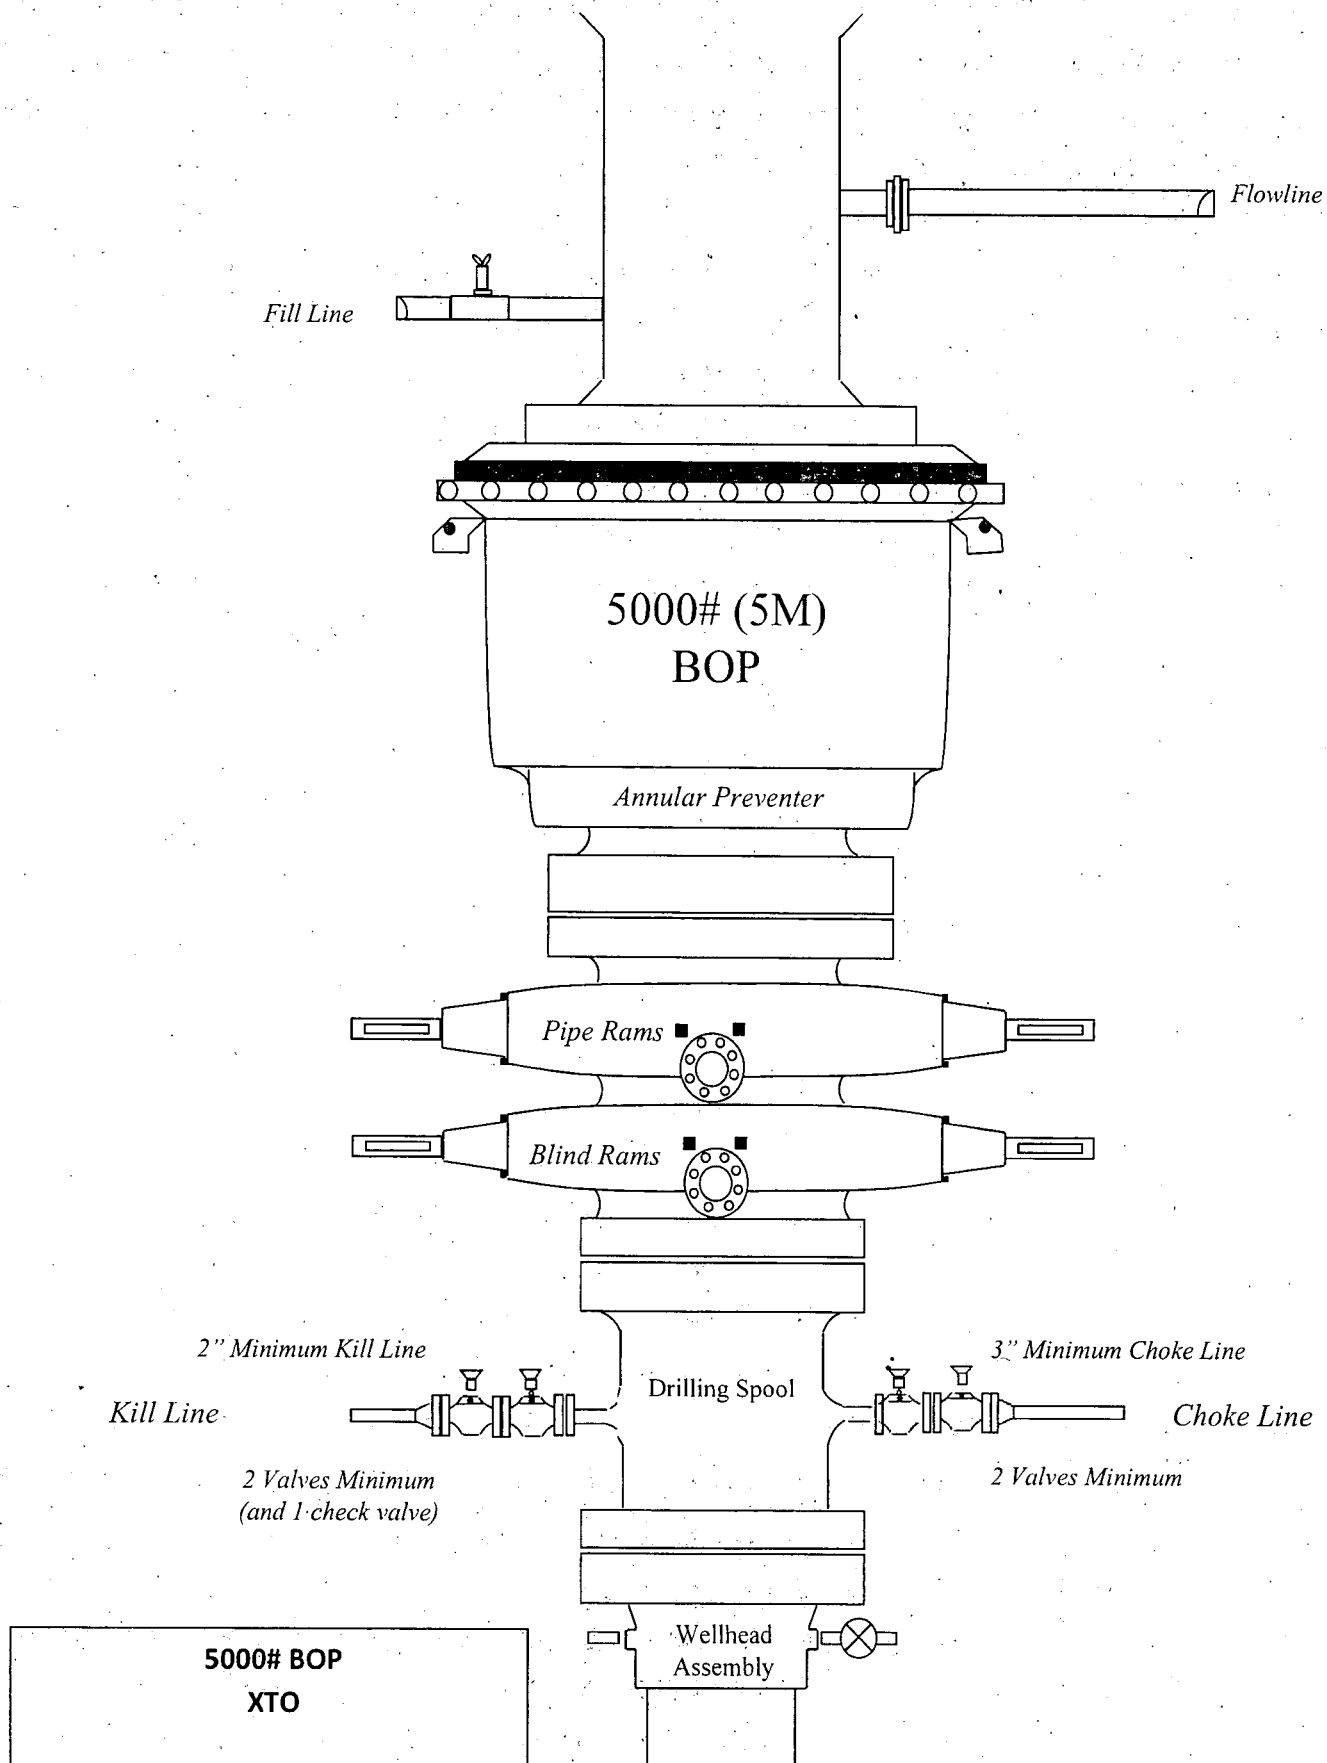

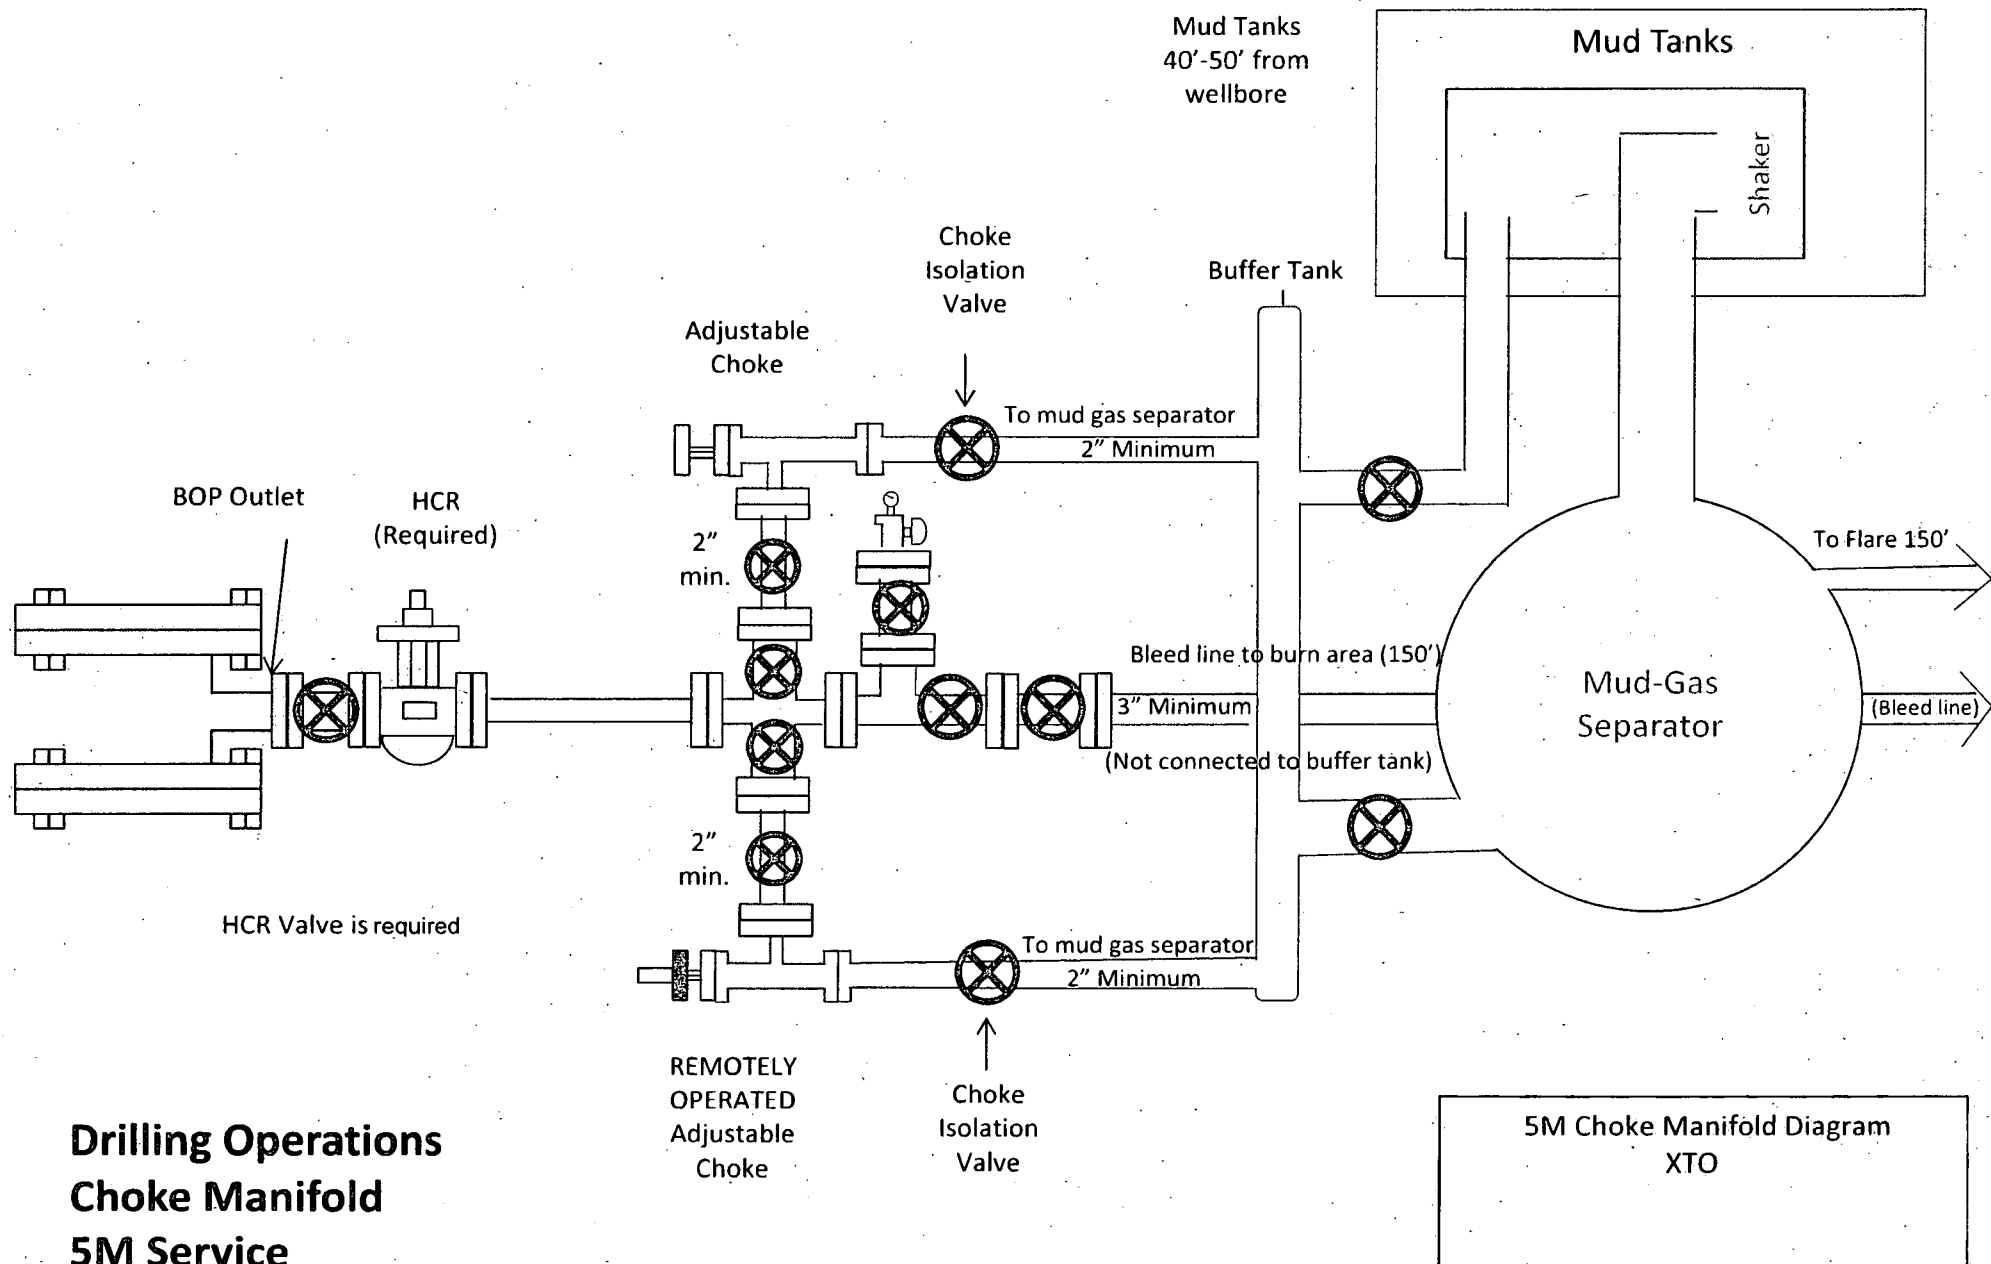



GATES E & S NORTH AMERICA, INC
DU-TEX
134 44TH STREET
CORPUS CHRISTI, TEXAS 78405

PHONE: 361-887-9807
FAX: 361-887-0812
EMAIL: crpe@s@gates.com
WEB: www.gates.com

GRADE D PRESSURE TEST CERTIFICATE

Customer :
Customer Ref. :
Invoice No. :

AUSTIN DISTRIBUTING
PENDING
201709

Test Date:
Hose Serial No. :
Created By:

6/8/2014
D-060814-1
NORMA

Product Description:

FD3.0-12.0R-1/16.5KFLGE/E LE

End Fitting 1 :
Gates Part No. :
Working Pressure :

4 1/16 in. SK FLG
4774-6001
5,000 PSI

End Fitting 2 :
Assembly Code :
Test Pressure :

4 1/16 in. SK FLG
L33090011513D-060814-1
7,500 PSI


Gates E & S North America, Inc. certifies that the following hose assembly has been tested to the Gates Oilfield Roughneck Agreement/Specification requirements and passed the 15 minute hydrostatic test per API Spec 7K/Q1, Fifth Edition, June 2010, Test pressure 9.6.7 and per Table 9 to 7,500 psi in accordance with this product number. Hose burst pressure 9.6.7.2 exceeds the minimum of 2.5 times the working pressure per Table 9.

Quality:
Date :
Signature :

QUALITY
6/8/2014
<i>[Signature]</i>


Technical Supervisor :
Date :
Signature :

PRODUCTION
6/8/2014
<i>[Signature]</i>

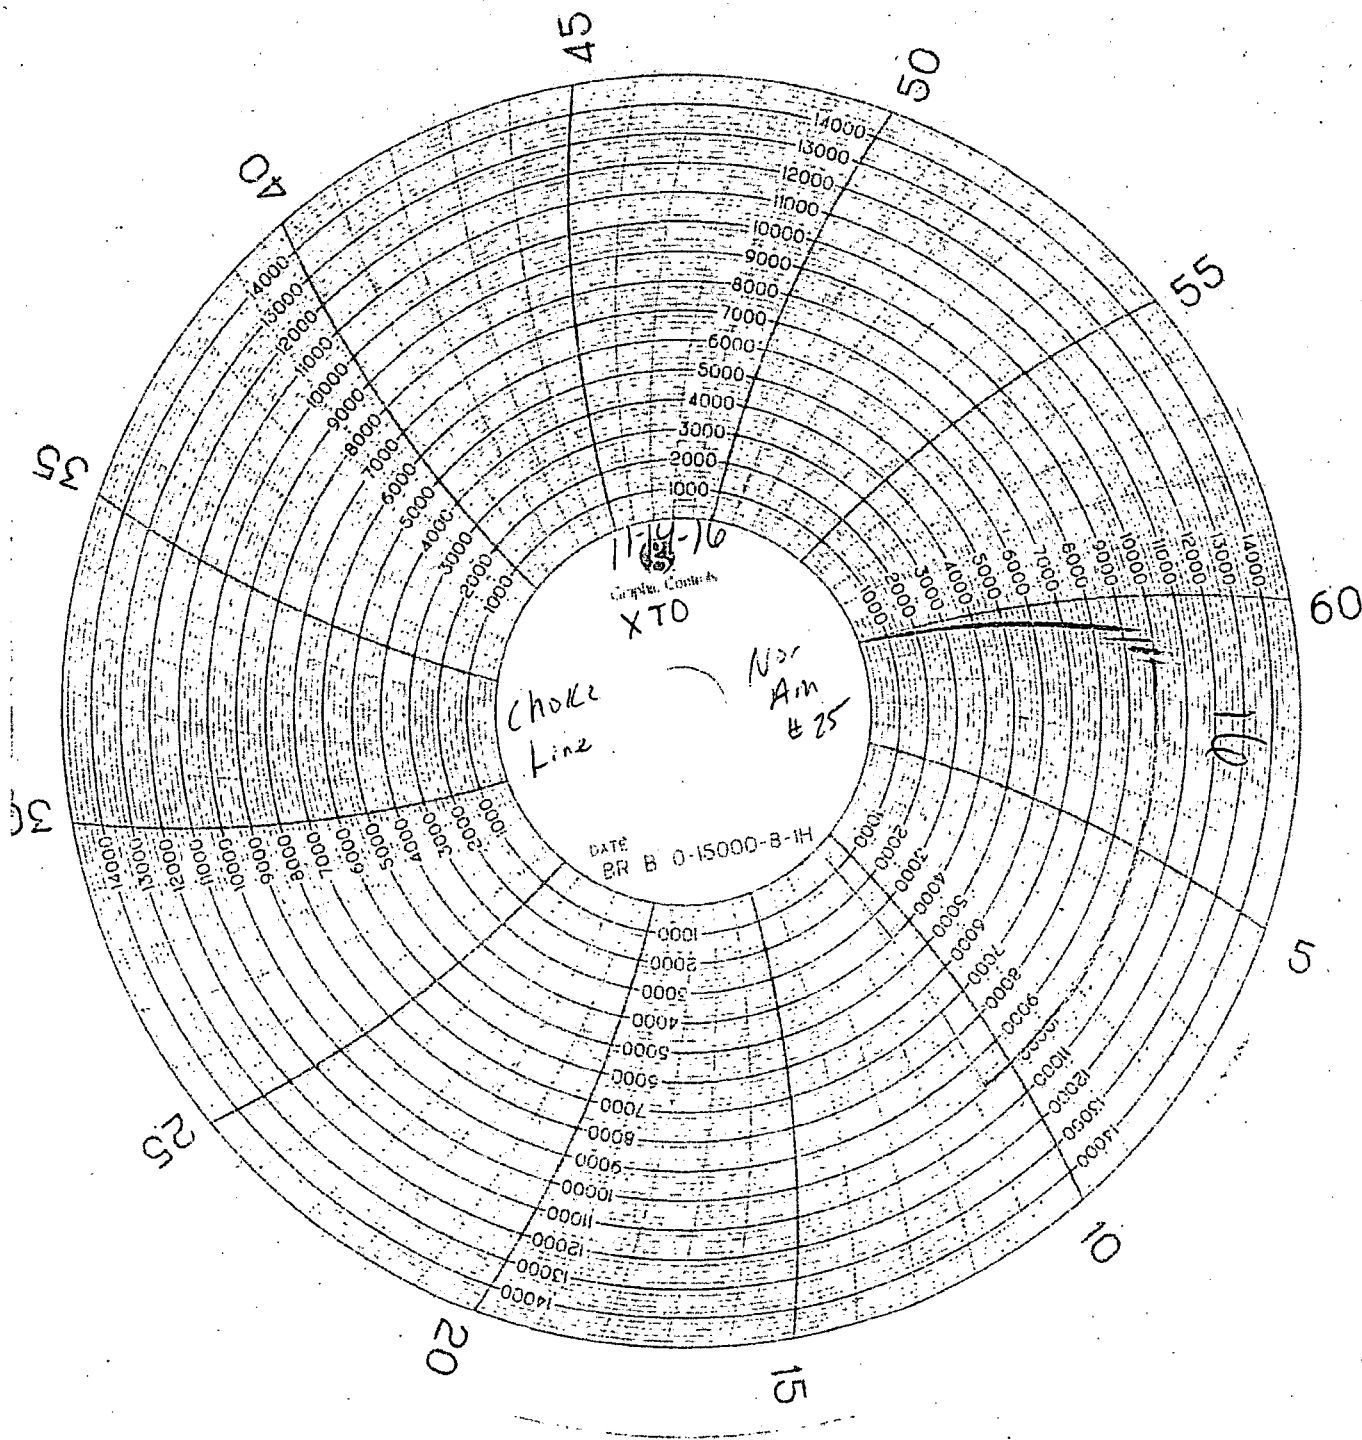

NOON

MOSE I.D. 3.00 LENGTH 42ft END 1 4 1/16 SKP END 2 4 1/16 SKP
GRADE D WORKING PRESSURE 5,000 P.S.I.
TEST PRESSURE 7,500 P.S.I. ASSEMBLY DATE 6-8-14
TEST DATE 6-8-14 SERIAL # L33096011513D-060814-P
NAME D-725 CR. # 2503

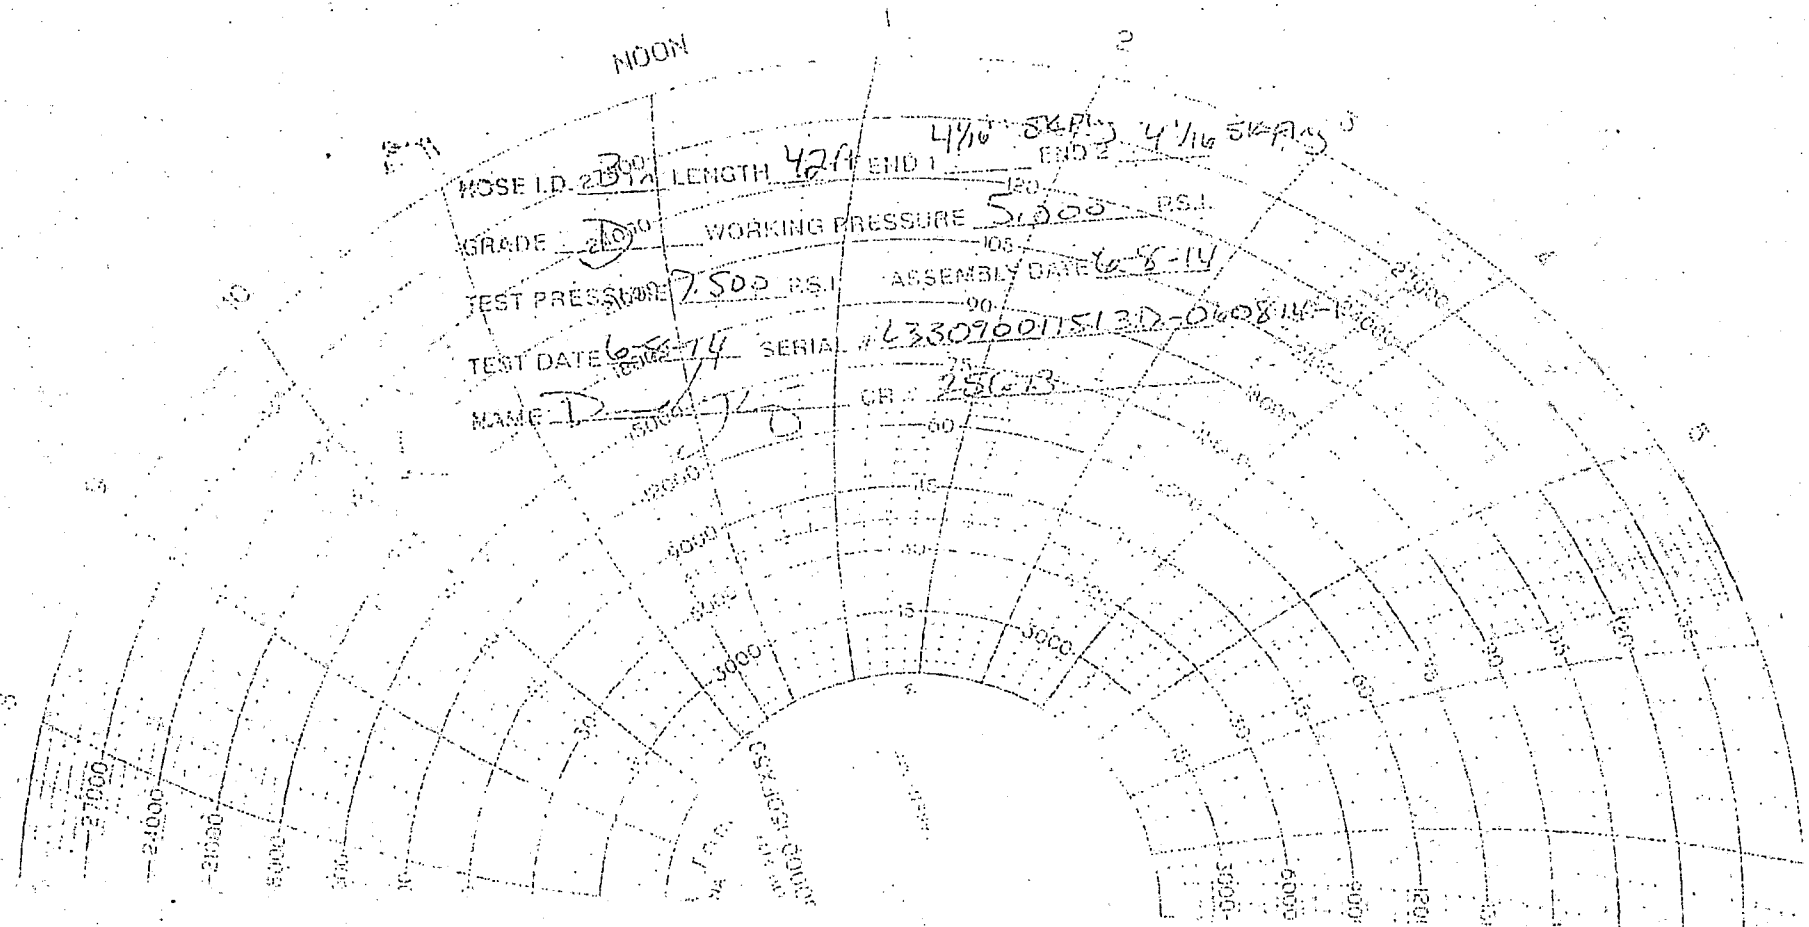

XTO ENERGY INC.

Project: Eddy County, NM (NMEZ) NAD27 Grid


Site: Poker Lake Unit 25 BD

Well: PLU 25 BD 701H_RSN 122H

Wellbore: 701H-122H

Design: Plan #1

3344+22 @ 3366.00usft (122-162 AK22)
NAD 1927 (NADCON CONUS)



PLAN SECTIONS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSec	Target
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2	3500.00	0.00	0.00	3500.00	0.00	0.00	0.00	0.00	0.00	
3	4300.00	8.00	70.00	4297.40	19.07	52.40	1.00	70.00	-16.28	
4	5900.00	8.00	70.00	5881.83	95.23	261.64	0.00	0.00	-81.28	
5	6700.00	0.00	70.00	6679.23	114.30	314.04	1.00	180.00	-97.56	
6	11005.95	0.00	70.00	10985.18	114.30	314.04	0.00	70.00	-97.56	
7	11455.95	45.00	166.00	11390.32	-48.53	354.64	10.00	166.00	67.19	
8	11922.40	90.00	179.86	11565.00	-465.04	397.48	10.00	19.24	485.38	
9	19304.59	90.00	179.86	11565.00	-7847.20	414.90	0.00	0.00	7858.16	PLU 25 BD 701H_RSN 122H PBHL_200FSL_160FEL





Azimuths to Grid North
True North: -0.26°
Magnetic North: 6.59°

Magnetic Field
Strength: 47630.7nT
Dip Angle: 59.88°
Date: 06/23/2019
Model: IGRF2015

DESIGN TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
PLU 25 BD 701H_RSN 122H SHL	0.00	0.00	0.00	400909.60	652665.30	32° 6' 4.525 N	103° 50' 25.139 W
PLU 25 BD 701H_RSN 122H FTP_350FNL_161FEL	11565.00	-415.00	396.70	400494.60	653062.00	32° 6' 0.400 N	103° 50' 20.549 W
PLU 25 BD 701H_RSN 122H LP (50'Past FTP)	11565.00	-465.04	397.48	400444.56	653062.78	32° 5' 59.905 N	103° 50' 20.542 W
PLU 25 BD 701H_RSN 122H LTP_330FSL_160FEL	11565.00	-7717.20	414.30	393192.40	653079.60	32° 4' 48.135 N	103° 50' 20.733 W
PLU 25 BD 701H_RSN 122H PBHL_200FSL_160FEL	11565.00	-7847.20	414.90	393062.40	653080.20	32° 4' 46.849 N	103° 50' 20.733 W

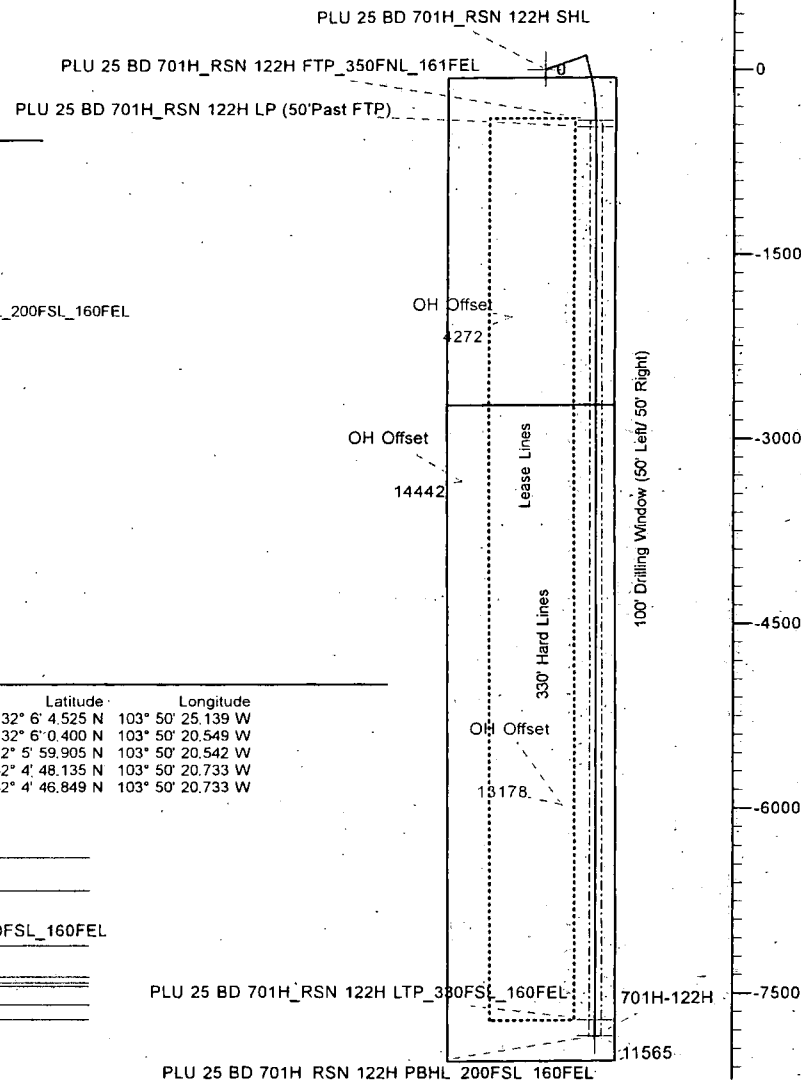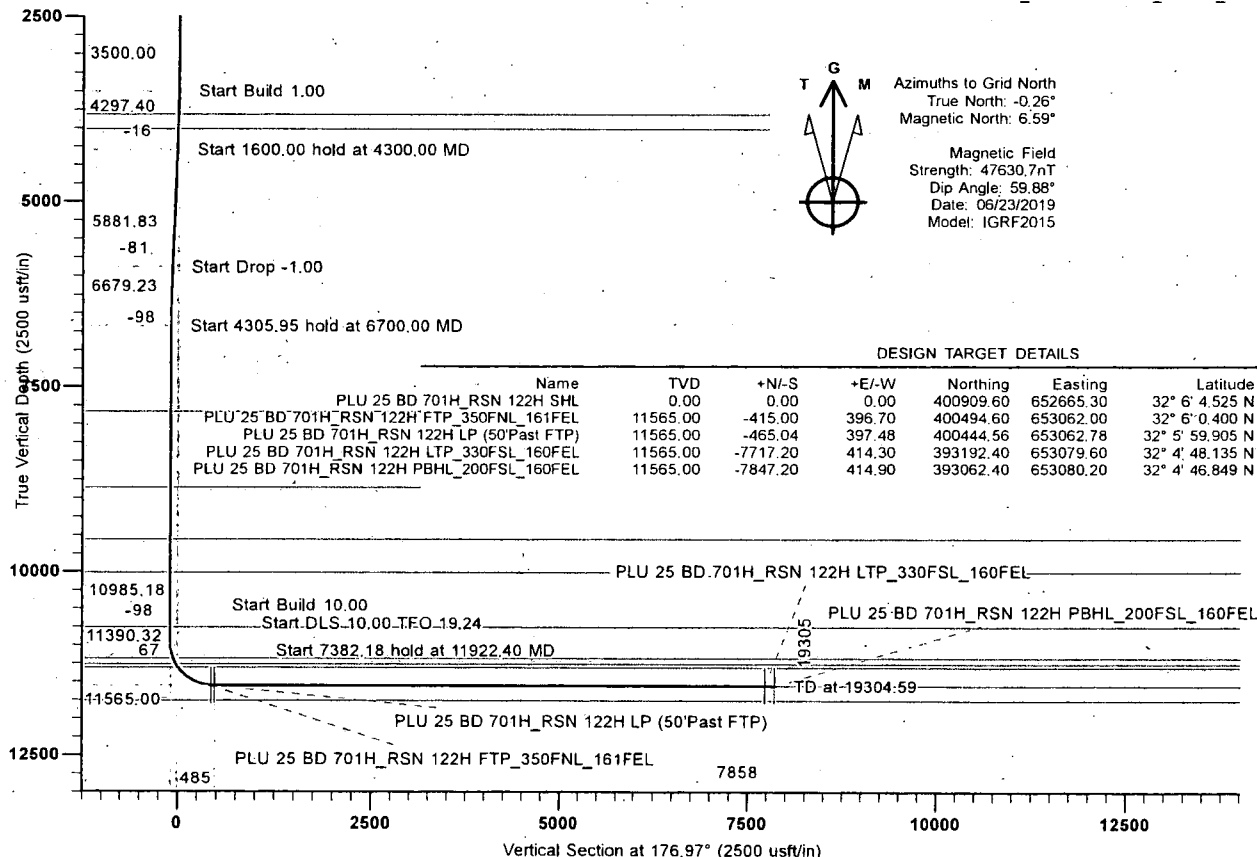

To convert a Magnetic Direction to a Grid Direction, Add 6.59°
Magnetic North is 6.59° East of Grid North (Magnetic Convergence)
Magnetic North is 6.85° East of True North (Magnetic Declination)

Plan: Plan #1 (PLU 25 BD 701H_RSN 122H/701H-122H)
Created By: Mekka Williams
eSomnia Well Design
mekka@esominawell.com
22:03, June 24 2019

CRUDE OILFIELD SOLUTIONS
14427 Interdrive W Houston 77032
832-230-2519



Planning Report

Database:	CRUDE_EDM	Local Co-ordinate Reference:	Well PLU 25 BD 701H_RSN 122H - Slot PLU 25 BD 701H_RSN 122H SHL
Company:	XTO ENERGY INC.	TVD Reference:	3344+22 @ 3366.00usft (122-162 AK22)
Project:	Eddy County, NM (NMEZ) NAD27 Grid	MD Reference:	3344+22 @ 3366.00usft (122-162 AK22)
Site:	Poker Lake Unit 25 BD	North Reference:	Grid
Well:	PLU 25 BD 701H_RSN 122H	Survey Calculation Method:	Minimum Curvature
Wellbore:	701H-122H		
Design:	Plan #1		

Project	Eddy County, NM (NMEZ) NAD27 Grid		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site	Poker Lake Unit 25 BD				
Site Position:		Northing:	400,979.50 usft	Latitude:	32° 6' 5.217 N
From:	Map	Easting:	652,664.90 usft	Longitude:	103° 50' 25.140 W
Position Uncertainty:	0.00 usft	Slot Radius:	13.20 in	Grid Convergence:	0.26 °

Well	PLU 25 BD 701H_RSN 122H - Slot PLU 25 BD 701H_RSN 122H SHL					
Well Position	+N/-S	-69.90 usft	Northing:	400,909.60 usft	Latitude:	32° 6' 4.525 N
	+E/-W	0.40 usft	Easting:	652,665.30 usft	Longitude:	103° 50' 25.139 W
Position Uncertainty		0.00 usft	Wellhead Elevation:		Ground Level:	3,343.00 usft

Wellbore	701H-122H				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2015	06/23/19	6.85	59.88	47,630.67860936

Design	Plan #1				
Audit Notes:					
Version:	Phase:	PROTOTYPE		Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.00	0.00	0.00	176.97	

Plan Survey Tool Program	Date:	06/23/19			
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks	
1	0.00	19,303.80 Plan #1 (701H-122H)	MWD+IFR1+MS		
			OWSG MWD + IFR1 + Multi-St		

Planning Report

Database:	CRUDE_EDM	Local Co-ordinate Reference:	Well PLU 25 BD 701H_RSN 122H - Slot PLU 25 BD 701H_RSN 122H SHL
Company:	XTO ENERGY INC.	TVD Reference:	3344+22 @ 3366.00usft (122-162 AK22)
Project:	Eddy County, NM (NMEZ) NAD27 Grid	MD Reference:	3344+22 @ 3366.00usft (122-162 AK22)
Site:	Poker Lake Unit 25 BD	North Reference:	Grid
Well:	PLU 25 BD 701H_RSN 122H	Survey Calculation Method:	Minimum Curvature
Wellbore:	701H-122H		
Design:	Plan #1		

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
3,500.00	0.00	0.00	3,500.00	0.00	0.00	0.00	0.00	0.00	0.00	
4,300.00	8.00	70.00	4,297.40	19.07	52.40	1.00	1.00	0.00	70.00	
5,900.00	8.00	70.00	5,881.83	95.23	261.64	0.00	0.00	0.00	0.00	
6,700.00	0.00	70.00	6,679.23	114.30	314.04	1.00	-1.00	0.00	180.00	
11,005.95	0.00	70.00	10,985.18	114.30	314.04	0.00	0.00	0.00	70.00	
11,455.95	45.00	166.00	11,390.32	-48.53	354.64	10.00	10.00	0.00	166.00	
11,922.40	90.00	179.86	11,565.00	-465.04	397.48	10.00	9.65	2.97	19.24	
19,304.59	90.00	179.86	11,565.00	-7,847.20	414.90	0.00	0.00	0.00	0.00	PLU 25 BD 701H_RS

Planning Report

Database:	CRUDE_EDM	Local Co-ordinate Reference:	Well PLU 25 BD 701H_RSN 122H - Slot PLU 25 BD 701H_RSN 122H SHL
Company:	XTO ENERGY INC.	TVD Reference:	3344+22 @ 3366.00usft (122-162 AK22)
Project:	Eddy County, NM (NMEZ) NAD27 Grid	MD Reference:	3344+22 @ 3366.00usft (122-162 AK22)
Site:	Poker Lake Unit 25 BD	North Reference:	Grid
Well:	PLU 25 BD 701H_RSN 122H	Survey Calculation Method:	Minimum Curvature
Wellbore:	701H-122H		
Design:	Plan #1		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N-S (usft)	+E-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
PLU 25 BD 102H_RSN 152H SHL - PLU 25 BD 701H_RSN 122H SHL									
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
965.00	0.00	0.00	965.00	0.00	0.00	0.00	0.00	0.00	0.00
Rustler									
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,215.00	0.00	0.00	1,215.00	0.00	0.00	0.00	0.00	0.00	0.00
Top Salt									
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00
2,100.00	0.00	0.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.00
2,200.00	0.00	0.00	2,200.00	0.00	0.00	0.00	0.00	0.00	0.00
2,300.00	0.00	0.00	2,300.00	0.00	0.00	0.00	0.00	0.00	0.00
2,400.00	0.00	0.00	2,400.00	0.00	0.00	0.00	0.00	0.00	0.00
2,500.00	0.00	0.00	2,500.00	0.00	0.00	0.00	0.00	0.00	0.00
2,600.00	0.00	0.00	2,600.00	0.00	0.00	0.00	0.00	0.00	0.00
2,700.00	0.00	0.00	2,700.00	0.00	0.00	0.00	0.00	0.00	0.00
2,800.00	0.00	0.00	2,800.00	0.00	0.00	0.00	0.00	0.00	0.00
2,900.00	0.00	0.00	2,900.00	0.00	0.00	0.00	0.00	0.00	0.00
3,000.00	0.00	0.00	3,000.00	0.00	0.00	0.00	0.00	0.00	0.00
3,100.00	0.00	0.00	3,100.00	0.00	0.00	0.00	0.00	0.00	0.00
3,200.00	0.00	0.00	3,200.00	0.00	0.00	0.00	0.00	0.00	0.00
3,300.00	0.00	0.00	3,300.00	0.00	0.00	0.00	0.00	0.00	0.00
3,400.00	0.00	0.00	3,400.00	0.00	0.00	0.00	0.00	0.00	0.00
3,500.00	0.00	0.00	3,500.00	0.00	0.00	0.00	0.00	0.00	0.00
3,600.00	1.00	70.00	3,600.00	0.30	0.82	-0.25	1.00	1.00	0.00
3,700.00	2.00	70.00	3,699.96	1.19	3.28	-1.02	1.00	1.00	0.00
3,800.00	3.00	70.00	3,799.86	2.69	7.38	-2.29	1.00	1.00	0.00
3,815.16	3.15	70.00	3,815.00	2.96	8.14	-2.53	1.00	1.00	0.00
Base Salt									
3,900.00	4.00	70.00	3,899.68	4.77	13.12	-4.07	1.00	1.00	0.00
4,000.00	5.00	70.00	3,999.37	7.46	20.49	-6.36	1.00	1.00	0.00
4,015.70	5.16	70.00	4,015.00	7.93	21.79	-6.77	1.00	1.00	0.00
Delaware									
4,100.00	6.00	70.00	4,098.90	10.74	29.49	-9.16	1.00	1.00	0.00
4,200.00	7.00	70.00	4,198.26	14.61	40.13	-12.47	1.00	1.00	0.00
4,300.00	8.00	70.00	4,297.40	19.07	52.40	-16.28	1.00	1.00	0.00

Planning Report

Database:	CRUDE_EDM	Local Co-ordinate Reference:	Well PLU 25 BD 701H_RSN 122H - Slot PLU 25 BD 701H_RSN 122H SHL
Company:	XTO ENERGY INC.	TVD Reference:	3344+22 @ 3366.00usft (122-162 AK22)
Project:	Eddy County, NM (NMEZ) NAD27 Grid	MD Reference:	3344+22 @ 3366.00usft (122-162 AK22)
Site:	Poker Lake Unit 25 BD	North Reference:	Grid
Well:	PLU 25 BD 701H_RSN 122H	Survey Calculation Method:	Minimum Curvature
Wellbore:	701H-122H		
Design:	Plan #1		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
4,400.00	8.00	70.00	4,396.43	23.83	65.48	-20.34	0.00	0.00	0.00
4,500.00	8.00	70.00	4,495.46	28.59	78.55	-24.40	0.00	0.00	0.00
4,600.00	8.00	70.00	4,594.48	33.35	91.63	-28.47	0.00	0.00	0.00
4,700.00	8.00	70.00	4,693.51	38.11	104.71	-32.53	0.00	0.00	0.00
4,800.00	8.00	70.00	4,792.54	42.87	117.79	-36.59	0.00	0.00	0.00
4,900.00	8.00	70.00	4,891.56	47.63	130.87	-40.66	0.00	0.00	0.00
5,000.00	8.00	70.00	4,990.59	52.39	143.94	-44.72	0.00	0.00	0.00
5,100.00	8.00	70.00	5,089.62	57.15	157.02	-48.78	0.00	0.00	0.00
5,200.00	8.00	70.00	5,188.64	61.91	170.10	-52.84	0.00	0.00	0.00
5,300.00	8.00	70.00	5,287.67	66.67	183.18	-56.91	0.00	0.00	0.00
5,400.00	8.00	70.00	5,386.70	71.43	196.26	-60.97	0.00	0.00	0.00
5,500.00	8.00	70.00	5,485.72	76.19	209.33	-65.03	0.00	0.00	0.00
5,600.00	8.00	70.00	5,584.75	80.95	222.41	-69.10	0.00	0.00	0.00
5,700.00	8.00	70.00	5,683.78	85.71	235.49	-73.16	0.00	0.00	0.00
5,800.00	8.00	70.00	5,782.81	90.47	248.57	-77.22	0.00	0.00	0.00
5,900.00	8.00	70.00	5,881.83	95.23	261.64	-81.28	0.00	0.00	0.00
6,000.00	7.00	70.00	5,980.98	99.70	273.91	-85.09	1.00	-1.00	0.00
6,100.00	6.00	70.00	6,080.33	103.57	284.55	-88.40	1.00	-1.00	0.00
6,200.00	5.00	70.00	6,179.87	106.85	293.55	-91.20	1.00	-1.00	0.00
6,300.00	4.00	70.00	6,279.56	109.53	300.93	-93.49	1.00	-1.00	0.00
6,400.00	3.00	70.00	6,379.37	111.62	306.66	-95.27	1.00	-1.00	0.00
6,500.00	2.00	70.00	6,479.28	113.11	310.76	-96.54	1.00	-1.00	0.00
6,600.00	1.00	70.00	6,579.24	114.00	313.22	-97.31	1.00	-1.00	0.00
6,700.00	0.00	70.00	6,679.23	114.30	314.04	-97.56	1.00	-1.00	0.00
6,800.00	0.00	0.00	6,779.24	114.30	314.04	-97.56	0.00	0.00	0.00
6,900.00	0.00	0.00	6,879.24	114.30	314.04	-97.56	0.00	0.00	0.00
7,000.00	0.00	0.00	6,979.24	114.30	314.04	-97.56	0.00	0.00	0.00
7,100.00	0.00	0.00	7,079.24	114.30	314.04	-97.56	0.00	0.00	0.00
7,200.00	0.00	0.00	7,179.24	114.30	314.04	-97.56	0.00	0.00	0.00
7,300.00	0.00	0.00	7,279.24	114.30	314.04	-97.56	0.00	0.00	0.00
7,400.00	0.00	0.00	7,379.24	114.30	314.04	-97.56	0.00	0.00	0.00
7,500.00	0.00	0.00	7,479.24	114.30	314.04	-97.56	0.00	0.00	0.00
7,600.00	0.00	0.00	7,579.24	114.30	314.04	-97.56	0.00	0.00	0.00
7,700.00	0.00	0.00	7,679.24	114.30	314.04	-97.56	0.00	0.00	0.00
7,800.00	0.00	0.00	7,779.24	114.30	314.04	-97.56	0.00	0.00	0.00
7,860.76	0.00	0.00	7,840.00	114.30	314.04	-97.56	0.00	0.00	0.00
Bone Spring									
7,900.00	0.00	0.00	7,879.24	114.30	314.04	-97.56	0.00	0.00	0.00
8,000.00	0.00	0.00	7,979.24	114.30	314.04	-97.56	0.00	0.00	0.00
8,100.00	0.00	0.00	8,079.24	114.30	314.04	-97.56	0.00	0.00	0.00
8,200.00	0.00	0.00	8,179.24	114.30	314.04	-97.56	0.00	0.00	0.00
8,300.00	0.00	0.00	8,279.24	114.30	314.04	-97.56	0.00	0.00	0.00
8,400.00	0.00	0.00	8,379.24	114.30	314.04	-97.56	0.00	0.00	0.00
8,500.00	0.00	0.00	8,479.24	114.30	314.04	-97.56	0.00	0.00	0.00
8,600.00	0.00	0.00	8,579.24	114.30	314.04	-97.56	0.00	0.00	0.00
8,700.00	0.00	0.00	8,679.24	114.30	314.04	-97.56	0.00	0.00	0.00
8,800.00	0.00	0.00	8,779.24	114.30	314.04	-97.56	0.00	0.00	0.00
8,885.77	0.00	0.00	8,865.00	114.30	314.04	-97.56	0.00	0.00	0.00
1st Bone Spring Ss									
8,900.00	0.00	0.00	8,879.24	114.30	314.04	-97.56	0.00	0.00	0.00
9,000.00	0.00	0.00	8,979.24	114.30	314.04	-97.56	0.00	0.00	0.00
9,100.00	0.00	0.00	9,079.24	114.30	314.04	-97.56	0.00	0.00	0.00
9,200.00	0.00	0.00	9,179.24	114.30	314.04	-97.56	0.00	0.00	0.00

Planning Report

Database:	CRUDE_EDM	Local Co-ordinate Reference:	Well PLU 25 BD 701H_RSN 122H - Slot PLU 25 BD 701H_RSN 122H SHL
Company:	XTO ENERGY INC.	TVD Reference:	3344+22 @ 3366.00usft (122-162 AK22)
Project:	Eddy County, NM (NMEZ) NAD27 Grid	MD Reference:	3344+22 @ 3366.00usft (122-162 AK22)
Site:	Poker Lake Unit 25 BD	North Reference:	Grid
Well:	PLU 25 BD 701H_RSN 122H	Survey Calculation Method:	Minimum Curvature
Wellbore:	701H-122H		
Design:	Plan #1		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N-S (usft)	+E-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
9,300.00	0.00	0.00	9,279.24	114.30	314.04	-97.56	0.00	0.00	0.00
9,400.00	0.00	0.00	9,379.24	114.30	314.04	-97.56	0.00	0.00	0.00
9,500.00	0.00	0.00	9,479.24	114.30	314.04	-97.56	0.00	0.00	0.00
9,585.77	0.00	0.00	9,565.00	114.30	314.04	-97.56	0.00	0.00	0.00
2nd Bone Spring Ss									
9,600.00	0.00	0.00	9,579.24	114.30	314.04	-97.56	0.00	0.00	0.00
9,700.00	0.00	0.00	9,679.24	114.30	314.04	-97.56	0.00	0.00	0.00
9,800.00	0.00	0.00	9,779.24	114.30	314.04	-97.56	0.00	0.00	0.00
9,900.00	0.00	0.00	9,879.24	114.30	314.04	-97.56	0.00	0.00	0.00
10,000.00	0.00	0.00	9,979.24	114.30	314.04	-97.56	0.00	0.00	0.00
10,035.77	0.00	0.00	10,015.00	114.30	314.04	-97.56	0.00	0.00	0.00
3rd Bone Spring Lm									
10,100.00	0.00	0.00	10,079.24	114.30	314.04	-97.56	0.00	0.00	0.00
10,200.00	0.00	0.00	10,179.24	114.30	314.04	-97.56	0.00	0.00	0.00
10,300.00	0.00	0.00	10,279.24	114.30	314.04	-97.56	0.00	0.00	0.00
10,400.00	0.00	0.00	10,379.24	114.30	314.04	-97.56	0.00	0.00	0.00
10,500.00	0.00	0.00	10,479.24	114.30	314.04	-97.56	0.00	0.00	0.00
10,600.00	0.00	0.00	10,579.24	114.30	314.04	-97.56	0.00	0.00	0.00
10,700.00	0.00	0.00	10,679.24	114.30	314.04	-97.56	0.00	0.00	0.00
10,785.77	0.00	0.00	10,765.00	114.30	314.04	-97.56	0.00	0.00	0.00
3rd Bone Spring Ss									
10,800.00	0.00	0.00	10,779.24	114.30	314.04	-97.56	0.00	0.00	0.00
10,900.00	0.00	0.00	10,879.24	114.30	314.04	-97.56	0.00	0.00	0.00
11,005.95	0.00	70.00	10,985.18	114.30	314.04	-97.56	0.00	0.00	0.00
11,050.00	4.41	166.00	11,029.19	112.66	314.45	-95.90	10.00	10.00	0.00
11,100.00	9.41	166.00	11,078.81	106.83	315.91	-90.00	10.00	10.00	0.00
11,150.00	14.41	166.00	11,127.72	96.82	318.40	-79.88	10.00	10.00	0.00
11,200.00	19.41	166.00	11,175.55	82.72	321.92	-65.61	10.00	10.00	0.00
11,210.05	20.41	166.00	11,185.00	79.40	322.74	-62.25	10.00	10.00	0.00
Wolfcamp									
11,250.00	24.41	166.00	11,221.92	64.63	326.43	-47.30	10.00	10.00	0.00
11,298.29	29.23	166.00	11,265.00	43.49	331.70	-25.92	10.00	10.00	0.00
Wolfcamp Y									
11,300.00	29.41	166.00	11,266.50	42.68	331.90	-25.10	10.00	10.00	0.00
11,350.00	34.41	166.00	11,308.93	17.05	338.29	0.84	10.00	10.00	0.00
11,357.39	35.14	166.00	11,315.00	12.96	339.31	4.98	10.00	10.00	0.00
Wolfcamp A									
11,400.00	39.41	166.00	11,348.90	-12.08	345.55	30.31	10.00	10.00	0.00
11,450.00	44.41	166.00	11,386.10	-44.47	353.63	63.08	10.00	10.00	0.00
11,455.95	45.00	166.00	11,390.32	-48.53	354.64	67.19	10.00	10.00	0.00
11,500.00	49.18	167.92	11,420.31	-79.96	361.90	98.95	10.00	9.48	4.35
11,550.00	53.95	169.82	11,451.39	-118.37	369.44	137.71	10.00	9.55	3.80
11,600.00	58.75	171.50	11,479.09	-159.43	376.17	179.07	10.00	9.60	3.37
11,650.00	63.57	173.02	11,503.20	-202.82	382.05	222.71	10.00	9.64	3.04
11,700.00	68.40	174.42	11,523.55	-248.20	387.04	268.29	10.00	9.67	2.80
11,750.00	73.25	175.73	11,539.96	-295.24	391.08	315.48	10.00	9.69	2.61
11,800.00	78.10	176.97	11,552.33	-343.57	394.16	363.90	10.00	9.71	2.48
11,850.00	82.96	178.17	11,560.55	-392.83	396.25	413.20	10.00	9.72	2.40
11,872.47	85.14	178.70	11,562.88	-415.17	396.86	435.54	10.00	9.72	2.36
PLU 25 BD 701H_RSN 122H FTP_350FNL_161FEL									
11,900.00	87.82	179.34	11,564.57	-442.64	397.33	463.00	10.00	9.72	2.34
PLU 25 BD 122H_RSN 162H FTP_350FNL_161FEL - PLU 25 BD 102H_RSN 152H FTP_350FNL_581FEL									

Planning Report

Database: CRUDE_EDM

Local Co-ordinate Reference:

Well PLU 25 BD 701H_RSN 122H - Slot PLU
25 BD 701H_RSN 122H SHL

Company: XTO ENERGY INC.

TVD Reference:

3344+22 @ 3366.00usft (122-162 AK22)

Project: Eddy County, NM (NMEZ) NAD27 Grid

MD Reference:

3344+22 @ 3366.00usft (122-162 AK22)

Site: Poker Lake Unit 25 BD

North Reference:

Grid

Well: PLU 25 BD 701H_RSN 122H

Survey Calculation Method:

Minimum Curvature

Wellbore: 701H-122H

Design: Plan #1

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
11,922.40	90.00	179.86	11,565.00	-465.04	397.48	485.38	10.00	9.72	2.33
LP - PLU 25 BD 701H_RSN 122H LP (50' Past FTP)									
12,000.00	90.00	179.86	11,565.00	-542.64	397.66	562.87	0.00	0.00	0.00
12,100.00	90.00	179.86	11,565.00	-642.63	397.90	662.75	0.00	0.00	0.00
12,200.00	90.00	179.86	11,565.00	-742.63	398.14	762.62	0.00	0.00	0.00
12,300.00	90.00	179.86	11,565.00	-842.63	398.37	862.49	0.00	0.00	0.00
12,400.00	90.00	179.86	11,565.00	-942.63	398.61	962.37	0.00	0.00	0.00
12,500.00	90.00	179.86	11,565.00	-1,042.63	398.84	1,062.24	0.00	0.00	0.00
12,600.00	90.00	179.86	11,565.00	-1,142.63	399.08	1,162.11	0.00	0.00	0.00
12,700.00	90.00	179.86	11,565.00	-1,242.63	399.32	1,261.98	0.00	0.00	0.00
12,800.00	90.00	179.86	11,565.00	-1,342.63	399.55	1,361.86	0.00	0.00	0.00
12,900.00	90.00	179.86	11,565.00	-1,442.63	399.79	1,461.73	0.00	0.00	0.00
13,000.00	90.00	179.86	11,565.00	-1,542.63	400.02	1,561.60	0.00	0.00	0.00
13,100.00	90.00	179.86	11,565.00	-1,642.63	400.26	1,661.47	0.00	0.00	0.00
13,200.00	90.00	179.86	11,565.00	-1,742.63	400.50	1,761.35	0.00	0.00	0.00
13,300.00	90.00	179.86	11,565.00	-1,842.63	400.73	1,861.22	0.00	0.00	0.00
13,400.00	90.00	179.86	11,565.00	-1,942.63	400.97	1,961.09	0.00	0.00	0.00
13,500.00	90.00	179.86	11,565.00	-2,042.63	401.20	2,060.96	0.00	0.00	0.00
13,600.00	90.00	179.86	11,565.00	-2,142.63	401.44	2,160.84	0.00	0.00	0.00
13,700.00	90.00	179.86	11,565.00	-2,242.63	401.68	2,260.71	0.00	0.00	0.00
13,800.00	90.00	179.86	11,565.00	-2,342.63	401.91	2,360.58	0.00	0.00	0.00
13,900.00	90.00	179.86	11,565.00	-2,442.63	402.15	2,460.46	0.00	0.00	0.00
14,000.00	90.00	179.86	11,565.00	-2,542.63	402.38	2,560.33	0.00	0.00	0.00
14,100.00	90.00	179.86	11,565.00	-2,642.63	402.62	2,660.20	0.00	0.00	0.00
14,200.00	90.00	179.86	11,565.00	-2,742.63	402.85	2,760.07	0.00	0.00	0.00
14,300.00	90.00	179.86	11,565.00	-2,842.63	403.09	2,859.95	0.00	0.00	0.00
14,400.00	90.00	179.86	11,565.00	-2,942.63	403.33	2,959.82	0.00	0.00	0.00
14,500.00	90.00	179.86	11,565.00	-3,042.63	403.56	3,059.69	0.00	0.00	0.00
14,600.00	90.00	179.86	11,565.00	-3,142.63	403.80	3,159.56	0.00	0.00	0.00
14,700.00	90.00	179.86	11,565.00	-3,242.63	404.03	3,259.44	0.00	0.00	0.00
14,800.00	90.00	179.86	11,565.00	-3,342.63	404.27	3,359.31	0.00	0.00	0.00
14,900.00	90.00	179.86	11,565.00	-3,442.63	404.51	3,459.18	0.00	0.00	0.00
15,000.00	90.00	179.86	11,565.00	-3,542.63	404.74	3,559.06	0.00	0.00	0.00
15,100.00	90.00	179.86	11,565.00	-3,642.63	404.98	3,658.93	0.00	0.00	0.00
15,200.00	90.00	179.86	11,565.00	-3,742.63	405.21	3,758.80	0.00	0.00	0.00
15,300.00	90.00	179.86	11,565.00	-3,842.63	405.45	3,858.67	0.00	0.00	0.00
15,400.00	90.00	179.86	11,565.00	-3,942.63	405.69	3,958.55	0.00	0.00	0.00
15,500.00	90.00	179.86	11,565.00	-4,042.63	405.92	4,058.42	0.00	0.00	0.00
15,600.00	90.00	179.86	11,565.00	-4,142.63	406.16	4,158.29	0.00	0.00	0.00
15,700.00	90.00	179.86	11,565.00	-4,242.62	406.39	4,258.16	0.00	0.00	0.00
15,800.00	90.00	179.86	11,565.00	-4,342.62	406.63	4,358.04	0.00	0.00	0.00
15,900.00	90.00	179.86	11,565.00	-4,442.62	406.87	4,457.91	0.00	0.00	0.00
16,000.00	90.00	179.86	11,565.00	-4,542.62	407.10	4,557.78	0.00	0.00	0.00
16,100.00	90.00	179.86	11,565.00	-4,642.62	407.34	4,657.66	0.00	0.00	0.00
16,200.00	90.00	179.86	11,565.00	-4,742.62	407.57	4,757.53	0.00	0.00	0.00
16,300.00	90.00	179.86	11,565.00	-4,842.62	407.81	4,857.40	0.00	0.00	0.00
16,400.00	90.00	179.86	11,565.00	-4,942.62	408.05	4,957.27	0.00	0.00	0.00
16,500.00	90.00	179.86	11,565.00	-5,042.62	408.28	5,057.15	0.00	0.00	0.00
16,600.00	90.00	179.86	11,565.00	-5,142.62	408.52	5,157.02	0.00	0.00	0.00
16,700.00	90.00	179.86	11,565.00	-5,242.62	408.75	5,256.89	0.00	0.00	0.00
16,800.00	90.00	179.86	11,565.00	-5,342.62	408.99	5,356.76	0.00	0.00	0.00
16,900.00	90.00	179.86	11,565.00	-5,442.62	409.23	5,456.64	0.00	0.00	0.00
17,000.00	90.00	179.86	11,565.00	-5,542.62	409.46	5,556.51	0.00	0.00	0.00

Planning Report

Database:	CRUDE_EDM	Local Co-ordinate Reference:	Well PLU 25 BD 701H_RSN 122H - Slot PLU 25 BD 701H_RSN 122H SHL
Company:	XTO ENERGY INC.	TVD Reference:	3344+22 @ 3366.00usft (122-162 AK22)
Project:	Eddy County, NM (NMEZ) NAD27 Grid	MD Reference:	3344+22 @ 3366.00usft (122-162 AK22)
Site:	Poker Lake Unit 25 BD	North Reference:	Grid
Well:	PLU 25 BD 701H_RSN 122H	Survey Calculation Method:	Minimum Curvature
Wellbore:	701H-122H		
Design:	Plan #1		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
17,100.00	90.00	179.86	11,565.00	-5,642.62	409.70	5,656.38	0.00	0.00	0.00
17,200.00	90.00	179.86	11,565.00	-5,742.62	409.93	5,756.25	0.00	0.00	0.00
17,300.00	90.00	179.86	11,565.00	-5,842.62	410.17	5,856.13	0.00	0.00	0.00
17,400.00	90.00	179.86	11,565.00	-5,942.62	410.41	5,956.00	0.00	0.00	0.00
17,500.00	90.00	179.86	11,565.00	-6,042.62	410.64	6,055.87	0.00	0.00	0.00
17,600.00	90.00	179.86	11,565.00	-6,142.62	410.88	6,155.75	0.00	0.00	0.00
17,700.00	90.00	179.86	11,565.00	-6,242.62	411.11	6,255.62	0.00	0.00	0.00
17,800.00	90.00	179.86	11,565.00	-6,342.62	411.35	6,355.49	0.00	0.00	0.00
17,900.00	90.00	179.86	11,565.00	-6,442.62	411.59	6,455.36	0.00	0.00	0.00
18,000.00	90.00	179.86	11,565.00	-6,542.62	411.82	6,555.24	0.00	0.00	0.00
18,100.00	90.00	179.86	11,565.00	-6,642.62	412.06	6,655.11	0.00	0.00	0.00
18,200.00	90.00	179.86	11,565.00	-6,742.62	412.29	6,754.98	0.00	0.00	0.00
18,300.00	90.00	179.86	11,565.00	-6,842.62	412.53	6,854.85	0.00	0.00	0.00
18,400.00	90.00	179.86	11,565.00	-6,942.62	412.77	6,954.73	0.00	0.00	0.00
18,500.00	90.00	179.86	11,565.00	-7,042.62	413.00	7,054.60	0.00	0.00	0.00
18,600.00	90.00	179.86	11,565.00	-7,142.62	413.24	7,154.47	0.00	0.00	0.00
18,700.00	90.00	179.86	11,565.00	-7,242.62	413.47	7,254.35	0.00	0.00	0.00
18,800.00	90.00	179.86	11,565.00	-7,342.62	413.71	7,354.22	0.00	0.00	0.00
18,900.00	90.00	179.86	11,565.00	-7,442.62	413.95	7,454.09	0.00	0.00	0.00
19,000.00	90.00	179.86	11,565.00	-7,542.62	414.18	7,553.96	0.00	0.00	0.00
19,100.00	90.00	179.86	11,565.00	-7,642.62	414.42	7,653.84	0.00	0.00	0.00
19,174.58	90.00	179.86	11,565.00	-7,717.20	414.59	7,728.33	0.00	0.00	0.00
PLU 25 BD 122H_RSN 162H LTP_330FSL_160FEL - PLU 25 BD 701H_RSN 122H LTP_330FSL_160FEL									
19,176.89	90.00	179.86	11,565.00	-7,719.51	414.60	7,730.63	0.00	0.00	0.00
PLU 25 BD 102H_RSN 152H LTP_330FSL_580FEL									
19,200.00	90.00	179.86	11,565.00	-7,742.62	414.65	7,753.71	0.00	0.00	0.00
19,304.59	90.00	179.86	11,565.00	-7,847.20	414.90	7,858.16	0.00	0.00	0.00
PLU 25 BD 701H_RSN 122H PBHL_200FSL_160FEL - PLU 25 BD 102H_RSN 152H PBHL_200FSL_580FEL - PLU 25 BD 122H_RSN 162H PI									

Design Targets

Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
PLU 25 BD 701H_RSN - hit/miss target - Shape - plan hits target center - Point	0.00	0.00	0.00	0.00	0.00	400,909.60	652,665.30	32° 6' 4.525 N	103° 50' 25.139 W
PLU 25 BD 701H_RSN - plan hits target center - Rectangle (sides W100.00 H7,433.00 D0.00)	0.00	0.00	11,565.00	-7,847.20	414.90	393,062.40	653,080.20	32° 4' 46.849 N	103° 50' 20.733 W
PLU 25 BD 701H_RSN - plan hits target center - Point	0.00	0.00	11,565.00	-465.04	397.48	400,444.56	653,062.78	32° 5' 59.905 N	103° 50' 20.542 W
PLU 25 BD 701H_RSN - plan misses target center by 2.13usft at 11872.47usft MD (11562.88 TVD, -415.17 N, 396.86 E) - Point	0.00	0.00	11,565.00	-415.00	396.70	400,494.60	653,062.00	32° 6' 0.400 N	103° 50' 20.549 W
PLU 25 BD 701H_RSN - plan misses target center by 0.29usft at 19174.58usft MD (11565.00 TVD, -7717.20 N, 414.59 E) - Point	0.00	0.00	11,565.00	-7,717.20	414.30	393,192.40	653,079.60	32° 4' 48.135 N	103° 50' 20.733 W

Planning Report

Database:	CRUDE_EDM	Local Co-ordinate Reference:	Well PLU 25 BD 701H_RSN 122H - Slot PLU 25 BD 701H_RSN 122H SHL
Company:	XTO ENERGY INC.	TVD Reference:	3344+22 @ 3366.00usft (122-162 AK22)
Project:	Eddy County, NM (NMEZ) NAD27 Grid	MD Reference:	3344+22 @ 3366.00usft (122-162 AK22)
Site:	Poker Lake Unit 25 BD	North Reference:	Grid
Well:	PLU 25 BD 701H_RSN 122H	Survey Calculation Method:	Minimum Curvature
Wellbore:	701H-122H		
Design:	Plan #1		

Formations						
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)	
965.00	965.00	Rustler				
1,215.00	1,215.00	Top Salt				
3,815.16	3,815.00	Base Salt				
4,015.70	4,015.00	Delaware				
7,860.76	7,840.00	Bone Spring				
8,885.77	8,865.00	1st Bone Spring Ss				
9,585.77	9,565.00	2nd Bone Spring Ss				
10,035.77	10,015.00	3rd Bone Spring Lm				
10,785.77	10,765.00	3rd Bone Spring Ss				
11,210.05	11,185.00	Wolfcamp				
11,298.29	11,265.00	Wolfcamp Y				
11,357.39	11,315.00	Wolfcamp A				
11,922.40	11,565.00	LP				

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	XTO Permian Operating, LLC
LEASE NO.:	NMLC-0063079A
WELL NAME & NO.:	Poker Lake Unit 25 BD 701H
SURFACE HOLE FOOTAGE:	2595' FNL & 0772' FWL
BOTTOM HOLE FOOTAGE:	0200' FSL & 1170' FWL Sec. 36, T. 25 S., R 30 E.
LOCATION:	Section 25, T. 25 S., R 30 E., NMPM
COUNTY:	Eddy County, New Mexico

The original COAs still stand with the following drilling modifications:

Commercial Well Determination

A commercial well determination shall be submitted after production has been established for at least six months.

Unit Wells

The well sign for a unit well shall include the unit number in addition to the surface and bottom hole lease numbers. This also applies to participating area numbers. If a participating area has not been established, the operator can use the general unit designation, but will replace the unit number with the participating area number when the sign is replaced.

A. DRILLING OPERATIONS REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- Spudding well (minimum of 24 hours)
- Setting and/or Cementing of all casing strings (minimum of 4 hours)
- BOPE tests (minimum of 4 hours)

☒ **Eddy County**

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,
(575) 361-2822

- Hydrogen Sulfide (H₂S) monitors shall be installed prior to drilling out the surface shoe. If H₂S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, provide measured values and formations to the BLM.**
- Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval. If the drilling rig is removed without approval – an Incident of Non-Compliance will be written and will be a “Major” violation.**

3. The operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other wells.
4. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works is located, this does not include the dog house or stairway area.
5. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

B. CASING

Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.

Centralizers required on surface casing per Onshore Order 2.III.B.1.f.

Wait on cement (WOC) for Water Basin:

After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements.

Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.

No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.

Possibility of water flows in the Salado and Castile.

Possibility of lost circulation in the Red Beds, Rustler, and Delaware.

Abnormal pressure may be encountered in the 3rd Bone Spring and all subsequent formations.

1. The 13-3/8 inch surface casing shall be set at approximately 1090 feet (a minimum of 25 feet into the Rustler Anhydrite and above the salt) and cemented to the surface. **If salt is encountered, set casing at least 25 feet above the salt.**
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry.**
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.

Formation below the 13-3/8" shoe to be tested according to Onshore Order

2.III.B.1.i. Test to be done as a mud equivalency test using the mud weight necessary for the pore pressure of the formation below the shoe and the mud weight for the bottom of the hole. Report results to BLM office.

2. The minimum required fill of cement behind the 9-5/8 inch intermediate casing is:

☒ Cement to surface. If cement does not circulate see B.1.a, c-d above.

Formation below the 9-5/8" shoe to be tested according to Onshore Order 2.III.B.1.i.

Test to be done as a mud equivalency test using the mud weight necessary for the pore pressure of the formation below the shoe (not the mud weight required to prevent dissolving the salt formation) and the mud weight for the bottom of the hole. Report results to BLM office.

Centralizers required on horizontal leg, must be type for horizontal service and a minimum of one every other joint.

3. The minimum required fill of cement behind the 7 inch production casing is:

☒ Cement should tie-back at least 200 feet into previous casing string. Operator shall provide method of verification.

Formation below the 7" shoe to be tested according to Onshore Order 2.III.B.1.i. Test to be done as a mud equivalency test using the mud weight necessary for the pore pressure of the formation below the shoe and the mud weight for the bottom of the hole. Report results to BLM office.

4. The minimum required fill of cement behind the 4-1/2 inch production Liner is:

☒ Cement as proposed. Operator shall provide method of verification. **Excess calculates to 13% - Additional cement may be required.**

5. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.

C. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API 53.
2. Variance approved to use flex line from BOP to choke manifold. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. **Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.** If the BLM inspector questions the straightness of the hose, a BLM engineer will be contacted and will review in the field or via picture supplied by inspector to determine if changes are required (operator shall expect delays if this occurs).
3. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M) psi. 5M system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.**

4. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
- a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - b. The tests shall be done by an independent service company utilizing a test plug **not a cup or J-packer**.
 - c. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
 - d. The results of the test shall be reported to the appropriate BLM office.
 - e. All tests are required to be recorded on a calibrated test chart. **A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.**
 - f. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
 - g. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the **Wolfcamp** formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

D. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the **Wolfcamp** formation, and shall be used until production casing is run and cemented.

E. DRILL STEM TEST

If drill stem tests are performed, Onshore Order 2.III.D shall be followed.

F. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

JAM 071719