

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)


1. oil ☒ well gas ☐ well other ☐
2. NAME OF OPERATOR
Mesa Petroleum Company
3. ADDRESS OF OPERATOR
1660 Lincoln St., #2800, Denver CO 80264
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 1650' FNL, 330' FEL
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) Spud Notice & BOP Test

SUBSEQUENT REPORT OF:

☐
☐
☐
☐
☐
☐
☐
☐
☐
☐

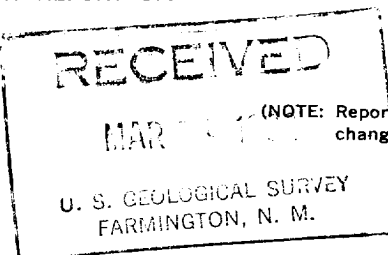

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Subject well was spudded at 5:00 p.m. on 3/2/82 using a 12 1/4" bit. Drilled to 238', ran 6 joints 8-5/8" 24#/ft. new K-55 STC surface casing and set at 234'. Cemented casing with 200 sacks Class "B". Circulated 10 bbls slurry to the surface. Tested BOP to 1000 psi for 30 minutes - held O. K. Please change elevation on original APD to 7128' GL.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____

18. I hereby certify that the foregoing is true and correct

SIGNED Randy Nordman TITLE Reg. Coordinator DATE 3/5/82

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

*See Instructions on Reverse Side

NMOCC

RECEIVED FOR RECORD

MAR 16 1982

FARMINGTON DISTRICT
BY [Signature]