

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

**SUNDRY NOTICES AND REPORTS ON WELLS**

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ well    gas ☒ well    other ☐  
2. NAME OF OPERATOR  
Robert L. Bayless  
3. ADDRESS OF OPERATOR  
P.O. Box 1541, Farmington, NM 87401  
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
AT SURFACE: 1800' FSL & 1790' FWL  
AT TOP PROD. INTERVAL: same  
AT TOTAL DEPTH: same


16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐  
FRACTURE TREAT ☐  
SHOOT OR ACIDIZE ☐  
REPAIR WELL ☐  
PULL OR ALTER CASING ☐  
MULTIPLE COMPLETE ☐  
CHANGE ZONES ☐  
ABANDON\* ☐

(other) Spud, set surface csg.

SUBSEQUENT REPORT OF:

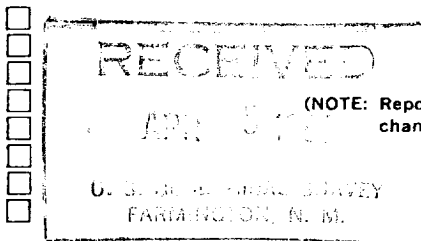

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

5. LEASE  
Contract 77  
6. IF INDIAN, ALLOTTEE OR TRIBE NAME  
Jicarilla  
7. UNIT AGREEMENT NAME  
8. FARM OR LEASE NAME  
AXI "A"  
9. WELL NO.  
11  
10. FIELD OR WILDCAT NAME  
Ballard Pic. Cliffs  
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
Sec. 15, T23N, R5W  
12. COUNTY OR PARISH  
Rio Arriba  
13. STATE  
N.M.  
14. API NO.  
15. ELEVATIONS (SHOW DF, KDB, AND WD)  
6733' GL

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

04-04-82 Spud well at 12:00 midnight 04-04-82. Drilled 96 ft. of 9-7/8" hole. Ran 84.5 ft. of 7", 23#/ft., J-55 used casing. Set casing at 95 ft. RKB. Rigged up Cementers Inc. and cemented surface casing with 50 sacks Class "B" cement with 2% CaCl. Good circulation throughout job. Circulated nine (9) sacks of cement to the surface. Plug down at 2:30 a.m. 04-04-82. WOC 8 hrs. Pressure tested casing to 600 psi; held okay.

04-05-82 Drilling at 1348 ft.

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED [Signature] TITLE Operator DATE April 5, 1982

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_  
CONDITIONS OF APPROVAL, IF ANY:

ACCEPTED FOR RECORD

\*See Instructions on Reverse Side

NMOCC

APR 10 1982

FARMINGTON DISTRICT

BY Smm