

SUNDRY NOTICES AND REPORTS ON WELLS

1. oil well ☒ gas well ☐ other ☐

Jack A. Cole

P.O. Box 191, Farmington, N.M. 87499

AT SURFACE: 640' FSL, 2005' FWL

AT TOP PROD. INTERVAL: Same

AT TOTAL DEPTH: *Same*

SUBSEQUENT REPORT OF:

TEST WATER SHUT-OFF	☐
FRACTURE TREAT	☐
SHOOT OR ACIDIZE	☐
REPAIR WELL	☐
PULL OR ALTER CASING	☐
MULTIPLE COMPLETE	☐
CHANGE ZONES	☐
ABANDON*	☐
(other)	

[illegible]

RECEIVED

OCT 15 1986

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

BUREAU OF LAND MANAGEMENT
FARMINGTON RESOURCE AREA

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

See Attached for Casing and Cement Summary

RECEIVED
NOV 05 1986
OIL CON. DIV.
DIST. 3

ACCEPTED FOR RECORD
NOV 03 1988
FARMINGTON RESOURCE AREA
BY EGB

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct.

SIGNED Dennis Blum TITLE Superintendent DATE October 13, 1986

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL IF ANY: _____

NMOCC

Cole Production Co.

(505) 325-1415
P.O. Box 191
3001 Northridge Dr.
Farmington, New Mexico 87499

JACK A. COLE


MARCUS NO. 7

CASING AND CEMENT SUMMARY

9-18-86 TD 5790' KB. Ran 138 joints $4\frac{1}{2}$ ", 10.50 lb., K-55 casing, measured 5777.43', set at 5789.43'.

Cemented first stage through float collar at 5742.34 with 10 bbls. mud flush followed by 400 sacks (576 cu. ft.), 50-50 pozmix, 2% Gel, $6\frac{1}{4}$ lbs. Gilsonite and 6 lbs. salt per sack. Plug down at 12:40 P.M. 9-18-86. Calculated top of cement to be at 3758'. Circulate 3 hours between stages.

Cemented second stage through stage collar at 2257.64' with 10 bbls. mud flush followed by 225 sacks (515 cu. ft.), 65-35 pozmix, 12% Gel and $6\frac{1}{4}$ lbs. Gilsonite per sack followed by 50 sacks (59 cu. ft.), Class "B" cement. Plug down 4:15 P.M. 9-18-86. Top of cement by temperature log to be at 665'.

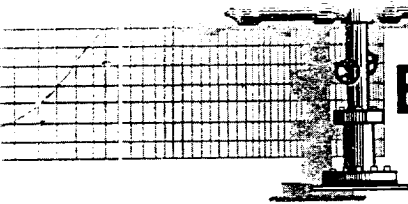

TEFTELLER, INC.

reservoir engineering data

MIDLAND, TEXAS / FARMINGTON, NEW MEXICO
GRAND JUNCTION, COLORADO

P. O. Box 5247
Midland, Texas 79704
(915) 682-5574

October 7, 1986

Jack A. Cole Production Company
Box 191
Farmington, NM 87499

Attention: Mr. Jack A. Cole

Subject: Temperature Survey
Marcus No. 7
Rio Arriba County, New Mexico
Our File No. 2-18269-TS

Gentlemen:

Attached hereto are the results of a temperature survey which was conducted on the above captioned well September 19, 1986.

The data presented are in graphical form.


It has been our pleasure to have conducted this service for you. If we may be of further assistance, please call us at any time.

Respectfully submitted,

TEFTELLER, INC.

Neil Tefteller

NT/lw



LEFFELLER, INC.


reservoir engineering data

MIDLAND, TEXAS

Page 1 of 1
File 2-18269-TS

TEMPERATURE SURVEY LOG

DEPTH

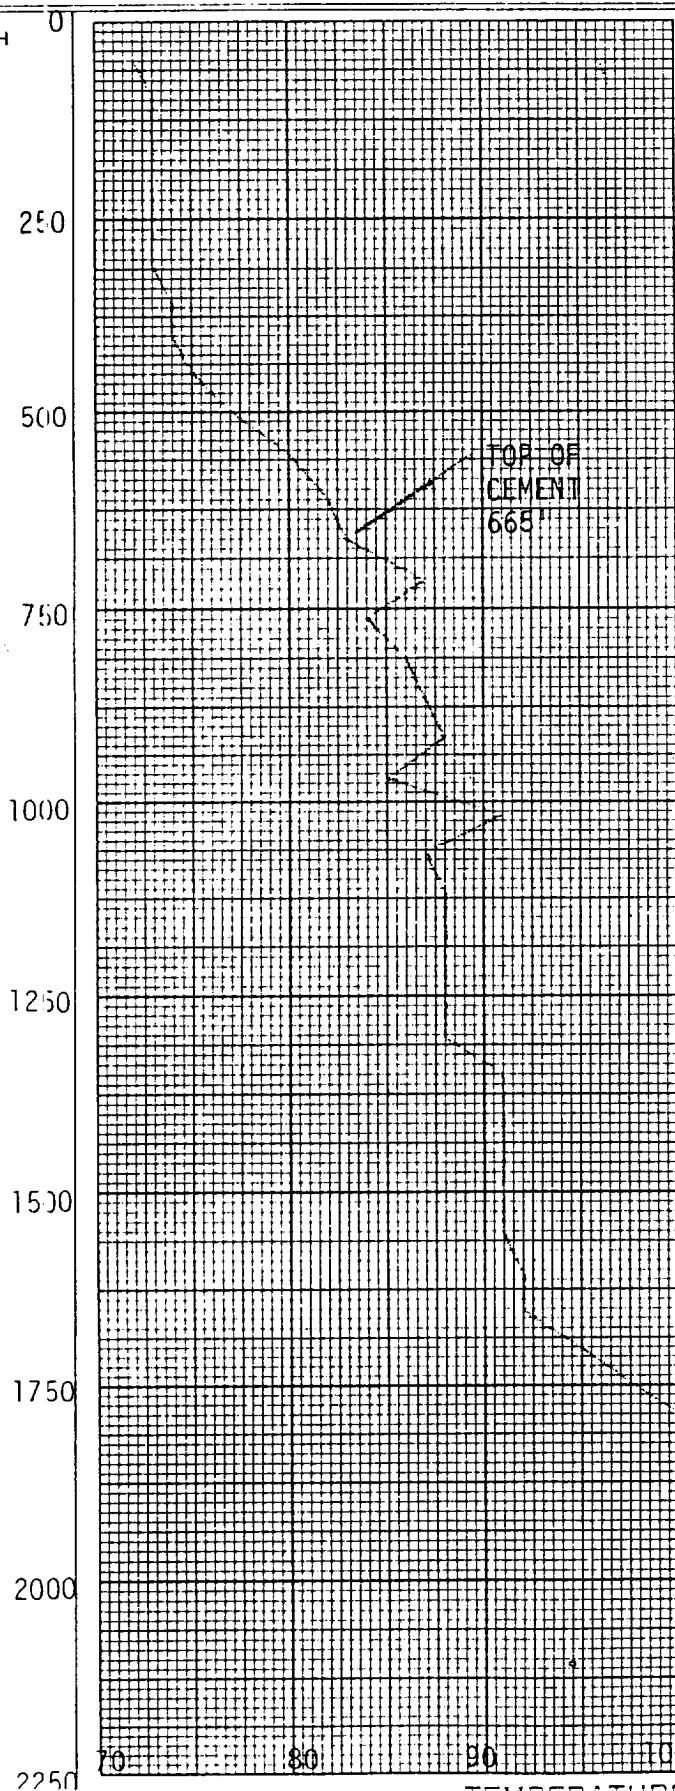

COMPANY JACK A. COLE PRODUCTION CO.
LEASE MARCUS WELL NO. 7
FIELD _____
COUNTY RIO ARRIBA STATE NEW MEXICO
Casing size _____ set @ _____
Hole size _____ to _____
Cement _____
Plug down 9/18/86 time 16:30
Survey run 9/19/86 time 07:00
Top of cement 665
Total depth recorded _____
Recorded by _____
Remarks _____

TEMPERATURE IN DEGREES FAHRENHEIT